




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F23C 6/04, F23L 7/00, F23C 1/12, F23N 5/00	A1	(11) International Publication Number: WO 99/08045 (43) International Publication Date: 18 February 1999 (18.02.99)
(21) International Application Number: PCT/US98/16337 (22) International Filing Date: 10 August 1998 (10.08.98) (30) Priority Data: 08/908,824 8 August 1997 (08.08.97) US (71) Applicant: GAS RESEARCH INSTITUTE [US/US]; 8600 West Bryn Mawr Avenue, Chicago, IL 60631 (US). (72) Inventors: HURA, Harjit, S.; 12105 Brisben Place, Cincinnati, OH 45249 (US). BREEN, Bernard, P.; 630-B Trimont Lane, Pittsburgh, PA 15222 (US). (74) Agents: FEJER, Mark, E. et al.; Speckman Pauley Petersen & Fejer, Suite 365, 2800 West Higgins Road, Hoffman Estates, IL 60195 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims and statement.</i>	

(54) Title: NITROGEN OXIDE REDUCTION BY GASEOUS FUEL INJECTION IN LOW TEMPERATURE, OVERALL FUEL-LEAN FLUE GAS

(57) Abstract

A process and apparatus for combustion of a solid carbonaceous material, for example coal, in which a mixture of the solid carbonaceous material and combustion air is injected into a combustion chamber and ignited, thereby forming a fuel-lean primary combustion zone. A gaseous fuel is injected into the combustion chamber in a region downstream of the primary combustion zone, thereby forming a fuel-lean secondary combustion zone. Temperature in the secondary combustion zone is in the range of about 1800 °F to 2400 °F.

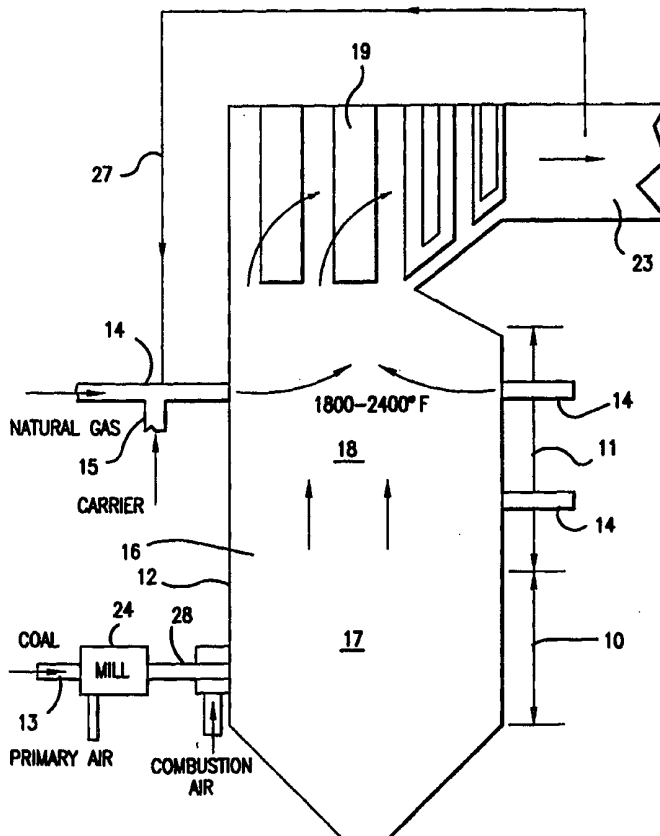

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

NITROGEN OXIDE REDUCTION BY GASEOUS FUEL INJECTION IN LOW TEMPERATURE, OVERALL FUEL-LEAN FLUE GAS

BACKGROUND OF THE INVENTION

This invention relates to a fuel reburn process and apparatus for reduction of NO_x emissions resulting from the combustion of solid carbonaceous materials, such as coal, in boilers, fluidized bed combustors, and similar combustion devices. In addition to reducing NO_x emissions from boilers and similar devices, the fuel reburn process and apparatus of this invention also maintain CO emissions at environmentally acceptable levels without the addition of air or oxygen downstream of the fuel reburn zone.

DESCRIPTION OF PRIOR ART

The utilization of coal for power generation results in emission of nitric oxides (NO_x) which are formed primarily as a result of oxidation of the nitrogen inherent in the coal and oxidation of molecular nitrogen present in the combustion air. Nitric oxides released in the atmosphere contribute to acid rain, accelerate the photochemical reactions responsible for smog, and result in increased ground level ozone concentrations. The emission of nitric oxides from existing coal burning power plants is governed by Title I and Title IV of the Clean Air Act Amendments of 1990. Title IV limits the allowable NO_x emissions to 0.45 pounds per MBtu for tangential fired boilers and 0.50 pounds per MBtu (approximately 375 ppm) for wall fired boilers. NO_x emission limits at 0.20 pounds per MBtu have been proposed in the ozone non-attainment areas under Title I, and have been targeted for decade end implementation under the Ozone Transport Region Memorandum of Understanding.

One technique for reducing the amount of NO_x produced in a combustion process and, thus, emitted by said combustion process, is the use of fuel-rich reburn. Such a reburn process is taught, for example, by U.S. Patent 5,020,456; U.S. Patent 5,105,747; U.S. Patent 5,307,746; and U.S. Patent 5,205,227. Each of these U.S. patents teaches a process and apparatus for emissions reduction from waste incineration in which a combustible material is burned in a primary combustion zone in the lower region of a combustion chamber, and an oxygen deficient secondary combustion zone for mixing with the combustion products from the primary combustion zone is formed by the injection of fuel, a calcined sorbent, recirculated flue gases, and, in some instances, a carrier fluid injected into the combustion chamber above the primary combustion zone. In each case, however, overfire air is injected into the

combustion chamber above the oxygen deficient secondary combustion zone to ensure complete combustion of any remaining combustible materials in the combustion products from the oxygen deficient secondary combustion zone. The use of overfire air is necessary to ensure that no unburned hydrocarbons are exhausted by the combustion process. The requirement for overfire air adds significant capital and operating costs.

SUMMARY OF THE INVENTION

Accordingly, it is one object of this invention to provide a process for combustion of a solid carbonaceous material, such as coal, which reduces the amount of NO_x emissions generated and emitted compared to conventional coal combustion processes.

It is another object of this invention to provide a process and apparatus for combustion of a solid carbonaceous material which reduces NO_x emissions in the range of 20-60% over conventional uncontrolled combustion processes.

It is yet another object of this invention to provide a process for combustion of a solid carbonaceous material by employing a fuel reburn process which maintains CO at environmentally acceptable levels but does not require the use of overfire air injection, thereby reducing both the capital and operating costs as compared to combustion processes utilizing conventional reburn technology.

It is yet another object of this invention to provide a process and apparatus for combustion of a solid carbonaceous material which does not give rise to slagging and fouling problems like other low NO_x technologies.

These and other objects of this invention are achieved by a process for combustion of a solid carbonaceous material, such as pulverized or crushed coal, comprising injecting a mixture of the solid carbonaceous material and combustion air into a combustion chamber and igniting the mixture, thereby forming a fuel-lean primary combustion zone, and injecting a gaseous fuel into the combustion chamber in a region above, or downstream of, the primary combustion zone, thereby forming a fuel-lean secondary combustion zone. The secondary combustion zone has a temperature in the range of about 1800°F to about 2400°F. The conditions in this secondary combustion zone are not favorable for producing CO and, thus, CO is not produced in amounts sufficient to require the injection of air or oxygen downstream of the second combustion zone in order to maintain CO emissions at acceptable levels.

In accordance with a particularly preferred embodiment of the process of this

invention, the gaseous fuel injected into the combustion chamber to form the fuel-lean secondary combustion zone is natural gas. In accordance with another embodiment of this invention, the gaseous fuel is injected into the combustion chamber together with a carrier fluid.

The apparatus for combustion of a solid carbonaceous material in accordance with one embodiment of this invention comprises at least one combustion chamber wall enclosing a combustion chamber, the combustion chamber having an upstream portion and a downstream portion, fuel injection means for injecting the pulverized solid carbonaceous material into the upstream portion of the combustion chamber, gaseous fuel injection means for injecting a gaseous fuel into the downstream portion of the combustion chamber, and feedback means for maintaining an oxygen content in the flue gases exhausted from the combustion chamber in a range of about 1.0% to 2.0%. In accordance with one embodiment of the apparatus of this invention, the gaseous fuel injection means comprises a carrier fluid injection means for injecting a carrier fluid together with the gaseous fuel into the combustion chamber.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of this invention will be better understood from the following detailed description taken in conjunction with the drawings wherein:

Fig. 1 is a schematic diagram of a conventional combustion apparatus utilizing reburn as a means for controlling NO_x emissions;

Fig. 2 is a schematic diagram of one gaseous fuel injector for a combustion apparatus in accordance with one embodiment of this invention;

Fig. 3 is a schematic diagram of a gaseous fuel injector for a combustion apparatus in accordance with another embodiment of this invention;

Fig. 4 is a schematic diagram of a combustion apparatus utilizing the fuel reburn process of this invention; and

Fig. 5 is a diagram showing equilibrium NO concentrations in typical flue gases as a function of temperature and oxygen content.

DESCRIPTION OF PREFERRED EMBODIMENTS

NO_x emissions from boilers are a result of chemical kinetic and not thermodynamic limitations. Fig. 5 shows the equilibrium NO concentrations in typical flue gases from a boiler as a function of temperature and oxygen content. The equilibrium NO

concentration decreases rapidly with decreasing flue gas temperature, and concentrations of NO under 100 ppm are predicted at flue gas temperatures of 1800°F. Therefore, NO emissions from boilers are a result of quenching of the NO equilibrating chemistry. Conventional in-furnace and back-end NO_x control technologies remove the chemical kinetic constraints to NO equilibration by injecting small amounts of natural gas and amine (NH₃) based compounds, such as ammonia and urea, into the combustion chamber.

A conventional fuel reburning process for a coal-fired boiler is shown in Fig. 1. Coal is introduced through fuel injection means 13 into a lower, or upstream, region of combustion chamber 16 forming primary combustion zone, as indicated by arrows 10, having a stoichiometry of air/fuel of about 1.1. Air and natural gas, the natural gas comprising about 20% of the total heat input to the combustion chamber 16 are introduced through gaseous fuel injection means 14 into an upper, or downstream, region of combustion chamber 16, creating a secondary combustion zone, as indicated by arrows 11, above, or downstream of, the primary combustion zone 10, the secondary combustion zone being oxygen deficient, that is, having a zone stoichiometry of about 0.9. As a result, conventional reburn processes require the addition of overfire air through overfire air injection means 26 to create a tertiary combustion zone 25 above, or downstream of, the secondary combustion zone 11 to ensure complete combustion of any combustibles in the combustion products from the secondary combustion zone 11. As shown in Fig. 1, the stoichiometry of the tertiary combustion zone 25 is fuel-lean, typically about 1.16. As compared to the process and apparatus of this invention, the conventional reburn process requires greater quantities of gas and the use of overfire air, both of which increase the costs associated with NO_x control.

The process for combustion of a solid carbonaceous material in accordance with one embodiment of this invention comprises injecting a mixture of solid carbonaceous material, preferably coal, and combustion air into a combustion chamber and igniting the mixture, thereby forming a fuel-lean primary combustion zone 10 as shown in Fig. 4. The stoichiometric ratio in the primary combustion zone 10 is preferably in the range of about 1.05-1.30. A gaseous fuel is injected into the combustion chamber in a region above, or downstream of, the primary combustion zone 10, forming a fuel-lean secondary combustion zone 11. The stoichiometric ratio in the fuel-lean secondary combustion zone 11 is preferably in the range of about 1.05-1.15. To inhibit the formation of NO_x in the secondary combustion zone, the secondary combustion zone 11 has a temperature in the range of about 1800°F to

2400°F. In accordance with a particularly preferred embodiment of this invention, the gaseous fuel injected into the combustion chamber above, or downstream of, the primary combustion zone 10 is natural gas in an amount comprising in the range of about 2% to 15% of the total amount of heat input to the combustion chamber. Although the description of this invention is geared toward a solid fuel combustor in which the solid fuel is introduced into a lower region of the combustion chamber and reburn fuel is introduced into a region of the combustion chamber "above" the lower region, there is no intent to limit the scope of this invention to combustors of this configuration. The critical feature of this invention is the introduction of a reburn fuel downstream of a primary combustion zone formed by combustion of the solid carbonaceous fuel so as to form a fuel-lean secondary combustion zone downstream of the primary combustion zone, reducing NO_x by 20-60% over conventional combustion processes, all the while maintaining CO at environmentally acceptable levels, without utilizing additional combustion air downstream of the secondary combustion zone.

By the term "solid carbonaceous material" as used throughout this description and the claims, we mean any solid material having sufficient carbon content to render said material suitable for use as a fuel. The material may be pretreated, for example, crushed or pulverized, to render said material suitable for mixing with combustion air and introduction into a combustion chamber.

The process of this invention relies on achieving high NO_x reductions with acceptable CO levels by injecting the gaseous fuel, such as natural gas, into the products of combustion generated in primary combustion zone 10 in a temperature window of about 1800°-2400°F. Given the conditions of typical products of combustion, NO_x reductions of 20% to 60% can be expected at a natural gas input of 2% to 15% of the total heat input to the furnace. No overfire air injection is needed because fuel-lean conditions are maintained in both the primary and secondary combustion zones 10, 11.

In addition, because gaseous fuels burn more rapidly at a lower temperature than solid carbonaceous fuels such as coal, the gaseous fuel can be introduced at a higher elevation, or further downstream, and a lower temperature within the combustion chamber than the coal. This lower temperature acts to reduce the equilibrium level of nitrogen oxide in the products of combustion and, thus, increases the nitrogen oxide reduction possible. The cost of reducing NO_x is decreased because duct work is not necessary for injection of completion air, and less natural gas is used than in the conventional fuel-rich reburn process.

Thus, both capital and operating costs are lower than in conventional reburn processes.

The process of this invention reduces nitrogen oxide emissions in several ways. First, the gaseous fuel, natural gas or other preferred hydrocarbon, has no fixed nitrogen. Consequently, no nitrogen oxides are produced from the fuel source. In fact, the nitrogen oxide emissions per Btu of fuel fired is decreased due to displacement of the solid carbonaceous fuel by the gaseous fuel. Secondly, the gas is injected at temperatures below 3000°F, as a result of which thermal nitrogen oxide formation is negligible. Thirdly, the gaseous fuel reduces the NO_x in the flue gases due to the following reactions.

Nitric oxide reduction during conventional reburning occurs through its reactions with CH_i and NH_i radicals. The partial oxidation and pyrolysis of the hydrocarbon fuel results in the formation of CH_i radicals which react with NO to form HCN. This initial chemistry is followed by radical abstraction reactions of HCN which results in N₂, NH₃, and/or NO_x formation, and further NO_x reduction from the amine radicals. The low temperature gas combustion significantly improves the overall NO_x reduction due to the selective chemistry between the NO and the NH_i radicals in a narrow temperature window around 1800°F. In conventional reburn, due to high completion temperatures, a substantial portion of the HCN and NH₃ formed in the fuel-rich reburn zone is reconverted into NO_x during completion air addition.

Fig. 4 shows a schematic diagram of an improved apparatus for reducing nitrogen oxide emissions in combustion products from combustion of a pulverized solid carbonaceous material in accordance with one embodiment of this invention. The apparatus comprises at least one combustion chamber wall 12 enclosing combustion chamber 16, combustion chamber 16 having a lower portion 17 and an upper portion 18. The apparatus further comprises fuel injection means 13 for injecting the pulverized solid carbonaceous material into lower portion 17 of combustion chamber 16 to form a primary combustion zone as designated by arrows 10. Gaseous fuel injection means 14 are provided for injecting a gaseous fuel into upper portion 18 of combustion chamber 16, thereby forming a secondary combustion zone designated by arrows 11 in upper portion 18 of combustion chamber 16 above primary combustion zone 10. As shown, gaseous fuel injection means 14 may be provided at multiple levels of combustion chamber 16 thereby providing multiple layers of injected fuel in upper portion 18 of combustion chamber 16. Feedback means 27 measure the oxygen content in the flue gases exhausted through furnace exhaust 23 and, in accordance with

one embodiment of this invention, provide a signal for controlling the amount of gaseous fuel injected into combustion chamber 16 so as to maintain an oxygen content in the flue gases in the range of about 0.5% to 5.0% and most preferably in the range of about 1.0% to 2.0% while maintaining CO at acceptable levels, nominally less than about 200 ppm.

In accordance with one preferred embodiment of this invention, fuel injection means 14 comprises carrier fluid injection means 15 for injecting a carrier fluid together with the gaseous fuel into combustion chamber 16. In accordance with a typical operation of the process of this invention, the carrier fluid flow through carrier fluid injection means 15 is set after which the gaseous fuel flow is gradually increased to achieve a target stoichiometry in upper portion 18 of combustion chamber 16. The preferred stoichiometry in secondary combustion zone 11 is in the range of about 1.05 to 1.20 and the most preferred stoichiometry is in the range of about 1.05 to 1.10 which corresponds to a final flue gas oxygen content of about 1.0% to 2.0%. By way of example, if primary combustion zone 10 has a stoichiometry of 1.15 corresponding to approximately 3% primary combustion zone oxygen content, injection of natural gas in the amount of 7.5% of the total heat input to the combustion chamber 16 will result in a final stoichiometry of about 1.075, or 1.5% flue gas oxygen content. Gaseous fuel injection means 14 controls the gaseous fuel flow into combustion chamber 16 to maintain the target stoichiometry using oxygen concentration in the flue gas as an input as provided by feedback means 27. Gaseous fuel flow can be expected to vary continuously due to the dynamic nature of the boiler flow field. For example, in a coal-fired boiler, it is not unusual for oxygen content in the combustion gas entering the secondary combustion zone to vary by plus or minus 0.25% about a mean value over a several minute period. The variation is a result of the uncontrolled variation in coal feed rate, the time lags associated with adjustments in the air fans and inaccuracies or inadequacies in the measured data and control systems. Therefore, it is expected that secondary combustion zone stoichiometry, although always remaining fuel-lean, will vary about the preferred stoichiometry to some extent.

In accordance with a particularly preferred embodiment of this invention, combustion chamber 16 is designed to utilize coal. The coal enters combustion chamber 16 through fuel injection means 13 comprising mill 24 and nozzle 28. The fuel burns in primary combustion zone 10 in which temperatures are typically in excess of about 3000°F. The combustion products from combustion chamber 16, pass heat exchangers 19 and through

furnace exhaust 23. The flue gas preferably has a temperature in the range of about 1800°-2500°F when it exits through furnace exhaust 23 near heat exchangers 19. Heat exchangers 19 cause the temperature to drop very rapidly and any unburned fuel which enters these heat exchangers usually will be wasted and exit the combustion chamber as hydrocarbon emissions.

During the combustion of the solid fuel, some of the fuel bound nitrogen will react with oxygen to form NO_x and some NO_x will be formed from atmospheric nitrogen and oxygen. The process of this invention reduces NO_x by injecting gaseous fuel into combustion chamber 16 between lower portion 17 and heat exchangers 19.

In accordance with one preferred embodiment of this invention, the combustion apparatus comprises carrier fluid injector means 15 for injecting a carrier fluid with the gaseous fuel into the upper portion 18 of combustion chamber 16. Carrier fluid flow is controlled to achieve rapid and uniform dispersal of the gaseous fuel in the combustion chamber. Said fuel injection means 13 in accordance with one embodiment are injectors designed to inject the fuel/carrier gas mixture as high velocity, high momentum fuel-rich turbulent jets. The injectors themselves can be of an internal mixing variety as shown in Fig. 2 or an external mixing variety as shown in Fig. 3. The high velocity jets typically require gas supply pressures greater than about 5 psig. The jets mix and entrain the NO_x containing flue gases to create fuel-rich eddies where the NO is reduced to N_2 .

As shown in Fig. 2, a gas injector in accordance with one embodiment of this invention utilizes internal mixing in which the gaseous fuel and carrier fluid are mixed prior to introduction into the combustion chamber. In the external mixing design, shown in Fig. 3, there is no mixing of the gaseous fuel and carrier fluid inside the injector. In both injector designs, a nozzle is mounted at the injector tip to control the jet velocity and jet size. The jet velocity and jet diameter determine the penetration and mixture characteristics of the gaseous fuel/carrier fluid jets. In accordance with one preferred embodiment of this invention, the external mixing injector comprises swirlers 22 for swirling the carrier fluid as it exits, thereby promoting mixing with the gaseous fuel in the combustion chamber.

EXAMPLE

Lance injectors, were utilized during a series of tests of the process and apparatus of this invention. The tests were conducted on a single cyclone-fired 6 MBtu/hour test facility. The cyclone was typically operated with an excess oxygen of 2% to 4% and the initial NO_x was in the 800 ppm to 1200 ppm range. NO_x reductions of 40% were achieved

with 5% to 7% gaseous fuel injection in 2200°F to 2300°F flue gas. Higher NO_x reductions were achieved when the gaseous fuel was injected at lower temperatures. A maximum reduction of 58% was measured for 11% gaseous fuel injection in 4.1% oxygen furnace gas at an injection temperature of 2000°F. The gas used was natural gas. These results demonstrate that natural gas can be ignited and its combustion completed in low oxygen and low temperature flue gas, thus allowing nitric oxide to equilibrate towards levels commensurate with the lower oxygen and lower temperature furnace exit conditions.

These tests also show that uniform mixing or dispersion of the injected gaseous fuel with the nitric oxide containing flue gas is important for achieving simultaneous nitric oxide and carbon monoxide emissions control. Given the small injection volume (less than about 1.0%) of the gaseous fuel, use of a carrier to improve mixing may be necessary in some applications. In general, large units (greater than 200 MW) and units which require gas fuel jet penetrations greater than approximately 10 feet will likely require a carrier fluid to deliver the gas into the furnace. The use of a carrier would also be beneficial in furnaces which have a very non-uniform flow entering the gas injection zone. In accordance with one preferred embodiment of this invention, the mass flow rate of carrier fluid injected into the combustion chamber is up to about five times the mass flow rate of gaseous fuel injected into the combustion chamber. In accordance with a particularly preferred embodiment, the mass flow rate of carrier fluid injected into the combustion chamber is in the range of about 1 to 2 times the mass flow rate of gaseous fuel injected into the combustion chamber. The carrier fluid should preferably be an inert gas. Preferred carrier fluids are steam and recirculated flue gas, although air can also be used.

While in the foregoing specification this invention has been described in relation to certain preferred embodiments thereof, and many details have been set forth for purpose of illustration, it will be apparent to those skilled in the art that the invention is susceptible to additional embodiments and that certain of the details described herein can be varied considerably without departing from the basic principles of the invention.

WE CLAIM:

1. A two-stage process for combustion of a solid carbonaceous material comprising:

injecting a mixture of said solid carbonaceous material and combustion air into a combustion chamber and igniting said mixture, thereby forming a fuel-lean primary combustion zone; and

injecting a gaseous fuel into said combustion chamber in a region downstream of said primary combustion zone, thereby forming a fuel-lean secondary combustion zone, said secondary combustion zone having a temperature in a range of about 1800°F to 2400°F.

2. A process in accordance with Claim 1, wherein said gaseous fuel is natural gas.

3. A process in accordance with Claim 1, wherein said gaseous fuel is injected into said combustion chamber with a carrier fluid.

4. A process in accordance with Claim 3, wherein said carrier fluid is an inert gas.

5. A process in accordance with Claim 3, wherein said carrier fluid is selected from the group consisting of steam, recirculated flue gas, and mixtures thereof.

6. A process in accordance with Claim 1, wherein said gaseous fuel is injected into said combustion chamber at a rate which results in an oxygen content of flue gases exiting said combustion chamber in a range of about 0.5% to 5.0%.

7. A process in accordance with Claim 1, wherein said gaseous fuel is injected into said combustion chamber at a rate which results in an oxygen content of flue gases exiting said combustion chamber in a range of about 1.0 to 2.0 percent and a CO content of less than about 200 ppm.

8. A process in accordance with Claim 1, wherein said gaseous fuel injected into said combustion chamber comprises in a range of about 2 to 15 percent of a total amount of heat input to said combustion chamber.

9. A process in accordance with Claim 3, wherein said carrier fluid is injected into said combustion chamber at a mass flow rate in a range of about 0 to 5 times a mass flow rate of said gaseous fuel injected into said combustion chamber.

10. A process in accordance with Claim 9, wherein said carrier fluid is injected into said combustion chamber at a mass flow rate in a range of about 1 to 2 times the mass flow rate of said gaseous fuel injected into said combustion chamber.

11. A process in accordance with Claim 1, wherein a primary air/fuel stoichiometric ratio in said primary combustion zone is in a range of about 1.05 to 1.30.

12. A process in accordance with Claim 1, wherein a secondary air/fuel stoichiometric ratio in said secondary combustion zone is in a range of about 1.05 to 1.20.

13. A process in accordance with Claim 12, wherein said secondary air/fuel stoichiometric ratio is in the range of about 1.05 to about 1.10.

14. A process in accordance with Claim 3, wherein said carrier fluid is premixed with said gaseous fuel prior to injection into said combustion chamber.

15. A process in accordance with Claim 1, wherein said solid carbonaceous material is at least one of crushed coal and pulverized coal.

16. An apparatus for two-stage combustion of a solid carbonaceous material comprising:

at least one combustion chamber wall enclosing a combustion chamber, said combustion chamber having an upstream portion and a downstream portion;

fuel injection means for injecting said solid carbonaceous material into said upstream portion of said combustion chamber;

gaseous fuel injection means for injecting a gaseous fuel into said downstream portion of said combustion chamber; and

feedback means for maintaining an oxygen content in flue gases exhausted from said combustion chamber in a range of about 0.5 to 5.0 percent and CO at a level less than about 200 ppm.

17. An apparatus in accordance with Claim 16, wherein said gaseous fuel injection means comprises a carrier fluid injection means for injecting a carrier fluid together with said gaseous fuel into said combustion chamber.

18. An apparatus in accordance with Claim 17, wherein said gaseous fuel injection means comprises premix means for premixing said carrier fluid with said gaseous fuel prior to injection into said combustion chamber.

19. An apparatus in accordance with Claim 17, wherein said gaseous fuel injection means comprises carrier fluid means for injecting said carrier fluid into said combustion chamber so as to mix with said gaseous fuel.

20. An apparatus in accordance with Claim 16, wherein said feedback means comprises gaseous fuel injection control means for controlling injection of said gaseous fuel based upon oxygen content of said flue gases.

AMENDED CLAIMS

[received by the International Bureau on 13 January 1999 (13.01.99);
original claim 1 amended; original claim 6 cancelled;
remaining claims unchanged (1 page)]

1. A two-stage process for combustion of a solid carbonaceous material comprising:

injecting a mixture of said solid carbonaceous material and combustion air into a combustion chamber and igniting said mixture, thereby forming a fuel-lean primary combustion zone; and

injecting a gaseous fuel into said combustion chamber in a region downstream of said primary combustion zone, thereby forming a fuel-lean secondary combustion zone, said secondary combustion zone having a temperature in a range of about 1800°F to 2400°F, and said gaseous fuel injected into said combustion chamber at a rate which results in an oxygen content of flue gases exiting said combustion chamber in a range of about 0.5% to 5.0%.
2. A process in accordance with Claim 1, wherein said gaseous fuel is natural gas.
3. A process in accordance with Claim 1, wherein said gaseous fuel is injected into said combustion chamber with a carrier fluid.
4. A process in accordance with Claim 3, wherein said carrier fluid is an inert gas.
5. A process in accordance with Claim 3, wherein said carrier fluid is selected from the group consisting of steam, recirculated flue gas, and mixtures thereof.
7. A process in accordance with Claim 1, wherein said gaseous fuel is injected into said combustion chamber at a rate which results in an oxygen content of flue gases exiting said combustion chamber in a range of about 1.0 to 2.0 percent and a CO content of less than about 200 ppm.

STATEMENT UNDER ARTICLE 19

Claim 1 of the subject application has been amended by adding the elements and limitations of Claim 6. Claim 6 has been canceled in its entirety in view of the amendment to Claim 1. The remaining claims remain unchanged.

Claim 1, as amended, incorporates the elements and limitations of Claim 6 which the International Search Report has indicated is free of any significant prior art.

Applicant respectfully urges that this amendment of the claims is fully supported by the application as originally filed and, thus, incorporates no new subject matter into the application.

1/4

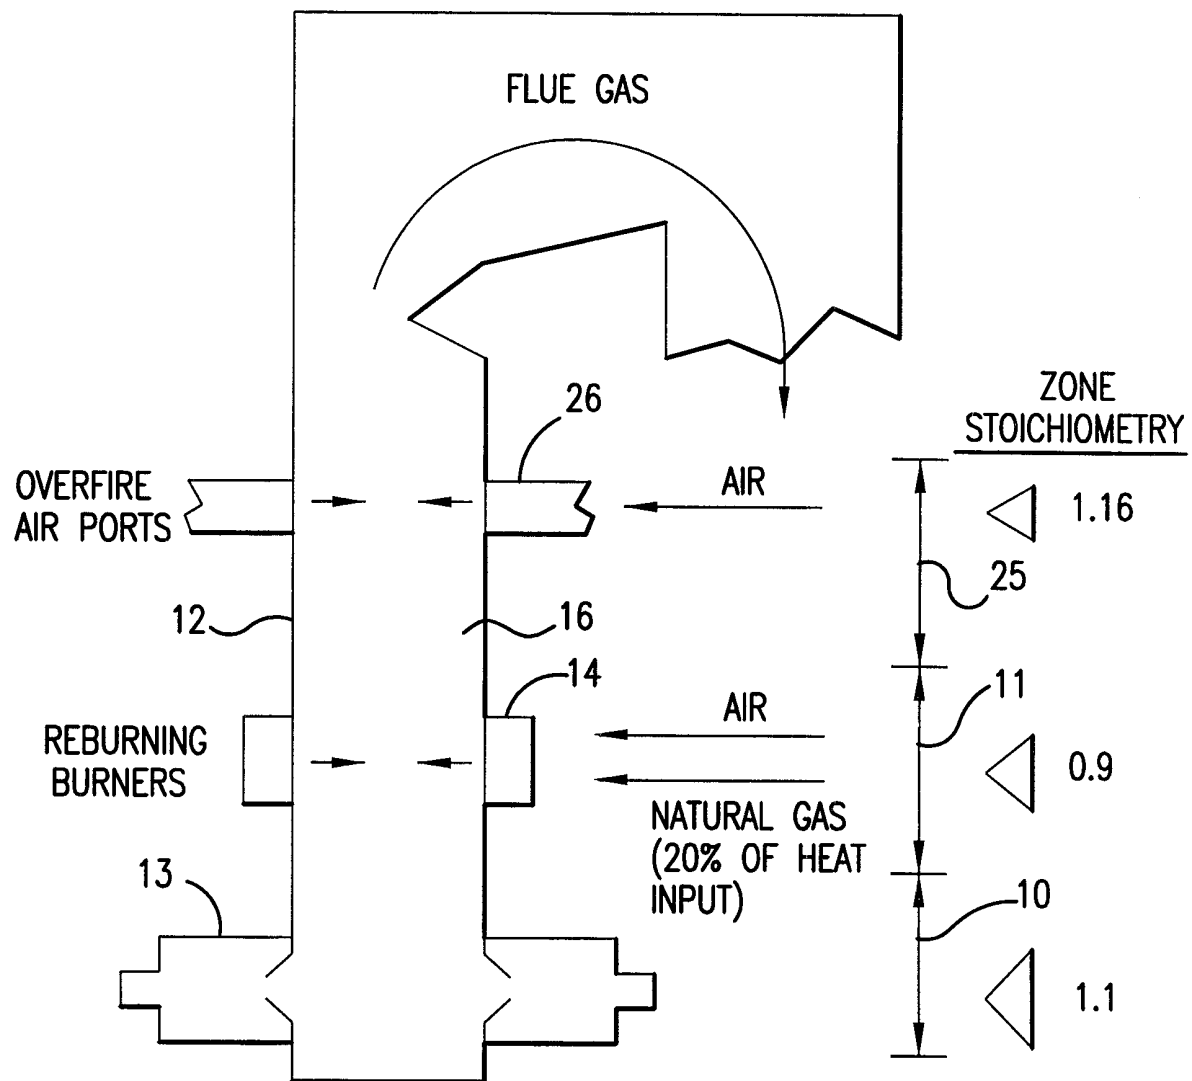


FIG.1
(PRIOR ART)

2/4

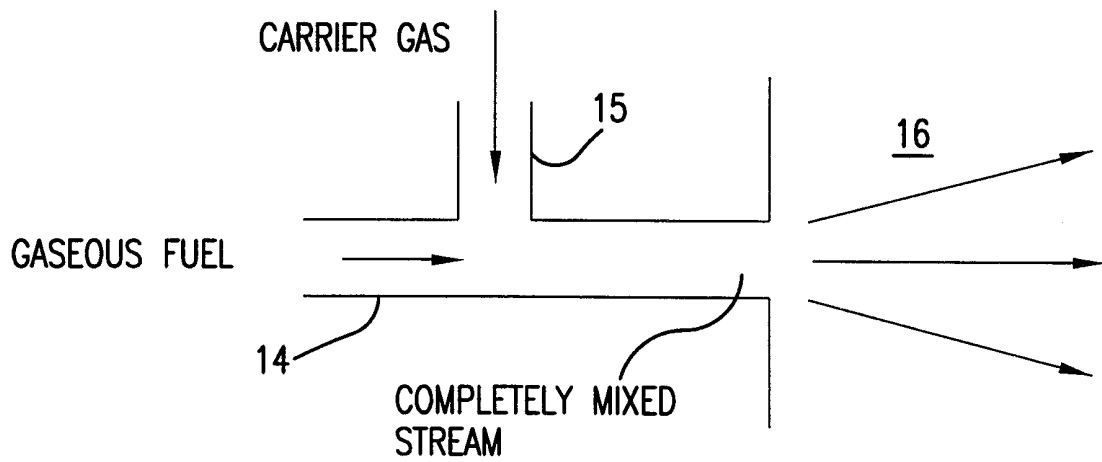


FIG. 2

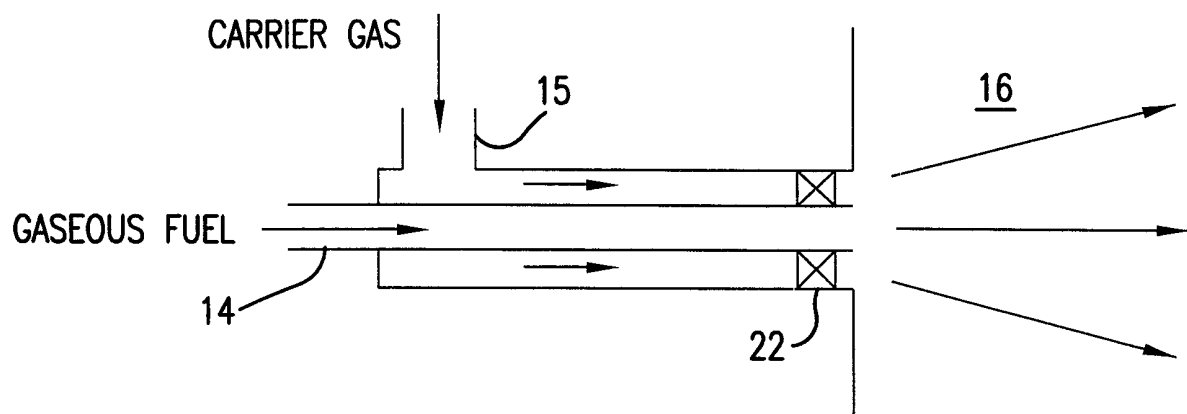


FIG. 3

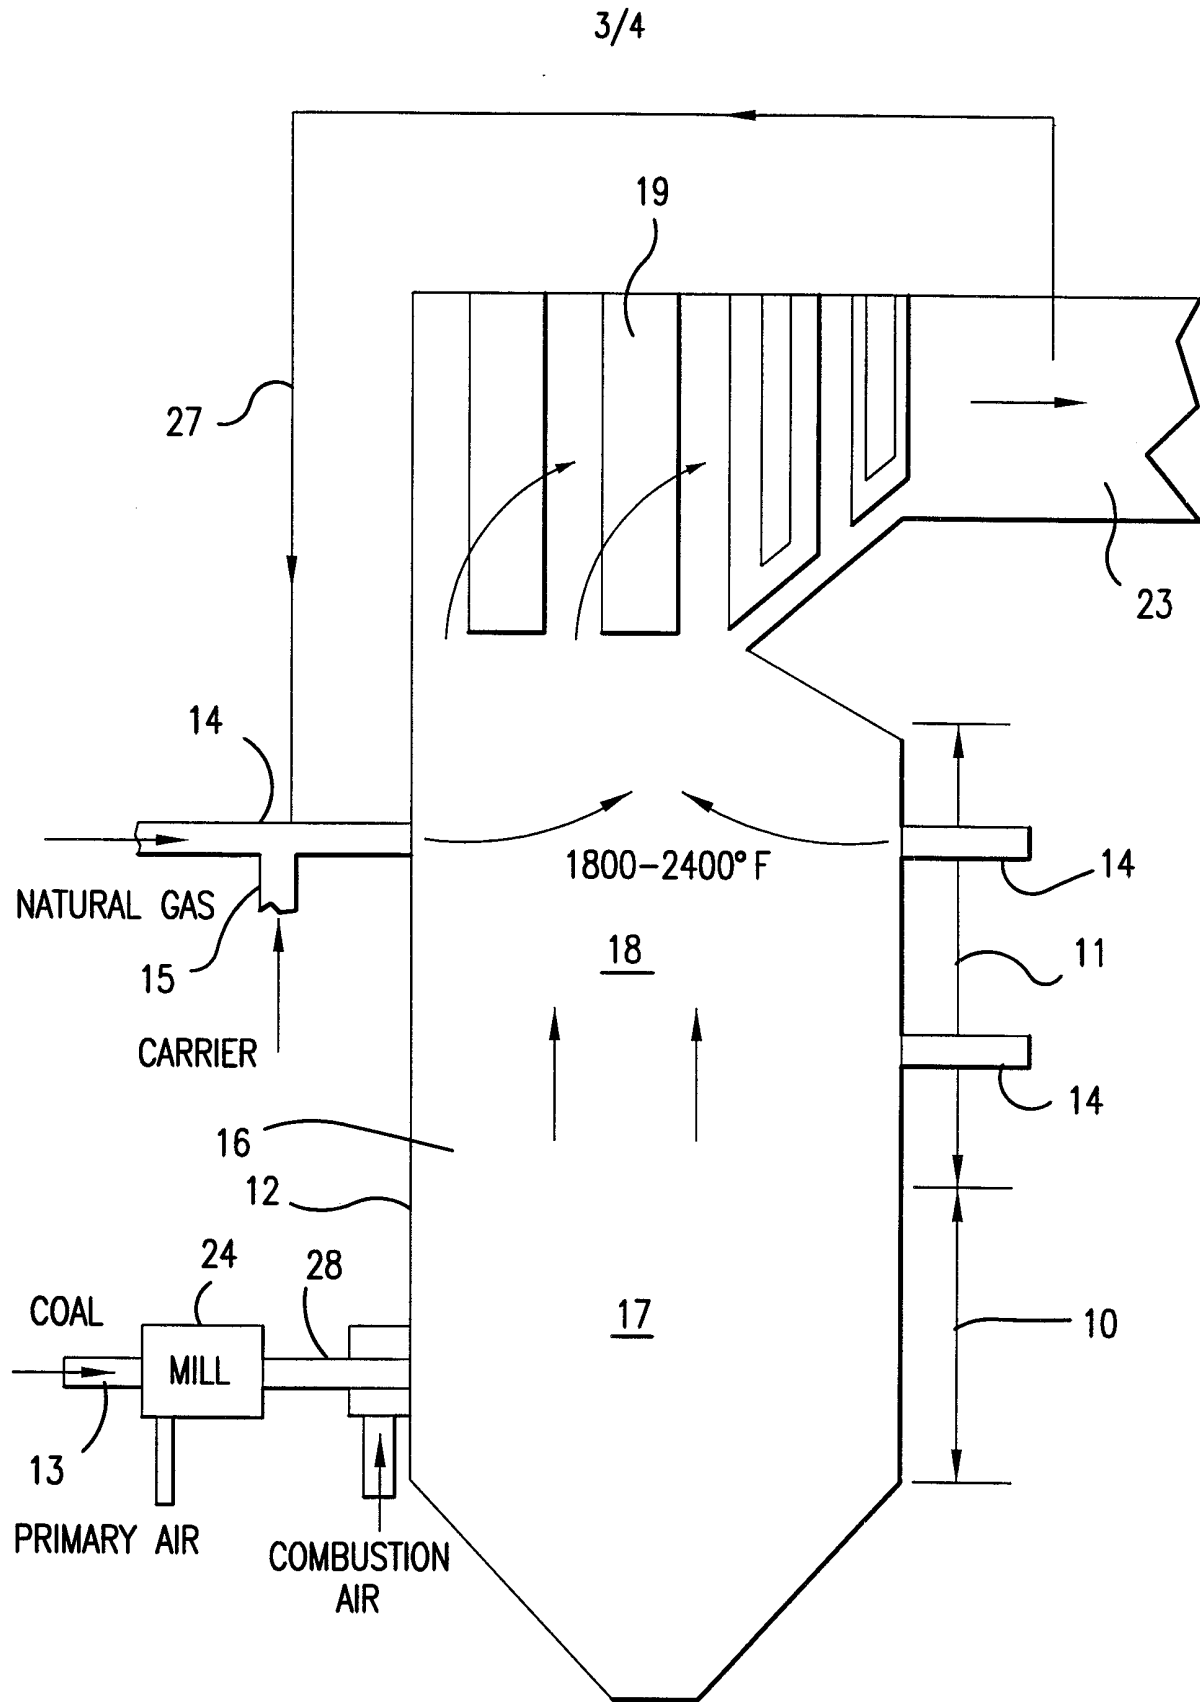


FIG. 4

4/4

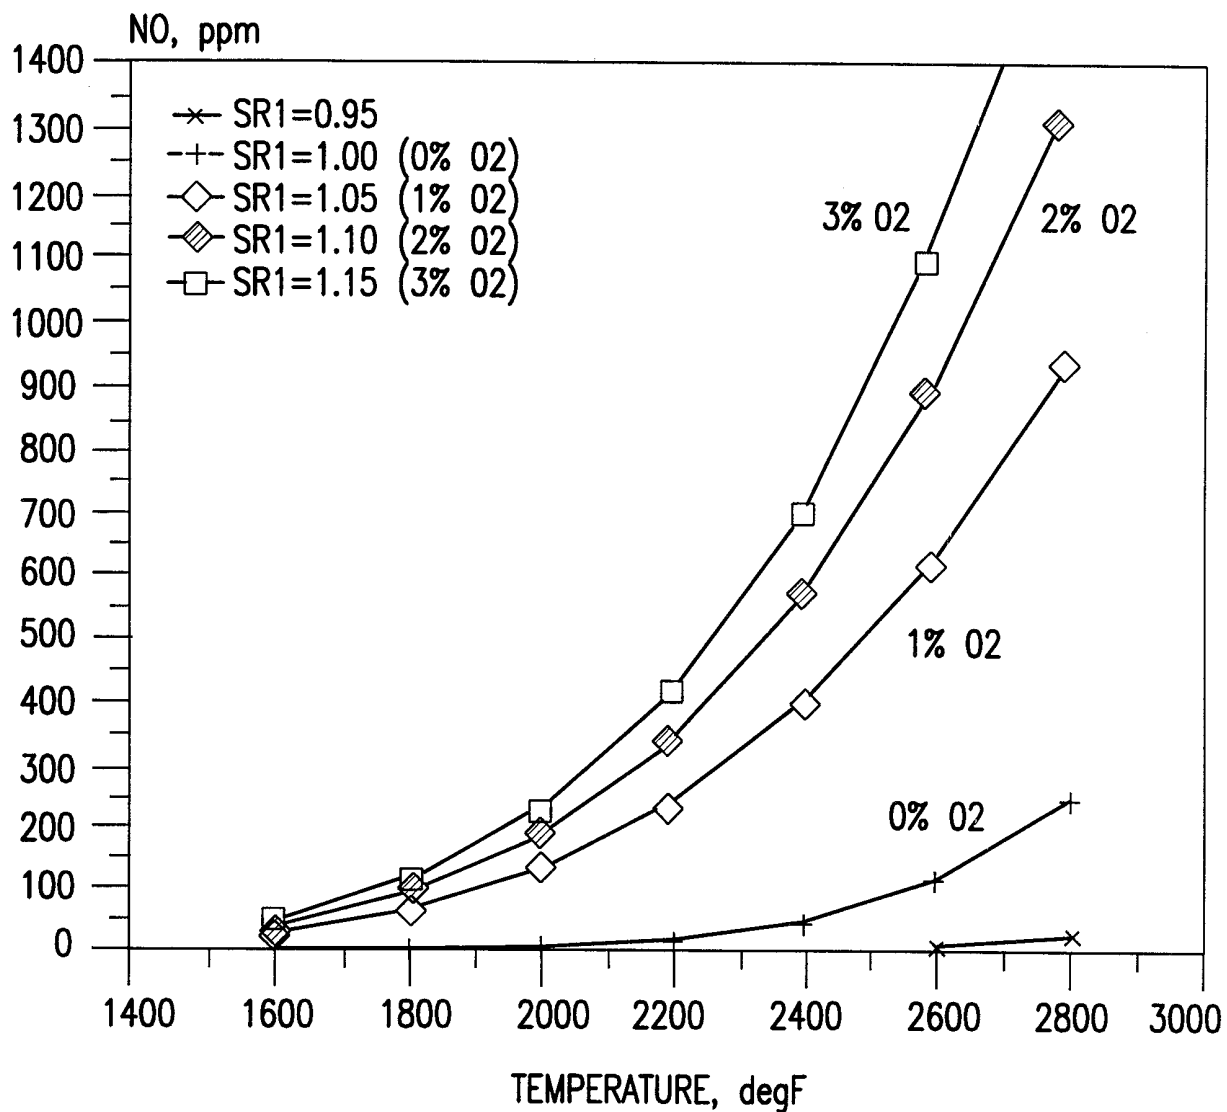


FIG.5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/16337

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 F23C6/04 F23L7/00 F23C1/12 F23N5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F23C F23L F23N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 078 064 A (BREEN BERNARD P ET AL) 7 January 1992	1, 2, 15, 16
Y	see column 4, line 37 - line 62 see column 5, line 34 - line 59; figure 2	3-5, 8, 17
Y	US 5 307 746 A (KHINKIS MARK J ET AL) 3 May 1994 cited in the application see column 6, line 11 - line 15; figure 1	3-5, 8, 17
X	US 4 779 545 A (BREEN BERNARD P ET AL) 25 October 1988 see the whole document	1
X	US 5 181 475 A (BREEN BERNARD P ET AL) 26 January 1993 see the whole document	1
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 November 1998

Date of mailing of the international search report

16/11/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Coli, E

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/US 98/16337

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 097 218 A (WOMACK JOHN W) 27 June 1978 see the whole document ----	6,7,20
A	EP 0 561 044 A (PRAXAIR TECHNOLOGY INC) 22 September 1993 see the whole document ----	6,7,20
A,P	EP 0 809 067 A (GAZ DE FRANCE) 26 November 1997 see the whole document ----	1-20
A,P	US 5 655 899 A (MCMICHAEL JAMES C ET AL) 12 August 1997 see the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/16337

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5078064 A	07-01-1992	CA 2038796 A	08-06-1992
US 5307746 A	03-05-1994	US 5020456 A	04-06-1991
		US 5205227 A	27-04-1993
		CA 2036994 A,C	29-08-1991
		DE 69100162 T	28-10-1993
		DK 445070 T	23-08-1993
		EP 0445070 A	04-09-1991
		JP 2026049 C	26-02-1996
		JP 4217710 A	07-08-1992
		JP 7062524 B	05-07-1995
		US 5105747 A	21-04-1992
US 4779545 A	25-10-1988	CA 1316329 A	20-04-1993
US 5181475 A	26-01-1993	CA 2088659 A,C	04-08-1993
US 4097218 A	27-06-1978	NONE	
EP 0561044 A	22-09-1993	US 5176086 A	05-01-1993
		CA 2081945 A,C	17-09-1993
		DE 69205269 D	09-11-1995
		DE 69205269 T	02-05-1996
		ES 2077955 T	01-12-1995
		JP 5288325 A	02-11-1993
		MX 9206298 A	01-09-1993
EP 0809067 A	26-11-1997	FR 2749066 A	28-11-1997
		CZ 9701352 A	17-12-1997
		PL 320054 A	24-11-1997
		SK 55397 A	14-01-1998
US 5655899 A	12-08-1997	NONE	