

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 August 2008 (07.08.2008)

PCT

(10) International Publication Number
WO 2008/094865 A1

(51) International Patent Classification:

A47C 7/14 (2006.01) A47C 1/032 (2006.01)

(21) International Application Number:

PCT/US2008/052208

(22) International Filing Date: 28 January 2008 (28.01.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/898,421 29 January 2007 (29.01.2007) US

(71) Applicant (for all designated States except US): HERMAN MILLER, INC. [US/US]; 855 East Main Avenue, P.O. Box 302, Zeeland, MI 49464-0302 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ALDRICH, John, F. [US/US]; 3014 Tansy Trail, Grandville, MI 49418 (US). BRILL, Ryan, S. [US/US]; 12338 Joshua Court, Allendale, MI 49401 (US). HILL, Christopher, C. [US/US]; 10320 Fillmore Street, Zeeland, MI 49464 (US). VANDERIET, Douglas, M. [US/US]; 2230 Eagle


Boulevard, Holland, MI 49424 (US). CASTRO, Elinda, G., Jr. [US/US]; 2639 Picadilly Drive Sw, Wyoming, MI 49418 (US). ROARK, Troy [US/US]; 9120 Hiawatha Drive, West Olive, MI 49460 (US). SLAGH, James, D. [US/US]; 5240 143rd Avenue, Holland, MI 49423 (US). WEBER, Jeffrey, A. [US/US]; 1200 Angelo Drive, Golden Valley, MN 55422 (US).

(74) Agent: STOVER, Andrew, D.; Brinks Hofer Gilson & Lione, P.O. Box 10087, Chicago, IL 60610 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SEATING STRUCTURE AND METHODS FOR THE USE THEREOF

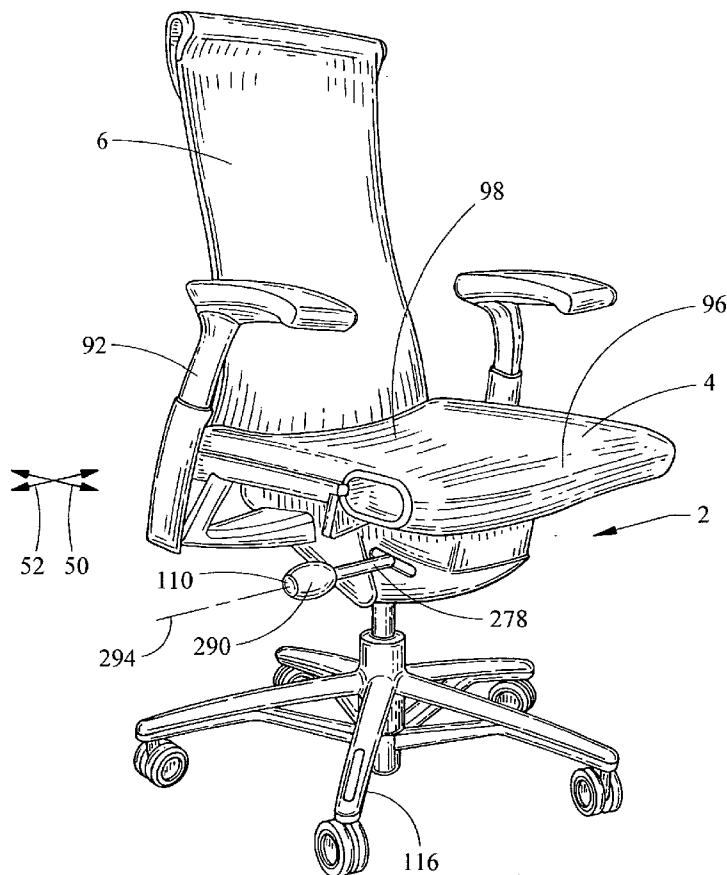

(57) Abstract: A seating structure has an articulated seat and back. A rear portion of the seat is automatically pivotable relative to a forward portion of the seat as the seat is tilted between upright and reclined tilt positions. An upper portion of the back is pivotable relative to the lower portion between a neutral position and an extended position, with the upper portion being pivotable relative to the lower portion independent of the tilt position of the back. In one aspect, an adjustment mechanism is coupled between lower and upper back support members and pivots the upper support member between at least first and second support positions. A seat with an adjustable seat depth is also provided, along with various methods for operating the different aspects and embodiments of the seating structure.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

SEATING STRUCTURE AND METHODS FOR THE USE THEREOF

[0001] This application claims the benefit of U.S. Provisional Application No. 60/898,421, filed January 29, 2007, the entire disclosure of which is hereby incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates generally to seating structures, and in particular, to a chair having unique kinematics, a body supporting seat and back, and an adjustable seat depth, and methods for using and/or adjusting the chair, including without limitation one or more of the seat and backrest.

BACKGROUND

[0003] Chairs of the type typically used in offices and the like are usually configured to allow tilting of the seat and backrest as a unit, or to permit tilting of the backrest relative to the seat. Typically, however, the seat and back are not individually adjustable, and are not individually articulated during tilting. Such chairs therefore sometimes cannot be easily adjusted or customized by the user to accommodate the particular size, shape and/or desired posture of the user.

[0004] For example, the seat is typically formed as a relatively rigid, or fixed component, without any articulation between various body-supporting portions of the seat. As such, when a user tilts rearwardly in the chair, the user may tend to slide forward in the seat, even when tilting rearwardly. At the same time, any adjustment of the depth of the seat, measured from the front leading edge to the rear thereof, typically is provided by moving the entirety of the rigid, unitary seat in a fore-aft direction, which can lead to an unsightly gap forming at the rear of the seat and can also form a pinch point at that location. Moreover, such chairs must provide for structure to allow the seat to move relative to the backrest while at the same time bearing the load of the seat and user. Moreover, such chairs typically must employ an extra support

member which allows the seat to move thereon, for example, when the seat and/or support member are integrated into the linkage assembly.

[0005] In typical tilt chairs, a static angular position of the chair back relative to the seat is typically fixed when the chair is in an unloaded upright position, which may not be particularly well suited for a wide range of users. Moreover, the back is typically formed as a relatively rigid, or fixed component, again without any articulation between various portions of the back. As such, the chair back does not allow the user a full range of motion, precluding for example the ability of the user to stretch or arch their back in a concave contour.

[0006] Tilt chairs normally employ compression and/or tension springs, torsion springs and/or torsion bars, or leaf springs to bias the seat and back upwardly and to counterbalance the rearward tilting of the user. The mechanisms used to adjust the load on the spring(s), or the load capability of the spring(s), typically are complicated, and/or require multiple, excessive rotations of a knob or other grippable member to obtain the desired setting. Moreover, the chairs lack any indicia for the user to determine the setting of the return force of the spring before the user sits or applies a load to the backrest.

[0007] Moreover, such tilt chairs often do not provide a balanced ride throughout the range of tilting motion of the chair. Specifically, the restoring force or torque of the chair, and in particular the spring, does not match the force or torque applied by the user throughout the tilting range. Although the applied force and restoring force may balance out at a particular tilt position, such balance does not typically occur throughout the tilting/recline range. Moreover, such balance typically cannot be achieved for a variety of users having different weights and body sizes. As such, the user must exert energy and/or apply an external force to maintain the chair in a particular location.

SUMMARY

[0008] The present inventions are defined by the claims, and nothing in this section should be read as a limitation on those claims. Rather, by way of general introduction and briefly stated, various preferred embodiments are described that relate to a tiltable chair having an articulated seat and back, an adjustable seat depth, various control mechanisms and linkage assemblies, and methods for the use of the various aspects.

[0009] For example and without limitation, in one aspect, the preferred embodiments relate to a seating structure having a seat with a forward portion and a rear portion. The seat is tiltable between at least an upright tilt position and a reclined tilt position. The rear portion is automatically pivotable relative to the forward portion as the seat is tilted between the upright and reclined tilt positions.

[0010] In one embodiment, a back is coupled to the seat and is tiltable between at least an upright tilt position and a reclined tilt position. The back includes a lower portion and an upper portion. The upper portion is pivotable relative to the lower portion between a neutral position and an extended position, with the upper portion being pivotable relative to the lower portion independent of the tilt position of the back. In a preferred embodiment, the upper portion is pivotable relative to the lower portion when the rearward tilting, or tilt position, of the lower portion is limited.

[0011] In another aspect, a seating structure includes a base component, a first link member pivotally connected to the base component at a first horizontal pivot axis and a second link pivotally connected to the first link at a second horizontal pivot axis spaced from the first pivot axis. A portion of the second link extends in a longitudinal direction. A third link is pivotally connected to the second link at a third horizontal pivot axis spaced from the second pivot axis in the longitudinal direction, and the third link is pivotally connected to the base component at a fourth horizontal pivot axis spaced from the first pivot axis. The third link also includes a portion extending in the longitudinal direction.

[0012] A seat includes a front, thigh supporting region coupled to the longitudinally extending portion of the second link and a rear buttock supporting region coupled to the longitudinally extending portion of the third link. The rear buttock supporting region is spaced rearwardly from the thigh supporting region in the longitudinal direction. The third link is pivotable in a first direction relative to the second link about the third pivot axis between an upright position and a reclined position. An upper surface of the rear region of the seat forms an angle of greater than 180 degrees relative to an upper surface of the front region when the third link is in the reclined position.

5 **[0013]** In a preferred embodiment, a backrest has a lower portion non-pivottally coupled to one or both of the rear region of the seat and the third link. In one embodiment, the backrest includes an upper portion coupled to a back support member, with the back support member being pivotally connected to the base component about a fifth horizontal pivot axis, which is coincidental with the fourth pivot axis in one embodiment.

10 **[0014]** In yet another aspect, a seating structure includes a base component and a back support member having a lower support member pivotally connected to the base component about a first horizontal pivot axis and an upper support member pivotally connected to the lower support member about a second horizontal pivot axis spaced from the first pivot axis. At least one backrest component is coupled to the upper support member. An adjustment mechanism is coupled between the lower support member and the upper support member. The adjustment mechanism is operable between at least first and second positions. The upper support member is pivotable relative to the lower support member about a horizontal axis between at least first and second support positions as the adjustment mechanism is operable between the at least first and second positions.

15 **[0015]** In another aspect, a seating structure includes a base component and a body support member pivotally coupled to the base component. A spring biases the body support member toward an upright position. A force-adjusting member engages the spring and is moveable between at least first

20 **[0016]** In another aspect, a seating structure includes a base component and a body support member pivotally coupled to the base component. A spring biases the body support member toward an upright position. A force-adjusting member engages the spring and is moveable between at least first

and second force applying positions. An actuator is coupled to the force-adjusting member and includes a grippable member that is translatablely moveable relative to the base component between at least first and second adjustment positions. The force-adjusting member is moved between the first and second force applying positions as the grippable member is moved between the first and second adjustment positions.

[0016] In one embodiment, the spring is configured as a leaf spring and the force-adjusting member is configured as a fulcrum member. The fulcrum member is moveable in a fore-aft direction along a longitudinal axis between at least first and second fulcrum positions, with the actuator, and in particular the grippable member, moveable therewith in the fore-aft direction.

[0017] In yet another aspect, a seating structure includes a base component having a support surface and a fulcrum member moveable in opposite first and second longitudinal directions. The fulcrum includes a first roller rotatably supported by the support surface of the base component and a second roller contacting the first roller. The first roller is rotatable in first and second rotational directions as the fulcrum member is moved in first and second longitudinal directions respectively, while the second roller is rotatable in first and second rotational directions as the fulcrum member is moved in the second and first longitudinal directions respectively. In essence, the first and second rollers rotate in the opposite directions as the fulcrum is moved longitudinally. In one embodiment, at least one leaf spring is supported by the second roller.

[0018] In yet another aspect, a seating structure includes a leaf spring and a body support structure biased by the leaf spring. One of the leaf spring and the body support structure has a cam with a convex cam surface, while the other of the leaf spring and the body support structure has a cam follower with a concave cam surface. In operation, the cam follower engages the cam with the cam surfaces contacting one another.

[0019] In yet another aspect, a seating structure includes a support structure and a carrier moveably supported by the support structure. The

carrier is moveable relative to the seat support structure in opposite first and second longitudinal directions. A flexible body support member includes a first portion fixedly coupled to the seat support structure, a second portion coupled to the carrier, and a third curved portion positioned between the first and second portions. The third portion is moveable toward and away from the support structure as the carrier is moved relative to the seat support structure in the first and second directions respectively. In one preferred embodiment, a cover member is disposed over an outer surface of the body support member and covers the third portion of the body support member.

10 [0020] The various aspects and embodiments provide significant advantages over other tilt chairs and seating structures, including chairs and seating structures having backrests, seats and tilt controls. For example, in one preferred embodiment, a rear portion of the seat automatically pivots rearwardly relative to a front portion, with the rear and front portions opening up and forming an angle greater than 180 degrees relative to each other, as the user tilts rearwardly in the chair. In this way, the rear portion provides support for the ischial tuberosities or buttock region of the user and prevents the user from sliding forwardly on the front portion of the seat. By separating the ischial tuberosities or buttock support region from the thigh support region, the entirety of the seat support surface does not have to be tipped or pivoted as the user tilts rearwardly. As a result, the hip drop (the amount the hip joint of the user drops during recline) is reduced, thereby providing for tighter package space between the seat surface and tilt control, less energy stored in the tilt (as required to lift the user back up), and lower torques at the given angular travel.

15

20 [0021] In addition, the static angle of the back in an upright, neutral position can be easily and quickly adjusted relative to the seat so as to allow the user to customize the fit of the chair for their particular body size and shape. In addition, in one embodiment, the upper portion of the back can be independently pivoted relative to the lower portion of the back, for example when the user arches their back or extends their arms and shoulders rearwardly, while simultaneously supporting the user's back in the arched

25

30

position. The upper portion will return automatically to a neutral position when the biasing force of the user is relieved.

[0022] The biasing mechanism also provides advantages. For example and without limitation, the actuator, and in particular the grippable portion, for adjusting the return force of the spring is translatable relative to the base component. By viewing the position of the grippable portion, or any other visible portion of the actuator, the user is provided with visual indicia as to the setting of the return force before they sit down and/or apply a force against the backrest.

[0023] In addition, when a leaf spring and adjustable fulcrum are used to apply the return biasing force to the seating structure, the first and second rollers used to support the spring on the base component allow for easy, relatively frictionless movement of the rollers relative to the base component and spring. As such, the position of the fulcrum can be easily adjusted even when the leaf spring is loaded.

[0024] The cam surfaces formed on the spring and the body support structure also provide advantages. In particular, the cam surfaces provide a balanced ride to all types of various users throughout the normal tilting range of the seating structure. In essence, this provides tailored torque outputs as disclosed for example and without limitation in U.S. Application 10/738,641, filed December 17, 2003 and entitled "Tilt Chair and Methods for the Use Thereof," the entire disclosure of which is hereby incorporated herein by reference. The cam surfaces eliminate the need for a spring link as disclosed in U.S. Application 10/738,641, filed December 17, 2003.

[0025] The embodiments of the adjustable seat also provide advantages. For example, the depth of the seat can be adjusted without having to move the entire seat, or in other words, while maintaining a rear portion of the seat in the same position. Such construction avoids the need for additional support members. In addition, the adjustment mechanism can be easily grasped and manipulated by the user to adjust the depth of the seat. Moreover the curved front portion of the seat provides transitional support for the user's legs when

sitting down or standing up from the chair. At the same time, the curved portion is relatively flexible, thereby avoiding pressure points along the thighs of the user.

[0026] Of course, it should be understood that the various aspects disclosed herein can be used individually or in combination, with various combinations providing additional advantages. The present invention, together with further objects and advantages, will be best understood by reference to the following detailed description taken in conjunction with the accompanying drawings.

10 [0027] **BRIEF DESCRIPTION OF THE DRAWINGS**

[0028] FIGURE 1 is a perspective view of one embodiment of a chair.

[0029] FIGURE 2 is a schematic side view of a chair in an upright position.

[0030] FIGURE 3A is a schematic side view of the linkage assembly for the chair shown in Figure 2.

15 [0031] FIGURE 3B is a schematic side view of the linkage assembly for the chair shown in Figure 2 in an intermediate reclined position.

[0032] FIGURE 3C is a schematic side view of the linkage assembly for the chair shown in Figure 2 when in a fully reclined position with an upper back support member in a neutral position.

20 [0033] FIGURE 3D is a schematic side view of the linkage assembly for the chair shown in Figure 2 when in a fully reclined position with the upper back support member in an extended position.

[0034] FIGURE 4A is an enlarged, partial side view of the back support member in a neutral position.

25 [0035] FIGURE 4B is an enlarged, partial side view of the back support member in an extended position.

[0036] FIGURE 5 is an exploded perspective view of a tilt control mechanism.

[0037] FIGURE 6 is an exploded perspective view of various components of the linkage assembly.

[0038] FIGURE 7 is a bottom exploded perspective view of the seat support including an adjustable seat depth mechanism.

5 [0039] FIGURE 8 is a top exploded perspective view of the seat support and seat depth mechanism shown in Figure 7.

[0040] FIGURE 9 is an exploded perspective view of a fulcrum assembly.

[0041] FIGURE 10 is a perspective view of a tilt control mechanism.

10 [0042] FIGURE 11 is a cut-away perspective view of a back support member and leaf spring.

[0043] FIGURE 12 is a front partial perspective view of the seat and tilt control mechanism.

[0044] FIGURE 13 is a perspective view of a seat member.

[0045] FIGURE 14 is a top partial perspective view of the seat.

15 [0046] FIGURE 15 is a bottom partial perspective view of the seat.

[0047] FIGURE 16 is a side cut-away view of the seat.

[0048] FIGURE 17 is a top perspective view of a seat cover.

[0049] FIGURE 17A is a cross-sectional view of the seat cover engaging the seat frame.

20 [0050] FIGURE 18 is a side cut-away view of the seat, tilt control mechanism and back support member in an upright position.

[0051] FIGURE 19 is a side cut-away view of the seat, tilt control mechanism and back support member in a reclined position, with the back support member in a neutral position.

25 [0052] FIGURE 20 is a side cut-away view of the seat, tilt control mechanism and back support member in a reclined position, with the back support member in an extended position.

[0053] FIGURE 21 is a partial, side cut-away view of the back support member in a forward position.

30 [0054] FIGURE 22 is a partial, side cut-away view of the back support member in an intermediate, nominal position.

[0055] FIGURE 23 is a partial, side cut-away view of the back support member in a rearward position.

[0056] FIGURE 24 is a front perspective view of the back support member.

5 [0057] FIGURE 25 is a rear perspective view of the back support member.

[0058] FIGURE 26 is a partial perspective view of a lower portion of the upper portion of the back support member.

[0059] FIGURE 27 is an exploded view of a back angle adjuster.

[0060] FIGURE 28 is a side view of a back support member bracket.

10 [0061] FIGURE 29 is a perspective view of a lower wedge component.

[0062] FIGURE 30 is a side view of the lower wedge component shown in Figure 29.

[0063] FIGURE 31 is a perspective view of an upper wedge component.

[0064] FIGURE 32 is a perspective view of a first portion of a wedge actuator.

15 [0065] FIGURE 33 is a side view of a second portion of a wedge actuator.

[0066] FIGURE 34 is a front perspective view of a back suspension structure.

[0067] FIGURE 35 is front view of a pad structure.

20 [0068] FIGURE 35A is an enlarged view of a connector between pads.

[0069] FIGURE 36 is an enlarged partial perspective view of a back suspension structure.

[0070] FIGURE 37 is a front view of a cover carrier member.

[0071] FIGURE 38 is a side view of the carrier member shown in Figure

25 37.

[0072] FIGURE 39 is a side view of the chair.

[0073] FIGURE 40 is a cross-sectional view of an actuator assembly.

[0074] FIGURE 41 is an enlarged view of the end of the actuator assembly shown in Figure 40 taken along detail 41.

30 [0075] FIGURE 42 is an exploded perspective view of another embodiment of a tilt control mechanism.

[0076] FIGURE 43 is a cut-away perspective view of a back support member and leaf spring.

[0077] FIGURE 44 is a partial exploded perspective view of the tilt control mechanism shown in Figure 42.

5 [0078] FIGURE 45 is an exploded perspective view of another embodiment of a back angle adjustment mechanism.

[0079] FIGURE 46 is a front, perspective view of another embodiment of a back support member.

10 [0080] FIGURE 47 is a front perspective view of the chair without the fabric cover.

[0081] FIGURE 48 is a side view of the chair without the fabric cover in a rearward, neutral, upright position.

[0082] FIGURE 49 is a side view of the chair without the fabric cover in a nominal, neutral, upright position.

15 [0083] FIGURE 50 is a side view of the chair without the fabric cover in a forward, neutral, upright position.

[0084] FIGURE 51 is a side view of the chair without the fabric cover in a nominal, upright position, with the upper portion in an extended position.

20 [0085] FIGURE 52 is a side view of the chair without the fabric cover in a nominal, neutral, intermediate recline position.

[0086] FIGURE 53 is a side view of the chair without the fabric cover in a nominal, neutral, full recline position.

[0087] FIGURE 54 is a side view of the chair without the fabric cover in a nominal, full recline position, with the upper portion in an extended position.

25 [0088] FIGURE 55A and B are partial cross-sectional views of a fabric attachment assembly.

[0089] FIGURE 56 is a partial, perspective view of the seat.

[0090] FIGURE 57 is a partial, exploded perspective view of a portion of the seat assembly.

30 [0091] FIGURE 58 is a partial, perspective view of the seat.

[0092] FIGURE 59 is an exploded view of the seat shown in Figure 58.

[0093] FIGURE 60 is an exploded view of various components of the linkage assembly.

[0094] FIGURE 61 is a perspective view of the chair.

[0095] FIGURE 62 is a perspective view of the chair without a pad structure or outer cover.

[0096] FIGURE 63 is a rear view of the chair shown in FIG. 62.

[0097] FIGURE 64 is a front view of the chair shown in FIG. 62 with the pad structure.

[0098] FIGURE 65 is an exploded perspective view of a flexible body support member and a load support layer of a suspended pixilated seat structure.

[0099] FIGURE 66 is a bottom, front perspective view of the fulcrum assembly.

[00100] FIGURE 67 is a rear perspective view of the back frame.

[00101] FIGURE 68 is portion of an alternative embodiment of a pad structure.

[00102] FIGURE 69 is portion of an alternative embodiment of a pad structure.

[00103] FIGURE 70 is portion of an alternative embodiment of a pad structure.

[00104] FIGURE 71 is an enlarged cross-sectional view of one embodiment of a connection between a pad structure and a backrest frame.

[00105] FIGURE 72 is an enlarged cross-sectional view of an alternative embodiment of a connection between a pad structure and a backrest frame.

[00106] FIGURE 73 is an enlarged cross-sectional view of an alternative embodiment of a connection between a pad structure and a backrest frame.

[00107] FIGURE 74 is an enlarged cross-sectional view of an alternative embodiment of a connection between a pad structure and a backrest frame.

[00108] FIGURE 75 is an enlarged cross-sectional view of an alternative embodiment of a connection between a pad structure and a backrest frame.

[00109] FIGURE 76 is an enlarged cross-sectional view of an alternative embodiment of a connection between a pad structure and a backrest frame.

[00110] FIGURE 77 is a side view of an alternative embodiment of a chair with a forward tilt shown in a forward tilt position.

5 [00111] FIGURE 78 is a side view of the chair shown in Figure 77 with the chair in a neutral position.

[00112] FIGURE 79 is an exploded view of a fabric attachment assembly for a seat.

10 [00113] FIGURE 80 is an exploded view of a fabric attachment assembly for a backrest.

[00114] FIGURE 81 is a side view of a cover and handle assembly.

[00115] FIGURE 82 is an opposite side view of the cover and handle assembly shown in Figure 81.

15 [00116] FIGURE 83 is a perspective view of the handle shown in Figure 81.

[00117] FIGURE 84 is a perspective view of the cover shown in Figure 81.

[00118] FIGURE 85 is a partial perspective view of various seat depth components.

20 [00119] FIGURE 86 is a cross-sectional view of the assembly shown in Figure 85.

[00120] FIGURE 87 is a partial perspective view of the upper backrest assembly.

25 [00121] FIGURE 88 is a cross-sectional view of the backrest shown in Figure 87 taken along line 88-88.

[00122] FIGURE 89 is a side view of one embodiment of an upper backrest assembly.

[00123] FIGURE 90 is a side view of one embodiment of the chair.

[00124] FIGURE 91 is a back review of the chair shown in Figure 90.

30 [00125] FIGURE 92 is a partial cut away view of a portion of a backrest assembly.

[00126] FIGURE 93 is an enlarged portion of Figure 92 taken along line 92.

[00127] FIGURE 94 is a cross-sectional view of the connector assembly shown in Figures 92 and 93 taken along a direction substantially perpendicular to the cut away of Figure 92.

[00128] FIGURE 95 is an alternative embodiment of the pad structure.

[00129] FIGURE 96 is a rear perspective view of one embodiment of a backrest structure.

[00130] FIGURE 97 is an enlarged view of the backrest structure shown in Figure 96 and taken along line 97.

[00131] FIGURE 98 is a partial perspective view of a link with a snap-fit rotation device.

[00132] FIGURE 99 is a cross-sectional view of the link shown in Figure 98 secured to a frame member.

[00133] FIGURE 100 is a side view of a cover attached to the chair.

[00134] FIGURE 101 is a cross-sectional view of the cover and frame taken along line 101-101 of Figure 100.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

General:

[00135] The terms "longitudinal" and "lateral" as used herein are intended to indicate the directions 50, 52 of the chair from front to back and from side to side, respectively. Similarly, the terms "front", "side", "back", "forwardly", "rearwardly", "upwardly" and "downwardly" as used herein are intended to indicate the various directions and portions of the chair as normally understood when viewed from the perspective of a user sitting in the chair. It should be understood that the terms "mounted," "connected", "coupled," "supported by," and variations thereof, refer to two or more members or components that are joined, engaged or abutted, whether directly or indirectly, for example, by way of another component or member, and

further that the two or more members, or intervening member(s) can be joined by being integrally formed, or by way of various fastening devices, including for example and without limitation, mechanical fasteners, adhesives, welding, press fit, bent-over tab members, etc. The term "plurality" means two or

5 more.

Linkage Assembly:

[00136] Referring to the drawings, FIGS. 1-6, 18-20, 42, 48-54 and 58-60 show a preferred embodiment of the chair having tilt control housing **2**, seat **4**, back support member **8** and back **6**. It should be understood that the term "housing" generally refers to any support member that supports another member, and includes, but is not limited to a structure that provides an enclosure. The seat **4** and a lower portion **12** of the back are supported by a linkage assembly **10**, which is pivotally connected to the tilt control housing **2**.

10 The tilt control housing **2** forms a base component of the linkage assembly.

The tilt control housing is formed by an upper bracket **14** and lower bracket **16**, which are joined, for example by welding.

[00137] The linkage assembly **10** includes a first link **18, 518** having a first end pivotally connected to a pair lugs **20**, extending forwardly from a front portion of the tilt control housing or base component, at a first horizontal pivot axis **22**. The first link **18, 518**, or front link, can be formed from any suitable material, including metal or a plastic, such as a 30-33% GF nylon.

20 The first link extends upwardly and has a second end pivotally connected to a front seat frame **24, 524**, which forms a second link, at a second horizontal pivot axis **26** formed on a downwardly extending U-shaped support or leg **28, 528**.

25 Preferably, only a single first link is provided, and is secured to the middle of the support **28, 528**. As shown in FIGS. 47 and 59, the upstanding portions of the support **528** are curved in two planes and extend upwardly and rearwardly from the pivot axis **26**. Alternatively, a pair of first links can be provided along opposite sides of the seat. A pivot axle **32** can be integrally formed on one or the other, or both, of the first and second links **18, 518, 24**,

30

524. Alternatively, a separately formed axle can be used to secure the first and second links. In one embodiment, the axle **32** is formed on the first link, which includes a plurality of round ribs that ride along a bushing **30** secured between the first and second links. The end portions of the axle **32** snap into
5 the second link, while the round ribs carry the load. A socket or recess **36** is formed in the second link to receive the axle, bushing and ribs. A cover member **38** is disposed and connected over a forwardly facing portion of the seat frame to provide an aesthetically pleasing appearance. The seat frame is preferably made of glass filled nylon, although it should be understood that it
10 can be made from a variety of materials, including metal, plastic, composites, and combinations thereof.

[00138] In another embodiment, shown in FIGS. 98 and 99, a front link **1018** includes a pair of axles or posts **1020** extending laterally outwardly from opposite sides of the front link. A pair of bushings **1026** are axially disposed on the posts, and include an inwardly extending resilient arm **1028** with an enlarged end portion defining a catch member **1030**. A seat frame **1040** includes a laterally extending recess **1042** shaped to rotatably receive the pivot member and attached bushings. The frame **1040** includes a pair of spaced apart radially extending catch members **1032**. The catch members **1032** are positioned such that opposite outer walls **1046** thereof are substantially aligned with the outer catch portions **1030** of the resilient arms when the link and frame are engaged, so as to prevent relative axial movement between the link and frame and with the engagement between the posts and socket preventing relative radial movement between the link and frame, thereby
15 rotatably securing the link to the frame. The end of the recess is formed as a socket **1024** shaped to rotatably receive the bushings **1020**. The overall length of the recess **1042**, or the individual depth of each socket **1024** on each side thereof, are greater than the overall length of the link (from one post end to the other), or greater than the individual length of the axle and hub, with a gap
20 **1022** formed between the edge of the link and mouth of the frame on each side of the link.

[00139] In operation, an assembler slides one end (e.g. left side) of the bushing/axle **1020, 1026** all of the way into a corresponding socket **1024** such that the gap **1022** on that side is eliminated and such that an opposite bushing/axle **1020, 1026** clears the mouth of the recess on the other side (e.g., right side) and is aligned along a pivot axis **1034**. At this initial insertion stage, an opposite catch member **1030** (e.g., right side) is biased radially outwardly by a corresponding catch member **1032** (e.g., right side) on the frame. The user then moves the link **1018** in an axial direction along axis **1034** toward the opposite end until the biased catch member **1030** (right side) slides past the catch member **1032** on the frame and snaps into place, thereby rotatably securing the link to the frame. As shown, the link can be installed from either side, and is therefore not left or right handed. It should be understood, however, that the mechanism could be configured with a single catch member on the link and a single catch member on the frame, with an opposite elongated socket in the frame to initially receive the link axle. It should be understood that this device can be used to rotatably secure any two components, and is not limited to the frame and link for a chair as shown and described. It should also be understood that the resilient arm and/or bushing can be integrally formed with the link component. In addition, the arm and catch portions can be used to secure any two components in a non-rotatable engagement, for example where the configuration of the socket or end post, or other non-rotation members, are configured to prevent such rotation. The device provides for two components to be non-axially and non-radially moveable relative to each other without having to provide an opening or access for a pin to be inserted along the rotation axis.

[00140] Referring to FIGS. 6-8 and 57-60, the front seat frame **24, 524**, or second link, has a pair of substantially horizontal arms **40, 540** that are spaced apart in the lateral direction and form an opening **42** therebetween. The arms **40** extend rearwardly in the longitudinal direction **50** from the front to the rear of the chair. Each arm is configured with a guide **44, 544** or track that opens to the front of the frame. Each arm preferably has an L-shaped

cross section defining a substantially horizontal flange **46, 546** and a vertically oriented flange **48, 548**. A plurality of fingers **54, 554** extend upwardly from a top of the vertical flange and are adapted to anchor a fabric **56** by way of a carrier member, shown in FIG. 17, which snaps onto the frame. For example, 5 the fingers can be configured with barbs or catch members at the ends thereof for engagement with a carrier or other cover component. In other embodiments, the seat frame is formed with a female receptacle that receive a male portion formed on the carrier member. Various suitable embodiments for forming the fabric and carrier, and securing them to a support structure, are disclosed in U.S. Application No. 10/796,406, filed March 8, 2004 and 10 entitled “Fabric Attachment Device,” the entire disclosure of which is hereby incorporated herein by reference. In the embodiment shown in FIGS. 59 and 60, the flange **548** is not linear, but rather has a slight concave profile, and then tapers or slopes downwardly toward the horizontal flange **546** toward the 15 rear portion of the second link **524**.

[00141] In an alternative embodiment, the carrier member is omitted. Instead, the fabric is provided with a plurality of fastener components, such as Christmas tree fastener or snap-fit fastener, that engage openings in the frames with a snap fit. The fabric can also be secured with other mechanical 20 fasteners, by bonding, or by various combinations thereof. For example, as shown in FIG. 79, a frame member **221** is attached to an edge portion **225** of the cover, e.g., fabric or textile material, with a staple, bond, sewing etc., or combinations thereof. A Christmas tree fastener **223** is then secured through the frame member **221** and into the seat frame, with the cover wrapping 25 around the inner frame and covering the head of the fastener **223**.

[00142] Referring to FIG. 80, a frame member **321** is again secured to an edge portion of the cover with bonding, stapling, sewing etc., or combinations thereof. The frame has a U-shaped socket in which a retainer clip **327**, e.g., tinnerman clip, is inserted. The clip **327** releasably engages a 30 forwardly facing flange portion of the backrest frame **302**, with the fabric

wrapping around the edge of the frame member 321 and then across the front of the pad structure.

[00143] Referring to FIGS. 6-8 and 57-60, a plurality of engagement/support arms 58, 558 extend upwardly from an inboard edge of each horizontal flange 46, 546. The support platforms are each configured with an enlarged head portion 60, 560. The engagement/support platforms are joined to a suspended body support member, which defines a portion of the seat. In particular, a front, thigh-supporting region 62 of the seat is coupled to the arms of the front seat frame.

[00144] For example, a membrane can be disposed across the opening and be engaged with the support platforms or fingers on each arm, as shown for example in U.S. Application No. 10/738,641, filed December 17, 2003, published as U.S. Publication No. 2004/0183350 A1 and entitled "Tilt Chair and Methods for the Use Thereof," the entire disclosure of which is hereby incorporated herein by reference. In one alternative embodiment, the suspended body support member is configured as a suspended pixelated seat structure, as shown for example and without limitation in U.S. Application Serial No. 11/433,891, filed May 12, 2006 and entitled "SUSPENDED PIXELATED SEATING STRUCTURE", the entire disclosure of which is hereby incorporated herein by reference. In particular, as shown in FIGS. 12-17, the suspended pixelated seat structure has a frame component 64 having plurality of openings through which the support arms are disposed, with the enlarged heads engaging the frame with a snap-fit. The suspended pixelated seat structure further includes a macro compliance layer 66, including for example a plurality of primary support rails, joined to the frame, a micro compliance layer 68, including for example a plurality of spring elements, joined to the macro compliance layer, and a load support layer 70, including a plurality of pixels connected to the springs.

[00145] In one embodiment, shown in FIGS. 56 and 59, the macro compliance layer 66 is connected directly to the frame. In particular, each strip 67 of the macro layer has a T-shaped head portion 69, which is disposed

in the opening between two adjacent support arms 558. The enlarged head 560 extends over the T-shaped head portion and holds the strip to the frame. The head 69 also has an opening therethrough which receives one of the posts 71 positioned between adjacent arms 558.

5 [00146] Referring again to FIGS. 6-8 and 57-60, a rear seat frame 72, 572, which forms a third link, has a pair of arms 74, 574 extending forwardly in the longitudinal direction 50. The arms are spaced apart in the lateral direction 52 and are substantially aligned with the arms 40, 540 of the forward seat frame, with the free ends of the arms 40, 540, 74, 574 substantially abutting. The arms 74, 574 are configured similar to the arms of the front seat frame, and include horizontal and vertical flanges 76, 576, 78, 578 upwardly extending fingers 80, 580 and upwardly extending engagement/support members 82, 582 and posts 71 which are configured to support a suspended body support member as just explained. In particular, a rear, buttock-supporting region 84 of the seat is coupled to the arms of the rear seat frame, where the buttock-supporting region 84 is spaced longitudinally rearwardly from the thigh-supporting region 62. In the embodiment shown in FIGS. 59 and 60, the flange 578 is not linear, but rather has a slight concave profile, and then tapers or slopes downwardly toward the horizontal flange 576 toward the front portion of the third link 524. The flanges 548 and 578 in combination form a V-shaped opening when viewed from the side. The opening helps prevent the carrier member or other component of the fabric, from experiencing excessive tension as the rear seat frame 572 pivots relative to the front seat frame 524.

10 25 30 [00147] A pair of leaf springs 86, 586 bridge or span the gap between the free ends of the arms 40, 540, 74, 574 of the front and rear seat frames and are secured, for example with adhesive and/or fasteners 587, to the horizontal flanges 46, 546, 76, 576 of each of the arms. A plurality of posts 589 further support the macro compliance layer 66. The leaf springs 86 pivotally connect the front and rear seat frames, or second and third links, at a virtual horizontal pivot axis 88. In an alternative embodiment, the second and third links can be

pivots connected at a hard pivot axis, for example with a pivot member. It should be understood that the pivot axis can be defined as a compliant joint allowing two components to pivot relative to each other, and that the position of the axis (actual or virtual) may change or move over the range of pivoting between the two components.

5 [00148] The rear seat frame has a pair of downwardly extending support members **90, 590**, positioned along each side of the frame. A pair of armrests **92** are connected to and extend upwardly from the support members. The rear seat frame can be made from two parts, each of which can be a different material, for example glass-filled nylon and aluminum.

10 [00149] The rear seat frame **72, 572**, or third link, also includes a pair of forwardly extending lugs **94, 594** that are pivotally connected to the tilt control housing **2**, or base component, at a fourth horizontal pivot axis **96**. In this way, the base component **2**, or tilt control housing, front pivot link **18, 518** and front and rear seat frames **24, 524, 72, 572** define the four links of a four-bar linkage.

15 [00150] In operation, and as best shown in FIGS. 3A-3D and 48-54, the user tilts rearwardly in the chair, and in particular the seat, from an upright position (FIGS. 3A and 48-51) through an intermediate recline position (FIGS. 3B and 52) to a fully reclined position (FIGS. 3C and 53). As the user tilts rearwardly, the first link **18, 518** is pivotable relative to the base component, or tilt control housing, about the axis **22** in a first rotational direction (clockwise when viewed from the left-hand side). At the same time, the third link **72, 572** or rear seat frame, pivots in the first rotational direction relative to the second link **24, 524** or front seat frame about the pivot axis **88**, such that the angle between the upper surface **96** of the front region **62** of the seat and the upper surface **98** of rear region **84** of the seat opens up as the user tilts rearwardly, and forms an angle of greater than 180° when the seat is in the reclined position, and preferably in any reclined position rearwardly of the upright position. Indeed, in the initial upright position, the upper surface of the front region and the upper surface of the rear region forms a slight crown,

with an angle greater than 180°, and desirably about 183°. In one embodiment, the rear seat region 84 pivots rearwardly 18° relative to ground as the seat moves from the upright position to the fully reclined position, while the front seat region 62 pivots only 3° relative to ground, such that the rear region pivots 15° further than the front region, and forms an angle greater than 180°. In various embodiments, the angle between the upper surface of the front region and the upper surface of the rear region in the fully reclined position can vary between about 185° and 200°, and preferably is about 195°. In this way, the rear region 84 of the seat provides support for the ischial tuberosities or buttock region of the user, and prevents the user from sliding forwardly in the seat as the user tilts rearwardly in the chair. At the same time, the front region 62 of the seat is maintained in substantially the same orientation (3° pivot) throughout the tilt range of the chair. By separating the rear, ischial support region from the front, thigh support region, the entirety of the seat support surface does not have to be tipped or pivoted as the user tilts rearwardly. As a result, the hip drop is reduced, thereby providing for tighter package space between the seat surface and tilt control, less energy stored in the tilt, and lower torques at the given angular travel.

[00151] Preferably, the first pivot axis 20 formed between the first link 18, 518 and the tilt control housing 2 is positioned forwardly of the fourth pivot axis 96 formed between the third link 72, 572 and the tilt control housing 2, with the fourth pivot axis 96 positioned forwardly of the third pivot axis 88 formed between the forward and rearward seat frames in one embodiment (FIGS. 2-3C), such that the third link 72, and connected back support member 100 tilt rearwardly at a greater rate and angle than does the second link. In another embodiment, the fourth pivot axis 96 and the third pivot axis 88 are substantially aligned vertically (FIGS. 48-54). The pivot axis 88 is aligned with the pivot axis 96, or disposed rearwardly therefrom, so as to prevent the sensation of pressure or lift mid-thigh on the user.

[00152] Referring to FIGS. 77 and 78, an alternative embodiment of the chair is configured with a linkage that allows for a forward tilt of the seat and

backrest. In particular, first link **421** has reposition with a first end portion pivotally connected to the second link **524** at the pivot axis **26**, and a second end pivotally connected to the tilt housing at an axis **423**. As the user tilts forwardly, the first link **423** is pivotable relative to the base component, or tilt control housing, about the axis **423** in a first rotational direction (counter-clockwise when viewed from the left-hand side). At the same time, the second link **524** pivots relative to the third link **572** such that the angle between the upper surface **96** of the front region **62** of the seat and the upper surface **98** of rear region **84** of the seat opens up as the user tilts forwardly, and forms an angle of greater than 180° when the seat is in the forward tilt position. Indeed, in one embodiment, the angle between the upper surface **96** and the upper surface **98** is always maintained at an angle greater than 180°, whether in a forward tilt position, an upright tilt position or a reclined tilt position, with the angle between the rear upper surface and the forward upper surface opening up even more as the user reclines, or tilts forwardly.

Additional Base Components:

[00153] An adjustable support column **102**, preferably pneumatic and shown in FIGS. 1-3D, 5 and 48-54, is mounted to a rear portion of the housing **2** at opening **104**. A top portion of the column **102**, having a side-actuated lever (not shown), extends into the housing. A cable **106** is connected to the lever, and can be moved within a guide to actuate the lever. An opposite end of the cable is engaged by an arm portion **114** of the lever arm **108** pivotally connected to a fulcrum assembly, as shown in FIGS. 5 and 9. The lever is actuated by a push button **110** extending from the end of a grippable handle **290** connected to an actuator tube. In operation, the user pushes the button **110**, which laterally moves a rod that engages an arm **112** and rotates the lever arm **108** about a vertical axis **288**. As the lever **108** rotates, the arm portion **114** moves the cable **106** to actuate the support column lever, which in turn allows the support column **102** to extend in response to a gas spring contained therein, or to collapse in response to the

weight of the user being applied to the seat. One suitable support column is available from Samhongsa Co. Ltd., otherwise referred to as SHS.

[00154] In an alternative embodiment, shown in FIGS. 40 and 41, the actuator is configured as a joy-stick **600** rather than a push button. The joy stick includes an arm or post portion **602** and a base **604** having a circumferential shoulder **606** that engages an annular support **608** formed on a spring retainer **610**. The joy stick **600** is pivotable about any axis lying within a plane **612** defined by the shoulder, i.e., a plane substantially perpendicular to the longitudinal axis **614** the arm of the joy-stick. The joy stick is moveable from an upright position, shown in FIG. 40, to an actuated position, with a spring **616** biasing the joy-stick actuator toward the upright position.

[00155] The spring retainer **610** includes an internal cavity **618** having an end wall **620** engaging the spring **616**. A cable **622** includes an enlarged end portion **624** connected to the base of the joy stick, preferably by disposing the end portion in a cavity **626** having a narrow throat **628** and a frusto-conical shaped entryway **630**. An enlarged spring engaging portion **632** is spaced from the end portion **624** along the length of the cable. In operation, the user grips or pushes on the end of the arm **602** of the joy stick, which pivots about an axis defined by the junction between the shoulder **606** and the annular support **608** of the spring retainer. The spring **616** is compressed between the end wall **620** of the spring retainer and the enlarged portion **632** of the cable, which urges the joy stick back to an upright, or centered position when released by the user. As the user pivots the joy stick **600**, the cable **622** is moved relative to a cable guide **634** from a first position to second position and actuates the support column lever, which allows the support column to extend or collapse. The joy stick **600** can be pivoted in any direction about any point along the circumferential shoulder so as to actuate the support column. It should be understood that the joy-stick can be used to actuate other components, and convert a pivoting/rotating movement into a linear actuation, or back to a rotating/pivoting action at the distal end of the cable. A grippable housing **690** surrounds and supports the spring retainer and joy stick. A bezel

636 is secured to the end of the housing, and is open along the axis such that the arm **602** extends outwardly for access by the user.

[00156] Referring to FIG. 1, a base **116**, preferably a five arm base with casters, is mounted to the bottom of the support column **102** in a conventional manner, although one of skill in the art would understand that other support columns and bases can be used to support the housing, including fixed height support columns and non-rolling bases, including for example a base configured with glides.

[00157] With the chair being generally described, the various features of the armrests, the seat, the backrest and the tilt control assembly, along with various controls therefore, will be described in more detail below.

Adjustable Seat Depth:

[00158] Referring to FIGS. 7-8, 12-17 and 56-69, the length of the front region **62** of the seat (fore-aft longitudinal measurement) can be adjusted to alter the overall depth (front to back length) of the seat. The seat depth assembly includes a rigid carriage member **118**, **718** having a laterally extending support **120**, **720** with a leading edge **122**, **722**. In one embodiment, the leading edge is configured with a plurality of steps **124** as shown in FIGS. 7-8 and 12-17. In the embodiment of FIGS. 56-59, the leading edge is linear, or extends forwardly with a generally convex curvature. In the first embodiment, a center step portion **126** of the leading edge, formed along the lateral centerline of the carriage, extends forwardly, with a plurality of steps **128** (shown as two on each side) disposed progressively rearwardly relative to the center step **126**. At the outer lateral edges, one or more steps **130** progressively move forward relative to the rearwardmost step. The carriage is provided with a pair of grippable handles **132**, shown as tabs, which extend laterally outwardly and/or upwardly from each side of the seat. The carriage **118** further includes a pair of rearwardly extending slide members **134** that are slidably engaged with the guide/track **44** formed on each of the arms of the front seat frame. The carriage **118** is translatable moveable relative to the

front seat frame **24** in the longitudinal direction **50** (fore-aft). The terms “translate,” “translatable” and variations thereof, means to move or displace along a path (linear or non-linear (e.g., curved or curvilinear)) from one point to another point spaced apart by some distance. It should be understood that a component that is translated relative to another component can also be rotated relative to that same component, with the translation and rotation occurring simultaneously, successively and/or both simultaneously and successively. In one embodiment, a bushing **136** is secured to the seat frame in the guide **44** for engagement with the slide members.

10 [00159] In the embodiment of FIGS. 57-59, the carriage member **718** includes a pair of opposite circular end flanges each having an opening disposed therethrough. A vertical flange extends inwardly from the forward portion of the end flange and is secured to a track or slide member **734**. The slide members are slideable or translatable relative to a guide/track **744**, which is secured to the first link or seat frame **524**. A pair of end covers **745** each include flexible engagement members that engage the opening in the end flanges of the carriage member. The covers are provided with an opening in which the user can insert a finger or thumb into for gripping and moving the carriage member. A fabric carrier **747** wraps around and is moveable relative to a hub portion **749** formed on the cover. The carrier member includes a pair of tethers **751** that further wrap around a bearing portion **761** on the cover **745**. The bearing portion is preferably curved and oriented with a curve about a vertical axis. In this way, the carrier can be rotated about a horizontal axis and then a vertical axis formed by the bearing portion. This ability to slide past surfaces oriented in different planes or about different axes is facilitated by the user of a tether. The end of the tether **751** is formed with a plurality of enlarged portions or stops **763**. The tether is inserted into a notch **765** (FIG. 60) on the front of the seat frame, with one of the stops engaging a top surface of the horizontal flange of the frame and being larger than the notch to prevent pull-through. A plurality of stops are provided such that the tether can be set at different initial lengths depending on the size of the seat.

[00160] A flexible body support member 138 has an upper first portion 140 slidably/translatably connected to the seat, e.g., the suspended body support member 70, for example with a plurality of fasteners, such as tabs 141 received in an opening 143. As shown in FIG. 47, 58, 59 and 65, the flexible member has rearwardly extending strips 141 with outboard, laterally extending flanges 139 that are received in openings formed by laterally spaced upper platforms 165 and laterally spaced lower platforms 163. The lower platforms 163 are connected with a base floor 167, with a vertical flange 169 extending upwardly from the base floor to support the upper platform. The flanges 139 are received under the outwardly extending portions of adjacent upper platforms 165, while the main body portion of the strip 141 is supported by the lower platform 163. In this way, the strips 141 are vertically supported, but also allowed to translate or slide relative to the support layer 70.

[00161] The flexible member further includes a second portion 142 connected to the carriage 118, with a third curved portion 144 (bullnose) positioned between the first and second portions and forming a leading edge of the flexible member. The flexible member is configured with a plurality of laterally spaced and longitudinally extending slots 160 that define a plurality of longitudinally extending strips 162 as well as strips 141. The flexible member can be made from various plastic materials such as polypropylene or polypropylene blended with KRATON. The flexible member can be configured as a single, integrally formed member with the slots formed therein, or as a plurality of independent, separate strips. Preferably, the widths and number of strips corresponds to the width and number of steps 124 formed on the leading edge 122 of the carriage. The carriage 118 is disposed behind or beneath the flexible member, with the leading edge 122 disposed adjacent to, and in one embodiment, engaging an inner surface of the flexible member, or alternatively a bottom surface of the flexible member, and in particular the strips 162. In an alternative embodiment, the leading edge of the flexible member on the third portion thereof is generally curved in a forwardly convex shape, with the lengths of the strips 162 becoming progressively and

individually longer as they move inboard. The leading edge of the seat is defined by the forwardmost portion, or third portion of the strips **162**, with the understanding that a cover such as fabric could further be disposed over the strips. In an embodiment where the forwardmost portions of the strips follows
5 the leading edge of the carriage, the leading edge of the seat is non-linear, or convex.

[00162] A cover member **56**, best shown in FIG. 17, is disposed over the entirety of the seat, including the rear region **84** and the front region **62**. The cover member, preferably configured as a fabric and carrier member, wraps around the flexible member **138** and covers the third curved portion **144** of the flexible member. The fabric is secured on all sides to the carrier member including laterally extending member **165**. The cover further includes a first fold **146**, shown in FIGS. 16 and 17 as a pair of laterally spaced tethers. As disclosed above, the carrier member can define the first fold. In an alternative embodiment, the first fold is defined by a portion of the fabric extending across the entire width of the cover. The free edge **152** of the first fold, or free end of the tethers (whether formed by the fabric or the carrier member, is anchored to the front seat frame, for example with a rod **154**, or to the notch **765** as explained above. The first fold lies along an upper surface **156** of a driving member **158**, or inboard of the cover **745**. In one embodiment, the driving member **158** is formed by rearwardly extending arm portions of the flexible member **138**. In another embodiment, the driving member can be formed by the carriage member.
10
15
20

[00163] As shown in FIG. 57, the driving member is formed by the cover **745**, which includes the bearing portion **761**. The curved bearing portion **761** of the driving member forms a folded edge **148** in the cover member (or carrier member), with a second fold **150** underlying the driving member and the first fold, or lying outboard of the first fold. It should be understood that the actual material of the cover defining the folded edge, as well as the length of the first and second folds, varies and shifts between the first and second folds as the carriage member **118** and connected flexible
25
30

member 138 move relative to the seat frame. As such, the folded edge 148, as well as the first and second folds 146, 150, are defined by the material forming the edge and folds at any one time. In this embodiment, the tether, or portion of the cover forming the first fold, is preferably non-elastic.

5 [00164] In operation, the user grasps the carriage member 118, e.g., the handles 132, the cover 745, or the front portion of the seat such as the flexible support member or bullnose, and moves the carriage member to a desired longitudinal position defining a corresponding depth of the seat. Various detents or other locking/latching features can be formed on one of the carriage and seat frame to provide a plurality of adjustment positions, or the adjustment can be simply arrested by friction so as to provide an infinite number of adjustment positions.

10 [00165] As the carriage 118 is moved forwardly, for example, the third portion 144 and leading edge of the flexible member 138 also move forwardly, with the length of the first fold 146 of the cover being shortened. At the same time, the upper portion 140 of the flexible member and corresponding portion of the cover lying thereover lengthens, which corresponds to a greater overall seat depth. Conversely, as the user moves the carriage 118 rearwardly, the drive member 158 moves the folded edge 148 rearwardly and thereby increases the length of the first fold 146 as the third portion 144 and leading edge of the flexible member are moved rearwardly, with a corresponding seat depth being reduced.

15 [00166] In an alternative embodiment, the rear edge of the cover or fabric is simply secured to the seat frame, tilt housing or other structure with an extensible, or stretchable tether, for example an elastic tether. For example, the tethers in FIG. 17 can be formed as elastic members. In this embodiment, the cover does not have a first fold. Rather, the elastic tether simply elongates or retracts as the carriage is moved forwardly and rearwardly respectively. In this way, the tether holds the cover against the body support member and allows it to slide past the front, curved portion thereof when the seat depth is

lengthened, but then draws the fabric back under the seat as the seat depth is shortened.

[00167] The flexible strips **162**, along with the stepped leading edge **122** of the carriage, provides a varied suspension force for the user's thighs. In particular, at the region where the steps **128** are formed most rearwardly, the corresponding strips **162** of the flexible member are allowed a greater amount of deflection in response to the weight of the user. These steps **128** and strips are generally aligned with the longitudinally extending thighs of the user. Conversely, the flexible member **138** is more rigidly supported along the lateral centerline at the step **126**, and at the outermost lateral positions at steps **130**, due to the steps **126, 130** having a greater forward extent.

[00168] The cover **56** can be secured to the rear and front seat frames, as well as the flexible member, with a carrier member **164**, shown in FIGS. 6 and 7, which engages for example and without limitation the fingers **54, 80** formed on the seat frames.

[00169] Referring to FIGS. 81-84, in an alternative embodiment, a cover **800** includes a rearward side wall portion **802**, an upper flange **804** and a lower flange **806**. The upper flange **804** is coupled to the suspended body support member **70**, for example by bonding or with fasteners and like, while the lower flange is coupled to the seat frames **524, 572**. A forward portion **808** of the cover includes a curved grippable portion **810**, forming a curved wall having bottom and front portions, and a channel **812** formed laterally therethrough. A handle **814** includes a curved grippable portion **816** shaped to be received in the channel, and a rearwardly extending shaft or post **818**. The handle further includes a flange **820** extending laterally inwardly, which is secured to the carriage **718**. The post **818** extends rearwardly through a channel formed in and by the cover **800** and extends through an opening of the cover so as to increase the rigidity of the cover as shown in FIGS. 81 and 82. An intermediate portion **822** of the cover includes an expansion or bellows structure, which allows the forward portion **808** to move fore and aft in a longitudinal direction relative to the fixed rear portion **802** of the cover. The

expansion structure includes a plurality of vertical ribs **824** connected with connection ribs **826**, which allow the vertical ribs to move from a minimum seat depth position, wherein the ribs **824** are proximate each other, to a maximum seat depth position, wherein the ribs are spaced from each other.

5 The cover **800**, including the expansion joint, helps limit the access of the user to the interior of the seat, where various pinch points may be created. In addition, the cover **800** provides an unique aesthetic and closure, while still permitting a relative movement or translation of the forward portion of the seat, for example when adjusting the depth of the seat. As shown in FIGS.

10 100 and 101, the cover **1800** includes a rear cover portion **1804** that closes off the sides of the seat between the seat surface and the lower frame members, and a front cover portion **1808** that is secured to the carriage, with the front cover portion sliding relative to the rear cover portion as the depth of the seat is adjusted. Either the front or rear portion can be positioned exteriorly of the

15 other during the relative sliding movement.

[00170] Referring to FIGS. 85 and 86, in an alternative embodiment of the seat depth mechanism, the cover member **826**, for example a fabric member, includes a laterally extending wire **828** secured to edge portion of the fabric, for example by sewing or heat sealing the wire to the fabric, or by positioning the wire within a fabric loop. A pair of laterally spaced clips **830** are secured to the wire, and thereby to the fabric. Of course, it should be understood that the clips can be secured directly to the fabric without the wire, although the wire provides stability to the fabric as it is moved. A pair of tethers or strings **832** have a first end attached to a respective one of the clips. It should be understood that the tether or string can be secured directly to the cover, for example by bonding or sewing, or can be integrally formed therewith for example as an extension of the cover. In this way, the tether or string are configured as part of the cover or fabric. The strings or tethers extend rearwardly, through an opening **834** formed in a guide member **836**. The tether or string **832** slidably moves relative to the guide member through the opening at a folded portion **838** of the string, again forming a portion of

the cover. An opposite end of each string is coupled to the seat frame **524**, for example by securing a loop of the string to a hook **840** on the frame. A spring **842** is disposed in a channel around a post **844** formed in the spring guide, with the channel **846** which is further disposed on a rearwardly extending tab

5 **848** or protrusion of the flexible member **138**, or lower portion **142** thereof.

The connection of the two ends of the string **832** to the frame and the flexible member preloads the spring by urging the guide member **836** toward the flexible member **138** against a biasing force of the spring **842**. In this way, the string **834** and spring **842** maintain the cover **826** in tension about the flexible member **138** as the flexible member is moved fore and aft between the minimum and maximum seat depth positions with the tether moving/sliding relative to the guide.

10 **Tilt Mechanism:**

15 **[00171]** As shown in FIGS. 5, 10, 21-23 and 42-45, and as mentioned above, the housing **2** includes a lower housing member **16** and an upper housing member **14**. A seat support bracket **166** has a pair of forwardly extending pivot arms **168** and a rear support platform **170**. The support bracket **166** is connected to the rear seat frame **72**, and in particular is fastened to the platform **170**, such that the support bracket **166** forms part of the third link. The pivot arms **168** are pivotally connected to the tilt control housing at the fourth pivot axis **96**. Each pivot arm has a curved, or arcuate, slot **171** formed therein, with the slot having a generally vertical orientation.

20 **[00172]** A back support bracket **172** also includes a pair of forwardly extending pivot arms **174** that are pivotally connected to the tilt control housing at the fourth pivot axis **96**. The pivot arms also each have an arcuate slot **176** (or track) that are aligned with the slots **171** in the seat bracket. A forward stop member **178** (or guide) extends through the slots and is secured to the tilt control housing. The brackets **166**, **172** pivot about the fourth pivot axis **96**, with the stop member **178** engaging a bottom of the slots **171**, **176** to

limit the forward pivoting or tilting of the seat and back in an upright, normal position as shown in FIG. 10.

[00173] A pair of tilt limiters **180, 780** are pivotally secured to the seat bracket about a pivot axis with a pivot member. The tilt limiters have a plurality of indexing detents **182** selectively engaged by a cantilevered spring **184** extending from the seat bracket. The indexing detents can alternatively be located along a side face of the tilt limiter. The tilt limiters further have a plurality of steps **186** formed along a leading edge thereof that are selectively engaged with an edge **188** on the tilt control housing. In this way, the rear tilting of the seat bracket **166**, and connected back support bracket **172**, are limited by the pivotal position of the tilt limiters **180** relative to the tilt control housing **2**. The pivotal location of the tilt limiters **180** is controlled by an actuator **190**, configured as a cross tube, rotatably connected to the seat bracket. The actuator **190** includes a pair of lugs with slots **192**, with the lugs being connected to corresponding slots **191** on the tilt limiters **180**. When rotated, the actuator **190** pivots the tilt limiters **180** about pivot axis **196** to the desired position, with the indexing mechanism (detent **180** and spring **184**) corresponding to the various available positions of the tilt limiters.

[00174] In another embodiment, shown in FIGS. 39 and 42, the actuator **790** is positioned more rearwardly, such that a lever or grippable portion **731** on the actuator is disposed adjacent the location of the hand of the user when their arm is relaxed and allowed to drop or hang vertically, i.e., at a “handfall” position relative to the user. As shown in FIG. 39, the grippable portion is preferably positioned rearwardly of the rear of the seat or alternatively in the rear 10% of the seat depth. A link **791**, generally Y-shaped, is connected to the actuator. End portions or lugs **793** of the link are rotatably connected to a lever portion **795** extending radially from the actuator, with arms **797** diverging outwardly from the end portions and having opposite end portions rotatably connected to the tilt limiters **780**. The seat bracket **166** is provided with an opening **799**, configured as a pair of slots, in the rear portion of the platform **170** that accommodate the lever portion **795** and lugs **793** of the link.

In operation, the user rotates the actuator **790** by way of grippable portion **731**, which pivots the link **791** and thereby rotates the tilt limiters **780** to a desired position.

[00175] As best shown in FIGS. 5, 9 and 42-44, a fulcrum assembly **200**

5 is moveably installed in the tilt control housing beneath a pair of leaf springs

202. The leaf springs are preferably made of a composite material, such as a

fiberglass and epoxy matrix, although it should be understood that other

resilient materials such as steel would also work. The composite material can

be a fibrous composite, a laminated composite or a particulate composite. A

10 suitable composite spring is commercially available from Gordon Plastics, Inc.

of Montrose, Colorado under the specification designation of GP68-UD

Unidirectional Fiber Reinforced Bar Stock, and sold under the tradename

POWER-TUFF. The fiberglass/epoxy matrix bar preferably is unidirectional

with a glass content of about 68% and a laminate density of .068 lbs./in.³. The

15 bar preferably has a flexstrength of about 135,000 psi, a flex modulus of about

5,000,000 psi, and an ultimate strain of about 2.4%. The use of a composite

material bar can help eliminate the problems associated with creep. Another

suitable spring is uni-directional fiberglass 70 ± 2% by weight 30% vinyl

ester hi-performance resin. The shape, size (width, thickness, length) and

20 material of the springs can be varied to provide various spring characteristics.

In addition, the spring can be compression molded in various curved shapes to

provide unique tilt balance and ride options. In one embodiment, each spring

is approximately 9.25 inches long, 1.85 inches wide and .225 inches thick.

[00176] In operation, one end **204** of the leaf spring **202** directly biases

25 the back support bracket **172**, via a laterally extending rod **218** secured to the

back support bracket, and indirectly biases the seat support bracket **166** via the

back support bracket in an upward direction so as to thereby support a user

sitting in the chair. The opposite end **206** of the spring engages a cross

member **208**, configured with openings **212** and a pair of locator tabs **210**

30 disposed in openings **216** formed in the springs **202**. The cross member is

disposed laterally across a front portion of the housing, while an intermediate

portion of the spring is supported by the fulcrum member **214**. In this way, the springs **202** act as a simply supported beam with a load imparted intermediate the supported ends thereof. To adjust the force applied to the back support, the user moves the fulcrum assembly **200** in a linear, 5 longitudinal direction within the housing. It should be understood that the spring biases the seat support by way of the back support, and that in alternative embodiments, the spring can bias the back support and seat support through a common element, such as with a pivot member that pivotally connects those members, or can directly bias the seat support and also the back support. In any of these embodiments, it should be understood that the springs 10 are biasing each of the seat support and back support, individually and in combination.

[00177] As the fulcrum assembly **200**, including fulcrum member **214**, is moved rearwardly in the housing **2**, the distance between the point of support at the fulcrum member **214** and the support member **218** is decreased, so as to correspondingly increase the force applied by the rear end **204** of the spring. 15 Conversely, the fulcrum member **214** can be moved forwardly in the housing **2** to decrease the amount of resistive force applied to the seat support bracket **166** and back support bracket **172** by increasing the beam length, or the distance between the fulcrum member **214** and the support member **218**. 20 Since the leaf springs **202** are simply supported at each end, rather being clamped to the housing **2**, the pivot rod **218** or both, bending moments are not introduced at the ends of the spring. When clamped, the properties of the spring, and the amount of the clamping, can effect the loading and associated 25 stresses. Moreover, by providing a simply supported spring, tolerances can be relaxed and the curvature of the spring is allowed to undulate as the beam length changes.

[00178] Because the leaf springs **202** are disposed in the housing **2** in a side-by-side arrangement, and are preferably formed as flat bars, the housing 30 can be made more compact at lower cost in an aesthetically pleasing way. Moreover, the resistive force of the spring can be adjusted easily and simply

by slideably moving the fulcrum assembly 200 within the housing 2. Since the resistive force is determined by the beam length, rather than by prestressing the spring, the adjustment does not require a progressively larger actuation force as is typically associated with torsion springs and bars and compression springs.

[00179] Referring to FIGS. 5 and 11, the end 204 of the spring is configured with a cam 220 having a concave cam surface 222. FIG. 11 shows the spring in two different biasing positions. The cam surface is formed on an upper surface of the spring. The cam can be integrally formed as part of the spring, or separately configured and connected to the spring with, for example and without limitation, rivets or other mechanical fasteners, adhesives, etc., or any combination thereof. The back support bracket 172, and in particular the rod 218, is configured with a cam follower 224 having a convex cam surface 226. In an alternative embodiment, shown in FIGS. 42 and 43, a separate cam follower is omitted, with the rod 218 itself functioning as the cam follower (or driver), and having a cam surface 227. As the user tilts rearwardly, the cam follower (or driver) 224, 218 rides along the cam 220 with the two cam surfaces 222, 226, 227 contacting each other, such that the cam follower slides rearwardly along the cam surface 222, which drives more deflection into the spring as compared with a flat spring surface. This has the effect of increasing the spring force applied by the spring, which corresponds to an increased torque as the angle of recline increases. In this way, the spring, fulcrum and cam, in combination, provide a balanced ride to the user.

[00180] In particular, a balanced ride is achieved for all of the users. Typically, the greatest imbalance will be for a light user at the full recline position and for a heavy user in the forward position. It must be understood that the user will necessarily need to initially adjust the fulcrum member to achieve a balanced ride at any particular recline angle, but that thereafter, the ride will be substantially balanced throughout the defined tilt range without further adjustments of the fulcrum. As such, the chair provides a unique

balanced ride that avoids the user having to readjust the biasing force depending on the angle of recline in which they want to user the chair.

[00181] It should be understood that, in one embodiment, the applied torque and restoring torque are simply loads being applied over a distance. Accordingly, the balanced ride can also be thought of in terms of an applied force being applied by the user to the body support member at a certain location. Various aspects of the springs and tilt mechanism, or alternative embodiments thereof, are disclosed for example and without limitation in US Pub. No. 2004/0183350A1, which is hereby incorporated herein by reference.

[00182] Referring to FIGS. 5, 9, 18-20, 40, 41 and 44 the fulcrum assembly 200 and fulcrum, otherwise referred to as a force adjusting member, includes a base housing 228, an intermediate housing 230, 830, and an upper housing 232, 832. The base housing 228 is configured with a pair of laterally spaced cavities 234 open at both the top and bottom thereof. The base housing also includes a centrally located recess 236 and front and rear walls 238, 240 forming at least a portion of pair of longitudinally spaced openings 242, and one each of a longitudinally and laterally oriented gear recess 244, 246. A pair of laterally extending rollers 248, 250 is disposed in each cavity. The lower roller 250 in each cavity 234 is in contact with the floor 252 or support surface of the housing, while the upper roller 248 in each pair extends above the surface of a side portion 254 of the base member defining the cavity, such that the curved surface of the roller is in contact with a bottom surface of a corresponding spring 202.

[00183] A driven bevel gear 256, disposed in the longitudinally oriented gear recess 244 in the base housing, is threadably engaged with a longitudinally extending lead screw 258 non-rotatably secured to a front of the tilt housing, for example with a flange having a button that faces the housing and snaps into an opening formed in the housing. The lead screw 258 extends through the longitudinally extending openings 242. A thrust washer 260 and bearing 262 are disposed between the bevel gear and a rear surface of the rear wall 240 of the base housing 228 so as to allow the bevel gear to easily rotate

about the lead screw. A bottom of the base housing is configured with a follower **264** or guide, shown as two posts in FIG. 66, which slides in a track **266** formed in the bottom of the tilt housing.

[00184] A laterally oriented drive bevel gear **268** engagingly meshes with the driven bevel gear **256**. The drive bevel gear **268** is further integrally configured with, or otherwise connected to, an idler gear **270** disposed on an opposite side of the bevel gear. The intermediate housing **230, 830** traps or encases the bevel gears **256, 268** between the intermediate housing **230, 830** and the base housing **228**, and further includes a pair of longitudinally spaced 10 openings **270** that surround the lead screw **258** between the housing components.

[00185] A drive pinion gear **272** is disposed in a gear recess **274** formed in the intermediate housing above the idler gear **270**. The drive gear **272** engagingly meshes with the idler gear **270**. The intermediate housing **230** is 15 configured with a laterally extending opening **276**, or half opening, that supports an actuator shaft **278**. An end of the shaft **281** and the drive gear are configured with mating D-shaped ends/openings **280**, such that rotation of the shaft rotates the drive gear. The shaft and drive gear are disposed between the intermediate housing **230** and the upper housing **232**, which is also configured 20 with a gear recess **282** and a laterally extending shaft opening **284**. As mentioned above, in the embodiment of FIGS. 5 and 9, a lever arm **108** is pivotally secured between the upper and intermediate housings and is 25 pivotable around a vertical axis **288**. An end portion of the arm **112** is aligned with the axis of the actuator shaft extending through the drive gear. The intermediate housing is configured with a cable housing stop **286**, such that a cable can be secured to an opposite end of the lever.

[00186] Alternatively, in the embodiment of FIGS. 40, 41 and 44, the cable is translated by the pivoting action of the joy-stick, thereby avoiding the need for the lever arm. As shown in FIG. 44, a retainer clip **281** rotatably 30 engages a circumferential groove formed on the shaft **278**, with the clip

engaging the intermediate housing with a snap fit so as to prevent the shaft from moving laterally relative to the fulcrum assembly.

[00187] In operation, the user rotates the actuator 278 (configured with a grippable member 290) about a laterally extending axis 294, which in turn rotates the drive gear 272. The drive gear rotates the idler gear 270, which rotates the bevel gear 268 about a laterally extending axis 292 parallel to axis 288. The bevel gear 268 rotates the bevel gear 256 about a longitudinally extending axis 294, which threadably engages the lead screw 258 and moves the entire fulcrum assembly 200 in first or second opposite longitudinal (fore-aft) directions 52 to one of a infinite number of predetermined force applying positions. For example the actuator can be moved between first and second adjustment positions so as to move the force adjusting member (fulcrum assembly) between first and second force applying positions. It should be understood that the actuator 278, 290 and fulcrum 214 are infinitely adjustable to an infinite number of adjustment positions and force applying positions respectively.

[00188] As the actuator 278, 290 is rotated and the fulcrum assembly 200 moved in one of the first and second longitudinal directions, the actuator is simultaneously translatable moveable relative to the tilt housing with the fulcrum assembly. In this way, the operator is provided with visual indicia about the relative biasing force that will be applied by the springs 202 simply by viewing the position of the actuator 278, 290 relative to the tilt housing 2. In one embodiment, a scale or other indexing indicia (e.g., text “heavy”, “medium” or “light” or colors (green for light to read for heavy)), is provided on the housing to further aid the operator in ascertaining the predetermined setting of the force applying member. A cover can be disposed around the housing, and be provided with a longitudinally extending slot in which the shaft 278 travels. Alternatively, as disclosed in FIG. 61, a cover can disposed beneath the shaft, with the upper housing of the fulcrum assembly extending upwardly through a longitudinal opening formed in the cover.

[00189] It should be understood that the biasing mechanism can also be used with other springs, such as torsion coil springs tension/compression springs, etc. For example, an actuator acting on an arm of a torsion spring, or against the force of a compression/tension spring, can be moved relative to the 5 housing to provide a visual indicator to the user of the setting of the force applying member before (or while) the user is seated.

Backrest:

[00190] Referring to FIGS. 1-4B, 18-38, 42 and 45-54, a back support member includes lower support member 172, configured as the back support bracket referred to above, pivotally connected to the base tilt housing at the pivot axis 96 and an upper support member 294 pivotally connected to the lower support member about a horizontal pivot axis 296 spaced rearwardly from the pivot axis 96. An adjustment mechanism 298 is coupled between the lower and upper support members 172, 294. At least one backrest component 300, shown in one embodiment as a frame 302, is connected to the upper support member 294 adjacent a thoracic region of the backrest component. A lower portion 304 of the frame 302 is fixedly connected to the seat frame 72 along a rear edge thereof. The upper portion of the backrest is flexible relative to the lower portion thereof, as the upper support member pivots about the axis 296. In an alternative embodiment, the upper portion of the frame is pivotally connected to a lower portion. In the embodiment of 2-4B, a lower back support 303 is connected to and extends upwardly from a rear of the seat frame and is secured to the back frame, or backrest, at a lower portion thereof, for example at the lumbar region. The upper support member 294, together with the backrest 300 and frame 302, can be easily removed or disconnected from support member 172 in a knock-down configuration for shipping.

[00191] The adjustment mechanism 298 is operable between a plurality of positions, including for example and without limitation a first and second position, and is infinitely adjustable. The upper support member 294 is pivotable relative to the lower support member 172 about the horizontal axis 20 25 30

296 between a corresponding plurality of static support positions as the adjustment mechanism is operated. In various embodiments, the upper support member (and an upper body support surface of the back) is pivotable relative to the lower support member (and a lower body support surface of the back) about 10 degrees from a forwardmost position to a rearwardmost position. In other embodiments, the upper member is adjustable between about 1 degree and 15 degrees, more desirably between about 5 degrees and 15 degrees, and preferably about 10 degrees between the forwardmost and rearwardmost positions.

10 [00192] The upper support member includes a spine member 306 and a bracket 308 disposed and secured in a bottom portion of the spine member. In one embodiment, a tab 310 engages the spine to prevent rotation of the bracket relative to the spine. The bracket can be formed integrally with the spine, or as a separate member. The bracket includes a pair of forwardly extending flanges 312 with openings defining the pivot axis 296. The flanges are pivotally connected to the back support bracket 172 with a pair of pivot pins 314.

15

20 [00193] A lower housing component 316 is secured to a support platform 317 on the back support bracket 172. The housing component 316 is configured with a lower wedge surface 318. A cover member 320 is secured to the lower housing component, with the cover and lower housing defining a passageway 322 for a rotatable actuator shaft 326, which travels in a slot 319 formed in the bracket 308. An acme shaft 324 is rotatably mounted in the lower housing. Mating ends 328 of the actuator shaft 326 and acme shaft 326 are configured with D-shaped cross-sections, with a moveable collar 330 disposed over the ends to secure the actuator to the shaft. The collar 330 can be translated in a lateral direction 52 to release or lock the ends of the shafts.

25

30 [00194] In an alternative embodiment, shown in FIG. 45, the lower housing component 916 includes a resilient flexible tab member 918 having catch portion. The housing component can be secured to the support bracket with one or more tabs or hooks, for example with a snap fit. The tab member

918 flexes upwardly as the shaft 324 is inserted through an opening in the lower housing component until the catch member engages a circumferential groove 920, or undercut, formed in the shaft. The end portion 922 of the shaft is formed with a key shaped cross-section, such as a hexagonal cross section, and engages a mating cross-section formed by a socket 924 on the acme shaft 926. The acme shaft is inserted through an opening in the housing component 916, with a head 928 of the shaft engaging an end wall of the lower housing component. A torsion spring 930 has a first down-turned end 932 engaging an opening 938 formed in a platform of the lower housing component. A pair of tabs 940 rotatably engage an elongate shaft portion of the spring, while a bent end portion 934 of the spring extends rearwardly such that it engages the top surface of a flange 942 extending forwardly from the upper support member. The spring can be preloaded before assembly by engaging it with a catch member 935.

[00195] An upper wedge member 332 is disposed over the shaft 324 and includes a slot or socket 336 engaged with a drive member 338, configured as an acme plate threadably engaged with the shaft 324. The drive member 338 can be formed integrally with the upper wedge member or as a separate part, but is considered part of the wedge member in either embodiment. The upper and lower wedge members 316, 332 are configured with opposing wedge surfaces 318, 334 that slide along each other and force the wedge members apart, and in particular, forces the upper wedge member up relative to the lower wedge member as the upper wedge member translates in a lateral direction 52 relative to the lower wedge. It should be understood that in an alternative embodiment, the upper wedge is fixed to the upper support member, and the lower wedge member is translatable moveable in the lateral direction. The upper wedge member 332 has an upper surface 340 that bears against an interior surface of the bracket 308 and causes the upper support member 294 to rotate relative to the lower support member 172 about axis 296 as the wedge members are forced apart. As shown in FIG. 18, a compression spring 342 is disposed between a stop 344 formed on the upper support

member, and in particular the bracket 308, and a stop member 346 extending upwardly from the back support bracket. The spring 342 biases the upper support member away from the back support bracket, or lower support member (clockwise as shown in FIG. 18). In essence the spring 342 biases the bracket 308 against the upper surface of the wedge member 340

5 [00196] In operation, the user rotates the actuator 326, and in particular a grippable portion 348 thereof, in a first or second rotational direction, which causes the shaft 326 to rotate and thereby moves the drive member 338 and associated upper wedge member 332 laterally. As shown in FIGS. 21-23 (and

10 50, 49 and 48), the upper back support 294 is positioned respectively in a forward, neutral, upright position, a nominal, neutral, upright position and a rearward, neutral, upright position relative to the lower back support 172. In particular, the gap between the back support 294 and the bottom of the seat frame or bracket 168 widens as the back support is pivoted rearwardly to the

15 desired upright position (forward, nominal or rearward), with the angle between the body facing surface 98 of the seat and the body facing surface 340 of the back being adjustable. As the wedge surfaces 318, 334 slide past each other, the upper back support 294 is pivoted relative to the lower back member 172 to a desired setting. Preferably, the actuator 326, configured with the

20 grippable member 348, extends laterally outwardly adjacent a side portion of the seat, or rearwardly thereof, and in particular adjacent or rearwardly of a rear side portion of the seat, such that it is readily accessible to a user seated in the chair. In this way, the initial upright setting of the backrest can be adjusted to accommodate different users with different back and spinal

25 postures/curvatures. This adjustment of the initial angle of the backrest is independent of any of the kinematic/dynamic movements of the backrest relative to the seat, but rather is a static fit adjustment. As such, the forward, nominal or rearward adjustment is then held throughout the tilt range of the chair, for example from the upright position through the intermediate tilt

30 position to the full tilt position.

[00197] In addition, the backrest is provided with a mechanism that allows an upper portion 354 of the back to pivot or flex relative to a lower portion 304 of the back between a neutral position and an extended position, as shown in FIGS. 3D, 15 and 54. The ability of the upper portion to pivot relative to the lower portion is independent of the tilt position of the back. The upper portion 354 is pivotable relative to the lower portion when the tilting of the lower portion is limited or restrained, for example when the pivotable movement of the seat frame 72 or bracket 166, which is fixedly attached to the lower portion 304, is limited. In some instances, the upper portion may be pivotable or flexed to an extended position even when the seat frame or bracket is not restrained, for example when the position or weight of the user balances the seat such that it does not pivot rearwardly against the biasing the force of the springs.

[00198] As explained above, the rear tilting of the seat bracket 166 is limited by the position of the tilt limiter 180 or stop member 178 relative to the tilt control housing 2. For example, as shown in FIGS. 18 and 19, the seat is tilted rearwardly from an upright position to a reclined position, wherein the tilt limiter 180, or the engagement of the stop member 178 in the top of the slot 170, prevents further recline of the seat. At this juncture, the user can arch their back, or stretch rearwardly so as to move or pivot the upper portion 354 of the back and upper back support 294 rearwardly relative to the lower portion of the back frame 302 and the seat bracket 166. As the user biases the upper portion 354, the lower back support 172 pivots away from an engagement with the seat bracket 166 against the force of the springs 202, which act on the lower back support 172 as shown in FIGS. 5 and 20. In this way, a single biasing assembly (the pair of leaf springs) biases the seat and back during normal use of the chair, and biases only the upper portion of the back by way of the bracket 172 and support 294 during the extension use of the chair, with the seat being supported by the tilt limiter 180 or stop member 178. In various embodiments, the upper portion can be pivoted relative to the

lower portion, or the upper support relative to the seat bracket, between about 2° and 10°, and desirably about 6°.

[00199] In essence, the back has three levels of adjustment/range of motion: (1) tilt range – from upright through intermediate recline to full recline (can be arrested in various positions by a tilt limiter); (2) back angle adjustment – from forward to nominal to rearward (independent of tilt range); and (3) thoracic adjustment – neutral v. extended (independent of tilt range and back angle adjustment). The back preferably has a tilt range of about 4° to 22°, and more desirably about 18°. It should be understood that the back is infinitely adjustable throughout the tilt range and back angle adjustment, and is not limited to the three positions listed for each. For example, the tilt range includes an infinite number of intermediate recline positions, although the seating structure can be arrested in a limited number of such positions as defined by the steps of the tilt limiter. Likewise, the back angle includes an infinite number of nominal positions between the forwardmost and rearwardmost positions. Finally, the user can move the thoracic region through a continuous range of positions from the neutral to extended positions, particularly when the seat is restrained by the stop or tilt limiter.

[00200] Referring to FIGS. 24-26, 34, 37, 46 and 48, and as mentioned previously, the upper support member 294 includes a spine 306 extending upwardly along a centerline of the back. A pair of arms 356 extend laterally outwardly and upwardly from the spine. A plurality of teeth or tabs 357 extend from the arms for engagement with a carrier member or other covering. The spine is preferably made of aluminum, steel, fiberglass, composites, plastic, or some other rigid but resilient material. The spine can be made of various materials, such as Capron 8233G – 33% Glass Filled Nylon 6.

[00201] The ends 358 of the arms are pivotally secured to upper corners 364 of the frame member 302 about a horizontal pivot axis 360. The frame 302 can be made of various plastic, metal or composite materials, including for example and without limitation a nylon material, or a nylon, elastomeric material. An upper thoracic region 362 of the spine is fixedly secured to a first

cross member 366 of the frame, for example with screw or other mechanical fasteners, with the first cross member being longitudinally spaced from a top cross member 368 of the frame. As shown in FIGS. 34, 39 and 46-48, the thoracic region 362 is configured with four lugs or flanges 363 that are secured to the cross member 366 with a connector member 365. In one embodiment, as shown in FIGS. 62 and 67, a pair of flanges extend rearwardly from the cross member 366. The flanges formed a generally U or V shape in cross section. The connector 365 can be formed integrally or separately from one or both of the spine 294 and frame 302. Likewise, the thoracic region can be directly secured to the cross member 366 or other component of the frame 302. Second and third cross members 370, 372 are further longitudinally (vertically) spaced between the first cross member and a bottom portion 304 or cross member, which is fixedly secured to the seat frame, as explained previously. The first and second cross members 366, 370, and the third and bottom cross members 372, 374 are each connected with a centrally located connector member 376, 378. Likewise, the second and third cross members 370, 372 are connected with a pair of laterally spaced connector members 380 spaced sideways from the centerline of the back frame.

[00202] A number of whiffle structures, or levers rotatable about an intermediate fulcrum, are coupled to the frame, or are integrally formed as shown in FIGS. 96 as part of the frame without side frame members or portions of cross members extending to the side frame members. For example, a first series of longitudinal levers 382 extends (vertically) from the first cross member in the thoracic region, with the first cross member 366 providing some torsional resistance as the levers rotate in opposite first and second directions about an axis defined by the first cross member. A second series of levers 384 extends laterally from each end of each of the first series of levers, with the first series of levers each providing torsional resistance as the each of the second series of levers rotates in opposite first and second directions. A third series of levers 386 extends laterally from each end of the second series of levers 384, again with the second series of levers providing

torsional resistance as each of the third series of levers rotates. Finally, a fourth series of levers **388** extends laterally from each end of each of the third series of levers with the same torsional relationship. Each end **390** of each of the fourth series of levers is configured as a node, with an attachment location 5 configured to be connected to an individual pad. A plurality of the pads are connected to form a unitary pad structure, shown in FIG. 35.

[00203] Referring to FIG. 34, a first series of levers **394** extends laterally from the central connecting members **380**, with an outer leg being longer than an inner leg of each of the first series of levers. A second series of 10 levers **396** is secured to each end of each of the first series of levers, while a third series of levers **398** is secured only to the ends of the outer second series of levers **396**. The inner second series and the third series of levers are each configured with a node **390** at the end of the lever.

[00204] Finally, a first series of levers **400** extends laterally from a pair 15 of relatively rigid arms **402** extending longitudinally upwardly from the bottom cross member **304**, with an outer leg being longer than an inner leg of each of the first series of levers. A second series of levers **404** is secured to each end of each of the first series of levers, while a third series of levers **406** is secured only to the ends of the outer second series of levers. The inner 20 second series and the third series of levers are each configured with a node **390** at the end of the lever.

[00205] Of course, it should be understood that various configurations 25 of levers, with varying numbers of series, can be used to support the back of the user. The preferred embodiment shown in FIG. 34 provides various advantages.

[00206] For example, in one alternative embodiment shown in FIGS. 30 87-91, 96 and 97, portions of the cross-members and side frame members are omitted. In this embodiment, the arms **900** are formed as a separate antler structure, which is pivotally coupled to the spine **902** with a shaft or axle **904** about a pivot axis **906**. A pair of bushings **908, 910** supports the shaft in each of the spine and antler structure. The ends of the shaft **904** are captured in a

cap member 912, which is coupled to the lever frame 950 structure, for example with a pair of screws. Of course, it should be understood that the shaft 904 could be coupled to any of the three members (spine 902, antlers 900 or lever frame structure 950), and rotatable relative to the others thereof. In 5 addition, the shaft can be secured to lugs formed in any of the three members, or the shaft can be integrally formed on one of the three members. In any event, the lever frame structure 950 and the antler structure 900 are allowed to pivot relative to the spine 902 about the pivot axis 906. The ends 914 of the antler arms are pivotally secured to a cross member 952 extending between 10 and laterally outwardly from upwardly extending end portion of the outboard levers 982, as shown in FIGS. 96 and 97. A pin 916 or screw is snap fitted to secure the ends 914 of the arms to the cross-member 952, with the arms pivotally bearing on the cross member. Alternatively, as shown in FIG. 89, the ends of the arms 926 can be configured with the cross member 928, which 15 is pivotally secured to the ends of the lever arms 982. In one embodiment, shown in FIG. 89, the spine includes slots 920, which receive lug members 922 extending forwardly from the antler structure and pivotally engaging the shaft 904 about the pivot axis 906. The cover 930, when disposed over the antler structure, forms a rear hood member. The upper thoracic portion of the 20 backrest and hood is allowed to rotate about the pivot axis, thereby conforming to the position of the body of the user as the user tilts rearwardly in the chair.

[00207] Each of the cross members, connecting members and levers 366, 370, 372, 378, 380, 376, 382, 384, 386, 388, 394, 396, 398, 400, 402, 25 404, 406, 982 are preferably configured with a U-shaped cross section. The central portion of the second cross member 370 is further configured with a plurality of ribs 408 that increase the torsional stiffness of the cross member 370, making it more resistant to twisting about a laterally extending axis thereof. In this way, the upper regions of the back, defined between the third 30 cross member 370 and the top cross member 368 tend to rotate or twist about the third cross member, which has less torsional stiffness than the second cross

member 370. At the same time, the central connecting member 378 also provides a virtual hinge along the two ends thereof where it is coupled to the cross member 372 and the cross member 374. The members 402 are relatively rigid, thereby maintaining a relatively rigid lower region of the backrest. As 5 such, when the user extends their back by rotating the upper portion 354 of the back, and pivoting the back support 294, the upper portion tends to bend or rotate about the third cross member. At the same time, each of the individual levers can twist or rotate in response to the movement of the user and provide a balanced support for the user's back. As the user rotates upper portion 354, 10 the lower portion 304, for example at levers 406, does not flex or rotate, thereby providing firm support for the lower back and sacral region of the user. At the same time, the lumbar region bends or rotates proportionally to the distance between the lower cross member 374 and the upper cross member 366, thereby providing intermediate support to the lumbar region of the user's 15 back.

15 [00208] Referring to FIGS. 35 and 35A, the pad structure 416 is integrally formed with a plurality of pads 392 corresponding to the number of nodes 390 formed at the ends of the lever structures. A series of slots are formed between the individual pads to allow each pad to flex independently 20 with the corresponding lever node, while maintaining some connectivity between the pads and nodes. In one embodiment, each pad is separated along each side thereof from another pad by a pair of elongated slots or slits 418, and two pairs of spaced apart sets of three slits 420, 422. The pair of elongated slits are disposed between the three slits in each set. The middle slit 422 in 25 each longitudinally and laterally extending set extends across the entirety of the junction between pads and forms part of the middle slit in adjacent sets of the three slits. In addition, the outer slits 420 of the laterally extending sets extend across the entirety of the junction between pads and forms part of the outer slits in adjacent sets of the three slits. The slits form connectors 426 that 30 resemble figure 8 structures, with the top and the bottom of the "8" connected to the pad.

[00209] At an approximate mid point of the pad structure, i.e., the portion overlying the second cross member 370, the pad structure transitions from six pads extending laterally across the backrest to eight pads extending laterally across the backrest, with four centrally located pads above the cross member transitioning to two centrally located pads below. In this transition area, a lower, outer third slit 430 is made shorter, and the upper laterally extending slit is split into two slits 432, with the third middle slit 434 not extending into the lower pad structure. Additional decorative openings can be formed in each pad. For example as shown in FIGS. 68-70 and 95, alternative pad structures are shown. In FIG. 68, S-shape strips 661 connect adjacent pads.

[00210] A rear side of each pad is provided with a socket 438. As best shown in FIG. 46, a rubber grommet 440 is disposed between each pad and a corresponding node 390 of the lever. In one embodiment, the pad structure is formed by a two-shot mold process, with the pad formed, and a rivet molded onto the pad. Conversely, the lever arm can be made from a two-shot mold process. In other embodiments, the pad and frame can be made by way of a two-shot or three-shot process.

[00211] For example, in a three-shot process, and referring to FIG. 71, a compliant material 395 is molded (but not bonded) onto the back side of the molded levers and through an opening 393 in the node 390. The pad structure is then molded and bonded to the resilient material 395. In operation, the pad 392 flexes relative to the node 390 by way of the resilient material.

[00212] Referring to FIG. 72, a two-shot process includes forming a socket 397 in the resilient/compliant material 395. A post 399 formed on the back side of the pad is engaged with the socket by way of snap-fit.

[00213] Referring to FIG. 73, another two-shot process includes forming an elongated post 381 that extends through the compliant material and to a front side of the pad 392. The end 383 of the post is deformed, for example by way of heat stake, so as to secure the pad to the resilient material, which also forms an outer post mating with an opening in the pad.

[00214] Referring to FIG. 74, instead of using a resilient/compliant material, the pad structure is provided with a geometry that permits rotation or pivoting of the pad relative to a post 381 of the lever node. In particular, the through opening 385 in the pad is tapered or provided with a frusto-conical such that the opening is larger on the front side so the pad can rotate relative to the post. An end 383 of the post is again deformed to secure the pad to the post. A recess is formed in the pad to receive the deformed head and form a flush surface.

[00215] Referring to FIG. 75, a post 371 extends rearwardly from the pad 392. The post can be formed from a compliant, resilient material. The post extends through a socket 373 formed in the lever node 392, with the socket having a tapered or frusto-conical shaped geometry permitting rotation or pivoting of the post relative to the socket. An end portion of the post 371 can be deformed, for example by heating, to secure the pad structure to the frame 302.

[00216] Referring to FIG. 76, the pad structure is provided with a support nodule having an exterior spherical shaped support surface 363 and a through opening 365 with a tapered or frusto-conical shape. The lever or node 392 is provided with a post 361 and a circumferential or annular support rim 367 having a tapered or rounded shoulder that slides relative to the exterior surface 363 of the nodule. The exterior surface 363 and the shape of the through hole 365 permit rotation or pivoting of the pad relative to the lever. The end of the post 361 is deformed to secure the pad to the frame 302.

[00217] Referring to FIGS. 1 and 37-38, an outer cover 442, such as a fabric layer, is disposed over the body side surface of the pad structure. A carrier member 444 is secured to the peripheral edge of the cover and is engaged with a ribbed peripheral edge 446 of the frame and the arms 357 of the back support to secure the cover to the back. In an alternative embodiment, shown in FIGS. 55A and 55B, a cover having a primary web member 447 is secured to an elastic web component 449, for example by stitching with the seam directed inwardly away from the body-facing surface.

The web component 449 in turn has an edge portion 451 that engages the peripheral edge of the frame, whether on the back or the seat.

[00218] Referring to FIGS. 91-94, where the whiffle structure does not have any side frame members, the fabric is instead secured to the pad structure

5 990 and lever frame 950. In particular, an edge portion 992 of the outermost pad structure is stepped down from the remainder of the pad structure. An attachment strip 996 is secured to the fabric or outer cover 930, which wraps around the strip and includes an edge portion disposed between the strip and pad structure. The fabric can be further secured to the strip, for example by

10 bonding, stitching, snaps or other mechanical fasteners, or combinations thereof. The end of the lever or node 390 includes an opening or channel therethrough. One portion of the opening 994 includes a ramped portion 1002 formed along a side thereof, with the ramp progressively traversing toward the center of the channel. A recess or void 1004 is positioned on the other side of

15 the channel from the ramp. A catch portion 1006 of shoulder is formed around the bottom of the channel. A fastener 1008 or pin includes a tapered head portion 1114 mating with a tapered mouth 1110 formed in an opening of the fabric strip 996, and a pair of enlarged annular portions 1112 that are disposed in an upper, substantially cylindrical portion of the opening formed

20 in the lever node. The pin further includes a bottom head 1116 portion, or catch, which engages the catch 1006 of the lever with a snap-fit engagement.

During installation, the bottom head 1116 slides along the ramp 1002 with the shaft of the fastener bending as the head is biased into the recess 1004 formed opposite thereof until the head 1116 slides past the catch, with the head then

25 snapping back into engagement with the catch portion. In this way, the fabric strip 996 and fabric are secured to the whiffle structure, while providing an aesthetically pleasing and flexible edge. The pad structure 990 includes an opening 994 shaped to receive an end or post portion of the node. The node includes an annular shoulder 1120 having a catch portion 1122 disposed

30 around the end or post portion, which engages a bottom or rear surface of the pad structure. When installed, the pin 1008 sandwiches the pad structure 990

and cover 930 between the fabric strip 996 and whiffle structure 950. The opening 994 in the pad structure can be elongated or slotted in at least one direction (e.g., vertical), as shown in FIGS. 94 and 95, so to allow relative motion between the pad structure 990 and whiffle structure 950. In addition, 5 as shown in FIG. 95, the slits 1124 defining the pads do not extend to the edge of the overall pad structure along the sides and top thereof, so as to provide some additional rigidity to the edge portion of the pad structure, for example where the fabric strips are attached. In addition, the slits do not carry through laterally along the bottom of the pad structure between at least the center four 10 pads of the first two rows, or longitudinally between the four pads of the center columns, such that the lower sacral area thereof is provided with additional rigidity.

15 [00219] Although the present invention has been described with reference to preferred embodiments, those skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. As such, it is intended that the foregoing detailed description be regarded as illustrative rather than limiting and that it is the appended claims, including all equivalents thereof, which are intended to define the scope of the invention.

What is claimed is:

1. A seating structure comprising:
 - a base component;
 - 5 a first link member pivotally connected to said base component at a first horizontal pivot axis;
 - a second link pivotally connected to said first link at a second horizontal pivot axis spaced from said first pivot axis, wherein said second link comprises a portion extending in a longitudinal direction;
 - 10 a third link pivotally connected to said second link at a third horizontal pivot axis spaced from said second pivot axis in said longitudinal direction, wherein said third link is pivotally connected to said base component at a fourth horizontal pivot axis spaced from said first pivot axis, and wherein said third link comprises a portion extending in said longitudinal direction; and
 - 15 a seat having a front, thigh supporting region coupled to said longitudinally extending portion of said second link and a rear buttock supporting region coupled to said longitudinally extending portion of said third link, wherein said rear buttock supporting region is spaced rearwardly from said thigh supporting region in said longitudinal direction;
- 20 wherein said third link is pivotable in a first direction relative to said second link about said third pivot axis between an upright position and a reclined position, wherein an upper surface of said rear region of said seat forms an angle of greater than 180 degrees relative to an upper surface of said front region when said third link is in said reclined position.

25

2. The seating structure of claim 1 wherein said angle between said upper surfaces of said rear region and said front region of said seat is approximately 180 degrees when said third link is in said upright position.

3. The seating structure of claim 1 further comprising a backrest having a lower portion non-pivottally coupled to at least one of said rear region of said seat and said third link.

5 4. The seating structure of claim 3 wherein said backrest further comprises an upper portion, and further comprising a back support member coupled to said upper portion and pivotally connected to said base component about a fifth horizontal pivot axis.

10 5. The seating structure of claim 4 wherein said fourth and fifth pivot axes are coincidental.

15 6. The seating structure of claim 4 further comprising a stop member positioned to limit the pivotable movement of said third link in said first direction.

7. The seating structure of claim 6 wherein said stop member engages said third link to limit the pivotable movement of said third link in said first direction.

20 8. The seating structure of claim 6 wherein said stop member is adjustably moveable to limit said pivotable movement of said third link in said first direction at a plurality of reclined positions.

25 9. The seating structure of claim 6 wherein said back support member is pivotable relative to said third link about said fifth horizontal pivot axis between a neutral position and an extended position when the pivotable movement of said third link is limited.

30 10. The seating structure of claim 9 wherein one of said back support member and said third link comprises a track and the other of said back

support member and said third link comprises a guide, wherein said guide moves in said track as said back support member pivots relative to said third link between said neutral and extended positions.

5 11. The seating structure of claim 9 further comprising at least one spring biasing said back support member and said third link from said reclined position to said upright position.

10 12. The seating structure of claim 11 wherein said spring engages said back support member.

13. The seating structure of claim 11 wherein said spring comprises a leaf spring.

15 14. The seating structure of claim 1 wherein said second and third links are pivotally connected with a living hinge, wherein said living hinge defines said third pivot axis as a virtual pivot axis.

20 15. The seating structure of claim 14 wherein said living hinge comprises a leaf spring joining said first and second links.

16. A seating structure comprising:
a base component;
a back support member comprising:

25 a lower support member pivotally connected to said base component about a first horizontal pivot axis;

an upper support member pivotally connected to said lower support member about a second horizontal pivot axis spaced from said first pivot axis;

30 at least one backrest component coupled to said upper support member; and

an adjustment mechanism coupled between said lower support member and said upper support member, wherein said adjustment mechanism is operable between at least first and second positions, wherein said upper support member is pivotable relative to said lower support member about said second horizontal axis between at least first and second support positions as said adjustment mechanism is operable between said at least said first and second positions.

17. The seating structure of claim 16 wherein said upper support member is pivotable relative to said lower support member between about at least 1 and 15 degrees between a forwardmost position and a rearwardmost position.

18. The seating structure of claim 16 wherein said adjustment mechanism comprise a first wedge coupled to said lower support member and a second wedge coupled to said upper support member, said first and second wedges having complimentary, mating first and second wedge surfaces, said first and second wedge surfaces reciprocally moveable relative to each other in first and second directions such that said first and second wedges move toward and away from each other respectively so as to thereby pivot said upper support member relative to said lower support member about said second pivot axis.

19. The seating structure of claim 18 further comprising a screw threadably engaging at least one of said first and second wedge members so as to reciprocally move said at least one of said first and second wedge members in said first and second directions.

20. The seating structure of claim 16 wherein said adjustment mechanism comprises an actuator positioned to be accessible to an operator seated in the seating structure.

21. The seating structure of claim 20 wherein said actuator is disposed adjacent a rear of a seat coupled to base component.

22. The seating structure of claim 16 further comprising a spring biasing 5 said upper support member rearwardly relative to said lower support member.

23. A seating structure comprising:

a base component;

a body support member pivotally coupled to said base component;

10 a spring biasing said body support member toward an upright position;

a force adjusting member engaging said spring, said force adjusting member translatable moveable between at least first and second force applying 15 positions;

an actuator coupled to said force adjusting member and comprising a grippable portion translatable moveable relative to said base component, said grippable portion translatable moveable between at least first and second adjustment positions, wherein said force adjusting member is moved between said first and second force applying positions as said grippable portion is translated between said first and second adjustment positions.

20

24. The seating structure of claim 23 wherein said grippable portion is further rotatable as said grippable portion is translated between said first and second adjustment positions.

25

25. The seating structure of claim 23 wherein said spring comprises a leaf spring extending in a longitudinal direction, and wherein said first and second adjustment positions are spaced apart in said longitudinal direction.

30

26. The seating structure of claim 25 wherein said force adjusting member comprises a fulcrum supporting said leaf spring.

27. The seating structure of claim 23 wherein said grippable portion is moved in a fore-and-aft direction between said first and second adjustment positions.

5 28. A seating structure comprising:

- a base component;
- a body support member pivotally coupled to said base component;
- at least one leaf spring biasing said body support member toward an upright position;
- 10 a fulcrum member moveably supported by said base component and engaging said at least one leaf spring, said fulcrum member moveable in a fore-aft direction along a longitudinal axis between at least first and second fulcrum positions;
- 15 an actuator coupled to said fulcrum and comprising a grippable portion moveable therewith in said fore-aft direction, said grippable portion moveable between at least first and second adjustment positions, wherein said fulcrum is moved between said first and second fulcrum positions as said grippable member is moved between said first and second adjustment positions.

20 29. The seating structure of claim 28 wherein said grippable portion is rotatable about an axis extending in a lateral direction substantially perpendicular to said longitudinal axis.

25 30. The seating structure of claim 29 further comprising a longitudinally extending screw non-rotatably fixed to said base component, wherein said fulcrum further comprises a driven gear threadably engaging said screw, and wherein said actuator comprises a drive gear meshing with said driven gear.

30 31. A seating structure comprising:

 - 30 a base component having a support surface;

a fulcrum member moveable in opposite first and second longitudinal directions, said fulcrum comprising a first roller rotatably supported by said support surface of said base component and a second roller contacting said first roller, wherein said first roller is rotatable in first and second rotational directions as said fulcrum member is moved in said first and second longitudinal directions respectively, and wherein said second roller is rotatable in said first and second rotational directions as said fulcrum member is moved in said second and first longitudinal directions respectively; and

5 at least one leaf spring supported by said second roller.

10

32. The seating structure of claim 31 further comprising a body support member biased by said at least one leaf spring.

33. The seating structure of claim 31 wherein said fulcrum comprises a housing defining a cavity open at a top and bottom thereof, wherein said first roller is exposed to said support surface through said open bottom and said second roller is exposed to said at least one leaf spring through said open top, wherein at least a portion of said second roller protrudes through said open top.

15

34. A seating structure comprising:

a leaf spring; and

a body support structure biased by said leaf spring;

wherein one of said leaf spring and said body support structure has a cam with a concave cam surface, and the other of said leaf spring and said body support structure has a cam follower with a convex cam surface, wherein said cam follower engages said cam.

20

35. The seating structure of claim 34 wherein said body support structure is

25 pivotally connected to a base component.

30

36. The seating structure of claim 35 wherein said body support structure comprises a support member for a back.

5 37. The seating structure of claim 35 wherein said body support structure is coupled to a back and a seat.

38. The seating structure of claim 34 wherein said cam is disposed on said leaf spring and said cam follower is disposed on said body support structure.

10 39. The seating structure of claim 34 wherein said one of said cam and said cam follower are disposed on a first side of said leaf spring, and further comprising a fulcrum member engaging a second side of said leaf spring opposite said first side, wherein said fulcrum member is longitudinally spaced from said one of said cam and said cam follower along a length of said leaf
15 spring.

40. The seating structure of claim 39 wherein said fulcrum comprises a curved surface engaging said second side of said leaf spring.

20 41. A seating structure comprising:
a support structure;
a carriage moveably supported by said support structure, wherein said carriage is moveable relative to said support structure in opposite first and second longitudinal directions; and
25 a flexible body support member having a first portion coupled to said support structure, a second portion coupled to said carrier, and a third curved portion positioned between said first and second portions, wherein said third portion is moveable toward and away from said support structure as said carriage is moved relative to said support structure in said first and second directions respectively.
30

42. The seating structure of claim 41 wherein said carriage is translatable moveable relative to said support structure.

43. The seating structure of claim 42 wherein said carriage is translatable coupled to said support structure with at least one slide member.

44. The seating structure of claim 41 wherein said body support member comprises a first body support member and wherein said support structure is coupled to a second body support member, said first and second body support members defining at least in part a seat, wherein said first portion of said first body support member is coupled to said second body support member.

45. The seating structure of claim 41 further comprising a cover member disposed over an outer surface of said body support member and covering said third portion of said body support member.

46. The seating structure of claim 45 wherein said cover member comprises a first fold anchored to said support structure.

47. The seating structure of claim 46 wherein said cover member comprises a second fold connected to said first fold along a folded edge engaged by a driving member, wherein said driving member is formed by one or both of said body support member and said carriage, wherein said folded edge is moveable in said first and second directions as said carriage is moved in said first and second direction respectively.

48. The seating structure of claim 47 wherein said first fold comprises at least one tether.

49. The seating structure of claim 41 wherein said body support member has a plurality of longitudinally extending slots defining a plurality of longitudinally extending strips.

5 50. The seating structure of claim 49 wherein at least one of said plurality of slots has a different length than at least one other of said plurality of slots.

10 51. The seating structure of claim 49 wherein said carriage comprises a leading edge disposed adjacent said plurality of strips, wherein said leading edge comprises a plurality of steps formed laterally across said leading edge, with at least some of said plurality of steps corresponding to and aligned with at least some of said plurality of strips.

52. A seating structure comprising:

15 a seat comprising a forward portion and a rear portion, wherein said seat is tiltable between at least an upright tilt position and a reclined tilt position, wherein said rear portion is automatically pivotable relative to said forward portion as said seat is tilted between said upright and said reclined tilt positions; and

20 a back coupled to said seat and tiltable between at least an upright tilt position and a reclined tilt position, said back comprising a lower portion and an upper portion, wherein said upper portion is pivotable relative to said lower portion between a neutral position and an extended position, wherein said upper portion is pivotable relative to said lower portion independent of said tilt position of said back.

25 30 53. The seating structure of claim 52 further comprising a tilt limiter adapted to limit said tilt position of said lower portion of said back, wherein said upper portion is pivotable relative to said lower portion between said neutral position and said extended position when said tilt position of said lower portion is limited by said tilt limiter.

54. The seating structure of claim 52 wherein at least a portion of said back is adjustably coupled to and pivotable relative to said seat, wherein an angle between body facing surfaces of said seat and said at least said portion of said 5 back is adjustable between at least a first upright position and a second upright position.

55. A method of using a seating structure comprising:
10 providing a base component; a first link member pivotally connected to said base component at a first horizontal pivot axis; a second link pivotally connected to said first link at a second horizontal pivot axis spaced from said first pivot axis, wherein said second link comprises a portion extending in a longitudinal direction; a third link pivotally connected to said second link at a third horizontal pivot axis spaced from said second pivot axis in said 15 longitudinal direction, wherein said third link is pivotally connected to said base component at a fourth horizontal pivot axis spaced from said first pivot axis, and wherein said third link comprises a portion extending in said longitudinal direction; and a seat having a front, thigh supporting region coupled to said longitudinally extending portion of said second link and a rear 20 buttock supporting region coupled to said longitudinally extending portion of said third link, wherein said rear buttock supporting region is spaced rearwardly from said thigh supporting region in said longitudinal direction; and
25 pivoting said third link in a first direction relative to said second link about said third pivot axis between an upright position and a reclined position, and thereby forming an angle of greater than 180 degrees between an upper surface of said rear region of said seat and an upper surface of said front region when said third link is in said reclined position.

56. The method of claim 55 further wherein said pivoting said third link comprises pivoting a lower portion of a backrest coupled to at least one of said rear region of said seat and said third link.

5 57. The method of claim 55 further comprising pivoting an upper portion of said backrest relative to said base component about a fifth horizontal pivot axis.

10 58. The method of claim 57 wherein said fourth and fifth pivot axes are coincidental.

59. The method of claim 58 further comprising limiting the pivotable movement of said third link in said first direction.

15 60. The method of claim 59 wherein said limiting the pivotable movement of said third link comprises engaging said third link with a stop member.

20 61. The method of claim 60 further comprising pivoting said upper back portion relative to said third link about said fifth horizontal pivot axis between a neutral position and an extended position when the pivotable movement of said third link is limited.

62. A method of adjusting the position of a back on a seating structure comprising:

25 providing a base component;

providing a back support member comprising:

a lower support member pivotally connected to said base component about a first horizontal pivot axis; an upper support member pivotally connected to said lower support member about a second horizontal pivot axis spaced from

30 said first pivot axis; and at least one backrest component coupled to said upper support member;

pivoting said upper support member relative to said lower support member about said horizontal axis from a first upright position to a second upright position; and

5 maintaining said second upright position of said upper support member free of any external forces applied by a user.

63. The method of claim 62 wherein said pivoting said upper support member relative to said lower support member comprises sliding a first wedge coupled to said lower support member along a second wedge coupled to said 10 upper support member.

64. A method of determining a force applying setting of a seating structure comprising:

15 providing a seating structure comprising a base component; a body support member pivotally coupled to said base component; a spring biasing said body support member toward an upright position; a force adjusting member engaging said spring; an actuator coupled to said force adjusting member and comprising a grippable portion translatable moveable relative to said base component; and

20 gripping said grippable member and translating said grippable member relative to said base component between at least first and second adjustment positions; and

25 moving said force adjusting member between first and second force applying positions as said grippable member is translated between said first and second adjustment positions.

65. The method of claim 64 wherein said translating said grippable member relative to said base component comprises moving said grippable member in a fore-aft direction relative to said base component.

66. The method of claim 65 wherein said spring comprises a leaf spring and said force adjusting member comprises a fulcrum.

67. A method of adjusting the biasing force on a seating structure comprising:

providing a base component having a support surface; a fulcrum comprising a first roller rotatably supported by said support surface of said base component and a second roller contacting said first roller; and a spring supported by said second roller;

moving said fulcrum relative to said base component in opposite first and second longitudinal directions;

rotating said first roller in first and second rotational directions as said fulcrum member is moved in said first and second longitudinal directions respectively, and

rotating said second roller in said first and second rotational directions as said fulcrum member is moved in said second and first longitudinal directions respectively.

68. A method of biasing a seating structure comprising:

providing a leaf spring and a body support structure, wherein one of said leaf spring and said body support structure has a cam with a concave cam surface, and the other of said leaf spring and said body support structure has a cam follower with a convex cam surface;

biasing said body support structure with said leaf spring; and

engaging said cam with said cam follower.

69. A method of adjusting the depth of a seat comprising:

providing a support structure; a carriage moveably supported by said support structure; and a flexible body support member having a first portion fixedly coupled relative to said support structure, a second portion coupled to

said carrier, and a third curved portion positioned between said first and second portions;

moving said carriage relative to said support structure in opposite first and second longitudinal directions, and

5 moving said third portion with said carriage toward and away from said support structure as said carriage is moved relative to said support structure in said first and second directions respectively.

10 70. The method of claim 69 further comprising providing a cover member disposed over an outer surface of said body support member and covering said third portion of said body support member; wherein said cover member comprises a first fold fixedly coupled relative to said support structure and a second fold connected to said first fold along a folded edge engaged by a driving member, wherein said driving member is formed by one or both of said body support member and said carriage; and

15 moving said folded edge in said first and second directions as said carriage is moved in said first and second direction respectively.

71. A method of using a seating structure comprising:

20 providing a seat comprising a forward portion and a rear portion, and a back coupled to said seat, said back comprising a lower portion and an upper portion;

25 tilting said seat between at least an upright tilt position and a reclined tilt position, and automatically pivoting said rear portion relative to said forward portion as said seat is tilted between said upright and said reclined tilt positions;

tilting said back between at least an upright tilt position and a reclined tilt position simultaneously with said seat; and

30 pivoting said upper portion relative to said lower portion between a neutral position and an extended position independent of said tilt position of said back.

72. The method of claim 71 further comprising limiting a tilt position of said lower portion of said back, wherein said pivoting said upper portion relative to said lower portion between said neutral position and said extended position comprises pivoting said upper portion relative to said lower portion when said tilt position of said lower portion is limited by said tilt limiter.

5 73. The method of claim 72 wherein at least a portion of said back is adjustably coupled to and pivotable relative to said seat, and further comprising adjusting an angle between body facing surfaces of said seat and said at least said portion of said back between at least a first upright position and a second upright position.

10 74. A seating structure comprising:
15 a seat comprising a forward portion and a rear portion each having an upper body support surface, wherein said seat is tiltable between at least an upright tilt position and a reclined tilt position, wherein said rear portion is automatically pivotable relative to said forward portion as said seat is tilted between said upright and said reclined tilt positions, wherein said upper body support surface of said rear portion forms an angle of greater than 180 degrees relative to said upper body support surface of said front portion when said seat is in said reclined position.

20 75. A furniture component comprising:
25 an actuated member;
an actuator pivotable about any axis lying within a plane from a neutral position to an actuated position;
a spring biasing said actuator toward said neutral position;
a cable connecting said actuator and said actuated member, wherein
30 said cable is moved from a first position to a second position as said actuator is pivoted from said neutral position to said actuated position.

76. The furniture component of claim 75 wherein said actuator comprises a joy-stick having a grippable portion and a base portion, said base portion pivotally engaging a support member about said any axis within said plane.

5

77. The furniture component of claim 76 wherein said base portion has a circumferential shoulder engaging an annular portion of said support member.

10

78. The furniture component of claim 76 wherein said spring is disposed in said support member.

79. The furniture component of claim 75 wherein said actuated member comprises an extensible support column.

15
20

80. A seating structure comprising:

a rear buttock supporting region and a front thigh-support region, wherein at least a portion of said front thigh-supporting region comprises a flexible body support member comprising a plurality of longitudinally extending, and laterally spaced apart strips, wherein each of said strips has a front curved portion curved at least partially about a horizontal axis, wherein said curved portions of said strips are independently moveable in a vertical direction relative to each other.

25

81. The seating structure of claim 80 wherein at least some of said plurality of strips have different lengths.

82. The seating structure of claim 80 wherein the forwardmost surfaces of said plurality of strips define a leading edge of said front thigh-support region, wherein said leading edge is non-linear.

30

83. The seating structure of claim 80 further comprising a cover material disposed over said strips.

84. A seating structure comprising:

5 a central spine;
an upper back structure comprising a pair of arms extending upwardly and outwardly from said central spine, wherein said upper back structure is pivotally connected to said central spine about a first horizontal axis;
10 a back support structure pivotally connected to said spine about a second horizontal axis and pivotally connected to the ends of each of said arms about a third horizontal axis.

85. The seating structure of claim 84 wherein said first and second horizontal axes are coaxial.

15 86. The seating structure of claim 84 wherein said back support structure comprises a plurality of levers and a pad structure connected to said levers.

87. A connector comprising:

20 a first component comprising a socket and a first catch portion;
a second component comprising a post and a resilient arm having a second catch portion, wherein said post is shaped to be received in said socket, said second component moveable along an axis relative to said first component from a first position wherein said resilient arm is biased such that said second catch portion is in a non-engaged position to a second position wherein said second catch portion is in an engaged position relative to said first catch portion.

25 30 88. The connector of claim 87 wherein said first component is rotatable relative to said second component about said axis when said second catch portion is in said engaged position.

89. The connector of claim 87 wherein said first component is non-moveably connected to said second component along said axis when said second catch portion is in said engaged position.

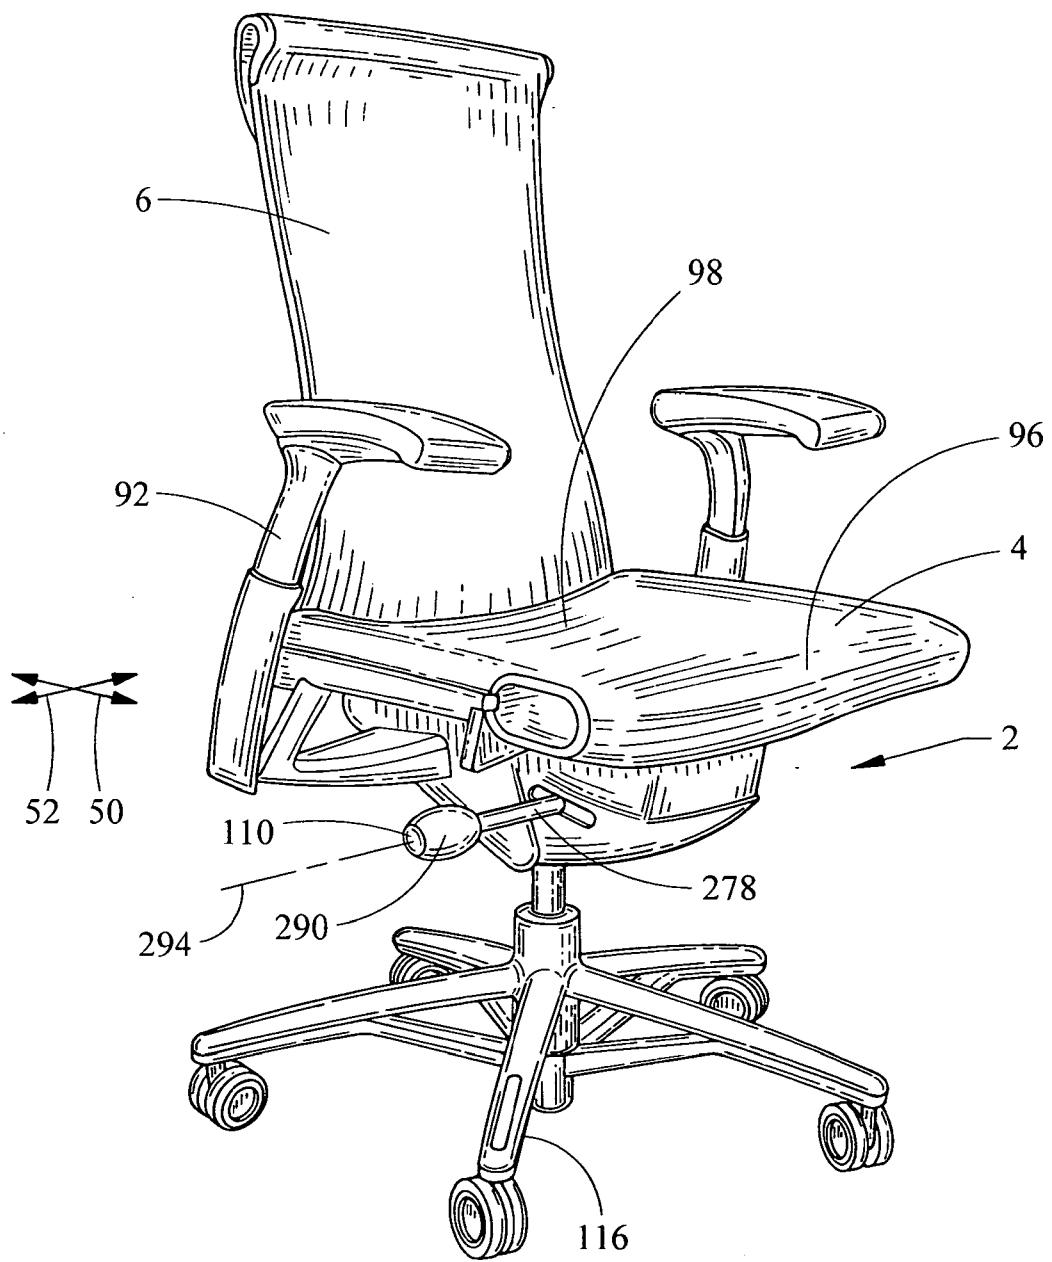


Fig. 1

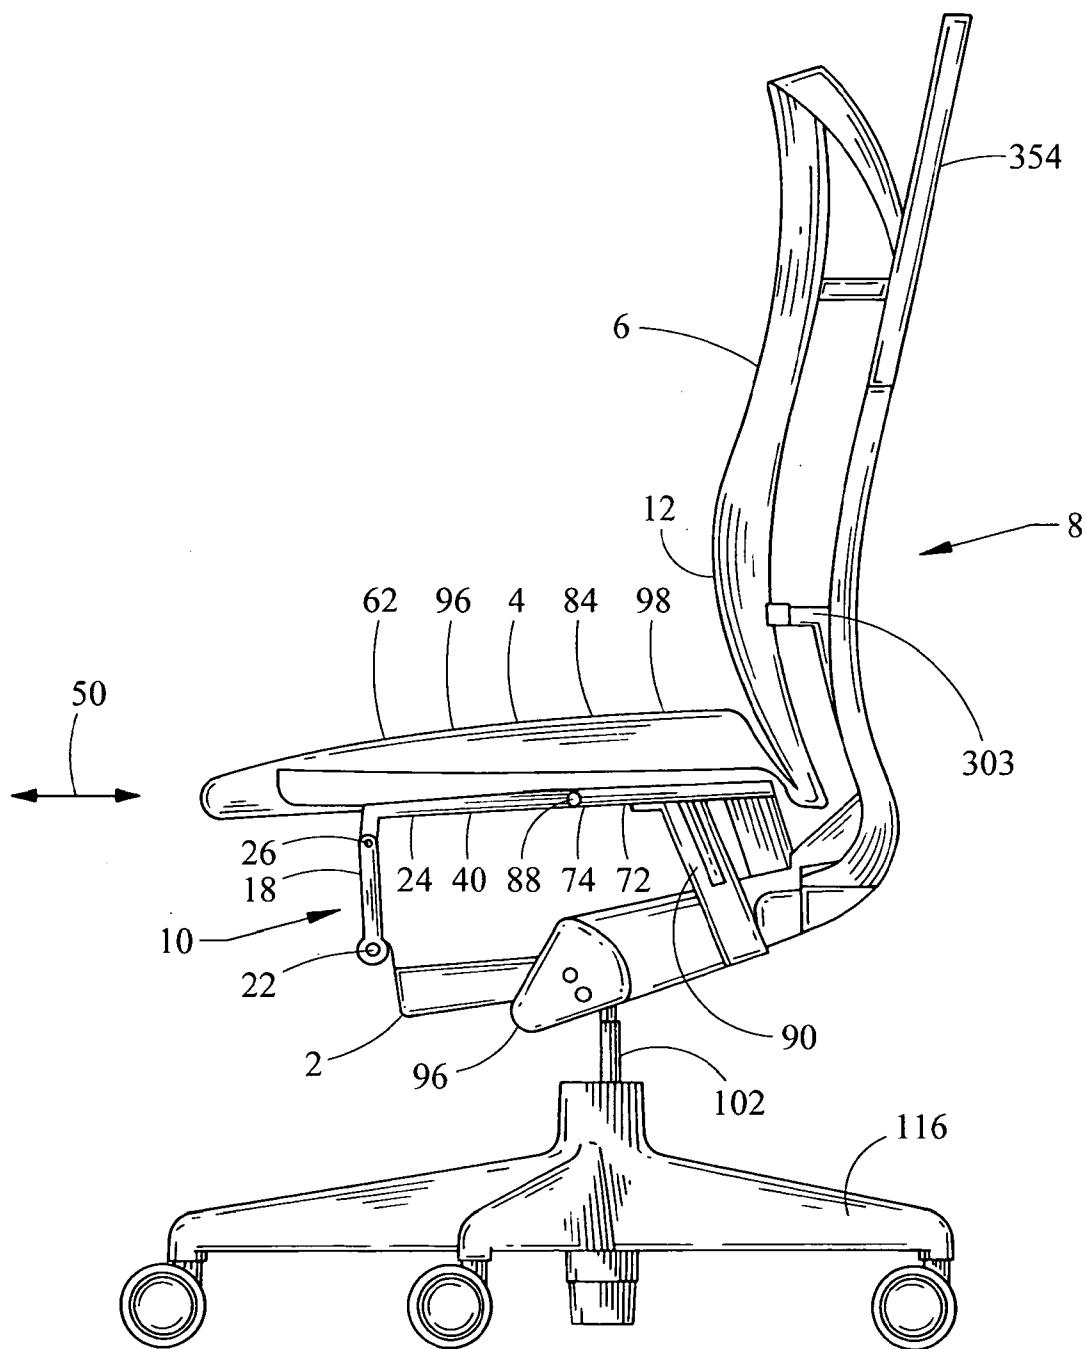


Fig. 2

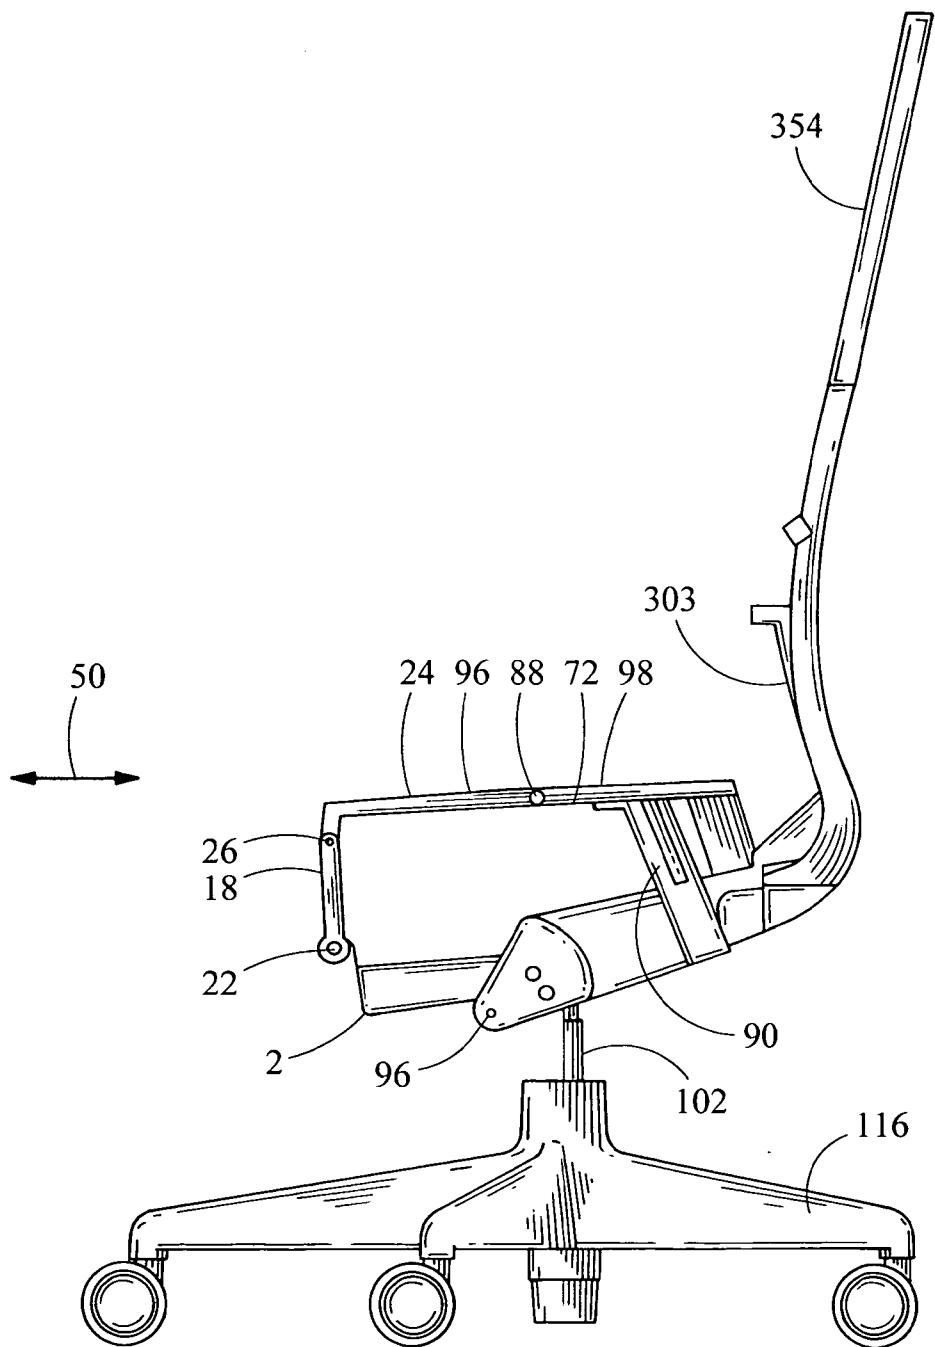


Fig. 3A

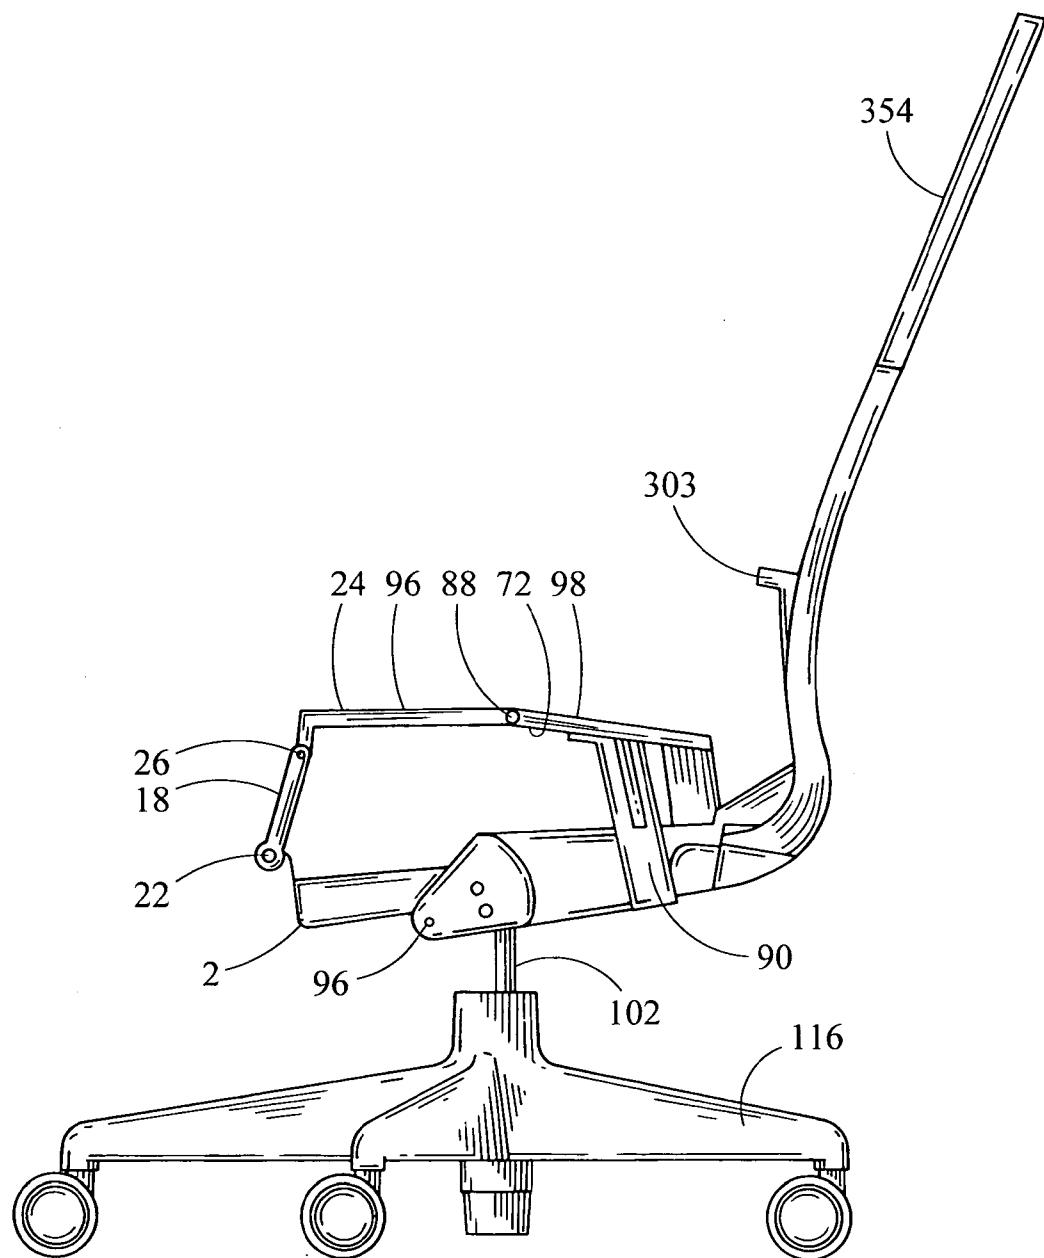


Fig. 3B

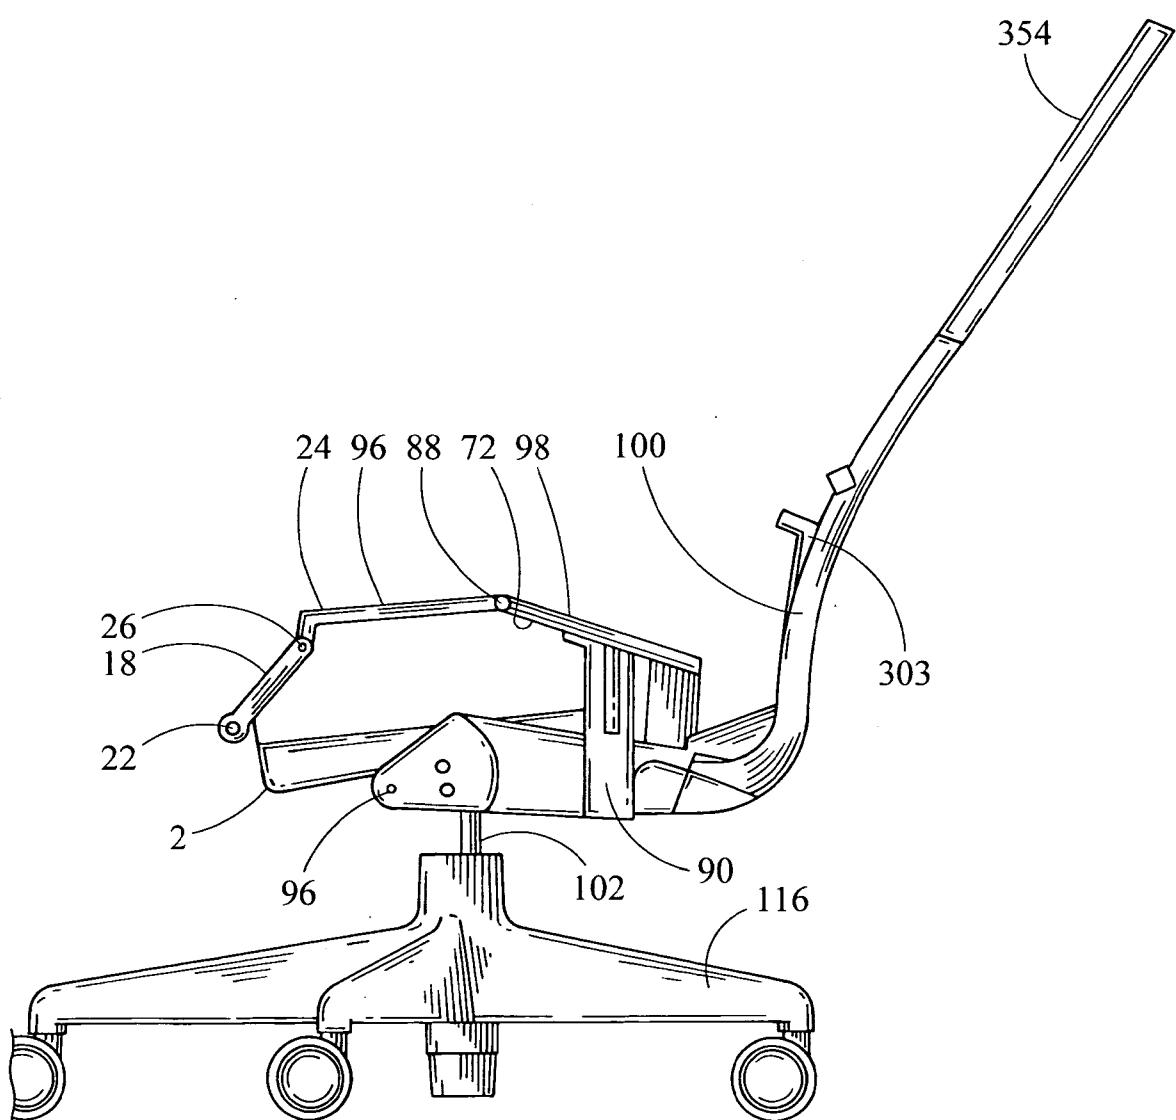


Fig. 3C

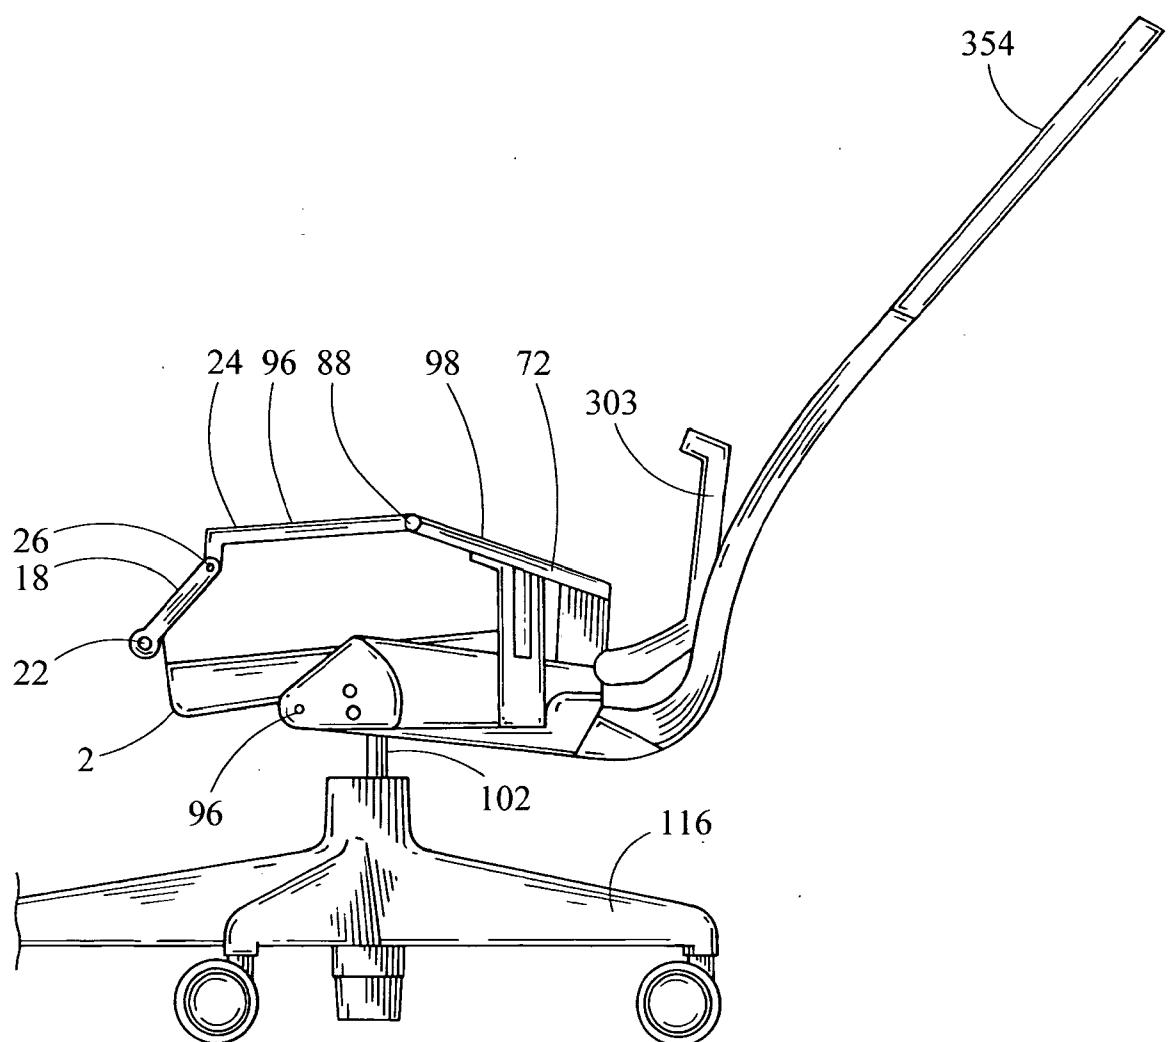


Fig. 3D

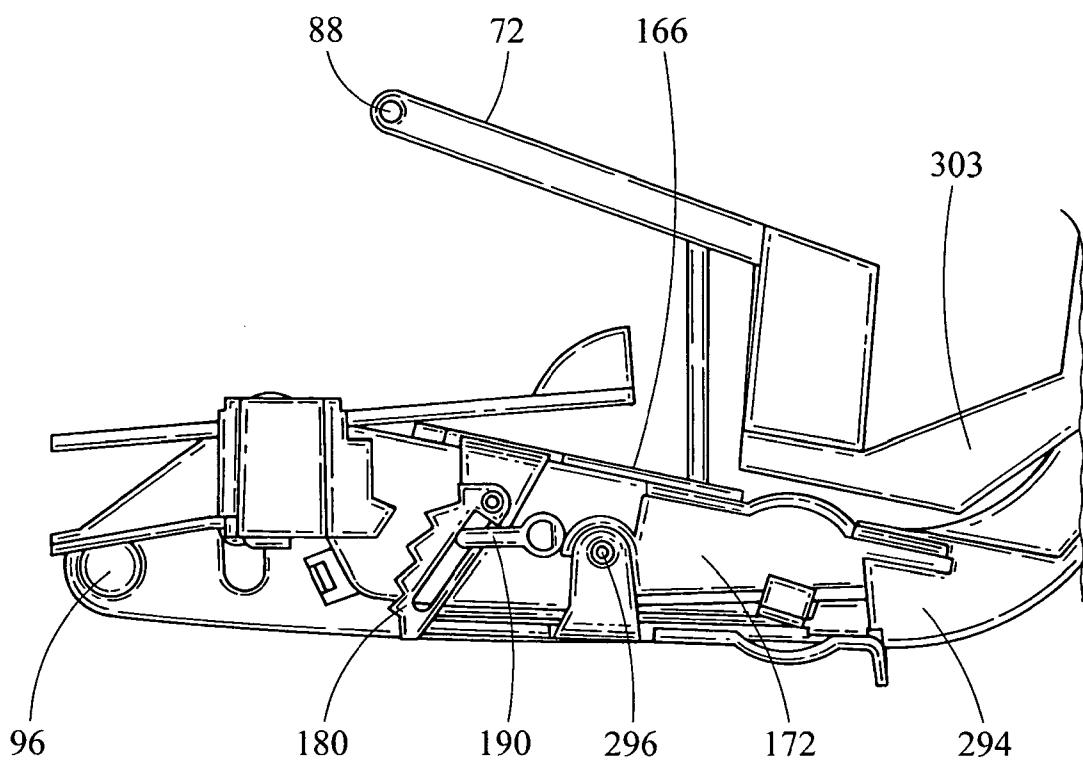


Fig. 4A

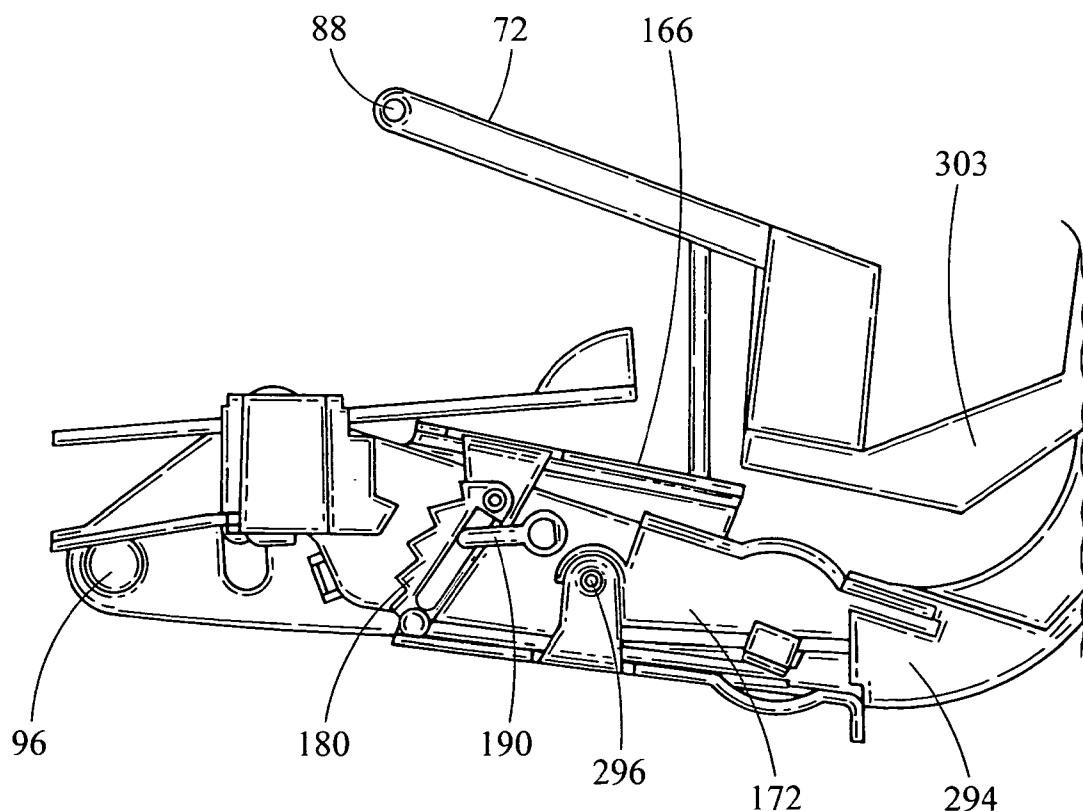


Fig. 4B

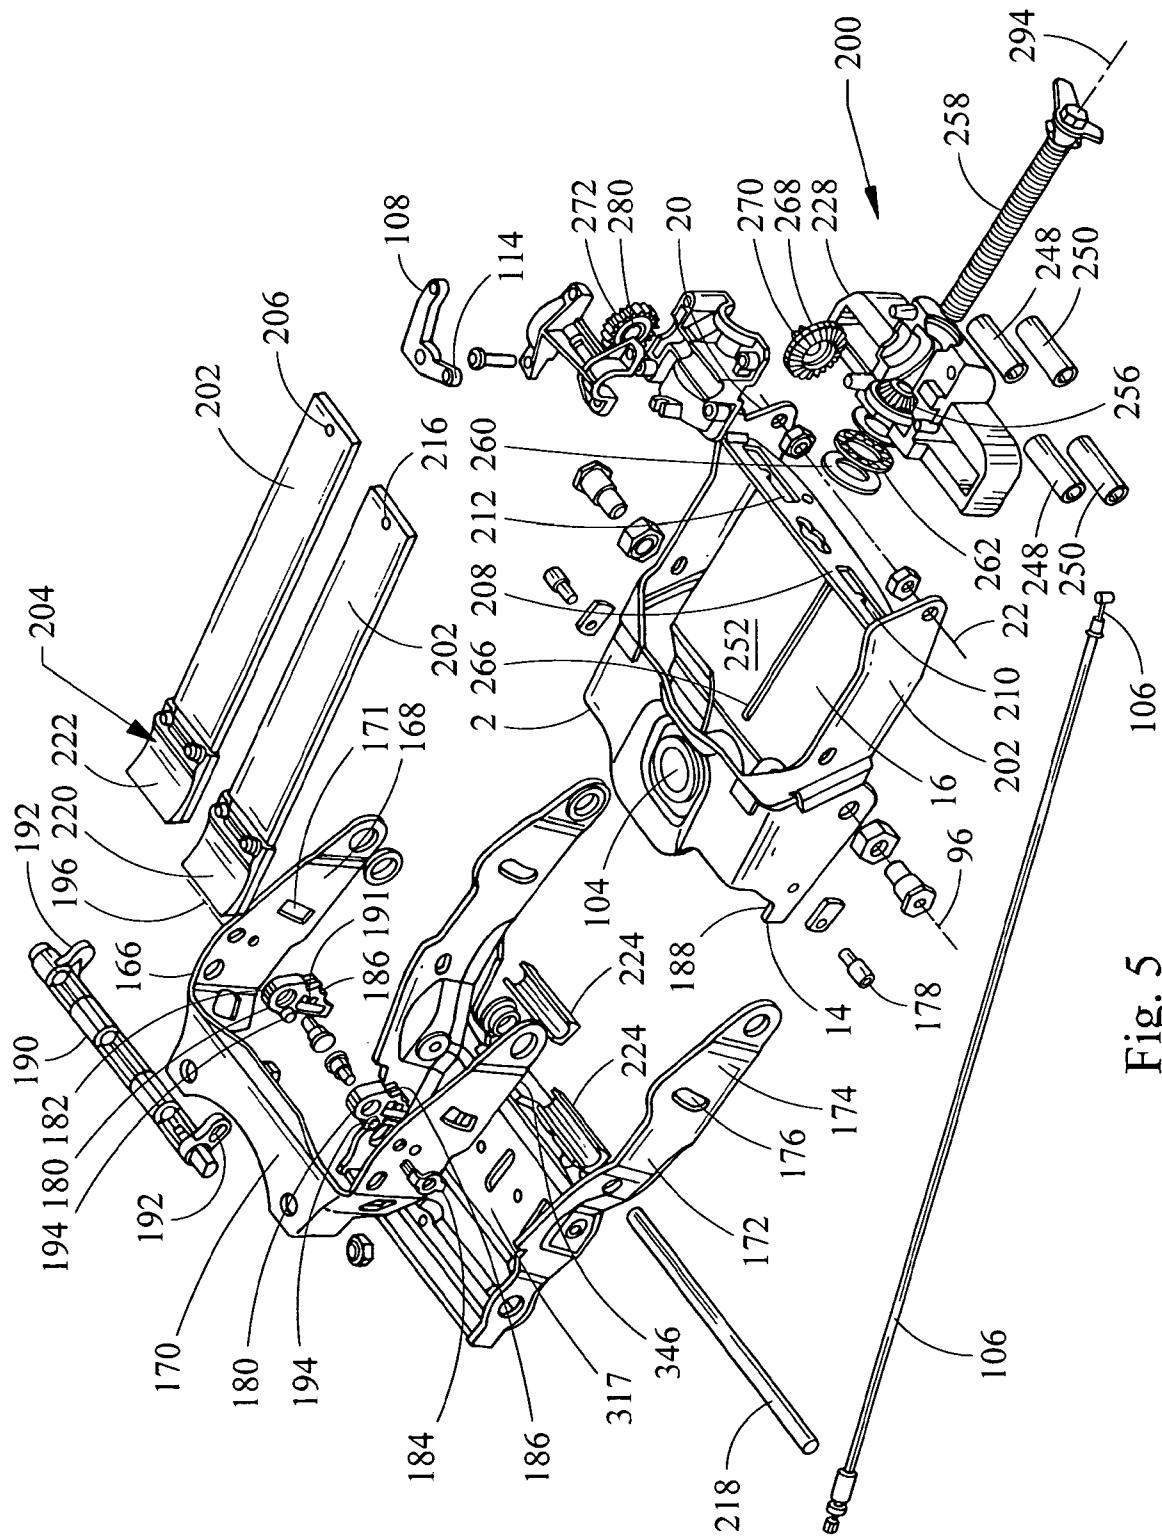
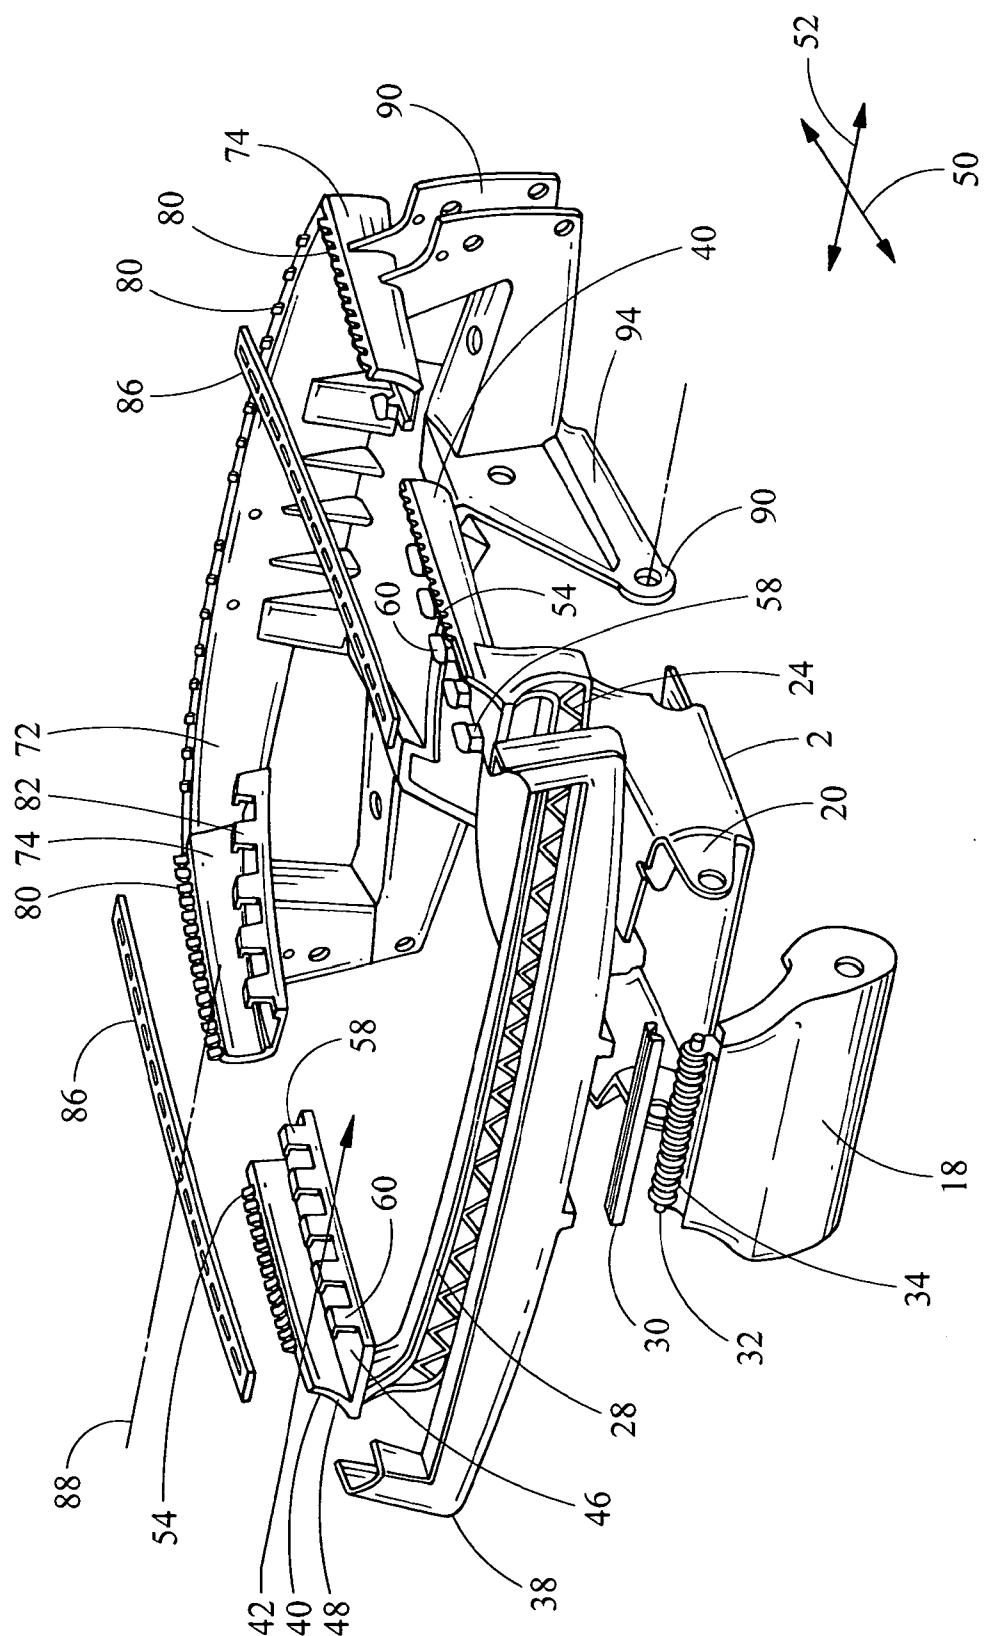


Fig. 5



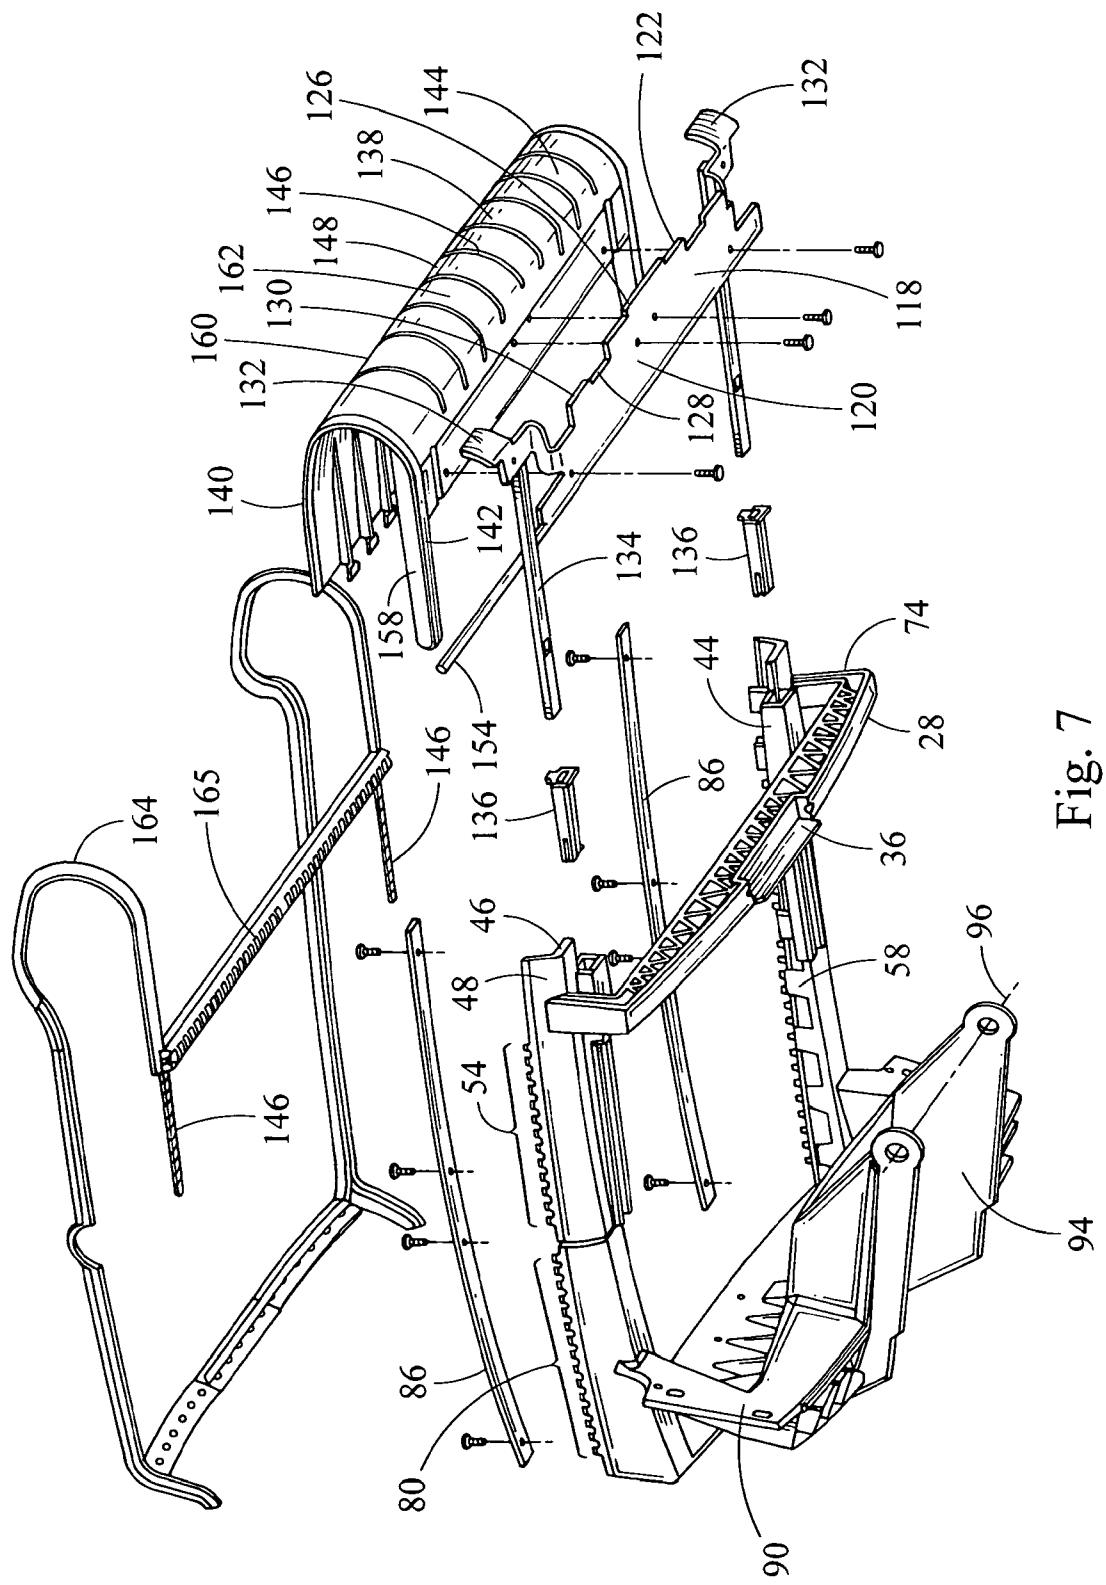


Fig. 7

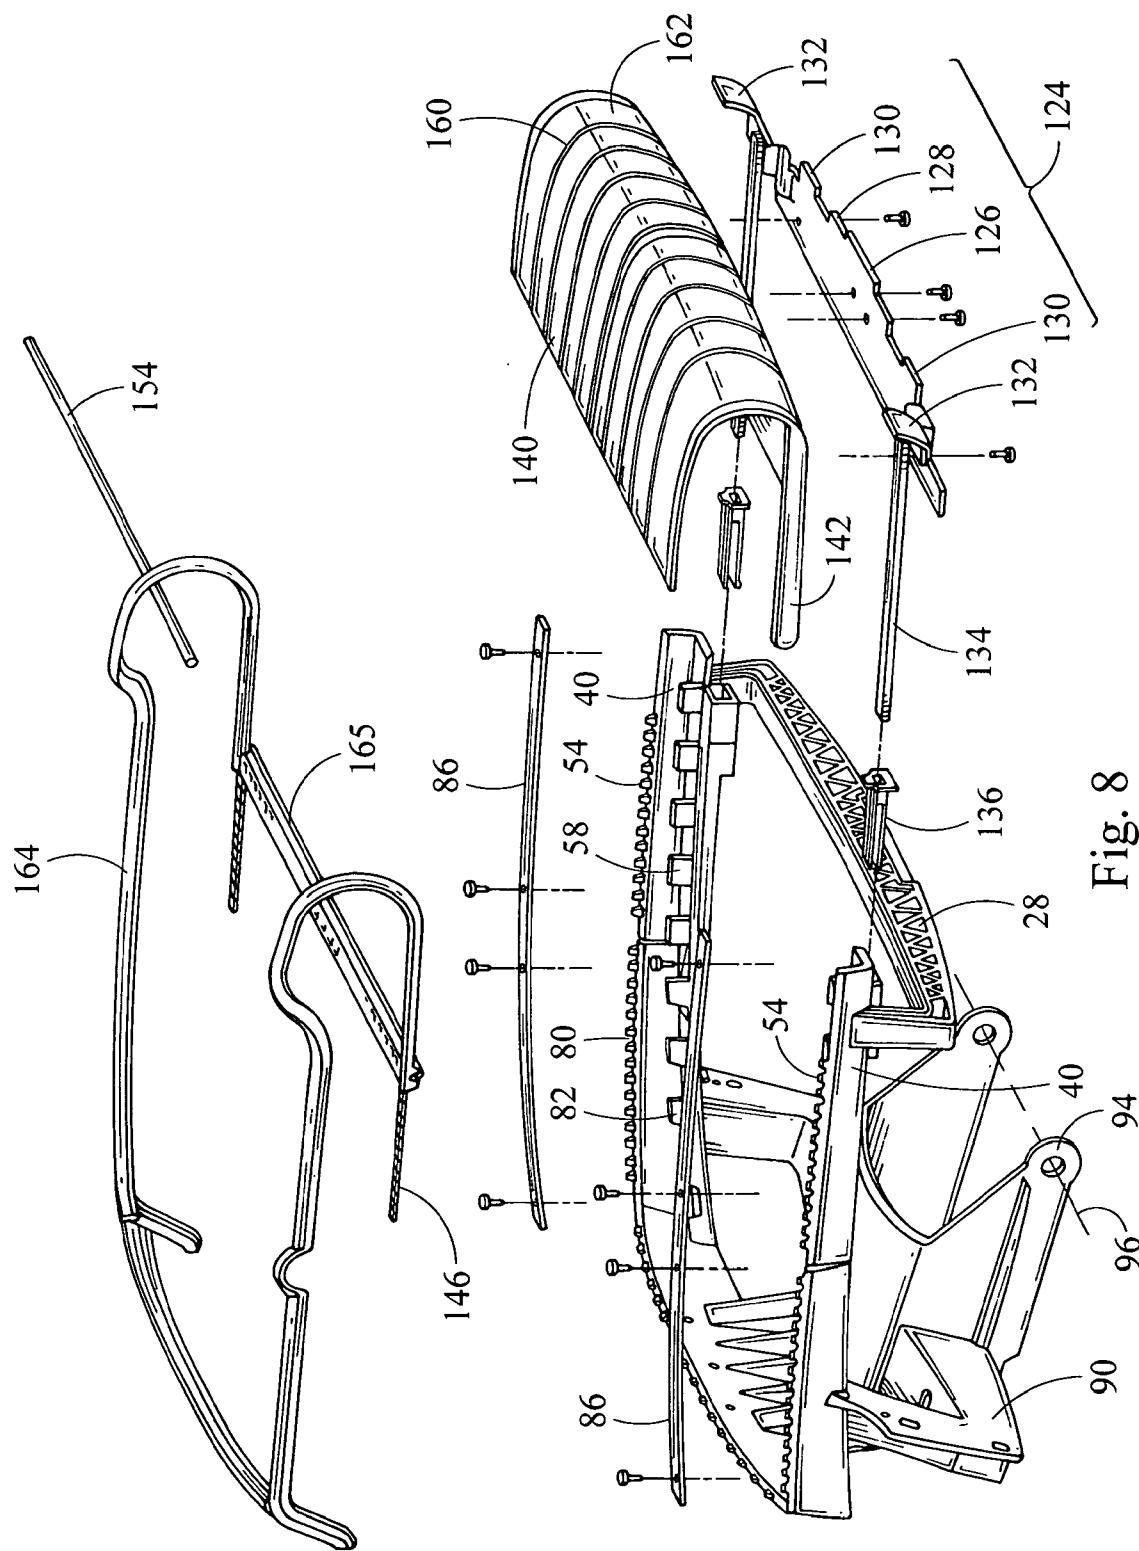


Fig. 8

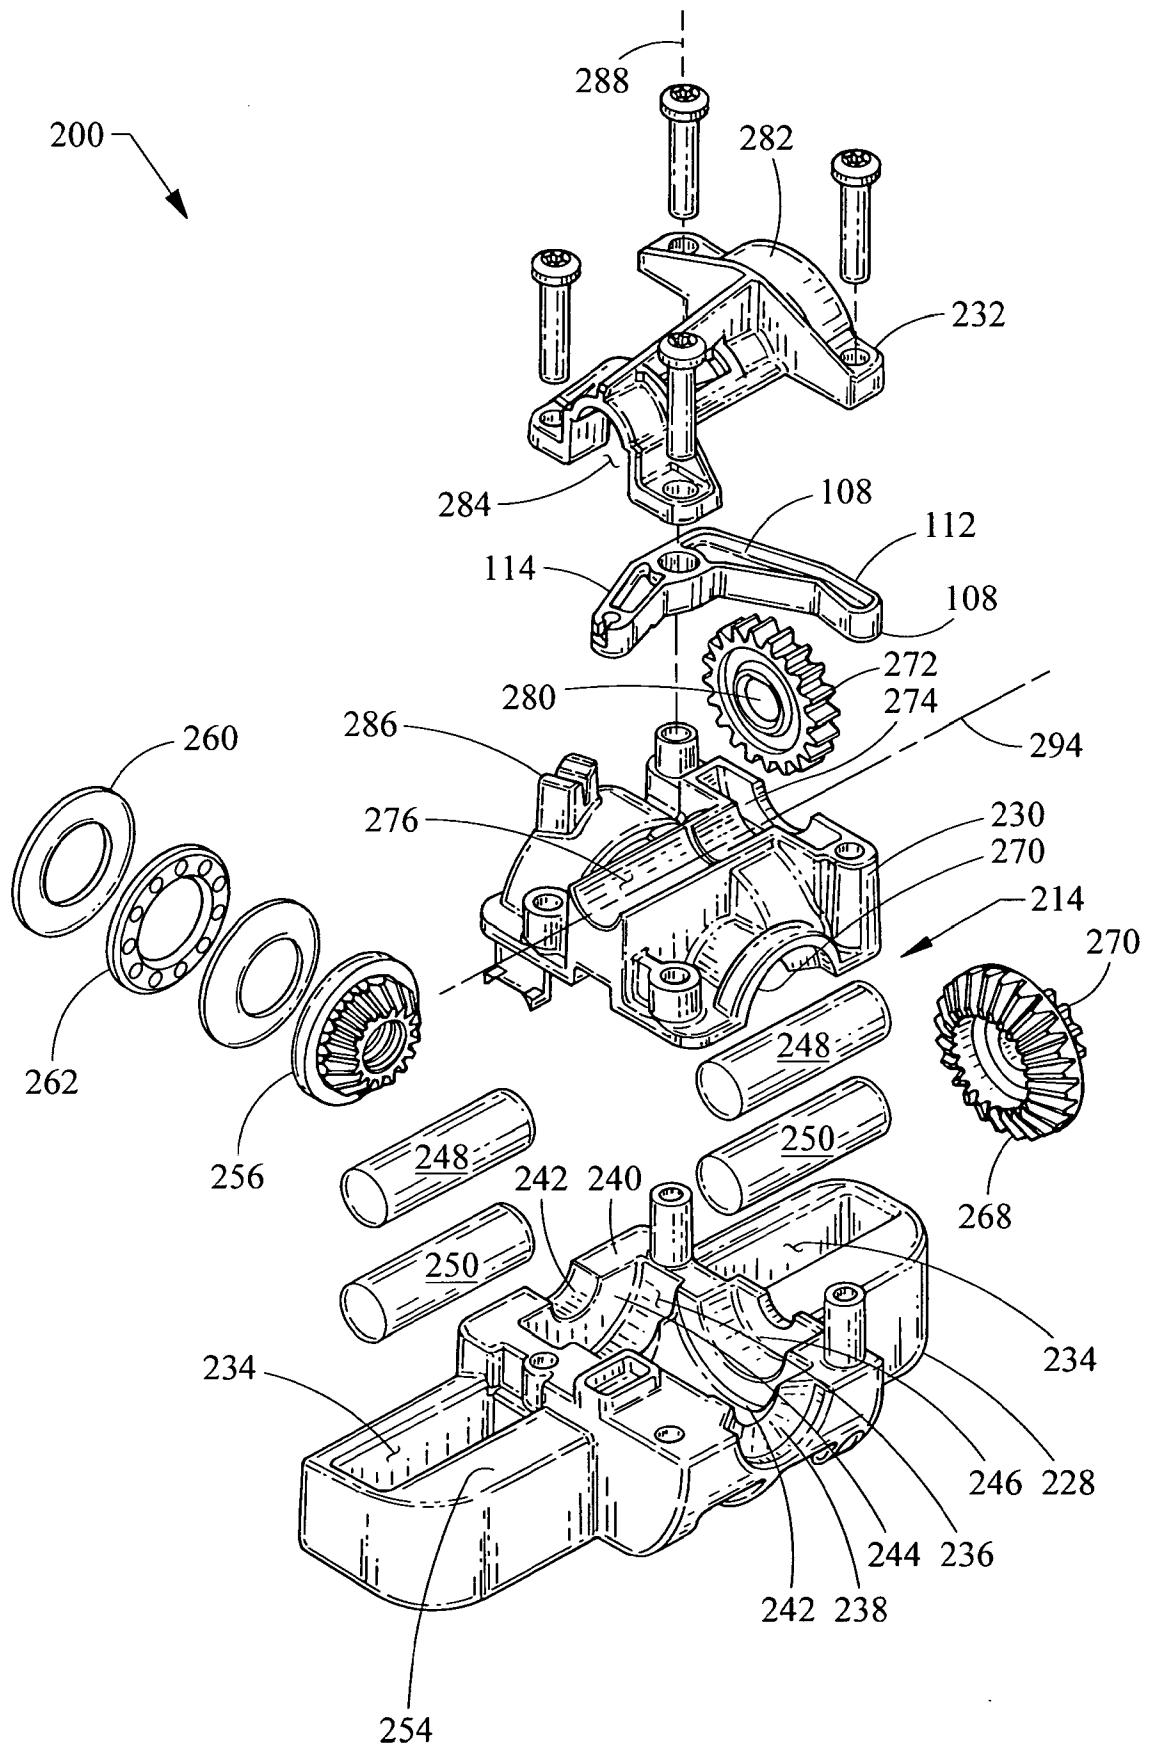


Fig. 9

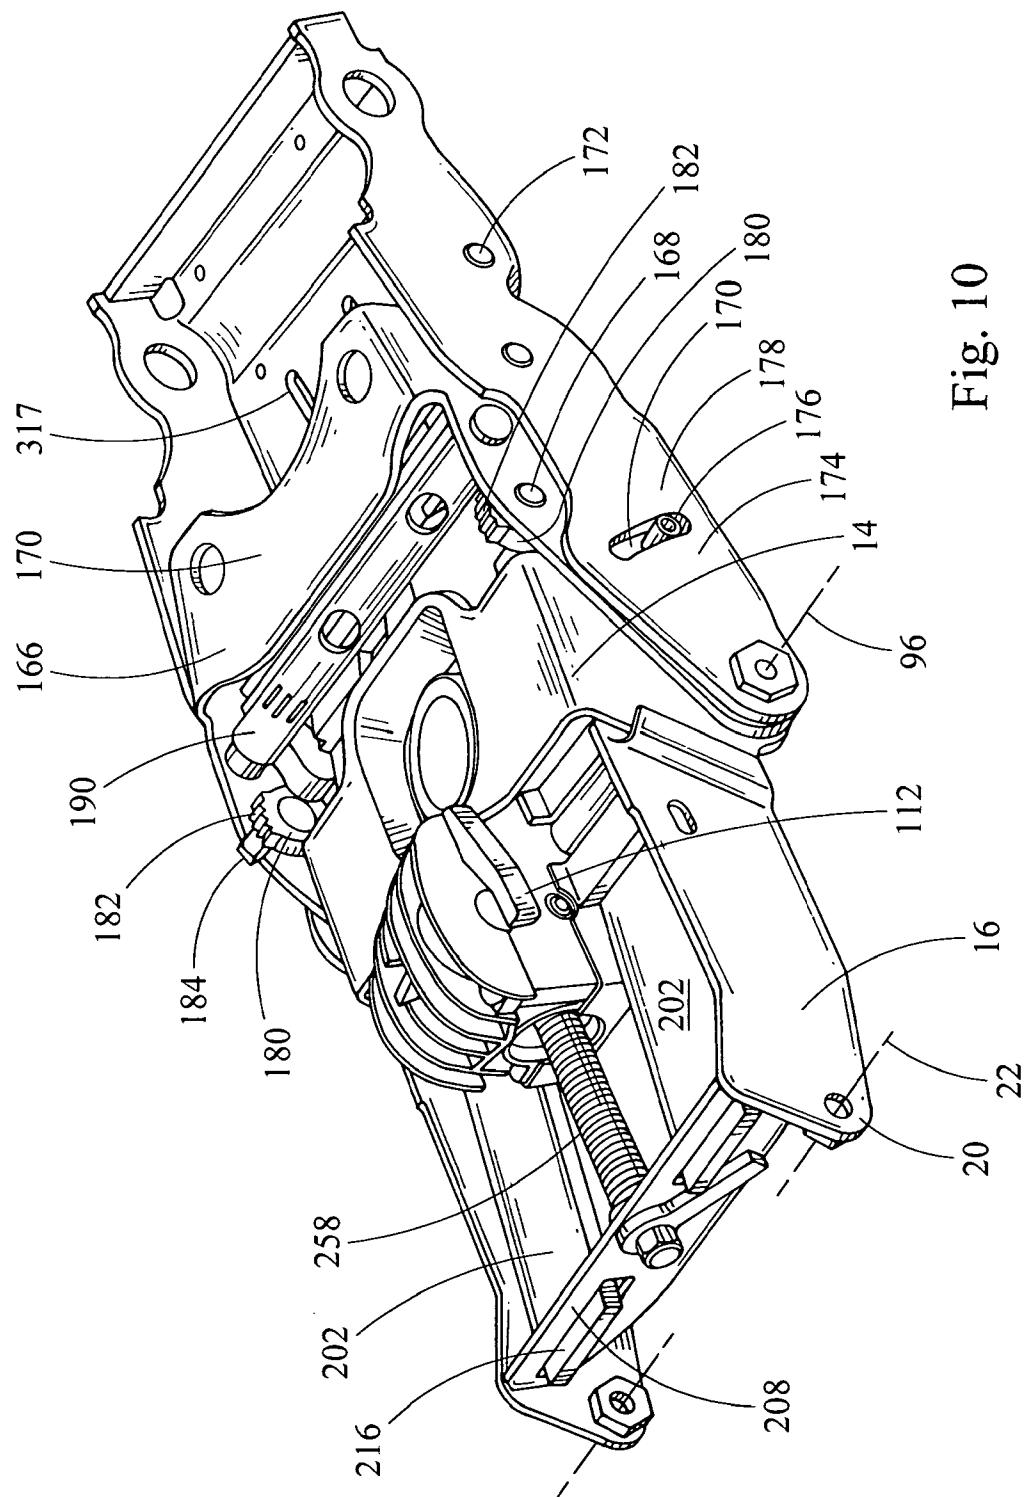


Fig. 10

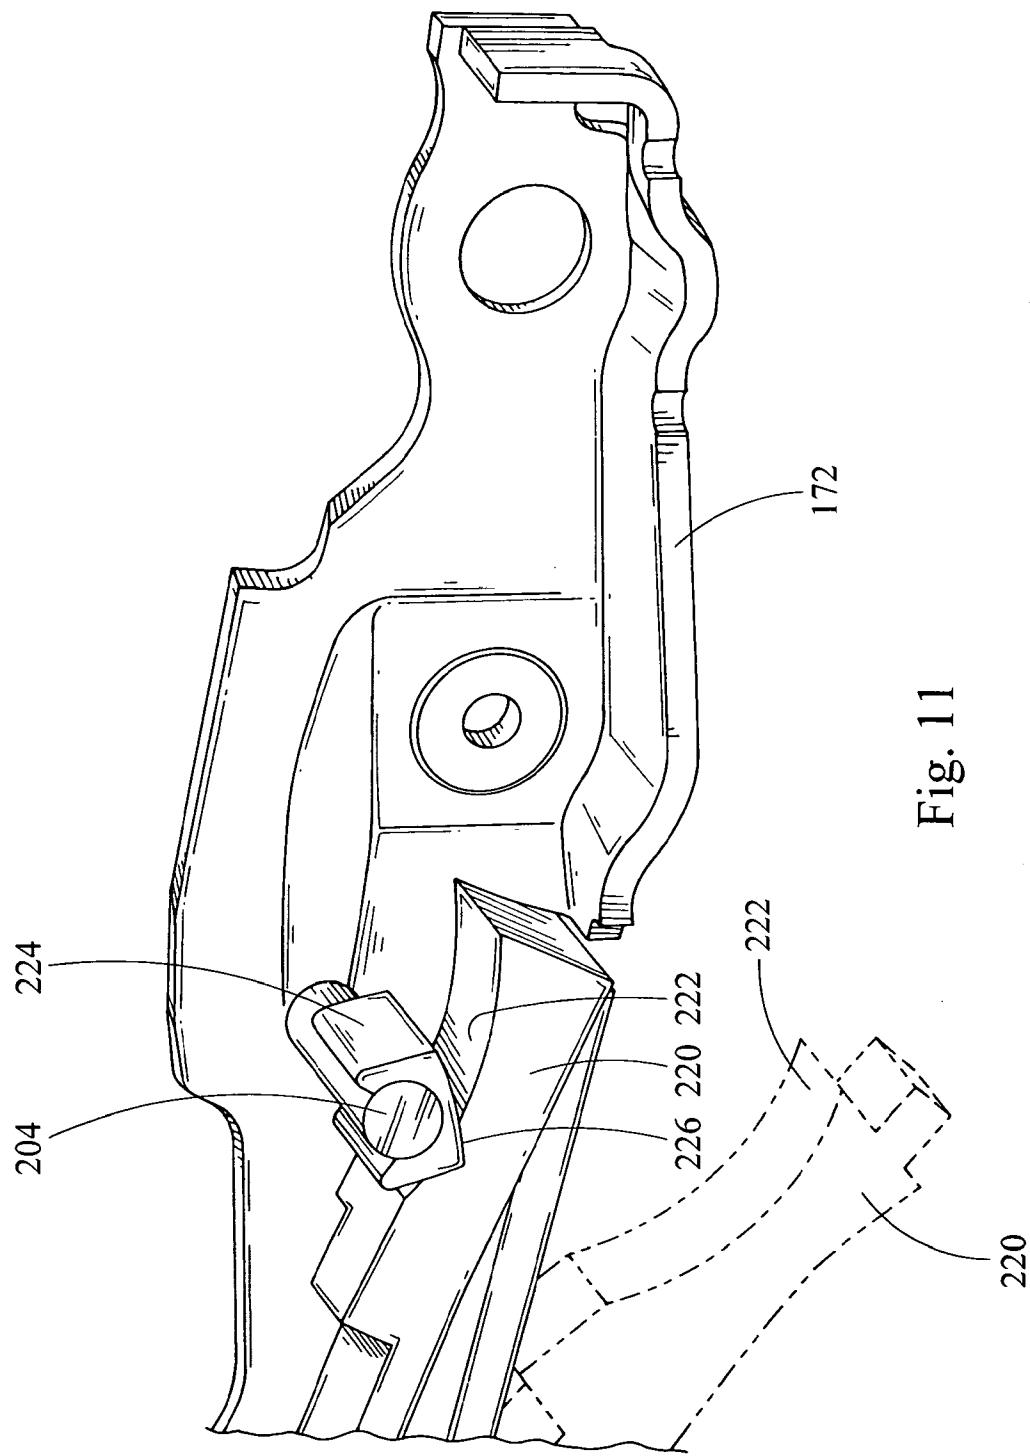
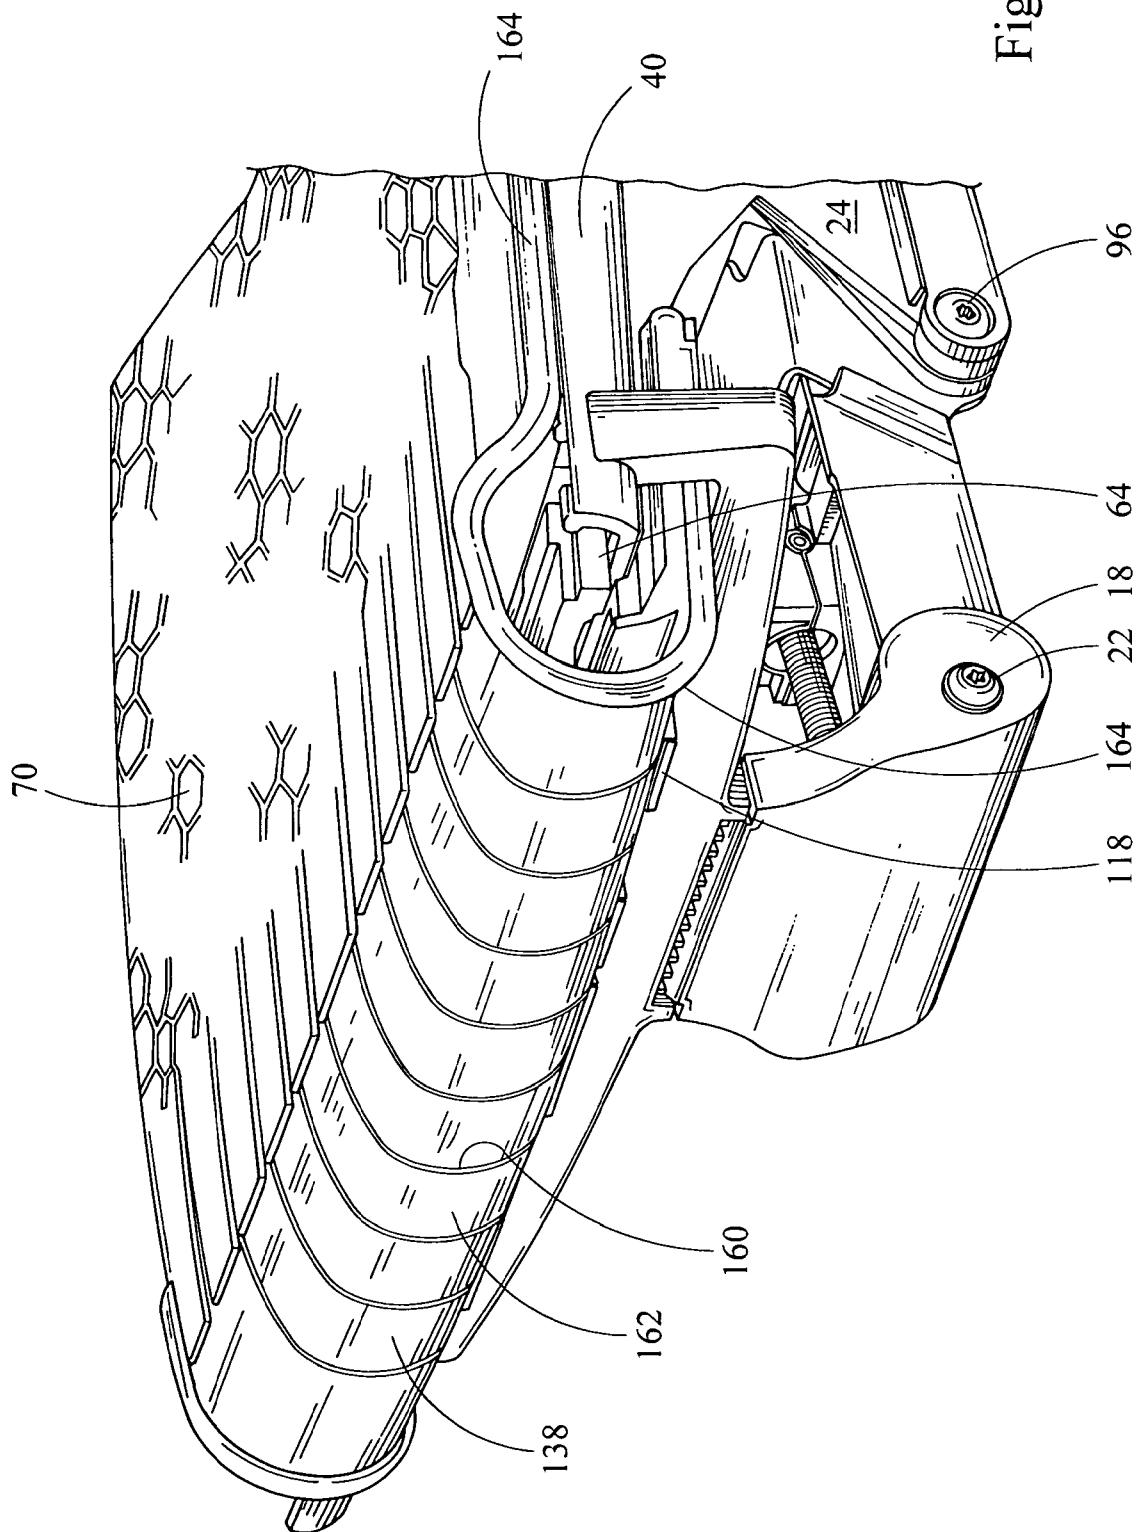


Fig. 11

Fig. 12





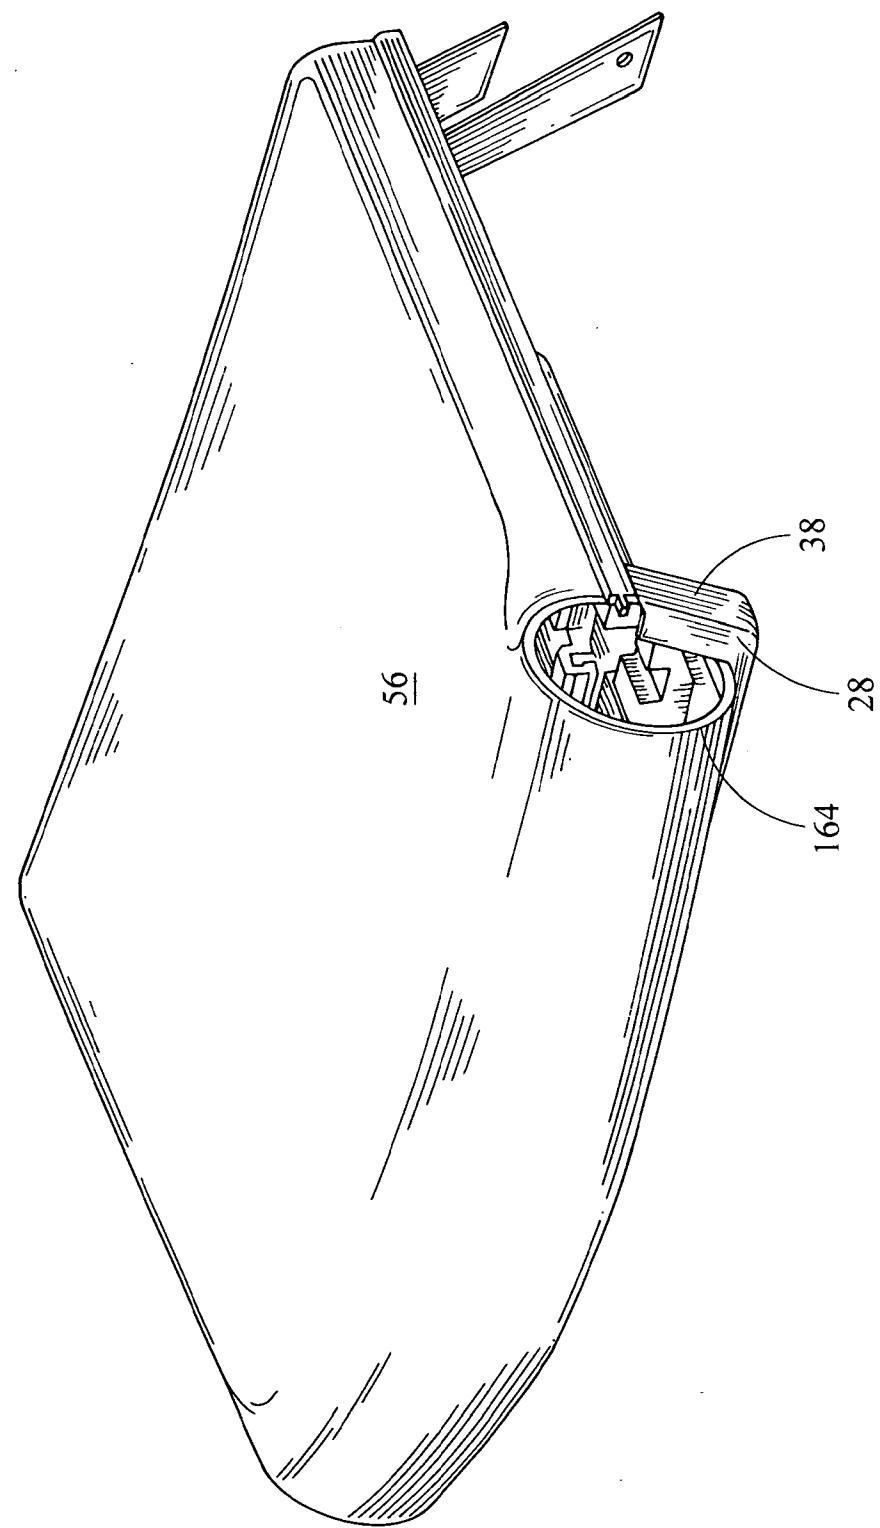


Fig. 13

Fig. 14

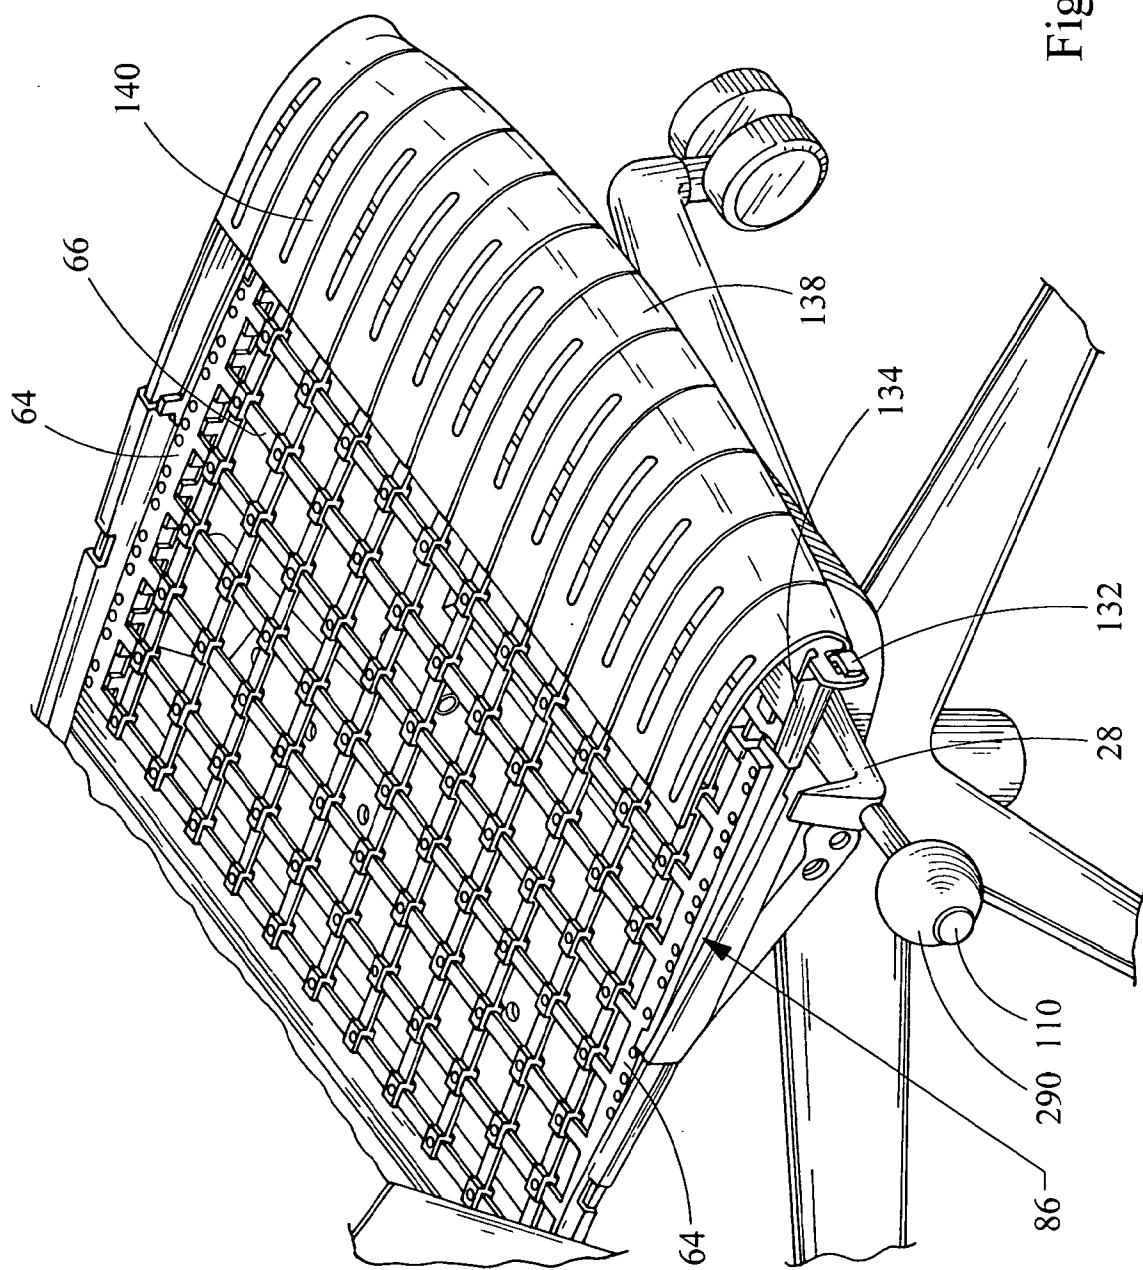

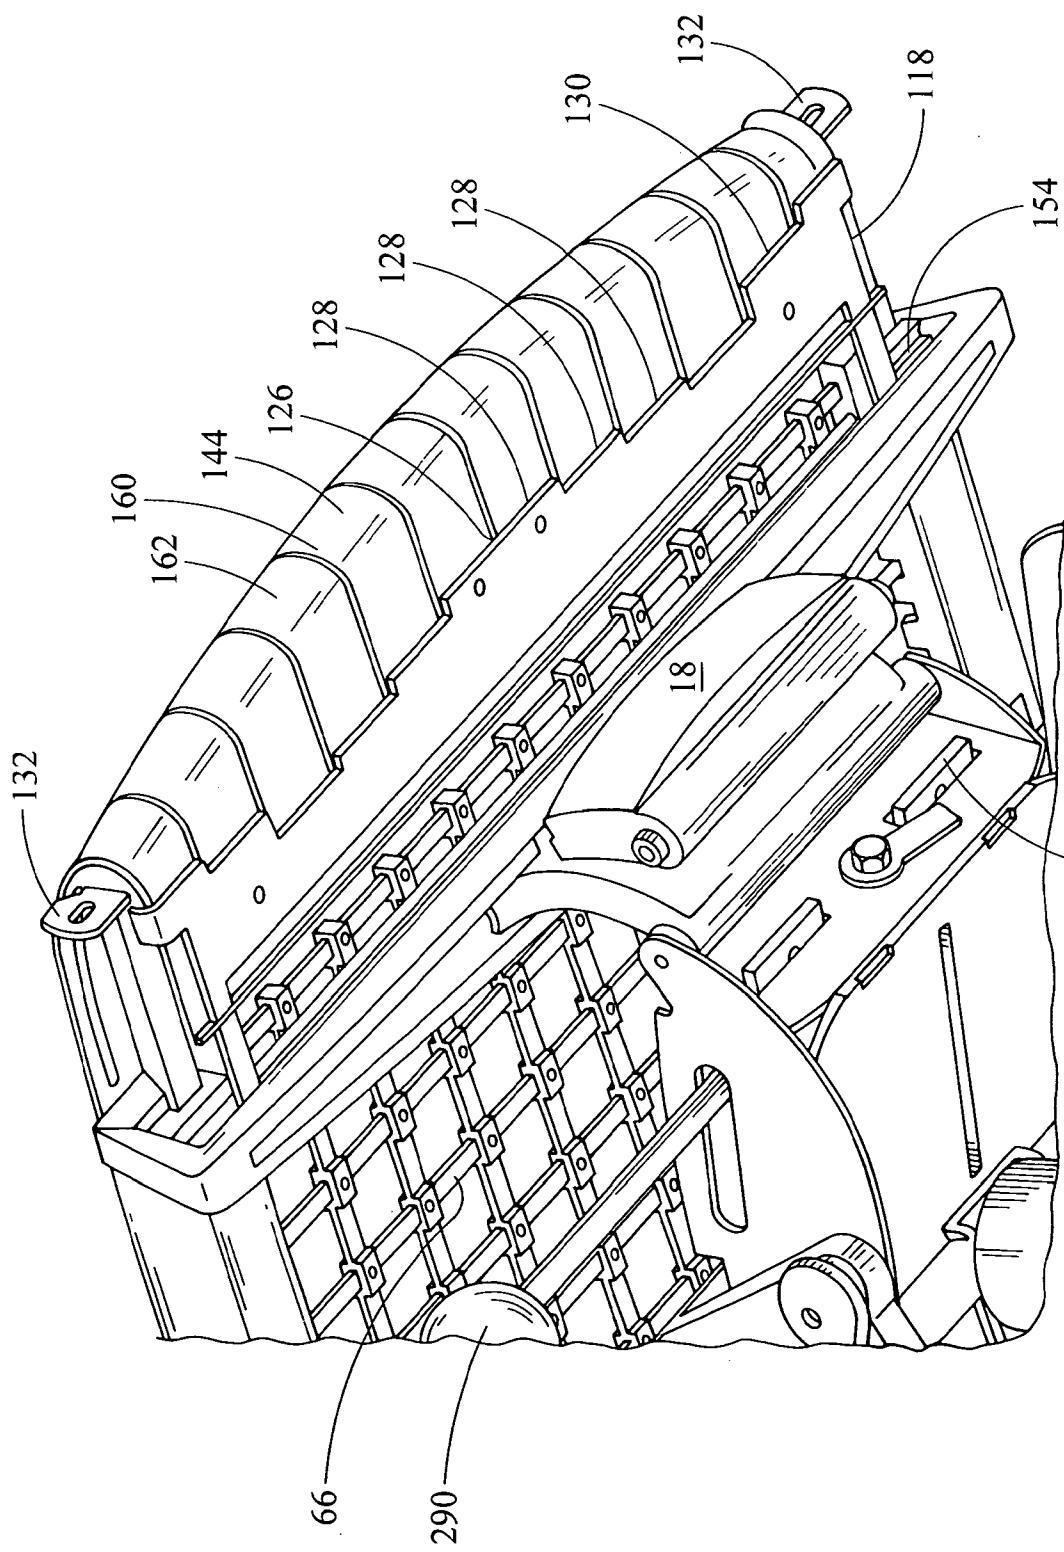

202 Fig. 15

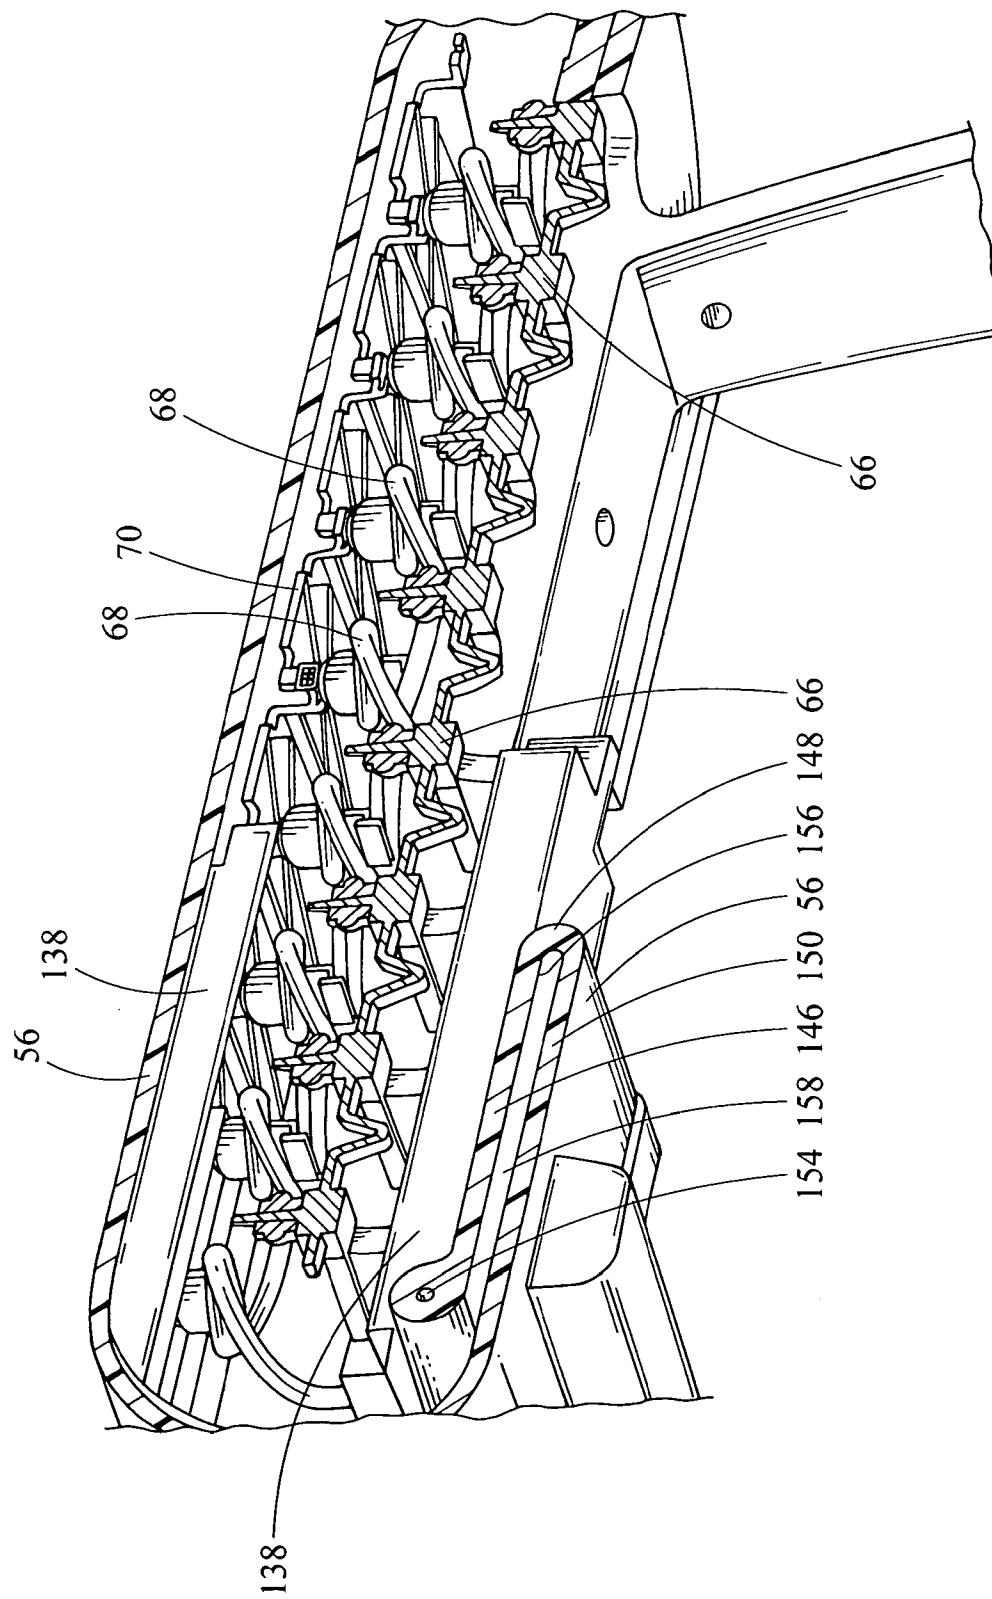


Fig. 16

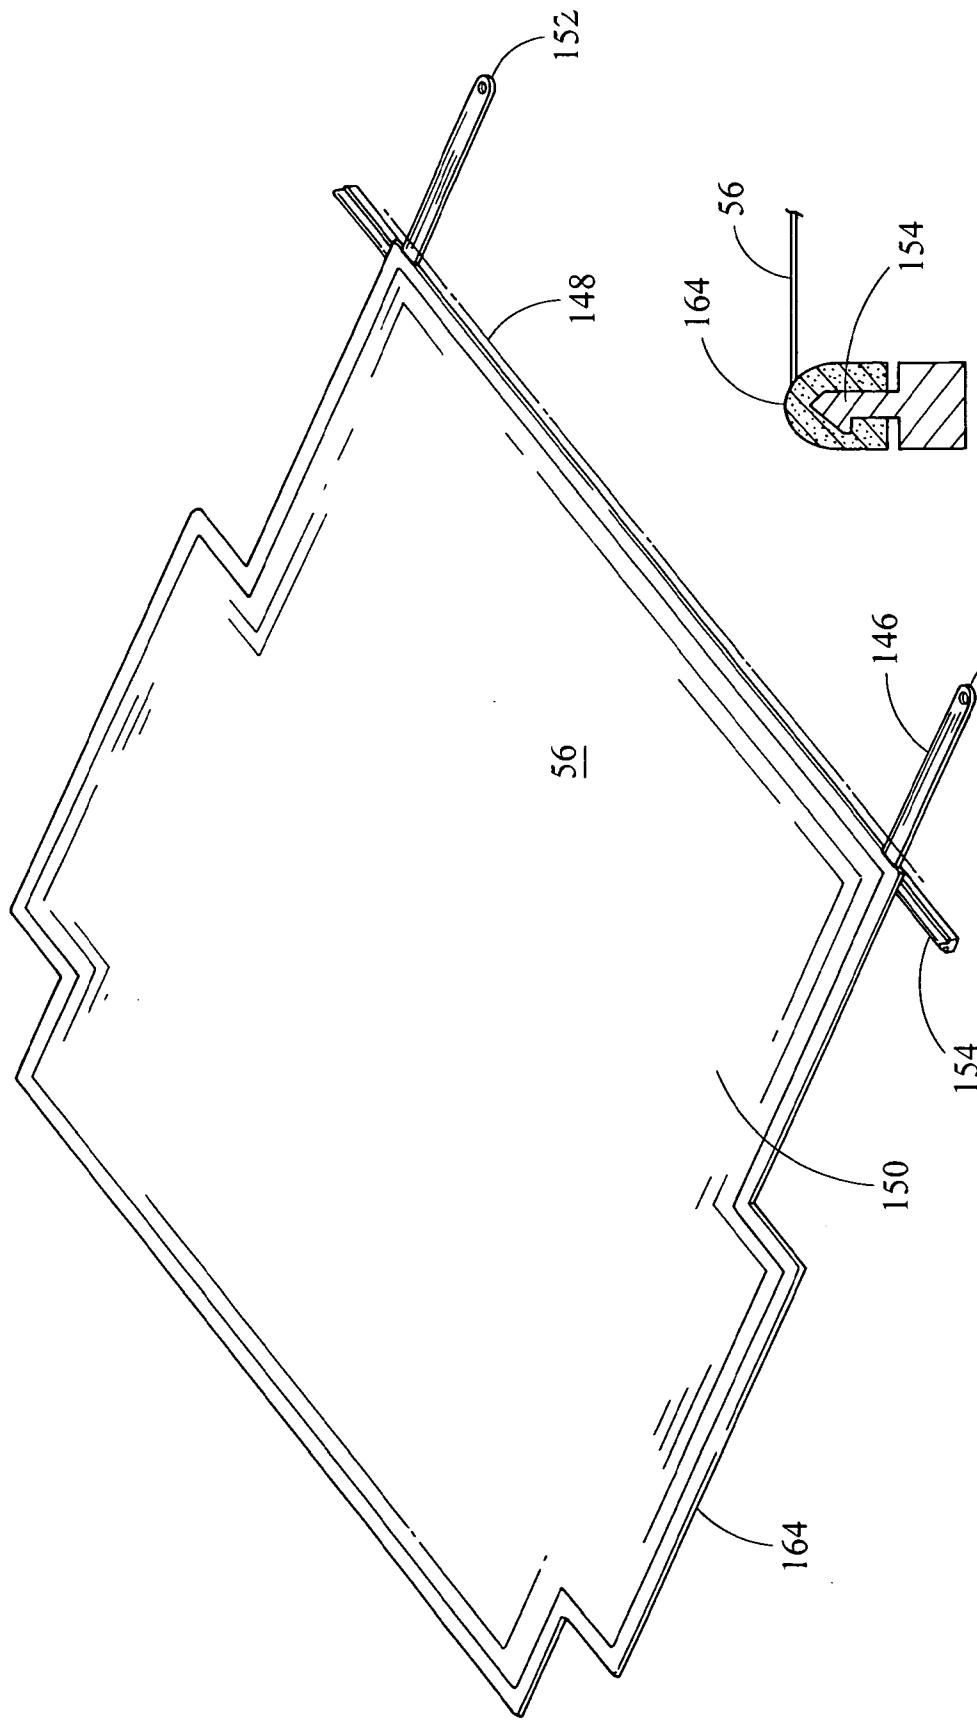


Fig. 17A

152

Fig. 17

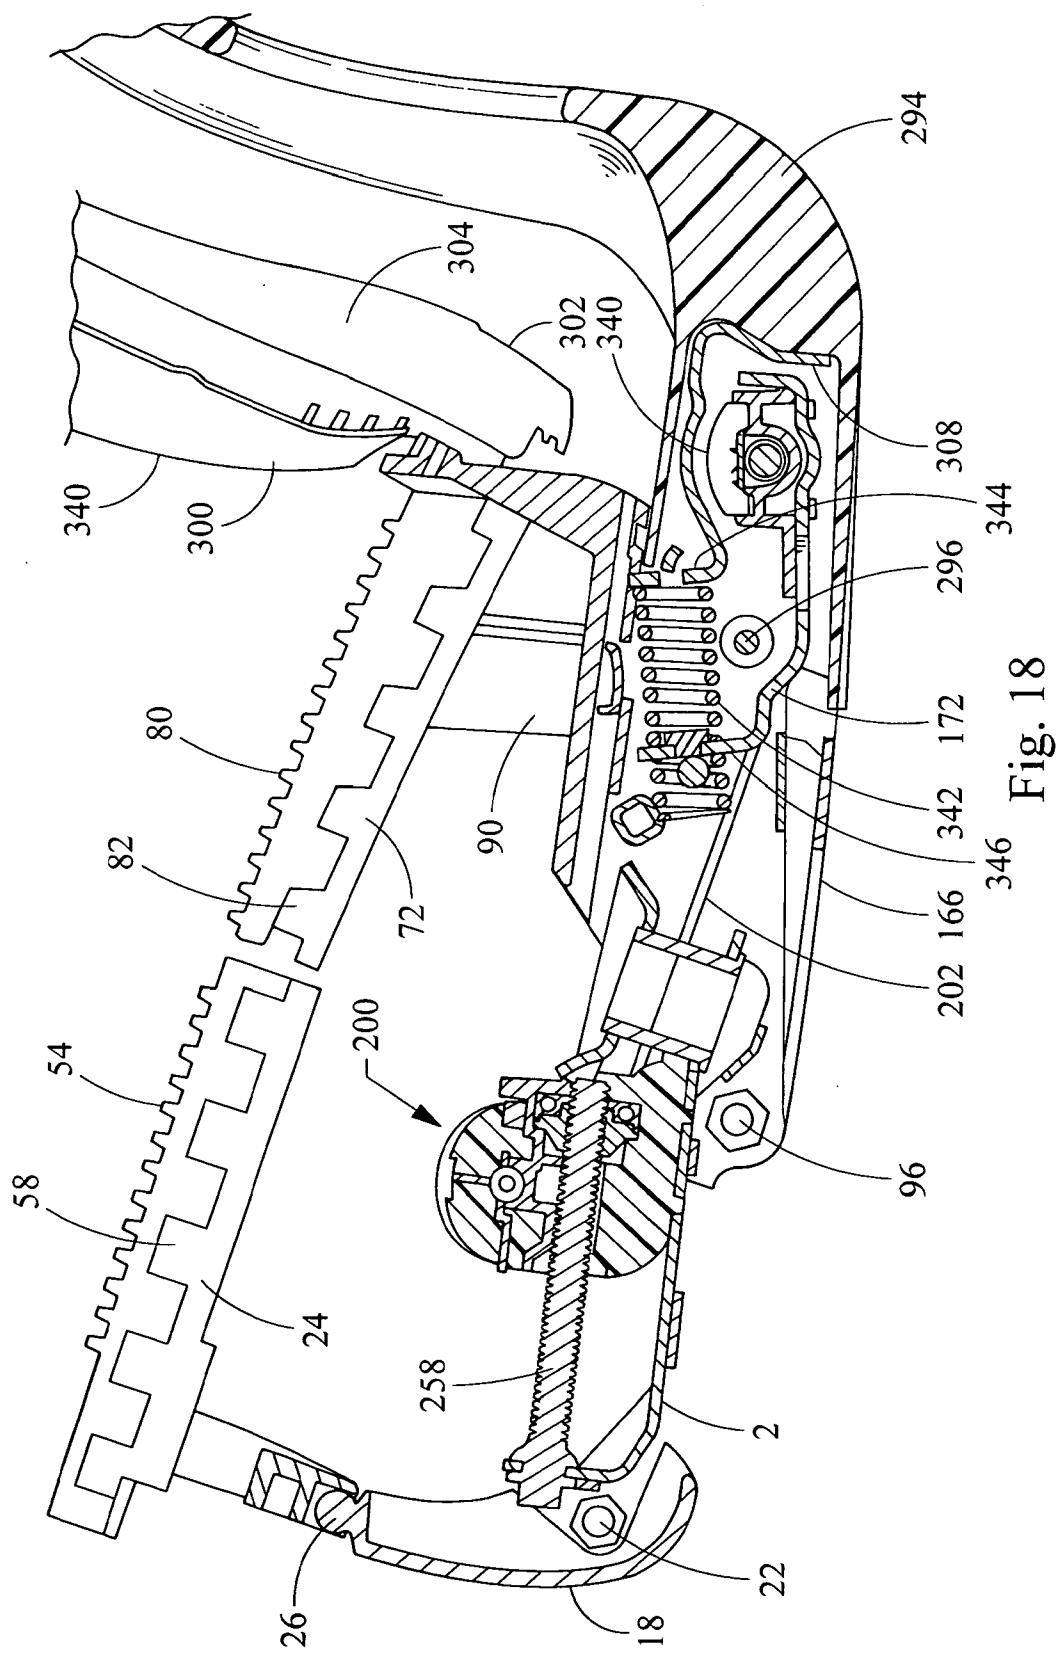


Fig. 18

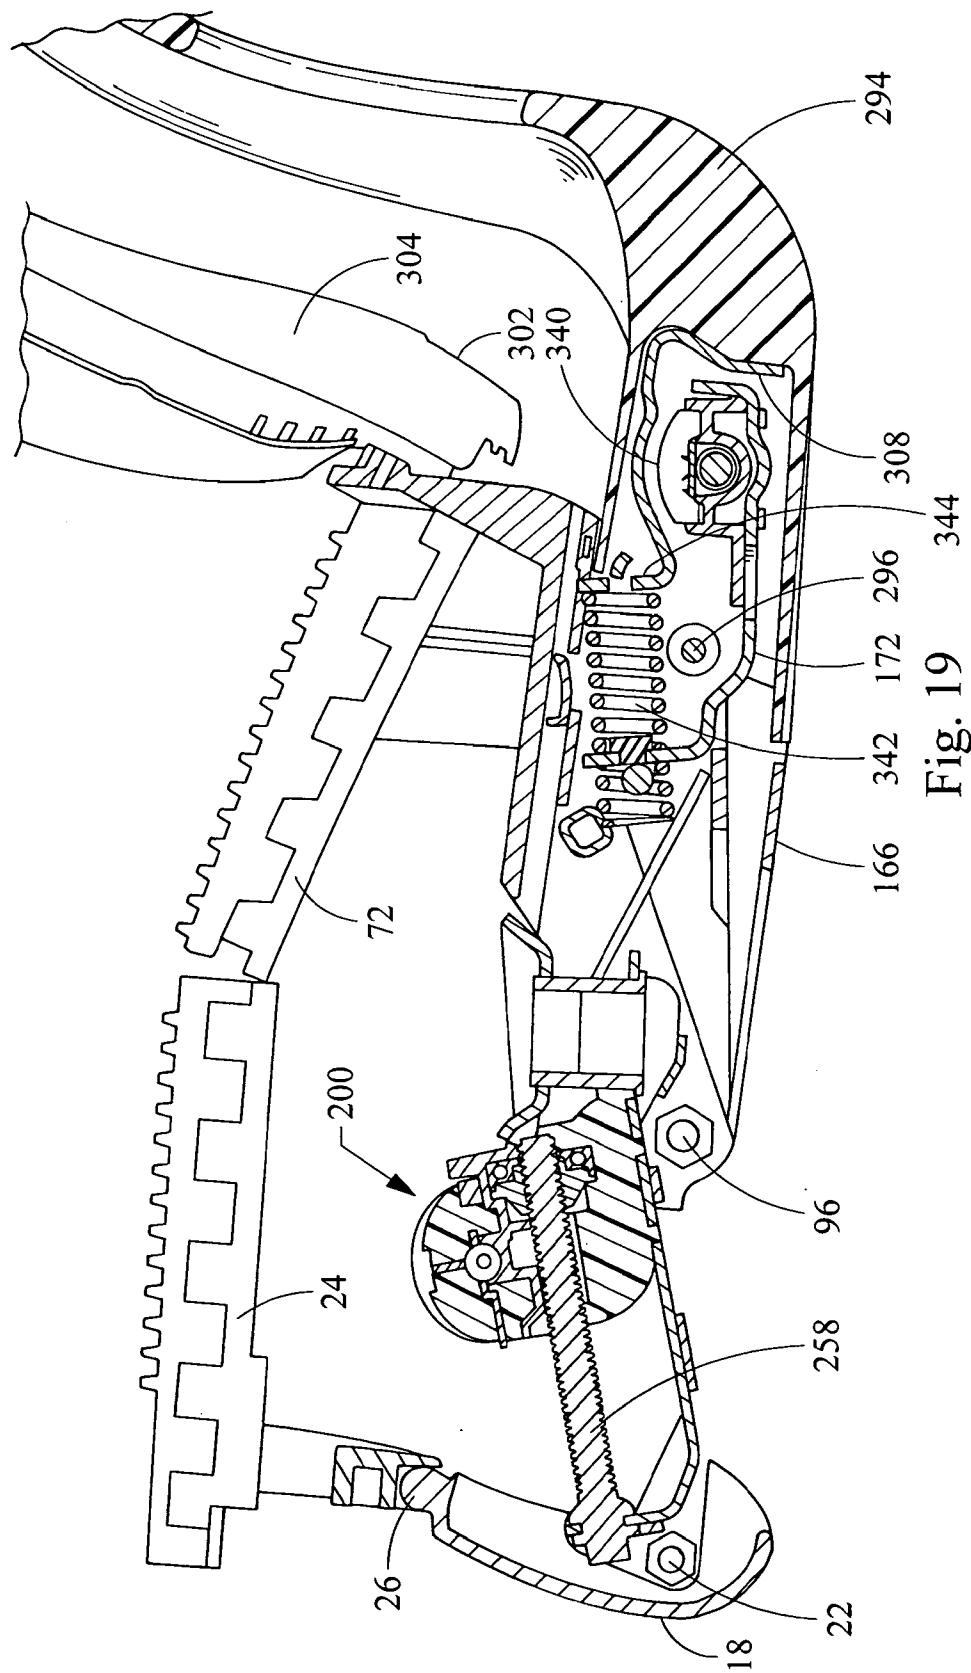


Fig. 19

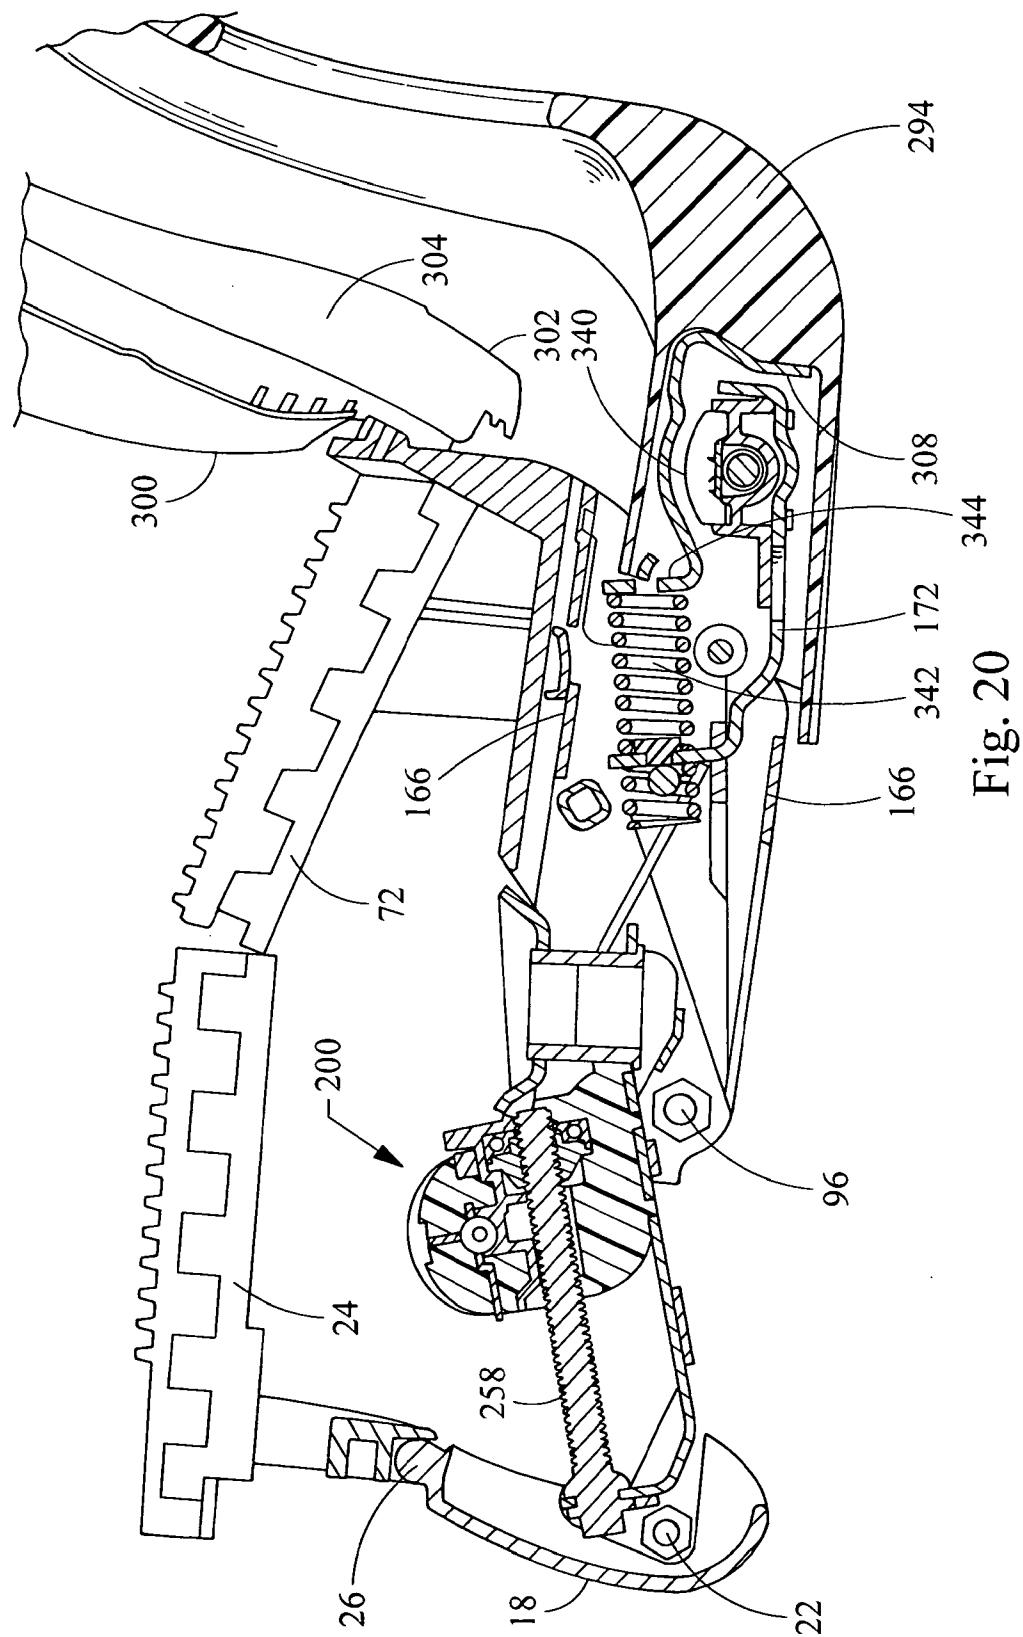
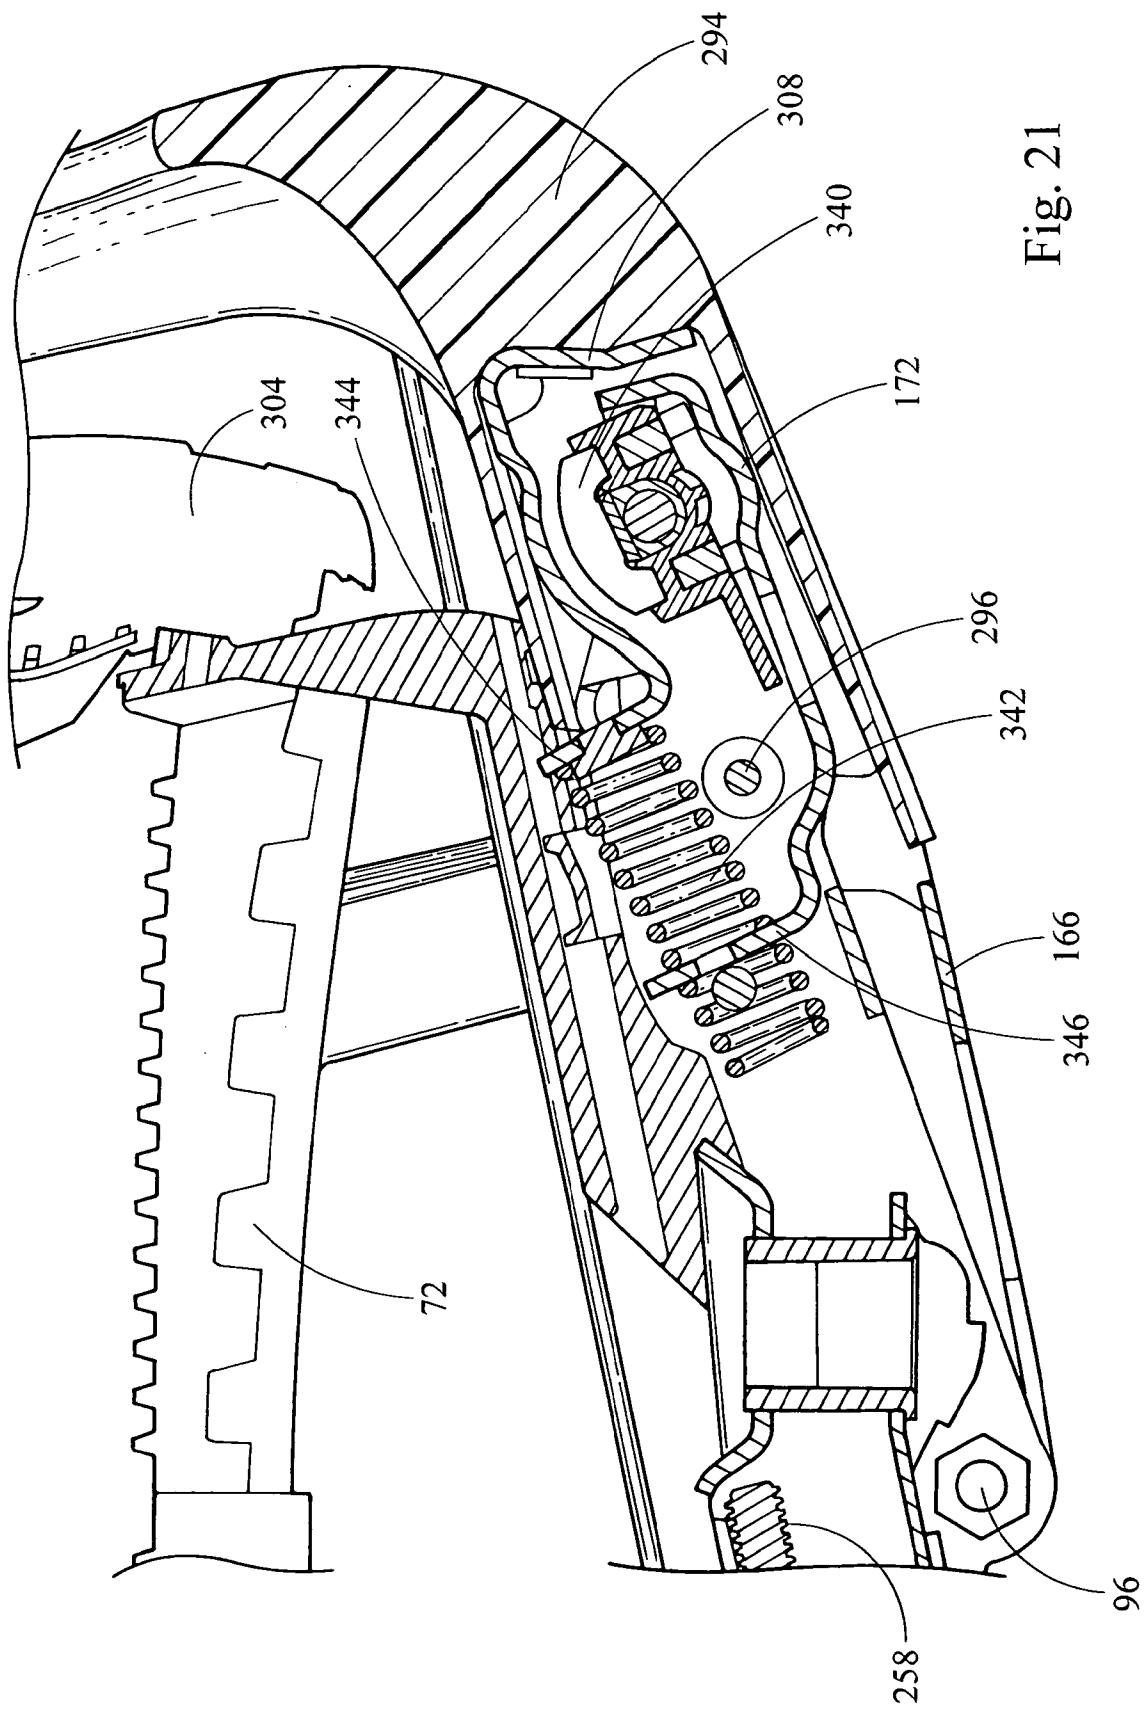
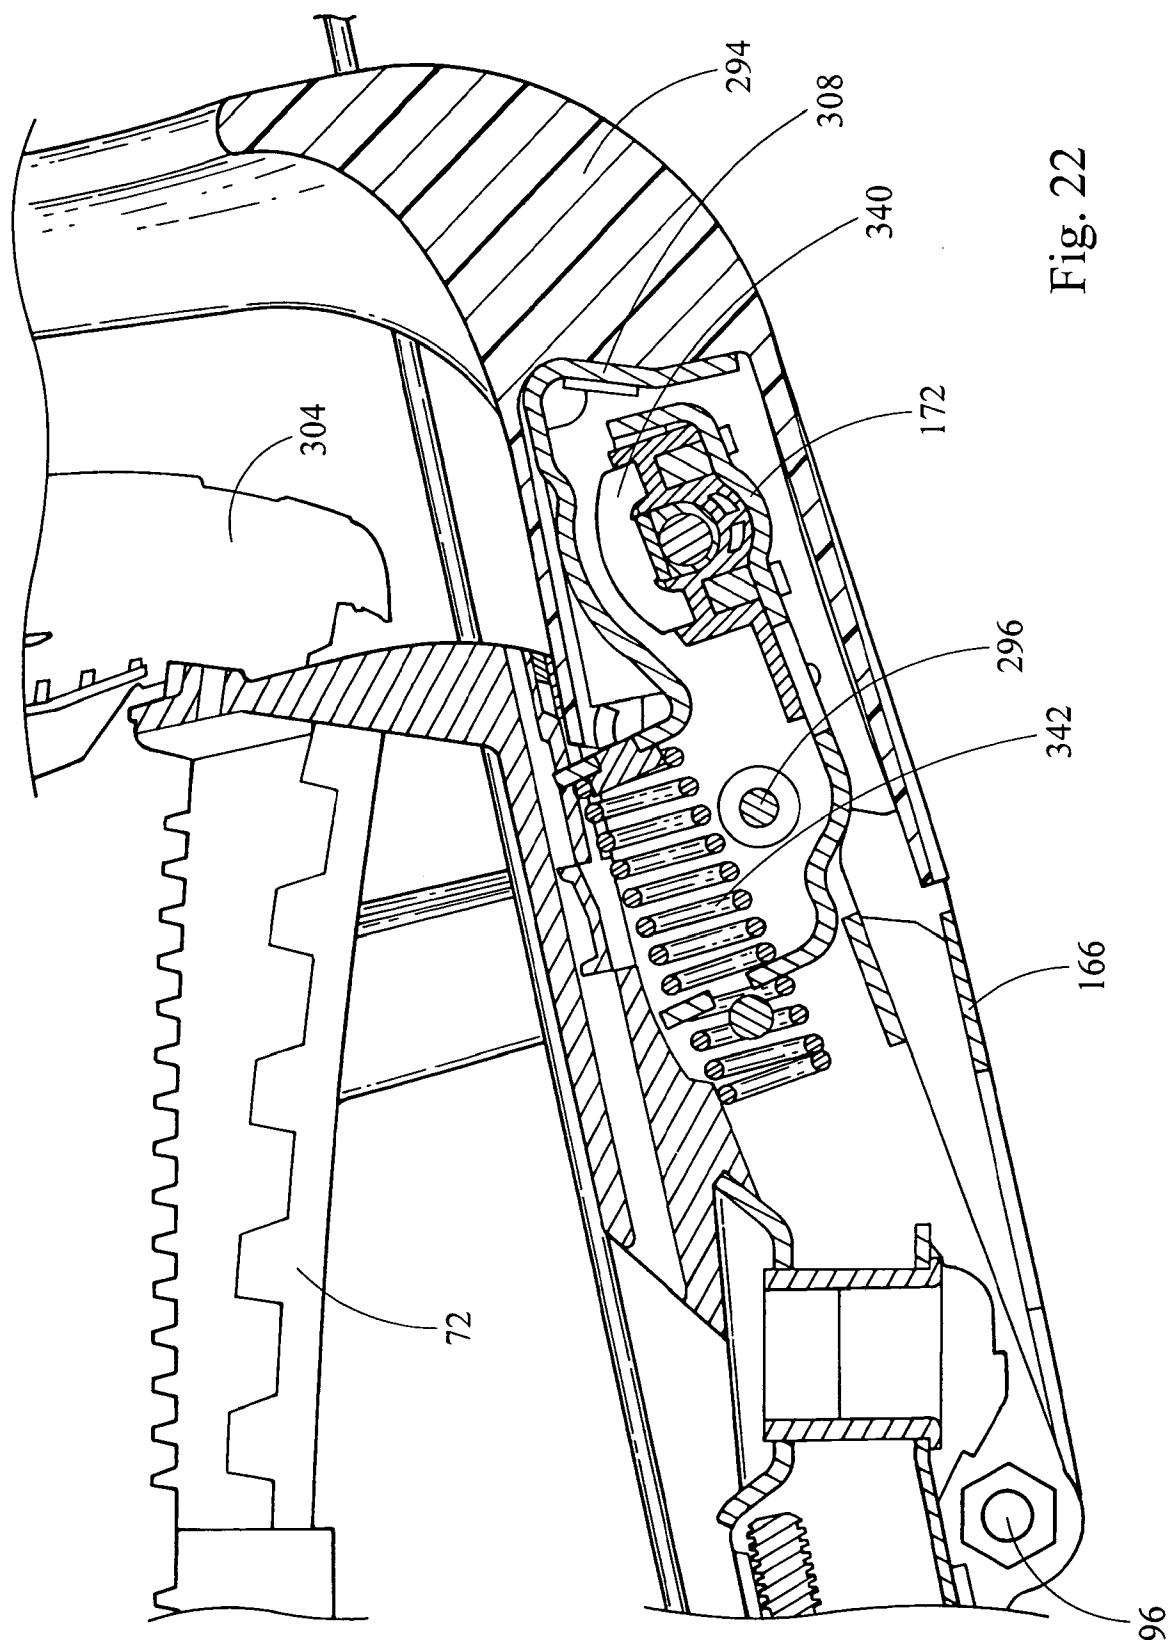


Fig. 20





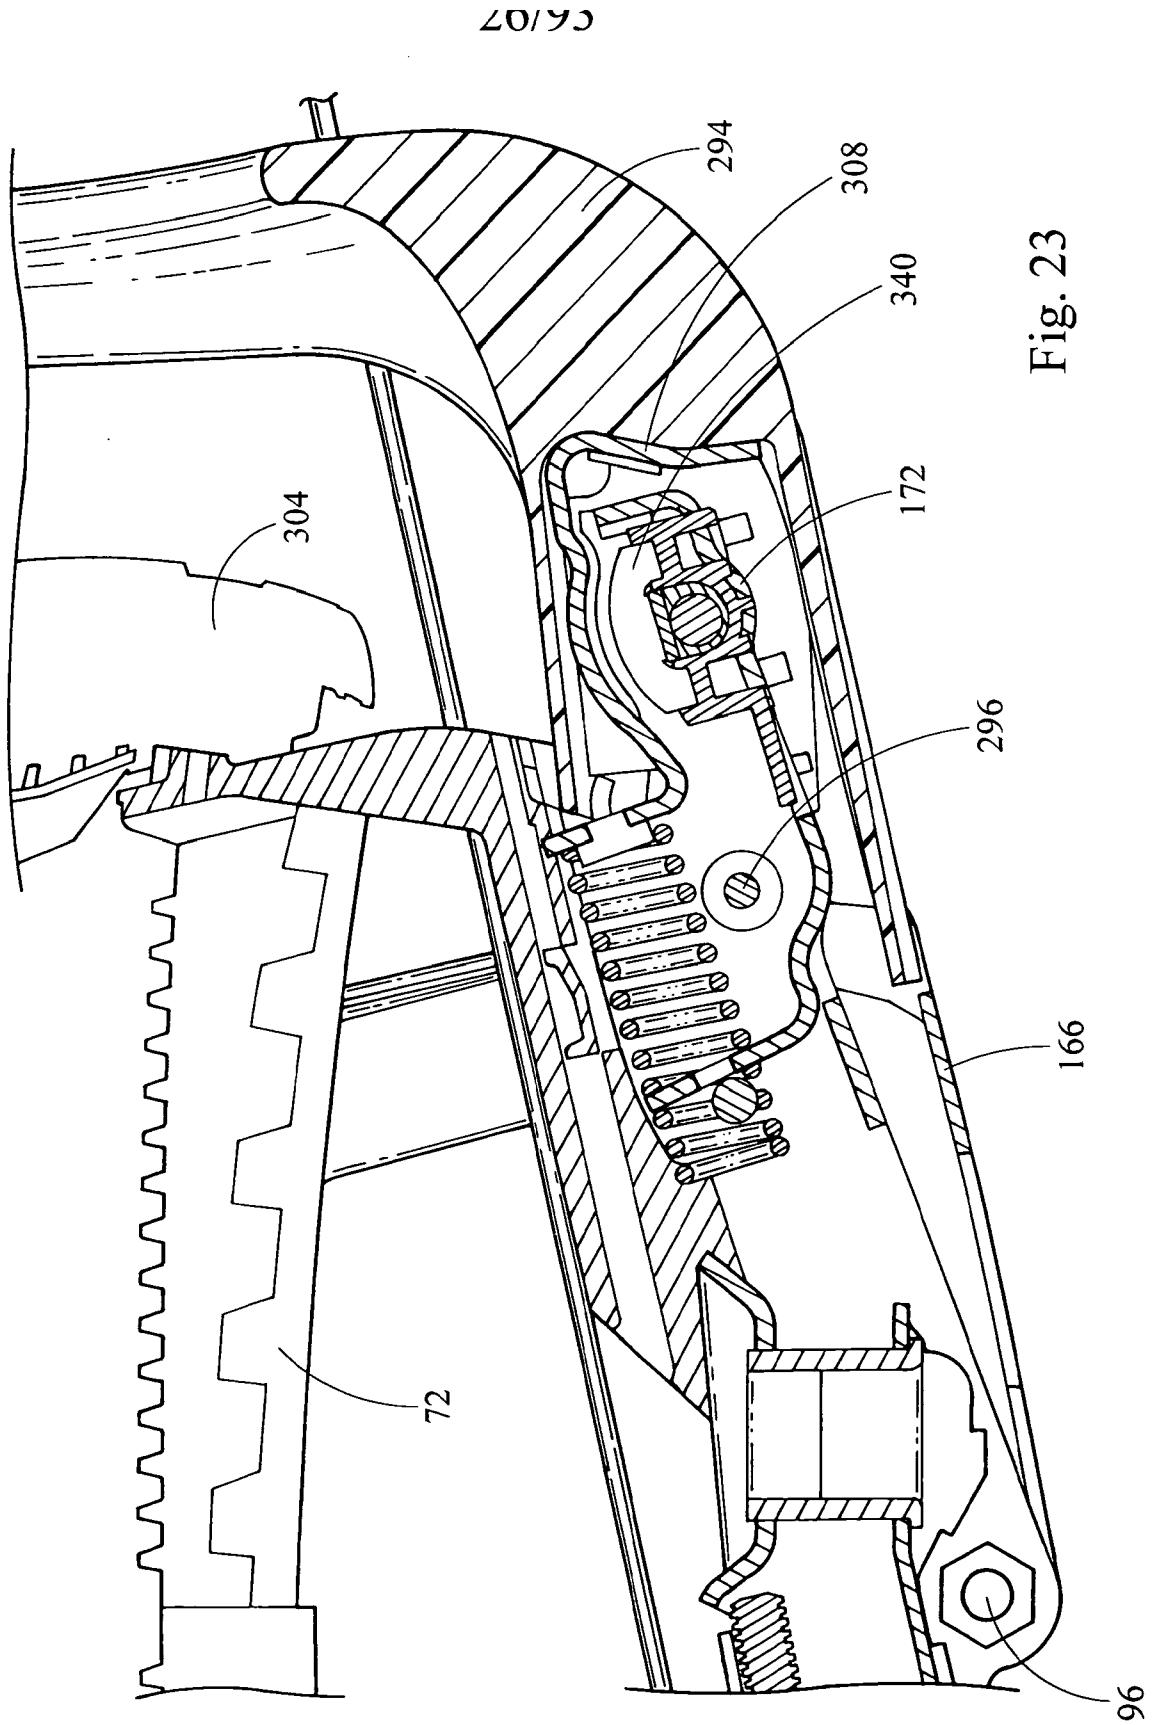


Fig. 23

27/93

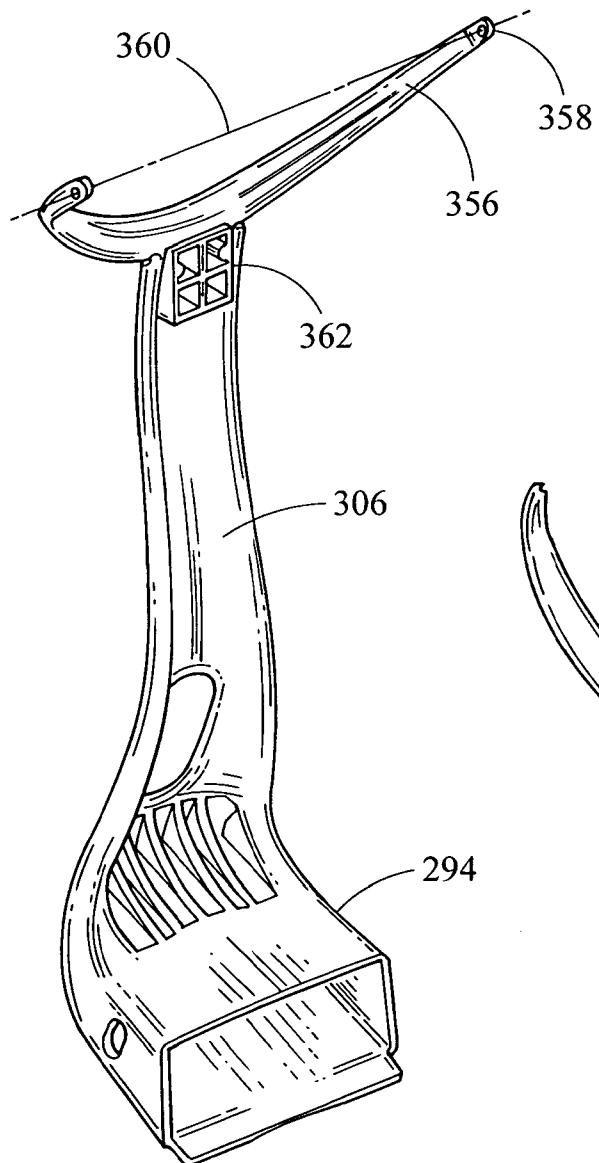


Fig. 24

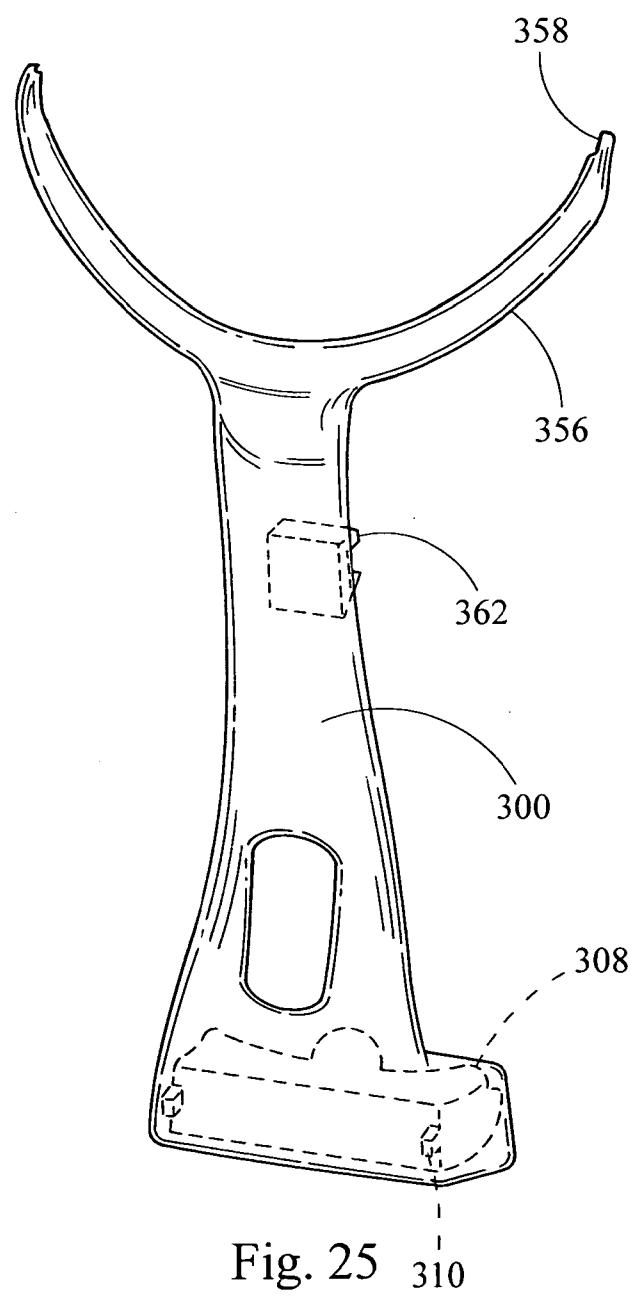


Fig. 25

20/20

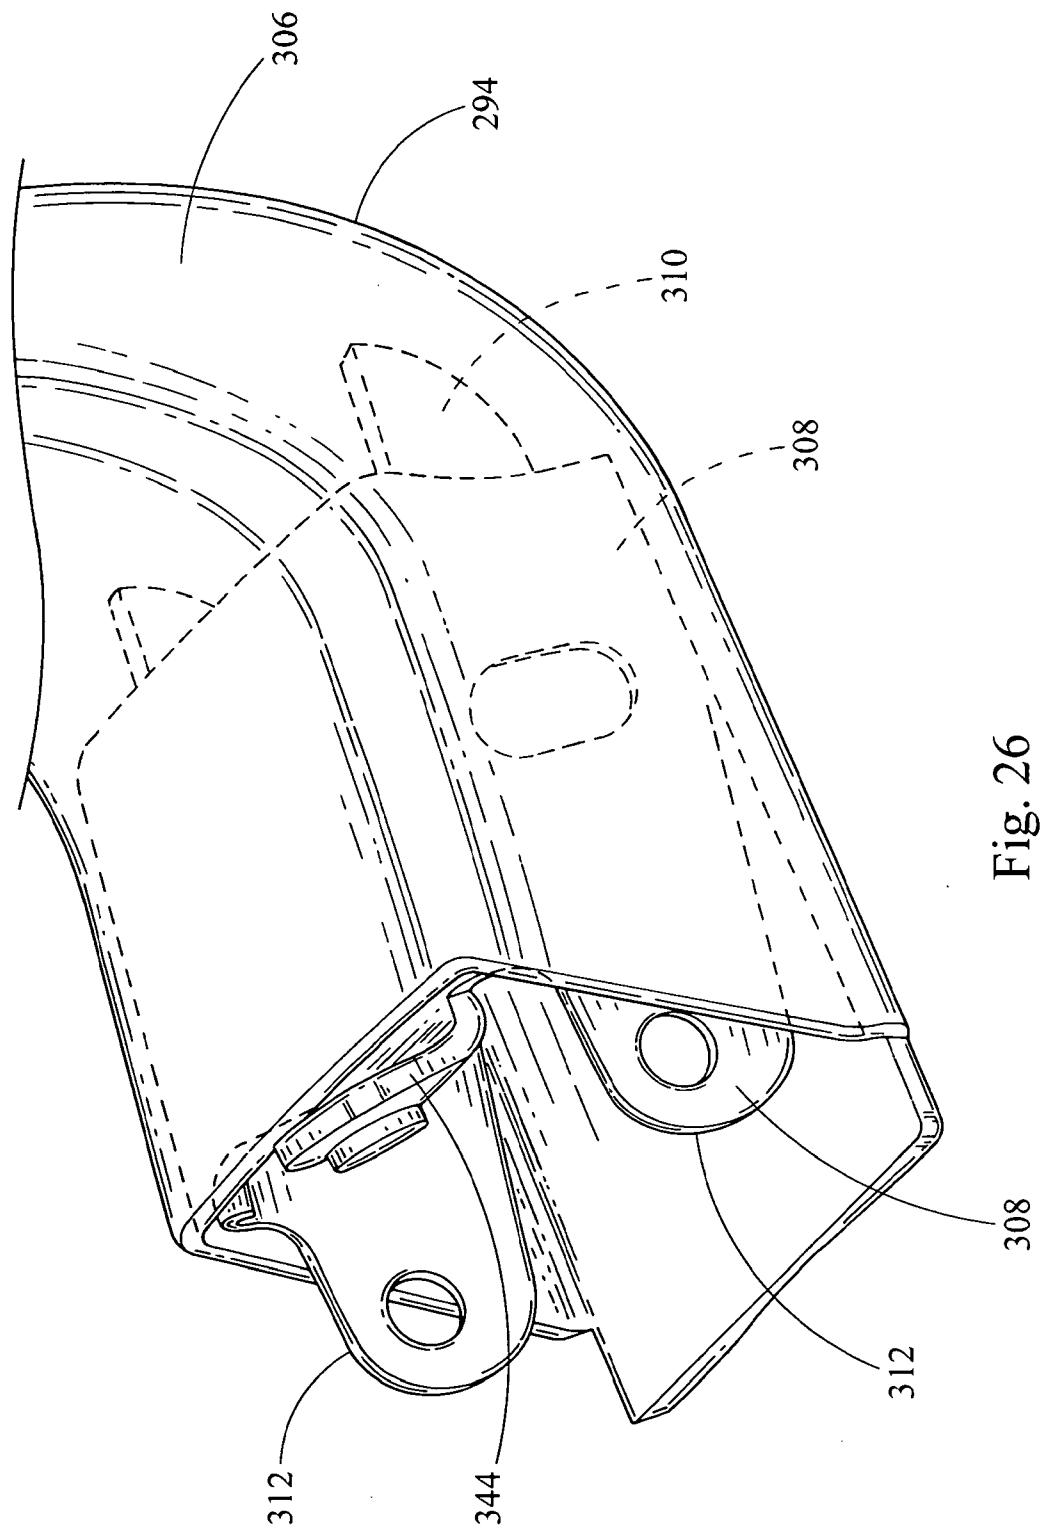


Fig. 26

26/67

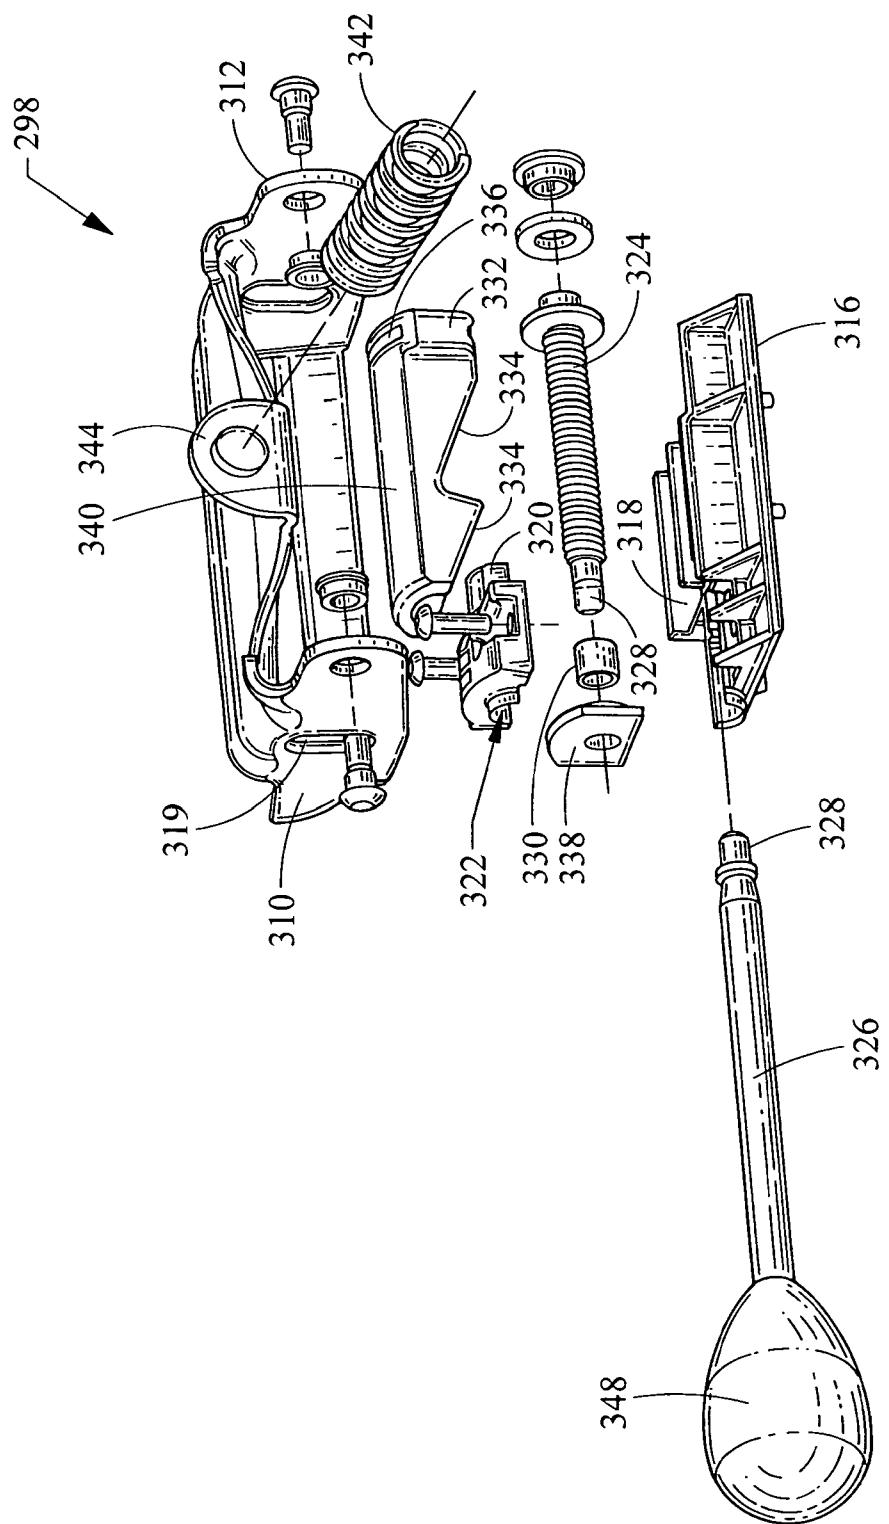


Fig. 27

C01/C02

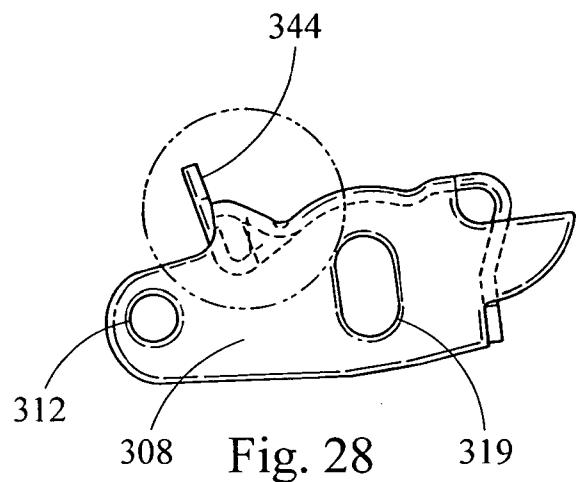


Fig. 28

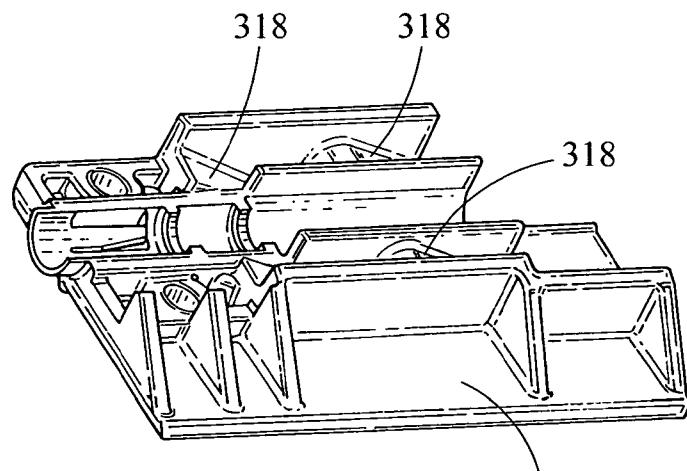


Fig. 29

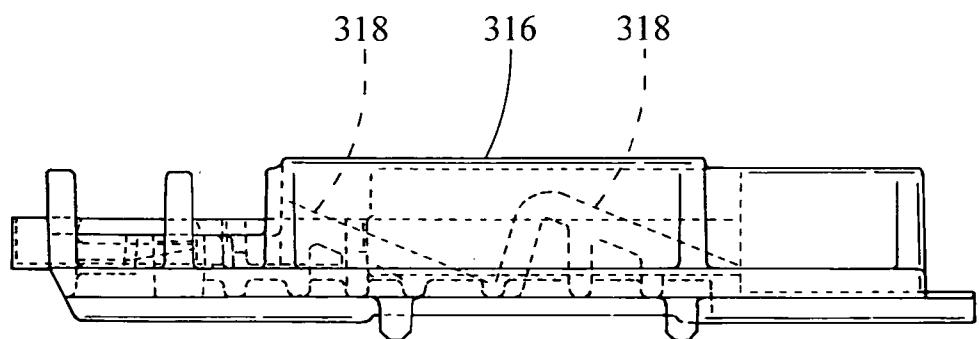


Fig. 30

51/93

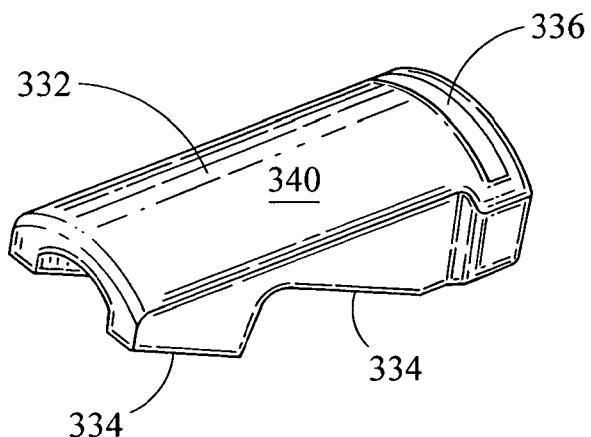


Fig. 31

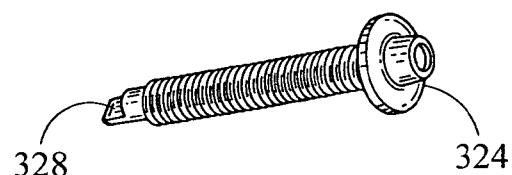


Fig. 32

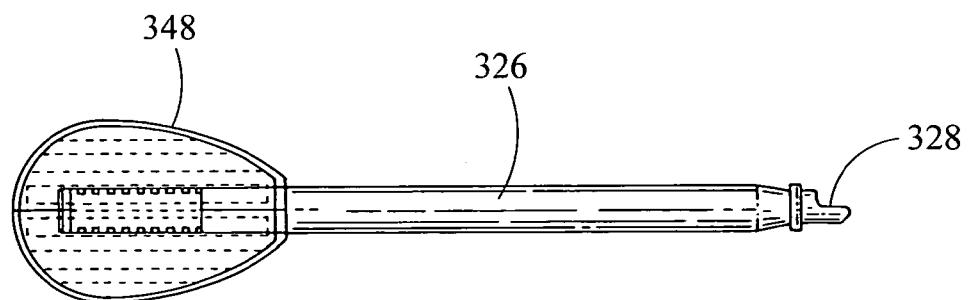


Fig. 33

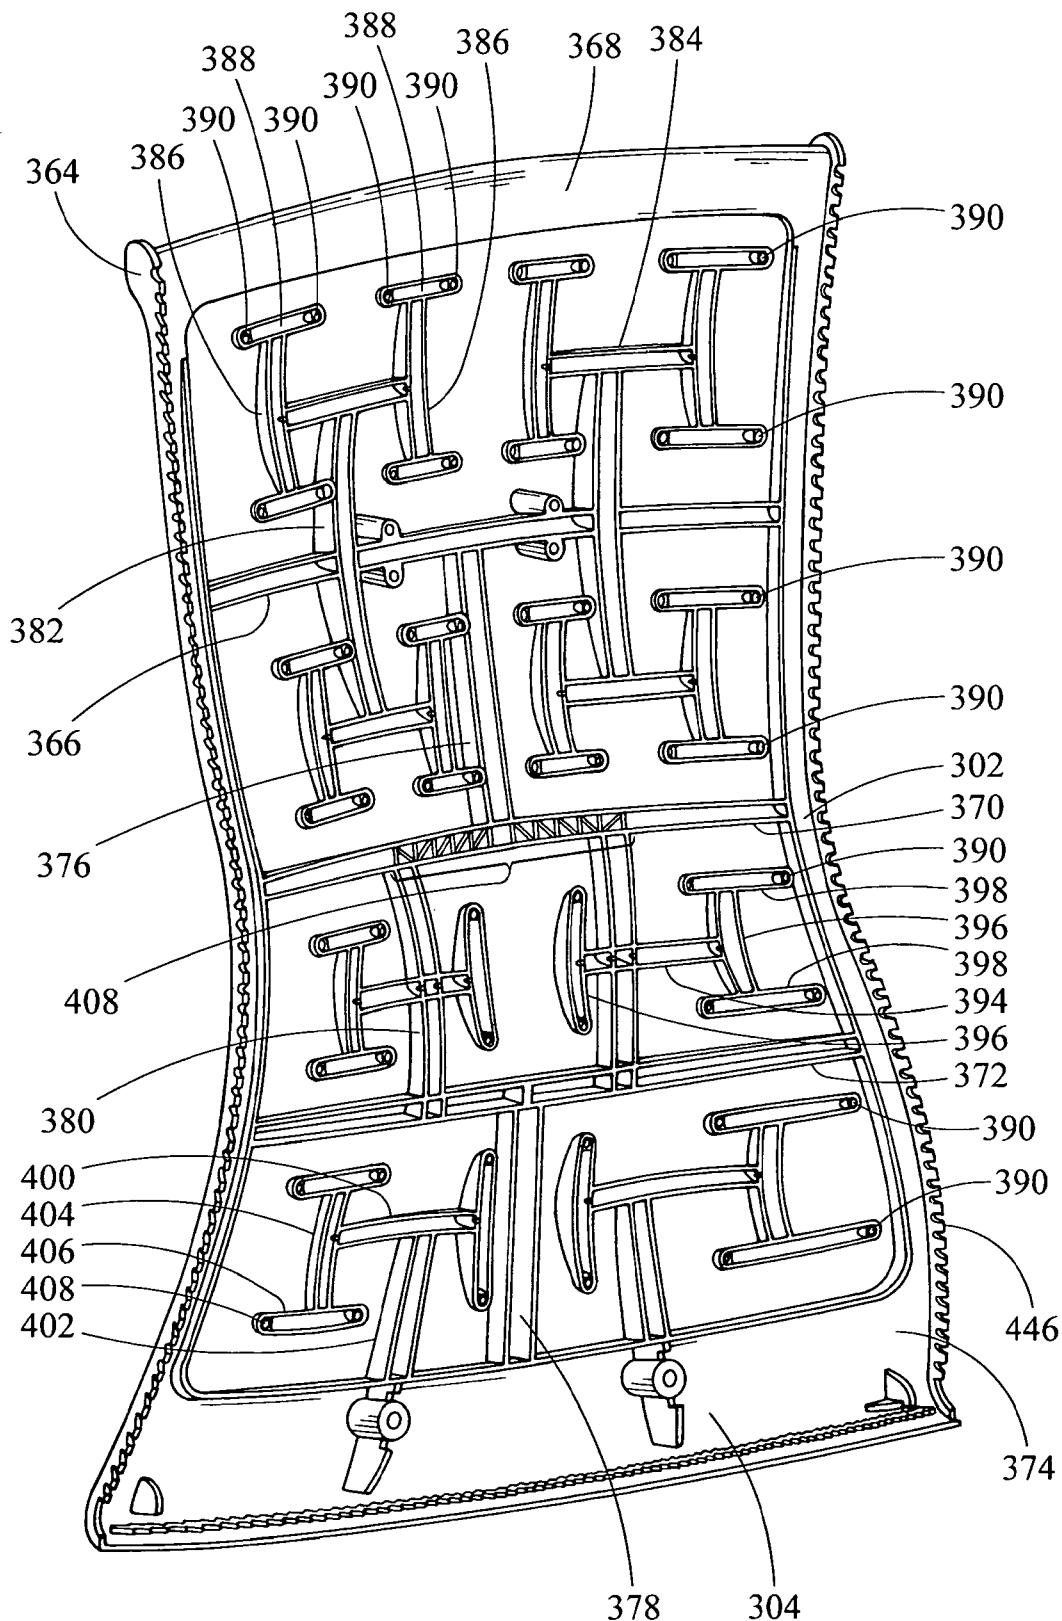


Fig. 34

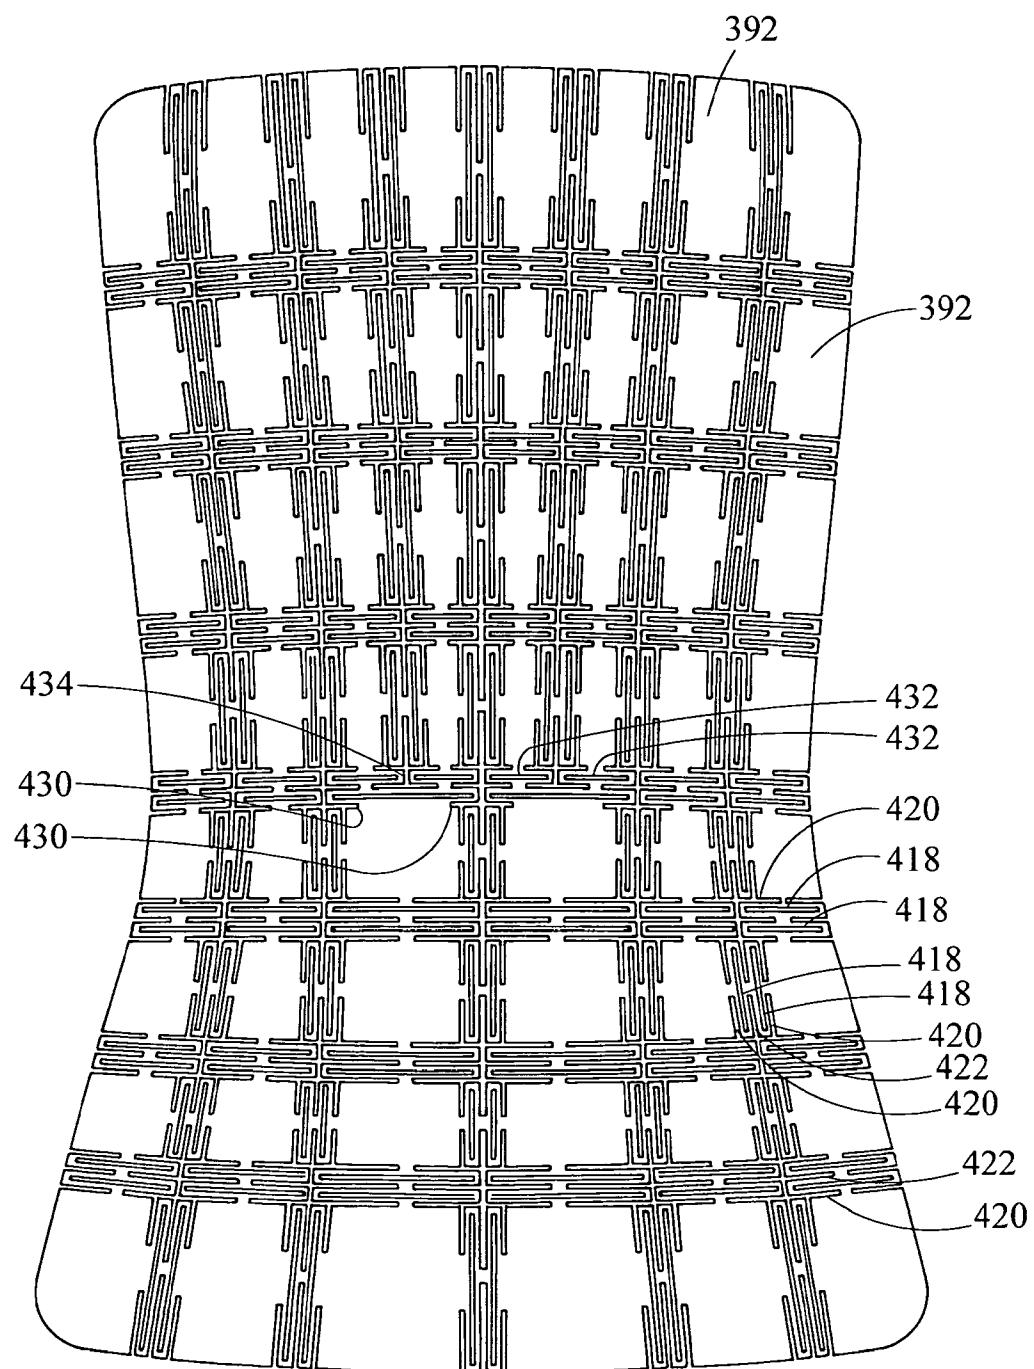


Fig. 35

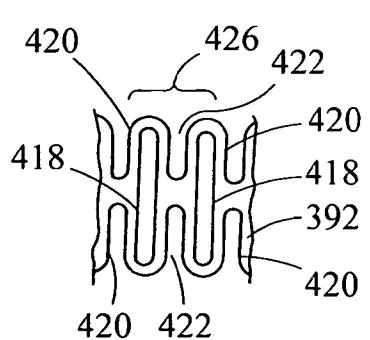


Fig. 35A

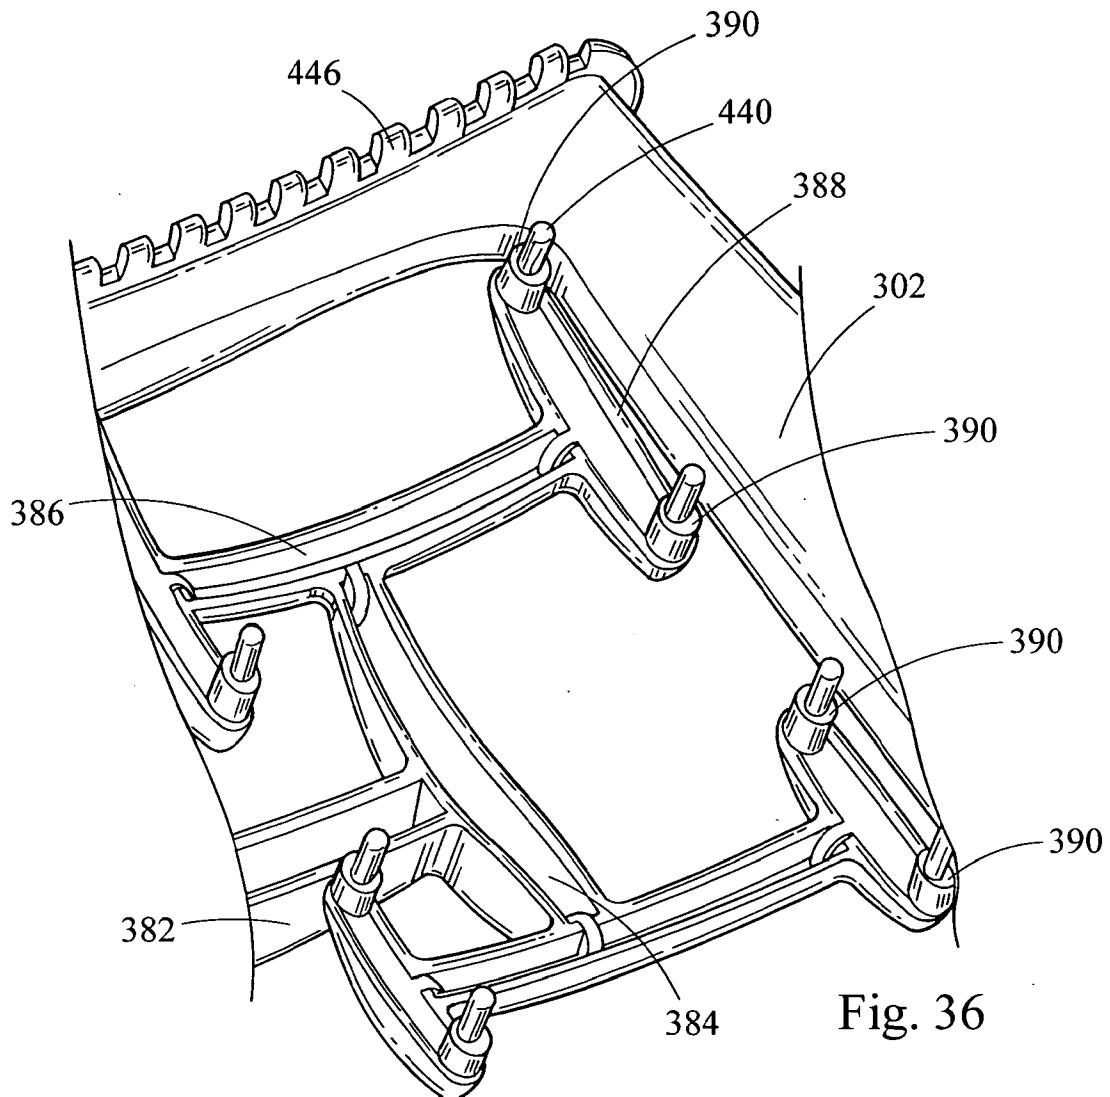


Fig. 36

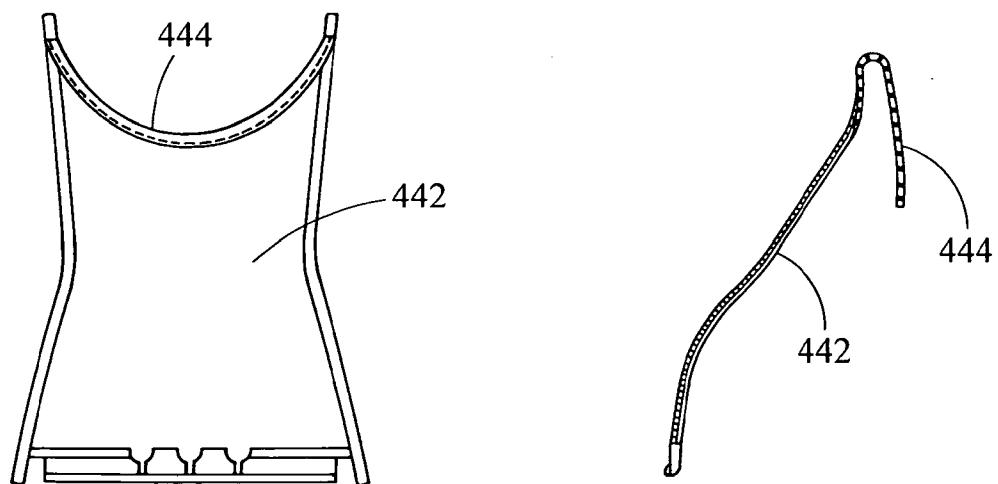


Fig. 37

Fig. 38

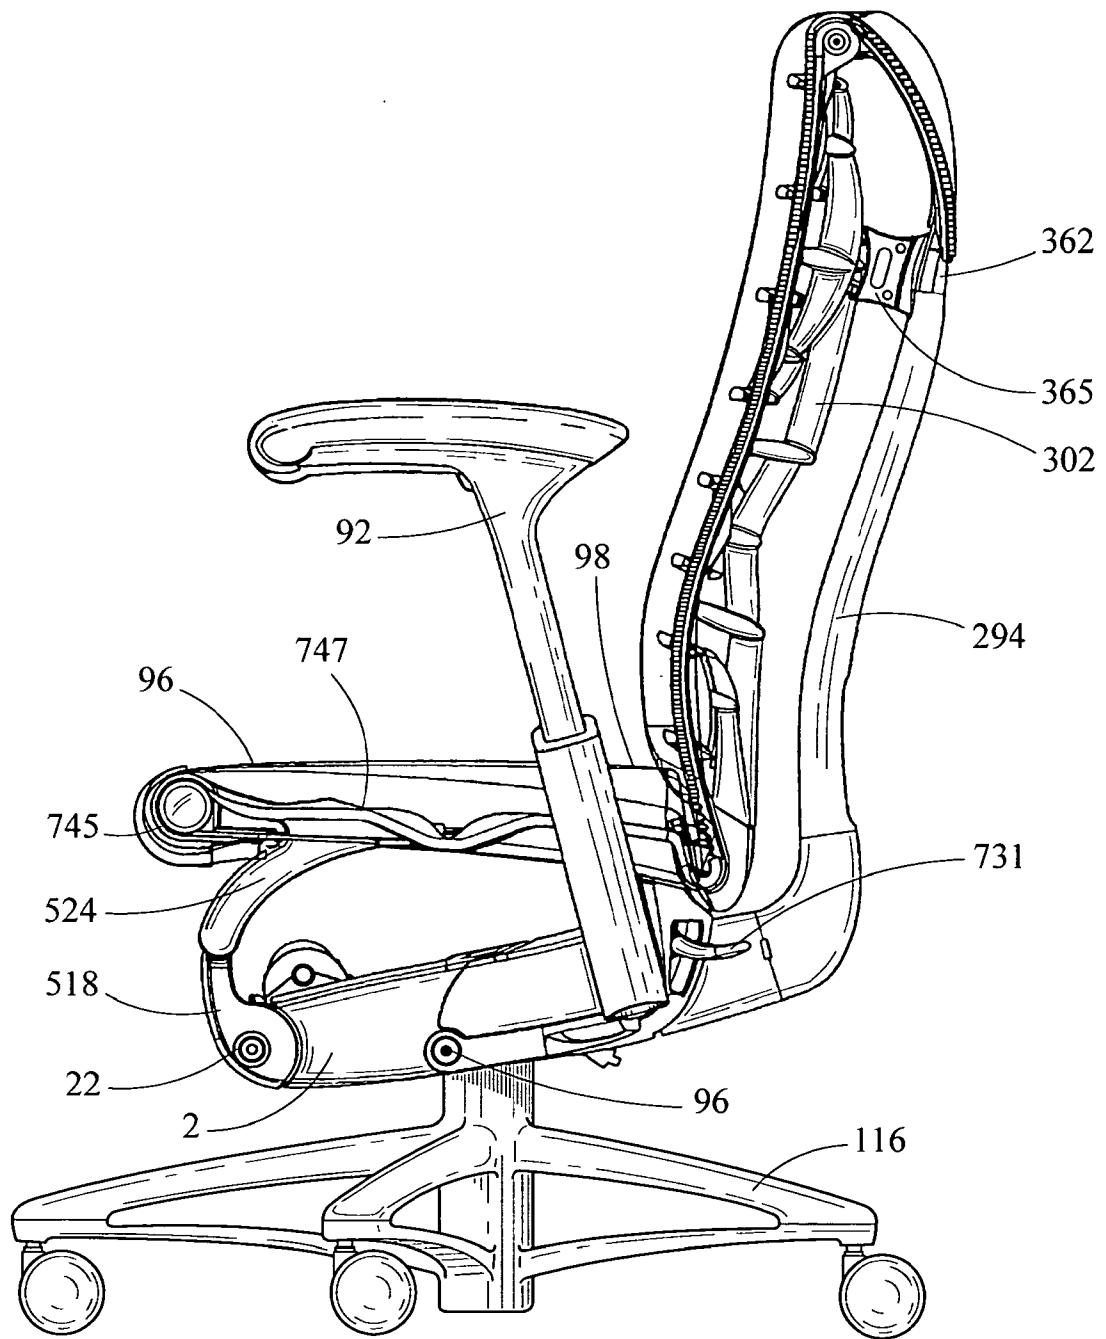


Fig. 39

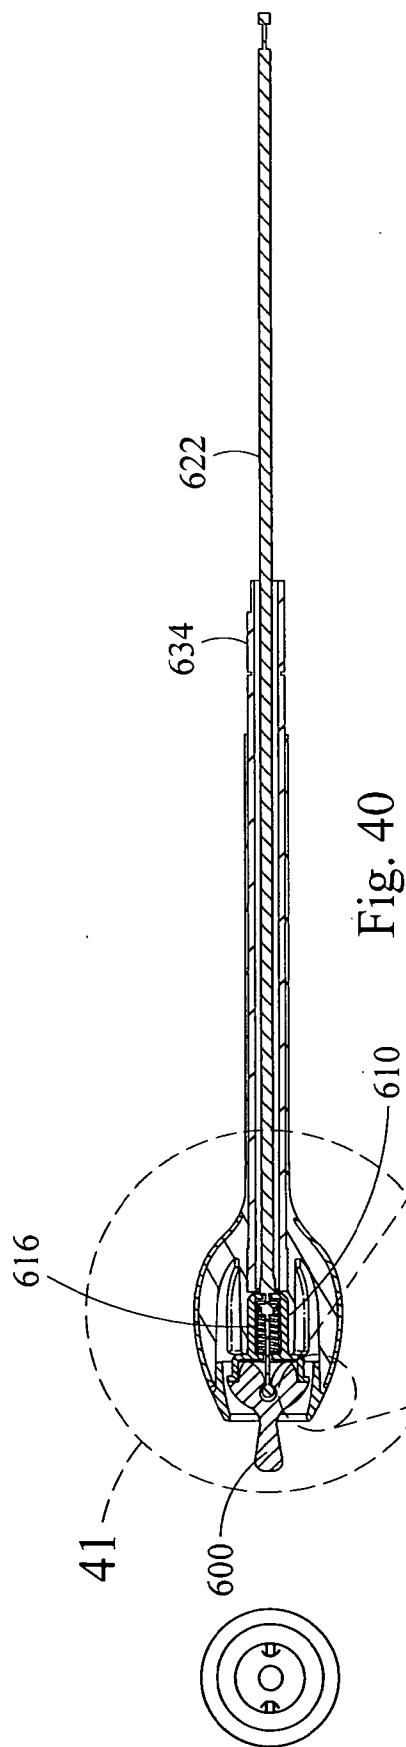


Fig. 40

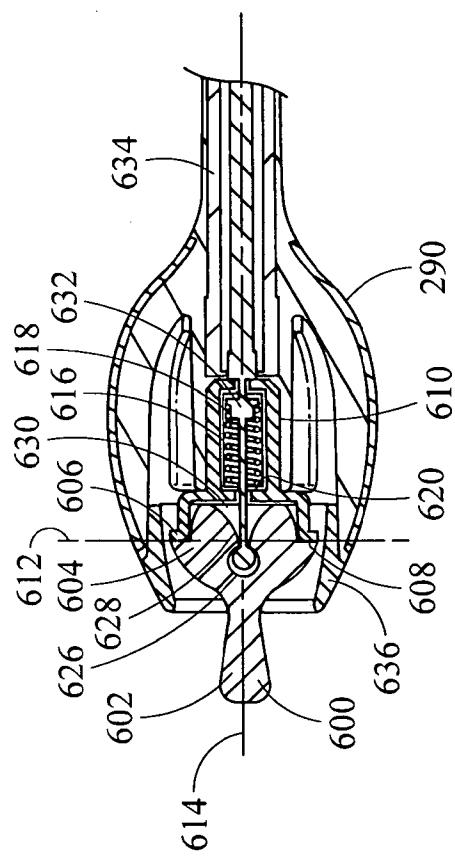


Fig. 41

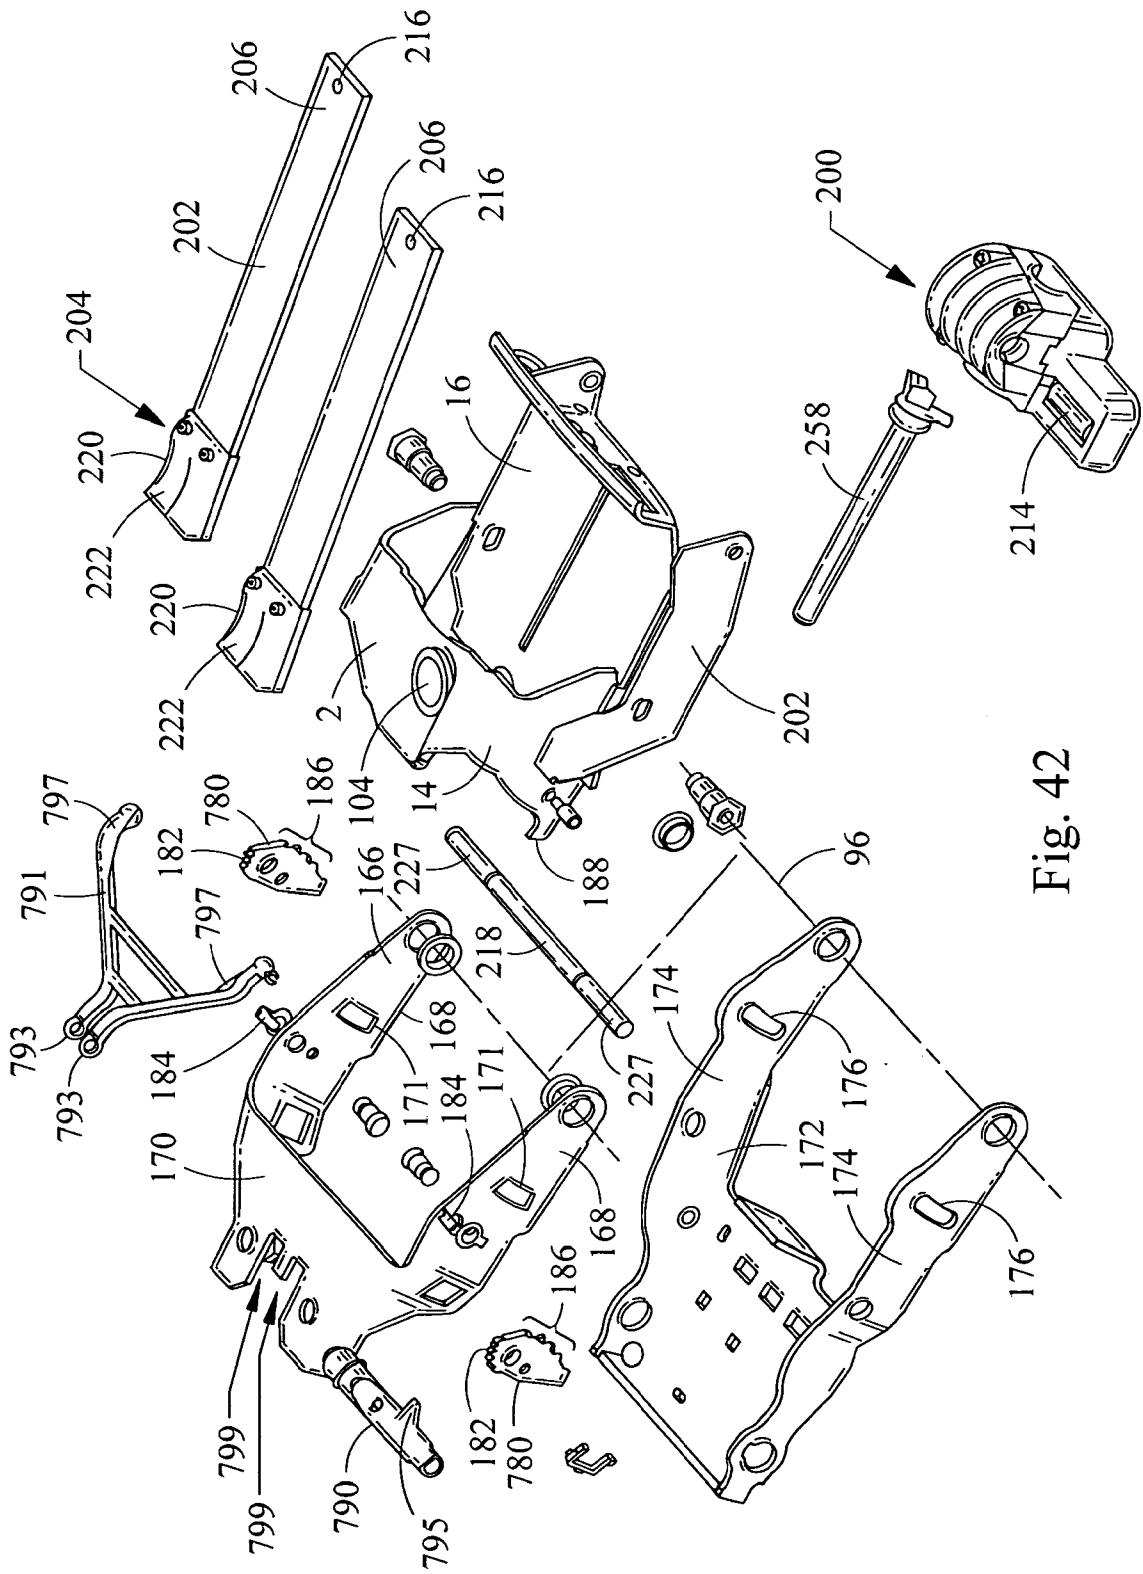


Fig. 42

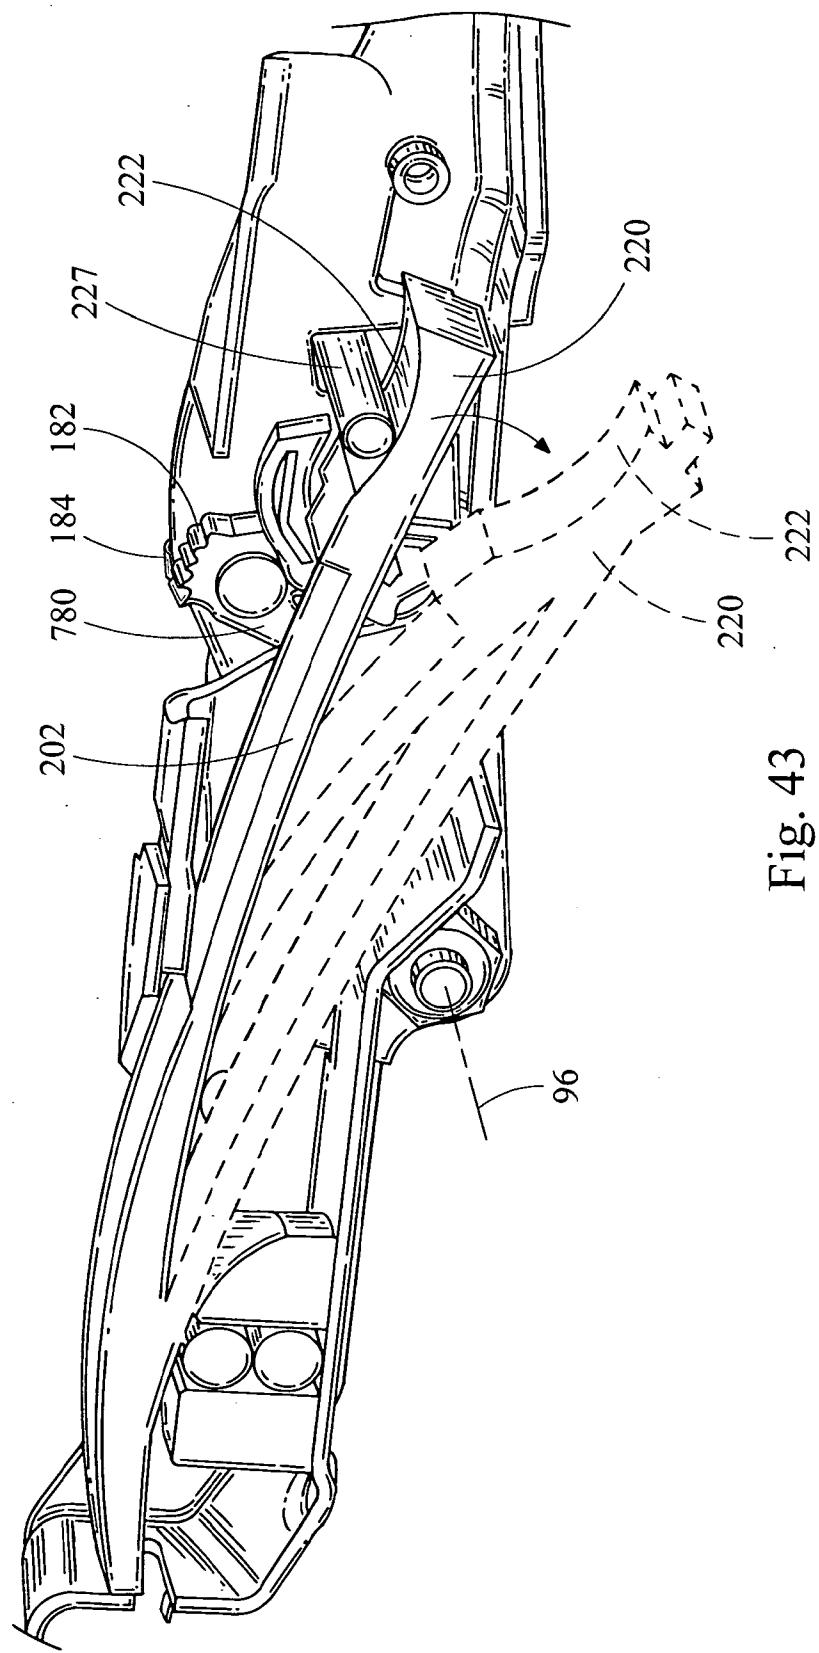


Fig. 43

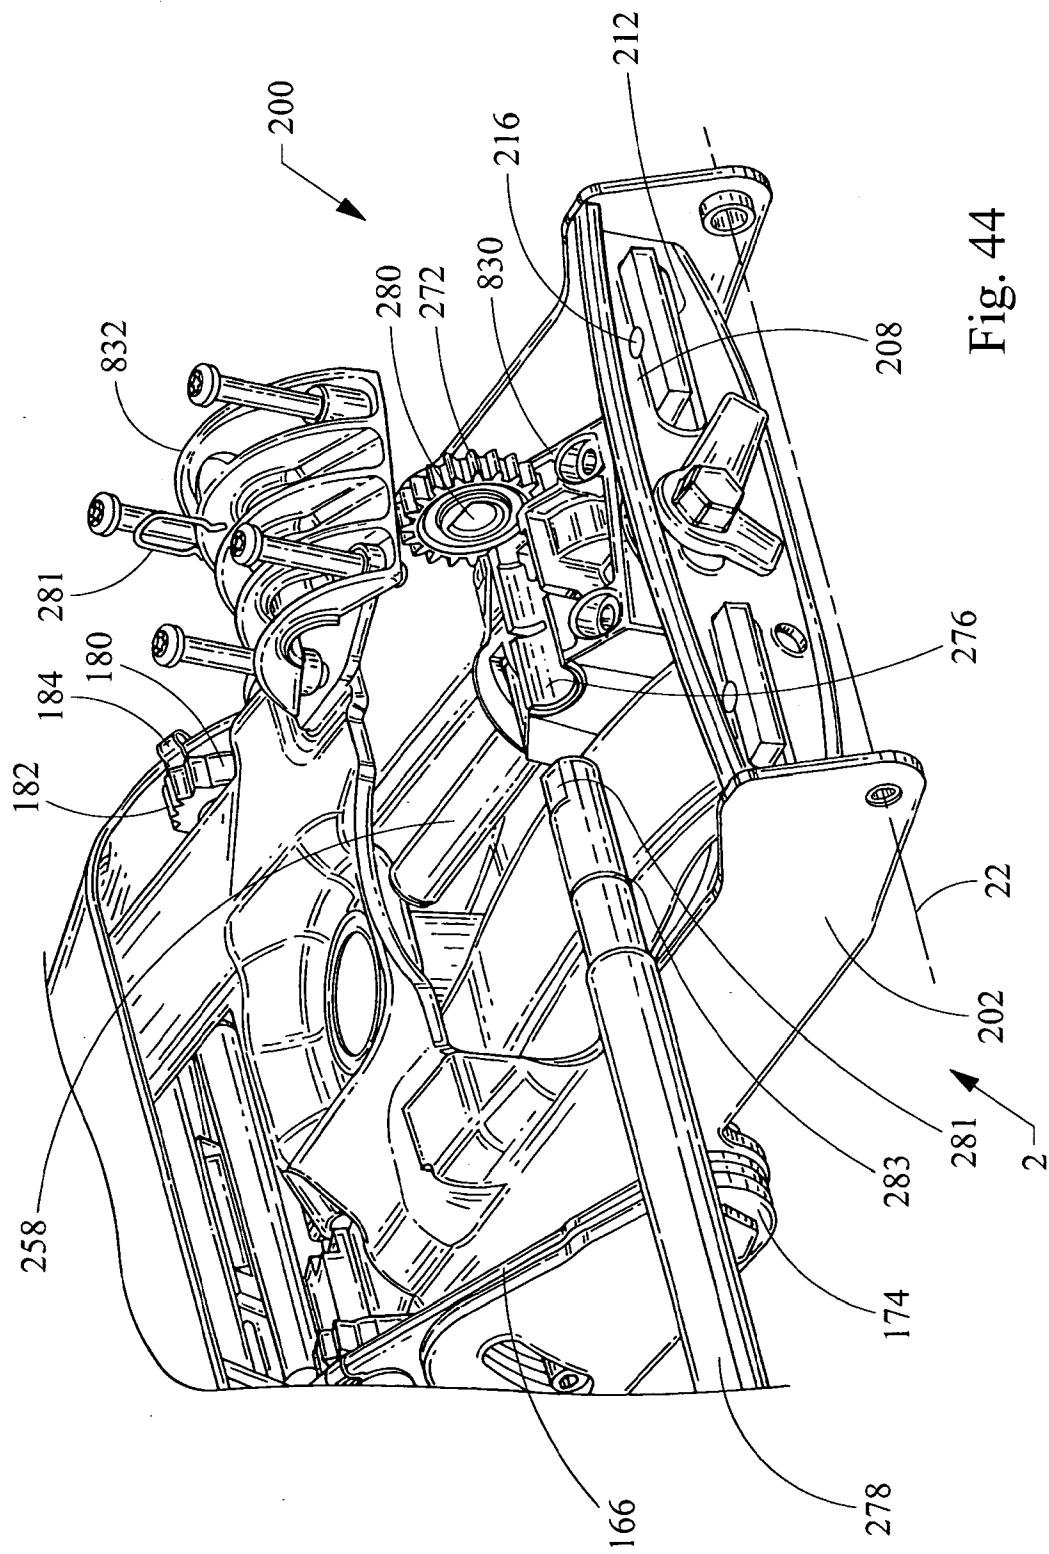
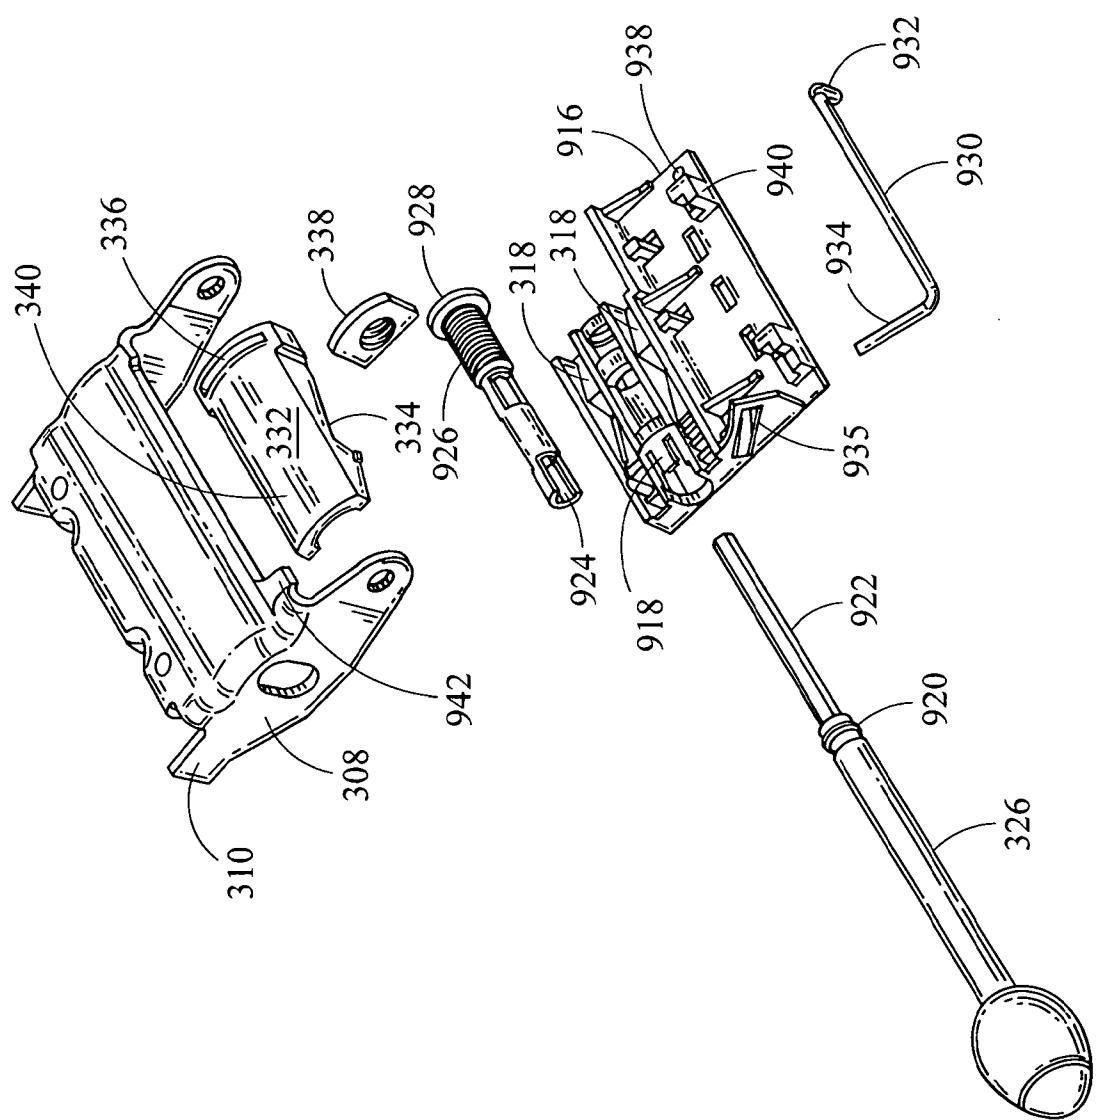


Fig. 44

Fig. 45



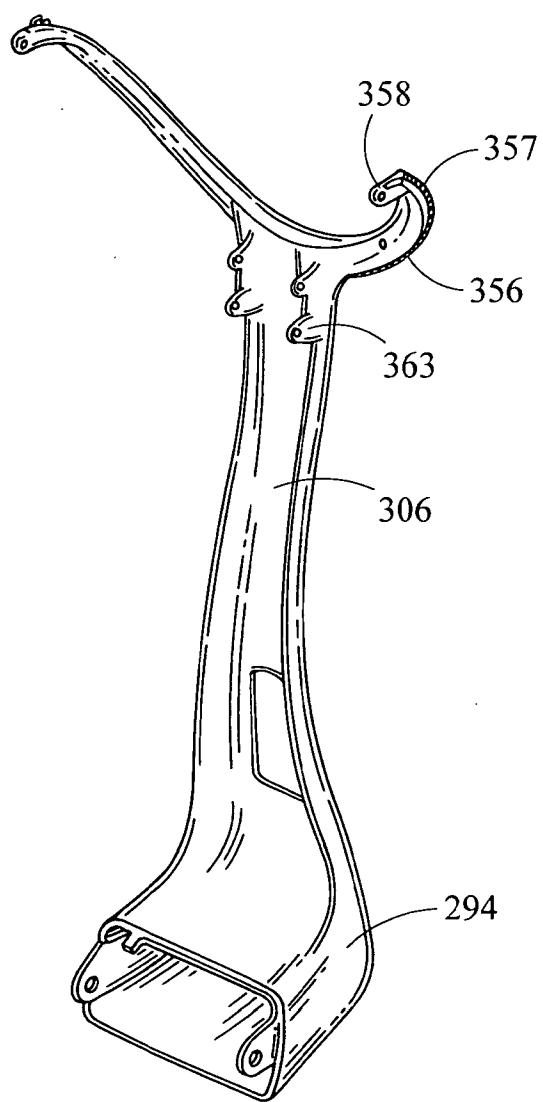


Fig. 46

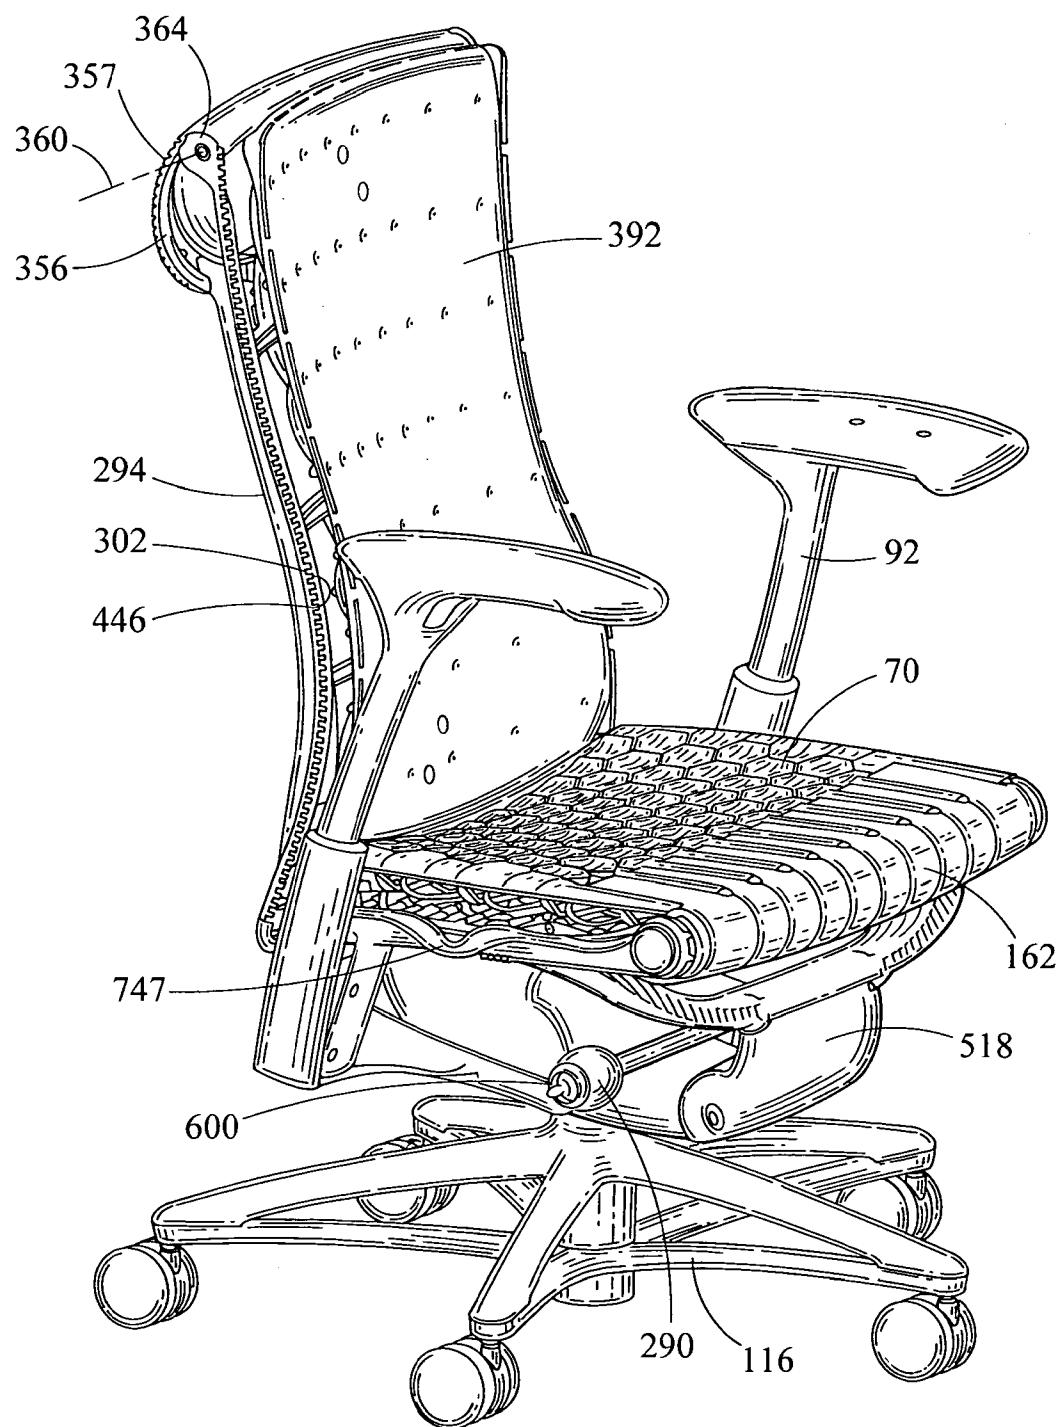


Fig. 47

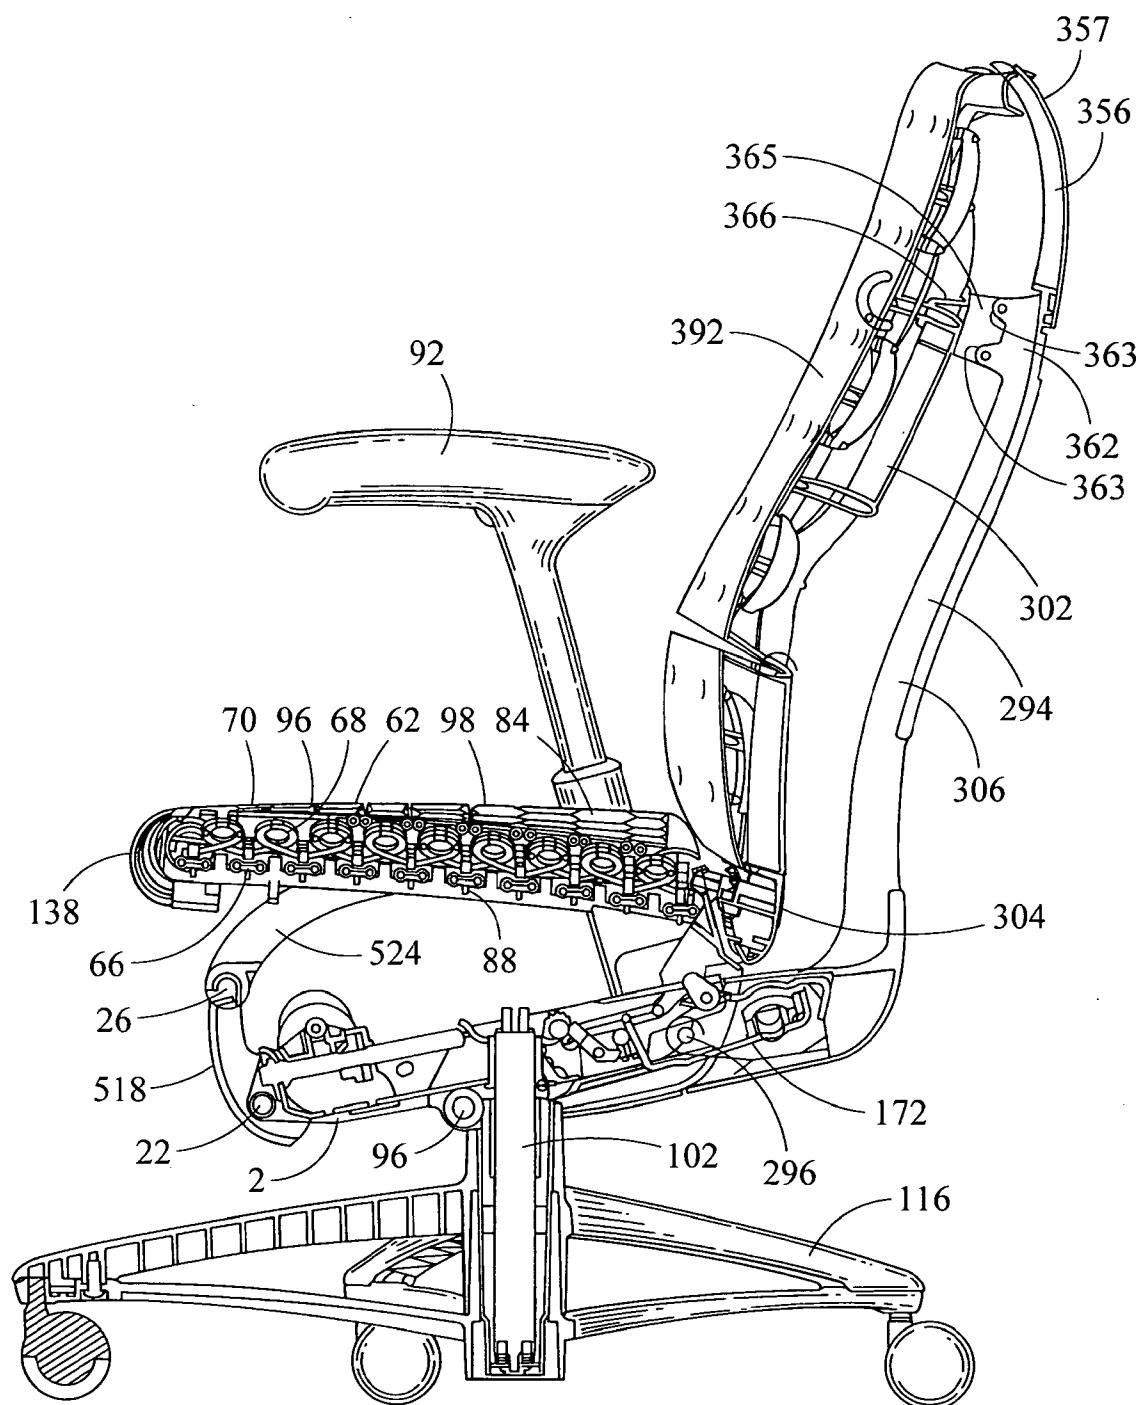


Fig. 48

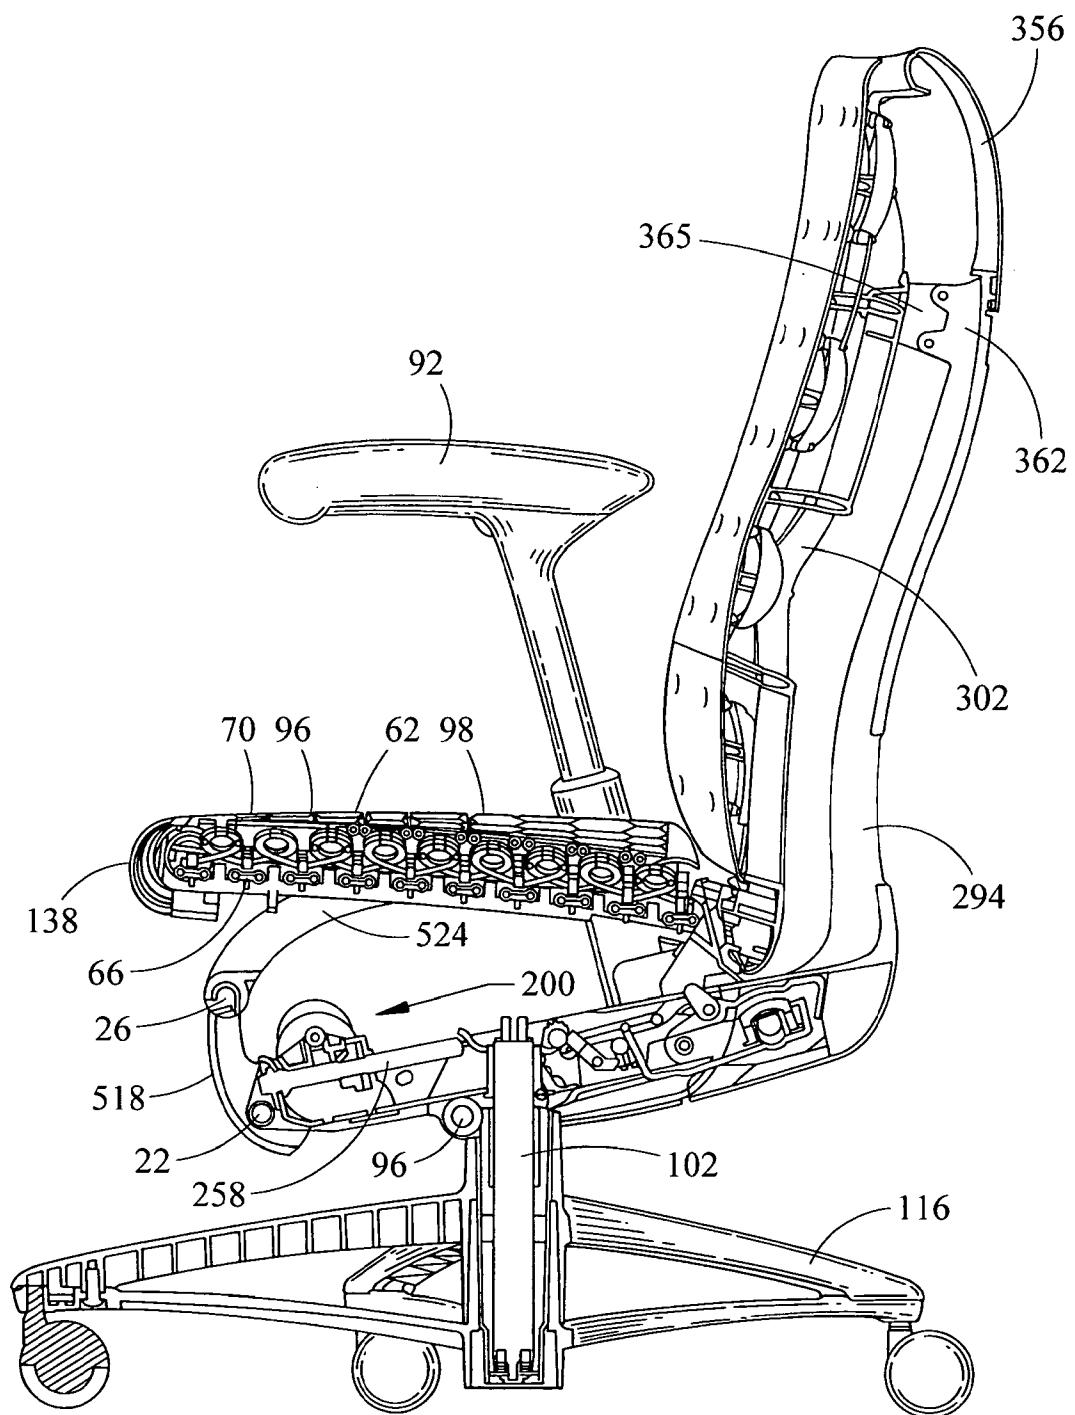


Fig. 49

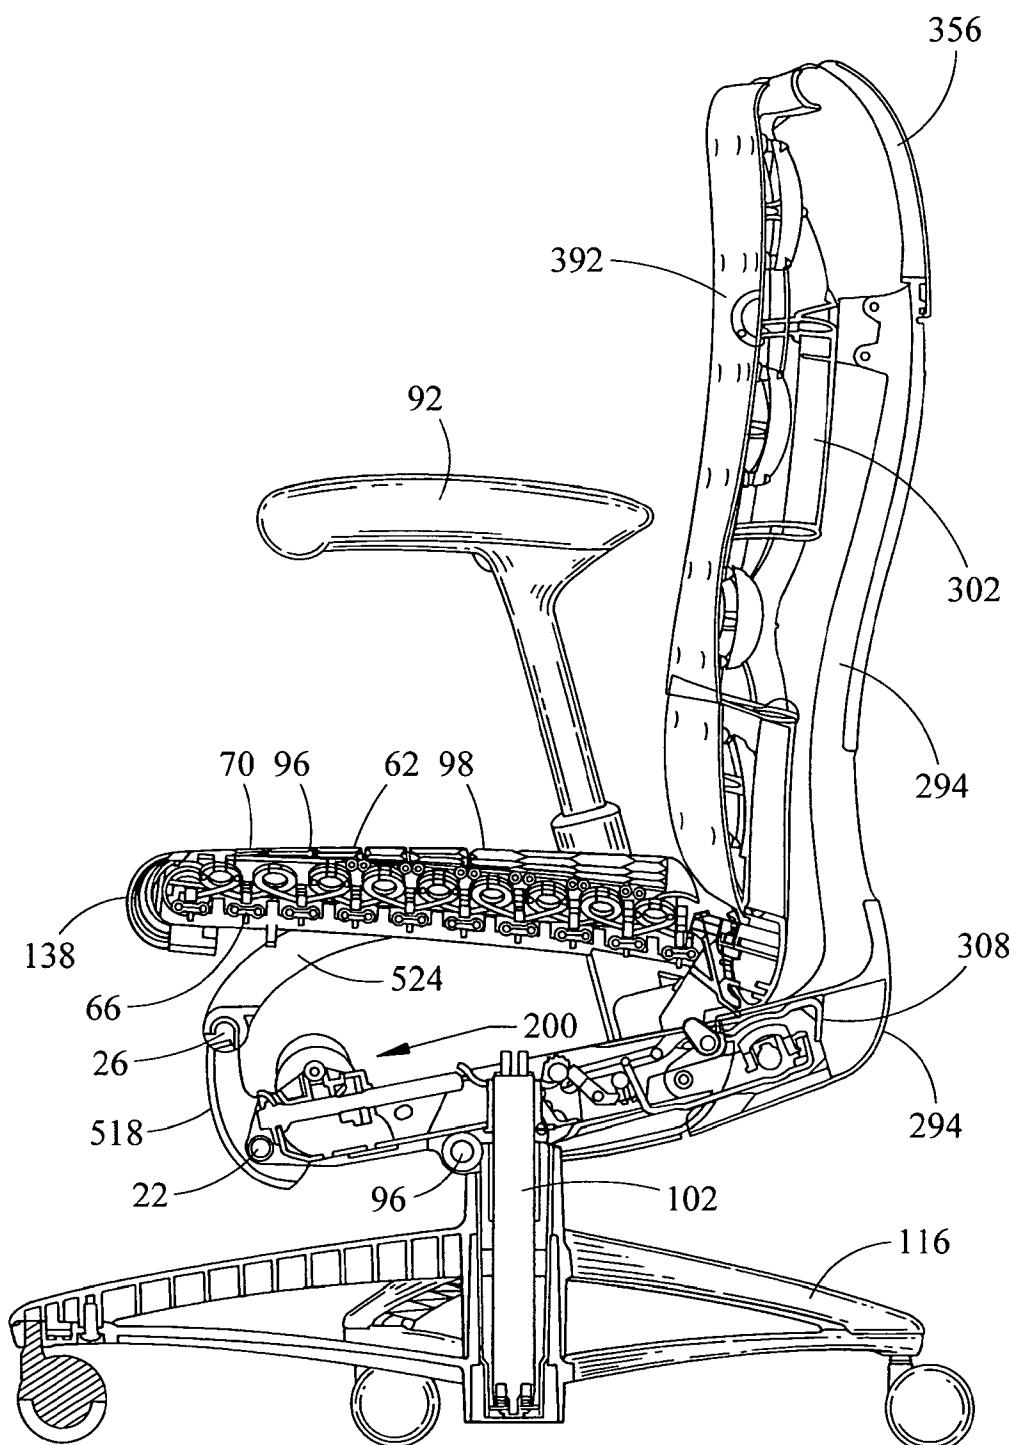


Fig. 50

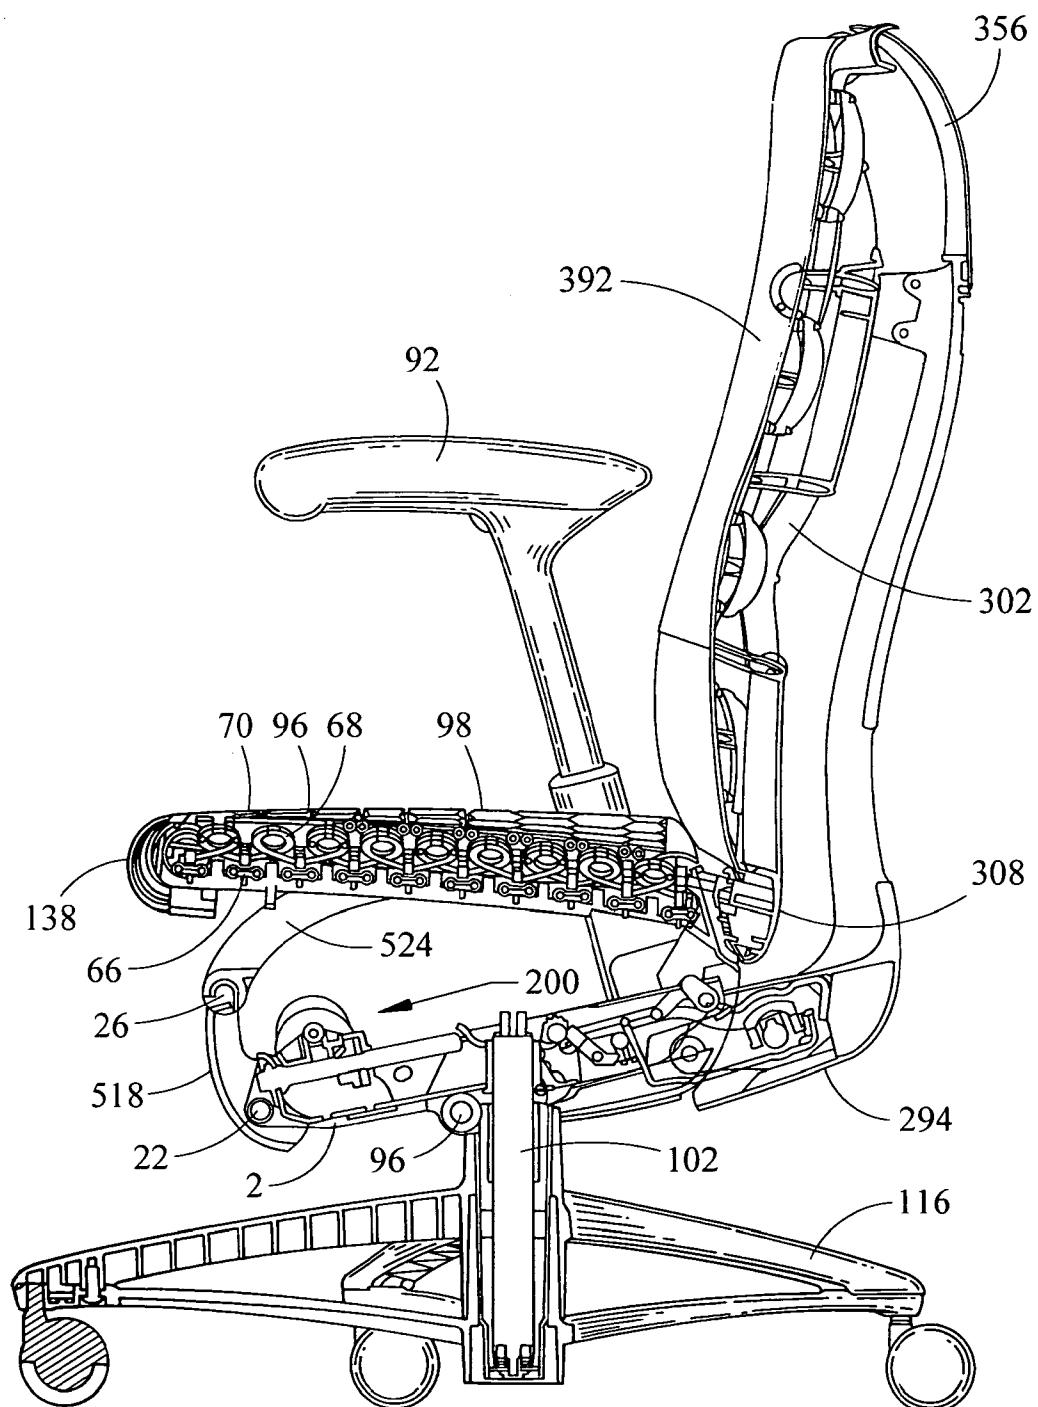


Fig. 51

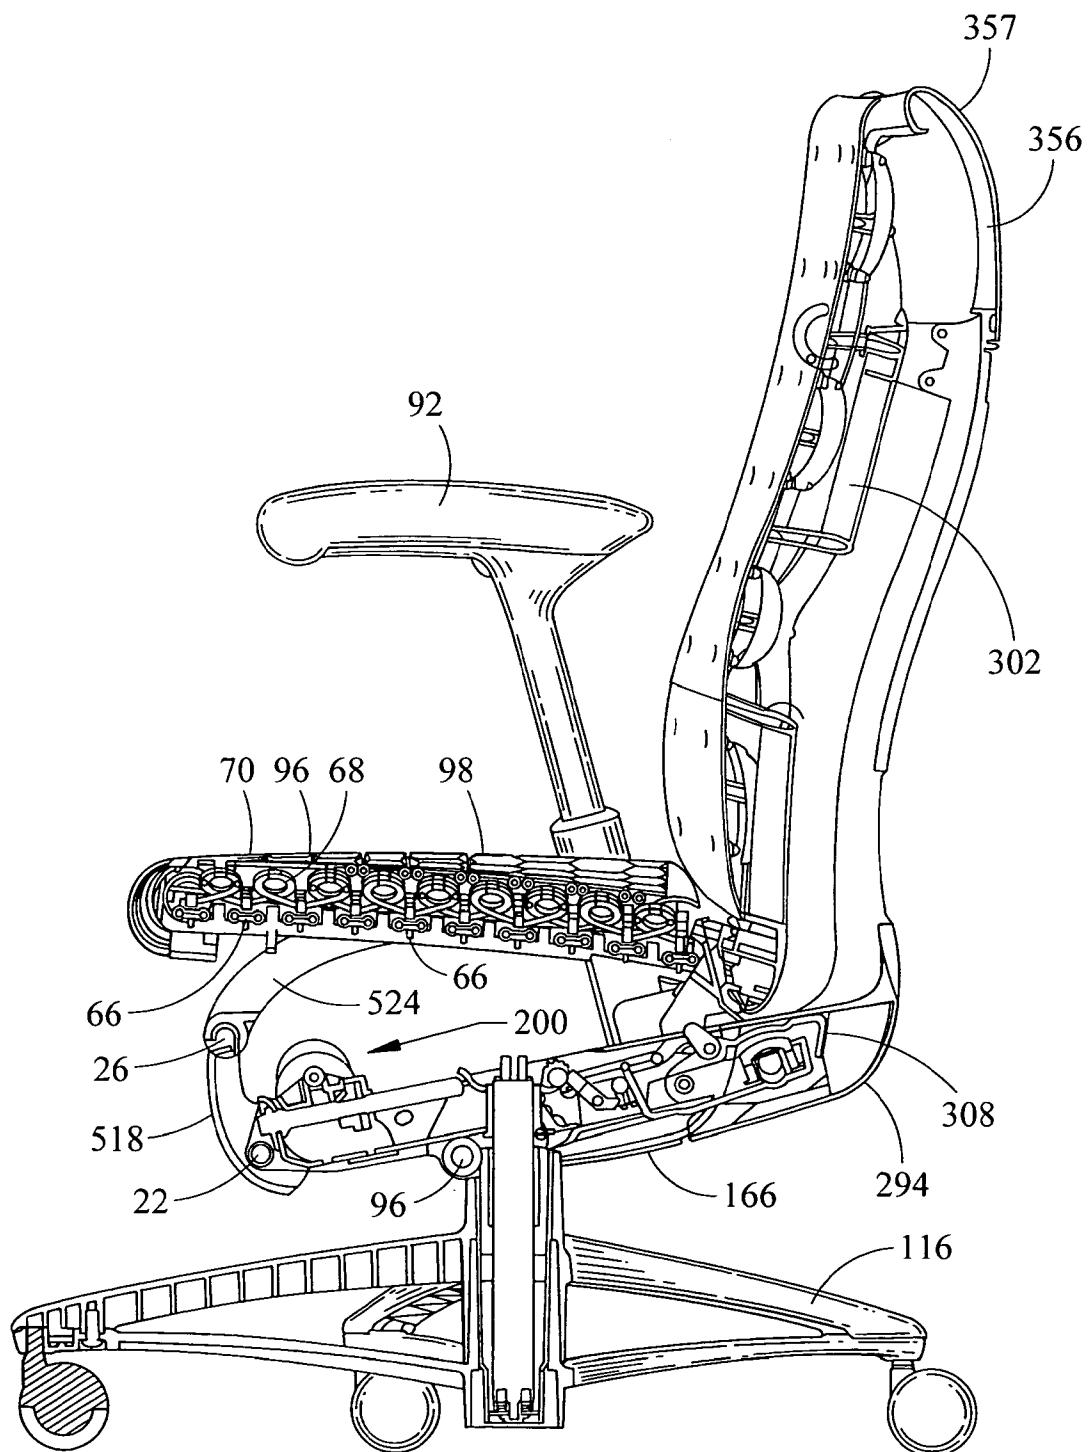


Fig. 52

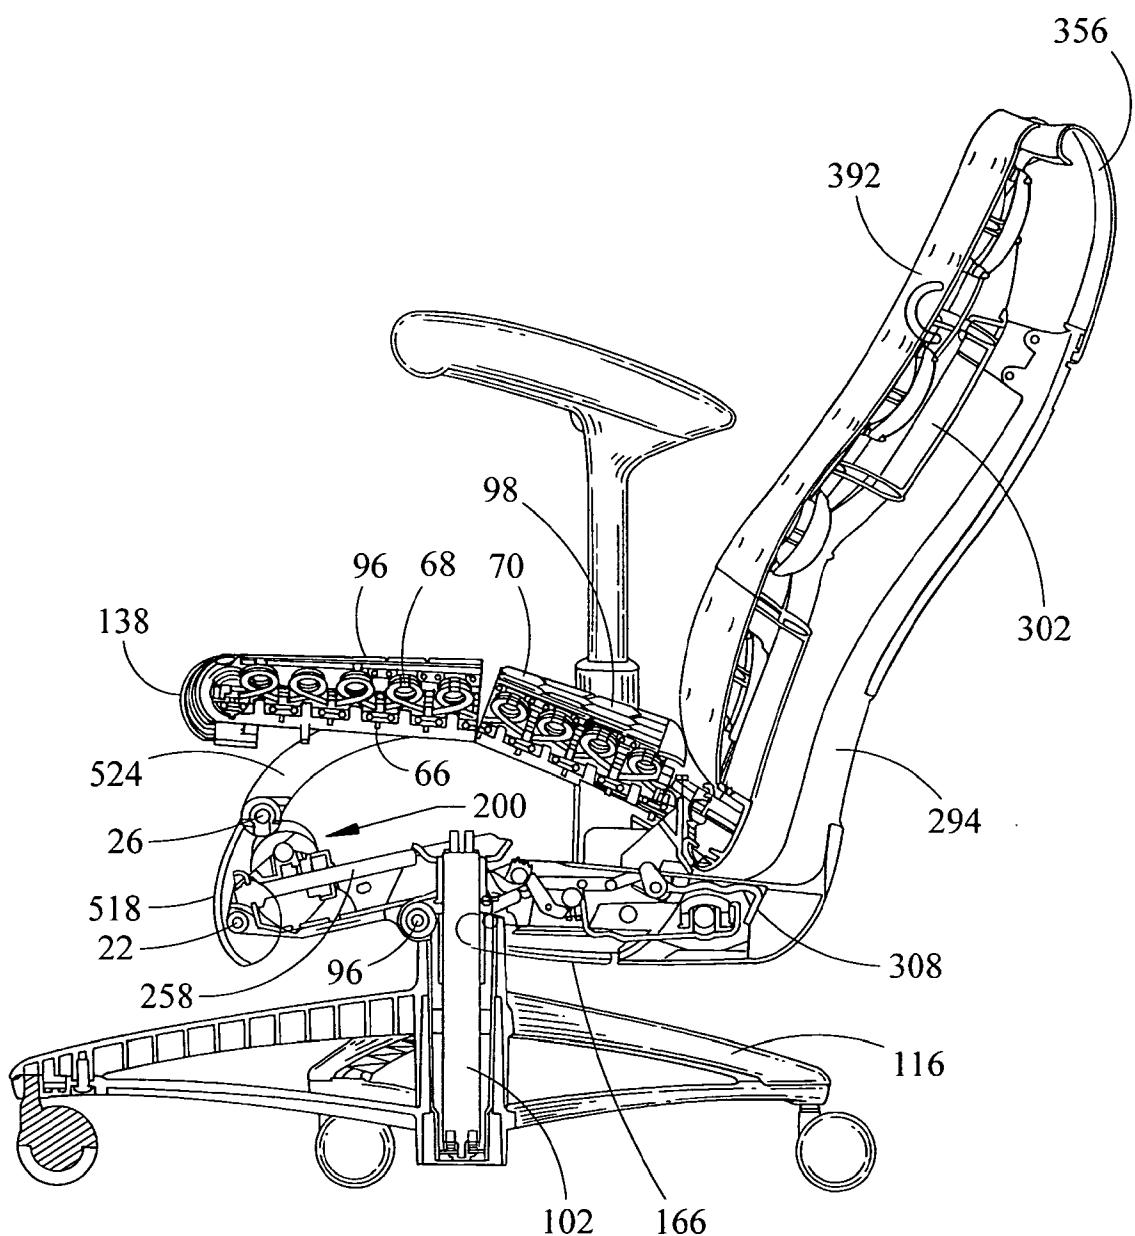


Fig. 53

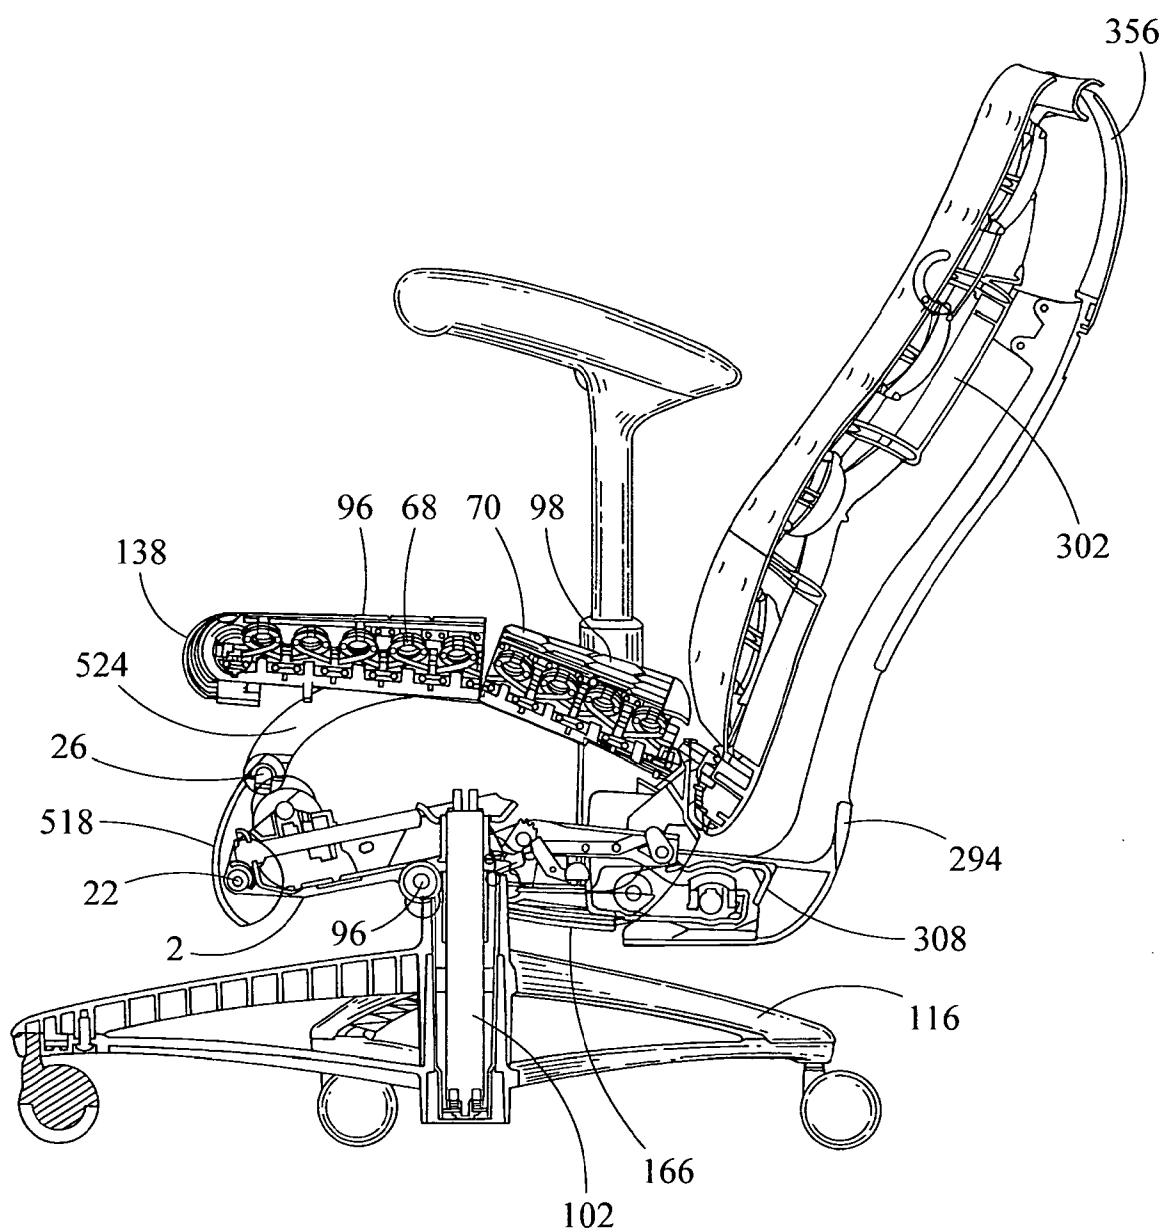


Fig. 54

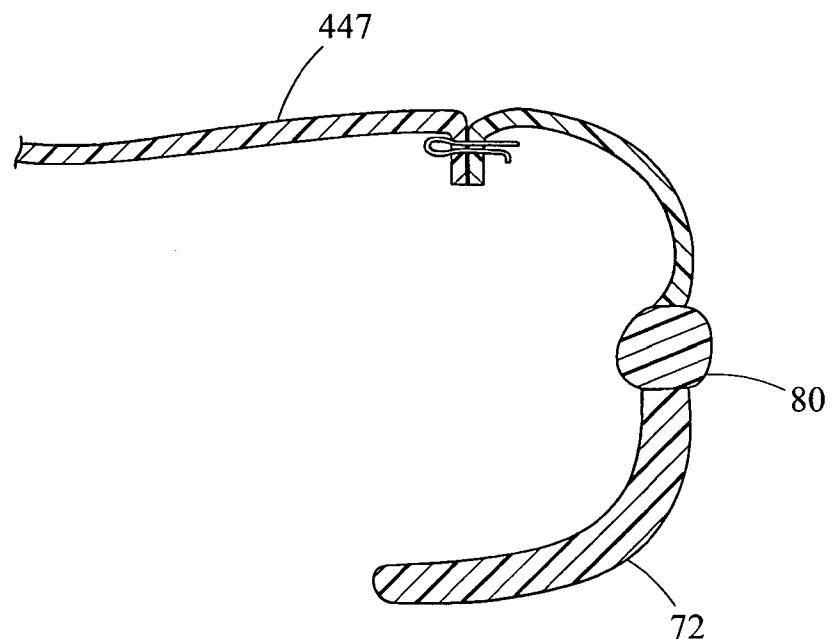


Fig. 55A

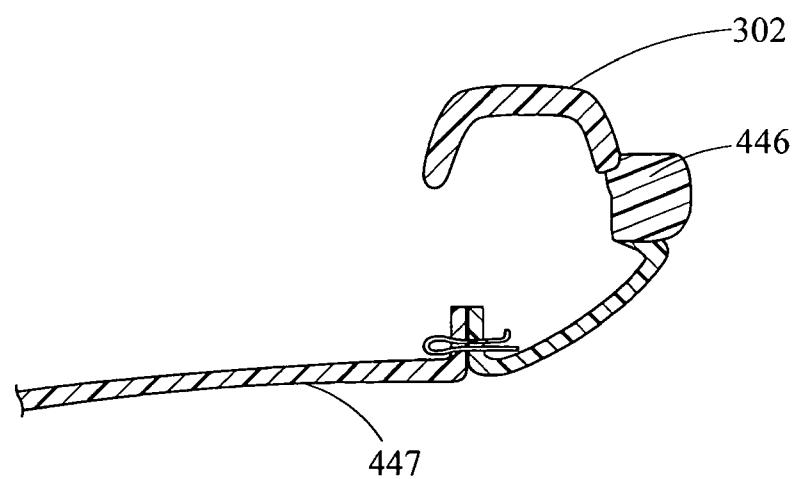
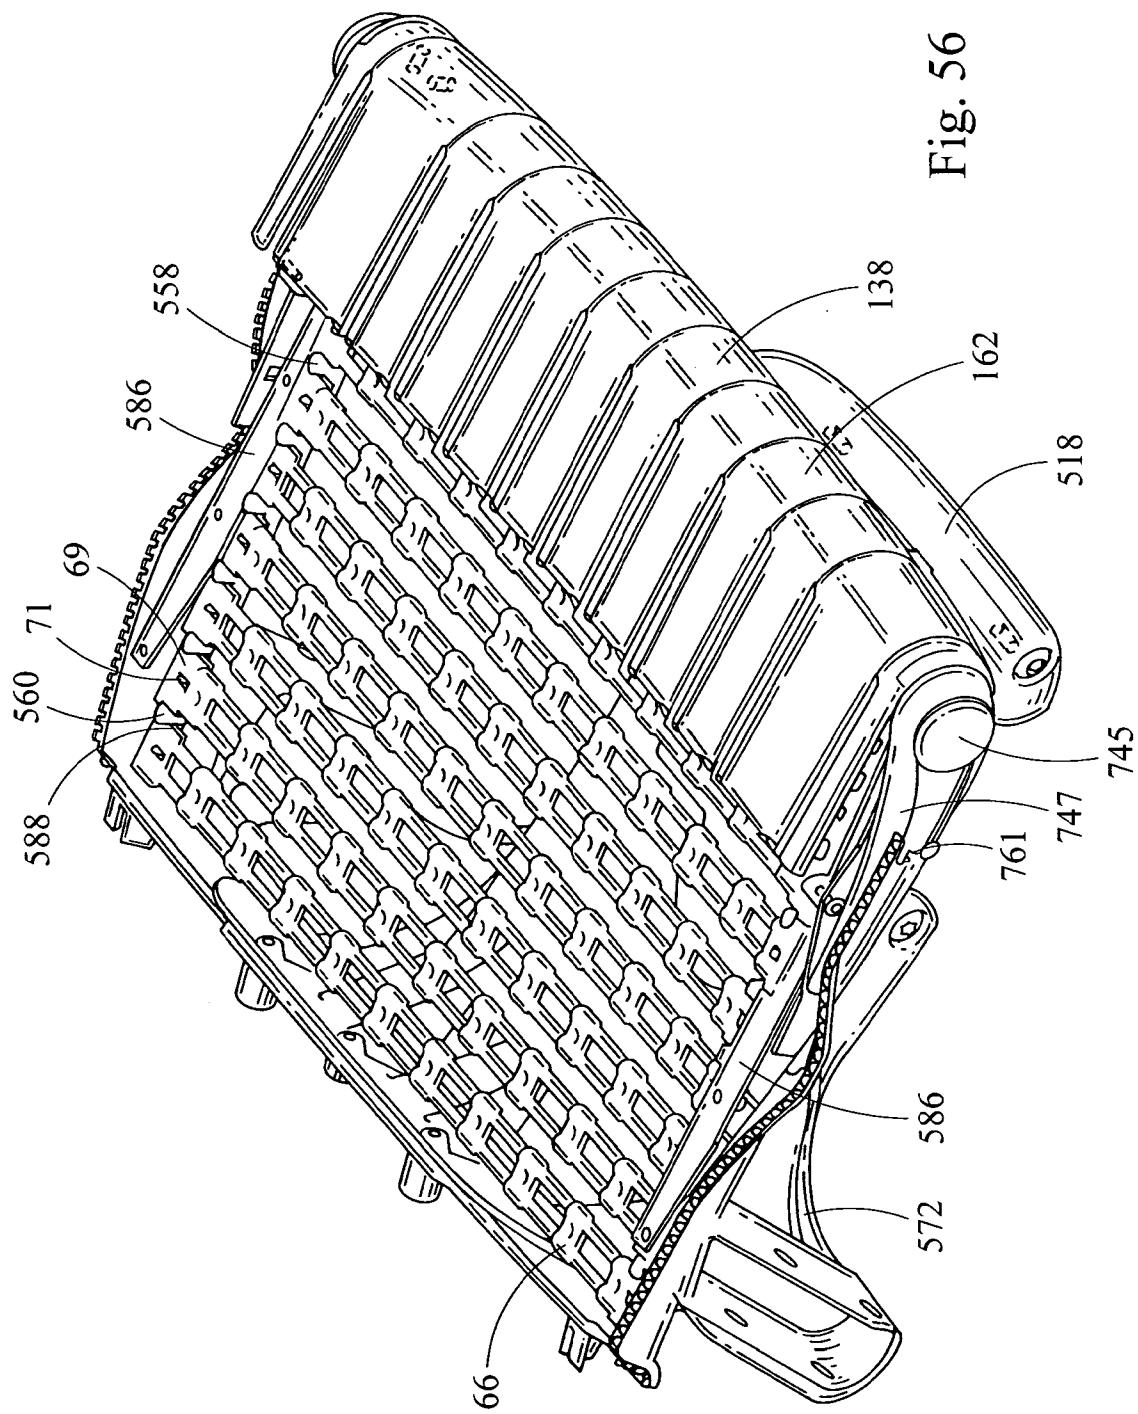


Fig. 55B

Fig. 56



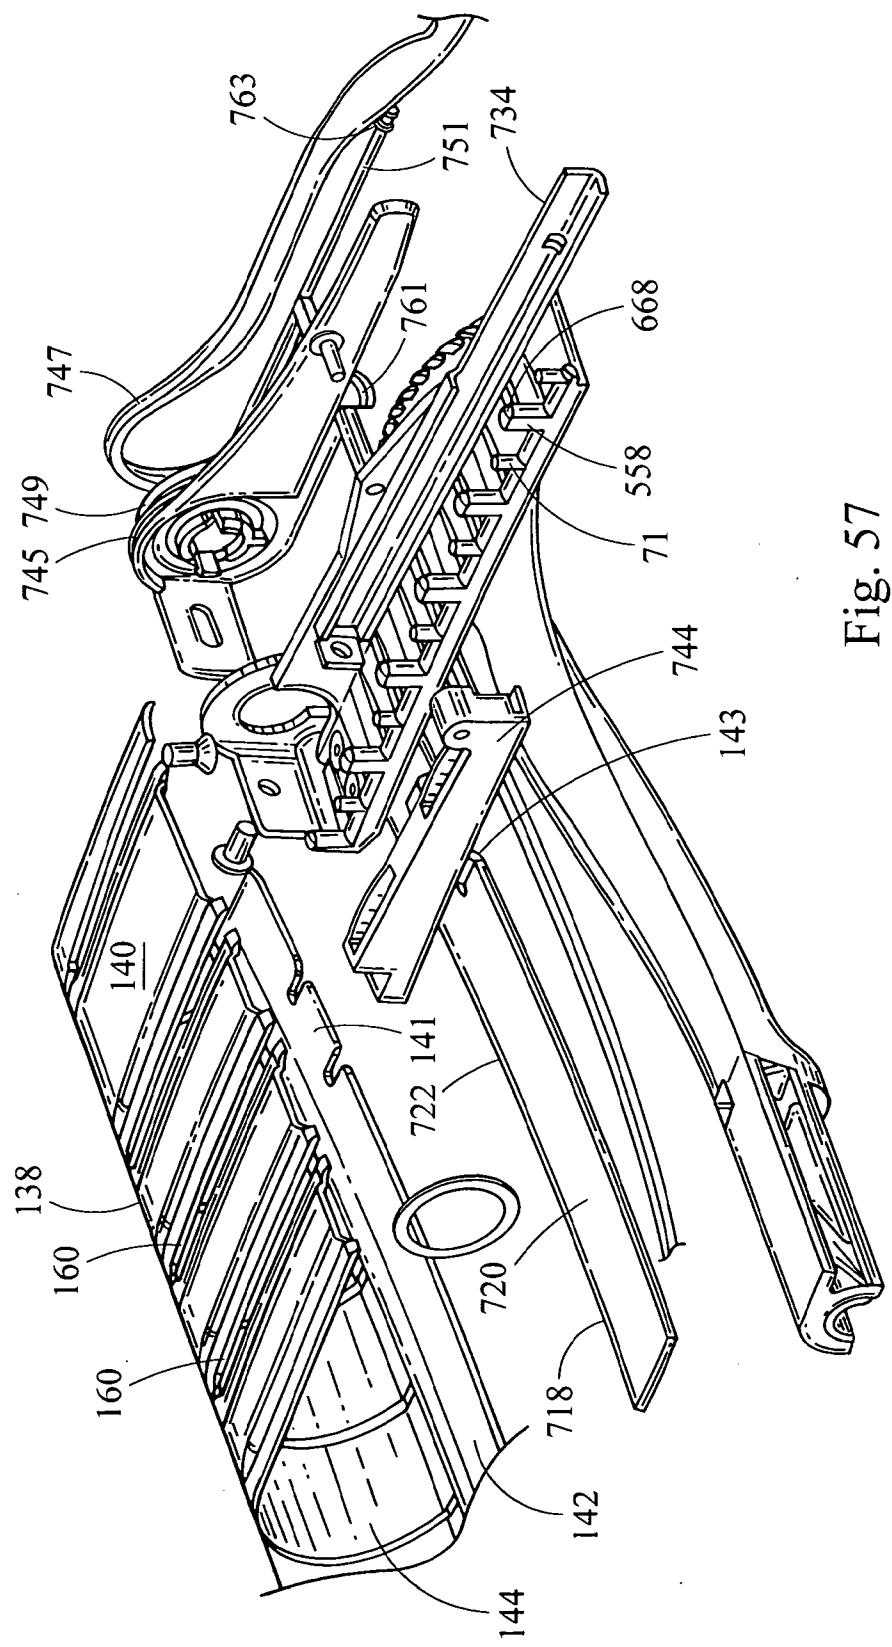


Fig. 57

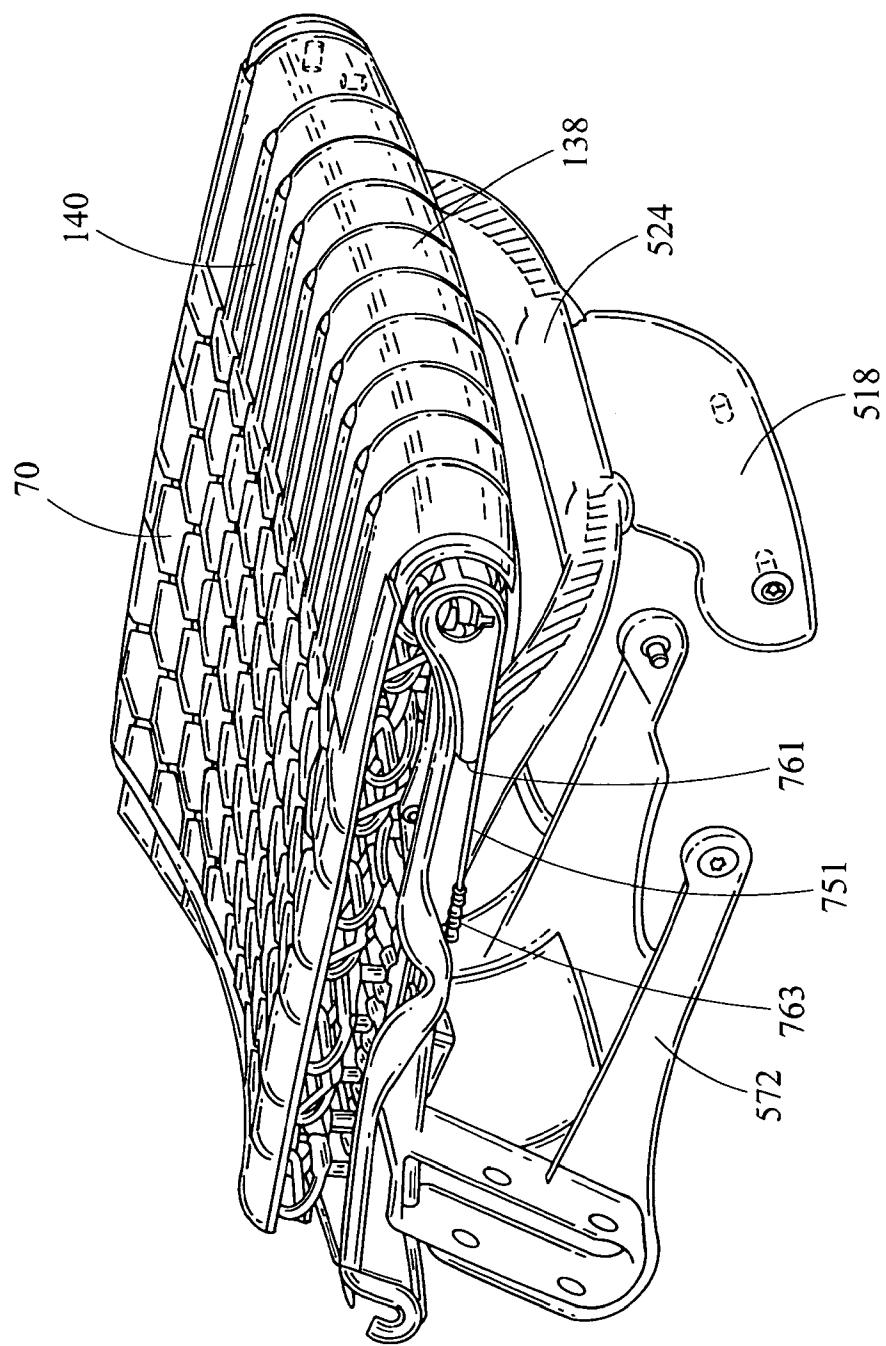


Fig. 58

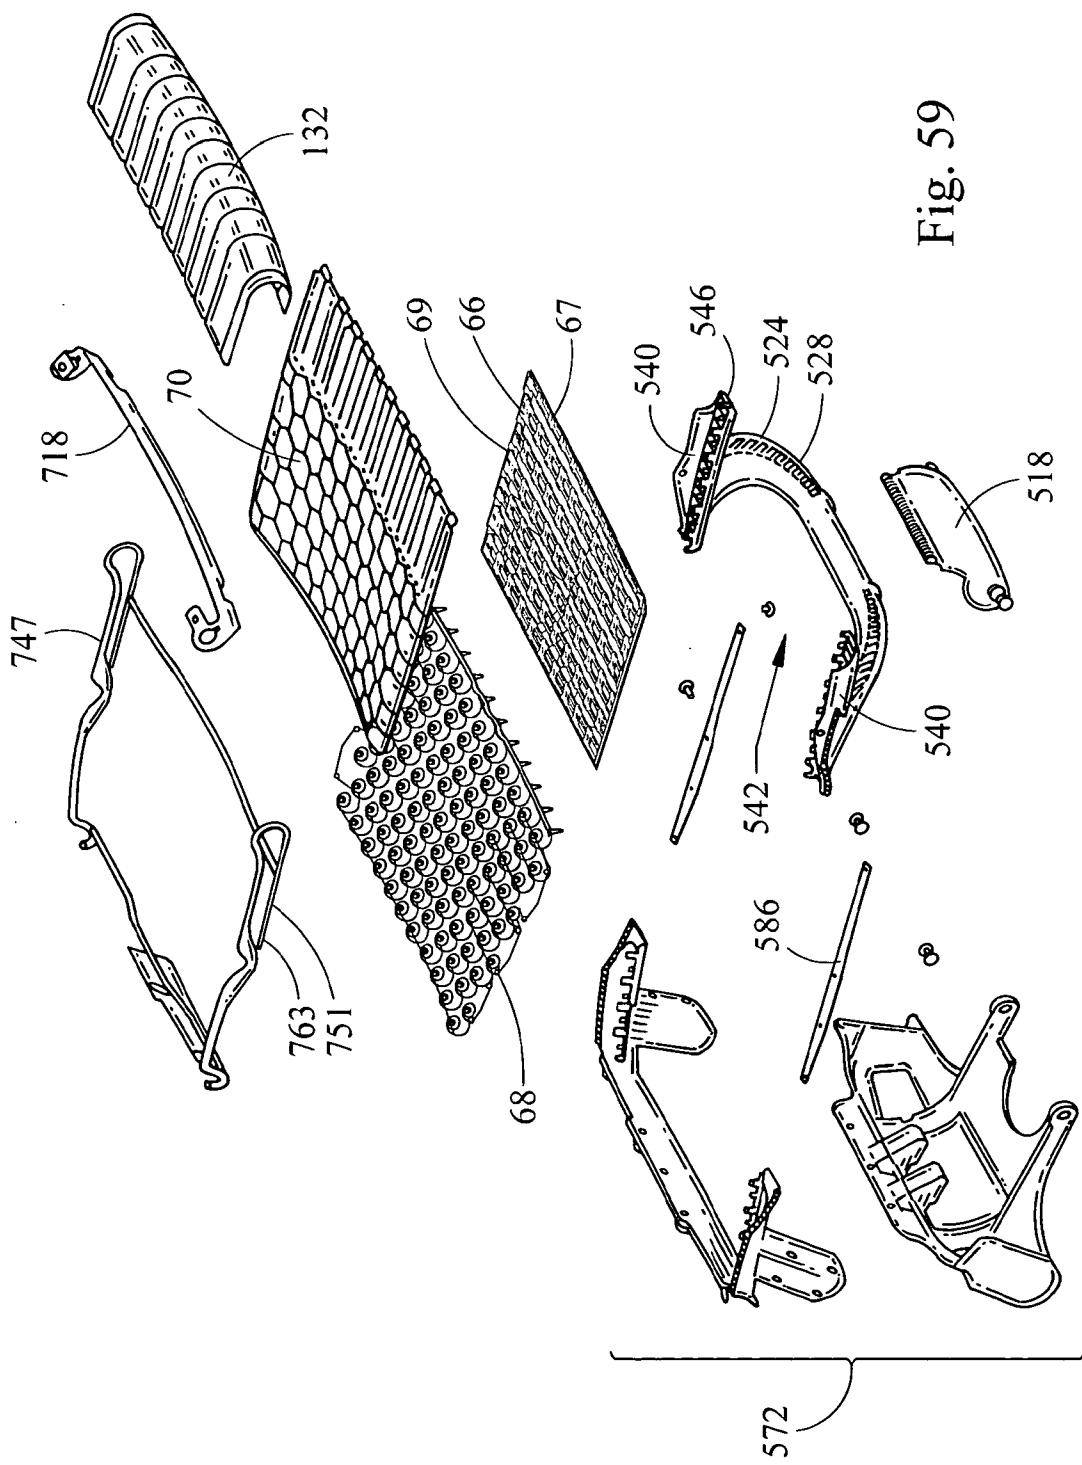


Fig. 59

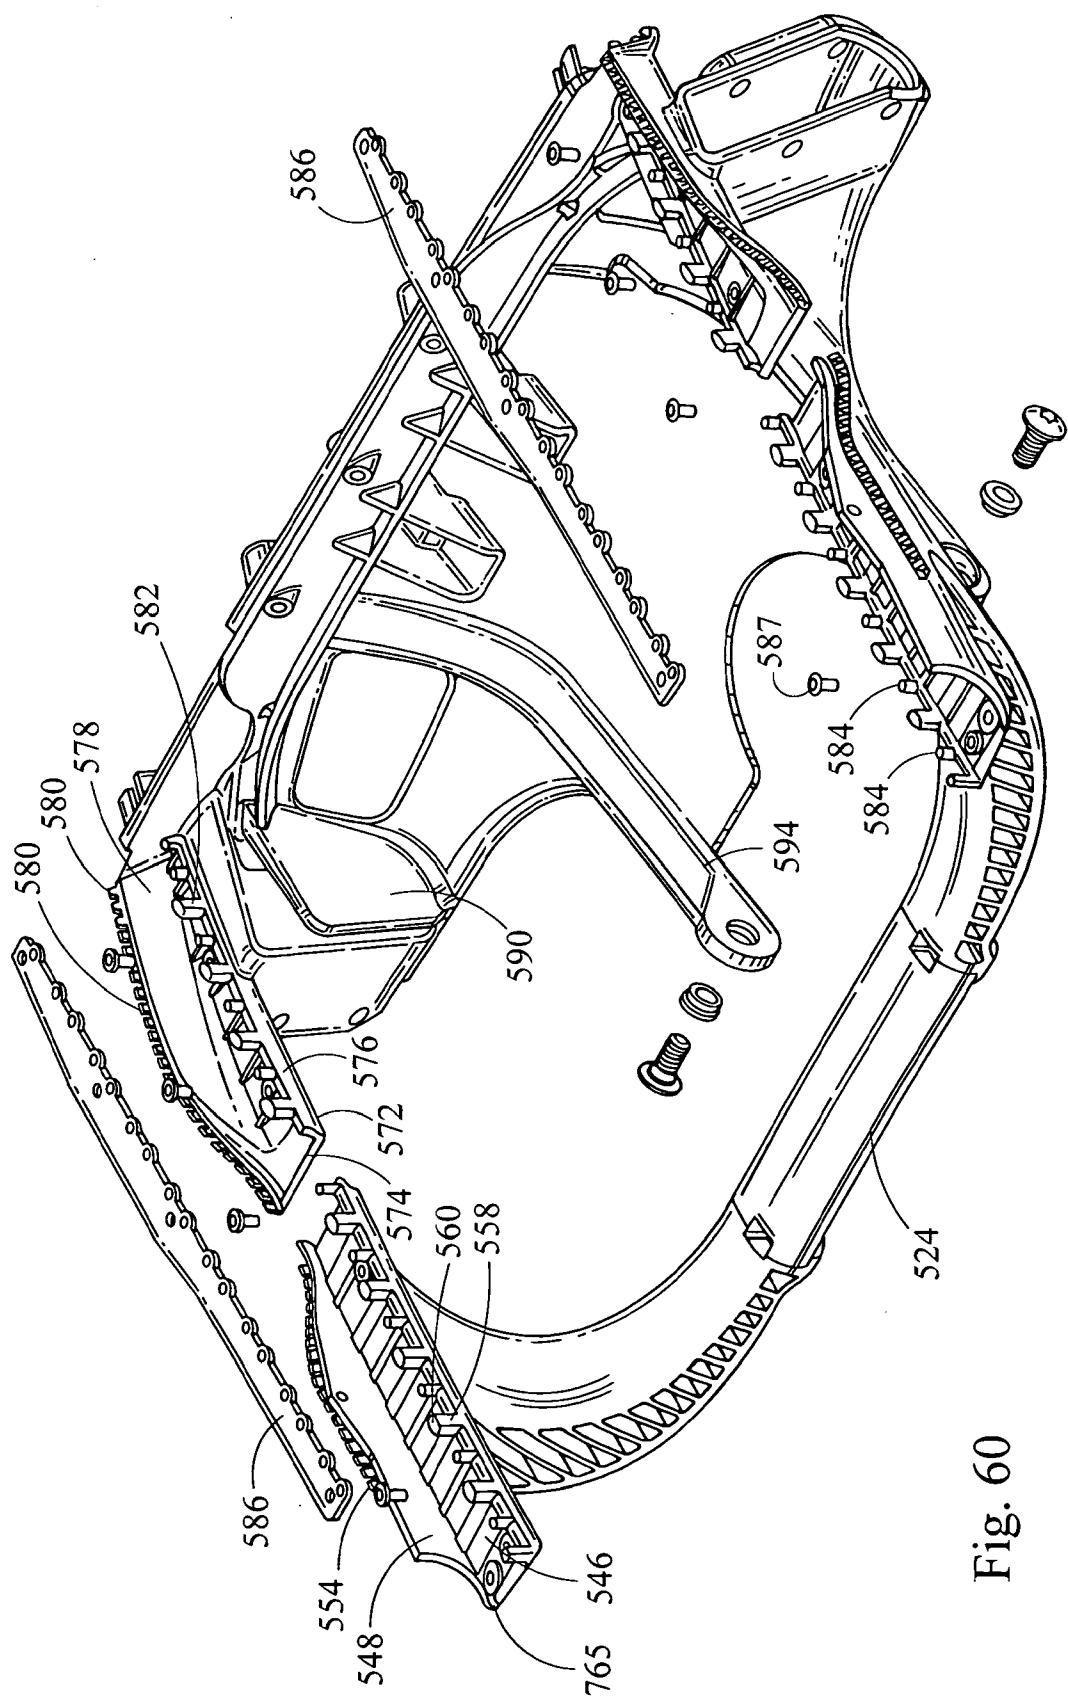


Fig. 60

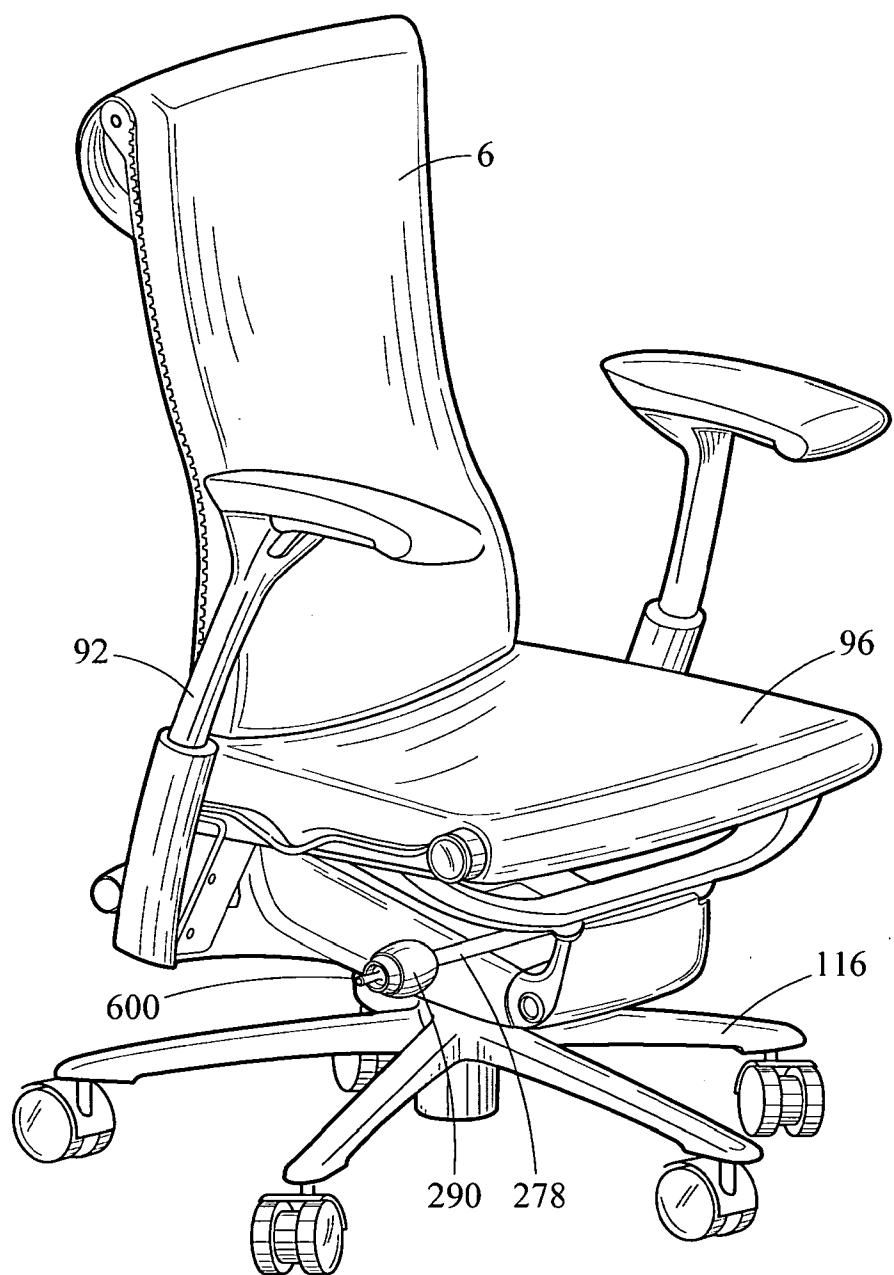


Fig. 61

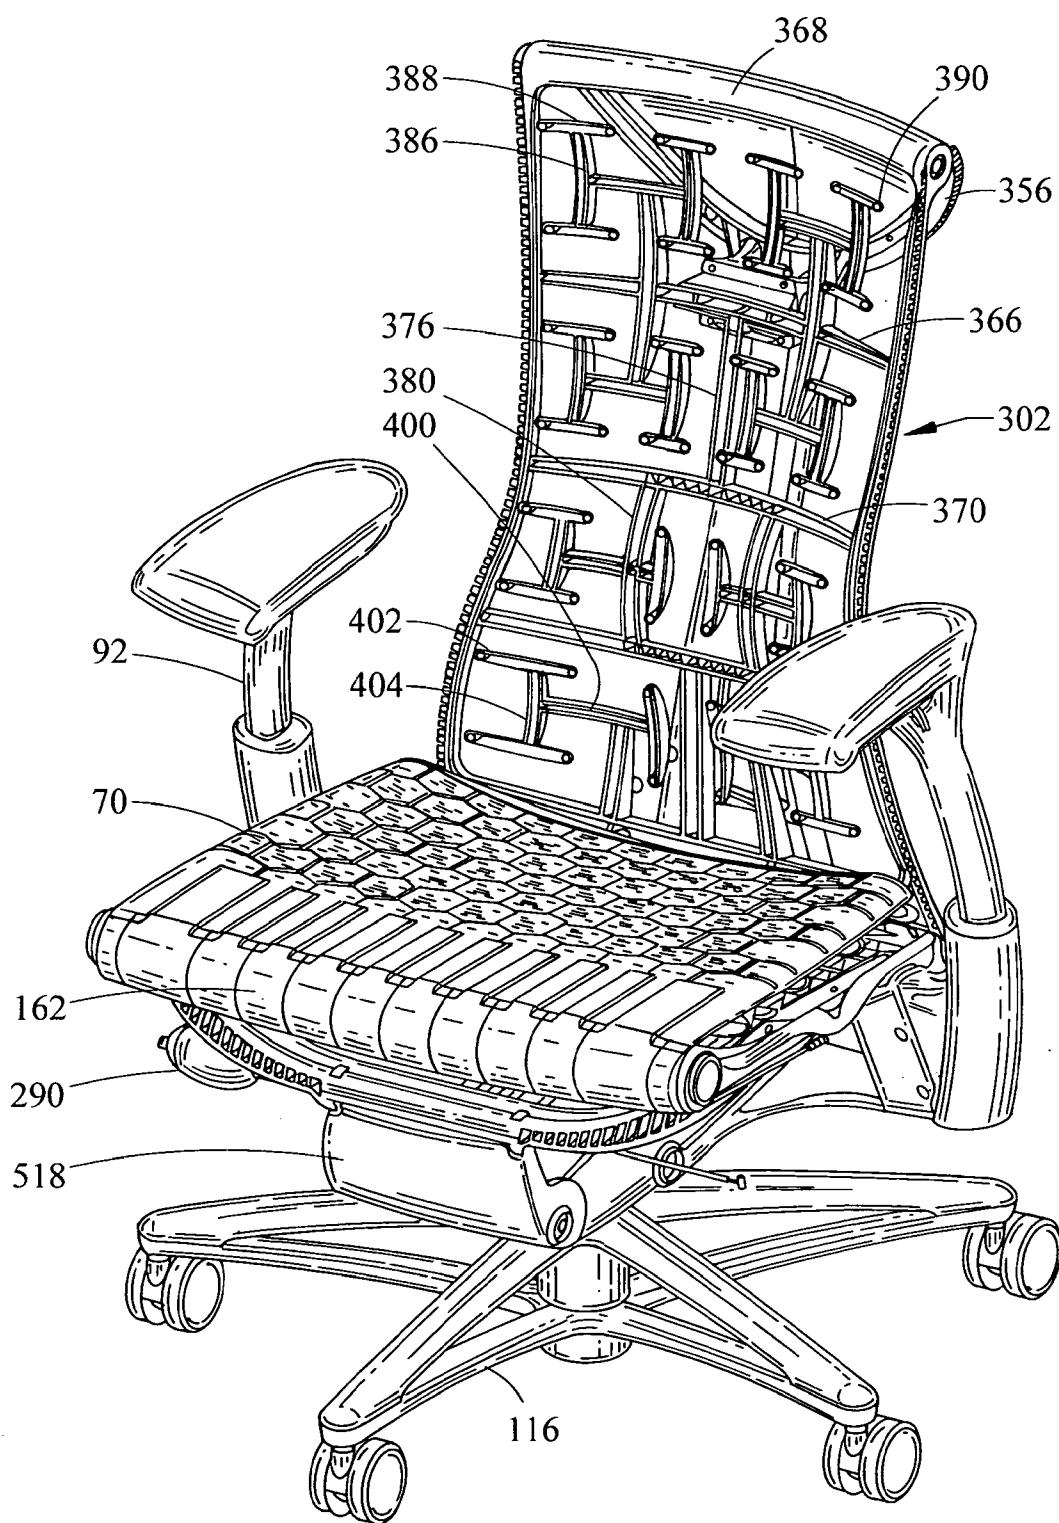


Fig. 62

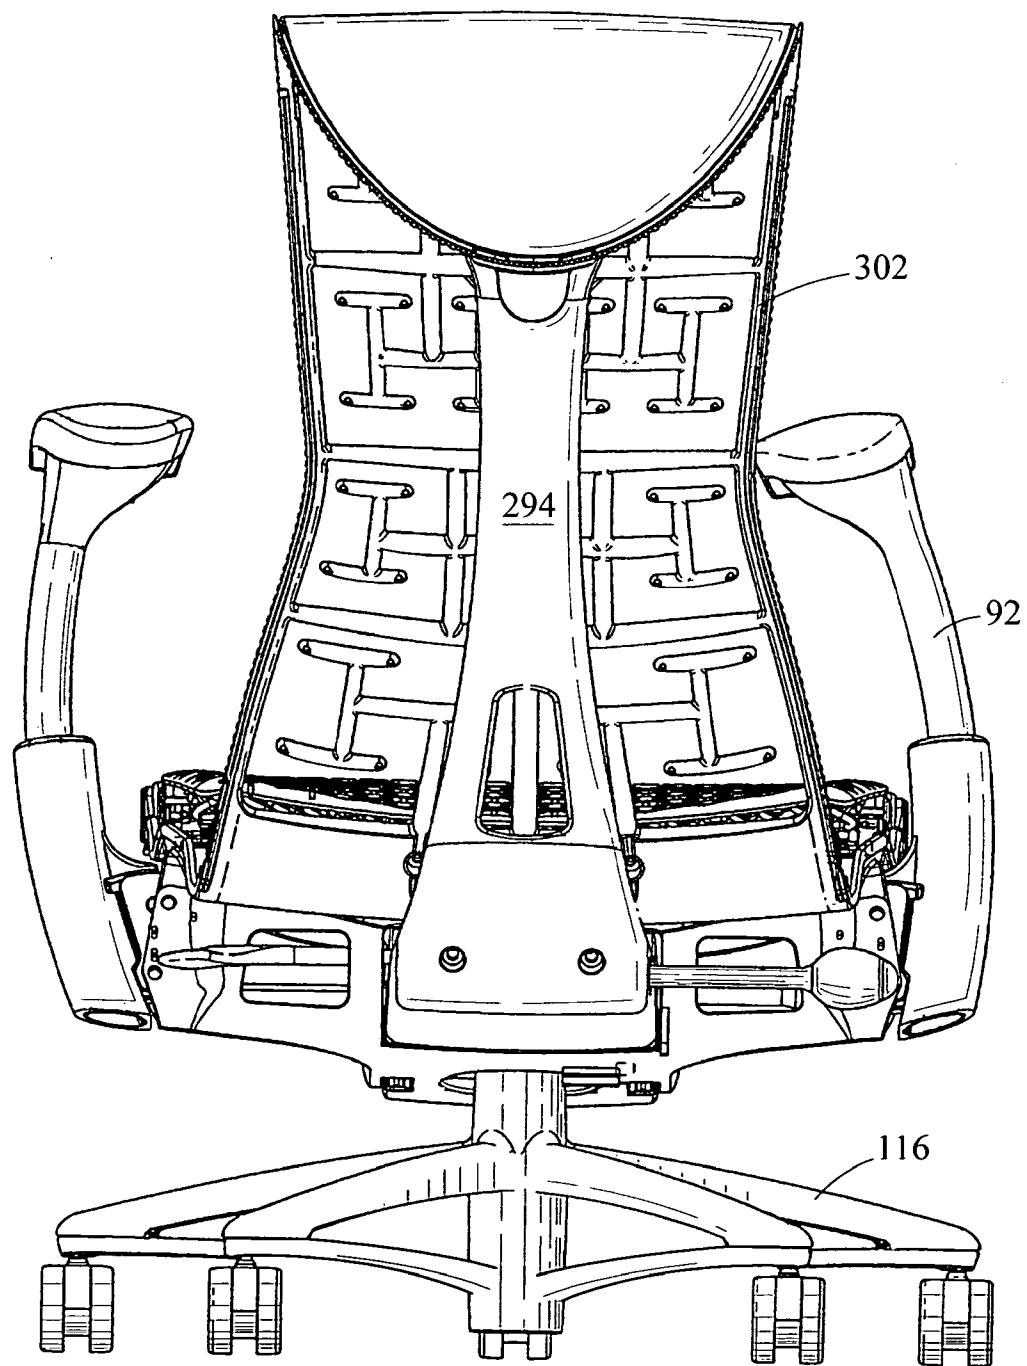


Fig. 63

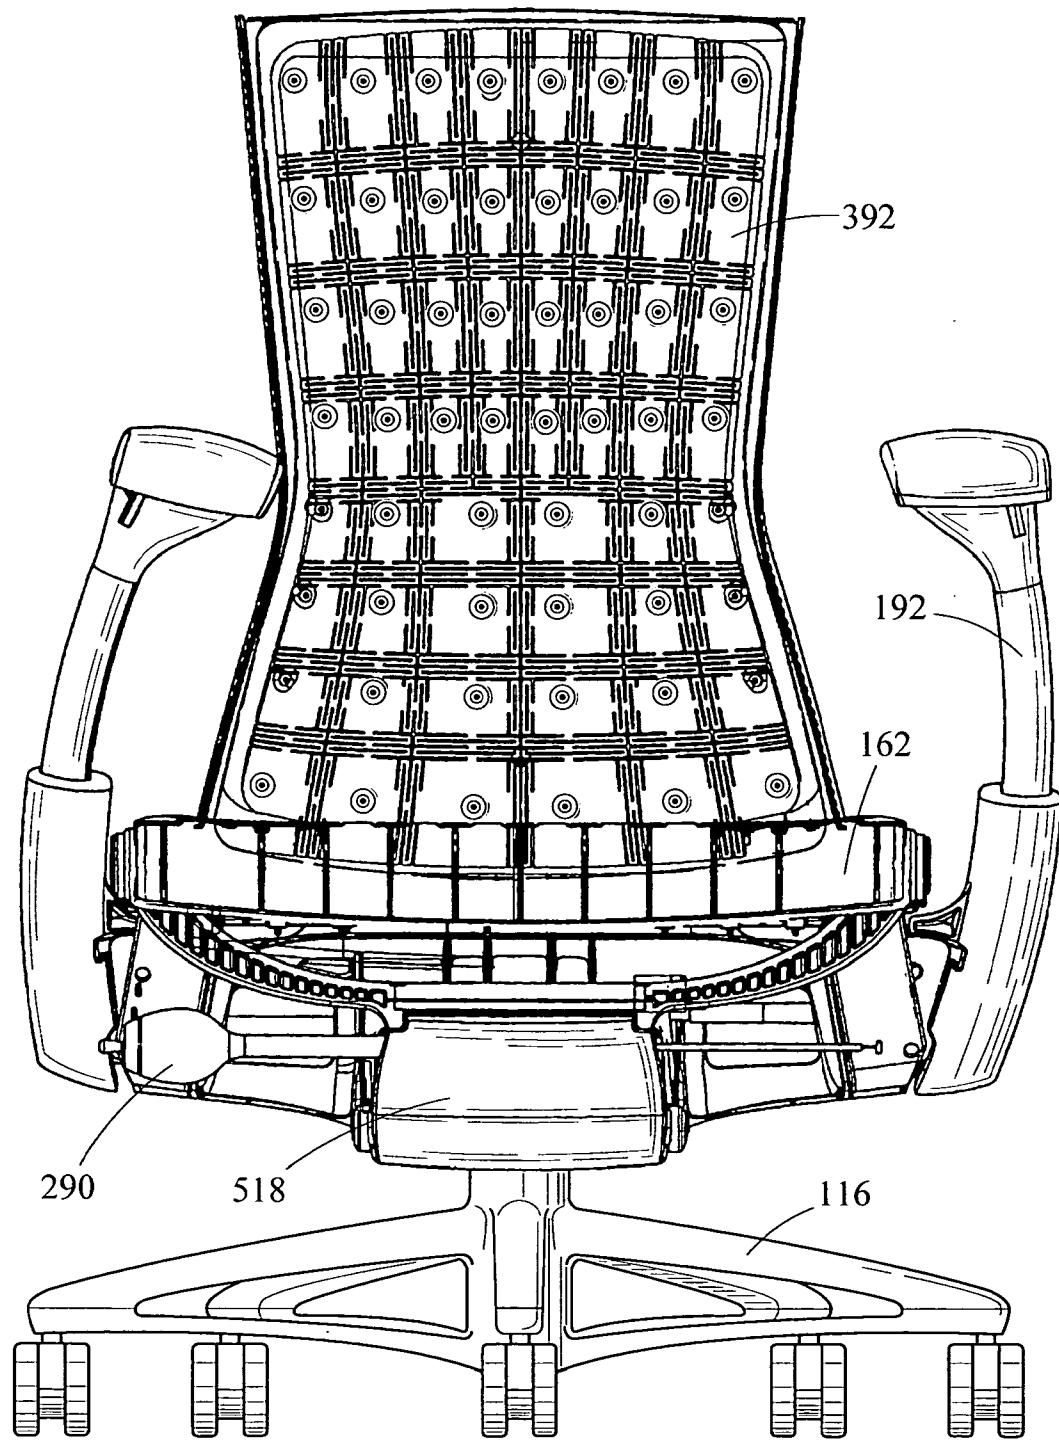


Fig. 64

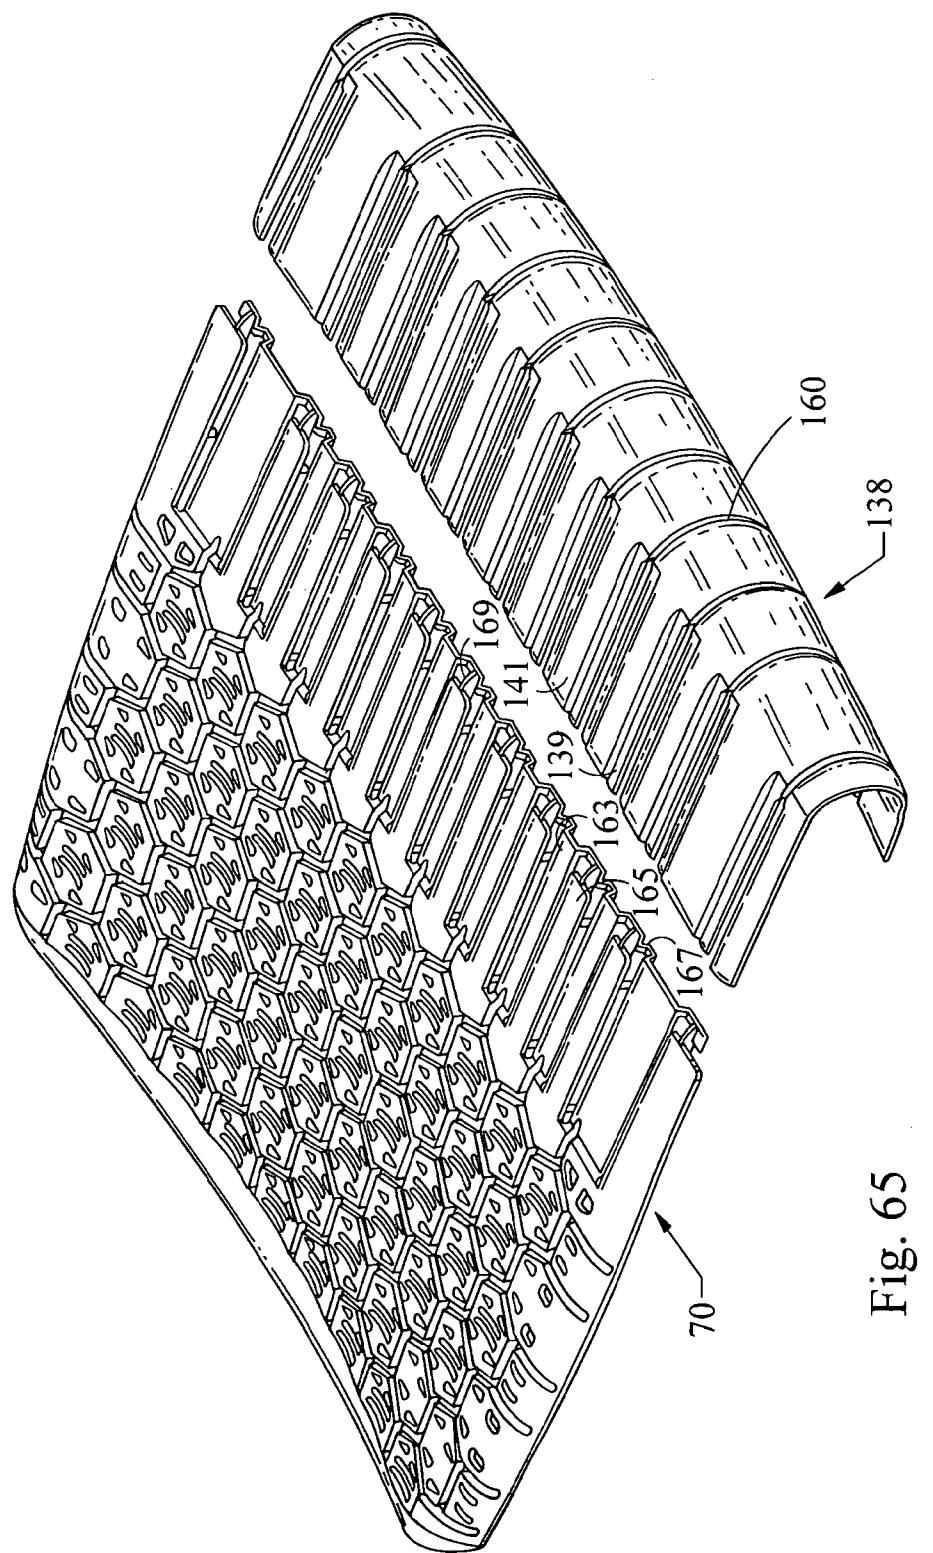


Fig. 65

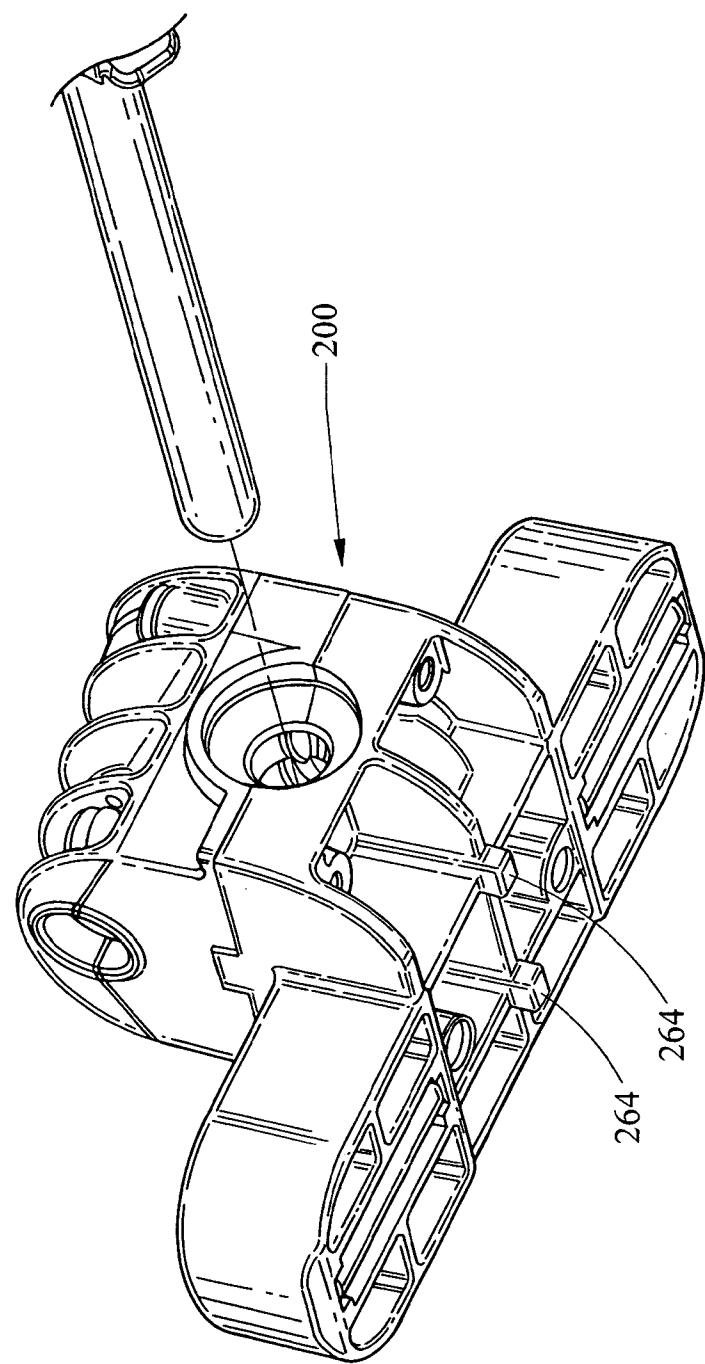
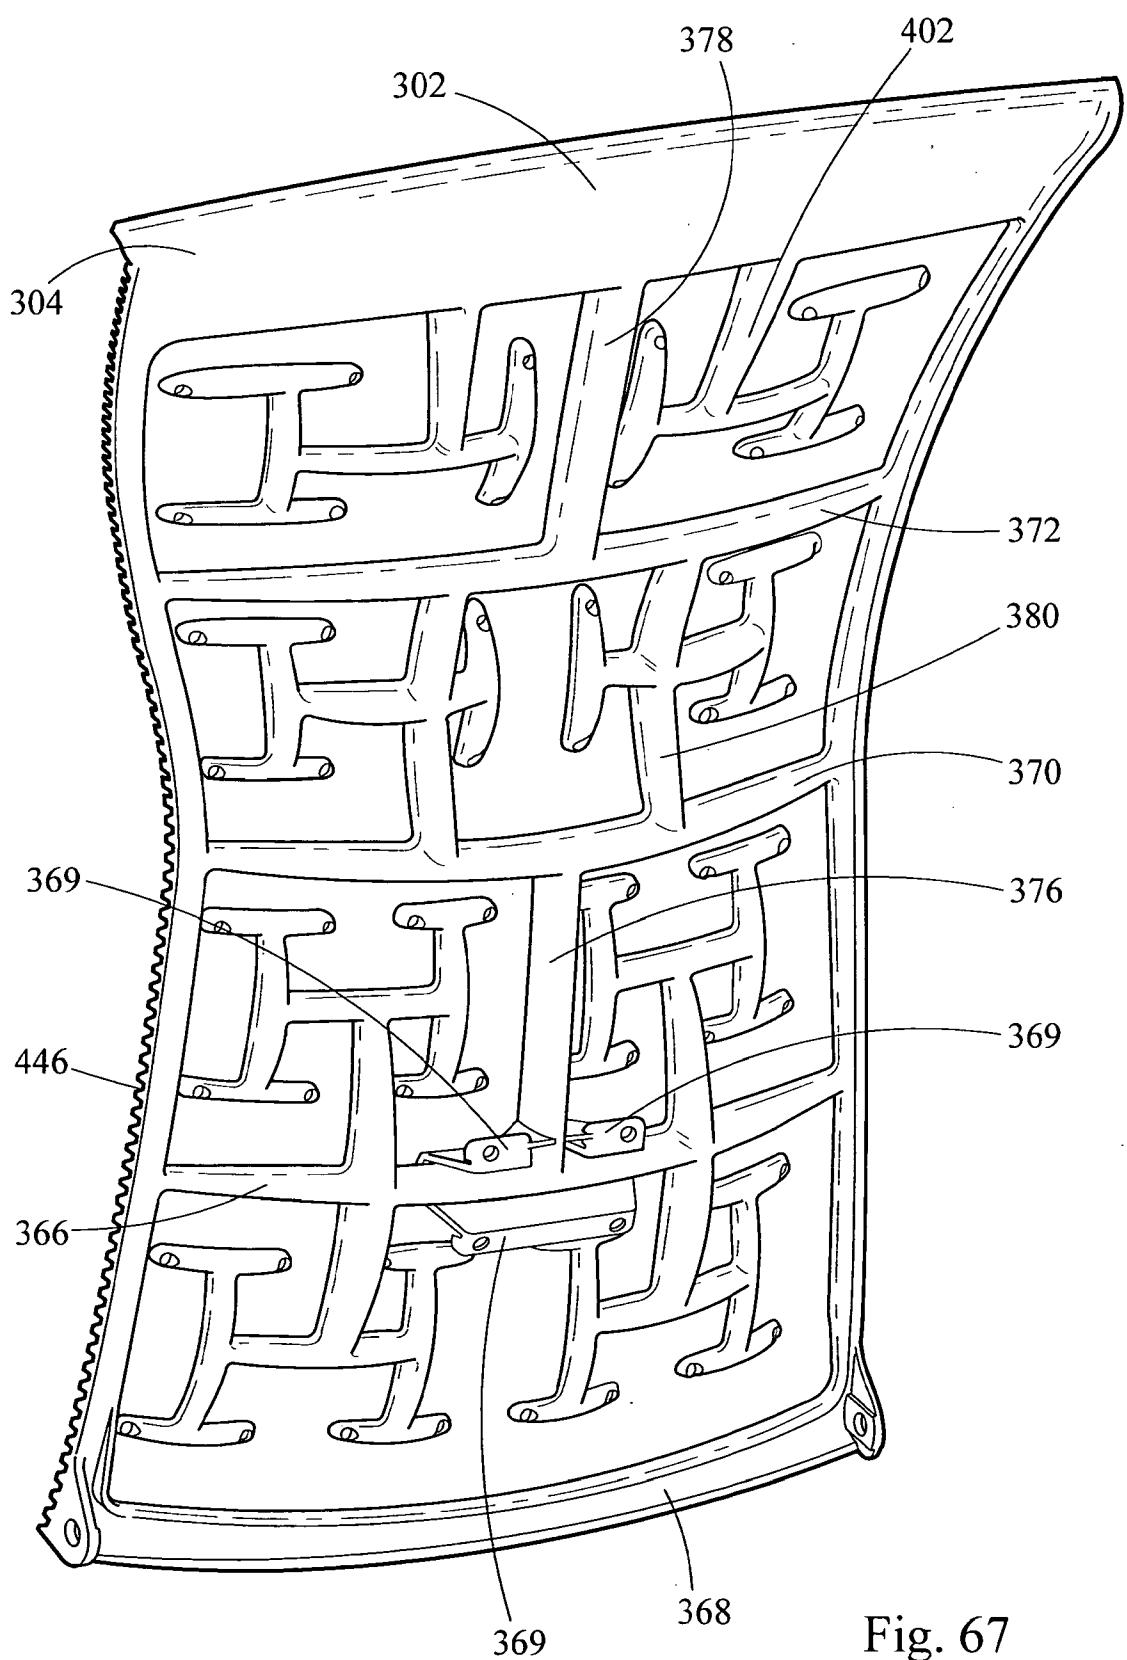


Fig. 66



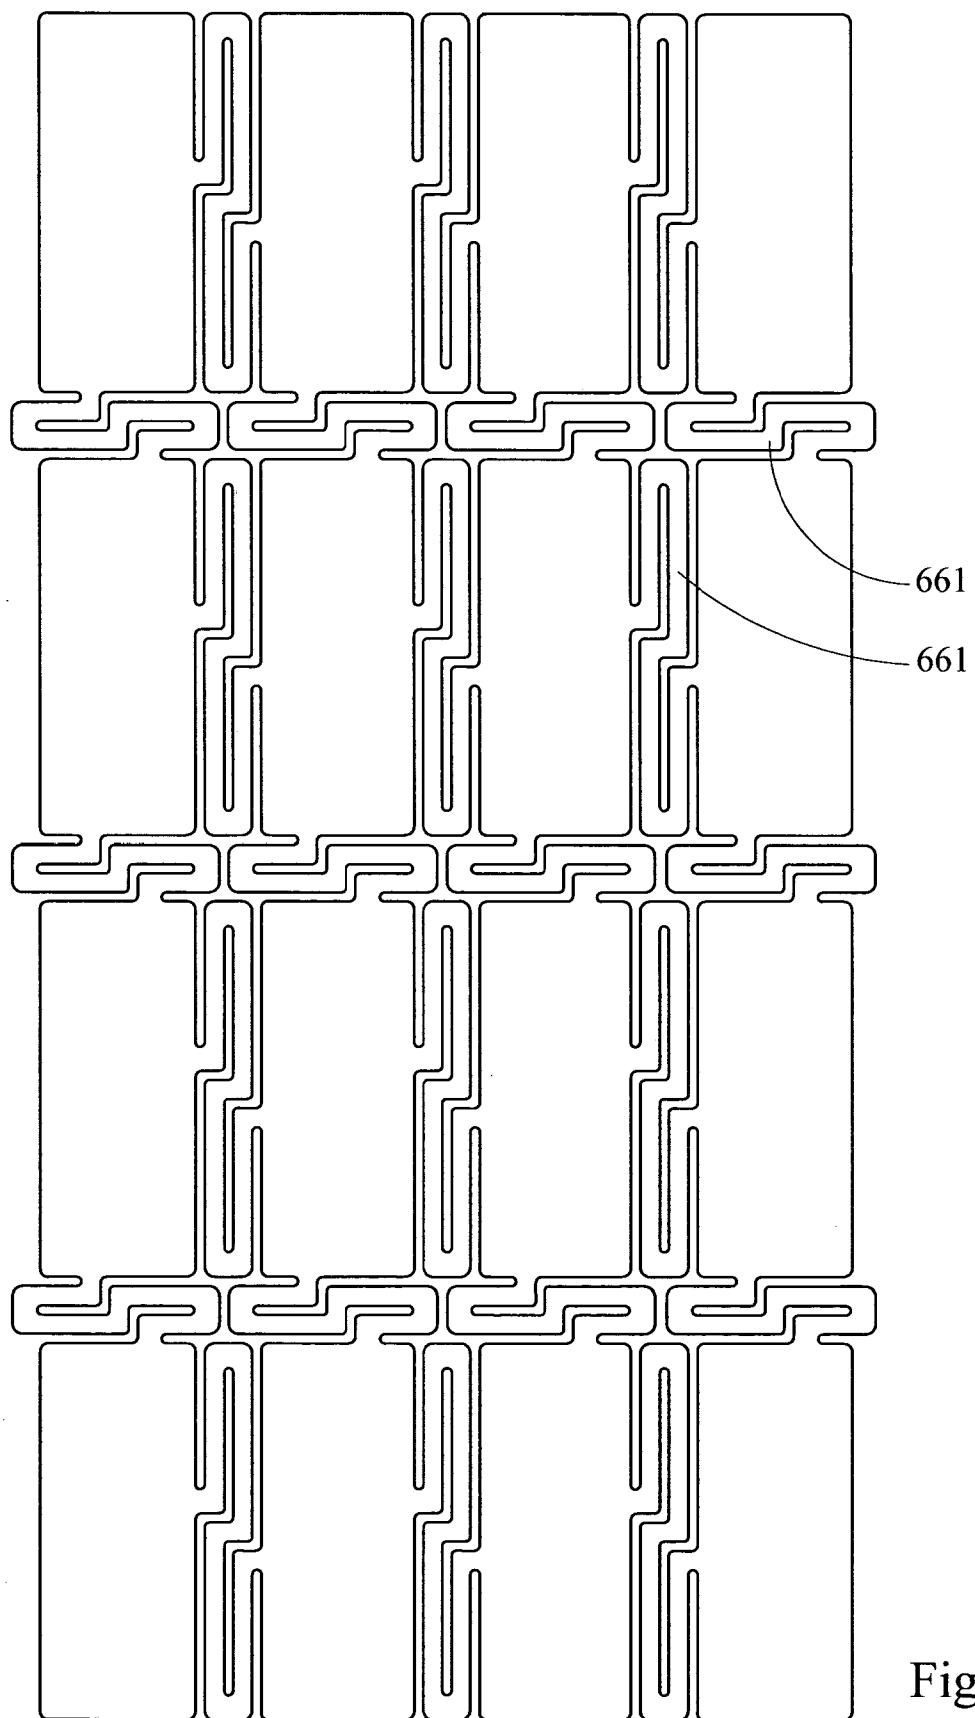


Fig. 68

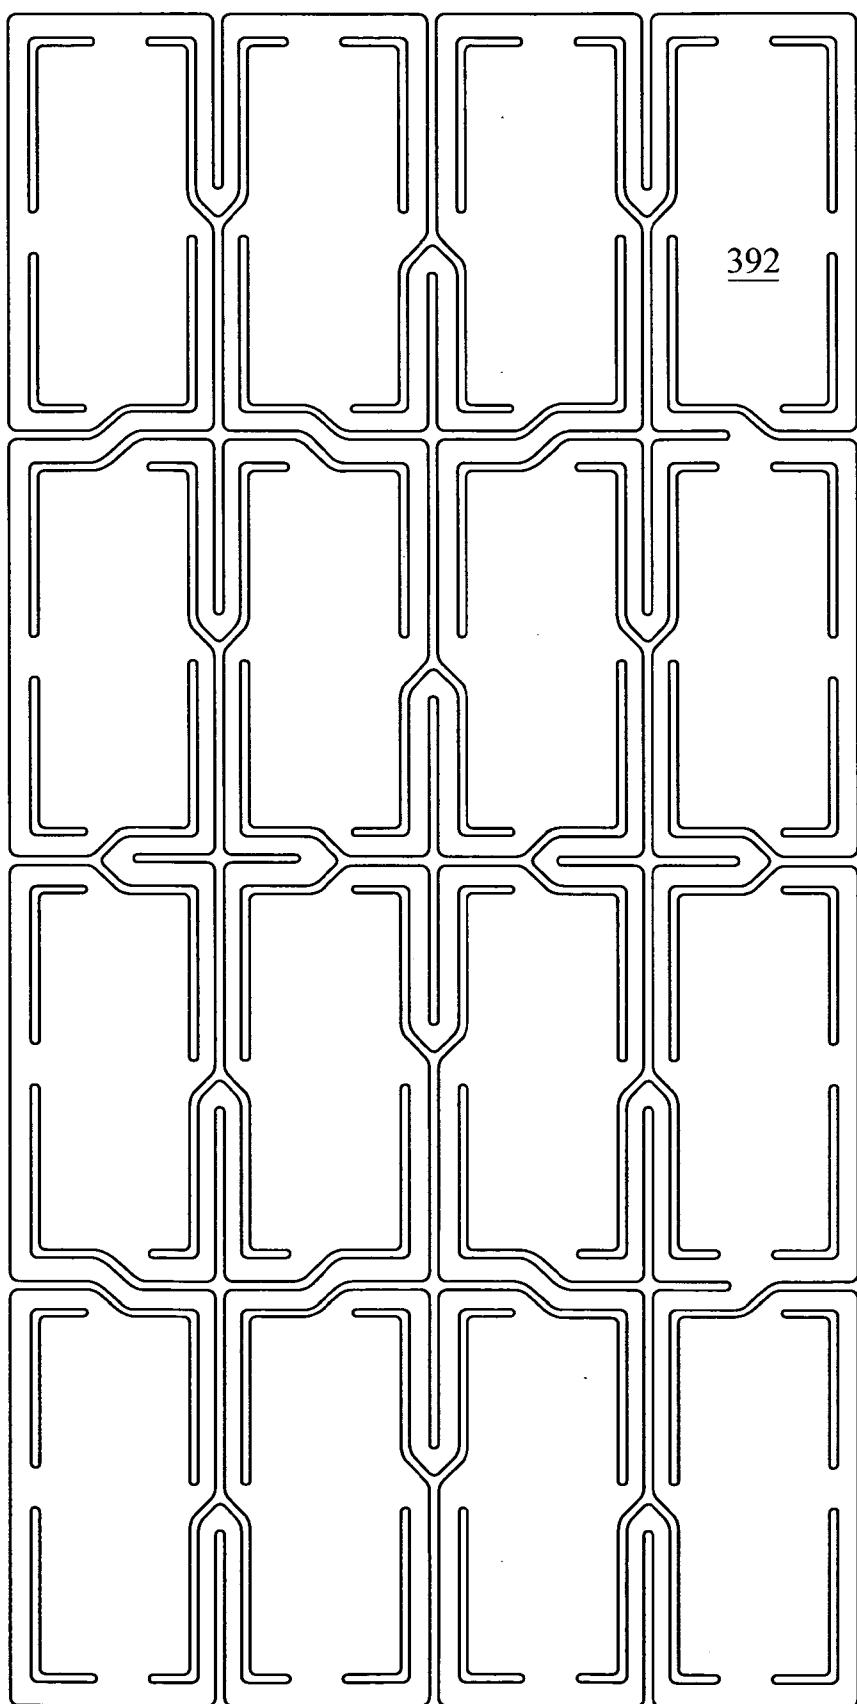


Fig. 69

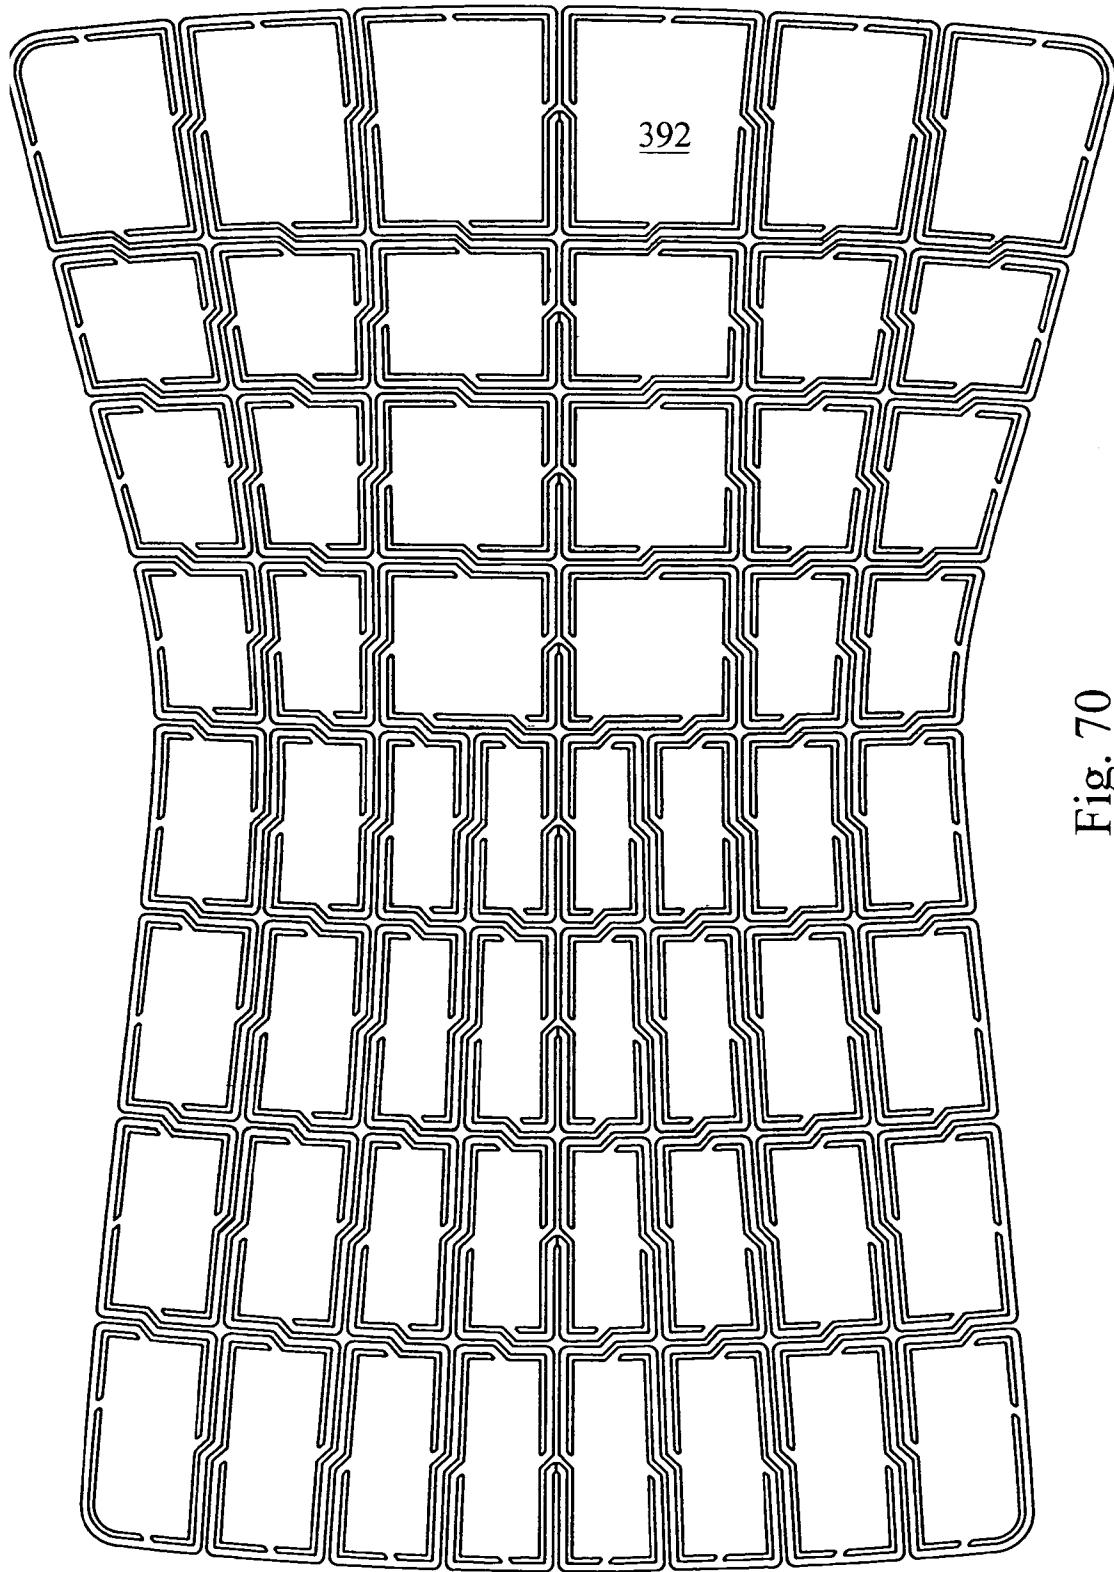


Fig. 70

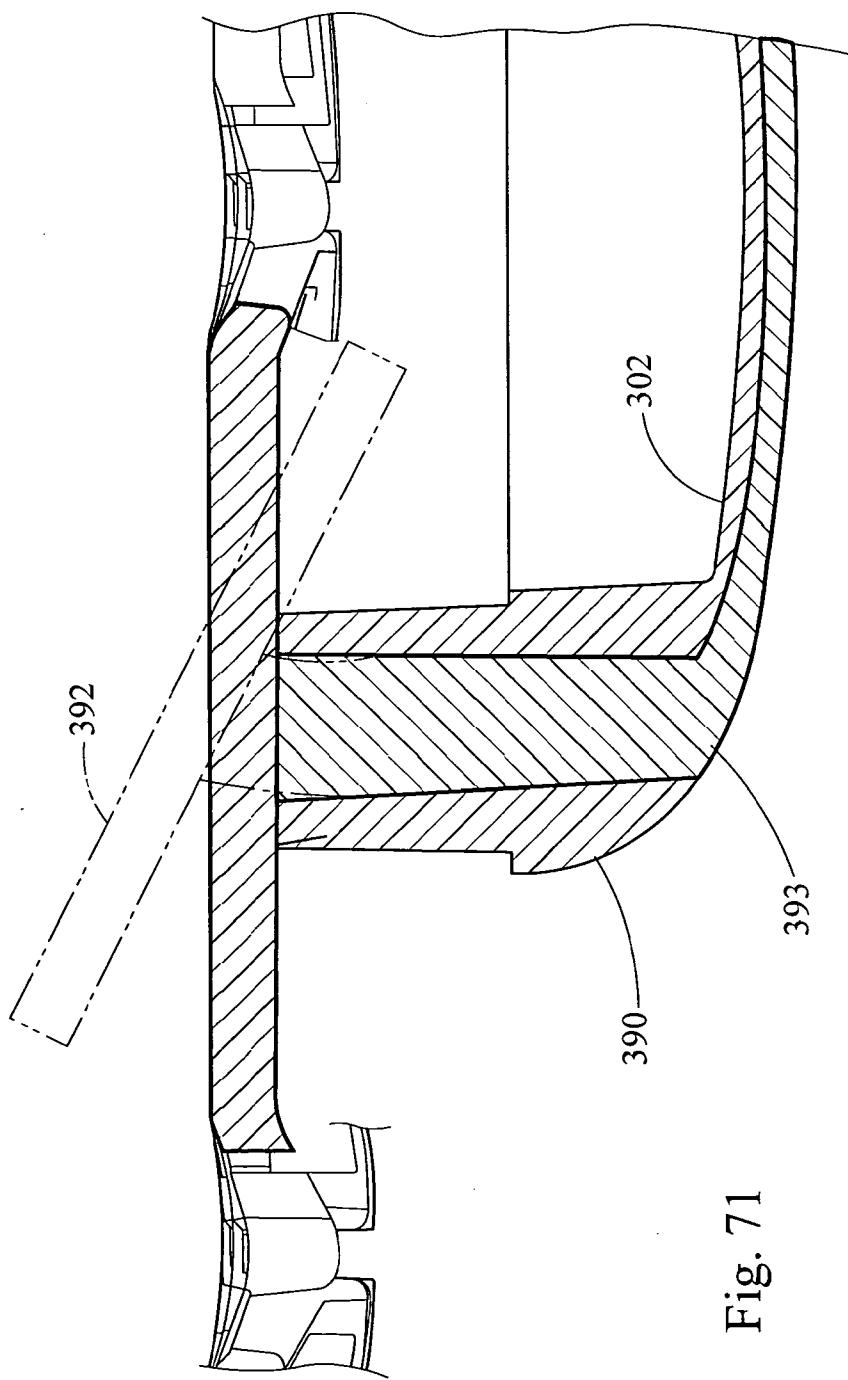


Fig. 71

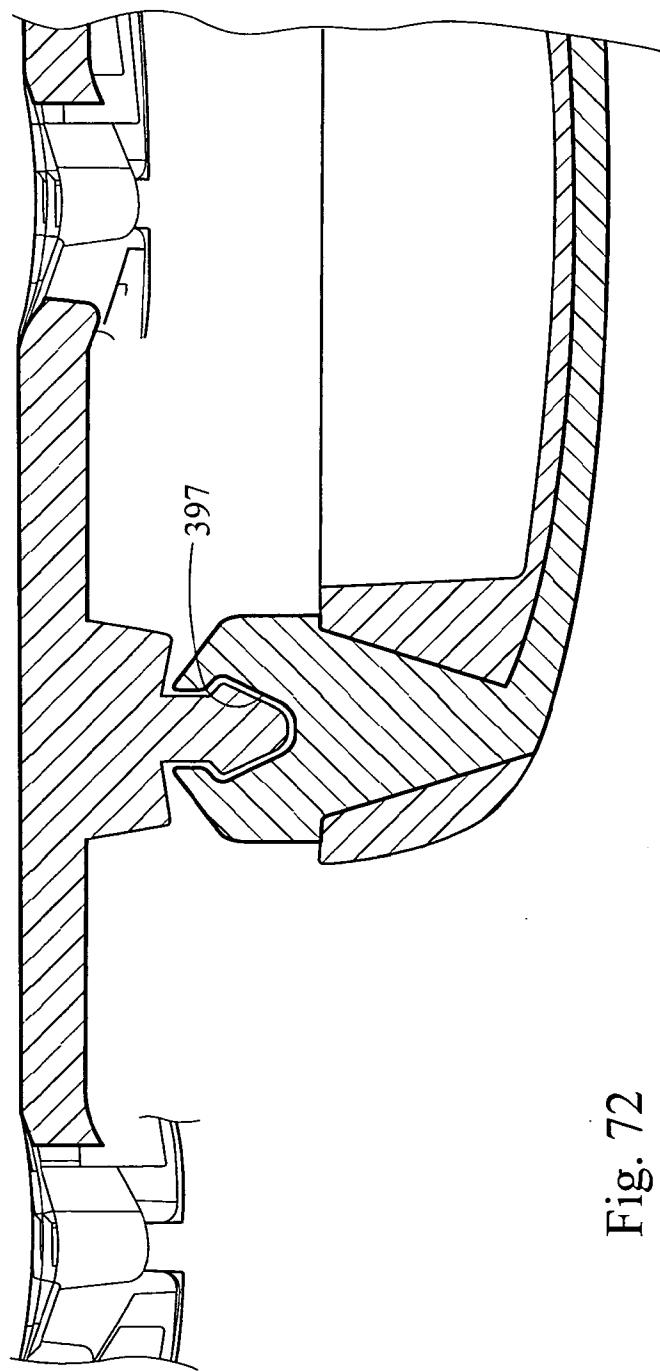


Fig. 72

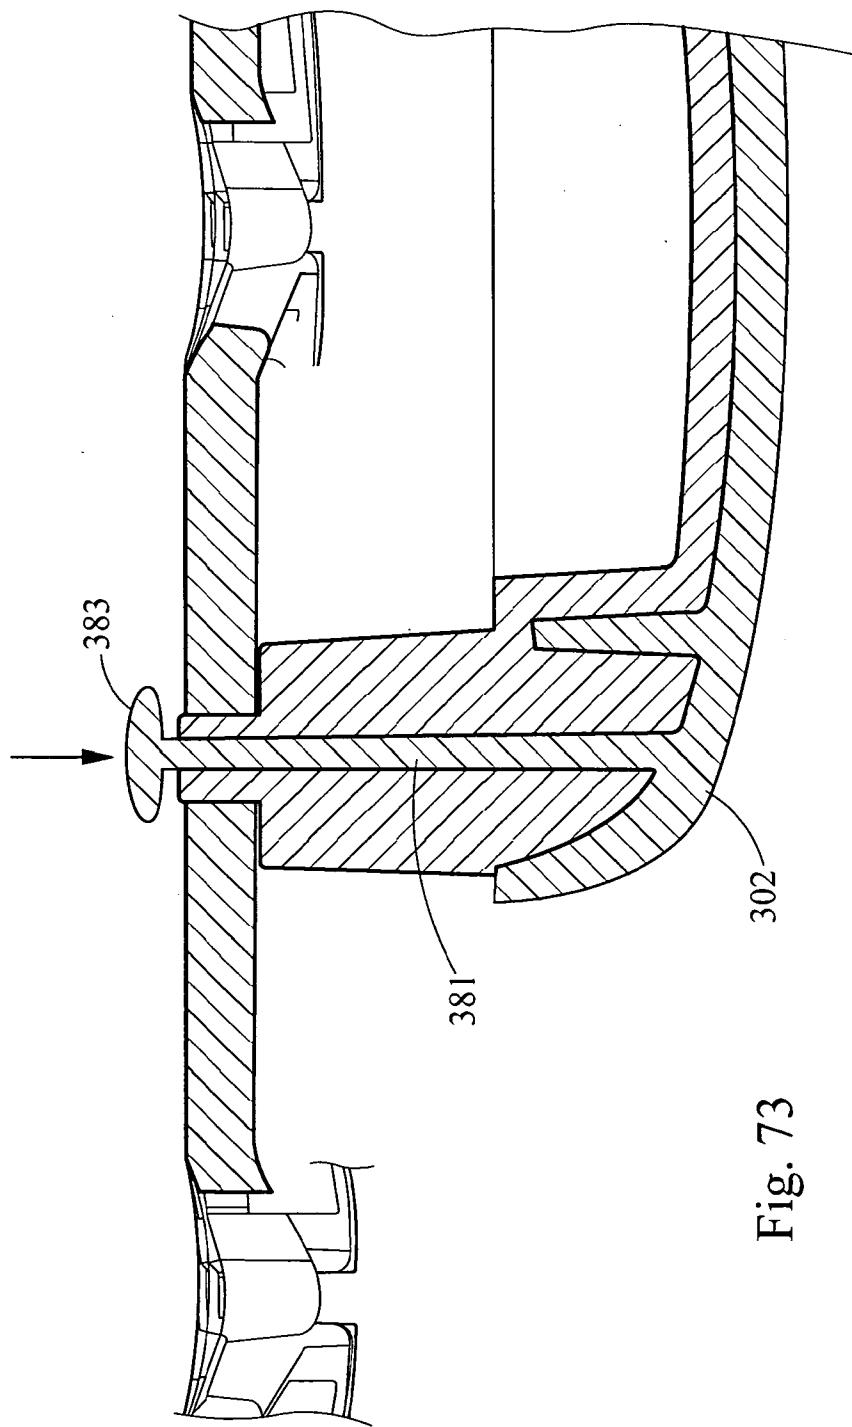
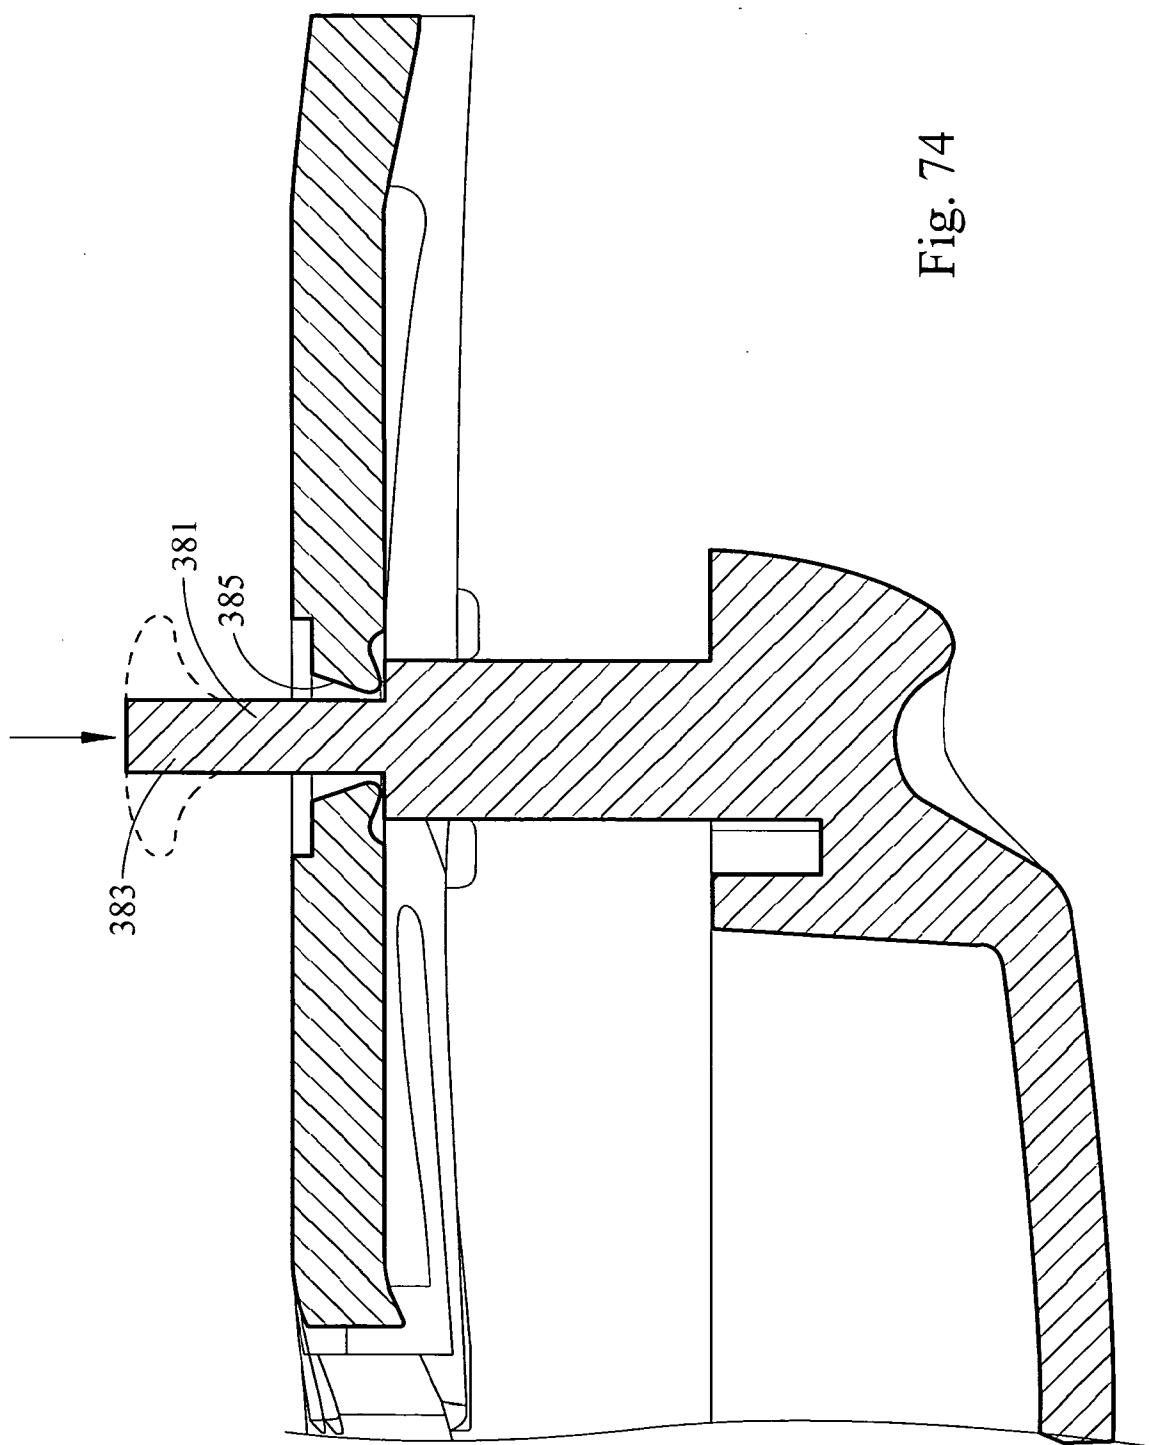


Fig. 73

Fig. 74



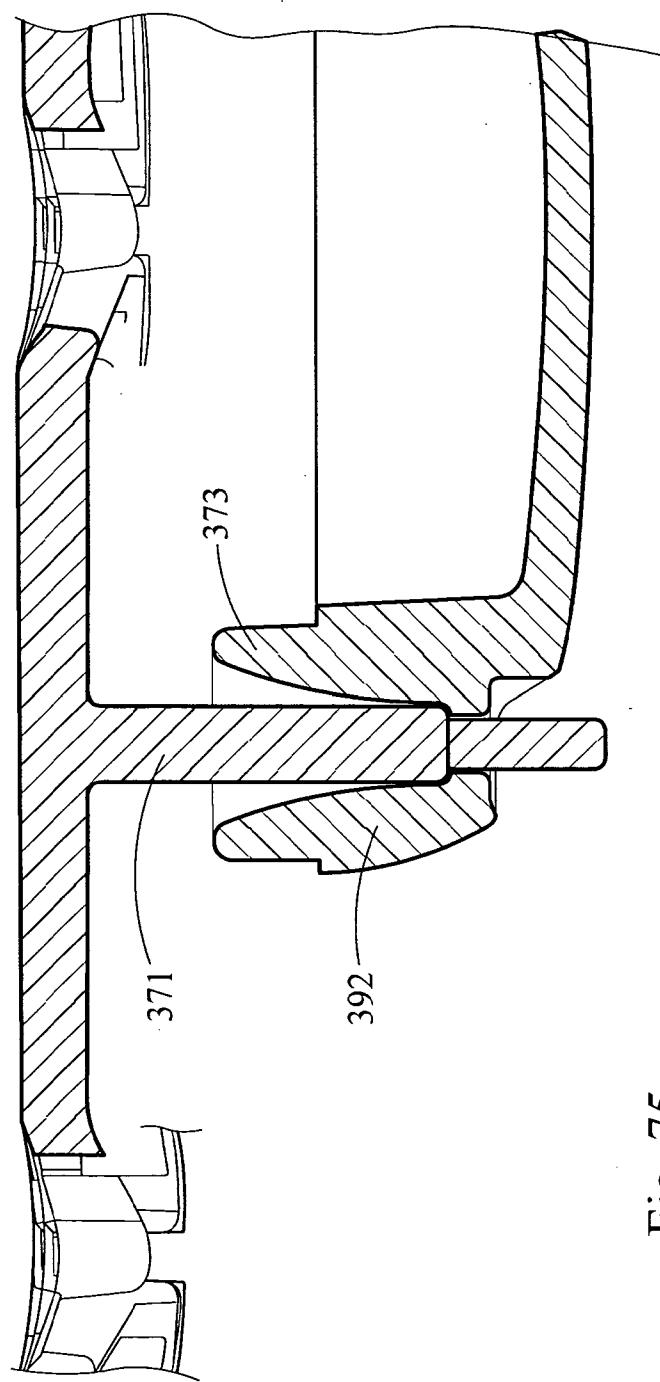


Fig. 75

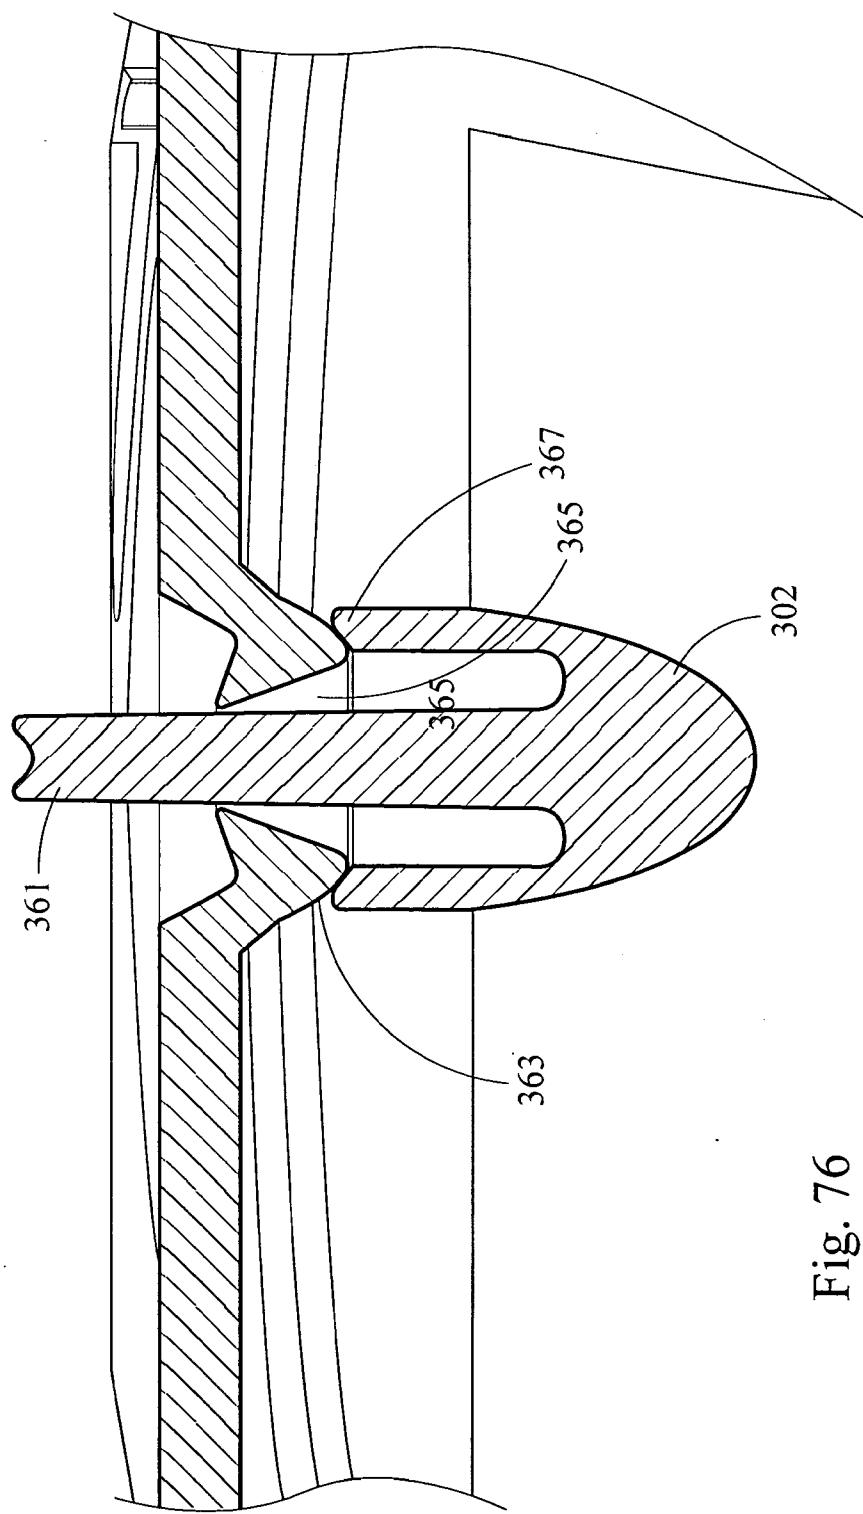


Fig. 76

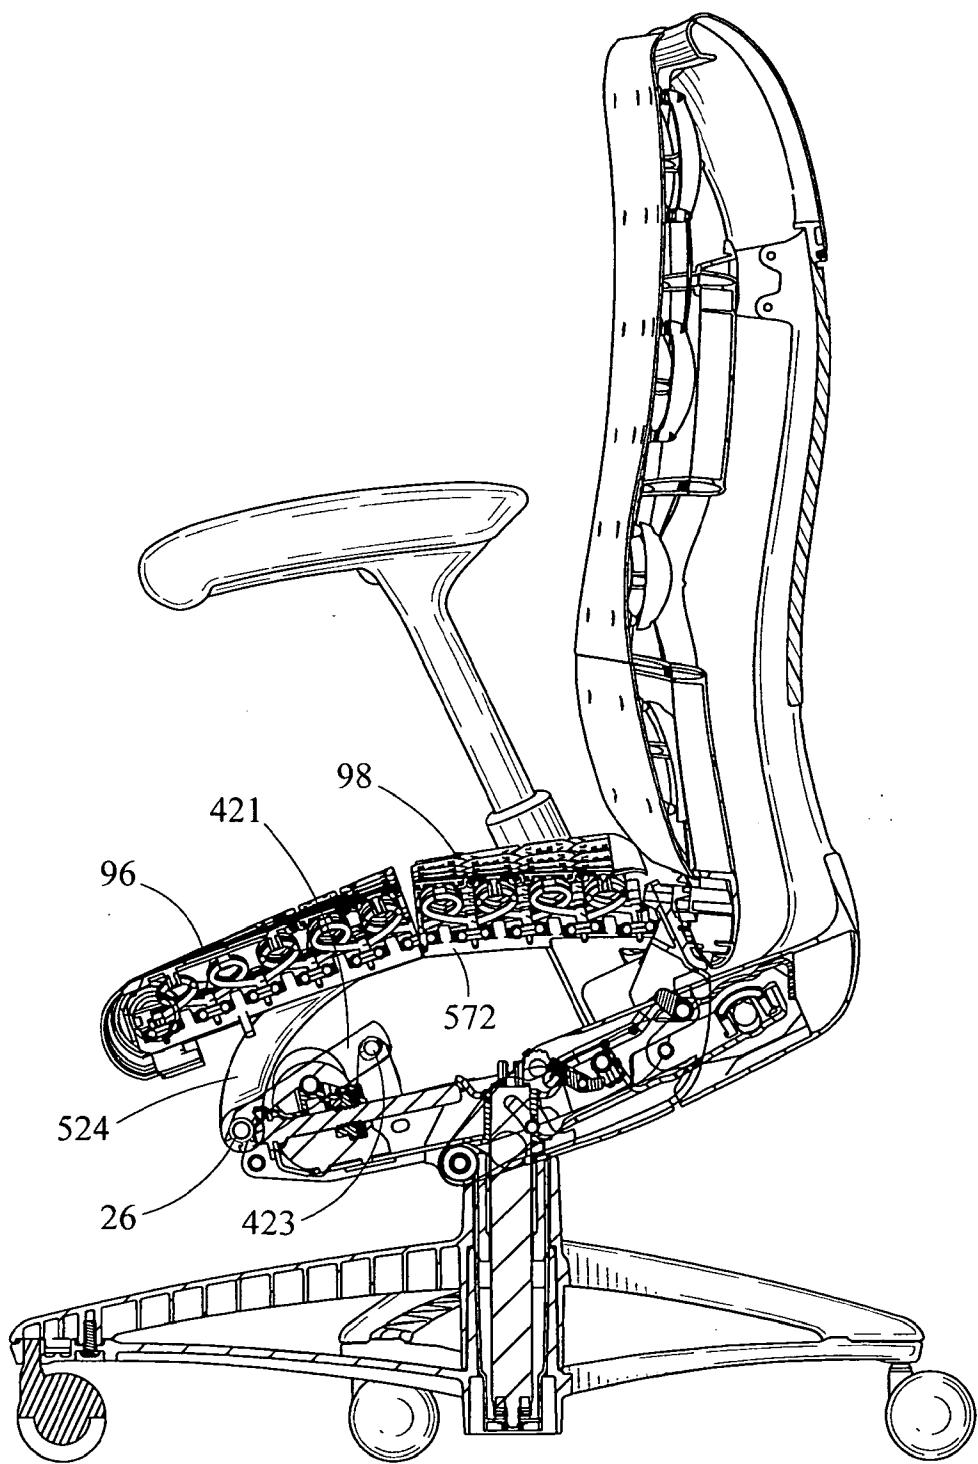


Fig. 77

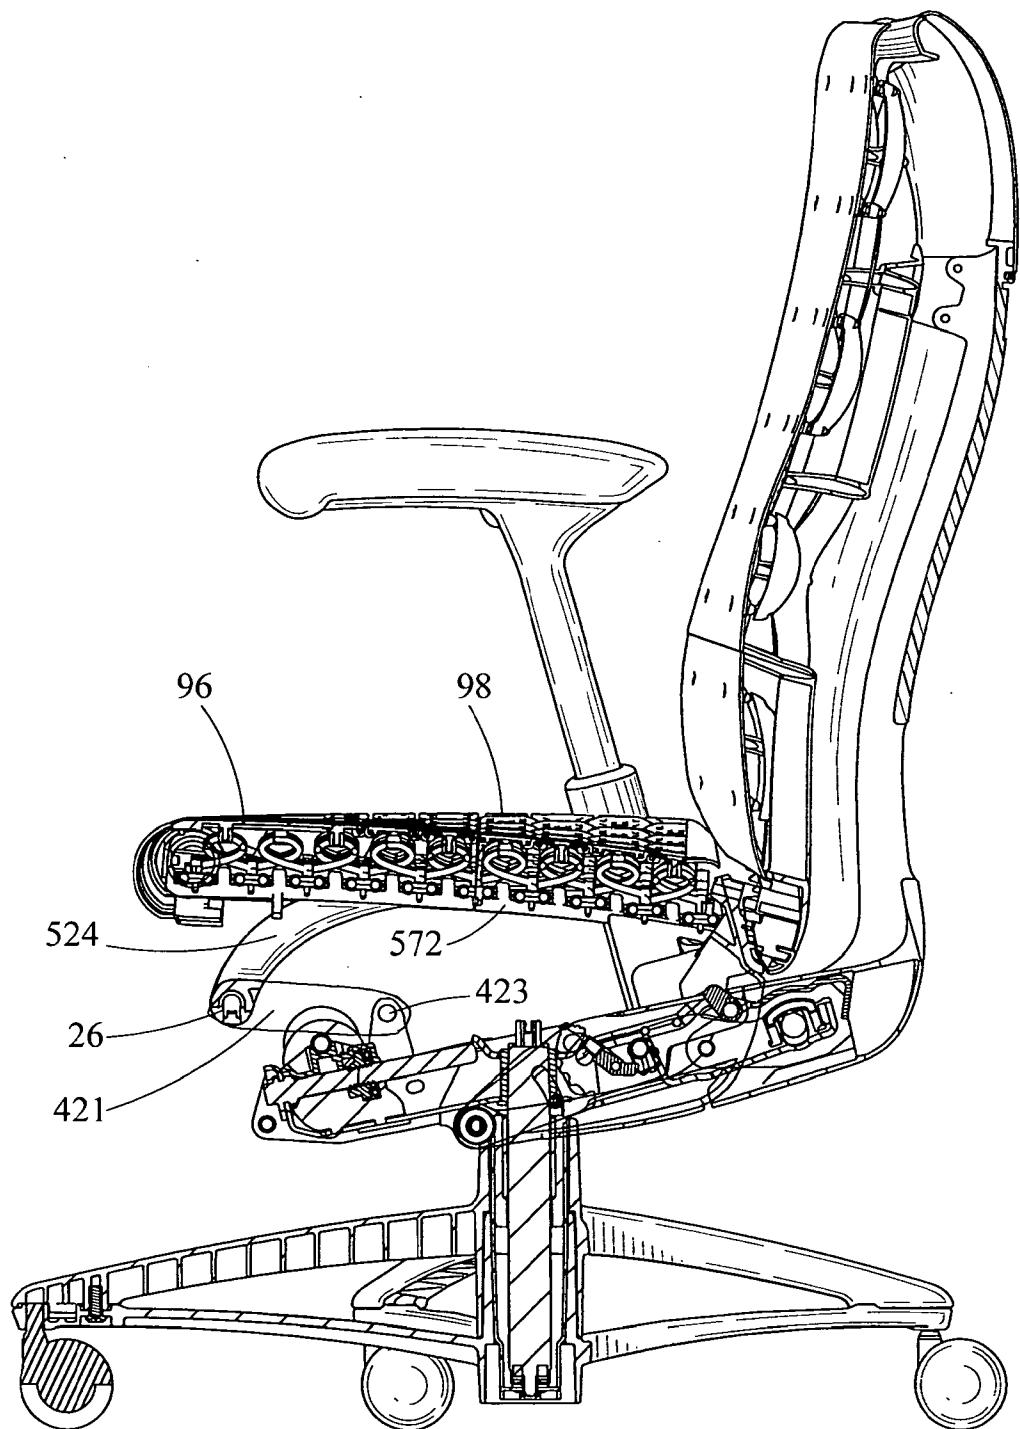


Fig. 78

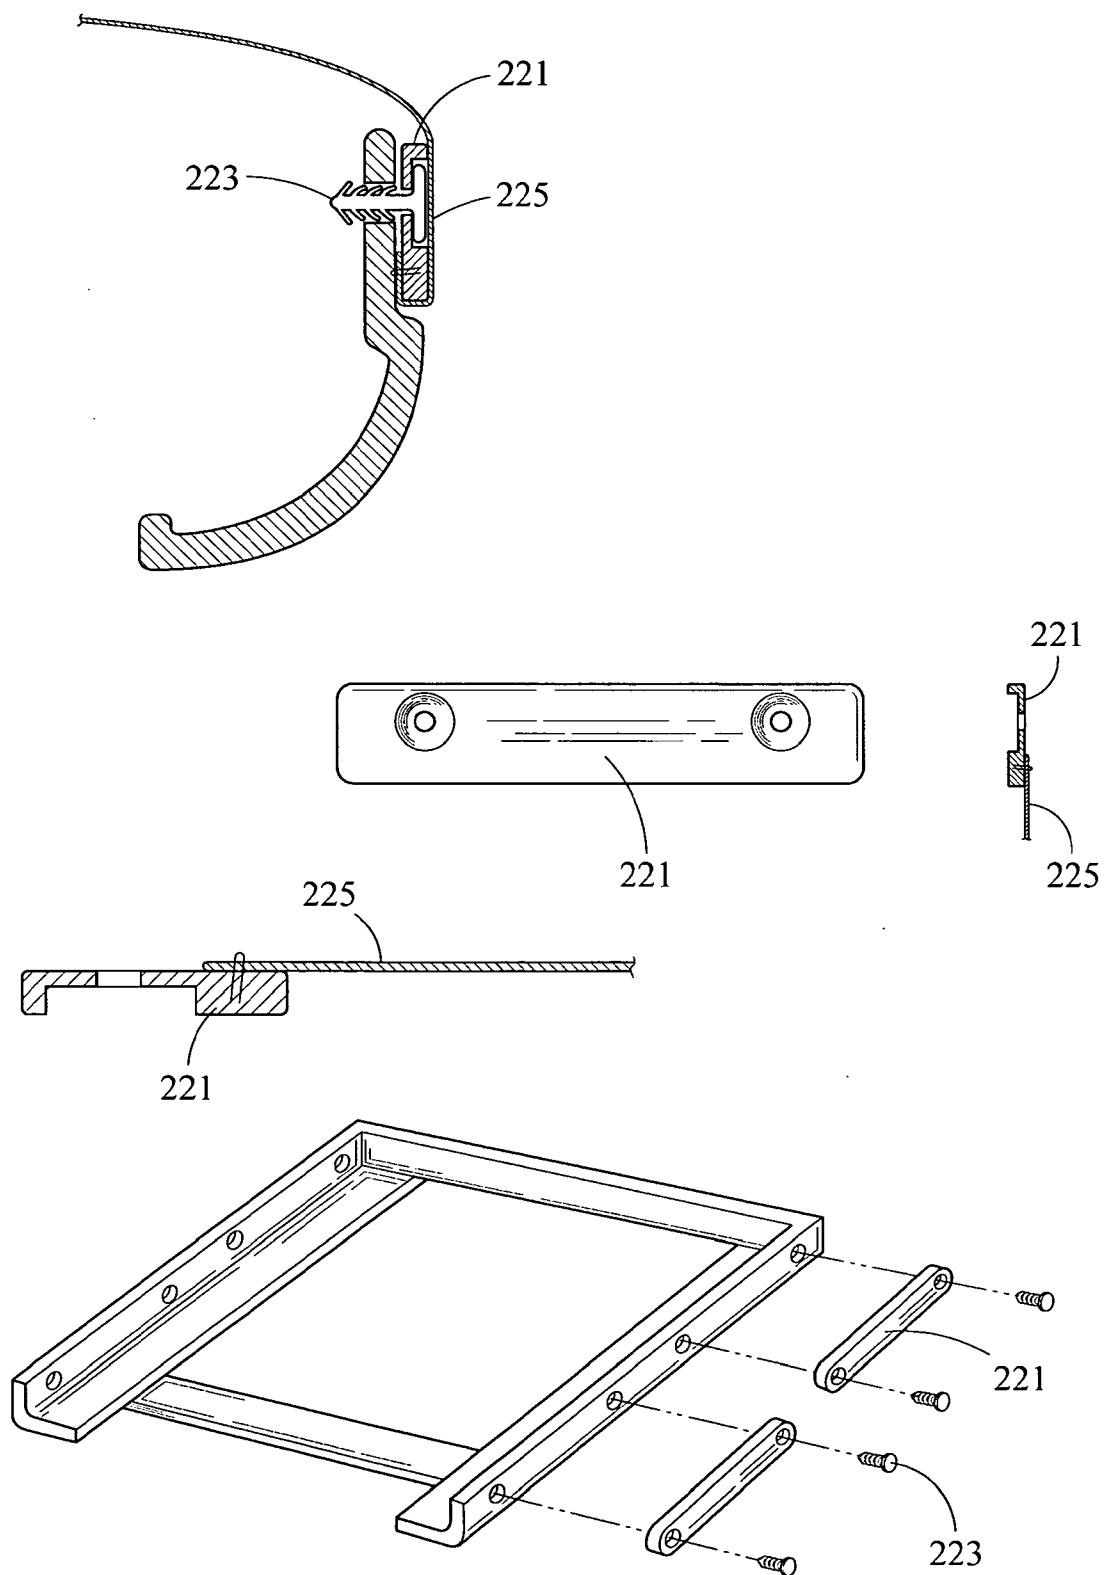


Fig. 79

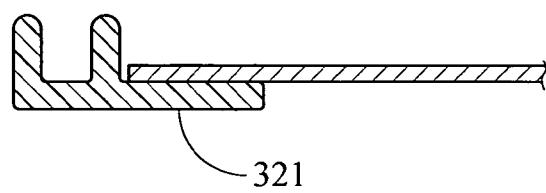
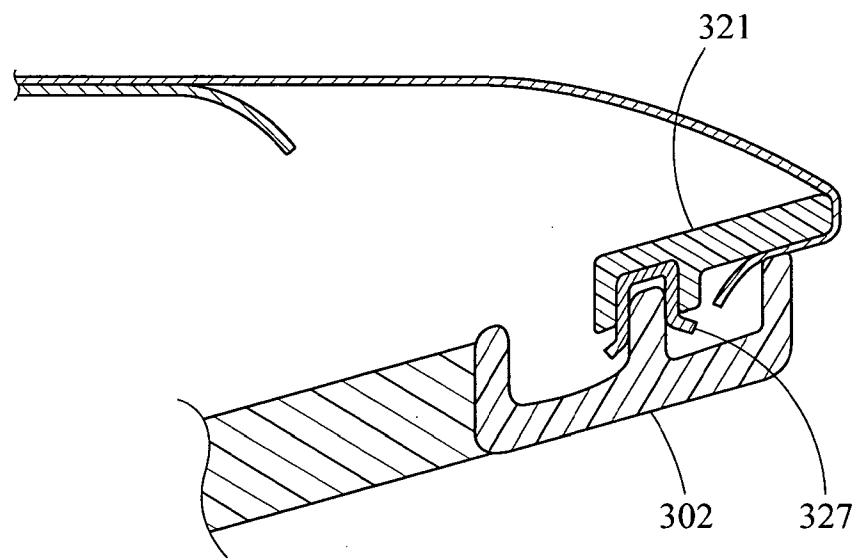


Fig. 80

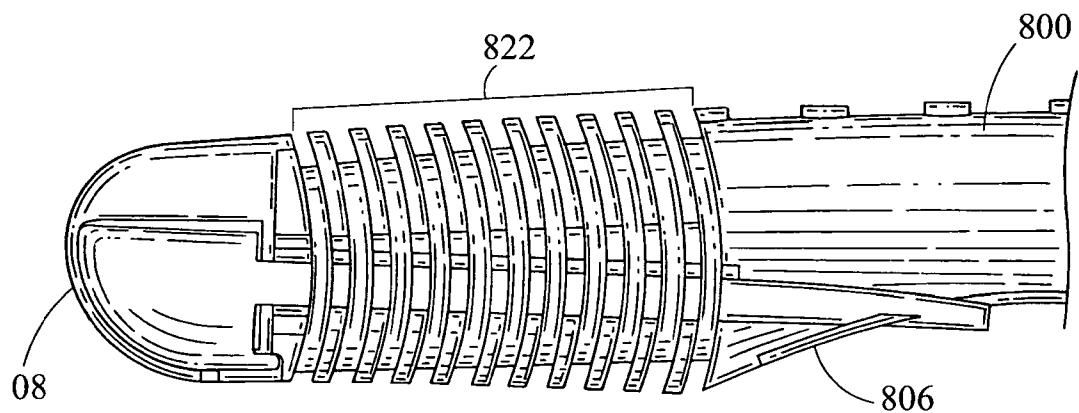


Fig. 81

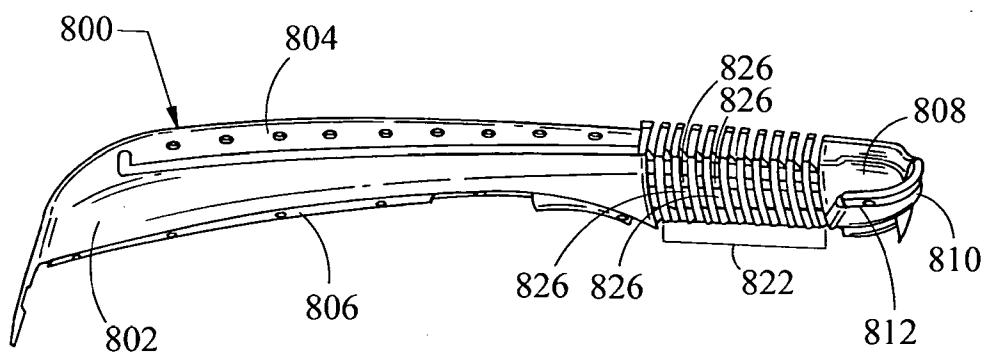


Fig. 82

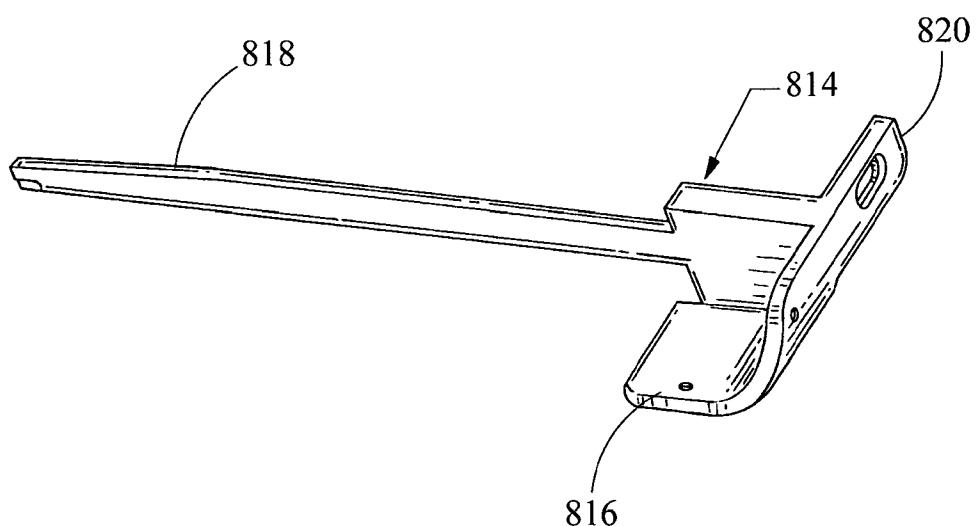


Fig. 83

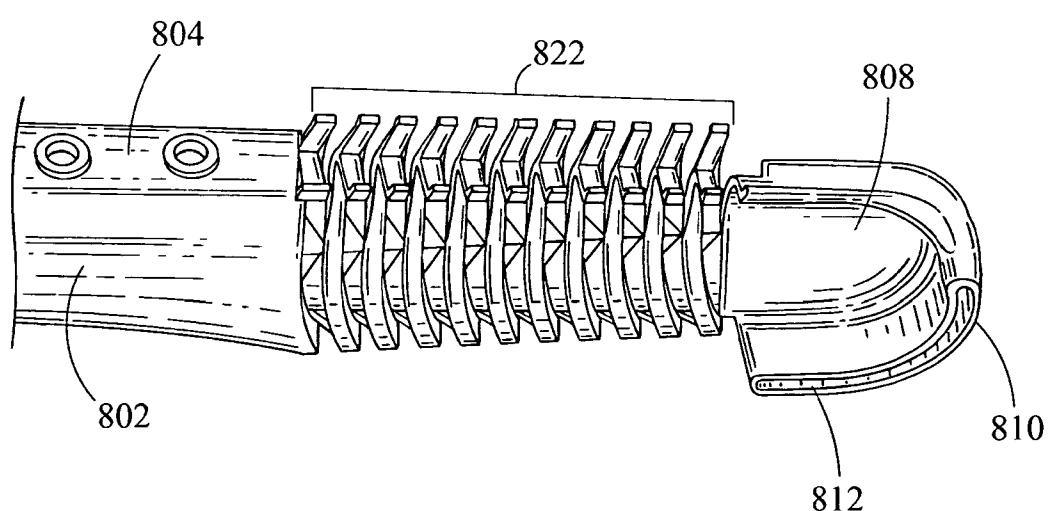


Fig. 84

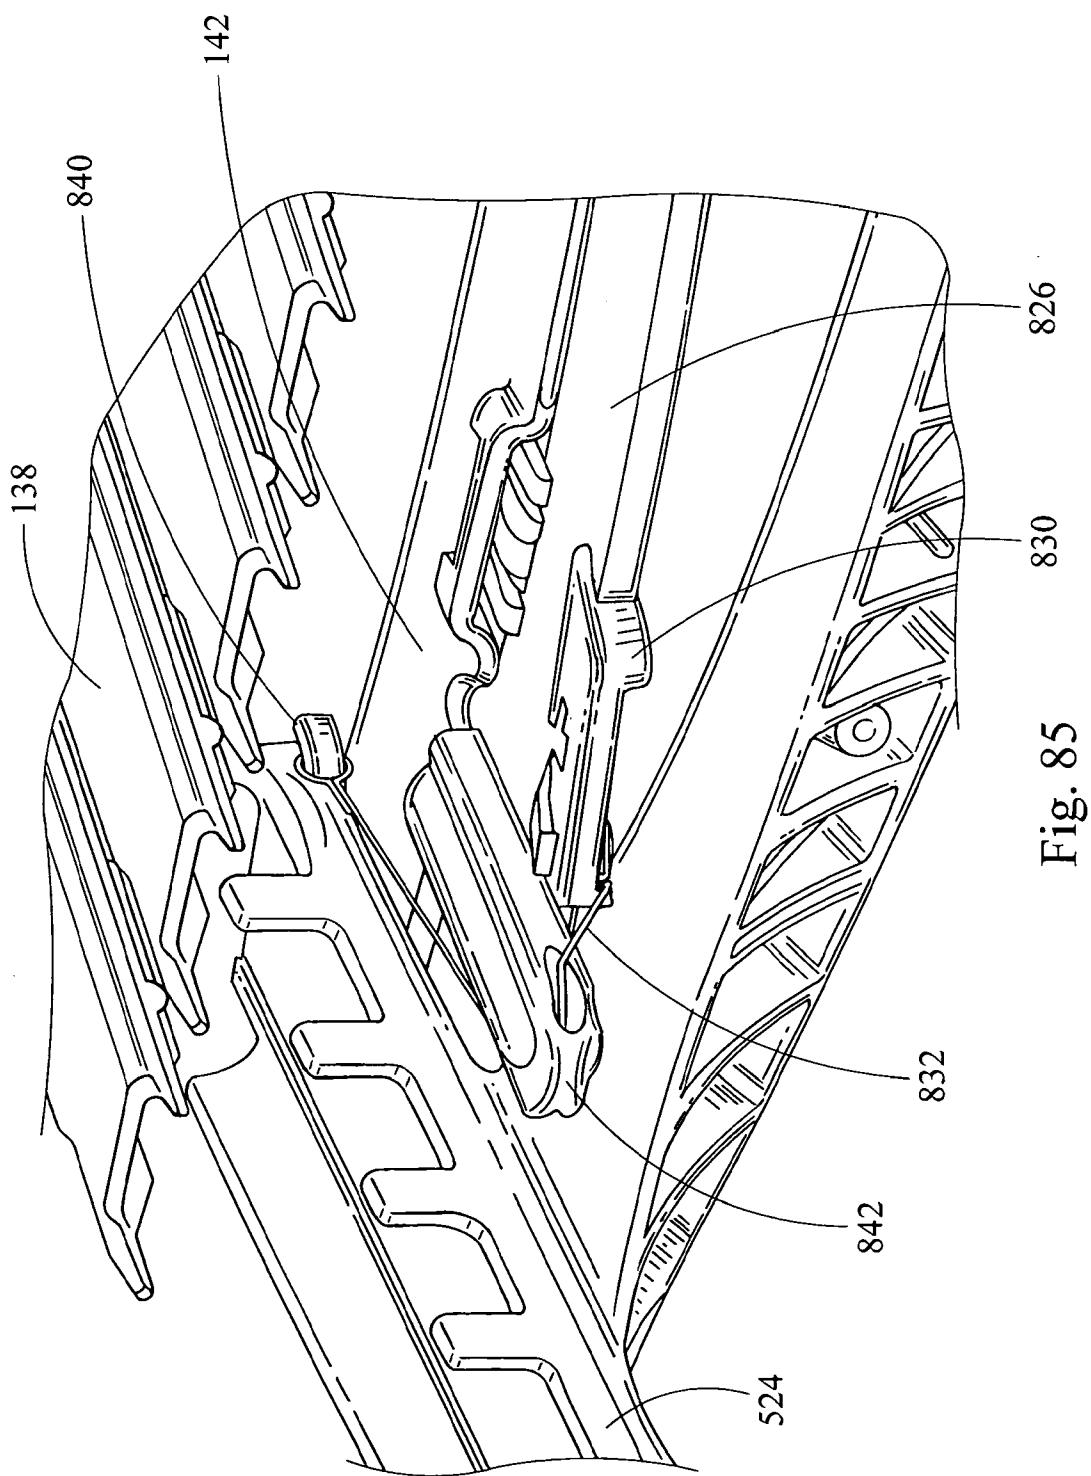


Fig. 85

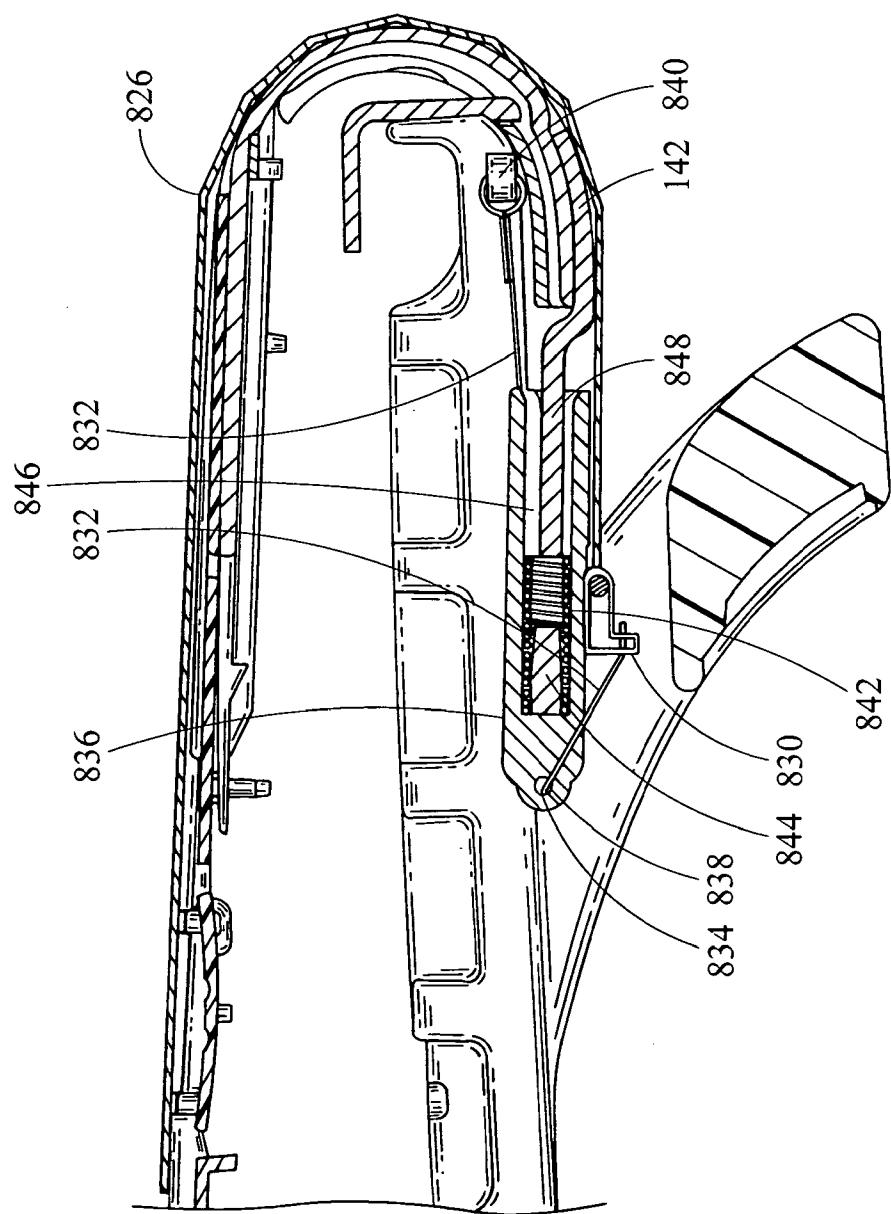


Fig. 86

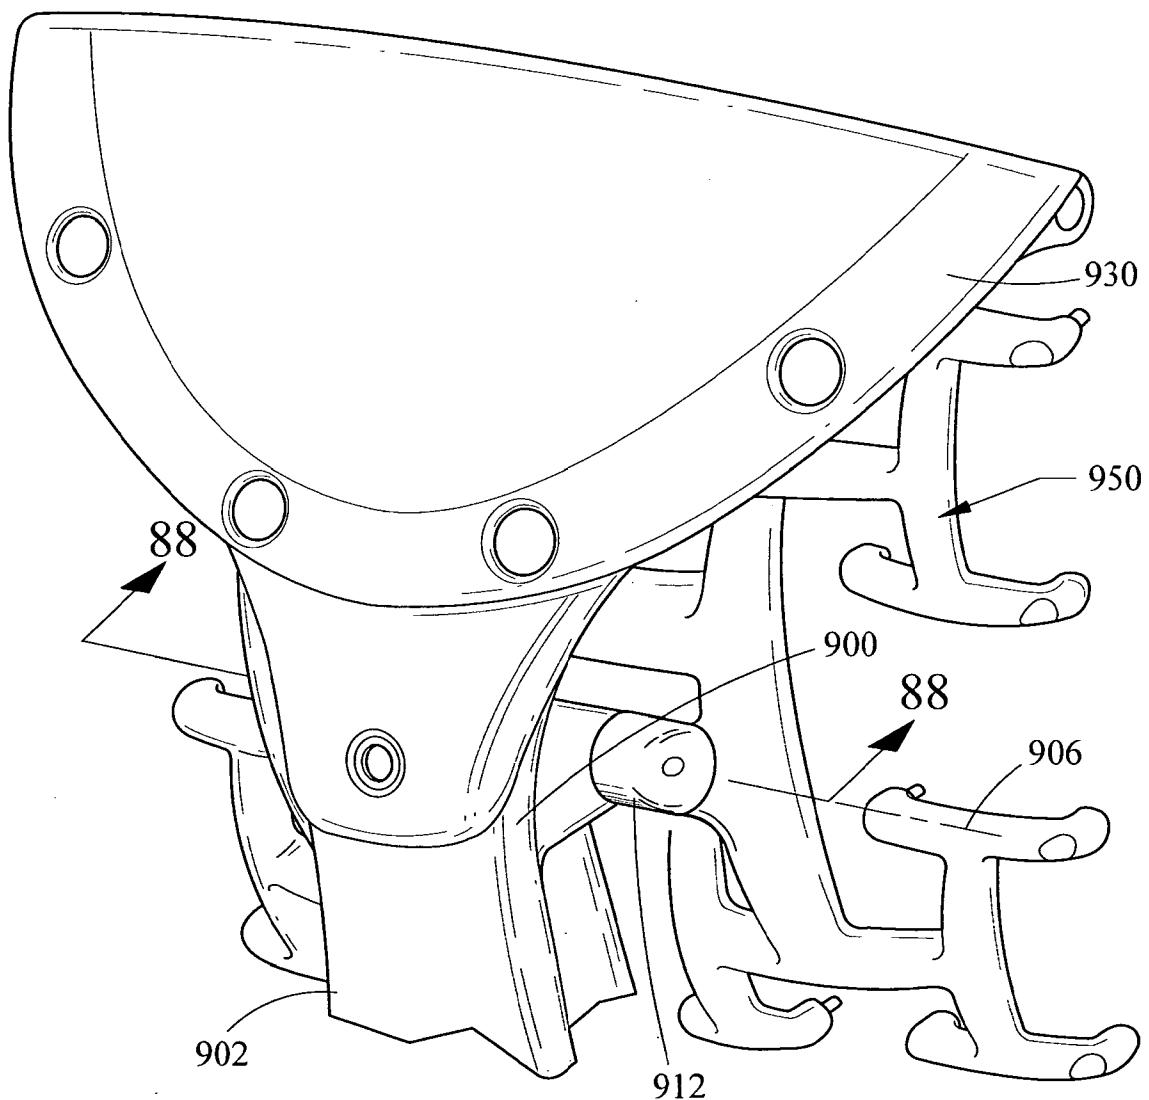


Fig. 87

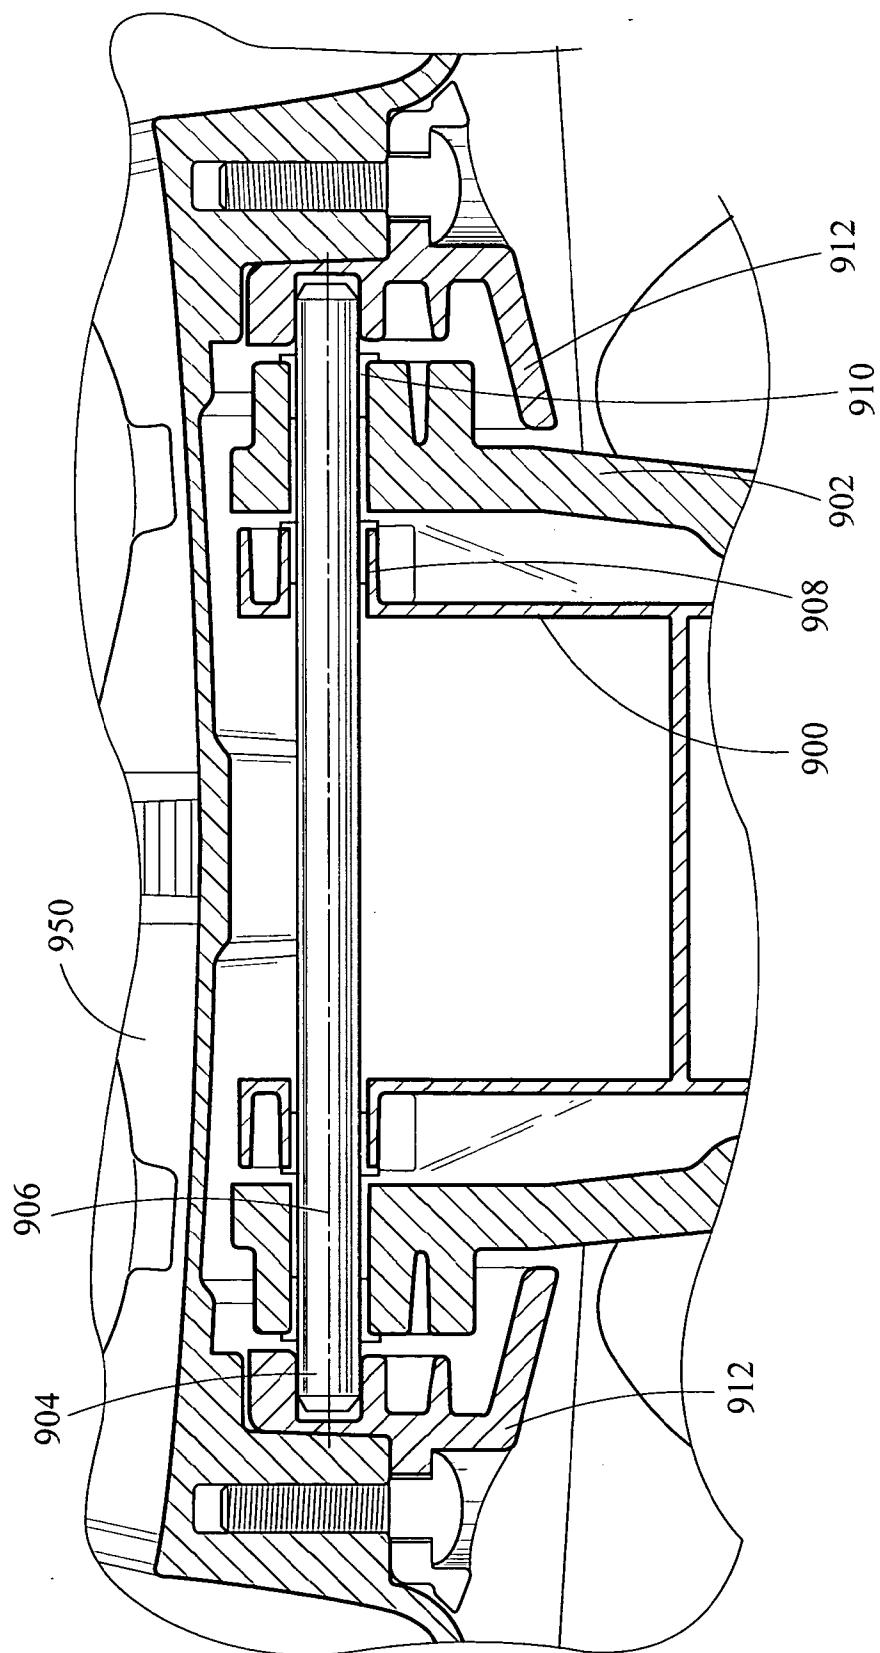


Fig. 88

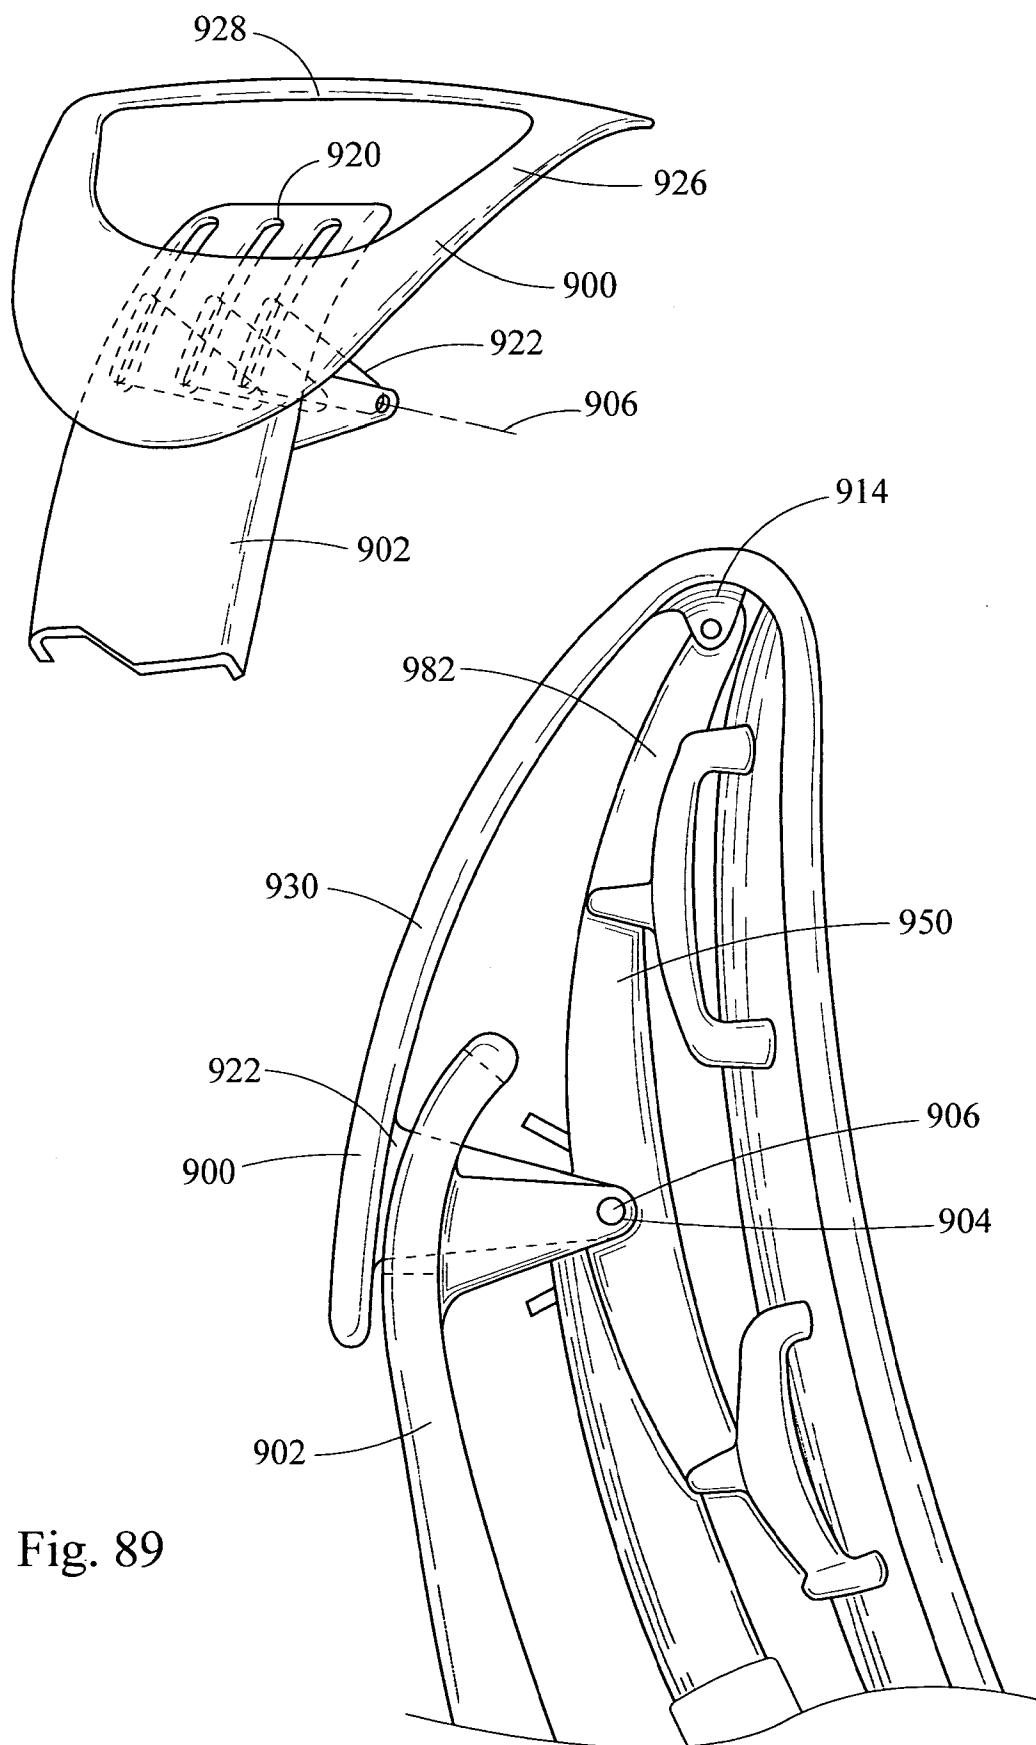


Fig. 89

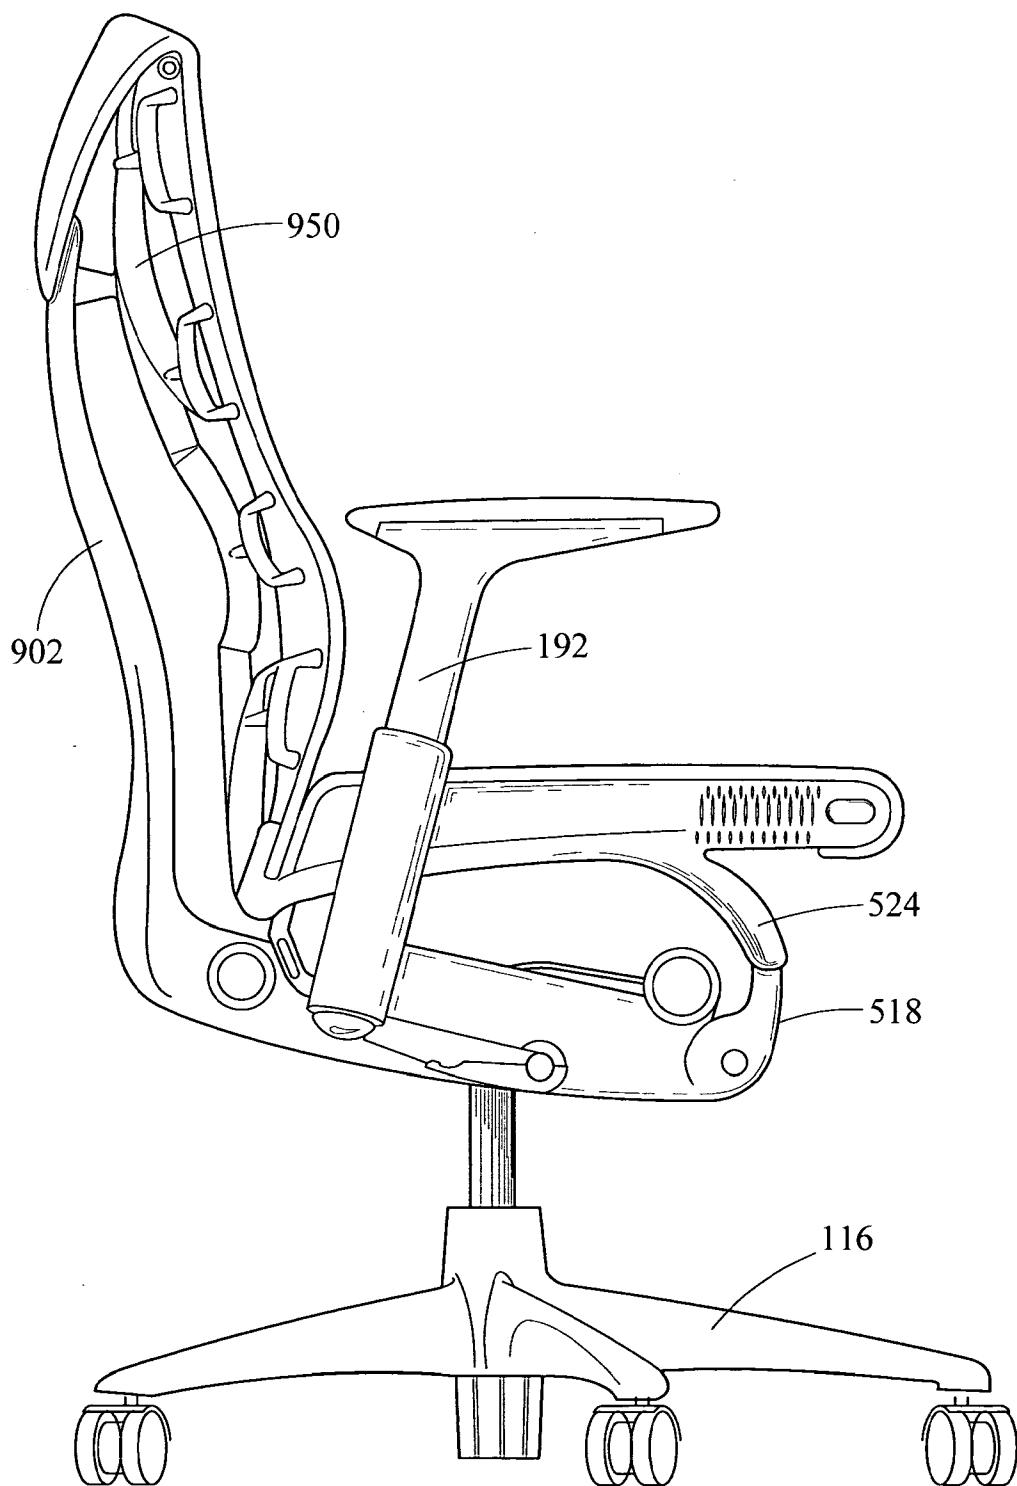


Fig. 90

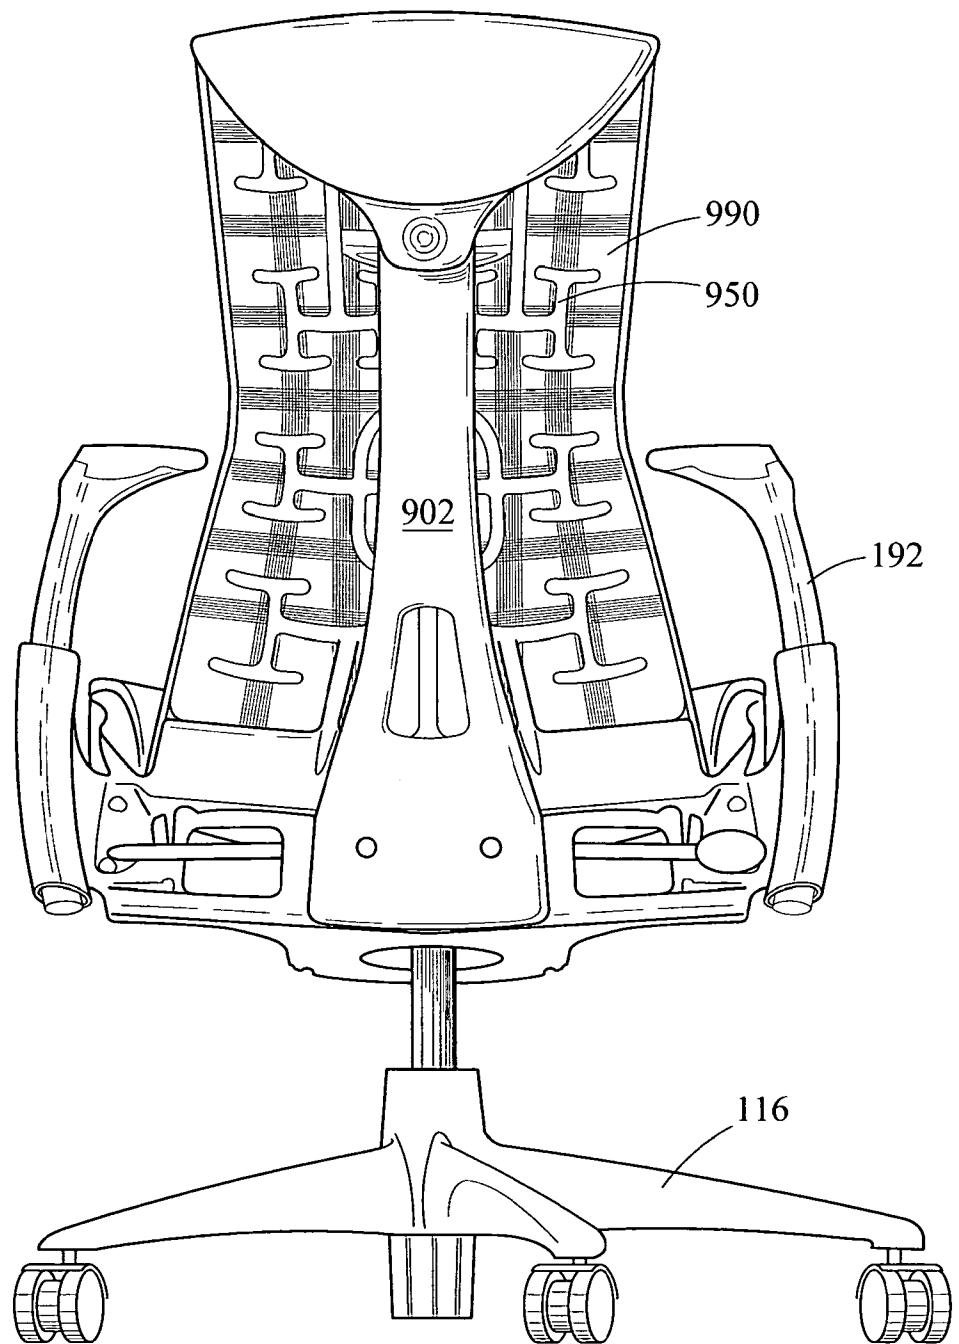
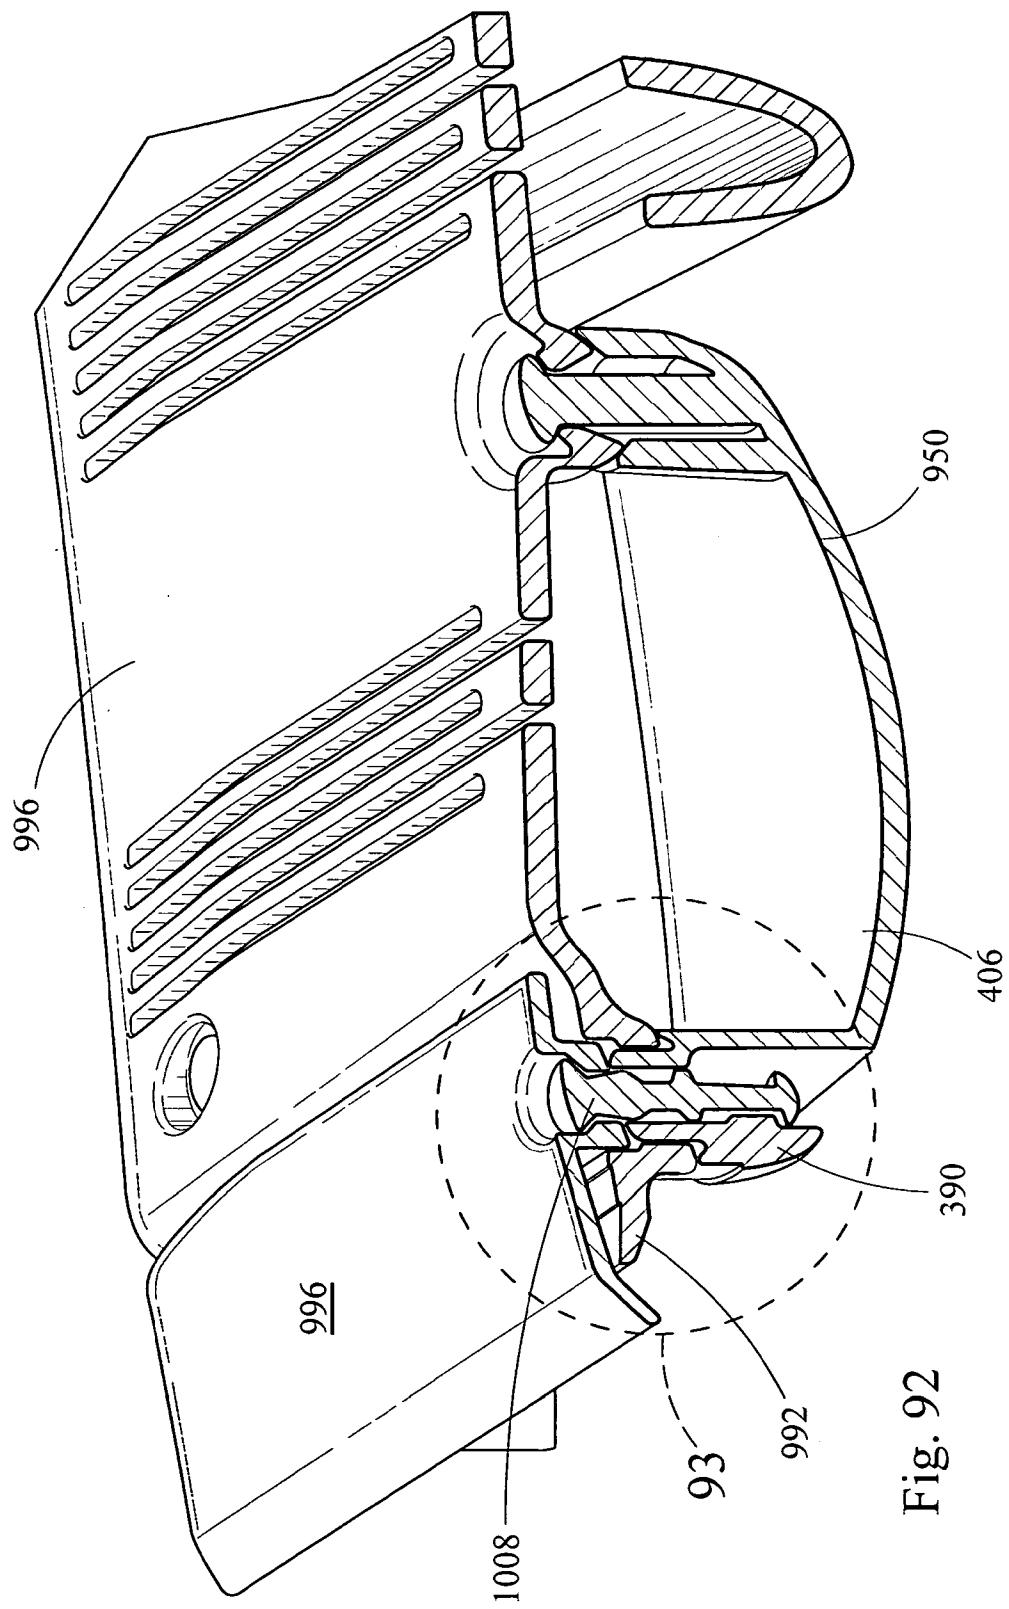


Fig. 91



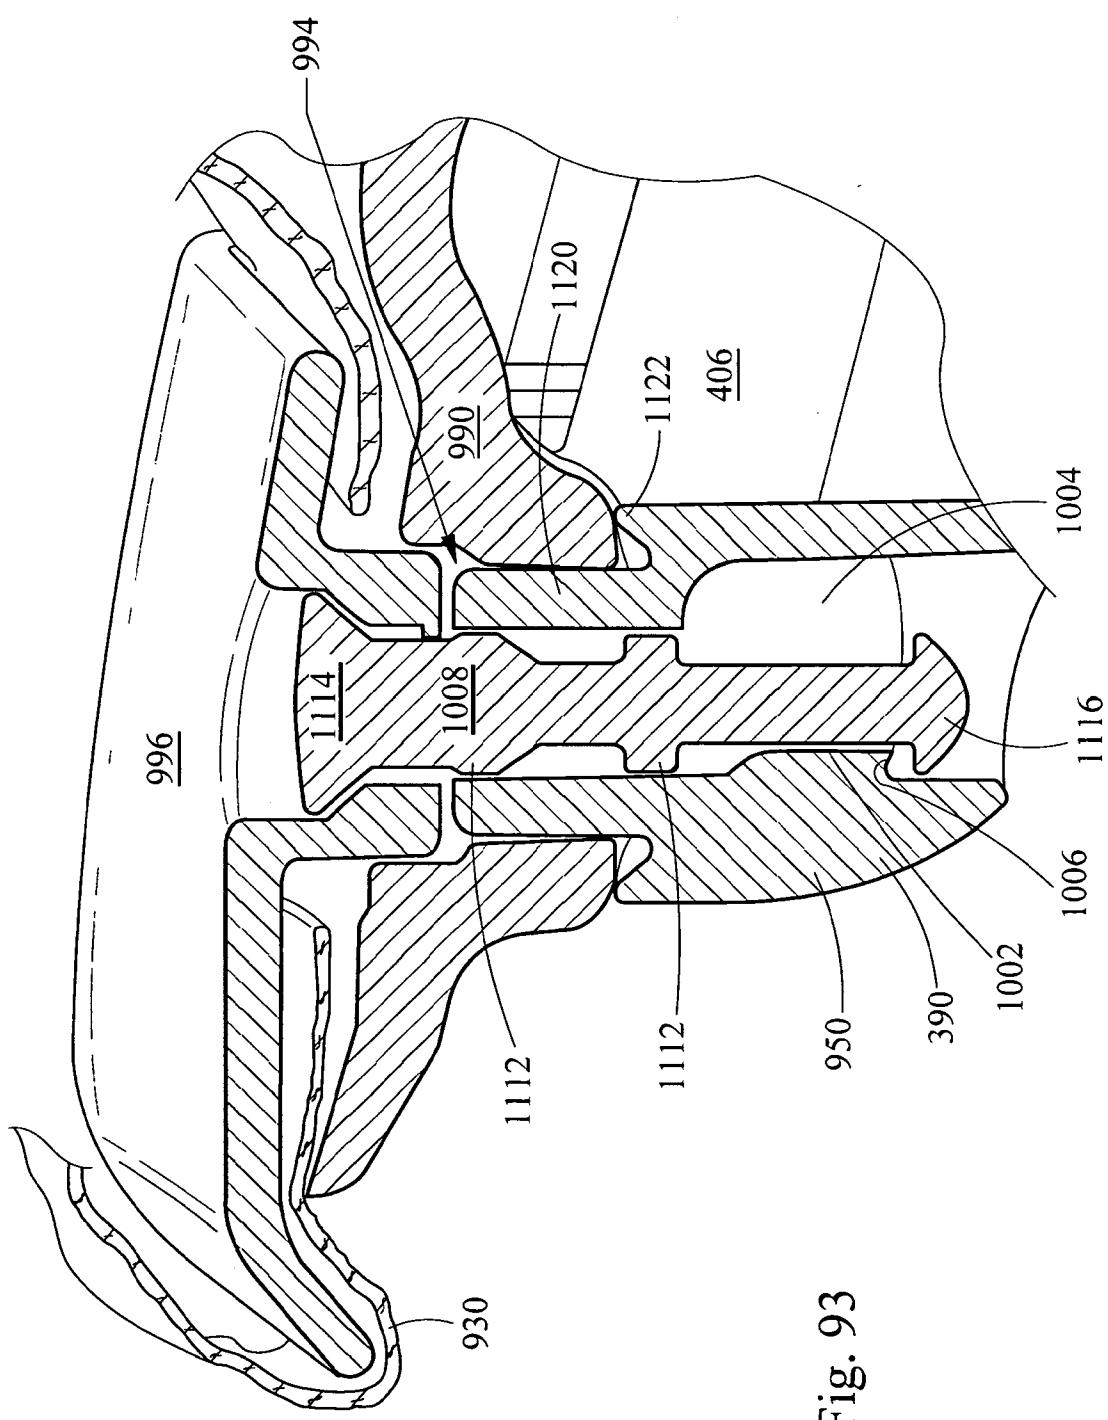
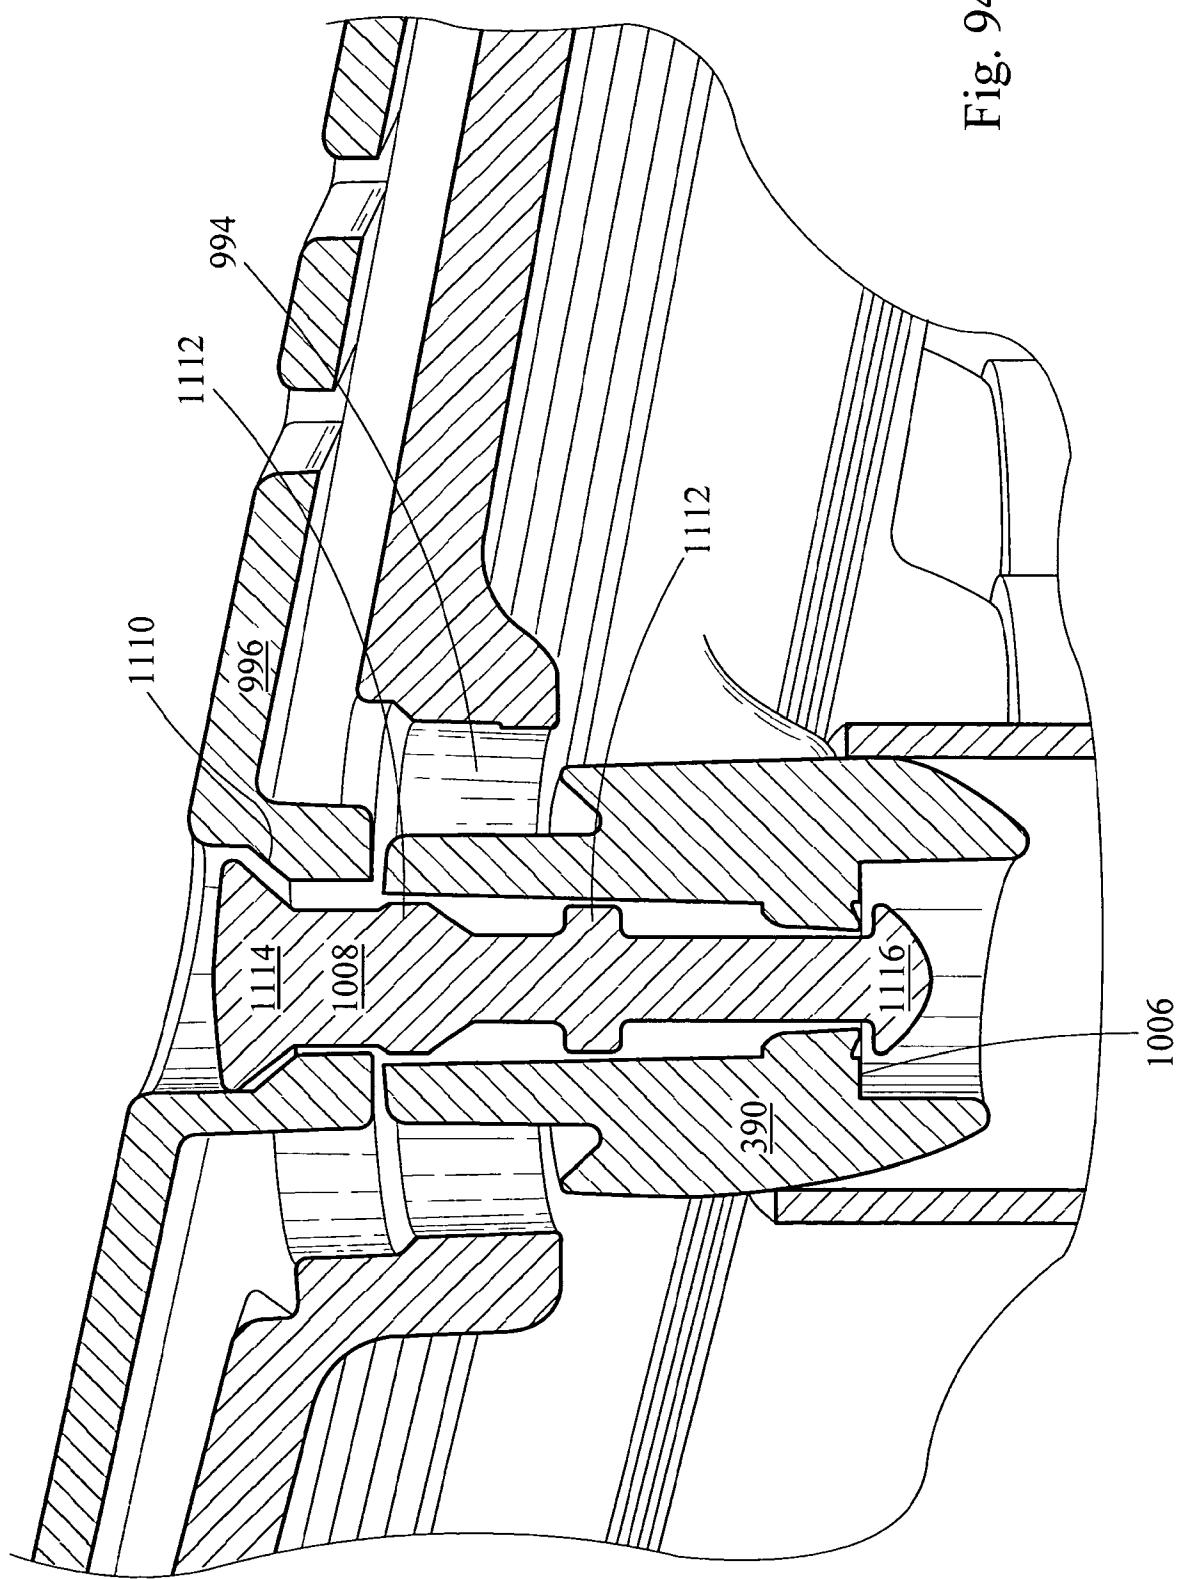


Fig. 93

Fig. 94



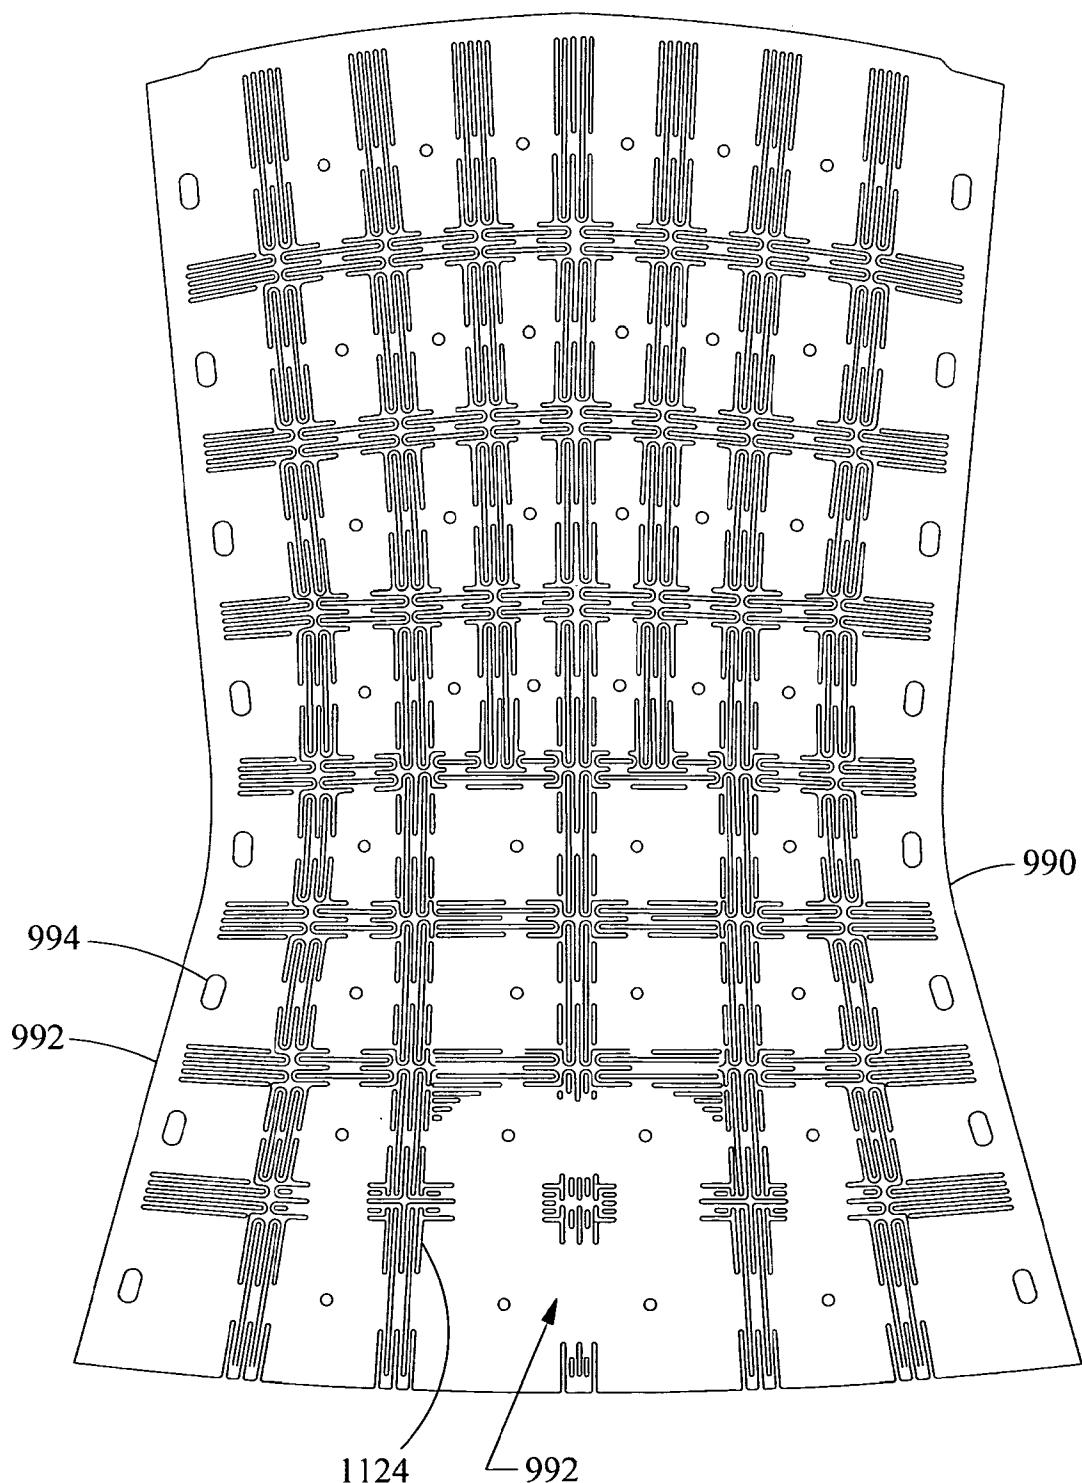


Fig. 95

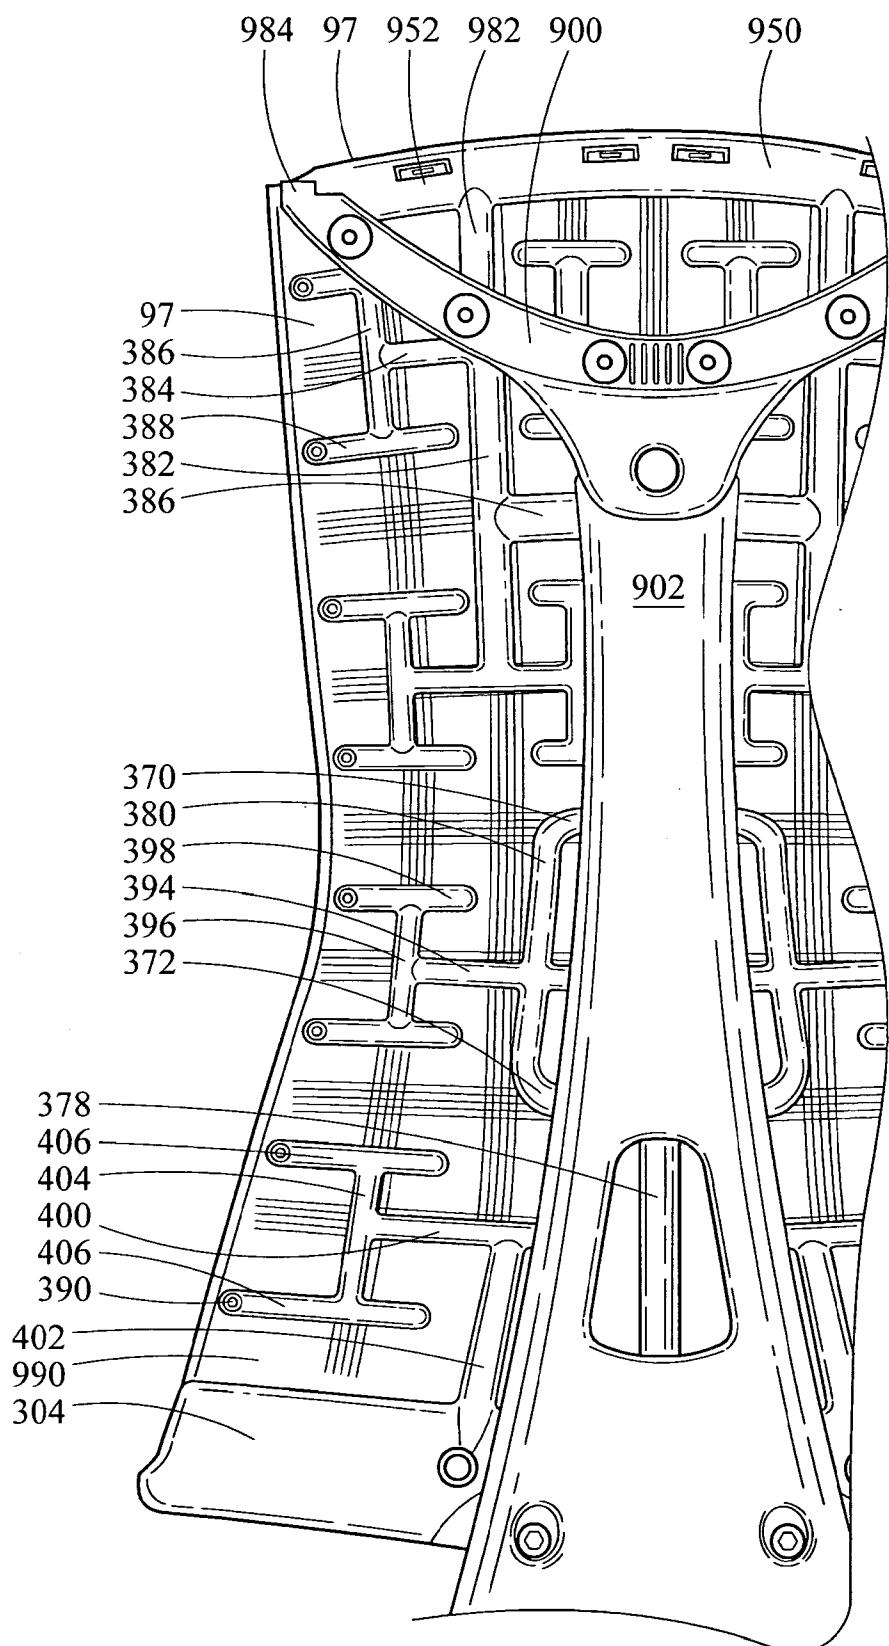


Fig. 96

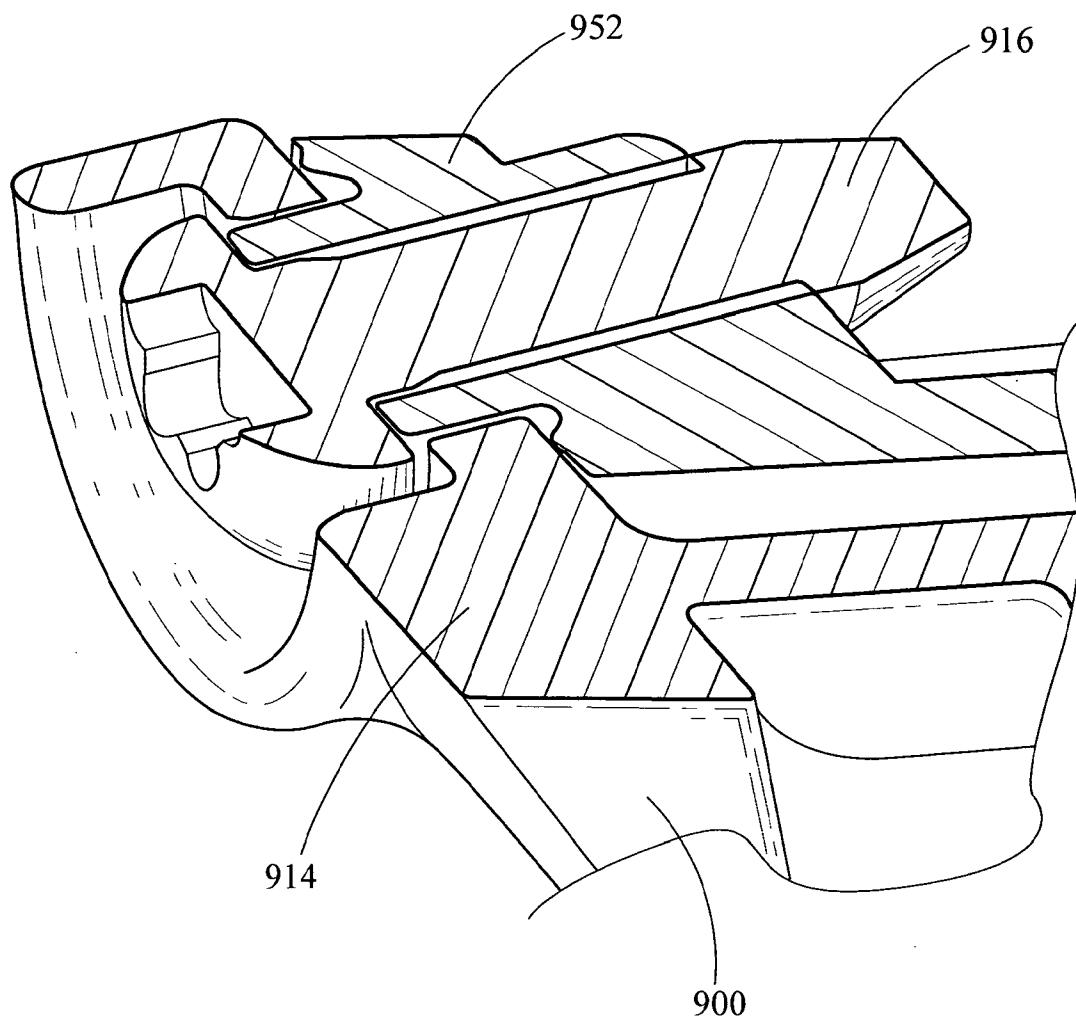


Fig. 97

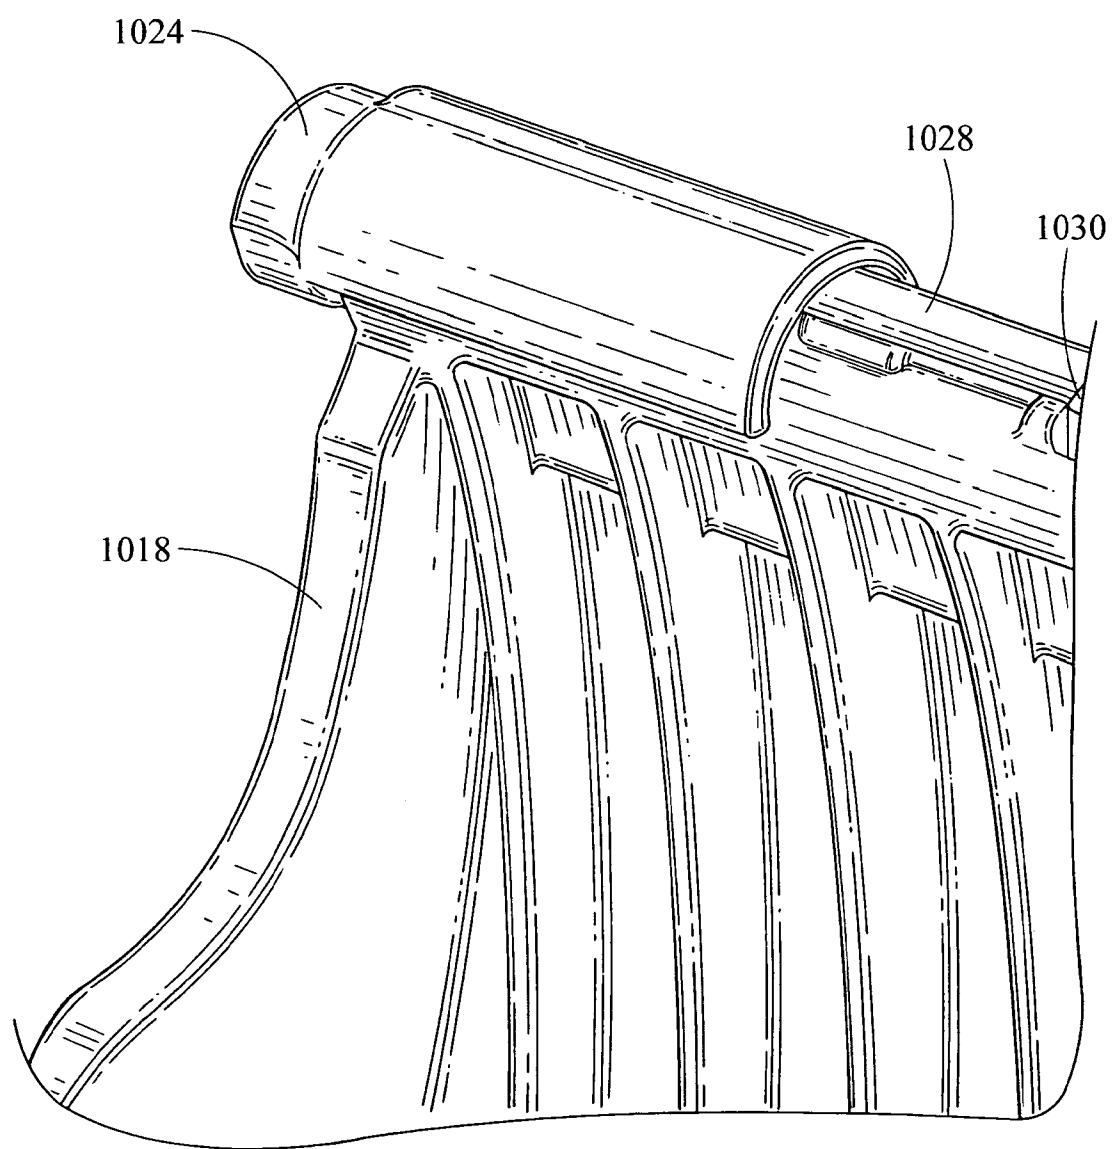
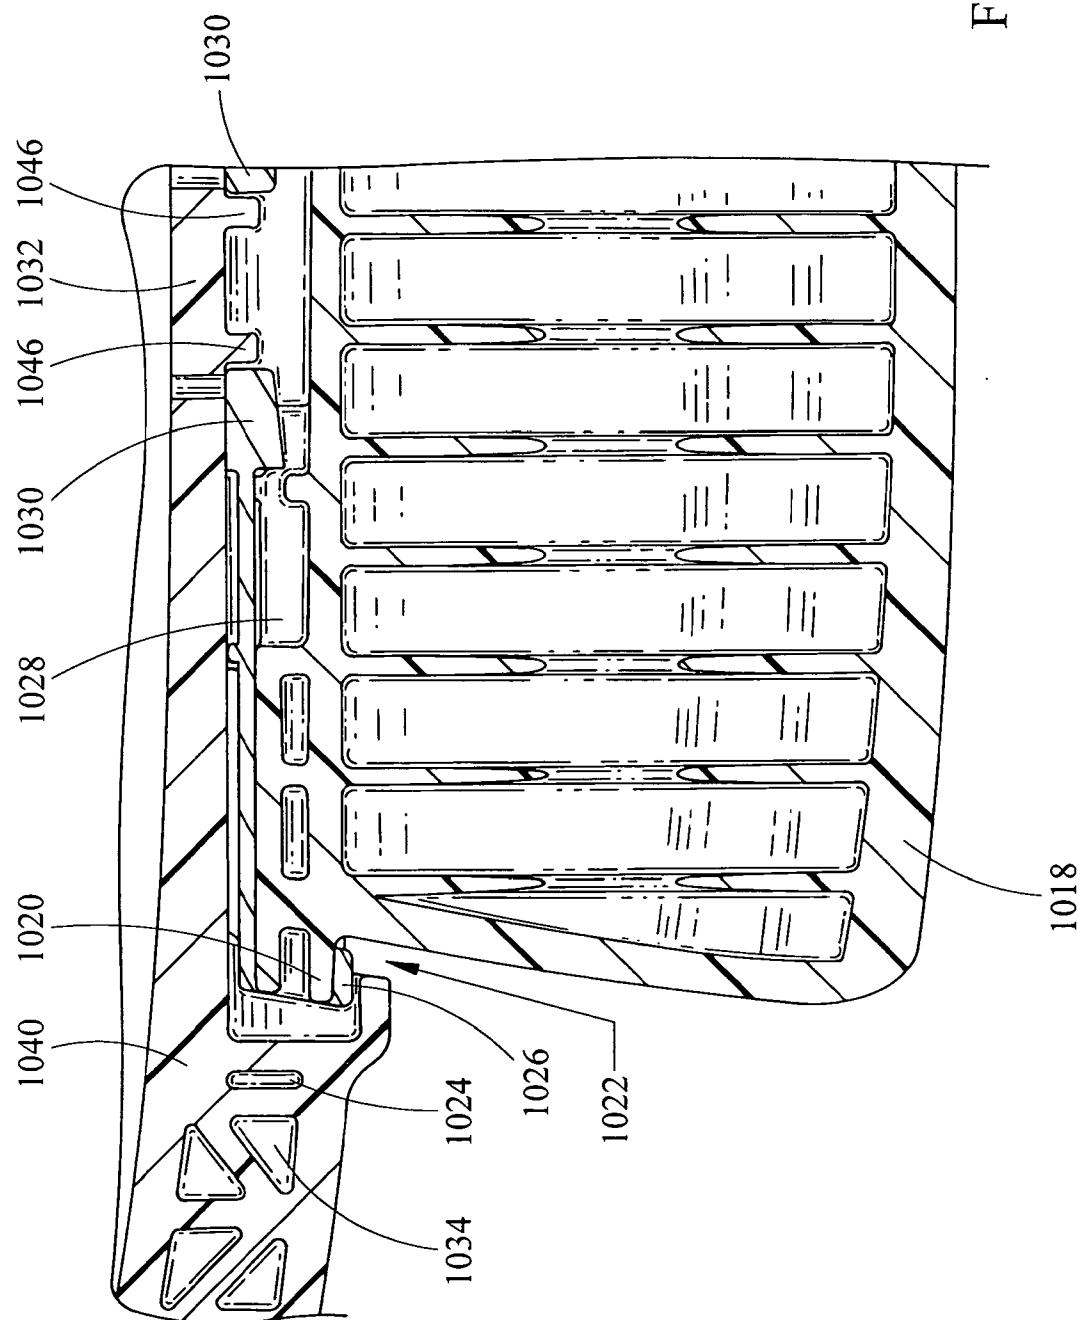


Fig. 98

Fig. 99



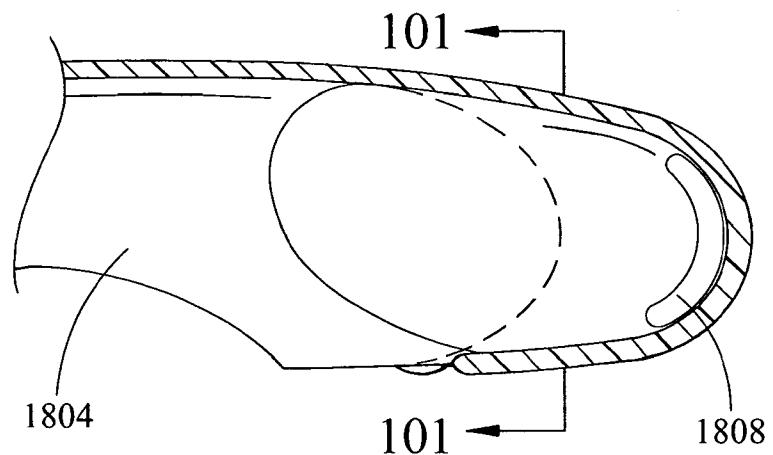


Fig. 100

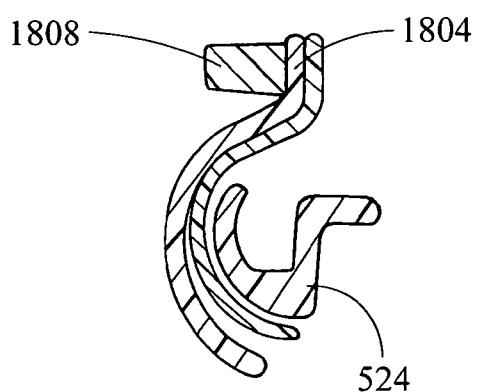


Fig. 101

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/052208

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47C7/14 A47C1/032

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A47C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 712 666 A (STOLL M) 23 January 1973 (1973-01-23) the whole document	1-3, 55, 56
A	GB 2 092 438 A (KUHN KURT JOSEF) 18 August 1982 (1982-08-18) the whole document	1
A	US 2002/180248 A1 (KINOSHITA YOJIRO [JP] ET AL) 5 December 2002 (2002-12-05) abstract; figure 22	1, 4, 55, 57



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

17 June 2008

Date of mailing of the international search report

04/07/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Alff, Robert

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2008/052208

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: 16-54, 62-89 because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this International search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this International search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this International search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 16-54,62-89

The present application contains 89 claims, of which 20 are independent. There is no clear distinction between the independent claims because of overlapping scope. There are so many claims, and they are drafted in such a way (no reference signs, Rule 6.2(b) PCT; inconsistent terminology, Rule 10.2 PCT) that the claims as a whole are not in compliance with the provisions of clarity and conciseness of Article 6 PCT, as it is particularly burdensome for a skilled person to establish the subject-matter for which protection is sought. The non-compliance with the substantive provisions is to such an extent, that the search was performed taking into consideration the non-compliance in determining the extent of the search (PCT Guidelines 9.19 and 9.25).

The search was based on the subject-matter that, as far as can be understood, could reasonably be expected to be claimed later in the procedure, namely claims 1-15 and 55-61.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.2), should the problems which led to the Article 17(2)PCT declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/052208

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 3712666	A	23-01-1973	AT BE CH DE FR GB NL	301789 B 760088 A1 500688 A 2057980 A1 2072977 A5 1318950 A 7018265 A		25-09-1972 17-05-1971 31-12-1970 24-06-1971 24-09-1971 31-05-1973 21-06-1971
GB 2092438	A	18-08-1982	DE FR	3103752 A1 2498908 A1		02-09-1982 06-08-1982
US 2002180248	A1	05-12-2002	DE WO	10194640 T5 0232262 A1		30-11-2006 25-04-2002