
(12) PATENT ABRIDGMENT (11) Document No. AU-B-49373/90
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 609347

(54) Title
FACSIMILE COMMUNICATION WITH PROGRAMMED STORAGE/PRINTING FACILITY

International Patent Classification(s)
(51)^s **H04N 001/32 H04N 001/21 H04N 001/27**

(21) Application No. : **49373/90** (22) Application Date : **08.02.90**

(30) Priority Data

(31) Number (32) Date (33) Country
309586 10.02.89 US UNITED STATES OF AMERICA

(43) Publication Date : **16.08.90**

(44) Publication Date of Accepted Application : **26.04.91**

(71) Applicant(s)
AMERICAN TELEPHONE AND TELEGRAPH COMPANY

(72) Inventor(s)
ALEXANDER CARLYLE GILLON; ADAM VICTOR REED; JOHN MICHAEL SCANLON

(74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001

(56) Prior Art Documents
US 4769719
AU 560996 44620/85 H04N 1/32
AU 568732 40703/85 H04N 1/32

(57) Claim

1. A method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps of

in response to receiving, from a facsimile source, an identification of a facsimile destination, establishing a connection from said source to said storage,

responsive to establishing said connection, transmitting the image signals over the connection from the facsimile source to the storage, and

transmitting the image signals over the network from the storage to the identified destination.

13. A communications network comprising
a first switch, comprising means for storing facsimile signals, for receiving and transmitting facsimile signals, and a second switch for connection to a source of facsimile signals, the second switch being controllable by a program for transmitting, in response

(11) AU-B-49373/90
(10) 609347

-2-

to determining that the source is a source of facsimile signals and in response to receiving signaling information from the source representing said destination indication, a destination indication and facsimile signals received from said source to said first switch, the first switch serving to store the facsimile signals for subsequent transmission to a third switch connected to a destination for the facsimile signals, said destination specified by said destination indication.

609347


S & F Ref: 118859

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

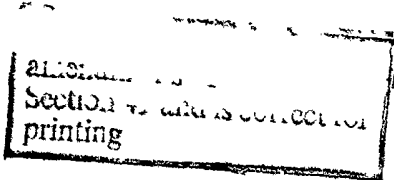

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

Name and Address
of Applicant:

American Telephone and Telegraph Company
550 Madison Avenue
New York New York 10022
UNITED STATES OF AMERICA

Address for Service:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

COMMUNICATIONS NETWORK FOR TRANSMITTING FACSIMILE SIGNALS". METHOD AND

The following statement is a full description of this invention, including the best method of performing it known to me/us



METHOD AND COMMUNICATIONS NETWORK FOR TRANSMITTING
FACSIMILE SIGNALS.

This invention relates to methods and communications networks for transmitting facsimile signals.

5 Use of facsimile (fax) machines for transmission of documents is expanding very rapidly. Most of this use of facsimile service is for low resolution (200 x 100 or 200 x 200 dots per inch) machines that are relatively inexpensive and that print their output on relatively low quality thermal paper. The data representing the image of the document is normally sent as analog data (9600 bits per second)
10 over conventional communications transmission facilities. The result is a serviceable moderate speed arrangement especially suitable for transmission of small quantities of documents between end users because the low cost of the fax machines makes it possible to distribute them widely among these end users. A disadvantage of this arrangement is that the calling and called terminals must be available
15 simultaneously.

At the same time, there is increasing interest in the use of high quality and quantity facsimile service for transmitting documents between much less widely distributed computers or personal computers equipped with facilities for generating high quality image output. For such systems, a high quality printer is used. The
20 resolution is improved to 400 x 400 dots per inch and the data is normally arranged to be transmitted over digital facilities at 56,000 or more bits per second. Printing is done by high resolution, high quality laser printers that are also used for producing text output from the computers they serve. Sometimes such computer systems further have associated data storage for storing an image that is to be transmitted to
25 one or more destinations. The computer systems can be adapted by special interface equipment to accept 9600 bit per second analog input data from low cost fax machines. However, such input requires that the special interface equipment be available, ties up the input thereto for the duration of the slower transmission, and makes that input unavailable to transmission from other low cost fax machines.

30 Facsimile systems with intermediate storage are available. When used with a common carrier, these systems are accessed by dialing a special number, plus the source and destination facsimile numbers. A facsimile message is then sent to the storage point from which the message is delivered at a later time when the equipment of the destination facsimile number is available. Such a system has the
35 disadvantage that a customer is forced to dial three numbers so that, in practice, the



customer only uses that service after having tried and failed to get a direct connection to the destination. For a widely used service with many short calls, use of such cumbersome procedures is a significant commercial drawback.

5 A problem of the prior art is that there are no convenient arrangements using standard procedures for transmitting documents efficiently from widely-distributed, inexpensive, standard-quality facsimile machines at any time to any receiver, including a receiver with an associated printing machine to achieve the kind of quality
10 printing that is only obtainable with expensive printers.

According to one aspect of this invention there is provided a method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps of in
15 response to receiving, from a facsimile source, an identification of a facsimile destination, establishing a connection from said source to said storage, responsive to establishing said connection, transmitting the image signals over the connection from the facsimile source to the storage, and transmitting the image signals
20 over the network from the storage to the identified destination.

According to another aspect of this invention there is provided a method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps
25 of in response to receiving from a communication source an identification of a communication destination, determining that the communication source is a source of facsimile image signals, in response to said determining, establishing a connection in the switched communications network from said source to said storage,
30 responsive to establishing said connection, transmitting the image signals over the connection from the facsimile source to the storage, and transmitting the image signals over the network from the storage to the identified destination.

According to a further aspect of this invention there is
35 provided a communications network comprising a first switch,



comprising means for storing facsimile signals, for receiving and transmitting facsimile signals, and a second switch for connection to a source of facsimile signals, the second switch being controllable by a program for transmitting, in response to
5 determining that the source is a source of facsimile signals and in response to receiving signaling information from the source representing said destination indication, a destination indication and facsimile signals received from said source to said first switch, the first switch serving to store the facsimile signals for
10 subsequent transmission to a third switch connected to a destination for the facsimile signals, said destination specified by said destination indication.

According to yet another aspect of this invention there is provided a method of transmitting facsimile image signals between a
15 plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps of dialing a number for identifying a facsimile destination, from a facsimile source into the network, determining that the source is a source of facsimile image signals, establishing a connection from
20 the facsimile source to the storage, transmitting the image signals from the facsimile source to the storage, transmitting a number representing the destination to the storage, transmitting a number representing the source of the facsimile image signal to the storage, transmitting a first message to a switch connected to the
25 destination, the message comprising a facsimile message received indication, responsive to reception of a second message from the switch connected to the destination, deferring transmission of the image signals from storage, responsive to reception of a third message from the switch connected to the destination, transmitting
30 the image signals from storage to the facsimile destination, and transmitting a fourth message from the storage to the source, identified by the number representing the source, the fourth message comprising data confirming the transmitting to the destination.

In an exemplary embodiment of the invention a facsimile call
35 set up by dialing only a destination number is automatically routed



to data storage facilities of a switched network, and the stored facsimile data is transmitted therefrom to a facsimile destination. The switched network can be a private switched network, a public switched network or a private branch exchange (PBX). The source is

5 recognized by a switch connected to that source to be a facsimile source so that the call may be routed to the data storage.

Advantageously, such an arrangement permits users to use a standard facsimile procedure and relatively inexpensive, widely distributed optical scanners for transmitting a document at one speed and

10 permits the output to be transmitted to a destination at a different speed, frequently higher, and/or a different protocol. The output can be printed at a smaller number of concentrated high quality printers whose high cost can be readily absorbed because they are available anyway for the computers that they serve and because each

15 serves a plurality of users. Advantageously, transmission of an image can be carried out conveniently at any time and does not depend upon the immediate availability of the receiving equipment. Advantageously, retransmission from the transmitter does not tie up the receiving equipment.

20 The computers associated with the printers may be connected to a digital network using the digital communications protocol (DCP) or the integrated services digital network (ISDN) facilities for transmitting and storing the facsimile signal. Advantageously, such an arrangement permits these computers and their associated printers

25 to receive data at a 64 kilobit per second data rate characteristic of the ISDN standard B-channels even when the data is originally transmitted at a lower rate, for example, from an optical scanner connected to the public network by analog facilities.

Advantageously, such a data switching arrangement can further be

30 arranged to distribute a facsimile document to a plurality of destinations with only one transmission from any source, such as a 9600 bit per second simple facsimile machine. Advantageously, such a data switching arrangement can be used to store data until the interface to computers associated with the high quality printers are

35 available to receive data from the data switching system for



printing the document represented by the facsimile signals. Advantageously, transmission to storage may take place at one bit rate, for example, 9600 bits per second, and transmission from storage to the destination may take place at a different bit rate, for example, 64 Kbits per second.

The storage facilities may be directly accessed within a PBX. Advantageously, the storage facilities of that PBX are used for storing facsimile data from other PBX's or terminals connected directly or via a network, and for retransmitting that data at an appropriate time to another terminal.

Facsimile image signals may be transmitted from facsimile sources using a simple standard user interface to facsimile destinations over a switched network comprising data storage facilities for use as needed to provide the desired data transmission speed and the desired distribution to the facsimile users.

The invention will now be described by way of example with reference to the accompanying drawings, in which:

FIG. 1 is a block diagram of an exemplary system for offering facsimile service;

FIG. 2 is a block diagram of an exemplary system for interfacing a digital storage unit with the system of FIG. 1; and

FIGS. 3-5 are flow diagrams of a method of communicating facsimile data in accordance with the invention.

FIG. 1 is a block diagram of a system for practicing applicants' invention. A source of facsimile signals 110 is connected by an output bit stream operating at 9.6, 56, 64, or 128 kilobits per second. The source of the signals is one of a fax transceiver 112, a fax scanner 114 which can only be used as a transmitting device, or a processor 120 equipped with an interface 122. The processor is a personal computer such as the AT&T WGS 6300. The function of interface 122 is to send and receive digital facsimile data. This interface may be an AT&T PC-FAX CONNECTION card, which can send and receive digital facsimile data at rates up to 9.6 Kbps using modulation compatible with the ISO Group 3 telefacsimile standard



over analog facilities; and/or an AT&T PC-PBX CONNECTION CARD, which can send and receive digital data at rates up to 64 Kbps over one DCP channel; and/or an AT&T PC-ISDN CONNECTION card, which can send and receive digital data at rates up to 128 Kbps over one, two, or all three channels of an ISDN Basic Rate
5 (BRI) Interface; and/or any other interface capable of sending and receiving digital data. The processor is provided with an interface 122. In addition, the processor is connected to storage 124 which is used for storing facsimile as well as other data.

The 9.6 kilobit output is the standard bit rate for transmitting facsimile signals over an analog facility. 56 kilobit signals are used for transmitting data over
10 digital facilities such as the AT&T ACCUNET Switched Digital Service. 64 or 128 kilobit transmission is provided by the use of one or two B-channels of an integrated services digital network (ISDN) or of a Digital Communications Protocol (DCP) facility.

The fax source is connected via a transmission facility to a switch with
15 storage and interface 160, either directly or through any number of intervening switches. In the example shown, the fax source is connected via a transmission facility to a local switch 140 or, alternatively, is connected through a PBX 130 to either a local switch 140 or directly to a toll switch 142. The local switch 140 is connected to the toll switch 142. Automatic number identification (ANI) facilities in
20 local switch 140 are used to identify the number of the facsimile source, and to forward this number to toll switch 142; the ANI number is then forwarded to toll switch 144 via a common channel signaling (CCS) message. When a fax call is recognized, the fax signal is sent from this toll switch 142 to a second toll
25 switch 144. The second toll switch 144 comprises a switching network 158 and storage and interface 160. The storage and interface 160 is shown in detail in FIG. 2. Thus, facsimile signals from the facsimile source 110 are connected through local switch 140, and toll switches 142 and 144 to the storage and interface of toll switch 144. Each of the switches 140, 142, 144, 146 and 148 comprises a program controlled processor, 141, 143, 145, 147 and 149, respectively, each processor
30 comprising a program for controlling the processor and data storage. While in this specific embodiment of the invention a distinction is made between local switches, toll switches and PBX's, in alternative embodiments, functions performed herein in a local or toll switch may be performed within a PBX.

The advantage of sending facsimile signals to storage as opposed to a
35 destination include the following:

1. If retransmission is required, the terminating facsimile machine is not involved.

2. The transmission to storage is at the bit rate of the facsimile source and the facility connecting that source to the local switch. If the facsimile destination requires or can accept a different bit rate then this latter bit rate may be used in transmitting facsimile data from storage to a destination.

3. If the destination is unavailable, the facsimile signals can be stored until the destination becomes available.

The contents of the storage and interface 160 are subsequently transmitted to a toll switch 146, thence to local switch 148, and finally to a facsimile destination 161. Again, a PBX or any number of switches, or no switches may be interposed, either between the toll switch 146 and the facsimile destination, or between the local switch 148 and the facsimile destination 161. The facsimile destination 161 may be a facsimile transceiver 162 or a processor 170 connected to the transmission facility via an interface 172. The interface 172 is the same type of interface as interface 122. The processor is connected to a printer 174 for printing the received facsimile image and to storage 176 in case it is desired to store either instead of printing or in addition to printing the facsimile image.

Common channel signaling (CCS) network 180 is used to send signaling messages among switches 142, 144, 146, and 148. A connection from CCS network 180 to local switch 140 is also provided in some cases, but in the specific embodiment of this example, is not provided. In this example, toll switch 142 performs the originating switch functions described in FIG. 3, and local switch 148 performs the terminating functions described in FIG. 5.

An additional advantage of sending facsimile signals to storage is that if additional data for specifying a plurality of destinations is provided, the facsimile signals can be sent from storage to that plurality of destinations whenever they become available.

FIG. 2 is a detailed diagram of storage and interface 160. Facsimile signals come into toll switch 144 via an incoming trunk 220 connected to toll switch 142; facsimile signals leave toll switch 144 via an outgoing trunk 240 connected to toll switch 146. Either incoming trunk 220 or outgoing trunk 240 or both may be two-way trunks. The trunks are connected to storage and interface unit 160 via the switching network 158 of toll switch 144. Incoming signals are directed to an incoming spooler 230. The spooler comprises a facsimile receiver front end for interfacing with facsimile signals and for receiving and generating the

proper protocol signals for establishing communications with a facsimile transmitter of facsimile source 110. The received facsimile signals are passed by facsimile receiver front end 232 to buffer storage and thence via a direct memory access unit to a bulk storage disk 210. Similarly, the contents of bulk storage disk 210 are
5 transmitted via an outgoing spooler 250 via network 158 to outgoing trunk 240 which is connected to toll switch 146. The outgoing spooler 250 comprises a direct memory access unit for interfacing between the disk and a buffer storage 254 and a facsimile transmitter front end 256 for taking the output of buffer storage 254 and transmitting the contents of this buffer storage to outgoing trunk 240. The facsimile
10 transmitter or receiver front end performs the same functions as the front end of a full conventional facsimile transmitter or transceiver; it generates the protocol signals for establishing a channel to a facsimile destination 161 or source 110, and performs all the other functions specified in the International Standards Organization (ISO) Group 3 Telefacsimile standard, except for taking outgoing data from
15 storage 160 instead of scanning it from paper and storing incoming data in storage 160 instead of printing it on paper. This front end is a computer system incorporating the AT&T PC-FAX CONNECTION card and its associated software, or can be any other system performing these functions.

In addition, storage and interface unit 160 comprises an optional
20 protocol converter for converting between different facsimile protocols, for example, for converting between Group 3 and Group 4 facsimile protocol. The output of the disk is received by direct memory access unit 272 and stored in buffer 274. The contents of the buffer are decoded from the incoming protocol by decoder 276 and stored in full image form in buffer 278. The contents of buffer 278 are then re-
25 encoded in the outgoing protocol in encoder 280 for storage in buffer 282 and the contents of buffer 282 are stored via direct memory access unit 284 back into disk 210 in the changed protocol format.

FIG. 3 is a flow diagram of the actions performed in an originating switch. These actions may be performed either in the local switch 140 or toll
30 switch 142. In a private network these actions can be performed in a PBX switch. If local switch 140 is equipped with access to the common channel signaling network 180, then the actions of FIG. 3 are performed in local switch 140. Otherwise, and in this specific example, they are performed in toll switch 142 which is connected to CCS network 180. The fax call request is received (action
35 block 302). If the call request contains data indicating that this is a fax call, then the result of test 304 is that fax is recognized and a connection is set up to the fax

storage 160 (action block 306). The fact that this is a fax call can be recognized from the class of service of the calling customer's line. Alternatively, a code could be supplied with the call to identify that this is a fax call. If fax is not recognized in test 304 then a CCS message is sent to set up the call (action block 310). If this is a
5 fax call, then a response is received to the CCS message sent in action block 310 that, identifying the call as a fax call (action block 312), and a connection is set up to facsimile storage (action block 306).

FIG. 4 is a group of flow diagrams for actions performed in the storage switch, in this case, toll switch 144. In other networks, a local or tandem switch can
10 contain the storage. In a private network, this storage can be contained in a PBX switch. An incoming fax call is received (action block 402). The call comprises the identification of the destination, provided by the dialed directory number, the source identification, provided by automatic number identification (ANI) from the local switch, and the facsimile signals. All of these are stored. The incoming trunk 220
15 associated with this call is connected to an incoming spooler 230 for storage in disk 210. After the facsimile message has been received, a message received indication is sent to the terminating switch (action block 406) via the CCS network 180.

If toll switch 144 receives a request to defer transmission of a particular
20 facsimile message (action block 420), this message is logged in and placed in longer term storage (not shown) for retransmission in response to a later request (action block 422).

When toll switch 144 receives a request to transmit a message (action
25 block 440) the message is placed in appropriate storage if it has been previously placed in long term storage (action block 442), and an outgoing trunk 240 for connection to the facsimile destination is connected to outgoing spooler 250 (action block 444). The request message comprises an indication of the protocol used for communicating with the destination. The facsimile message is then transmitted to a facsimile destination (action block 446). The message is transmitted at the speed,
30 e.g., 9.6 or 56 kb/sec., and protocol requested by the facsimile destination. A confirmation message is then transmitted to the facsimile source, identified from the ANI data previously stored, if the transmitting spooler front end receives a confirmation from the destination (action block 448).

FIG. 5 comprises a group of flow diagrams of actions performed in the
35 terminating switch. The terminating switch in this example is local switch 148 which has access to the CCS network 180. In a private network, this switch can be a

PBX switch. A call request is received over CCS network 180 (action block 502). The call request comprises the directory number of the terminating customer, which terminating number is translated (action block 504). The results of the translation are examined in test 506 to see if the call is a facsimile call. If the result of test 506 is positive, then a facsimile indication message is sent to the controlling originating switch (action block 508), in this particular case toll switch 142, so that that switch can arrange to set up a connection to toll switch 144 to allow the facsimile message to be stored. If this is not a facsimile call, (negative result of test 506) then the call is processed conventionally and such conventional processing (action block 510) is not part of this invention.

After transmission of a facsimile message to facsimile storage has been completed, the toll switch 144 sends a message to the terminating switch as previously described with respect to action block 406. This message is received (action block 520) in the terminating switch. The terminating switch translates the directory number to find the facsimile destination (action block 522). This facsimile destination need not be associated with the terminating customer but may be a destination such as a computer used to serve a number of terminating customers. However, another output of the translation is the address of a customer station which can be alerted that a facsimile message has been received in network storage. For such customers, a light on the customer terminal can be turned on (action block 524) in order to advise the customer of the received message. The terminating switch then queries the customer whether the customer wants the facsimile message printed (test 526). If not, a CCS message is sent to facsimile storage in toll switch 144 to retain the message rather than transmitting it; in response toll switch 144 performs the actions previously described with respect to action blocks 420 and 422. If the user wants the fax message printed, then the terminating facsimile machine is polled to see if it is available (action block 542). When the terminating facsimile machine is or becomes available (action block 544), a connection is set up between toll switch 144 and the facsimile destination (action block 546). The connection message identifies the fax message in order to make sure that the right message is retrieved from storage and sent. This message is identified to toll switch 144. Toll switch 144 then sends the facsimile message from storage to the facsimile destination (action block 548).

The specific example described herein uses storage in a public switched network. However, the storage may be a part of a private network, either within a PBX switch, as shown by the insertion of



block 160 (indicated in dashed lines to show that it is an alternative embodiment) within PBX 130 (FIG. 1), or within a switch 184 of a private network 182 used for interconnecting PBX's 130 and 150. A terminal such as terminal 186 can also be directly connected to such private network 182.

- 5 In alternative embodiments of the invention, the network can first try to establish a direct connection, and revert to the connection to storage if the destination is not available, or if the class of the destination is such that a transmission speed change is desirable. Such an arrangement would save on costs of spoolers for the storage system and save some storage, but would have the
- 10 disadvantage that one of the terminals would be tied up unnecessarily if retransmission from or to the other terminal were required. Further, a terminal such as processor interface 172 might be occupied for the duration of a 9600 bit per second transmission instead of accepting data at 64 or 128 kilobits per second.

- 15 It is to be understood that the above description is only of one preferred embodiment of the invention. Numerous other arrangements may be devised by one skilled in the art .



The claims defining the invention are as follows:

1. A method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps

5 of

in response to receiving, from a facsimile source, an identification of a facsimile destination, establishing a connection from said source to said storage,

responsive to establishing said connection, transmitting the image signals over the connection from the facsimile source to the storage, and

transmitting the image signals over the network from the storage to the identified destination.

2. A method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the steps

15 of

in response to receiving from a communication source an identification of a communication destination, determining that the communication source is a source of facsimile image signals,

in response to said determining, establishing a connection in the switched communications network from said source to said storage,

responsive to establishing said connection, transmitting the image signals over the connection from the facsimile source to the storage, and

transmitting the image signals over the network from the storage to the identified destination.

3. A method as claimed in claim 1 or 2 comprising the steps

30 of

transmitting an identification representing the source of the facsimile image signal to the network, and

following the step of transmitting to the destination, transmitting a message to the source, identified by the

35 identification representing the source, the message comprising



confirmation of the transmitting to the destination.

4. A method as claimed in claim 1, 2 or 3 comprising the steps of transmitting a first message from said storage to a switch connected to the destination, the message comprising a facsimile message received indication, and

5 responsive to reception of a second message from the switch connected to the destination, deferring transmission of the image signals from storage.

10 5. A method as claimed in claim 4 comprising the step of responsive to reception of a third message from the switch connected to the destination, transmitting the image signals from storage to that switch.

15 6. A method as claimed in claim 1 wherein the step of establishing a connection comprises determining that the destination is a destination for facsimile image signals.

7. A method as claimed in claim 6 wherein the determining step comprises the step of receiving a message from a switch of said network identifying said destination as a facsimile destination.

20 8. A method as claimed in claim 1 or 2 wherein the step of establishing a connection comprises the step of establishing the connection in a public switched network.

9. A method as claimed in claim 8 further comprising the steps of identifying the source, and

25 transmitting signals representing an identification of the source to the storage.

10. A method as claimed in claim 9 comprising the steps of transmitting the image signals from storage to the destination, and

30 following said transmitting to the destination, transmitting a confirmation message to the facsimile source.

35 11. A method as claimed in any preceding claim wherein the step of transmitting the image signals from storage comprises the step of converting the protocol of image signals received from the facsimile source to a different protocol for image signals to be transmitted to the facsimile destination.



12. A method as claimed in any preceding claim wherein the step of transmitting to the destination comprises the step of transmitting to the destination at a data rate different from the data rate used for transmitting to storage.

5 13. A communications network comprising
a first switch, comprising means for storing facsimile signals, for receiving and transmitting facsimile signals, and a second switch for connection to a source of facsimile signals, the second switch being controllable by a program for transmitting, in response
10 to determining that the source is a source of facsimile signals and in response to receiving signaling information from the source representing said destination indication, a destination indication and facsimile signals received from said source to said first switch, the first switch serving to store the facsimile signals for
15 subsequent transmission to a third switch connected to a destination for the facsimile signals, said destination specified by said destination indication.

14. A network as claimed in claim 13 wherein said first switch comprises means for receiving said facsimile signals at one
20 data rate and for transmitting said facsimile signals at a different data rate.

15. A network as claimed in claim 13 or 14 wherein said first switch comprises means for converting said facsimile signals received in one protocol to said facsimile signals transmitted in a
25 different protocol.

16. A network as claimed in claim 13, 14 or 15 wherein said second switch is controllable by said program for determining an identification of said source and for transmitting said
30 identification to said first switch, said first switch being responsive to receiving said identification of said source for transmitting a confirmation message to said source after transmitting said facsimile signals to said destination.

17. A method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a
35 switched communications network having storage, comprising the steps



of prior to establishing said connection from said source to said storage, in response to receiving from said source said identification of said destination, determining whether said destination is available,

5 if it is determined that said destination is available, establishing a connection to said destination for transmission of said image signals from said source to said destination, and if it is determined that said destination is not available, establishing said connection to said storage.

10 21. A method as claimed in claim 20 wherein said step of establishing a connection to said destination comprises the steps of determining if said destination accepts signals at the transmission rate of said image signals from said source, and if said determining of acceptance of signals is positive, and
15 it is determined that said destination is available, establishing said connection to said destination.

22. A method of transmitting facsimile image signals between a plurality of facsimile sources and facsimile destinations via a switched communications network having storage, comprising the step
20 of responsive to receipt of an identification of a facsimile destination from a facsimile source, establishing a connection over said network from said source to said storage for storage of said image signals.

23. A method as claimed in claim 22 wherein said establishing
25 step comprises establishing a connection from said source to said destination for direct delivery of said image signals and to said storage for subsequent delivery of said image signals.

24. A method as claimed in claim 22 comprising the steps of storing said image signals in said storage, and
30 following said storing step, delivering said image signals to said destination over said network.

25. A method as claimed in claim 24 wherein said establishing
step comprises responsive to a calling facsimile station dialing only a
35 number identifying said facsimile destination, receiving said identification at a switching office.



26. A method of transmitting facsimile signals between a plurality of facsimile sources and facsimile destinations substantially as hereinbefore described with reference to the drawings.

5 27. A communications network substantially as hereinbefore described with reference to the drawings.

DATED this FOURTEENTH day of JANUARY 1991
American Telephone and Telegraph Company

Patent Attorneys for the Applicant
SPRUSON & FERGUSON

10

15

20

25

30

35

HRF/0533r



49373/90

1/5

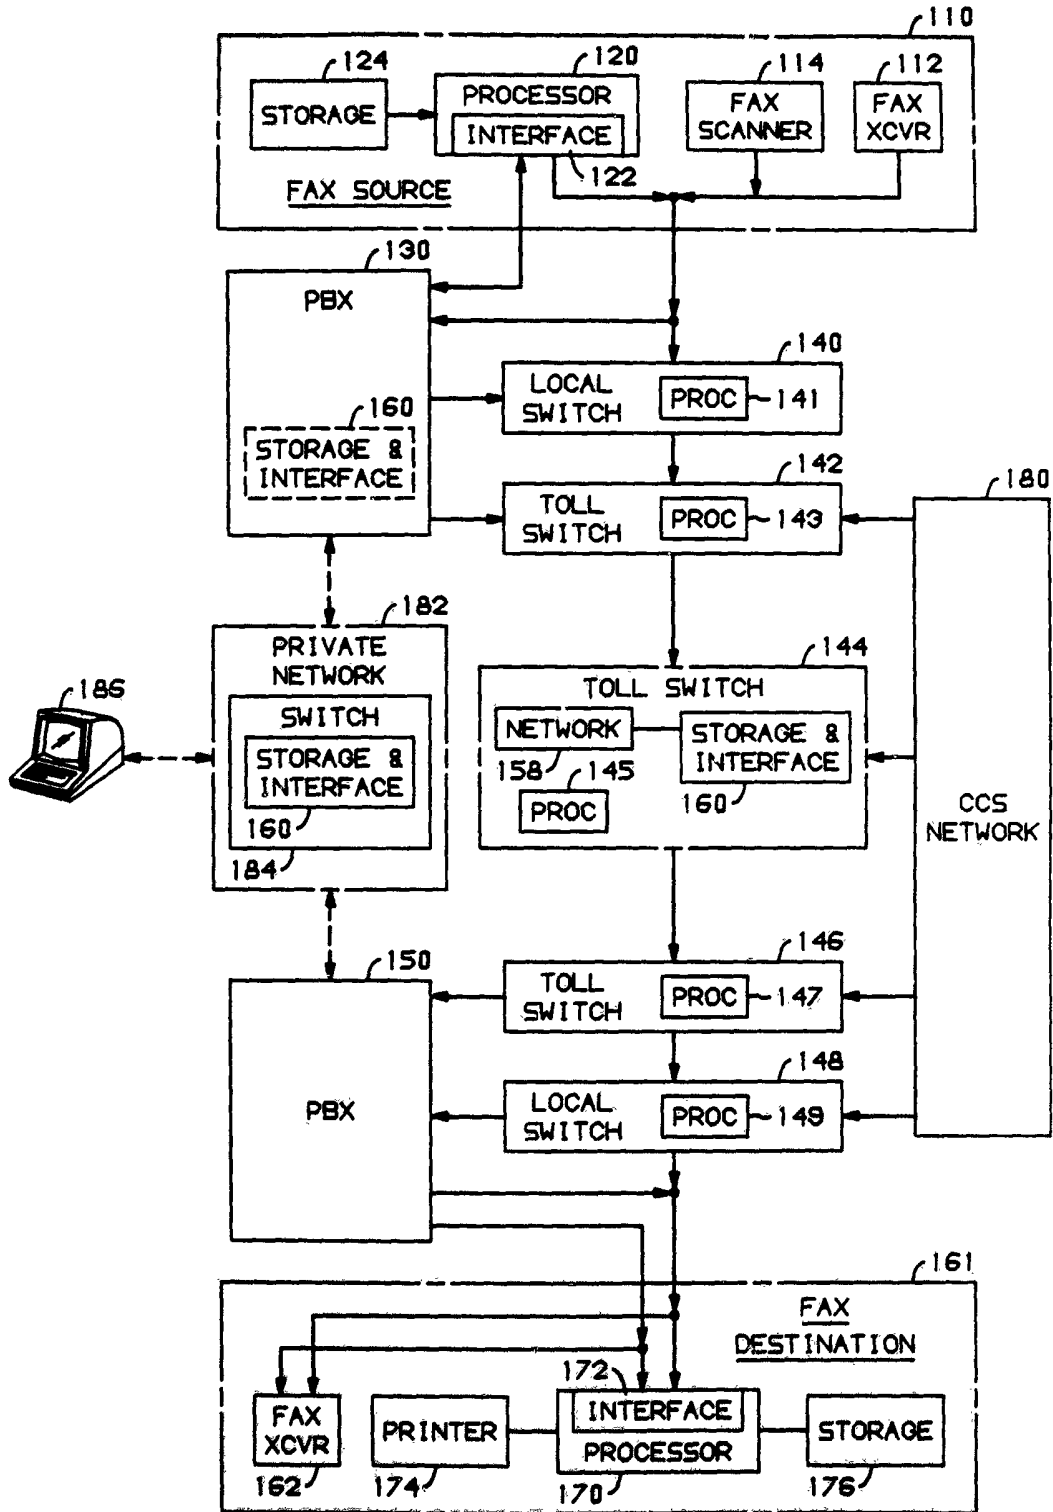


FIG. 1

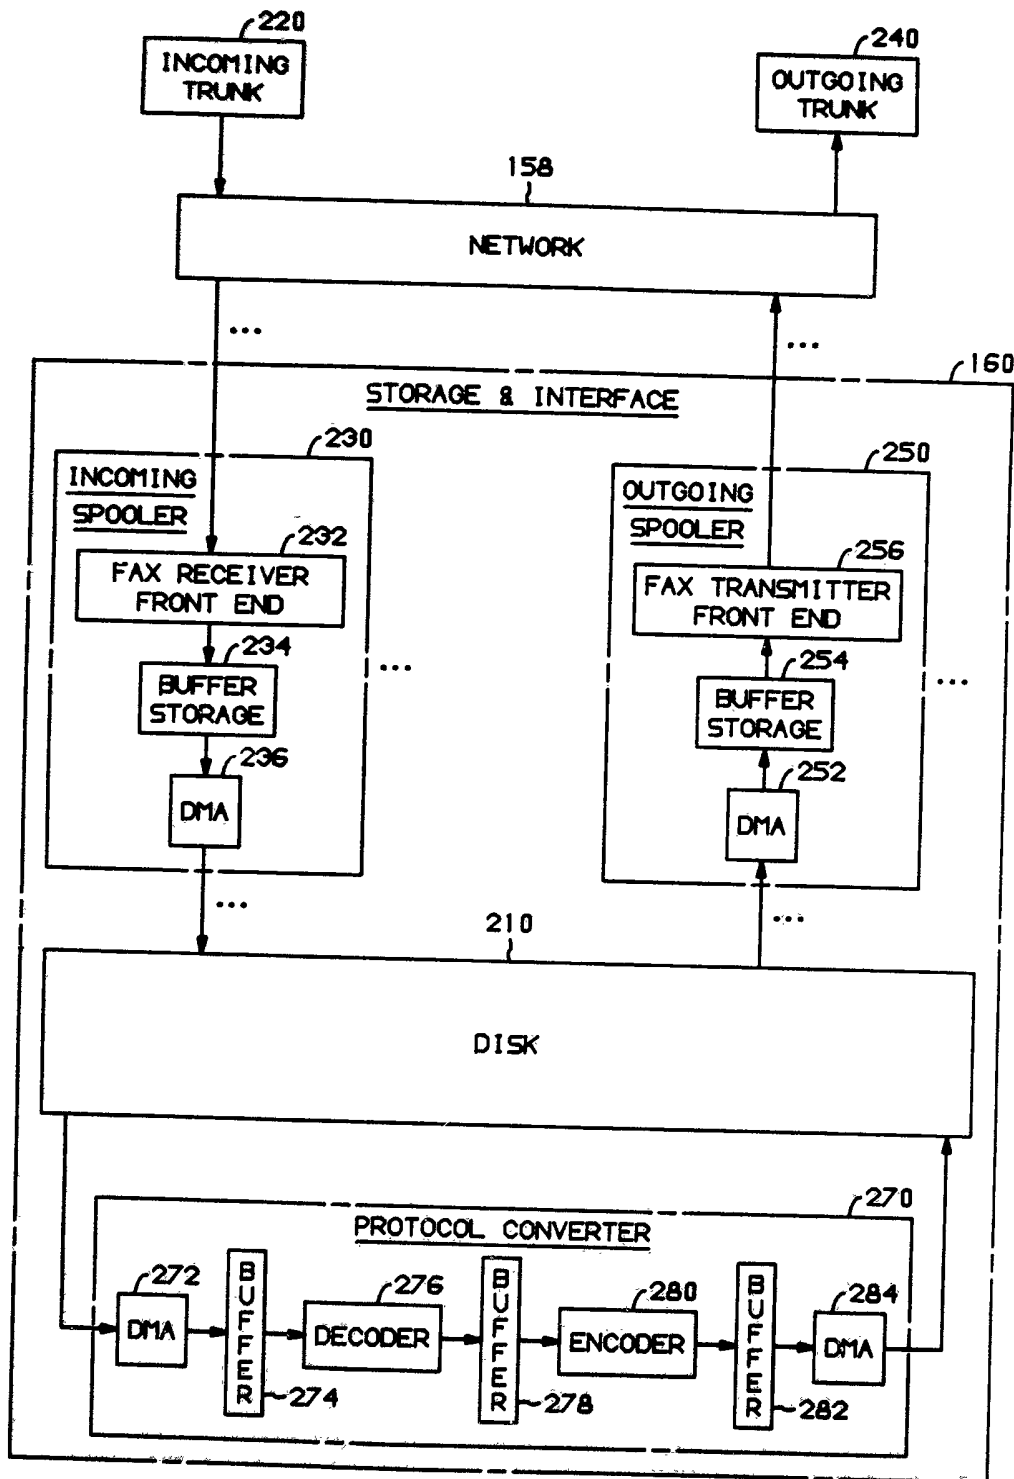


FIG. 2

FIG. 3
ORIGINATING SWITCH ACTIONS

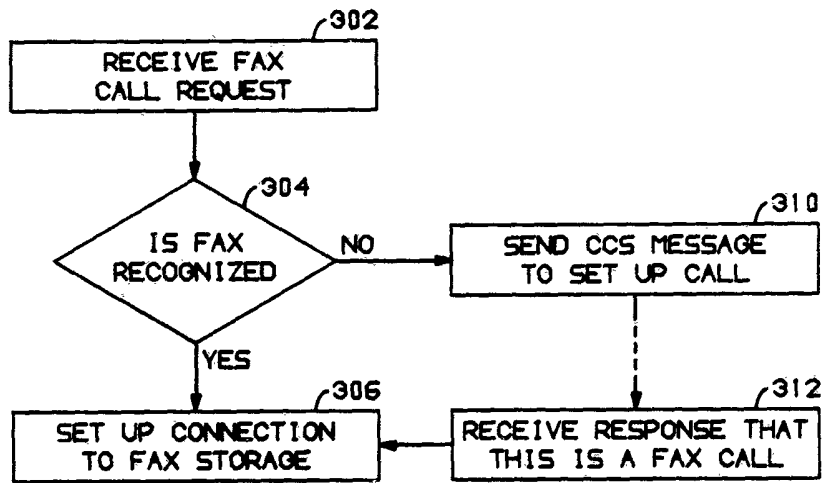


FIG. 4
STORAGE SWITCH ACTIONS

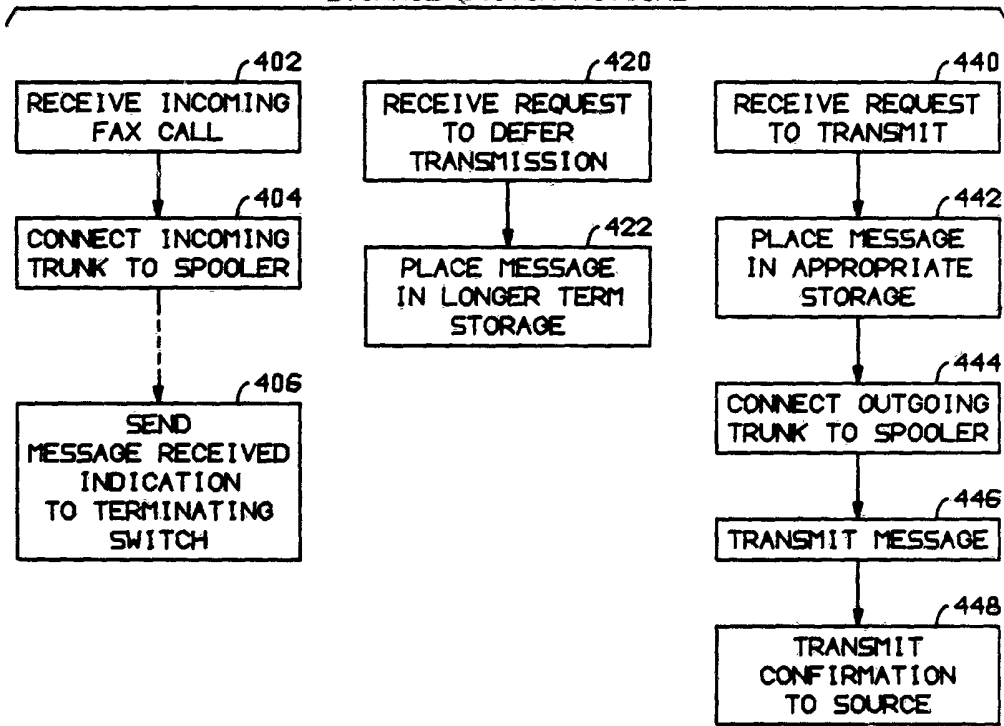


FIG. 5

TERMINATING SWITCH ACTIONS

