



- (51) **International Patent Classification:**
E21B 47/024 (2006.01) *E21B 47/12* (2012.01)
E21B 47/09 (2012.01)
- (21) **International Application Number:**
PCT/US2013/078424
- (22) **International Filing Date:**
31 December 2013 (31.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventor:** LANGE, Gustav, Edward; RR 2, Millet, Alberta T0C 1Z0 (CA).
- (74) **Agents:** PRATT, John, S. et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) **Title:** BEND MEASUREMENTS OF ADJUSTABLE MOTOR ASSEMBLIES USING INCLINOMETERS

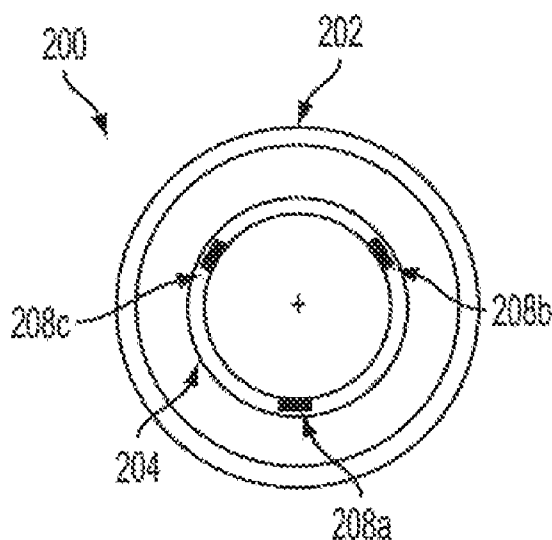


FIG. 2B

- (57) **Abstract:** A wellbore assembly is provided that can include a first motor housing assembly member and a second motor housing assembly member that can bend relative to the first motor housing assembly at a bend location. The assembly can also include a first inclinometer positioned on a first side of the bend location to determine a first inclination and a second inclinometer positioned on a second side of the bend location to determine a second inclination. Based on the first and second inclinations, the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member can be determined.





Published:

— *with international search report (Art. 21(3))*

BEND MEASUREMENTS OF ADJUSTABLE MOTOR ASSEMBLIES USING INCLINOMETERS

Technical Field

[0001] The present disclosure relates generally to devices for use in well systems. More specifically, but not by way of limitation, this disclosure relates to measuring a bend of an adjustable motor assembly using one or more inclinometers.

Background

[0002] A well system (e.g., oil or gas wells for extracting fluids from a subterranean formation) can include a drill string for forming a wellbore. A drill string can include a bottom hole assembly with a drill bit, stabilizers, a downhole motor, or other components.

[0003] A drill string can be used to drill a directional (or deviated) wellbore that is not vertical in its entirety. Directional wellbores can enhance production of the wellbores. To obtain an angle of inclination to drill directional wells, downhole drilling motors can include adjustable housing assemblies. An adjustable housing assembly can allow the drill operator to change the inclination of a housing assembly without replacing the entire bent housing section. An amount of bend downhole of an adjustable housing assembly can be challenging to obtain.

Brief Description of the Drawings

[0004] FIG. 1 is a cross-sectional side view of one embodiment of a system that can include an adjustable motor assembly for which bend measurements can be determined using inclinometers according to one aspect of the present disclosure.

[0005] FIG. 2A is a cross-sectional side view of one embodiment of an assembly for determining bend measurements of an adjustable motor assembly using inclinometers according to one aspect of the present disclosure.

[0006] FIG. 2B is a cross-sectional end view of the embodiment in FIG. 2A in which there are multiple inclinometers positioned around the circumference of a mandrel according to one aspect of the present disclosure.

[0007] FIG. 2C is a cross-sectional side view of the embodiment in FIG. 2A in which there are multiple inclinometers positioned around the circumference of a mandrel according to one aspect of the present disclosure.

[0008] FIG. 3 is a cross-sectional side view of another embodiment of an assembly for determining bend measurements of an adjustable motor assembly using inclinometers in which the inclinometers are positioned on a rotating shaft according to one aspect of the present disclosure.

[0009] FIG. 4A is a cross-sectional side view of another embodiment of an assembly for determining bend measurements of an adjustable motor assembly using inclinometers in which there is no bend in the adjustable motor assembly according to one aspect of the present disclosure.

[0010] FIG. 4B is a cross-sectional side view of the embodiment in FIG. 4A in which there is a bend in the adjustable motor assembly according to one aspect of the present disclosure.

[0011] FIG. 5 is an example of a flow chart of a process for determining bend measurements of an adjustable motor assembly using magnetometers according to one embodiment.

[0012] FIG. 6 is a block diagram depicting an example of a computing device for determining bend measurements of an adjustable motor assembly using inclinometers.

Detailed Description

[0013] Certain aspects and features of the present disclosure are directed to determining bend measurements of adjustable motor assemblies using inclinometers. The adjustable motor assembly can include a first motor housing assembly member. The adjustable motor assembly can further include a second motor housing assembly member. The second motor housing assembly member can be coupled to the first motor housing assembly member so that the first motor housing assembly member can bend relative to the second motor housing assembly member at a bend location in a wellbore. The adjustable motor assembly can also include a first inclinometer and a second inclinometer. In one embodiment, the first inclinometer can be positioned on the first motor housing assembly member to determine a first inclination. The second inclinometer can be positioned on the second motor housing assembly member to determine a second inclination.

[0014] In another embodiment, the adjustable motor assembly can further include a third motor assembly member located inside the first or second motor housing assembly members. The third motor assembly member can be a mandrel. In one such embodiment, a first inclinometer can be positioned on the third motor assembly member on a first side of a bend location to determine a first inclination. Likewise, the second inclinometer can be positioned on the third motor assembly member on a second side of a bend location to determine a second inclination. In another embodiment, the first inclinometer can be positioned on the first or second

motor housing assembly members to determine a first inclination. The second inclinometer can be positioned on the third motor assembly member to determine a second inclination. In some embodiments, the third motor assembly member can rotate around a rotation axis.

[0015] The inclination detected by the second inclinometer can change as the first motor housing assembly member bends relative to the second motor housing assembly member. The changed second inclinometer measurement can be used to determine the amount of bend or bend direction of the first motor housing assembly member relative to the second motor housing assembly member.

[0016] In one example, an adjustable motor assembly can be a part of a bottom hole drilling assembly deployed in a wellbore. The first and second motor housing assembly members can be drill motor housing assembly members of the adjustable motor assembly. A drill operator can cause the adjustable motor assembly to bend at a bend location in the wellbore such that a first motor housing assembly member bends relative to a second motor housing assembly member at the bend location. As the first housing member bends relative to the second housing member, the inclination of the second inclinometer can change. The measurements from the first inclinometer and second inclinometer can be used to determine the amount of bend and, in some embodiments, the bend direction of the first motor housing member relative to the second motor housing member. Assemblies according to some embodiments can allow the drill operator to confirm that the adjustable motor assembly is functioning properly or predict how the bottom hole assembly will perform in a formation.

[0017] These illustrative examples are given to introduce the reader to the general subject matter discussed here and are not intended to limit the scope of the

disclosed concepts. The following sections describe various additional features and examples with reference to the drawings in which like numerals indicate like elements, and directional descriptions are used to describe the illustrative aspects but, like the illustrative aspects, should not be used to limit the present disclosure.

[0018] FIG. 1 is a cross-sectional side view of one embodiment of a system 100 that can include an adjustable motor assembly 122 for which bend measurements can be determined using inclinometers. In this example, the system 100 is a well system (e.g., an oil or gas well for extracting fluids from a subterranean formation). The system 100 can include a wellbore 112 drilled out of a formation 120 from a surface 114. A drill string 124, which can contain a bottom hole assembly, for drilling can be located in the wellbore 112. The bottom hole assembly can include an upper connection 110, a power section 108, and a drill bit 102. The power section 108 can include a motor assembly 122 with an adjustable housing 104 that can bend at a bend location 106.

[0019] The system 100 can also include a computing device 116 for receiving a first inclinometer measurement, a second inclinometer measurement, a bend measurement, or a direction measurement. The computing device 116 can be positioned at the wellbore surface 114, below ground, or offsite. The computing device 116 can include a processor interfaced with other hardware via a bus. A memory, which can include any suitable tangible (and non-transitory) computer-readable medium such as RAM, ROM, EEPROM, or the like, can embody program components that configure operation of the computing device 116. In this example, the computing device 116 can further include input/output interface components and additional storage.

[0020] The computing device 116 can receive a first inclinometer measurement, a second inclinometer measurement, a bend measurement, or a direction measurement via a communication device 118. The communication device 118 can represent one or more of any components that facilitate a network connection. In this example, the communication device 118 is wireless and can include wireless interfaces such as IEEE 802.11, Bluetooth, or radio interfaces for accessing cellular telephone networks (e.g., transceiver/antenna for accessing a CDMA, GSM, UMTS, or other mobile communications network). In other embodiments, the communication device 118 can be wired and can include interfaces such as Ethernet, USB, or IEEE 1394.

[0021] In some embodiments, the computing device 116 can receive the amount of bend and bend direction via a communication device 118, or determine the amount of bend and bend direction, and compare it with a designated drilling trajectory. Should the amount of bend and bend direction need to be altered to conform with the designated drilling trajectory, the computing device 116 can cause the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

[0022] FIG. 2A is a cross-sectional side view of one embodiment of an assembly for determining bend measurements of an adjustable motor assembly 200 using inclinometers 206 and 208. The adjustable motor assembly 200 can include a housing 202 that can bend via an adjustable ring 210. The adjustable motor assembly 200 can include a mandrel 204 inside the housing 202. The adjustable motor assembly 200 can further include a first inclinometer 206 positioned on the mandrel 204 on a first side of a bend location 214 for determining a first inclination. Likewise, the second inclinometer 208 can be positioned on the mandrel 204 on a

second side of the bend location 214 for determining a second inclination. As the housing 202 bends, the inclination measured by the second inclinometer 208 can change. The changed measurement can be used to determine an amount of bend in or bend direction of the adjustable motor assembly 200.

[0023] The inclinometers 206 and 208 according to some embodiments can include an accelerometer. Inclinometers 206 and 208 according to other embodiments can include a capacitor, microelectromechanical systems (MEMS), a ball or bubble in liquid, a pendulum, a photodetector, a light-emitting diode, or an electrolytic fluid. In some embodiments, the inclinometers 206 and 208 can include multiple inclination or slope sensors and may be able to determine an angle of inclination in multiple dimensions. For example, inclinometers 206 and 208 may include a two-axis MEMS sensor, which senses acceleration caused by gravity in two orthogonal directions. Further, the inclinometers 206 and 208 may include one or more of a processor, a microcontroller, memory, a bus, or a filter. In some such embodiments, the filter can remove background vibrations or other noise from the inclinometer angle measurement.

[0024] In some embodiments, the first inclinometer 206 or second inclinometer 208 can include a communication device 212 for communicating with a computing device, e.g. computing device 116 depicted in FIG. 1. The communication device 212 can be internal or external to the inclinometers 206, 208. In such an embodiment, the computing device 116 can determine one or both of a bend direction and a bend amount based on changes in angles of inclination. In one embodiment, the computing device 116 can determine the angle of inclination of a motor housing assembly member with respect to gravity by determining an inclination angle measurement from inclinometers 206, 208. In another embodiment,

the computing device 116 can determine the angle of inclination of the second motor housing assembly member with respect to the first motor housing assembly member by determining a first set of inclination angle measurements at the respective inclinometers 206, 208. The computing device 116 can determine a first difference between the angle measurements of the respective inclinometers 206, 208. The computing device 116 can associate the first difference between angle measurements with a first bend amount (e.g., an absence of bending in any direction for an un-bent motor assembly 122) of the second motor housing assembly member with respect to the first motor housing assembly member. Further, the computing device 116 can determine a second set of inclination angle measurements at the respective inclinometers 206, 208 based on a bending of the motor assembly 122. The computing device 116 can determine a second difference between the angle measurements of the respective inclinometers 206, 208. A change in the difference between angle measurements can be used to determine a bend amount for the motor assembly 122.

[0025] In some embodiments, computing device 116 can further determine a bend direction. In one such embodiment, each inclination angle measurement from a respective one of the inclinometers 206, 208 describes an inclination angle in three dimensions. The computing device 116 can determine the bend direction of the first motor housing assembly member relative to the second motor housing assembly member by comparing the inclination angle measurements from the respective inclinometers 206, 208.

[0026] In other embodiments, each inclination angle measurement from a respective one of the inclinometers 206, 208 describes an inclination angle in one or two dimensions. In such an embodiment, multiple inclinometers can be positioned

around the circumference of the mandrel 204, as shown in FIG. 2B. FIG. 2B is a cross-sectional end view of the embodiment in FIG. 2A in which there are multiple inclinometers 208a-c positioned around the circumference of the mandrel 204. In some embodiments, such as the embodiment shown in FIG. 2B, multiple inclinometers 208a-c are equally spaced around the circumference of the mandrel 204. In other embodiments, multiple inclinometers 208a-c may be unequally spaced around the circumference of the mandrel 204. Further, in some embodiments, multiple inclinometers 208a-c may be equally or unequally spaced around the circumference of the housing 202.

[0027] As shown in FIG. 2C, multiple inclinometers 206a-b can be positioned on a first side of the bend location and multiple inclinometers 208a-b can be positioned on a second side of the bend location. Inclination measurements from different inclinometers 206a-b, 208a-b can be used to determine respective bend amounts in different planes. For example, a first difference between inclination measurements from 206a, 208a can identify a bend amount with respect to a first plane, and a second difference between inclination measurements from 206b, 208b can identify a bend amount with respect to a second plane. In such an embodiment, computing device 116 can combine the bend amounts from each inclinometer 206a-b, 208a-b to determine a bend direction of the first motor housing assembly member relative to the second motor housing assembly member.

[0028] FIG. 3 is a cross-sectional side view of another embodiment of an assembly for determining bend measurements of an adjustable motor assembly 300 using inclinometers 302, 304 in which the inclinometers 302, 304 are positioned on a rotating shaft. In such an embodiment, a first inclinometer 302 can be positioned on a rotating shaft 308 inside the housing 306 for determining a first inclination on a

first side of a bend location 310. The rotating shaft 308 can rotate around a rotational axis. Similarly, in some embodiments, second inclinometer 304 can be positioned on the rotating shaft 308 for determining a second inclination on a second side of the bend location 310.

[0029] As the shaft 308 rotates, the inclination angle measurements from inclinometers 302, 304 may change. In such an embodiment, the computing device 116 can determine one or both of a bend direction and a bend amount based on changes in angles of inclination. The computing device 116 can determine a first difference between the angle measurements of the respective inclinometers 302, 304 at any given point in the rotation cycle. The computing device 116 can associate the first difference between angle measurements with a first bend amount (e.g., an absence of bending in any direction for an un-bent motor assembly 122) of the second motor housing assembly member with respect to the first motor housing assembly member. Further, at the same point in the rotation cycle, the computing device 116 can determine a second set of inclination angle measurements at the respective inclinometers 302, 304 based on a bending of the motor assembly 122. The computing device 116 can determine a second difference between the angle measurements of the respective inclinometers 302, 304. A change in the difference between angle measurements can be used to determine a bend amount for the motor assembly 122.

[0030] FIG. 4A is a cross-sectional side view of another embodiment of an assembly 400 for determining bend measurements of an adjustable motor assembly 400 using inclinometers 402, 404 in which there is no bend in the adjustable motor assembly according to one example. The adjustable motor assembly 400 can include a bendable housing 406. A first inclinometer 402 can be positioned on a first

side of a bend location 410 and a second inclinometer 404 can be positioned on a second side of the bend location 410. In one embodiment, the first inclinometer 402 and the second inclinometer 404 are equidistant from the bend location 410. In another embodiment, the first inclinometer 402 and the second inclinometer 404 can be on the outside of the bendable housing 406.

[0031] In some embodiments, a multitude of first inclinometers 402 can be positioned on the first side of bend location 410 and a multitude of second inclinometers 404 can be positioned on a second side of bend location 410. In one such embodiment, the multitude of first inclinometers 402 can be equidistant around the circumference of the bendable housing 406 on the first side of the bend location 410 and the multitude of second inclinometers 404 can be equidistant around the circumference of the bendable housing 406 on the second side of the bend location 410.

[0032] In the absence of a bend in the housing 406, a first inclination measurement by the inclinometer 402 and a second inclination measurement by the inclinometer 404 measurements may be roughly equal. If housing 406 bends, as shown in FIG. 4B, the inclination of the second inclinometer 404 may change, causing the second inclination measurement by the inclinometer 404 to change. The changed inclination measured by inclinometer 404 can be used to determine the bend direction and bend amount in the adjustable motor assembly 400.

[0033] FIG. 5 is an example of a flow chart of a process 500 for determining bend measurements of an adjustable motor assembly using inclinometers according to one embodiment.

[0034] In block 502, a first inclination measurement detected by a first inclinometer is received. The first inclination measurement can be associated with a

motor assembly (such as, but not limited to, the motor assemblies 200, 300, or 400) in which a first motor housing assembly member can bend relative to a second motor housing assembly member. The first inclination measurement can be received by a computing device 116 via a communication device 212. In some embodiments, the first inclination measurement can be obtained in multiple dimensions (e.g., three dimensions). In such embodiments, the first inclination measurement can include both an inclination amount and direction. The first inclination measurement can be used as a baseline measurement against which subsequent inclination measurements can be compared to determine an amount of bend or bend direction of an adjustable motor assembly. The computing device 116 can be located at any suitable location (e.g., at the surface of the wellbore, below ground, or offsite).

[0035] In block 504, a first motor housing assembly member bends relative to a second motor housing assembly member at a bend location in a wellbore 112. In one such embodiment, a drill operator can cause the first motor housing assembly member to bend relative to the second motor housing assembly member in order to navigate around a bend in the formation of the wellbore 112. In some embodiments, the first motor housing assembly can bend relative to the second motor housing assembly member automatically in response to encountering a bend in the formation of the wellbore 112. In another embodiment, the drill operator can cause the first motor housing assembly member to bend relative to the second motor housing assembly member to drill along a designated drilling trajectory. As the first motor housing assembly member bends relative to the second motor assembly housing member, the inclination can change. As the distance changes, the inclination measured by one or more inclinometers can change.

[0036] In block 506, a second inclination measurement detected by a second inclinometer is received. The second inclination measurement can be received by a computing device 116 via the communication device 212. In some embodiments, the second inclination measurement can be obtained in multiple dimensions (e.g., three dimensions). In such embodiments, the second inclination can include both an inclination amount and direction.

[0037] In block 508, the amount of bend and a bend direction of the first motor housing assembly member relative to the second motor housing assembly member is determined. In some embodiments, this determination is performed by a computing device 116. In some embodiments, the bend direction and bend amount can be determined based on a comparison of the baseline first inclination detected to the second inclination detected. The difference between the first inclination and the second inclination can be indicative of the amount of bend and bend direction of the first motor housing assembly member relative to a second motor housing assembly member.

[0038] In some embodiments, the computing device 116 can determine the amount of bend and bend direction via a communication device 212 and compare it with a designated drilling trajectory. Should the amount of bend and bend direction determined by the computing device 116 need to be altered to conform with the designated drilling trajectory, the computing device 116 can cause the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

[0039] FIG. 6 is a block diagram depicting an example of a computing device 116 for determining bend measurements of an adjustable motor assembly using

inclinometers. The computing device 116 includes a processing device 602, a memory device 604, and a bus 606.

[0040] The processing device 602 can execute one or more operations for determining bend measurements of an adjustable motor assembly using inclinometers. The processing device 602 can execute instructions 608 stored in the memory device 604 to perform the operations. The processing device 602 can include one processing device or multiple processing devices. Non-limiting examples of the processing device 602 include a Field-Programmable Gate Array ("FPGA"), an application-specific integrated circuit ("ASIC"), a microprocessor, etc.

[0041] The processing device 602 can be communicatively coupled to the memory device 604 via the bus 606. The non-volatile memory device 604 may include any type of memory device that retains stored information when powered off. Non-limiting examples of the memory device 604 include electrically erasable programmable read-only memory ("ROM"), flash memory, or any other type of non-volatile memory. In some aspects, at least some of the memory device 604 can include a medium from which the processing device 602 can read instructions. A computer-readable medium can include electronic, optical, magnetic, or other storage devices capable of providing the processing device 602 with computer-readable instructions or other program code. Non-limiting examples of a computer-readable medium include (but are not limited to) magnetic disk(s), memory chip(s), ROM, random-access memory ("RAM"), an ASIC, a configured processor, optical storage, and/or any other medium from which a computer processor can read instructions. The instructions may include processor-specific instructions generated by a compiler and/or an interpreter from code written in any suitable computer-programming language, including, for example, C, C++, C#, etc.

[0042] In some aspects, an assembly for determining bend measurements of an adjustable motor assembly using inclinometers is provided according to one or more of the following examples.

[0043] Example #1: An assembly for determining bend measurements of an adjustable motor assembly using inclinometers can include a first motor housing assembly member. The assembly can also include a second motor housing assembly member, a first inclinometer, and a second inclinometer. The second motor housing assembly member can be coupled to the first motor housing assembly member and bendable relative to the first motor housing assembly member at a bend location in a wellbore. The first inclinometer can be positioned on a first side of the bend location for determining a first inclination. The second inclinometer can be positioned on a second side of the bend location for determining a second inclination. Based on the first and second inclinations, an amount of bend of the second motor housing assembly member relative to the first motor housing assembly member can be determined.

[0044] Example #2: The assembly of Example #1 may feature inclinometers further positioned to determine a bend direction.

[0045] Example #3: The assembly of any of Examples #1-2 may feature a communication device to communicate with a computing device.

[0046] Example #4: The assembly of any of Examples #1-3 may feature a communication device positioned at the wellbore surface.

[0047] Example #5: The assembly of any of Examples #1-4 may feature the first inclinometer coupled to the communication device.

[0048] Example #6: The assembly of any of Examples #1-5 may feature the second inclinometer coupled to the communication device.

[0049] Example #7: The assembly of any of Examples #1-6 may feature the first motor housing assembly member or the second motor housing assembly member including a motor for drilling a wellbore.

[0050] Example #8: The assembly of any of Examples #1-7 may feature the first inclinometer positioned on the exterior of the first motor housing assembly member.

[0051] Example #9: The assembly of any of Examples #1-8 may feature the second inclinometer positioned on the exterior of the second motor housing assembly member.

[0052] Example #10: The assembly of any of Examples #1-9 may feature the first inclinometer and the second inclinometer located equidistant from the bend location.

[0053] Example #11: The assembly of any of Examples #1-10 may feature the first inclinometer being included in a multitude of first inclinometers and the multitude of first inclinometers are equidistantly spaced around a circumference of the first motor housing assembly member.

[0054] Example #12: The assembly of any of Examples #1-11 may feature the second inclinometer being included in a multitude of second inclinometers.

[0055] Example #13: The assembly of Example #12 may feature the multitude of second inclinometers equidistantly spaced around a circumference of the second motor housing assembly member.

[0056] Example #14: The assembly of any of Examples #1-13 may feature a third motor assembly member inside the first motor housing assembly member or the second motor housing assembly member.

[0057] Example #15: The assembly of Examples #1-7, 10, 12, or 13-14 may feature a first inclinometer positioned on the third motor assembly member.

[0058] Example #16: The assembly of Example #15 may feature a first inclinometer that includes a multitude of first inclinometers that are positioned on the third motor assembly member.

[0059] Example #17: The assembly of any of Examples #14-16 may feature a second inclinometer positioned on the third motor assembly member.

[0060] Example #18: The assembly of any of Examples #14-17 may feature the third motor assembly member being rotatable around a rotation axis.

[0061] Example #19: A method for determining bend measurements of an adjustable motor assembly using inclinometers can include receiving, by a communication device, a first inclination detected by a first inclinometer. A first motor housing assembly member can bend relative to a second motor housing assembly member at a bend location in a wellbore. A second inclination detected by a second inclinometer can be received by a communication device. Finally, the assembly can determine an amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member based on the first inclination and the second inclination.

[0062] Example #20: The method of Example #19 may feature determining, by the computing device, an amount of bend second motor housing assembly member relative to the first motor housing assembly member by associating the first inclination measurement with a first bend amount. The computing device can associate the second inclination measurement with a second bend amount. Further, the computing device can determine the difference between the first inclination and the second inclination.

[0063] Example #21: The method of any of Examples #19-20 may feature determining, by the computing device, a bend direction of the second motor housing assembly member relative to the first motor housing assembly member by determining a first inclination in three dimensions based on the first inclination measurement and associating the first inclination in three dimensions with a first bend direction. Also, the computing device can determine a second inclination in three dimensions based on the second inclination measurement and associate the second inclination in three dimensions with a second bend direction. Finally, the computing device can determine the difference between the first bend direction and the second bend direction.

[0064] Example #22: The method of any of Examples #19-21 may feature determining if the bend direction and bend amount should be altered to conform with a designated drilling trajectory. Further, the method may feature causing the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

[0065] Example #23: A computing device for determining bend measurements of an adjustable motor assembly using inclinometers can include a processing device and a memory. The memory can include instructions executable by the processing device. The instructions can include receiving, by a communication device, a first inclination detected by a first inclinometer. Further, the instructions can include receiving a second inclination detected by a second inclinometer, and determining an amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member based on the first inclination and second inclination.

[0066] Example #24: The computing device of Example #23 may feature instructions for associating the first inclination measurement with a first bend amount and associating the second inclination measurement with a second bend amount. The computing device may further feature instructions for determining the difference between the first inclination and the second inclination.

[0067] Example #25: The computing device of any of Examples #23-24 may feature instructions for determining a first inclination in three dimensions based on the first inclination measurement and associating the first inclination in three dimensions with a first bend direction. The computing device may further feature instructions for determining a second inclination in three dimensions based on the second inclination measurement and associating the second inclination in three dimensions with a second bend direction. Finally, the computing device may feature instructions for determining the difference between the first bend direction and the second bend direction.

[0068] Example #26: The computing device of any of Examples #23-25 may feature instructions for determining if the amount of bend or bend direction should be altered to conform with a designated drilling trajectory and causing the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

[0069] The foregoing description of certain embodiments, including illustrated embodiments, has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the disclosure to the precise forms disclosed. Numerous modifications, adaptations, and uses thereof will be apparent to those skilled in the art without departing from the scope of the disclosure.

Claims

What is claimed is:

1. An assembly usable with a drill string in a wellbore, the assembly comprising:
a first motor housing assembly member;
a second motor housing assembly member coupled to the first motor housing assembly member and bendable relative to the first motor housing assembly member at a bend location in the wellbore;
a first inclinometer positioned on a first side of the bend location to determine a first inclination; and
a second inclinometer positioned on a second side of the bend location to determine an amount of bend of the second motor housing assembly member relative to the first motor housing assembly member by determining a second inclination.
2. The assembly of claim 1, wherein the first inclinometer and the second inclinometer are further positioned to determine a bend direction.
3. The assembly of claim 1, further comprising a communication device to communicate with a computing device.
4. The assembly of claim 3, wherein the computing device is positioned at the wellbore surface.

5. The assembly of claim 3, wherein the first inclinometer is coupled to the communication device.
6. The assembly of claim 5, wherein the second inclinometer is coupled to the communication device.
7. The assembly of claim 3, further comprising the computing device, the computing device operable to determine at least one of the amount of bend and a bend direction based on measurements of the first and second inclinations.
8. The assembly of claim 1, wherein the first motor housing assembly member or the second motor housing assembly member comprises a motor for drilling the wellbore.
9. The assembly of claim 1, wherein at least one of the first inclinometer and the second inclinometer is positioned on the exterior of the first motor housing assembly member.
10. The assembly of claim 1, wherein the first inclinometer and the second inclinometer are equidistant from the bend location.
11. The assembly of claim 1, wherein the first inclinometer is included in a plurality of first inclinometers and the plurality of first inclinometers are equidistant around a circumference of the first motor housing assembly member.

12. The assembly of claim 1, wherein the second inclinometer is included in a plurality of second inclinometers.

13. The assembly of claim 13, wherein the plurality of second inclinometers are equidistant around a circumference of the second motor housing assembly member.

14. The assembly of claim 1, further comprising a third motor assembly member inside the first motor housing assembly member or the second motor housing assembly member.

15. The assembly of claim 14, wherein the first inclinometer is positioned on the third motor assembly member.

16. The assembly of claim 14, wherein the first inclinometer is a plurality of first inclinometers that are positioned on the third motor assembly member.

17. The assembly of claim 14, wherein the second inclinometer is positioned on the third motor assembly member.

18. The assembly of claim 16, wherein the third motor assembly member is rotatable around a rotation axis.

19. A method comprising:

receiving, by a computing device, a first inclination measurement detected by a first inclinometer;

bending a first motor housing assembly member relative to a second motor housing assembly member at a bend location in a wellbore;

receiving, by the computing device, a second inclination measurement detected by a second inclinometer; and

determining, by the computing device, an amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member based on the first and second inclination measurements.

20. The method of claim 19, wherein determining, by the computing device, an amount of bend second motor housing assembly member relative to the first motor housing assembly member comprises:

associating the first inclination measurement with a first bend amount;

associating the second inclination measurement with a second bend amount;

and

determining the difference between the first inclination and the second inclination.

21. The method of claim 19, wherein determining, by the computing device, a bend direction of the second motor housing assembly member relative to the first motor housing assembly member comprises:

determining a first inclination in three dimensions based on the first inclination measurement;

associating the first inclination in three dimensions with a first bend direction;

determining a second inclination in three dimensions based on the second inclination measurement;

associating the second inclination in three dimensions with a second bend direction; and

determining the difference between the first bend direction and the second bend direction.

22. The method of claim 19, further comprising:

determining if the bend direction and bend amount should be altered to conform with a designated drilling trajectory; and

causing the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

23. A computing device comprising:

a processing device;

a memory device in which instructions executable by the processing device are stored, wherein the instructions comprise:

receiving a first inclination measurement detected by a first inclinometer;

receiving a second inclination measurement detected by a second inclinometer; and

determining an amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member based on the first and second inclination measurements.

24. The computing device of claim 23, wherein the instructions executable by the processing device further comprise instructions for:

associating the first inclination measurement with a first bend amount;
associating the second inclination measurement with a second bend amount;
and
determining the difference between the first inclination and the second inclination.

25. The computing device of claim 23, wherein the instructions executable by the processing device further comprise instructions for:

determining a first inclination in three dimensions based on the first inclination measurement;

associating the first inclination in three dimensions with a first bend direction;

determining a second inclination in three dimensions based on the second inclination measurement;

associating the second inclination in three dimensions with a second bend direction; and

determining the difference between the first bend direction and the second bend direction.

26. The computing device of claim 23, wherein the instructions executable by the processing device further comprise instructions for:

determining if the bend direction and bend amount should be altered to conform with a designated drilling trajectory; and

causing the amount of bend or bend direction of the second motor housing assembly member relative to the first motor housing assembly member to change.

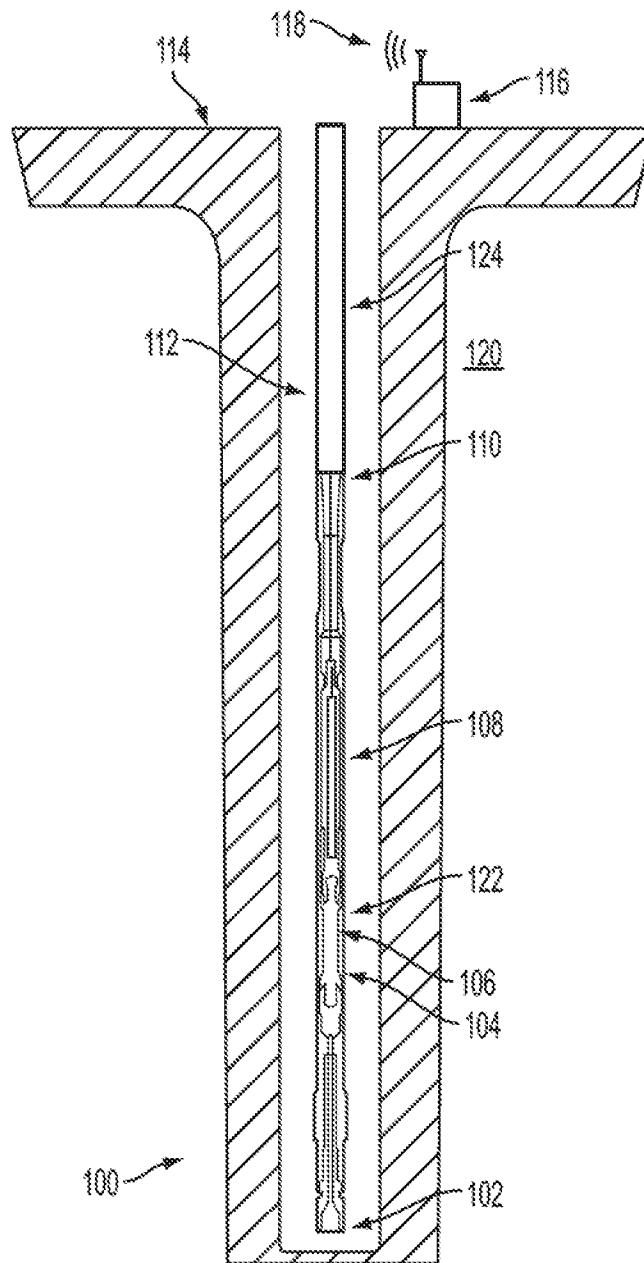


FIG. 1

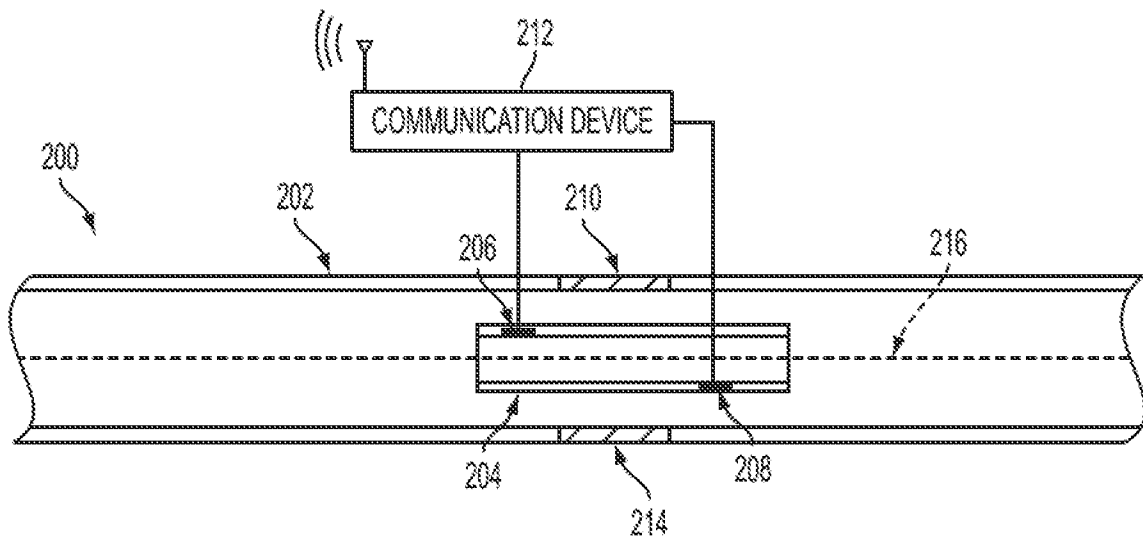


FIG. 2A

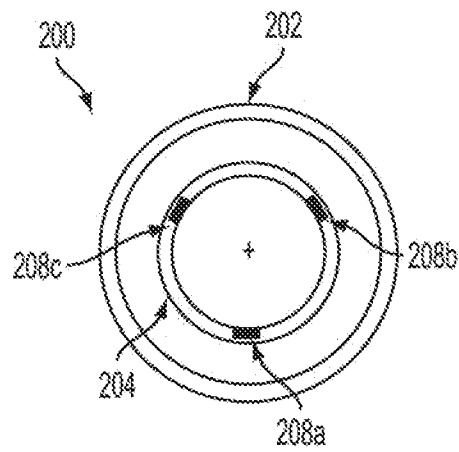


FIG. 2B

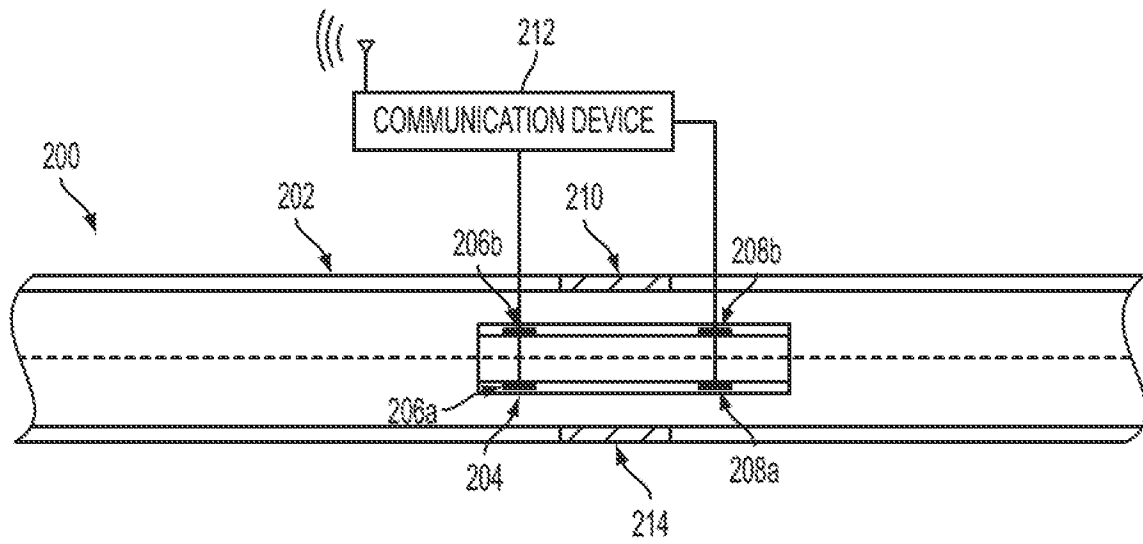


FIG. 2C

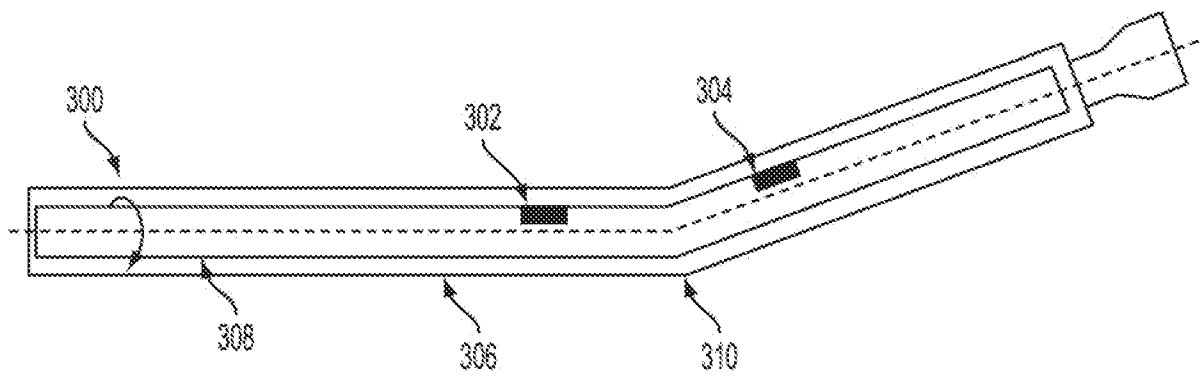


FIG. 3

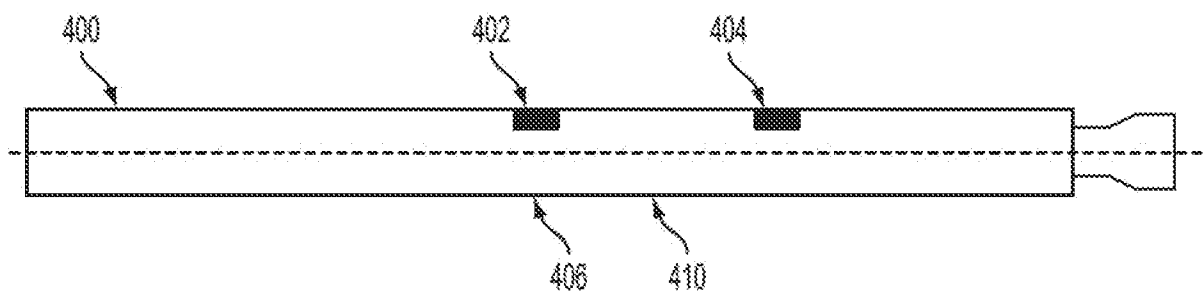


FIG. 4A

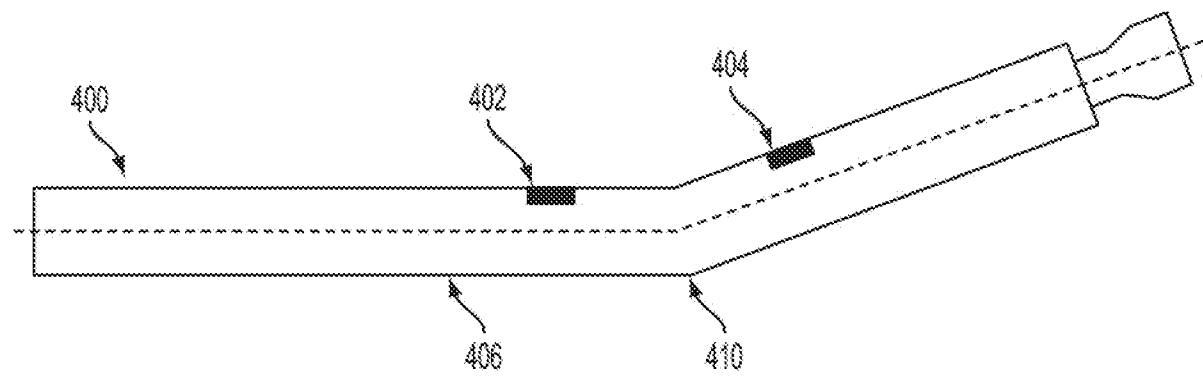


FIG. 4B

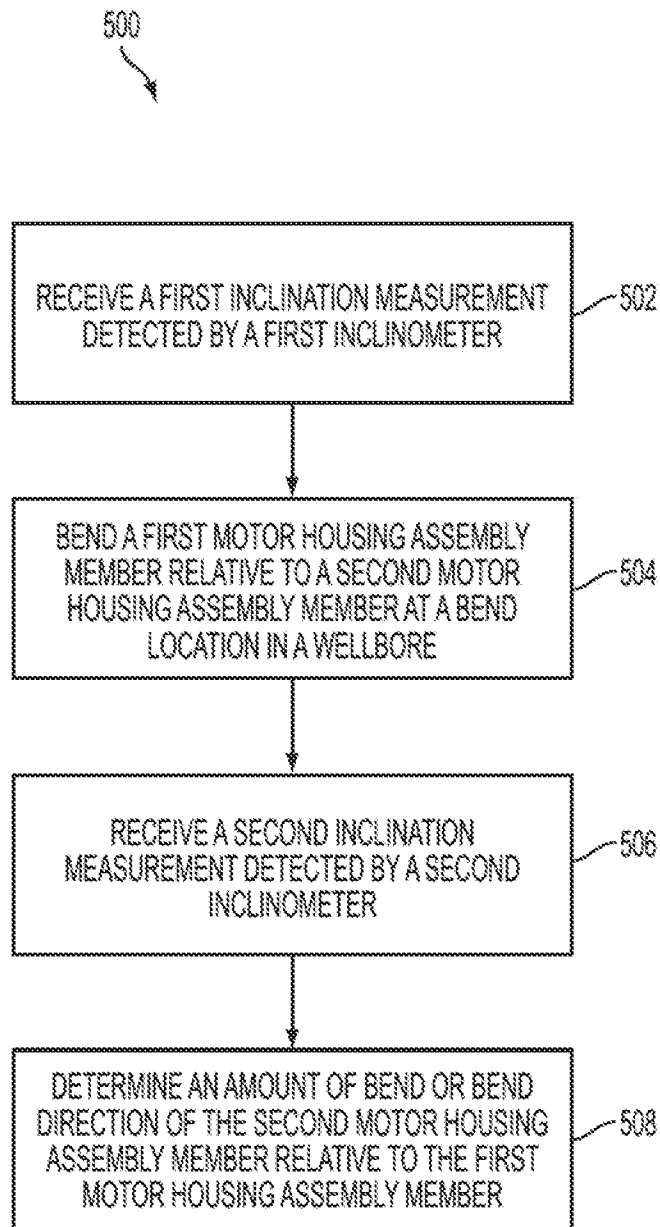


FIG. 5

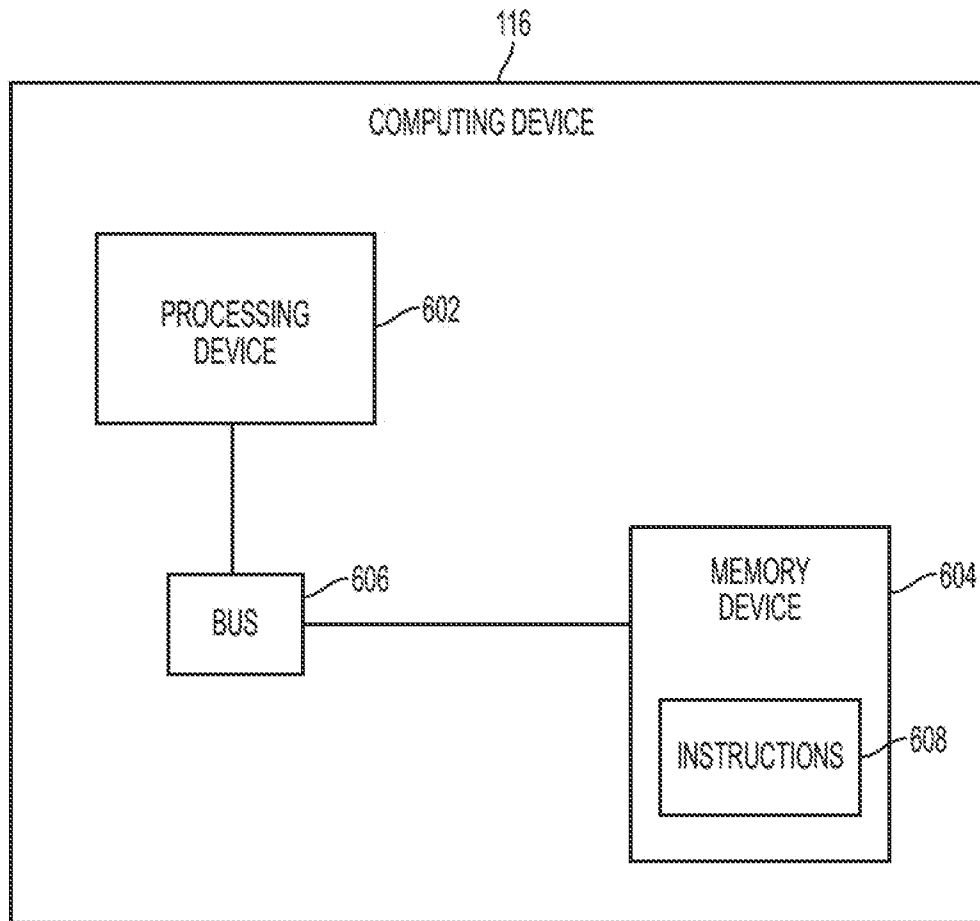


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/078424**A. CLASSIFICATION OF SUBJECT MATTER****E21B 47/024(2006.01)i, E21B 47/09(2006.01)i, E21B 47/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 47/024; E21B 34/04; G01V 3/00; E21B 44/00; E21B 7/04; E21B 47/09; E21B 47/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:wellbore, first, second, bend, inclinometer, processing and memory

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5646611 A (DAILEY, PATRICK E. et al.) 08 July 1997 See claims 1-17,25-33; and figure 2.	19-21,23-25
Y		1-18,22,26
Y	US 2013-0292176 A1 (EKSETH, ROGER et al.) 07 November 2013 See paragraphs [0029],[0112].	1-18,22,26
Y	US 2005-0109097 A1 (BOGATH, CHRISTOPHER et al.) 26 May 2005 See paragraphs [0120]-[0123] and figures 8A-9A.	14-18
A	US 2003-0094310 A1 (EPPINK, JAY M. et al.) 22 May 2003 See paragraphs [0012]-[0017] and claim 1.	1-26
A	US 2007-0175639 A1 (HOEN, CHRISTOPHER) 02 August 2007 See claims 1,9 and figure 2.	1-26



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 September 2014 (26.09.2014)

Date of mailing of the international search report

29 September 2014 (29.09.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/078424

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5646611 A	08/07/1997	None	
US 2013-0292176 A1	07/11/2013	MX 2010001603 A US 2010-096186 A1 US 2012-247833 A1 US 8185312 B2 US 8428879 B2 WO 2011-053364 A1	27/04/2011 22/04/2010 04/10/2012 22/05/2012 23/04/2013 05/05/2011
US 2005-0109097 A1	26/05/2005	CA 2487222 A1 CA 2487222 C CN 1619098 A CN 1619098 B DE 102004055995 A1 FR 2862696 A1 FR 2862696 B1 FR 2863651 A1 FR 2863651 B1 GB 0423987 D0 GB 2409043 A GB 2409043 B MX PA04010930 A RU 2004133861 A RU 2377404 C2 US 2009-0013775 A1 US 7757552 B2 US 7775099 B2	20/05/2005 08/04/2008 25/05/2005 25/01/2012 23/06/2005 27/05/2005 28/12/2012 17/06/2005 06/04/2007 01/12/2004 15/06/2005 03/01/2007 08/06/2005 27/04/2006 27/12/2009 15/01/2009 20/07/2010 17/08/2010
US 2003-0094310 A1	22/05/2003	AU 1998-89525 B2 AU 2001-22637 A1 AU 2001-22637 B2 AU 2001-49199 A1 AU 2003-210744 A1 AU 2003-210744 B2 AU 2003-210744 B8 AU 2003-210744 B8 AU 2005-200137 A1 AU 2263701 A AU 777543 B2 BR 0016525 A BR 0016525 B1 CA 2250483 C CA 2394950 A1 CA 2394950 C CA 2403960 A1 CA 2474998 A1 CA 2474998 C CA 2755094 A1 CN 1215789 A0	31/01/2002 03/07/2001 21/10/2004 08/10/2001 02/09/2003 03/04/2008 03/04/2008 08/05/2008 10/02/2005 03/07/2001 21/10/2004 24/09/2002 13/01/2009 03/10/2006 28/06/2001 25/09/2007 04/10/2001 14/08/2003 03/01/2012 14/08/2003 05/05/1999

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/078424

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 1281845 C0	25/10/2006
		CN 1312377 C0	25/04/2007
		CN 1413285 A0	23/04/2003
		CN 1527901 A	08/09/2004
		CN 1628207 C0	15/06/2005
		DE 60037285 D1	10/01/2008
		DE 60037285 T2	03/04/2008
		DE 60043793 D1	18/03/2010
		EP 0911483 A2	28/04/1999
		EP 0911483 A3	05/06/2002
		EP 0911483 B1	16/08/2006
		EP 1246993 A1	09/10/2002
		EP 1246993 A4	01/12/2004
		EP 1303720 A2	23/04/2003
		EP 1303720 A4	15/06/2005
		EP 1478824 A2	24/11/2004
		EP 1550788 A2	06/07/2005
		EP 1550788 A3	14/09/2005
		EP 1550788 B1	28/11/2007
		EP 1903178 A2	26/03/2008
		EP 1903178 A3	11/06/2008
		EP 1903178 B1	27/01/2010
		EP 2175100 A1	14/04/2010
		EP 2177710 A1	21/04/2010
		JP 03730570 B2	05/01/2006
		JP 2003-518214 A	03/06/2003
		JP 2003-531320 A	21/10/2003
		JP 2005-517105 A	09/06/2005
		MX PA02006123 A	23/08/2004
		NO 20022944 A	20/08/2002
		NO 20022944 D0	19/06/2002
		NO 328065 B1	16/11/2009
		US 2001-0052427 A1	20/12/2001
		US 2002-0007970 A1	24/01/2002
		US 2003-0075361 A1	24/04/2003
		US 2003-0230893 A1	18/12/2003
		US 2005-0098350 A1	12/05/2005
		US 2005-0115741 A1	02/06/2005
		US 6296066 B1	02/10/2001
		US 6598687 B2	29/07/2003
		US 6607044 B1	19/08/2003
		US 6659200 B1	09/12/2003
		US 6761574 B1	13/07/2004
		US 6843332 B2	18/01/2005
		US 6863137 B2	08/03/2005
		US 6923273 B2	02/08/2005
		US 7059881 B2	13/06/2006
		US 7172038 B2	06/02/2007
		US 7195083 B2	27/03/2007
		WO 01-073331 A3	30/01/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/078424

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0175639 A1	02/08/2007	WO 01-46549 A1	28/06/2001
		WO 01-73331 A2	04/10/2001
		WO 03-067018 A2	14/08/2003
		WO 2003-067018 A3	19/08/2004
		WO 2004-092633 A2	28/10/2004
		WO 2004-092633 A3	20/01/2005
		BR PI0508906 A	07/08/2007
		GB 0618659 D0	01/11/2006
		GB 2428099 A	17/01/2007
		GB 2428099 B	07/05/2008
		NO 20064751 A	19/12/2006
		US 7685892 B2	30/03/2010
		WO 2005-091712 A2	06/10/2005
		WO 2005-091712 A3	23/02/2006