

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2006299233 B2

(54) Title
Niobium compound

(51) International Patent Classification(s)
C07F 9/00 (2006.01) **B01J 23/00** (2006.01)

(21) Application No: **2006299233** (22) Date of Filing: **2006.09.16**

(87) WIPO No: **WO07/039076**

(30) Priority Data

(31) Number
11/238,362 (32) Date
2005.09.29 (33) Country
US

(43) Publication Date: **2007.04.12**
(44) Accepted Journal Date: **2012.08.02**

(71) Applicant(s)
H.C. Starck GmbH

(72) Inventor(s)
Rosenkranz, Axel;Seyed, Hady;Beck, Karsten;Sulkowski, Udo

(74) Agent / Attorney
Davies Collison Cave, Level 14 255 Elizabeth Street, Sydney, NSW, 2000

(56) Related Art
ACTA Chemica Scandinavica, 1993, vol. 47, pp. 1038-1040
Applied Catalysts, 2004, vol. 266, pp. 223-227
CN 1565734
Journal of Less-Common Metals, 1977, vol. 51, pp. 259-270

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2007 (12.04.2007)

PCT

(10) International Publication Number
WO 2007/039076 A3

(51) International Patent Classification:
C07F 9/00 (2006.01) *B01J 23/00* (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/EP2006/009041

(22) International Filing Date:
16 September 2006 (16.09.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/238,362 29 September 2005 (29.09.2005) US

(71) Applicant (for all designated States except US): **H.C. STARCK GMBH** [DE/DE]; Im Schleeke 78-91, 38642 Goslar (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BECK, Karsten** [DE/DE]; Am Heiligen Grabe 4, 38640 Goslar (DE). **SEYEDA, Hady** [DE/DE]; Doktorsbusch 25, 38640 Goslar (DE). **SULKOWSKI, Udo** [DE/DE]; Breslauer Str. 8, 38690 Vienenburg (DE). **ROSENKRANZ, Axel** [DE/DE]; Kreisstr. 16, 38667 Bad Harzburg (DE).

(74) Agent: **COLLING-HENDELKENS, Miriam**; H.C. Starck GmbH, Law, Patents & Insurances, Building Q, 18, Room 1364, 51368 Leverkusen (DE).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
23 August 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



A3

(54) Title: NIOBIUM COMPOUND

(57) Abstract: The present invention relates to novel, water-soluble niobium compounds, a process for their preparation and their formulations.

WO

2007/039076 A3

Niobium compound

The present invention relates to a novel niobium compound, a process for its preparation and formulations comprising said niobium compound.

5


Niobium compounds are, amongst other applications, suitable to be used as dopants for certain catalysts or ceramic materials. Ceramic materials include electroceramics used in applications such as multi-layer ceramic capacitors, piezoceramics and ferrites.

In this application, the catalyst carrier or active species will be mixed with the dopant and 10 calcined in a subsequent process step. The calcination usually takes place under conditions where the niobium compound is converted to pure niobium pentoxide. Such applications encompass, but are not limited to, ethane hydrogenolysis, dehydrogenation of hydrocarbons, solid acid catalysis in polycondensation, or ammoxidation. Such catalysts in which niobium compounds are used are in particular catalysts to convert butane to acrylonitrile in the 15 presence of ammonia and oxygen, conversion of butane to acrolein in the presence of oxygen (oxidation), oxidative dehydrogenation of alkanes, like conversion of propane to propene. Such applications are, for example, disclosed in Chemical Reviews 1999, (99), 3603 – 3624, which is enclosed by reference for all useful purposes. Mixing with the niobium compound often takes place in an aqueous solution, suspension or emulsion.

20 For such applications it is important that the niobium compound exhibits excellent water solubility, yields pure niobium pentoxide with no impurities from complexing agents or counterions when calcined under appropriate conditions and has a high content of niobium in weight percent, so with addition of small amounts of the niobium compound an aqueous solution having a suitable high niobium concentration can be prepared.

25 Limar et al. in Russian Journal of Inorganic Chemistry, Vol. 9 No. 10, October 1964, pages 1288-1291, disclose the niobium oxalate complexes $\text{Na}[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})] * 4 \text{ H}_2\text{O}$ as well as $(\text{NH}_4)_3[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_3] * x \text{ H}_2\text{O}$. These complexes, however, do not fully satisfy the conditions as set out above. With sodium as countercation, sodium impurities will remain in the niobium pentoxide after calcination. The ammonium complex is 3-fold negatively charged 30 resulting in lower niobium content. Coordination with three oxalate ions has the same effect of lowering the niobium content in percent by weight. Additionally, the water solubility of merely 20 g Nb / l and 40 g Nb / l, respectively, needs to be significantly improved.

It was an object of the invention to provide a niobium compound exhibiting excellent water solubility (greater than 30 g Nb/l), which yields niobium pentoxide with a purity of at least 99%, consequently comprising up to 1% impurities from complexing agents or counterions when calcined under appropriate conditions, and has a high content of niobium (greater than 5 22 percent by weight) in weight percent. This problem is solved by the niobium compound ammonium(bisaquo oxobisoxalato)niobate ($\text{NH}_4[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$), and the corresponding trihydrate, ammonium(bisaquo oxobisoxalato)niobate-trihydrate ($\text{NH}_4[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2] \cdot 3 \text{H}_2\text{O}$, of formula 1.

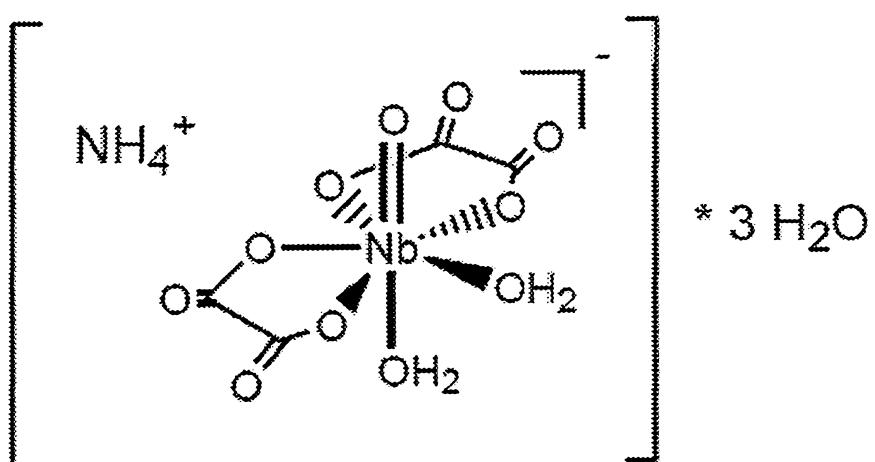

10

(1)

The compound according to the invention yields niobium pentoxide with a purity of 99% and not more than 1% of impurities from complexing agents or counterions when calcined under appropriate conditions. Preferably, the compound has a purity of at least 99.9 %, in particular at least 99.99 %. Figure 1 shows the three-dimensional structure of the compound according 15 to the invention as determined by X-ray structure analysis. The numbers show the respective bond lengths in Angström.

The compound according to the invention exhibits excellent water solubility of 52 g Nb/l (grams niobium per litre) at 20°C and a maximum solubility of 114.8 g Nb/l at a temperature of 50°C in comparison to the prior art compounds with solubilities as set out above. 20 The compound according to the invention has a niobium content of 24.3 weight percent, while the prior art compound ($\text{NH}_4)_3[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_3]$ has a niobium content of merely 21.8 weight percent of niobium. The high percentage of niobium in the material is economically advantageous because all other elements in the complex like nitrogen and carbon will be removed during calcination.

Other counterions than ammonium are usually unsuitable, since other counterions such as alkaline ions will either cause impurities on calcination while ammonium does evaporate as gaseous ammonia, or such cations have a higher molecular weight than ammonium ions thus causing a lower weight percentage of niobium.

- 5 In one aspect the present invention provides a formulation comprising ammonium(bisquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof together with at least one further ingredient selected from the group consisting of: an adjuvant, an emulgator, an antimicrobial, a water-soluble bag, a water-soluble polymer, a polyvinyl alcohol, oxalic acid, and ammonium oxalate.
- 10 Prior art compounds were made by dissolving niobium hydroxide and ammonium oxalate in water and, in a subsequent step, either reducing the volume by subsequent reduction of water or addition of acetone in order to reduce the solubility of the niobium compound, which in both cases does precipitate. The niobium concentration is about 2 mol Nb/l (mole niobium per litre).
- 15 In contrast thereto, in the process according to the present invention niobium hydroxide and oxalic acid are dissolved in water and gaseous ammonia is passed through. The ammonia dissolves and neutralizes the oxalic acid, which causes warming to about 35°C to about 50°C, preferably about 40°C to about 45°C. In order to speed up the reaction it is also possible to heat up the reaction mixture to not more than 80°C, preferably less than 70°C, and more specifically 20 about 60°C.
The sequence of the addition is preferably niobium hydroxide, oxalic acid and ammonia. The educts are usually added into water during agitation. The addition of the educts may be carried out at once, although addition in portions is preferred, in particular if larger amounts of the compound according to the invention are to be produced.
- 25 The molar ratio of niobium to oxalic acid is 1:2.8, whereas the calculation is based on the molecular weight of oxalic acid including crystal water. The concentration of Niobium must be less than about 2 mol Nb/l, preferably from about 1.4 mol Nb/l to about 1.9 mol Nb/l, in particular from about 1.5 mol Nb/l to about 1.7 mol Nb/l, more specifically about 1.6 mol Nb/l or less.
- 30 An aqueous ammonia solution may be used instead of gaseous ammonia, provided the niobium concentration is at a suitable level as set out above.
Preferably, an aqueous solution comprising 25% by weight of ammonia is used for the process according to the invention.
The pH-value of the reaction mixture is less than about 3.5, more specifically the pH-value of 35 the reaction mixture is from about 1 to about 3, particularly from about 1 to about 2.

The amount of the ammonia added is suitable to achieve this pH value and can easily calculated by the artisan.

After the addition of ammonia has finished, the reaction mixture is allowed to cool to a temperature of about 25°C or less, in particular to from 10°C to 23°C, or from 15°C to 22 °C, 5 or from 18°C to 20°C.

Depending on the amount of reaction mixture active cooling is required to achieve cooling in a reasonable time, that is, cooling to the desired temperature in 24 hours or less. The active cooling may be carried out by any suitable means known to the artisan, like external cooling of the reaction container or by means of circulation of a coolant through a heat exchanger 10 which is placed inside the reaction container.

Preferably, the cooling from 40°C to 20°C takes place within 4 hours. The average cooling rate throughout the cooling time is in the range of from about 3°C/hour to about 10°C/hour, preferably from about 4°C/hour to about 8°C/hour, in particular about 5°C/hour.

The reaction product does precipitate during cooling, is filtered off from the reaction mixture 15 and subsequently dried at a temperature of less than about 80°C, preferably less than about 75°C, in particular at about 70°C. Drying may take place in air, in an inert gas such as argon or nitrogen or under reduced pressure, in the presence of either air or an inert gas.

Further purification may be achieved by additional recrystallization. Preferably, said 20 recrystallization is carried out using water as solvent. The drying step as set out above can be carried out in the same way to achieve removal of the water.

It was surprisingly found that a reaction product with higher niobium content was prepared, although the niobium concentration in the reaction mixture is lower than in the processes 25 according to the prior art. For this reason, the process according to the present invention is also more economical as less energy is consumed, no organic solvents are involved and a higher niobium content of the resulting compound can be achieved.

The present invention also relates to formulations comprising the compounds according to the 30 present invention, ammonium(bisaquo oxobisoxalato)niobate $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$.

In the most simple case the formulation according to the invention comprises ammonium(bisaquo oxobisoxalato)niobate $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and water. Such a formulation may be a saturated aqueous solution of the compound in water or may be an aqueous slurry, but may contain additional ingredients such as adjuvants, like emulgators or

antimicrobia, like fungicides, herbicides or bactericides. Preferably, the formulation comprises oxalic acid and/or ammonium oxalate. More preferably, the oxalic acid and/or ammonium oxalate is present in an amount of between 5% by weight to 10% by weight, more preferably between 7% by weight and 9% by weight, more specifically 8% by weight. The 5 weight percentages describe the amount of oxalic acid and ammonium oxalate each.

The compound may be irritating to the skin or respiratory organs of humans or might affect the health and well-being of humans or have disadvantageous effects to plants, animals or the environment. For these reasons it is preferred if the compound according to the invention is 10 provided in a form less prone to raise dust and thus exposing the surrounding with the compound in an uncontrolled manner. Additionally, providing the compound according to the invention in a defined amount provides for easy gravimetric or volumetric metering. Such solutions or slurries are suitable for volumetric metering.

For gravimetric metering, which is used even more often and for which exposition and 15 dusting is not only to be avoided during actual metering the material, but also during weighing, it is preferred to put a defined amount of the compound according to the invention into a container which is being destroyed when used, e.g. a bag.

More specifically, the formulation according to the invention also includes a defined amount of the compound according to the invention being inside a bag. Preferably, this bag is soluble 20 in the reaction medium the niobium compound according to the invention is used for producing catalysts or ferrites. Most preferably, the bag is made of a water soluble polymer, like the bags described in international Patent Applications WO 9845185, WO 9737903 and US patent US-B-5666785, as well as "Verpackungs-Rundschau", November 1997, page 40, which are incorporated by reference for all useful purposes.

25 It is particularly preferred that, although the bag dissolves when put into water, the inner side is equipped to be water resistant. In this way, an aqueous solution or slurry can be put into a water soluble bag and put into an aqueous reaction medium. The present invention thus also relates to a formulation comprising a container made of a soluble polymeric film comprising the compound according to the invention, its solution or its slurry. In a preferred embodiment, 30 the polymeric film is a film comprising polyvinyl alcohol. In another preferred embodiment, the formulation is a slurry or a powder of the niobium compound according to the invention inside a closed bag comprising a film of polyvinyl alcohol.

In another embodiment, the formulation is a solid niobium compound according to the invention inside a closed bag comprising a film of polyvinyl alcohol.

In yet another embodiment of the invention, the formulation is a solid shaped article comprising the niobium compound according to the invention. This solid shaped article can be produced by mixing the niobium compound with usual auxiliaries, adjuvants, lubricants or the like, and pressing the mixture thus obtained. The shaped article may have any suitable

5 shape for the intended use, for example cubic, spherical, cylindrical, cubic shape or combinations thereof. The size of the shaped article usually is in a suitable range for the intended use, in general between 0.5 cm to 10 cm in diameter from the center of the respective shaped article to the outermost edge thereof. Preferably, the niobium compound has the size and shape of a tablet. More specifically, such size and shape is cylindrical with the diameter 10 being greater than the height and the height being in the range of from about 0.1 cm to about 3 cm, or of from about 0.3 cm to about 2 cm, in particular from about 0.4 cm to about 0.8 cm, the diameter at the same time being preferably of from about 0.3 cm to about 5 cm, or of from about 0.5 cm to about 4 cm, in particular of from about 0.8 cm to about 2 cm, in particular about 1.5 cm or about 1 cm. In the alternative, such tablet size and shape is spherical having a 15 diameter of about 0.1 cm to about 3 cm, or a diameter of from about 0.3 cm to about 2 cm.

The niobium compound according to the invention may be mixed with lubricants or auxiliaries such as water soluble waxes or polymers, for example paraformaldehyde, polyacetal, polyethylene glycole, polyvinylic alcohol, highly oxidized polywaxes or alkali salts or earth alkaline salts of fatty acids. In a preferred embodiment, the additives are such 20 additives exhibiting volume expansion upon contact with water and thus destroy the shaped article, e.g. a tablet comprising the niobium compound according to the invention. Such additives are also known as disintegration agents and are also used in medical applications and usually comprise cellulosic derivatives, such as carboxymethylcellulose and its derivatives, or starch derivatives, such as alkali metal starch glycolates, e.g. sodium starch 25 glycolate, the latter one being commercially available as EXPLOTAB® or VIVASTAR® from JRS Pharma LP. Suitable disintegration agents are also described in EP-A-1006148, which is incorporated by reference for all useful purposes.

In another embodiment, these additives are such additives that cause evolution of gas bubbles on contact with water and thus destroy the shaped article comprising the niobium compound 30 according to the invention, such as a solid acidic compound and a carbonate. More specifically, the present invention also comprises a mixture of the niobium compound according to the invention with a carbonate and a solid acidic compound, which is preferably pressed to shaped articles such as tablets. In general, all water-soluble carbonates may be used, such as sodium carbonate, potassium carbonate, ammonium carbonate or mixtures

thereof. The solid acidic compound can either be a solid acid such as citric acid or tartaric acid, or an inorganic acidic salt such as sodium hydrogen sulphate, in particular oxalic acid, which can be still present as an impurity from the preparation of the compound. Usually, however, it will be required to add a sufficient amount of the solid acidic compound like 5 oxalic acid. In a preferred embodiment, oxalic acid and ammonium carbonate are mixed with the niobium compound according to the invention and pressed to a shaped article, preferably a tablet. This formulation will ensure easy breakup of the shaped article and rapid dissolution of the niobium compound according to the invention. Since the niobium compound is often added to aqueous solutions that are dried and calcined, said mixture of 10 ammonium carbonate and oxalic acid is advantageous because these compounds, when put into water together, will form ammonium oxalate that can be calcined without leaving a residue comprising metal salts.

If the intended use of the niobium compound according to the invention comprises putting 15 said niobium compound into an acidic aqueous solution, it can be sufficient if only ammonium carbonate and/or another soluble carbonate is present and no solid acidic compound is needed. In this case even a water insoluble carbonate such a calcium carbonate may be used, although a water soluble carbonate is preferred.

In yet another embodiment of the invention, the formulation is a pressed shaped article 20 consisting essentially of the niobium compound according to the invention. It has been surprisingly found that the niobium compound according to the invention can be easily pressed to shaped articles of different sizes and shapes and readily dissolves in water upon contact therewith, even without addition of any additives or adjuvants, and said shaped articles exhibit excellent mechanical stability to avoid raising of dust. The shaped article preferably consists of the niobium compound according to the invention and can be obtained 25 therefrom by pressing. Preferably, said shaped article is a tablet having a size and shape as set out above. Consequently, the tablet consisting of the niobium compound according to the invention may merely comprise usual impurities resulting from the production of said niobium compound as further ingredients.

30 This invention also relates to a process for manufacturing shaped articles of a niobium compound according to the invention comprising the steps of:

- providing a niobium compound according to the invention;
- optionally admixing said niobium compound with a solid acidic compound and a solid carbonate to obtain a first mixture;

- transferring said niobium compound or said first mixture into a die;
- pressing the content of the die to obtain a shaped article.

Such a process can be easily carried out in usual equipment that is well known, commercially available and, for example, used for the production of pharmaceuticals. If required, the die wall and the core that presses the content of the die may be equipped with a lubricant or mold release agent. Suitable mold release agents are, for example, alkali salts or earth alkaline salts of fatty acids.

Because the process for production of the niobium compound according to the present invention is more economical, less energy consuming, no organic solvents are involved and a higher niobium content of the resulting compound can be achieved, the present invention also is a contribution to the protection of the environment.

The invention thus also relates to a process for protecting the environment comprising the preparation of niobium compounds by a process consuming a reduced amount of energy, not involving organic solvents. In a preferred embodiment, this process does as well provide compounds having increased niobium content.

The invention also relates to a method for creating a product specification for a batch, lot, or shipment of a chemical material, preferably a compound according to the invention, comprising specifying at least one property value for said batch, lot, or shipment. The property value may be a property value either specific for the chemical compound, like chemical formula, molecular weight, weight percentage of a certain element, melting point, boiling point or the like, or a property value specific to the lot, batch or shipment, like purity, a batch number or lot number, a list of ingredients of the formulation, grain size, shape of the particles, particle size distribution or the like.

In particular, such method comprises the step of specifying at least one property value per lot, batch or shipment, archiving the property values of said lots, batches or shipments in connection with information identifying the lot, batch or shipment, selecting at least one property value of at least one lot, batch or shipment, putting together the product specification by arranging the at least one property value of the identified said lot, batch or shipment in connection with information identifying the lot, batch or shipment and creating the product specification by displaying the at least one property value together with information identifying the lot, batch or shipment.

Displaying within the meaning of this invention may be creating a paper copy of the product specification by, for example, printing by a computer printout or conventional printing, but also involves displaying the product specification on a computer screen.

The display can be effected by a computer program having access to the archive of at least

5 one property value in connection with information identifying the lot, batch or shipment, or by means of an internet webpage displayed in a web browser.

In a further embodiment, the method for creating a product specification is a method wherein the property value is included on a product specification sheet, purchase order, invoice, contract, waiver to a contract, or combinations thereof for the batch, lot, or shipment of a
10 compound. Preferably, the compound is a compound according to the invention, or a different niobium compound, in particular a niobium oxalate complex.

In yet another embodiment of the invention the method for creating a product specification, is a method wherein said specifying comprises determining at least one property value for said

15 batch, lot, or shipment of particulate material. Determining comprises measuring or analyzing said batch, lot, or shipment by conventional measuring methods and thus determining either a property value specific for the lot, batch or shipment, or being specific for the chemical compound. If the property value to be determined is a property value specific to the chemical compound, the determining step does also encompass accessing the property value specific to
20 the chemical compound in a directory comprising such property values. The directory may be available in physical form in a library or in the form of an electronic database. In the latter case, said determining can be carried out by means of a computer program.

In a further embodiment of the invention, the method for creating a product specification is a method wherein said specifying comprises characterizing the batch, lot, or shipment of
25 particulate material by at least one interfacial potential value.

In a further embodiment of the invention, the method for creating a product specification further comprises the step of specifying at least one morphological value like surface area, particle size, structure, porosity, or combinations thereof, to said batch, lot, or shipment of
30 particulate material.

The present invention also relates to a method of doing business with a customer comprising using a product specification that includes a property value to request a certain batch, lot, or shipment and/or to provide a certain batch, lot, or shipment of chemical material.

Such a process involves the steps of providing a product specification, preferably a product specification as set out above, to the customer, the customer choosing at least one property value of at least one lot, batch or shipment suitable for his purposes, identifying the lot, batch or shipment providing a chemical material suitable for the customers purposes, selecting said 5 lot, batch or shipment and placing an order for said selected lot, batch or shipment.

Additionally, the method may further comprise the step providing the ordered lot, batch or shipment to said customer having selected the lot, batch or shipment.

10 The present invention also extends to a method for improving identification of a grade, type, or brand of chemical material comprising the step of updating an existing product description for the grade, type, or brand of particulate material by adding at least one property value.

15 The present invention also extends to a method for creating a product specification, a method for improving identification of a grade, type, or brand of chemical material as set out above or a method of doing business with a customer comprising using a product specification, wherein said product description is in a catalogue, web site, brochure, chemical material literature, advertisement, label, or combinations thereof.

20 Examples:

Example 1:

Niobium hydroxide (241 kg, niobium content: 23,6 %*) was added to 30L of water under stirring. Oxalic acid (225 kg) and aqueous ammonia (33 l, 25 % by weight NH₃) were added 25 subsequently. Addition of ammonia caused the solution to heat up to 40° C. The solution was stirred overnight and then cooled to 23° C, causing the desired niobium oxalate complex to precipitate out of the solution. The precipitate was filtered off and dried for about 20 h at 70°C, yielding 213 kg of the crude ammonium niobium oxalate complex. Recrystallization from water yielded the pure [NH₄][Nb(O)(C₂O₄)₂(H₂O)₂]*3H₂O complex.

30

Example 2:

Niobium hydroxide (254 kg, niobium content: 24,7%*) was added to 34L of water under stirring. Oxalic acid (238,4 kg) and aqueous ammonia (37 l, 25 % by weight NH₃) were added subsequently. After addition of ammonia the solution was heated up to 61°C and stirred for 9 35 hours at this temperature. Afterwards the solution was cooled to 24°C, causing the desired

niobium oxalate complex to precipitate out of the solution. The precipitate was filtered off and dried for about 24 h at 78°C, yielding 204 kg of the crude ammonium niobium oxalate complex. Recrystallization from water yielded the pure $[\text{NH}_4][\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]*3\text{H}_2\text{O}$ complex.

5

* The niobium content of the niobium hydroxide is dependent on the water content of the batch used.

Example 3: Preparation of tablets and test of solubility

10

The amount of ammonium niobium oxalate complex given in the table was pressed to tablets having a cylindrical shape with a diameter of 1 cm in a laboratory press, type P 172 [Hersteller ? Typ?] at the given pressures. The thickness is given in the table in mm. For the solubility test, 5 g of the respective tablets were given into a 250 ml-beaker already containing 100 ml of demineralised water having a temperature of 23°C and being stirred by a magnetic stirrer at maximum velocity with a stirring bar having a length of 3 cm. The time was determined until a clear, completely transparent solution was achieved with no solid fragments. As control, powdery ammonium niobium oxalate complex was used under identical conditions, the time to achieve a clear, solid-free solution was 240 seconds.

15

Amount /g ↓	Pressure / bar ⇒	50	100	150
0.5	Height / mm	4.14	3.86	3.71
	Time / s	240	280	360
1.0	Height / mm	8.22	7.67	7.36
	Time / s	260	320	430

Example 4: Test of mechanical properties (“Crashtest”)

20 tablets of each size as shown in the table above were allowed to freely fall onto a table from a height of 40 cm. The tablets only showed few single crumbs of material broken off.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

5

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to

10 which this specification relates.

The claims defining the invention are as follows:

1. A formulation comprising ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof together with at least one further ingredient selected from the group consisting of: an adjuvant, an emulgator, an antimicrobial, a water-soluble bag, a water-soluble polymer, a polyvinyl alcohol, oxalic acid, and ammonium oxalate.
2. A formulation according to claim 1, comprising a saturated solution of ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof in water or an aqueous slurry thereof.
3. A formulation according to claim 1, comprising a defined amount of ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof in a bag.
4. A formulation according to claim 3, wherein the bag is a bag soluble in water or a reaction medium.
5. A formulation according to claim 1, comprising a container made of a soluble polymeric film comprising ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof, its solution or its slurry.
6. A formulation according to claim 5, wherein the polymeric film comprises polyvinyl alcohol.
7. A formulation according to any one of claims 1 to 6, said formulation being a solid ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof inside a closed bag comprising a film of polyvinyl alcohol.
8. A formulation according to claim 1, said formulation being a pressed shaped article.
9. A formulation according to claim 8, wherein the shaped article has a cylindrical or spherical shape.

10. A formulation according to claim 8 or claim 9, consisting essentially of ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof.
11. A formulation according to claim 8 or claim 9, comprising ammonium(bisaquo oxobisoxalato)niobate of formula $(\text{NH}_4)[\text{Nb}(\text{O})(\text{C}_2\text{O}_4)_2(\text{H}_2\text{O})_2]$ and/or hydrates thereof and at least one additive, adjuvant, auxiliary, mold release agent, lubricant or combinations thereof.
12. A formulation according to claim 11, comprising at least one carbonate.
13. A formulation according to claim 12, comprising a carbonate and a solid acidic compound.
14. A formulation according to claim 13, wherein the carbonate is ammonium carbonate and the solid acidic compound is oxalic acid.

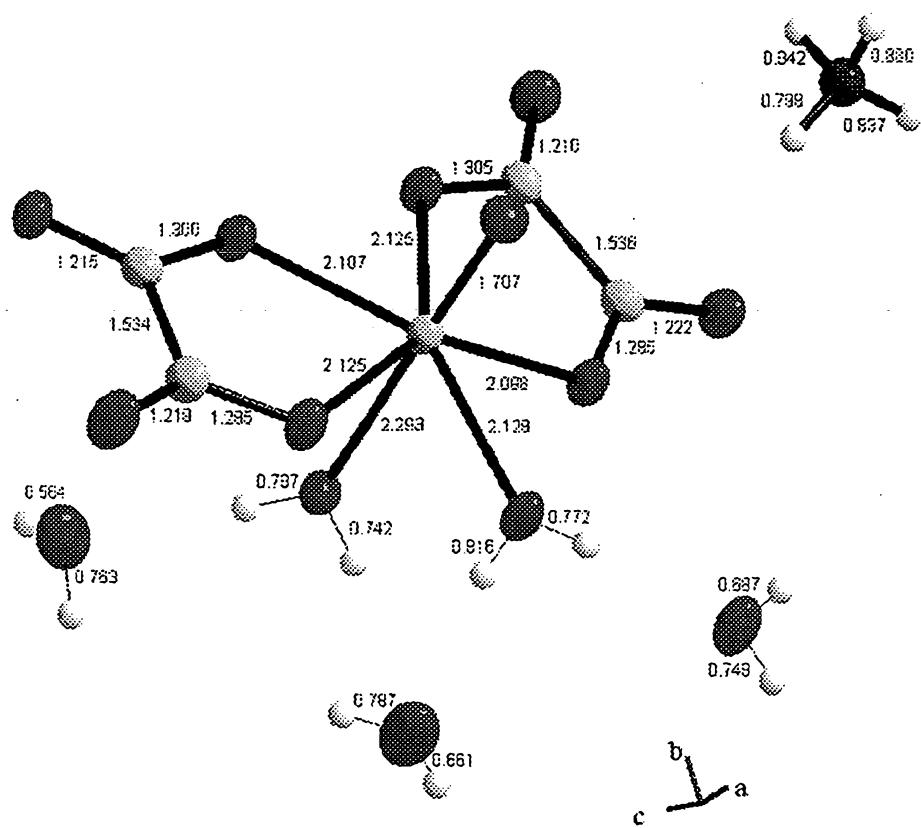


Figure 1