



- (51) **International Patent Classification:**
H01L 35/30 (2006.01) *B60N 2/56* (2006.01)
- (21) **International Application Number:**
PCT/US2017/023526
- (22) **International Filing Date:**
22 March 2017 (22.03.2017)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/311,464 22 March 2016 (22.03.2016) US
- (71) **Applicant:** GENTHERM INC. [US/US]; 21680 Haggerty Road, Suite 101, Northville, Michigan 48167 (US).
- (72) **Inventor:** KOSSAKOVSKI, Dmitri; 2042 Pine St., South Pasadena, California 91030 (US).
- (74) **Agent:** GOTTSCHALK, William S.; Carlson, Gaskey & Olds, P.C., 400 West Maple Road, Suite 350, Birmingham, Michigan 48009 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** DISTRIBUTED THERMOELECTRICS AND CLIMATE COMPONENTS USING SAME

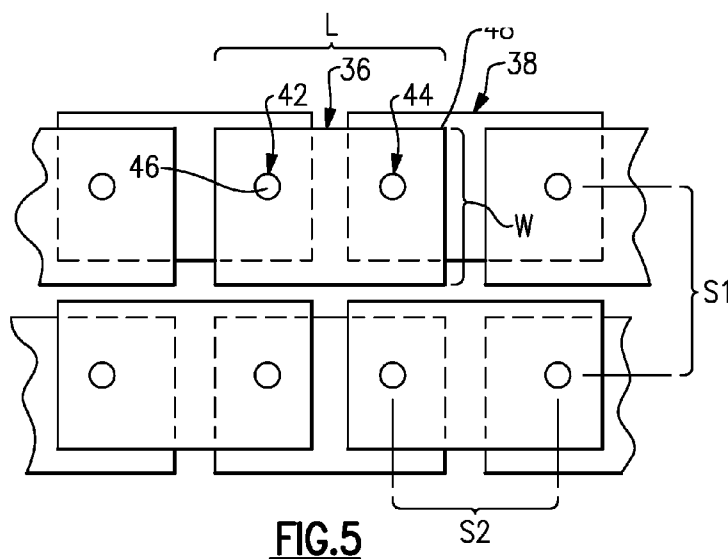


FIG. 5

- (57) **Abstract:** A thermoelectric assembly includes first and second shunts spaced apart from one another in a through-plane direction. At least one of the first and second shunts having a shunt area in an in-plane direction. P-n pellets interconnect the first and second shunts electrically in series with one another in the in-plane direction. The p-n pellets have faces that engage the first and second shunts. At least one of the faces have a pellet area. The pellet area is substantially less than the shunt area.

DISTRIBUTED THERMOELECTRICS AND CLIMATE COMPONENTS USING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to United States Provisional Application No. 62/311,464, which was filed on March 22, 2016 and is incorporated herein by reference.

BACKGROUND

[0002] This disclosure relates to conductive cooling of surfaces, such as seat covers or electronics, using distributed thermoelectrics.

[0003] Heated and cooled seats are becoming more prevalent in automotive applications. One approach is to use a flexible duct mounted to a shaped foam block that forms a seat cushion or seat back. Conditioned air is blown through the duct. A fabric is supported on the flexible duct, and a perforated aesthetic cover is wrapped around the foam. Air is supplied through apertures in the flexible duct and then passed through perforations in the cover to thermally regulate the seating surface.

[0004] Another approach incorporates at least one rigid thermoelectric device (TED) arranged beneath the support surface of the foam. Air is blown across the main (e.g., cold) side of the TED to provide cooled air to the aesthetic cover. A traditional TED arrangement for seating application utilizes one or more rigid TEDs that are “off the shelf” (e.g., 25 mm x 50 mm).

[0005] Covers with perforations may be undesirable. Additionally, there may be thermal losses with the above approaches.

[0006] A typical TED provides concentrated cooling for high heat flux heat sources, such as electronics. For such applications, the TED has a high packing density, for example, 50-80% TED area relative to packaging area of the assembly. The shunts are sized slightly larger than the pellets in a typical TED, for example, 110% the diameter of the pellet and 220% the length of the pellet. This configuration enables a dense packaging to maximize cooling for the TED's footprint.

SUMMARY

[0007] In one exemplary embodiment, a thermoelectric assembly includes first and second shunts spaced apart from one another in a through-plane direction. At least one of the first and second shunts having a shunt area in an in-plane direction. P-n pellets interconnect the first and second shunts electrically in series with one another in the in-plane direction. The p-n pellets have faces that engage the first and second shunts. At least one of the faces have a pellet area. The pellet area is substantially less than the shunt area.

[0008] In a further embodiment of any of the above, the pellet area is less than 25% of the shunt area.

[0009] In a further embodiment of any of the above, the pellet area is less than 10% of the shunt area.

[0010] In a further embodiment of any of the above, the pellet area is less than 5% of the shunt area.

[0011] In a further embodiment of any of the above, the first shunt is a main side shunt and the second shunt is a waste side shunt. The main and waste side shunts are separated by an insulation layer. The p-n pellets are disposed within the insulation layer.

[0012] In a further embodiment of any of the above, the main and waste side shunts are provided by flexible metallic foils and comprise an aesthetic cover arranged adjacent to the main side shunt.

[0013] In a further embodiment of any of the above, a fluid passage is arranged adjacent to the waste side shunt. A blower is in fluid communication with the fluid passage and is configured to blow a fluid through the fluid passage to provide heat flux between the fluid and the waste side shunt.

[0014] In a further embodiment of any of the above, flexible first and second dielectric layers respectively are bonded to the first and second shunts.

[0015] In a further embodiment of any of the above, a first set of p-n pellets are arranged in a first region in a first in-plane density. A second set of p-n pellets are arranged in a second region in a second in-plane density that is different than the first in-plane density.

[0016] In another exemplary embodiment, a climate control seat includes a cushion. A thermoelectric assembly includes main and waste side shunts spaced apart from one another

in a through-plane direction. At least one of the main and waste side shunts have a shunt area in an in-plane direction. P-n pellets interconnect the main and waste side shunts electrically in series with one another in the in-plane direction. The p-n pellets have faces that engage the main and waste side shunts. At least one of the faces have a pellet area. The pellet area is substantially less than the shunt area. A fluid passage is supported by the cushion and arranged adjacent to the waste side shunt. A blower is in fluid communication with the fluid passage and is configured to blow a fluid through the fluid passage to provide heat flux between the fluid and the waste side shunt. An aesthetic cover is arranged over the main side shunt.

[0017] In a further embodiment of any of the above, the first shunt is a main side shunt. The second shunt is a waste side shunt. The main and waste side shunts are separated by an insulation layer. The p-n pellets are disposed within the insulation layer. The main and waste side shunts are provided by flexible metallic foils.

[0018] In a further embodiment of any of the above, flexible first and second dielectric layers respectively are bonded to the main and waste side shunts.

[0019] In a further embodiment of any of the above, the pellet area is less than 25% of the shunt area.

[0020] In a further embodiment of any of the above, the pellet area is less than 10% of the shunt area.

[0021] In a further embodiment of any of the above, the pellet area is less than 5% of the shunt area.

[0022] In a further embodiment of any of the above, a first set of p-n pellets are arranged in a first region in a first in-plane density. A second set of p-n pellets are arranged in a second region in a second in-plane density that is different than the first in-plane density.

[0023] In a further embodiment of any of the above, the aesthetic cover provides first and second occupant support surfaces. The first and second support regions are provided respectively beneath the first and second occupant support surfaces.

[0024] In another exemplary embodiment, a thermoelectric climate component includes an aesthetic cover. A thermoelectric assembly includes main and waste side shunts spaced apart from one another in a through-plane direction. The main side shunt is arranged adjacent to the aesthetic cover. At least one of the main and waste side shunts have a shunt area in an in-plane direction. P-n pellets interconnect the main and waste side shunts electrically in

series with one another in the in-plane direction. The p-n pellets have faces that engage the main and waste side shunts. At least one of the faces have a pellet area. The pellet area is substantially less than the shunt area.

[0025] In a further embodiment of any of the above, the pellet area is less than 10% of the shunt area.

[0026] In a further embodiment of any of the above, the pellet area is less than 5% of the shunt area.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] The disclosure can be further understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0028] Figure 1 is a schematic view of a seated occupant.

[0029] Figure 2 is a schematic view of an example conductive thermal conditioning assembly for the seat shown in Figure 1.

[0030] Figure 3 is an enlarged cross-sectional view of a portion of the conductive thermal conditioning assembly of Figure 2 with a thermoelectric device assembly.

[0031] Figure 4 is a cross-sectional view of a thermoelectric device assembly arranged in a component.

[0032] Figure 5 is a schematic top elevational view of one embodiment of the thermoelectric device assembly shown in Figures 3 and 4.

[0033] Figure 6A a schematic view of a distributed architecture of the thermoelectric device assembly for use in a seat bottom.

[0034] Figure 6B is another example distributed architecture for a seat bottom.

[0035] The embodiments, examples and alternatives of the preceding paragraphs, the claims, or the following description and drawings, including any of their various aspects or respective individual features, may be taken independently or in any combination. Features described in connection with one embodiment are applicable to all embodiments, unless such features are incompatible. Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0036] Figure 1 illustrates an occupant 18 in a seat 10. The seat 10 includes a bottom 12 and a back 14 having a headrest 16. The seat bottom and back 12, 14 typically include a supportive foam cushion 19 wrapped in an aesthetic cover 32. Referring to Figure 2, a thermoelectric device (TED) assembly 34 is provided between the cushion (not shown) and the aesthetic cover 32 to provide heating and/or cooling to the seated occupant. The TED assembly 34 can be used in numerous other applications, such as seat backs, door panels, consoles, chairs, beds, for example.

[0037] For applications where the cooling power density does not need to be high, a distributed architecture may be useful. Flexible TED assemblies may be useful for heating or cooling seating applications, for example, and other complex shapes. Such applications do not necessarily need a high power density, in particular, if the TED is used as a flexible layer beneath a substantial portion of the aesthetic cover. It also may be desirable to instead provide a larger footprint TED with a flexible substrate. This may be accomplished by generally maintaining the same quantity of TED pellets (p-n junctions) of a traditional, small TED but using a much larger flexible substrate that spans a large portion of an underside of the aesthetic cover (e.g., 400 mm x 400 mm).

[0038] With reference to Figure 3, the TED assembly 34 includes main side and waste side shunts 36, 38 that provide flexible layers spaced apart from one another in a through-plane direction. A cross sectional shape of the shunts 36, 38 may vary to provide suitable coverage throughout an area of the surface of the seat 10 to be conditioned. In various examples, the shape may be polygonal as illustrated by shunt 36' (Figure 6B) or irregular with a combination of straight and curved sides as illustrated by shunt 36'' (Figure 6B). Moreover the shunts 36, 38 may have three or more shapes as illustrated by the different shapes of shunts 36', 36'' and shunt 36'''. In the example, the shunts are constructed from a relatively large flexible metallic foil, such as copper, which may be 10 microns thick, for example. Using a large metallic foil enables the shunts to act as in-plane heat spreaders, in addition to providing the electrical connection, unlike traditional wire connections. p-n pellets 42, 44 are arranged between and interconnected to the main side and waste side shunts 36, 38, which are electrically connected to the p-n pellets 42, 44 in series as illustrated by the dashed lines in Figures 6A and 6B. The pellets may have any suitable cross-section, for example, quadrangular or circular. A

power supply 45 supplies power to the TED assembly 34. When power is applied to the TED assembly 34 for cooling at a first polarity, the main side becomes cold and the waste side becomes hot. In various examples, the power supply 45 may supply power at an opposite, second polarity for heating, where the main side becomes hot and the waste side becomes cold.

[0039] The p-n pellets 42, 44 are disposed within an installation layer 40, which electrically and thermally isolates the main and waste side shunts 36, 38 and provides support between the layers. In one example, the installation layer 40 is constructed from a silicone foam or other foam that is stable in the temperature range in which the TED operates and in the environment to which it is exposed. The installation layer may be arranged between the waste side and the main side during assembly of the layers or injected into the space provided between the pellets after assembly of the layers.

[0040] Returning to Figure 2, when used for cooling in a seat, the main side shunt 36 (Fig. 3) receives heat flow from an occupant supported on an aesthetic cover 32 adjoining the TED assembly 34. The waste side layer 14 rejects heat through a barrier layer 21 into air within a distribution fabric or spacer layer 22 in a bag 24 that provides a fluid passage, which receives an airflow from a blower 26 through inlet duct 28 and then expels the rejected heat through outlet duct 30. In such a construction, the barrier layer 21 forms an enclosure that defines the passage and the spacer layer 22 is configured to maintain space within the passage for the air to flow when the occupant is seated and applying pressure to the bag 24. In various features, the barrier layer 21 is thermally conductive and optionally includes apertures 31 that enable the air flowing through the bag 24 to exchange heat with the waste side shunt 38 without the heat passing through the barrier layer 21.

[0041] The TED assembly 34, which includes the installation layer 40, is 1-1.5 mm thick for example. In the example shown in Figure 4, the TED assembly 34 is supported on a substrate 56 of a component 50. A dielectric layer 52 may be provided on the main side shunt 36 and/or the waste side shunt 38 to provide strain relief during flexing of the TED assembly 34. In one example, the dielectric layers, which may be 50-70 microns thick, are provided by polyurethane (PU), polyimide (PI), polytetrafluoroethylene (PTFE), or other suitable dielectric materials. To further promote efficient spreading of cooling and heating from the main and waste side shunts 36, 38, a heat spreader may be provided on the dielectric layer and may be constructed from a metal foil, grafoil, graphene or other suitable thermally conductive material.

[0042] An example layout of the p-n pellets 42, 44 and the main and waste side shunts 36, 38 is shown schematically in Figure 5. In one example, the shunts have an in-plane width W and length L of 1-4 cm. In various examples, the width W may be more than 25% of and approach 50% of the spacing S1 between pellets, and the length L may be more than 25% of and approach 50% of the spacing S2 between pellets. Each shunt includes a perimeter 48 that defines a shunt area. To potentially avoid the use of a separate heat spreader layer on the main and/or waste sides adjacent the shunts, the shunt are sized such that the sum of the areas of the shunts approaches the packaging area. In various examples, the sum of the areas may be greater than 50% of the packaging area or area to be thermally conditioned.

[0043] The pellets include a face 46, which may be a few millimeters in diameter, having a pellet area and engages the shunt. A traditional TED has relatively densely packed pellets relative to the area of the shunts. By way of contrast, in a more distributed architecture, as disclosed, the pellet area is significantly less than the shunt area, for example, less than 25%. In another example the pellet area is less than 10% of the shunt area, and in another example the pellet area is less than 5% of the shunt area.

[0044] The pellets 42, 44 may be relatively uniformly distributed throughout the TED assembly 34 if desired (Fig. 6A). Alternatively, the positioning and density of the pellets 42, 44 can be configured to provide an arrangement that accounts for or provides a varying heat flux between the occupant and the aesthetic surface 32. A first set of p-n pellets are arranged in a first region in a first in-plane density, and a second set of p-n pellets arranged in a second region in a second in-plane density that is different than the first in-plane density. For example, as shown in Figure 6B, region 60 is denser where the occupant's legs would be positioned and becomes less dense in regions 62, 66 approaching the occupant's groin, which is more sensitive to large changes in heat flux. In other examples, the density may be less in areas where the occupant generally does not contact the aesthetic surface 32. In the examples shown in Figures 6A and 6B, the shunts 36 are sized such that the sum of the areas approaches the packaging area.

[0045] It should also be understood that although a particular component arrangement is disclosed in the illustrated embodiment, other arrangements will benefit herefrom. Although particular step sequences are shown, described, and claimed, it should be

understood that steps may be performed in any order, separated or combined unless otherwise indicated and will still benefit from the present invention.

[0046] Although the different examples have specific components shown in the illustrations, embodiments of this invention are not limited to those particular combinations. It is possible to use some of the components or features from one of the examples in combination with features or components from another one of the examples.

[0047] Although an example embodiment has been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of the claims. For that reason, the following claims should be studied to determine their true scope and content.

CLAIMS

What is claimed is:

1. A thermoelectric assembly comprising:
first and second shunts spaced apart from one another in a through-plane direction, at least one of the first and second shunts having a shunt area in an in-plane direction; and
p-n pellets interconnecting the first and second shunts electrically in series with one another in the in-plane direction, the p-n pellets having faces that engage the first and second shunts, at least one of the faces have a pellet area, wherein the pellet area is substantially less than the shunt area.
2. The thermoelectric assembly according to claim 1, wherein the pellet area is less than 25% of the shunt area.
3. The thermoelectric assembly according to claim 2, wherein the pellet area is less than 10% of the shunt area.
4. The thermoelectric assembly according to claim 3, wherein the pellet area is less than 5% of the shunt area.
5. The thermoelectric assembly according to claim 1, wherein the first shunt is a main side shunt, and the second shunt is a waste side shunt, the main and waste side shunts separated by an insulation layer, the p-n pellets are disposed within the insulation layer.
6. The thermoelectric assembly according to claim 5, wherein the main and waste side shunts are provided by flexible metallic foils, and comprising an aesthetic cover arranged adjacent to the main side shunt.
7. The thermoelectric assembly according to claim 6, comprising a fluid passage arranged adjacent to the waste side shunt, and a blower in fluid communication with the fluid passage and configured to blow a fluid through the fluid passage to provide heat flux between the fluid and the waste side shunt.

8. The thermoelectric assembly according to claim 7, comprising flexible first and second dielectric layers respectively bonded to the first and second shunts.

9. The thermoelectric assembly according to claim 1, comprising a first set of p-n pellets arranged in a first region in a first in-plane density, and a second set of p-n pellets arranged in a second region in a second in-plane density that is different than the first in-plane density.

10. A climate control seat comprising:
 - a cushion;
 - a thermoelectric assembly including:
 - main and waste side shunts spaced apart from one another in a through-plane direction, at least one of the main and waste side shunts have a shunt area in an in-plane direction; and
 - p-n pellets interconnecting the main and waste side shunts electrically in series with one another in the in-plane direction, the p-n pellets having faces that engage the main and waste side shunts, at least one of the faces have a pellet area, wherein the pellet area is substantially less than the shunt area;
 - a fluid passage supported by the cushion and arranged adjacent to the waste side shunt,
 - and a blower in fluid communication with the fluid passage and configured to blow a fluid through the fluid passage to provide heat flux between the fluid and the waste side shunt; and
 - an aesthetic cover arranged over the main side shunt.
11. The climate control seat according to claim 10, wherein the first shunt is a main side shunt, and the second shunt is a waste side shunt, the main and waste side shunts separated by an insulation layer, the p-n pellets are disposed within the insulation layer, and wherein the main and waste side shunts are provided by flexible metallic foils.
12. The climate control seat according to claim 11, comprising flexible first and second dielectric layers respectively bonded to the main and waste side shunts.
13. The climate control seat according to claim 10, wherein the pellet area is less than 25% of the shunt area.
14. The climate control seat according to claim 13, wherein the pellet area is less than 10% of the shunt area.

15. The climate control seat according to claim 14, wherein the pellet area is less than 5% of the shunt area.

16. The climate control seat according to claim 10, comprising a first set of p-n pellets arranged in a first region in a first in-plane density, and a second set of p-n pellets arranged in a second region in a second in-plane density that is different than the first in-plane density.

17. The climate control seat according to claim 16, wherein the aesthetic cover provides first and second occupant support surfaces, and the first and second support regions are provided respectively beneath the first and second occupant support surfaces.

18. A thermoelectric climate component comprising:

an aesthetic cover; and

a thermoelectric assembly including:

main and waste side shunts spaced apart from one another in a through-plane direction, the main side shunt arranged adjacent to the aesthetic cover, at least one of the main and waste side shunts have a shunt area in an in-plane direction; and

p-n pellets interconnecting the main and waste side shunts electrically in series with one another in the in-plane direction, the p-n pellets having faces that engage the main and waste side shunts, at least one of the faces have a pellet area, wherein the pellet area is substantially less than the shunt area.

19. The thermoelectric climate component according to claim 18, wherein the pellet area is less than 10% of the shunt area.

20. The thermoelectric climate component according to claim 19, wherein the pellet area is less than 5% of the shunt area.

1/3

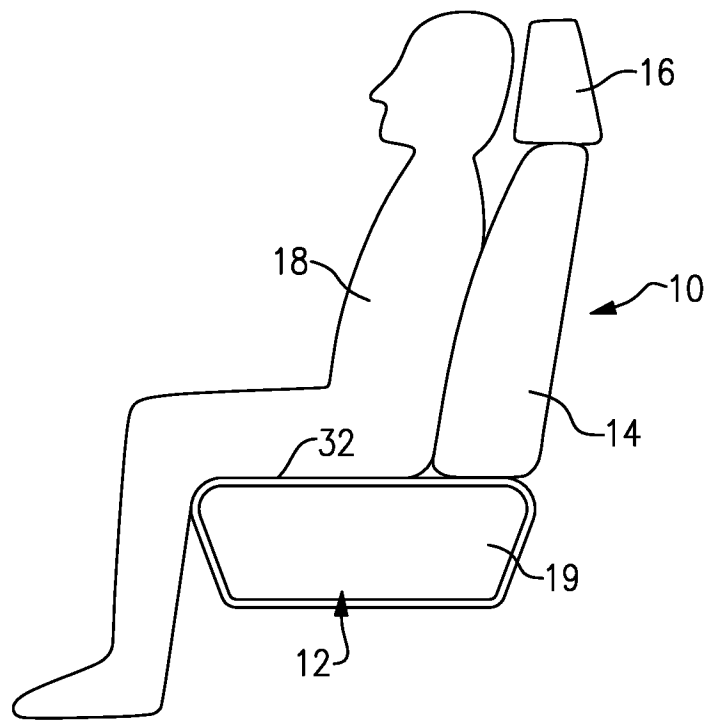


FIG. 1

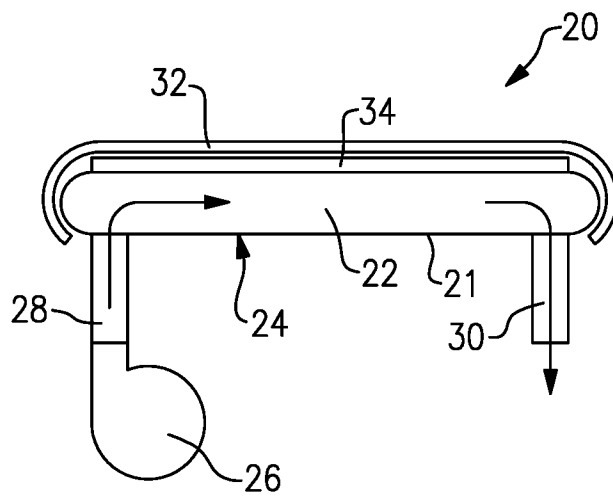


FIG. 2

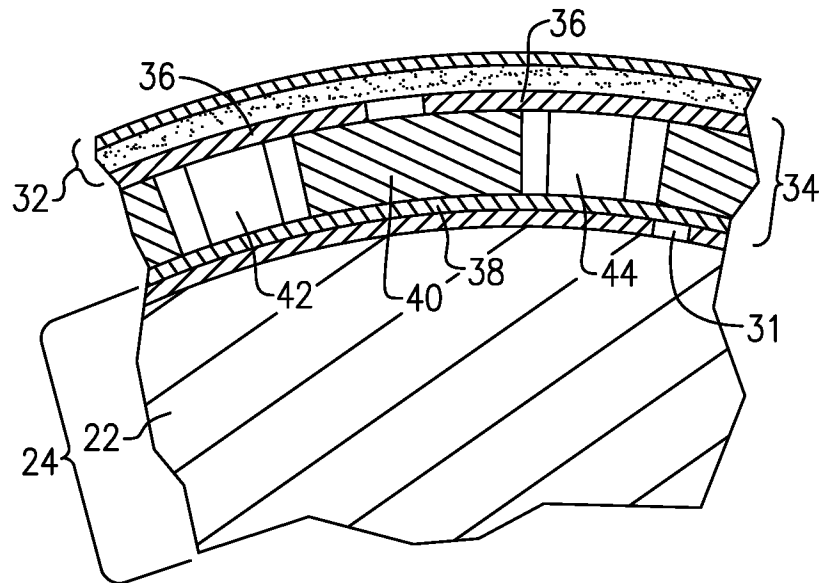


FIG.3




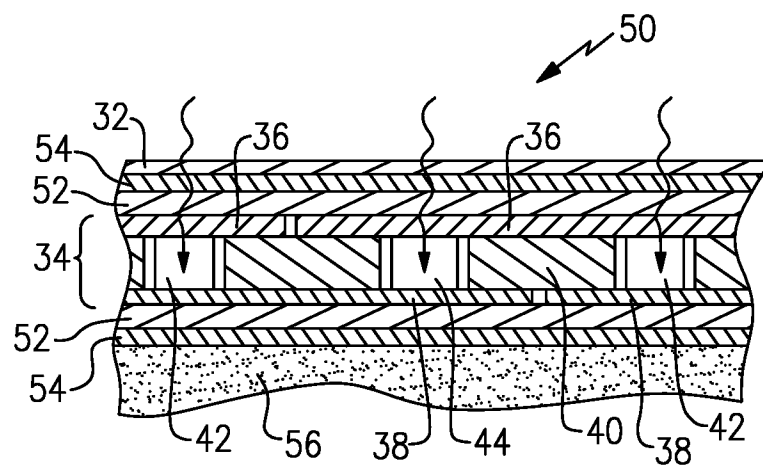


FIG.4

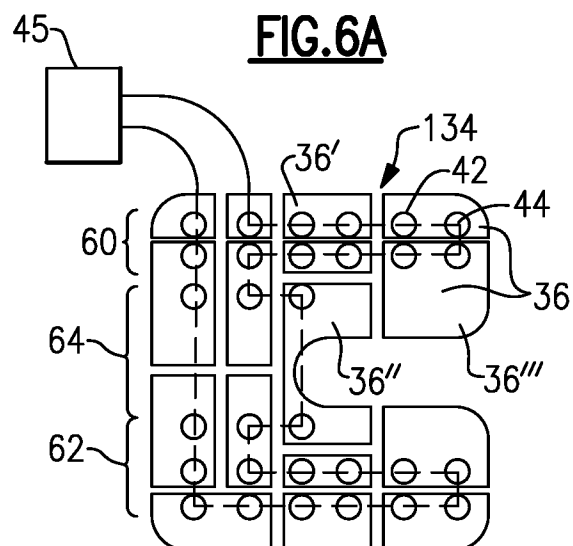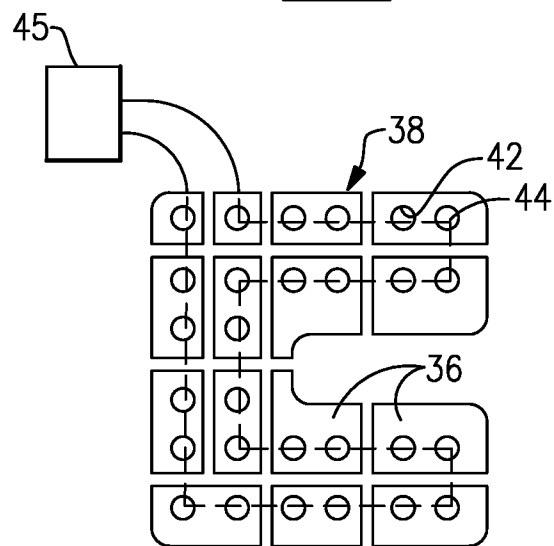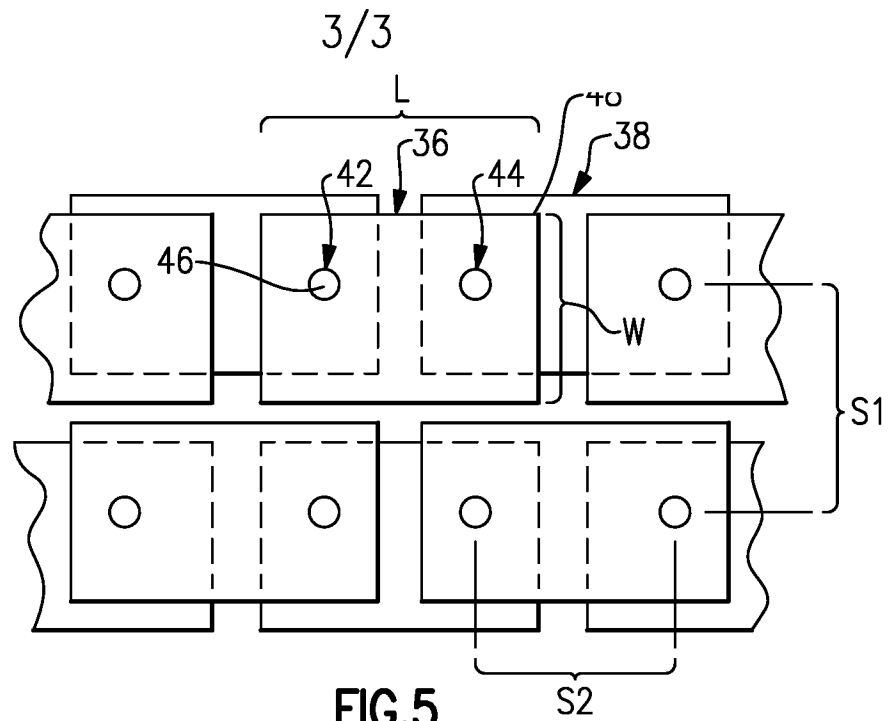

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/023526

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01L35/30 B60N2/56
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01L B60N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2016 012613 A (HITACHI CHEMICAL CO LTD; HONDA MOTOR CO LTD) 21 January 2016 (2016-01-21)	1-5
Y	abstract figures 3-7 paragraph [0001] paragraphs [0007] - [0010] table 1 claims 1,2	6-20
X	DE 195 03 291 A1 (FICHTEL & SACHS AG [DE]) 8 August 1996 (1996-08-08)	1,5,18
Y	abstract figures 1,2 column 1, lines 51-59 column 3, line 61 - column 4, line 17 ----- -/--	6,10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 May 2017

Date of mailing of the international search report

12/06/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Deconinck, Eric

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/023526

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2014 240269 A (HONDA MOTOR CO LTD) 25 December 2014 (2014-12-25) abstract figure 18 paragraphs [0135] - [0166] -----	10-20
Y	WO 01/30606 A1 (CHOI CHEOL HYEON [KR]; JEONG JONG NAM [KR]) 3 May 2001 (2001-05-03) abstract figure 3 -----	7-20
A	US 2002/074646 A1 (SAIKA MASAO [JP]) 20 June 2002 (2002-06-20) figure 5 paragraph [0033] -----	9,16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/023526

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2016012613 A	21-01-2016	NONE	
DE 19503291 A1	08-08-1996	NONE	
JP 2014240269 A	25-12-2014	NONE	
WO 0130606 A1	03-05-2001	AU 6370799 A WO 0130606 A1	08-05-2001 03-05-2001
US 2002074646 A1	20-06-2002	CN 1359161 A JP 3462469 B2 JP 2002185051 A KR 20020047007 A US 2002074646 A1	17-07-2002 05-11-2003 28-06-2002 21-06-2002 20-06-2002