



(51) International Patent Classification:

A61B 17/115 (2006.01) A61B 17/11 (2006.01)
A61B 19/00 (2006.01) A61M 1/00 (2006.01)
A61B 17/00 (2006.01)

(21) International Application Number:

PCT/EP2011/003609

(22) International Filing Date:

19 July 2011 (19.07.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2011 102 686.3 20 May 2011 (20.05.2011) DE

(71) Applicant (for all designated States except US):
VESTWEBER, Boris [DE/DE]; Carl-Leverkusstraße 4,
51519 Odenthal (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ZITZ, Werner**
[DE/DE]; Hauptstraße 27, 50859 Köln (DE).

(74) Agent: **SCHLEITZER, Dirk, Karsten**; Gesthuysen, Von
Rohr & Eggert, Huyssenallee 100, 45128 Essen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ANASTOMOTIC DEVICE

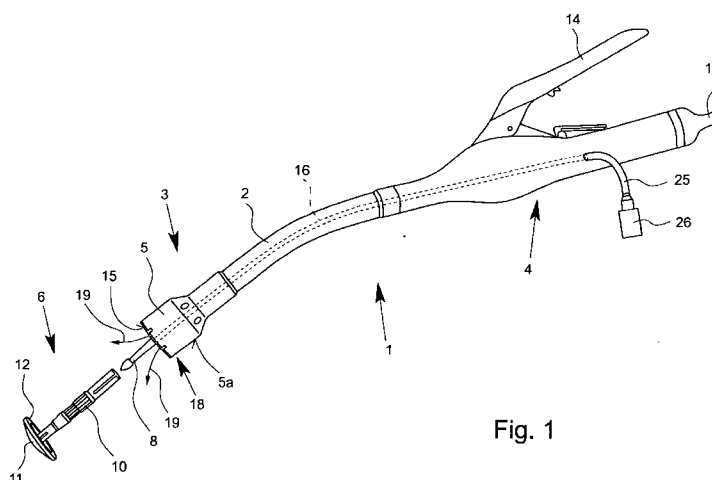


Fig. 1

(57) Abstract: Illustrated and described is an anastomotic device (1) for forming anastomoses, in particular of intestine anastomoses, with an introducer sheath (2) for insertion into a body lumen, wherein a thrust bearing part (6) is provided for the head section (3) and within the head section (3) an extendable and retractable knife (7) and a retaining pin (8) are arranged. According to the invention at least the actuating part (4) and the head section (3) of interconnected fluid supply channel (16) and at the head section (3) at least one fluid outlet (17) connected with the fluid supply channel (16) are provided for producing a fluidic connection between the actuating part (4) and the head section (3) while inserting the head section (3) into the body lumen and/or when pushing the introducer sheath (2) into the body lumen, in which the fluidic connection is configured for discharging an inflation liquid (19) into the body lumen.

Anastomotic Device

The invention relates to anastomotic device for the formation of anastomoses, in particular from intestine anastomoses, with an introducer sheath for feeding into a body lumen, preferably for feeding into the large intestine, with a particularly thickened or swelled head section at the distal end of the introducer sheath and with an actuating part at the proximal end of the introducer sheath. In a preferred manner, the invention relates to an anastomotic device, which has a thrust bearing part for the head section, in which a retractable and extendable knife and a retaining pin are arranged within the head section, wherein the thrust bearing part can be moved relative to the head section and the retaining pin can be extended into the head section for inserting the introducer sheath into the body lumen and whereby the retaining pin after withdrawing it from the head section with the thrust bearing part can be joined and the thrust bearing part can be moved by inserting the retaining pin into the head section against the head section. From the viewpoint of invention, the expressions "proximal" and "distal" refer to the field of vision of the person operating the anastomotic device, i.e. "proximal" on the person with respect to the side turned toward the person operating the anastomotic device and "distal" to the side away from the person.

In surgery, operationally produced connections between blood vessels, nerves and hollow organs, like for example large intestine parts are designated as anastomoses. Fundamentally, under anastomosis is understood a connection between two anatomical structures. For producing anastomoses, anastomotic devices of different design can be used, in particular the so called clamp inserters. While carrying out surgical clamping operation with such a clamp inserter, two tissue parts and/or areas are interconnected by a set of clips, which form a body lumen in each case, for example two separate large intestine parts.

DE 10 2007 057 207 AI discloses a surgical clamp inserter for anastomoses, with which clamps from a head section can be brought to an anvil section, whereby the head section has a hollow-cylindrical head section facing the anvil section, and an retractable and extendable knife is arranged in the head section. The head section takes up a clamp device. Within an area surrounded by the head section, a retractable and extendable trocar tip is arranged, with which the anvil section is connected. The anvil section is provided with an arrangement of clamp shaping recesses, wherein the clamps are driven into the tissue and the clamps at the anvil section are formed or remodelled by manipulating the clamp device. For the formation of an intestine anastomosis, a section of the intestine having a pathological tissue is removed in the first step. The intestine is divided into a first part area with a proximal end and a second part area with a distal end, whereby the part areas must be

joined by a link again, in order to reproduce the continence. This connection with clamp inserter is known from DE 10 2007 057 207 AI such that the thrust bearing part is removed from the head section and inserted with a so-called purse-string suture into the first proximal part area of the intestine. The open end of the second distal part area is sutured with a cross suture. Subsequently, the head section of the anastomotic device without the thrust bearing part already inserted is introduced through the anus and demonstrated then up to the sealed end of the second distal part area of the intestine. Afterwards the cross suture of the second distal part area is punctured by retracting the retaining pin from the head section of the retaining pin, until the retaining pin forms a positive connection in the following with the thrust bearing part. The retaining pin is now telescoped into the head section with the coupled thrust bearing part, which is located in the first part area of the intestine. The thrust bearing part with the proximal part area of the intestine is moved against the head section with the distal part area of the intestine, so that a clamping and the subsequent separation of the surplus tissue can be accomplished. After re-establishing the continence, the anastomotic device is retracted completely from the body lumen and removed from the anus.

Well-known anastomotic devices have the disadvantage that the surrounding body tissue often gets damaged during insertion into the body lumen and thus to pain after the operation. This occurs in particular with such anastomotic devices, which have a sharp edged head-section and a form thickening in distal direction. The forward movement of the head section within the body lumen, in particular with heavily lined intestinal mucosa, is then clearly affected and the operational risk increased.

In order to avoid injuries to the intestinal tissue while inserting the anastomotic device, an isotonic saline solution or even water in the introducer sheath can rinse the intestine via the sphincter muscle. If the liquid is transported into the intestine passing the device on the side of the device, this is again retracted into the device while pushing then anastomotic device and is pressed out of the piece of the intestine.

In order to effectively avoid injury to the body, in particular to the anal canal, while inserting the head section of clamp inserter, as known from DE 10 2007 057 207 AI, into the body of the patient, in case of the known clamp inserter a provision is made such that in the anvil section removed by the trocar tip the front end of the head section can be covered by a cap. The cap is attached to the trocar tip. The trocar tip is extended such that with attached cap the cap covers the front end of the head section, thus fitting the same. Therefore, the cap covers at least those front areas of the head section, which are relatively sharp edged and can lead to injuries while inserting the head section through the anal canal. While inserting the equipment, the cap executes thus the function of a protective cap. Using the cap, a thread arranged outside of the device is connected, wherein for removing the cap the trocar tip is inserted, so that the trocar tip is disengaged with the cap. The cap can be taken off the

head section without laterally touching at the head section by means of the thread present on the cap and remains laterally apart from the head section. After the clamping process and/or connecting the two intestine ends, the clamp inserter is pulled through the anal canal out of the body of the patient. The cap is pulled out by means of the thread through the anal canal. In the case of known clamp inserter, it is disadvantageous that the cap is taken off via a thread from the head section and afterwards remains by the side of the head section. When taking out the thread and by arranging the cap beside the head section it can cause injuries to the surrounding tissue in case of movement of the head section. In all other respects, it can be seen that taking off the cap with the thread is not easily possible, if the head section on the side of the thread lies close against the tissue. Even pulling the cap out of a body lumen with the help of the thread is difficult and can lead to further injuries of the body tissue.

The task of the present invention is it to make available anastomotic device of the kind as specified earlier, which would allow easy insertion into a body lumen and with a less danger of injuries to the surrounding body tissue. Further, the said anastomotic device should allow a leak test before by surgery of a sealed, in particular sutured opening of the body lumen, for example the leak test of a cross suture in a distal portion of the large intestine.

In the case of an anastomotic device of the type as specified above, the said task is solved by the fact that at least an actuating part and the head section of the inter-connected fluid supply channel and at the head section at least a fluid outlet connected with the fluid supply channel are provided for producing a fluidic connection between the actuating part and the head section while inserting of the head section into the body lumen and/or when pushing the introducer sheath forward in the body lumen, wherein the fluidic connection is configured for discharging an inflation liquid into the body lumen. In a preferred manner, the fluid supply channel is extended on the basis of the actuating part inside the introducer sheath up to the head section.

Underlying basis of the invention is to simplify the insertion of the head section in the body lumen and pushing the introducer sheath forward into the body lumen by inflating the body lumen and/or the body tissue restricting the body lumen and in doing so, injuries to the surrounding body tissue, as they occur when pushing the sharp-edged head section forward in the anastomotic devices as known from prior art, can be effectively avoided. Thanks to the filling of the body lumen with the inflation liquid, the insertion and pushing forward of the said anastomotic device is facilitated with small frictional resistance. In particular, the said anastomotic device is suitable for the formation of an anastomosis between two (large) intestine parts with heavily lined intestinal mucosa. Filling the intestine with the inflation liquid improves the sliding ability of the anastomotic device in the piece of intestine, wherein it is

possible in a simple way to push the anastomotic device forward to a specific point in the intestine.

The body lumen is inflated by adding an inflation liquid through the introducer sheath and the head section of the said anastomotic device and/or if necessary, by the retaining pin. During insertion in the head section and/or while pushing the introducer sheath of the anastomotic device forward into the body lumen and, preferably, with an anastomotic device configured like a clamp inserter before puncturing a surgically sealed, in particular sutured, opening of the body lumen, the liquid supply is provided with the retaining pin of the anastomotic device. In particular, the fluid addition takes place before puncturing the suture and before connecting the thrust bearing part with the head section. The term "suture" is used here in a very general sense. According to the invention, a suture can be obtained by sewing, clamping, sticking or joining of an opening of the body lumen together. Deflating the lumen can take place automatically when pulling the anastomotic device out of the body lumen. In principle, it is also possible that inflation liquid can be sucked off through at least one outlet in the head section and the introducer sheath from the body lumen.

Further, the leak-tightness of a distal portion of the intestine sealed with a cross suture can be checked by inflating in a simple way. In order to check the leak-tightness of a suture, a liquid with a dye can be supplied as inflation liquid, preferably water or isotonic saline solution, wherein using a simple visual control it can be determined whether and to what extent the supplied inflation liquid comes out through the suture from the body lumen. Besides, the inflation degree of the body lumen and/or volume increase can be visually checked while inflating and "overfilling" can be safely avoided. The addition of inflation liquid into the body lumen fulfils thus a dual function. Preferably a wound-treatment inert liquid is supplied. The inflation liquid can, however, contain also a medicine, which serves for wound treatment and improves wound healing.

The inflation liquid is discharged into the body lumen preferably directly, once a proper liquid-proof connection between the head section of the anastomotic device and the body tissues surrounding the head section is established. With the formation of an intestine anastomosis, the supply and/or delivery of the inflation liquid can take place, once the head section of the anastomotic device has passed the sphincter muscle. Thus an inadvertent discharge of the inflation liquid during further insertion of the anastomotic device into the body lumen is prevented.

While inserting the head section and/or when pushing the introducer sheath forward in the body lumen the retaining pin is not completely retracted and is found in a position, in which the retaining pin does not rise above the head section in axial direction and/or does not protrude over the front edge of the head section. Thus, an injury to the surrounding tissue can be avoided by the retaining pin. During insertion through the head section and/or when

pushing the introducer sheath forward, the retaining pin is completely retracted into the head section. In the completely retracted condition the tip of the retaining pin is fully lowered in a channel in the head section and/or accommodated by the channel, the tip of the retaining pin in completely retracted condition reaches a maximum insertion depth. Accordingly the fluidic connection can be preferably configured for a discharge of the inflation liquid into the body lumen with essentially fully retracted retaining pin. In principle, the retaining pin can be slightly retracted, if there is an addition of the inflation liquid. It is essential that an addition of the inflation liquid is possible if a tip of the retaining pin does not protrude over the head section in axial (distal) direction.

The discharge of the inflation liquid into the body lumen can preferably take place at the distal face of the head section, so that in a simple way it is guaranteed that a liquid discharge is not possibly impaired by the surrounding body tissues lying close to the lateral surface and/or side of the head section.

With a preferred embodiment, the extendable and retractable retaining pin is led within the guide lumen that is concentrically arranged to the head section, whereby the inflation liquid can be supplied via an inlet and an outlet of the guide lumen. The guide lumen is connected with the fluid supply channel or forms a part of it. Inlet and outlet of the lumen form the fluid outlet. A fluid addition can be made then with the retracted pin laterally at the pin via an annular gap between the pin and a side panel of the head section restricting the lumen, for example a sleeve or the like. Thus, a uniform liquid discharge is design-wise possible in a simple way in the middle area of the face of the head section, which facilitates inflating of the surrounding body tissue. Further a relatively large flow rate of the inflation liquid can be discharged via the channel of the retaining pin, which renders possible a certain volume increase of the lumen within a short time.

In the case of another embodiment of the anastomotic device it may be provided that the head section has a distal hollow-cylindrical head, which includes a clamping mechanism, whereby the fluid outlet is provided in a circular distal front surface of the head section. With this embodiment, the inflation liquid is delivered through the hollow-cylindrical head section as such, preferably through clamping outlets in the front surface of the head section, through which even clamps are ejected on the thrust bearing part. With this embodiment, the clamping outlets must be connected with at least one fluid supply channel, in order to make the fluid supply possible from the outside through the introducer sheath.

The said anastomotic device can have a circular knife arranged concentric to the head section. Here it is possible that the inflation liquid can be delivered through the annular space between the knife and lateral panel of the head section restricting a middle lumen for extending and retracting the retaining pin. The side panel can be formed by a distal sleeve in the head section, wherein the retaining pin is guided while retracting from and extending in

the sleeve. At least one fluid outlet is arranged in the area of the annular space at the distal face of the head section between the knife and the sleeve. Preferably a multiplicity of outlets are provided, which are arranged uniformly spaced from one another in circumferential direction. The inflation liquid is delivered thus evenly distributed over the periphery of the annular space, which leads to a uniform volume increase during inflating.

A further alternative embodiment can provide that the inflation liquid is delivered directly via the retaining pin. For this purpose, the retaining pin has at least one outlet for the inflation liquid and a channel for guiding the liquid, which is connected with the fluid supply channel or is a part of it. At least one outlet in the retaining pin can be configured and aligned in such a manner that the inflation liquid essentially exits the retaining pin arranged distal and/or coaxial to the head section, which simplifies the delivery of the inflation liquid into the body lumen. The retaining pin can have, for example, a multiplicity of radially arranged fluid outlets, wherein via each outlet a directed liquid discharge can be possible in front and/or in distal direction.

By collapsing the lumen it can happen that the body tissue from outside lies close to an outside peripheral area of the head section and thus a liquid delivery across the periphery and/or side of the head section is rendered more difficult. With a suitable arrangement and size of the fluid outlets, laterally at the head section it is possible in principle that the inflation liquid is delivered across the lateral surface of the head section into the body lumen. The head section can have preferably a maximum diameter at the distal end, wherein the fluid outlets are preferably located in the area of the distal end of the head section, further in the area of a distal edge section, which extends over a third of the overall length of the head section and has a width of less than 2 cm, in particular less than 1 cm. Outlets can be uniformly distributed over the extent and/or are provided circumferentially in the lateral surface. The delivery of liquid can take place preferably forwards and/or directed distal. In this way, a simple liquid supply and/or discharge can be ensured, if the surrounding body tissue lies close to the external surface of the head section when inserting the anastomotic device.

The fluid supply channel can be led out of the actuating part and if required, connected to a liquid reservoir for inflation liquid. For example, the fluid supply channel can be configured as hose or with a hose, wherein the hose can jut out for example 3 to 4 cm from the actuating part. In a simple way, this facilitates connection of a filling syringe with the inflation liquid to the hose. The hose can have a screw-type cap at its open end, in particular a three-way connection, which allows the addition of different fluids on the one hand and/or the liquid-proof seal, on the other hand. The hose can be retracted laterally from the actuating part, which facilitates a connection to a reservoir. Further, the invention allows that a reservoir for inflation liquid is firmly connected with the actuating part and/or forms a part of the same.

The anastomotic device has then a container or the like, which is filled with the inflation liquid. While inflating, the inflation liquid is withdrawn from the container via the fluid supply channel into the body lumen. Finally an equivalent embodiment can provide a fluid supply from outside via the introducer sheath and the head section, whereby the fluid can be supplied to the anastomotic device in an area, which lies between the head section and the actuating part of the said anastomotic device.

Further features of the invention are described in the subclaims, in the description of the figures as well as in the figures themselves, whereby all individual characteristics and all characteristic combinations can be essential from the viewpoint of the invention, even if the latter is not described in detail.

In the following, embodiments of the invention are described exemplary on the basis of drawing, wherein the invention is not limited to the embodiments as shown in the figures and wherein the characteristics of the embodiments can be combined with one another, without having to describe this in detail. In particular, the subsequently described alternative possibilities of delivering the inflation liquid via the head section of the anastomotic device into the body lumen can be combined with one another.

It would show:

Fig. 1 a perspective view of the said anastomotic device designed for implanting a surgical staple inserter for anastomoses,

Fig. 2 a distal front view of a head section of the said anastomotic device with a first embodiment of the invention,

Fig. 3 a distal front view of a head section of the said anastomotic device with a second embodiment and

Fig. 4 a distal front view of a head section of the said anastomotic device with a third embodiment.

Fig. 1 shows an anastomotic device 1 for forming anastomoses, in particular from intestine anastomoses, with an introducer sheath 2 for inserting into a tubular body lumen (not shown here), for example into a proximal portion of the large intestine through the anus, with a head section 3 at the distal end of the introducer sheath 2 and with an actuating part 4 at the proximal end of the introducer sheath 2. The head section 3 has a distal hollow-cylindrical head section 5, which houses the clamping mechanism (not shown in detail). When clamping by means of the anastomotic device 1, the clamps (not shown) of the head section 3 can be moved to a thrust bearing part and/or anvil section 6. Within the head section 3, a ring-shaped extendable and retractable knife 7 and a retaining pin 8 are arranged, wherein the retaining pin 8 can be extended and retracted into the head section 3. The knife 7 and the retaining pin 8 are arranged concentric to the hollow-cylindrical head section 5, wherein the retaining pin 8 is arranged centrically in the head section 3. In the case of the retaining

pin 8 that can be extended from the head section 3, as is shown in Fig. 1, the latter can be connected with a shaft or vertical passageway 10 of the thrust bearing part 6, wherein the shaft 10 is connected with anvil 11. On the proximal side and/or the side facing the head section 3, anvil 11 has a circular anvil surface 12 with clamp shaping recesses (not shown). The connection of retaining pin 8 and thrust bearing part 6 can take place by snapping in the retaining pin 8 and the shaft 10.

The retaining pin 8 is extended and retracted by turning a flattened adjusting screw 13 at the proximal end of the actuating part 4. The clamping mechanism is actuated by means of an operating grip 14 of the actuating part 4, wherein during operation of the operating grip 14 in a sequence matching the operation procedure knife 7 is also extended.

For producing an intestine anastomosis, the anastomotic device 1, as shown in Fig. 1, can be used as follows. After removing a diseased part of the large intestine, it is necessary to produce the continence to join the remaining proximal portion and the distal portion of the large intestine through a suture. For this purpose, the thrust bearing part 6 is sewn into the proximal portion of the large intestine. This portion of the large intestine surrounds the anvil 11, while the shaft 10 juts out from this portion of the large intestine. Subsequently, the anastomotic device 1 is inserted with a fully retracted retaining pin 8 through the anus and pushed forward up to the distal portion of the intestine sealed with a cross suture. Then the retaining pin 8 is shifted to the maximum extended position in accordance with Fig. 1 and punctures the suture in the distal portion of the intestine.

After connecting the retaining pin 8 with the shaft 10 of the thrust bearing part 6, the thrust bearing part 6 is moved by inserting the retaining pin 8 into the head section 3 against the head section 3, until the intestine ends lie close together. The clamping mechanism is then activated, wherein the clamps are extended from a circular front surface 15 of the head section 5 and are moved against the facing circular anvil surface 12 and are bent there, so that the two intestine parts are interconnected. During actuation of the clamping mechanism by means of the operating grip 14, knife 7 is extended from the head section 3, so as to separate a tissue part, which is located within the periphery of the tissue clasped between the head section 3 and the thrust bearing part 6. According to the described clamping of the intestine parts, the anastomotic device 1 can be retracted from the body through the anal canal. DE 10 2007 057 207 AI discloses a method with the features as described before and a clamp inserter.

Deviating from the clamp inserter as known from DE 10 2007 057 207 AI, the anastomotic device 1, as shown in Fig. 1, is provided for the purpose of delivering an inflation liquid 19 via a fluidic, i.e. liquid-containing, connection between the actuating part 4 and the head section 3 into the body lumen and thus, effect an inflation of the (collapsed) body tissue. Filling the body lumen with the inflation liquid causes a volume increase, which facilitates a

friction-free and an injury-free insertion of the anastomotic device into the body lumen, for example through the anal canal into the distal portion of the large intestine. Also for a leak test of a suture, which seals, for example, the distal portion of the intestine, inflating the body lumen before producing the anastomosis is of advantage. Supply of a coloured inflation liquid allows a visual control during insertion of the anastomotic device 1 and during the leak test of the suture in a simple manner, wherein it is determined whether and to what extent a liquid has penetrated the suture.

In the case of anastomotic device 1 as shown in Fig. 1, at least one actuating part 4 and the head section 3 of the inter-connected fluid supply channel 16 and at the head section 3 at least one fluid outlet connected with the fluid supply channel 16 (not shown in Fig. 1) are provided. The configuration of the fluidic connection allows thereby a liquid discharge via the anastomotic device during insertion in the head section 3 into the body lumen, for example with an intestine anastomosis once a distal boundary region 18 of the head section 3 has passed the sphincter muscle, and/or when pushing the introducer sheath 2 forward.

As per Fig. 1, the inflation liquid 19 can also be delivered if the retaining pin 8 is extended at least area-wise out of the head section 3 and/or a tip of the retaining pin 8 juts out across the distal outer edge of the head section 3. Because the retaining pin 8 during insertion of the anastomotic device into the body lumen is usually fully retracted into the head section 3, the fluidic connection is configured for the delivery of the inflation liquid into the body lumen even in the case of partly, preferably complete, retracted retaining pin 8. In the retracted condition, the tip of the retaining pin 8 is arranged inside the head section 3. With completely retracted retaining pin 8, a maximum insertion depth of the retaining pin 8 is reached.

The delivery of the inflation liquid 19 into the body lumen via the distal face 19 of the head section 3 is advantageous, since in this area a largely unhindered liquid discharge is possible also in a collapsed body lumen.

As can be seen from Fig. 2, the retaining pin 8 can be led in an extendable and retractable manner within guide lumen 21 arranged concentric to the head section 3. The inflation liquid 19 exits via an inlet opening and an outlet of the guide lumen 21, wherein the guide lumen 21 in radial direction is restricted by a sleeve 22, which is arranged stationary in the head section 3 and is flexibly guided into the retaining pin 8.

In the case of an alternative embodiment of the anastomotic device 1, as shown in Fig. 1, it may be provided as per Fig. 3 that the delivery of the inflation liquid takes place through clamp outlets 23 of the clamping mechanism in a circular front surface 15 of the head section 5. In principle, further outlets (not shown) may be provided in the front surface 15, so that the liquid delivery does not take place via the clamp outlets 23.

In the case of the embodiment of the anastomotic device 1, as shown in Fig. 4, it is provided to deliver the inflation liquid 19 via the annular space between the knife 7 and the sleeve 22

restricting the middle guide lumen 21 for retracting and extending the retaining pin 8. Knife 7 is firmly connected with a pusher part 24 and flexibly arranged together with the pusher part 24 relative to the sleeve 22. That pusher part 24 has two guide webs 26a and recesses for further guide webs 26b fixed stationary at the sleeve 22, so that a guided movement of pusher part 24 together with the knife 7 is possible in axial direction. In the area between the webs or bars 26a and the recesses for stationary webs 26b, the pusher part 24 has conical side panel sections approaching the actuating part 4 in axial direction. The liquid supply can be made now through the fluid outlets 17 in the side panel sections of pusher part 24. Alternatively and/or supplementing it may be provided that the inflation liquid is delivered through gap spaces between the side panel sections of pusher part 24 and the sleeve 22 and/or the further guide webs 26b.

It is not shown in detail that even laterally at the head section 3, preferably in the distal boundary region 18 of the head section 3, at least one fluid outlet, preferably a multiplicity of fluid outlets evenly distributed in circumferential direction, arranged can be planned, in order to deliver inflation liquid via a distal lateral surface 5a of the head section 5.

As can be finally seen from Fig. 1, hose 25 may be provided sideways at the actuating part 4, which is connected with the fluid supply channel and/or forms the fluid supply channel 16. Hose 25 can be connected to a reservoir for inflation liquid 19 (not shown). For the sake of simplicity, hose 25 has at its free end a screw-type cap 26, so that it is possible after unscrewing the screw-type cap 26 in a simple way to guide with one filling syringe or the like inflation liquid 19 via the hose 25 and the fluid supply channel 16 to the head section 3. Not shown is that a three-way connection may be provided, which in a simple way facilitates the supply of different liquids via hose 25 and the fluid supply channel 16.

Patent Claims:

1. Anastomotic device (1) for the formation of anastomoses, in particular of intestine anastomoses, with an introducer sheath (2) for insertion into a body lumen, preferably for insertion into the large intestine, with an in particular thickened head section (3) at the distal end of the introducer sheath (2) and with an actuating part (4) at the proximal end of the introducer sheath (2), wherein, preferably, a thrust bearing part (6) is provided for the head section (3) and within the head section (3) an extendable and retractable knife (7) and a retaining pin (8) are arranged, wherein the thrust bearing part (6) can be moved relative to the head section (3) and the retaining pin (8) can be extended for inserting the introducer sheath (2) into the body lumen in the head section (3) and wherein the retaining pin (8) after retracting from the head section (3) can be joined with the thrust bearing part (6) and the thrust bearing part (6) can be moved by extending the retaining pin (8) into the head section (3) against the head section (3), **characterized by the fact** that at least the actuating part (4) and the head section (3) of inter-connected fluid supply channel (16) and at the head section (3) at least one fluid outlet (17) connected with the fluid supply channel (16) are provided for producing a fluidic connection between the actuating part (4) and the head section (3) while inserting the head section (3) into the body lumen and/or when pushing the introducer sheath (2) into the body lumen, wherein the fluidic connection is configured for discharging an inflation liquid (19) into the body lumen.
2. Anastomotic device as per claim 1, characterized by the fact that the fluidic connection is configured for discharging the inflation liquid (19) into the body lumen with fully retracted retaining pin (8).
3. Anastomotic device as per one of the preceding claims 1 or 2, characterized by the fact that the discharge of inflation liquid (19) takes place into the body lumen at the distal face (18) of the head section (3).
4. Anastomotic device as per one of the preceding claims, characterized by the fact that the retaining pin (8) within a guide lumen (21) arranged concentric to the head section (3) is configured in an extendable and retractable manner, wherein the inflation liquid (19) can be discharged via an inlet and outlet of the guide lumen (21).
5. Anastomotic device as per one of the preceding claims, characterized by the fact that the head section (3) has a distal hollow-cylindrical head section (5), which accommodates a clamping mechanism, and that the fluid outlet is provided in a circular front surface (15) of the head section (5).
6. Anastomotic device as per one of the preceding claims, characterized by the fact that a circular knife (7) arranged concentric to the head section (3) is provided, wherein the inflation

liquid (19) can be discharged via the annular space between the knife (7) and a side panel section of the head section (3) restricting a guide lumen (21) for retracting and extending the retaining pins (8).

7. Anastomotic device as per one of the preceding claims, characterized by the fact that the inflation liquid (19) can be discharged via the retaining pin (8).

8. Anastomotic device as per one of the preceding claims, characterized by the fact that the inflation liquid (19) exits from the head section (3) directed towards distal direction.

9. Anastomotic device as per one of the preceding claims, characterized by the fact that the fluid outlet is provided sideways at the head section (3), preferably, in a distal boundary region (18) of the head section (3).

10. Anastomotic device as per one of the preceding claims, characterized by the fact that the fluid supply channel (16) is led out sideways from the actuating part (4) and if required, can be connected to a reservoir for inflation liquid (19).

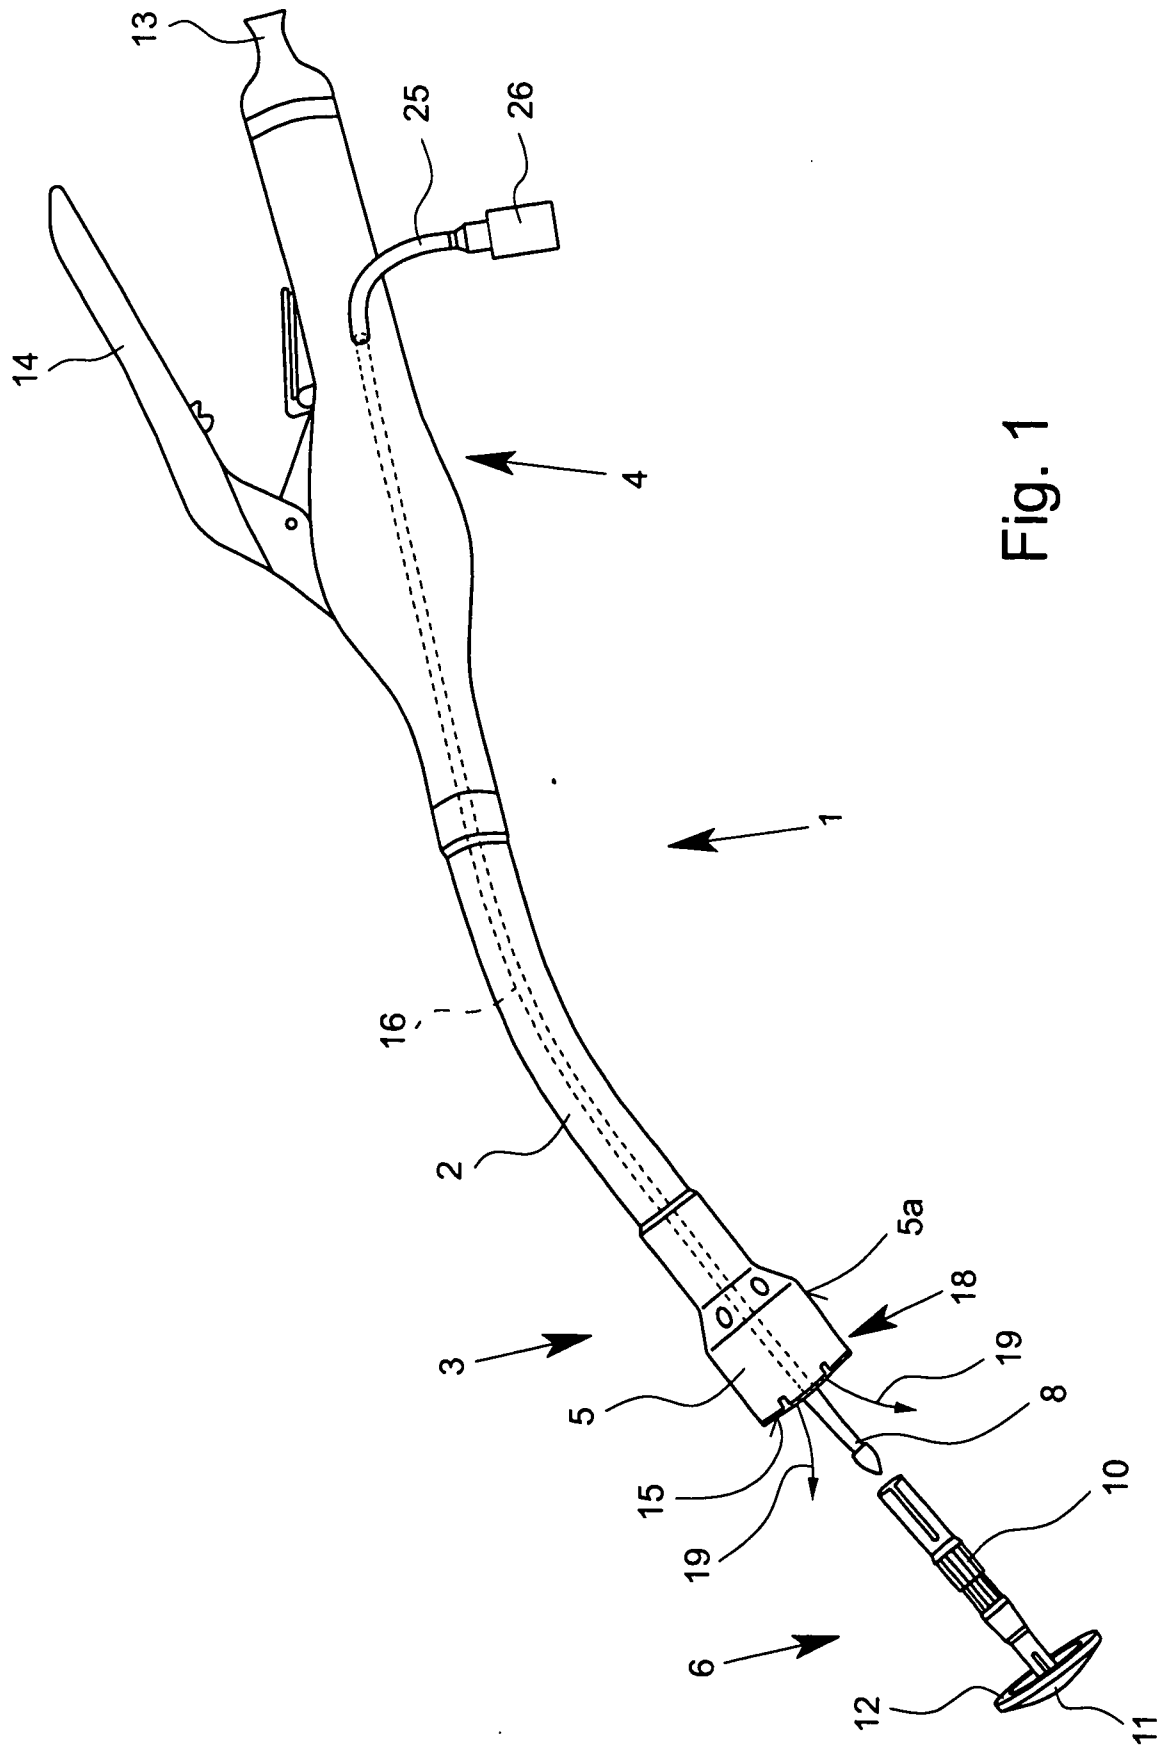


Fig. 1

2/3

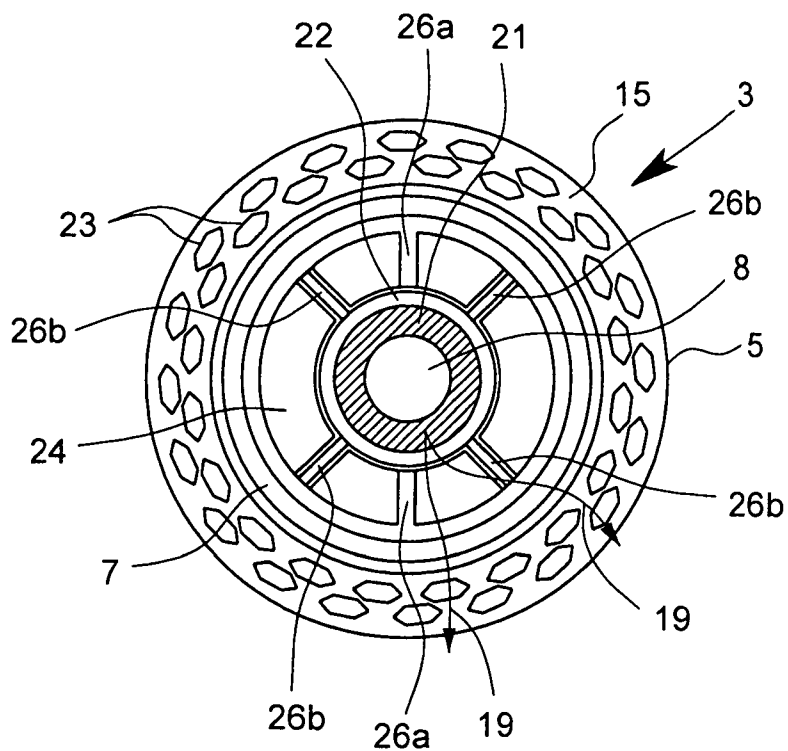


Fig. 2

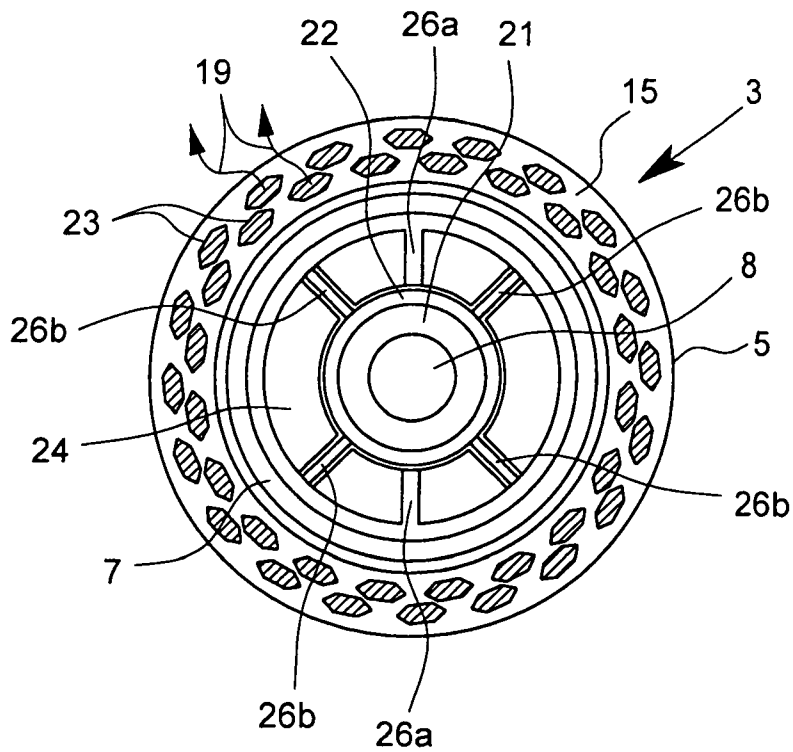


Fig. 3

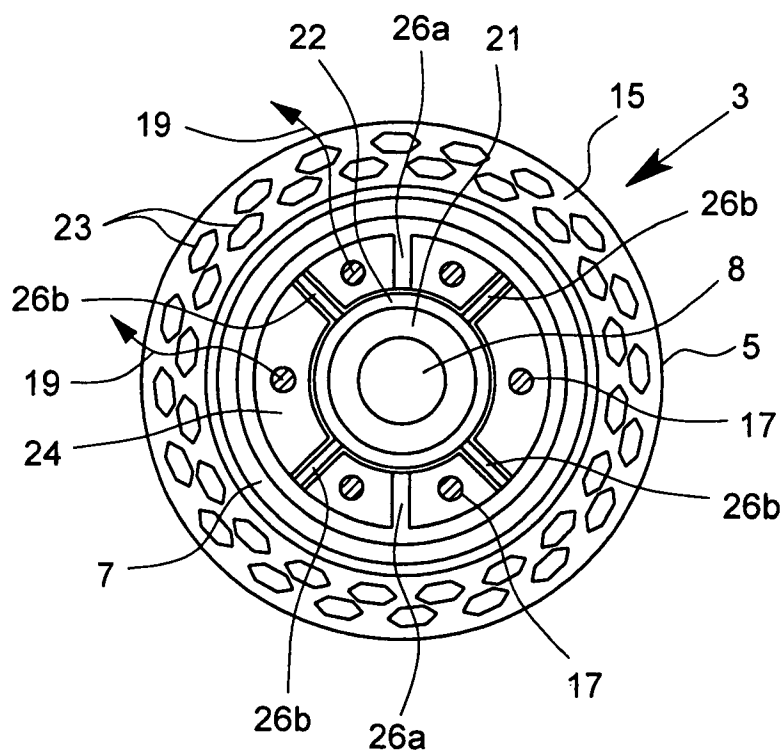


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/003609

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B17/115

ADD. A61B19/00 A61B17/00 A61B17/11 A61M1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/163598 A1 (BELZER GEORGE E [US]) 1 July 2010 (2010-07-01) abstract paragraphs [0008], [0011], [0054]; figures 11a-11d -----	1-6,8-10
X	EP 1 754 445 A2 (TYCO HEALTHCARE [US]) 21 February 2007 (2007-02-21) abstract; figures 1-2 paragraphs [0072] - [0073] -----	1,7,10
X	US 2010/230467 A1 (CRISCUOLO CHRISTOPHER J [US] ET AL) 16 September 2010 (2010-09-16) abstract; figures 7,9-10,12,21-23 -----	1,7
X	US 2006/108393 A1 (HEINRICH RUSSELL [US] ET AL) 25 May 2006 (2006-05-25) abstract; figures 1-3,7-8,20-21 -----	1,2,4,7, 9



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 March 2012

Date of mailing of the international search report

20/03/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Macaire, Stéphane

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/003609

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010163598	A1	01-07-2010	NONE
EP 1754445	A2	21-02-2007	AU 2006203500 A1 01-03-2007
		CA 2556129 A1 15-02-2007	
		CN 1915180 A 21-02-2007	
		CN 101791234 A 04-08-2010	
		EP 1754445 A2 21-02-2007	
		EP 2319423 A2 11-05-2011	
		EP 2322103 A2 18-05-2011	
		JP 2007050253 A 01-03-2007	
		US 2007034666 A1 15-02-2007	
		US 2007034667 A1 15-02-2007	
		US 2007034668 A1 15-02-2007	
		US 2008035702 A1 14-02-2008	
		US 2008164297 A1 10-07-2008	
		US 2008190990 A1 14-08-2008	
		US 2008272175 A1 06-11-2008	
		US 2009026245 A1 29-01-2009	
		US 2009030432 A1 29-01-2009	
		US 2009152324 A1 18-06-2009	
		US 2009321496 A1 31-12-2009	
		US 2010108739 A1 06-05-2010	
		US 2010200641 A1 12-08-2010	
		US 2010270356 A1 28-10-2010	
		US 2011042440 A1 24-02-2011	
		US 2012043369 A1 23-02-2012	
US 2010230467	A1	16-09-2010	AU 2005222503 A1 04-05-2006
		AU 2011200153 A1 03-02-2011	
		CA 2523170 A1 18-04-2006	
		EP 1652481 A2 03-05-2006	
		JP 2006110357 A 27-04-2006	
		US 2006085033 A1 20-04-2006	
		US 2010230466 A1 16-09-2010	
		US 2010230467 A1 16-09-2010	
US 2006108393	A1	25-05-2006	AU 2005295477 A1 27-04-2006
		CA 2584019 A1 27-04-2006	
		EP 1804682 A2 11-07-2007	
		JP 4801083 B2 26-10-2011	
		JP 2008516698 A 22-05-2008	
		JP 2009082727 A 23-04-2009	
		US 2006108393 A1 25-05-2006	
		US 2011036889 A1 17-02-2011	
		US 2011147432 A1 23-06-2011	
		US 2011147435 A1 23-06-2011	
		WO 2006044800 A2 27-04-2006	