

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
26 October 2006 (26.10.2006)

PCT

(10) International Publication Number
WO 2006/112661 A1(51) International Patent Classification:
H04L 12/22 (2006.01)(74) Agent: **PARK, Lae Bong**; 2FL., Dongun Bldg, 413-4,
Dogok 2-dong, Gangnam-gu, Seoul 135-272 (KR).(21) International Application Number:
PCT/KR2006/001454(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 19 April 2006 (19.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/673,253 19 April 2005 (19.04.2005) US
10-2005-0128101
22 December 2005 (22.12.2005) KR(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).(71) Applicant (*for all designated States except US*): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **LEE, Kyung Ju** [KR/KR]; 609-703 Booyoung Apt., Eunvit Maeul, Hwajong 1-dong, Dukyang-gu, Goyang-si, Kyunggi-do 412-271 (KR). **SONG, Yu Kyoung** [KR/KR]; 3-802, Twin-Vil, Jukjeon-dong Suji-gu, Yongin-si Gyeonggi-do 448-160 (KR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR CONTROLLING OF REMOTE ACCESS TO A LOCAL NETWORK

RA Device's Credential	User's Credential	Remote Access Enabled Devices
BnFsdlkjgdghlfS (PDA)	Unc90tuioopxlfS (Kalen)	e99b630e-0000-1000-aa40-285d8fd86a0
GkdfgjrEdfkgjsa (Notebook)	kiXopeaio903nHo (Kevin)	138efbcb-4807-47fb-b484-22dfb2cc0c6
BnFsdlkjgdghlfS (PDA)	kiXopeaio903nHo (Kevin)	e99b630e-0000-1000-aa40-285d8fd86a0

(57) Abstract: The present invention is to ensure security of a local network, e.g., a home network from remote access while allowing remote access. In a method of the present invention, if a device on the local network is to be accessed remotely, user identifying information (and/or device identifying information) and connection information of a target device, that are accompanied by the access, are compared with information of registered allowance entries and whether to allow the access is determined based on the comparison result. According to the method, remote access to a device invoked by a user (and/or a remote device) whose remote access is not set to allowance is blocked while remote access invoked by a user (and/or a remote device) whose remote access is set to allowance is admitted.

DESCRIPTION

METHOD AND APPARATUS FOR CONTROLLING OF REMOTE ACCESS TO A LOCAL NETWORK

1. Technical Field

5 The present invention is related to a method and apparatus for enabling remote access to a local network such as a home network.

2. Background Art

As an increasing number of electronic appliances such as
10 video or audio apparatuses or PCs have been used in a home and digital techniques have become dominant in video and audio signal processing, the need for communication among home electronic appliances or communication with other networks is also increasing. In addition, the demand for controlling home
15 electronic appliances through a single apparatus such as a PDA is also increasing.

To meet the demand, home networking technology has emerged for connecting home electronic appliances such as digital TVs or DVD players. The UPnP (Universal Plug and Play) is a key
20 technology required for implementing the home network.

According to the UPnP specification, every home network requires an apparatus, which handles data arbitration among elements (or nodes) connected to the network and assigns addresses to the elements. The apparatus also acts as a gateway
25 to a public network by using a public IP address, e.g., network address of the Internet, thereby enabling home network appliances to communicate with the Internet. The apparatus is called IGD (Internet GateWay Device), which can be a stand-alone device or embedded within another apparatus such as a PC or refrigerator.

30 Each device connected to a home network, in order for efficient utilization of limited public address resources, uses

one of private IP addresses assigned arbitrarily to a home network instead of using a separate public IP address for each device.

Instead of watching particular contents stored in a particular device (e.g., HTTP-based media server) by using a device on a home network, the user of a home network may want to watch contents stored in the media server remotely from outside. However, since each device connected to a home network, for the purpose of efficient utilization of limited public address resources, uses a private IP address assigned arbitrarily to the home network instead of using a separate public IP address for each device, access to the home network from outside is impossible.

One possible method to enable access from outside may be to use an NAT (Network Address Translation) module within IGD for port mapping, thereby providing mapped URLs. The above method brings about inconvenience that separate URLs should be prepared both for access from a device within a home network and from an external device. Since separate URLs are dynamically created and assigned to respective contents managed by a media server, it is infeasible to realize a method for enabling access from outside via mapping by the NAT module.

Another method can use a VPN (Virtual Private Network) client; when a VPN server is installed on a device carrying out a function of a gateway such as IGD and a VPN client is executed from a remote device to establish connection, the remote device is assigned a private IP address belonging to the range of private IP address managed by a gateway device, thereby becoming a virtual device on the home network and being able to make access to a media server with a private IP address. Since the above method, however, allows a remote device to make access to all the devices on a home network via a VPN client, security thereof should be considered.

3. Disclosure of the Invention

One objective of the present invention is related to allow remote access to a local network such as a home network, the

remote access being restricted to a kind of remote access to a device on a local network satisfying a remote permission condition for the purpose of security of the local network.

One method in accordance with the present invention creates permission information about devices and at the time of access to a device on the local network from outside, searches the created permission information for information of the access and connection information of a target device, thereby determining whether to allow the access in accordance with the search result.

10 In one embodiment in accordance with the present invention, the device connection information consists of connection protocol information, an IP address, and a port number.

In one embodiment in accordance with the present invention, the permission information is created from a procedure during which a remote access permission action is received from the device and user information and/or device information for remote access and device connection information are extracted from input argument of the received action, thereby being registered as an allowance entry.

20 In one embodiment in accordance with the present invention, the remote access permission action, as input parameter, has device connection information, user identifying information and/or identifying information of a remotely-accessed, unique identifying information of a device, and a parameter designating remote access permission/refusal.

In one embodiment in accordance with the present invention, the permission information, as input parameter, includes information extracted from an allowed device set action including user identifying information and/or identifying information of a remotely-accessed, unique identifying information of a device, and a parameter designating remote access permission/refusal.

30 In one embodiment in accordance with the present invention, the allowed device set action is created at a control point and transmitted to IGD.

35 In one embodiment in accordance with the present invention, the actions are defined in accordance with the specification of

Universal Plug & Play (UPnP).

4. Brief Description of the Drawings

Fig. 1 illustrates a structure of a network in accordance with one embodiment of the present invention;

5 Fig. 2a illustrates a structure of an action for configuring a remote access enabled device for a user;

Fig. 2b illustrates a list of remote access enabled devices for an individual user created by the action of Fig. 2a;

10 Fig. 3a illustrates a structure of an action setting connection allowance for a user in accordance with one embodiment of the present invention;

Fig. 3b illustrates a list of connection allowance for an individual user created by the action of Fig. 3a;

15 Fig. 4a illustrates a list of remote access enabled devices for an individual RA device created in accordance with another embodiment of the present invention;

Fig. 4b illustrates a list of connection allowance for an individual RA device created in accordance with an example of Fig. 4a;

20 Fig. 5 illustrates a list of remote access enabled devices for an individual RA device/user created in accordance with a further embodiment of the present invention; and

Fig. 6 illustrates a list of remote access enabled devices for an individual group created to control remote access
25 according to respective user groups in accordance with a yet another embodiment of the present invention.

5. Best Mode for Carrying Out the Invention

Hereinafter, according to the present invention, preferred embodiments will be described in detail with reference to
30 appended drawings.

Fig. 1 illustrates a structure of a network in accordance with an embodiment of the present invention.

Hereinafter, a procedure through which one embodiment in accordance with the present invention is carried out on the
35 network of Fig. 1 is described in detail. The present embodiment applies to a case where one of devices 101, 102, 103, 104

comprising a home network (HN) of Fig. 1 can not configure access control for an individual user.

An operator of a home network designates externally accessible devices from among devices connected to the home network to users permitted for remote access by using a control point 110. A control point in the above context is a control application that can inquire/control devices connected to a home network, the control application being executed in a physical device such as a PDA or a notebook. However, for convenience' sake, a device where the control application is run is called a control point.

When an operator designates a particular device as 'externally accessible' for a particular user by using the control point 110, the control point 110 invokes an action configuring the above on IGD 100. At this time, necessitated information to designate as 'externally accessible' is transferred as input argument of an action.

Beyond a function of remote access management in accordance with the present invention that will be described below, the IGD 100 also carries out conventional functions of data arbitration among devices connected to a local home network, configuration/management of network addresses, and a gateway to an external network, description thereupon being omitted due to not having direct relevance to the present invention.

An action that the control point 110 calls on the IGD 100 can have a structure of Fig. 2a.

Input argument of ConfigureExternalAccessPermission() action of Fig. 2a consists of user_id, UDN, and permission; user_id is identifier of a user (which can be user ID or a credential assigned to a user). UDN (Unique Device Name) is a unique identifier of a device designated as 'externally accessible'. Finally, permission is a parameter designating permission/refusal of external access.

In another embodiment of the present invention, instead of a user identifier, an identifier of a remotely-accessed (hereinafter, it is referred to as 'RA device'.) can be used. An

identifier of an RA device can be UDN, a user-friendly unique device name (which is described below in detail), or a credential assigned to an RA device. A credential of an RA device can be configured for a device to be remotely accessed by a user
5 directly on the IGD 100 or through a control point. Necessarily, as for devices that do not allow remote access, identifying information of an RA device may not be configured.

In a further embodiment of the present invention, user identifier and RA device can be set together. In the present
10 embodiment, a device on a home network to be accessed can be differed depending on which RA device is used for remote access by the user.

Through the action, according to the user (and/or RA device being used), remotely accessible devices can be selectively
15 filtered.

The ConfigureExternalAccessPermission() action assumes that the home network is operated based on UPnP; however, the present invention dose not necessarily impose UPnP as a necessary condition. If basic principles of the present invention described
20 below could be applied adaptively to a standard in a different specification, network security effect identical to that of the present invention would be obtained. Accordingly, the present invention is not limited to terms and formats of actions in accordance with UPnP network and accompanying standard.

25 When an operator specifies a device and a user for external access through the control point 110, the control point 110 puts information according to the designation into input argument and configures an action in the format as shown in Fig. 2a, the action being transferred to the IGD 100. Among the transferred
30 information, UDN is not the information that an operator manually enters; when an operator chooses a device from among a device list displayed in a readily perceivable graphic form (e.g., icons representing 101, 102, 103, 104 of Fig. 1), a previously identified UDN is used as input argument, the UDN being
35 identified from information contained in Device & Service Descriptor received from the device when the device is discovered

on a home network for the first time. In another embodiment in accordance with the present invention, instead of UDN, 'user-friendly unique device name' can be used. A user-friendly unique device name can be a character string entered (or chosen) by the user such as "common PDA", "TVinLivingRoom" or "TVinBedRoom", product code of the device, model number (S/N), and/or a name combined with UDN. The combined name is seen by the user as an input character string, whereas a product code, model number, UDN, or a combination thereof is used when a particular device is designated among devices. A 'user-friendly unique device name' can be set for a device when the device is installed on a home network for the first time.

When the ConfigureExternalAccessPermission() action is received and permission parameter within the action is 'enable', the IGD 100 creates an entry of a list of remote access enabled devices from user_id and UDN (or 'user-friendly unique device name') contained in the input argument. When 'user-friendly unique device name' is received, the IGD 100 separates 'character string' from its associated product code, model number, UDN, or combination thereof, thereby 'user-friendly unique device name' being managed as a single entry of a device table.

Fig. 2b illustrates an example of a list of remote access enabled devices for an individual user created by the IGD 100 following the above method. Two entries illustrated in Fig. 2b are created respectively by the following two actions, each of which has UDN invoked by the control point 100 as input argument.

```
ConfigureExternalAccessPermission(Kalen, e99b630e-0000-1000-aa40-285d8fd86a0c, enable),
```

```
ConfigureExternalAccessPermission(Kevin, 138efbcb-4807-47fb-b484-22dfb2cc0c60, enable),
```

A request for activation of a remote access to devices capable of designating remote access allowance among devices 101, 102, 103, 104 connected to the home network is made. The request is configured by an operator of the home network or by the user who makes a remote access to the device through an input means of the corresponding device. The configuration information

(remote_access_permitted = active (or inactive)) is stored in the corresponding device. In another embodiment in accordance with the present invention, the value of the configuration information (remote_access_permitted) is set by using the control point 110.

5 As described above, a device, wherein information about whether to allow a remote access (remote_access_permitted) is set to 'permitted', invokes a remote access permission action on the IGD 100 when the device opens a socket. The remote access permission action can have a structure as shown in Fig. 3a.

10 PortMappingProtocol, InternalIPAddress, and InternalPort, which are input arguments of ExternalAccessPermitted() action of Fig. 3a, comprise connection information about internal service of a device that invokes the action (or connection information about device itself), the device to be allowed for external
15 access; the connection information can be static or dynamically allocated at the time of socket creation. UDN is a unique identifier of a device itself designated for external access and 'permission' is a parameter designating external access permission/refusal. 'permission' carries a value designated by
20 previously set information (remote_access_permitted). (e.g., 'enable' when active, whereas 'disable' when inactive)

user_id is a parameter intended to carry an identifier (or credential) of the user; since the present embodiment does not support a device's selective permission/refusal of an access for
25 an individual user, 'NULL' is recorded in the 'user_id' parameter.

In order to invoke remote access permission action described as above, the corresponding device can be equipped with a control point with restricted functions that can find the IGD 100 and invoke a subsequent action at the time of the initial
30 connection to the home network.

The IGD 100 that received the remote access permission action interprets the action and input argument of the action, thereby creating entries of a list of remote access enabled ports for an individual user as shown in Fig. 3b with reference to a
35 previously set list of remote access enabled devices for an individual user as shown in Fig. 2b

A second entry 301 from among three entries of a list shown in Fig. 3b has been created from an action in the following.

```
ExternalAccessPermitted(TCP,192.168.1.45,9000,NULL,  
e99b630e-0000-1000-aa40-285d8fd86a0c,enable)
```

5 If an identifier of a connection allowed user in a received
ExternalAccessPermitted() action is not registered in a list of
remote access enabled devices for an individual user as shown in
Fig. 2b, or even if registered, when UDN of an enabled device and
UDN included in an input argument within the action are not the
10 same, the IGD 100 does not create entries for remote access
enabled ports in a list of Fig. 3b, responding to the received
ExternalAccessPermitted() action with an error. At this time, a
value indicating the type of the error (unregistered user,
disagreement of enabled devices, etc.) may be delivered as an
15 output parameter to a device that invoked an action.

An entry of a list of remote access enabled ports for an
individual user created as shown in Fig. 3b is removed from the
list, when an action of
ExternalAccessPermitted(,,,,,disable)(permission=disable) is
20 received and the entry has information contained in the input
argument (port information, identifier of an allowed user
corresponding to UDN).

When

ConfigureExternalAccessPermission(,,disable)(permission=disable)
25 action is received from the control point 110, the IGD 100
removes an entry that has information contained in the input
argument (user identifier (ID, credential), UDN) from a list of
remote access enabled devices for an individual user having a
structure as shown in Fig. 2b. The IGD 100, from a list of Fig.
30 3b, also deletes an identifier that is the same as the deleted
identifier (ID, credential) and an entry that has connection
information assigned to a device of the deleted UDN or connection
information belonging to a range of connection information.

Hereinafter, another embodiment in accordance with the
35 present invention is described in detail, which is about a device
from among devices connected to a home network 101, 102, 103, 104,

the device being able to set users allowed for remote access from outside.

In the present embodiment, when a device that can set whether to allow a remote access from among devices connected to the home network 101, 102, 103, 104 is configured for remote access activation/inactivation, an identifier of a user for whom a remote access to the device is allowed is also set. An operator of the home network or user who makes a remote access to the device sets the above configuration by using an input means of the corresponding device, the configuration information (remote_access-permitted/user_identification = active, or inactive/user identifier) being stored in the corresponding device. In another embodiment in accordance with the present invention, the configuration information (remote_access-permitted/user_identification) can be set on the corresponding device by using the control point 110.

A device, where information about whether to allow a remote access for a user is set as above, invokes a remote access permission action on the IGD 100 when the device opens a socket.

Although the remote access permission action can have a structure of ExternalAccessPermitted() action as shown in Fig. 3a, at the time of calling the action, information of user_identification field within the configuration information (remote_access-permitted/user_identification) is necessarily contained in user_id parameter within the action.

The IGD 100 which receives the remote access permission action checks the action and information of the action's input argument; when user information and permission information about a device turn out to be identical to an entry on a list of remote access enabled devices for an individual user configured as shown in Fig. 2b, the IGD 100 creates entries of a list of remote access enabled ports for an individual user having a structure as shown in Fig. 3b.

If an action of ExternalAccessPermitted(,,,,,disable) is received, an entry of a list of remote access enabled ports for an individual user created as shown in Fig. 3b is deleted from

the list when the entry has the same information as the information contained in the input arguments (port information, user identifier).

In the embodiments described above, when user_id parameter
5 of ExternalAccessPermitted() action from an arbitrary device, where input argument permission is enable, contains a particular identifier, e.g., '*', the IGD 100, at the time of creating entries of a list of remote access enabled ports for an individual user as shown in Fig. 3b, dose not record information
10 about user field (Users), leaving the information in blank. Leaving user field in blank is to avoid checking user identifier when a decision is made on whether to allow an access to an internal home network. Therefore, for this case, every user can make an access from outside to a device that invokes a
15 corresponding action.

Hereinafter, in accordance with an embodiment of the present invention as described above, under the condition that a list of remote access enabled ports for an individual user having a structure of Fig. 3b is set in the IGD 100, a procedure is
20 described, where a selective access to a device on the home network is made remotely.

A user at a remote place possesses a device that can connect to the Internet, e.g., a notebook 201 and an application program 200 which can connect to a device on the home network is
25 installed on the notebook 201. In addition, a public IP address is assigned to the notebook 201 for connecting to the Internet; either a user is informed of a public IP address of the IGD 100 which is a gateway device for a home network of the user or a public IP address is already set on the application program 200.
30 A public IP address assigned to the IGD 100 from an Internet service provider (ISP) can be a dynamically assigned temporary IP address rather than a fixed address; in this case, too, an IP address assigned to the IGD 100 is obtained through an appropriate procedure or method. Since the procedure or method
35 dose not have a direct relationship to the present invention, description thereupon is omitted.

When a VPN client is executed on the notebook 201, since one of private IP addresses assignable to the home network is allocated from the IGD 100, the application program 200 can communicate with devices connected to a home network as if
5 connected to a home network based on a VPN client. When communicating based on VPN, the IGD 100 obtains an identifier of a connected user through an authentication procedure for the user who executed a VPN client. If not the case of communicating with the IGD 100 based on VPN, user authentication procedure is
10 carried out by connecting to the IGD 100 after the application program 200 is executed.

In the previous embodiment, user authentication can be carried out by a credential assigned previously to the user. (the credential is also stored in the IGD 100.) For example, separate
15 credentials are given to respective users of the home network and are stored in portable devices, e.g., removable USB memories; a USB memory is attached to the notebook 201 and by activating an appropriate home network connection program, authentication can be carried out based on the degree of coincidence of credentials
20 between a connection program and the IGD 100 without intervention of a user.

In another embodiment in accordance with the present invention, as described above, home network devices enabled for a remote access can be different according to RA devices. Fig. 4a
25 illustrates a list of remote access enabled devices for an individual RA device created in accordance with the present embodiment. As shown in Fig. 4a, a credential 401 of an RA device is associated with UDN of a home network device enabled for a remote access. Although one-to-one permission entry is
30 illustrated in the example of Fig. 4a, multiple UDNs can be associated with a credential of a single RA device. The aforementioned case happens when a credential of an RA device is set to multiple devices on a home network. According to the present embodiment, a list of remote access enabled devices for
35 an individual RA device is created in terms of credentials assigned to RA devices as shown in Fig. 4b instead of using user

identifiers. In a further embodiment in accordance with the present invention, when the IGD 100 manages a table associating user-friendly unique device names of RA devices with credentials assigned to the corresponding devices, user-friendly unique
5 device names can be set instead of entering credentials about RA devices allowing remote access to devices on a home network. In the present embodiment, when a user-friendly unique device name is carried by ConfigureExternalAccessPermission() action, the IGD 100 extracts a credential associated with the user-friendly
10 unique device name from the table and configures entries of a list of remote access enabled devices for an individual RA device as shown in Fig. 4a.

In a further embodiment in accordance with the present invention, as described above, a different set of home network
15 devices to be accessed can be configured according to respective RA devices and users. Fig. 5 illustrates a list of remote access enabled devices for an individual RA device/user created in accordance with the present embodiment. As shown in Fig. 5, a pair of credentials for an RA device and a user is associated
20 with UDN of a home network device enabled for remote access and each entry is created by information extracted from input argument of a received action ConfigureExternalAccessPermission(). In the present embodiment, remote access is allowed when information about two credentials for an RA device and a user
25 agrees with a credential accompanying a remote access. Therefore, even for a user who is allowed for a remote access, remote access is allowed only when the user uses an RA device where a remote access is allowed for the user. In the example of Fig. 5, when 'Kalen' tries to access a device having UDN of e99b630e-0000-
30 1000-aa40-285d8fd86a0c, e.g., a desktop PC 103 by using a notebook, remote access is not allowed.

According to the embodiment of Fig. 5, when both a credential for each user and a credential for each RA device are utilized, with a user credential encrypted to a device credential
35 assigned (or stored) to an RA device 201 for remote access and thus provided to the IGD 100, both the credentials can be

utilized at the same time for remote access authentication.

After user authentication (and/or RA device authentication), a device is selected from a selection menu of a device connected to an internal home network provided by the IGD 100 or a device
5 to be accessed is selected from information about devices pre-registered on the application program 200 (or from a device list information created from a response message which is received from a result of transmitting a search message to the home network). Since a socket is created in the device according to
10 the selection, according to the method described above, entries of a list of remote access enabled devices for an individual user as shown in Fig. 3b are recorded. Afterwards, a message requested on the same device places connection information of a device to be connected in a lower address of a destination and adds a
15 public IP address of the IGD 100 at the upper address thereof. The IGD 100 identifies connection information of a device supposed to be a final destination (protocol, local IP address, and IP port) after removing IP header at the front through address conversion process; and in a list of remote access
20 enabled ports having a structure as shown in Fig. 3b (or Fig. 4b), checks the identified information and user identifying information (ID or credential) (and/or credential of an RA device) identified through previous authentication process for a current connection.

25 If an entry of a list of remote access enabled ports coincides both with a user identifier (or user credential) (and/or credential of an RA device) and connection information (for those entries whose user fields (or device fields) are left in blank, if only an entry coincides with connection information),
30 a received message is relayed to the home network and transferred to a device of the corresponding destination by the IGD 100. When a coinciding entry dose not exists, access to the corresponding device is not made by not relaying a received message to the home network.

35 In another embodiment in accordance with the present invention, remote access is controlled according to a user group.

In the present embodiment, a list of devices to be remotely accessed according to a user group is set in the IGD 100 as shown in Fig. 6. In addition, for each group where an individual user of a home network belongs, a list of entries where user
5 identifiers and a group name are associated with each other is also set to the IGD 100. The above setting can necessarily be realized by the control point 110.

Under the condition as described above, when ExternalAccessPermitted() action is received from an arbitrary
10 device on a home network, the IGD 100 extracts user identifier of the action, checks a group name where the user belongs from a previously created list, and determines whether to allow by comparing information about device(s) enabled for remote access for the group with device identifying information carried by the
15 action, e.g., UDN. When remote access is allowed, as described above, entries of a list of remote access enabled ports for an individual user as shown in Fig. 3b is created. Controlling of remote access afterwards is carried out in the same way as described in the above embodiment.

20 In another embodiment in accordance with the present invention, the ExternalAccessPermitted() action can provide a configured group name as input argument instead of a user identifier.

In a further embodiment in accordance with the present
25 invention, the ExternalAccessPermitted() action can be used without a user identifier. If the action is received and a UDN included in the action, from among a list of remote access enabled devices for an individual group as shown in Fig. 6, corresponds to a UDN permitted for a group name found from the
30 user identifier-group name table based on user identifier checked during authentication process for remote access, the IGD 100 creates entries of a list of remote access enabled ports for an individual user as shown in Fig. 3b. Controlling of remote access afterwards is carried out in the same way as described in the
35 above embodiment.

In the embodiments described so far, remote access is

controlled by the IGD 100 which is a gateway device to a home network.

In another embodiment in accordance with the present invention, remote access can be controlled by a communication
5 module (hardware or software carrying out a given communication function) added for communications with broadband network beyond the IGD 100. For example, SSDP proxy handling SSDP message of UPnP (Discovery, NOTIFY message) can control a remote access. As a way of controlling a remote access, when NOTIFY message is
10 returned as a proxy response to Discovery message from an RA device, only a list of devices on a home network to which the RA device can make an access with reference to a list of remote access enabled devices set in the IGD 100 is returned. Since devices on a home network except for allowed devices are
15 invisible to an RA device, remote access to other devices cannot be carried out.

The present invention described in detail with a limited number of embodiments above, while maintaining security of the entire home network, allows a remote access from outside of a
20 home network for a particular device connected to the home network for each user; therefore, at least one effect is obtained such that user convenience and network security are satisfied at the same time.

The foregoing description of a preferred embodiment of the
25 present invention has been presented for purposes of illustration. Thus, those skilled in the art may utilize the invention and various embodiments with improvements, modifications, substitutions, or additions within the spirit and scope of the invention as defined by the following appended claims.

30

CLAIMS

1. A method for managing remote access to a device connected to a local network, comprising:

creating permission information about a device;
5 when an access is externally requested to a device connected to the local network, searching the created permission information about a device for information of the access and connection information of a target device; and
according to the search result, determining whether to
10 allow the access.

2. The method of claim 1, wherein the connection information includes connection protocol information, an IP address, and a port number.

15

3. The method of claim 1, wherein the permission information is created through a procedure in which a remote access permission action is received from the device, and user information and/or device information for remote access and
20 device connection information are extracted from input argument of the received action and are registered as an allowance entry.

4. The method of claim 3, wherein the input argument of the remote access permission action further comprises unique
25 identifying information of the device.

5. The method of claim 3, wherein the input argument of the remote access permission action further comprises a parameter indicative of remote access permission or refusal.

30

6. The method of claim 1, wherein the creating step comprises:
creating a list of remote access enabled devices according

to receiving a first action for setting a user and/or remotely-accessed to allowance, the first action having device identifying information and user information and/or information about a remotely-accessed device as input argument;

5 upon receiving a second action allowing remote access from the device, extracting device identifying information from input argument of the received second action and searching the list for the extracted information and obtaining user information and/or information about a remotely-accessed device associated with the
10 extracted information; and

 configuring the obtained user information and/or information about a remotely-accessed device, and device connection information extracted from the input argument of the second action into an entry of the permission information.

15

 7. The method of claim 6, wherein the first and second action further comprise a parameter indicative of remote access permission or refusal respectively.

20 8. The method of claim 6, wherein the first action is received from a control application for managing devices connected to the local network.

 9. The method of claim 1, wherein the creating step
25 comprises:

 obtaining user information of remote access, searching a user-group list for the user information, and identifying a group where the user belongs;

 extracting device identifying information from input
30 argument of a received action and checking whether the extracted device identifying information belongs to the identified group based on a table listing remote access enabled devices for each group; and

 according to the checking result, configuring the user
35 information and device connection information extracted from input argument of the received action into an entry of the

permission information.

10. The method of claim 1, wherein the user information is an ID assigned to a user or credential used for authentication.

5

12. A networked apparatus, comprising:

a gateway device for data arbitration among networked devices and conducting configuration/management of network addresses,

10 the gateway device storing a list of connection allowance including user identifying information and/or identifying information of a remotely-accessed device and device connection information as an allowance entry; at a time of access to one of the networked devices remotely, searching the list of connection
15 allowance for information about the access and an allowance entry having connection information of a target device; and according to the search result, determining whether to allow the access.

13. The apparatus of claim 12, wherein the device
20 connection information includes connection protocol information, an IP address, and a port number.

14. The apparatus of claim 12, wherein device connection information in the allowance entry is information extracted from
25 input argument of a remote access permission action received from a device allowing remote access.

15. The apparatus of claim 12, wherein user identifying information and/or identifying information of a remotely-accessed
30 device in the allowance entry is information extracted from input argument of a remote access permission action received from a device allowing remote access.


16. The apparatus of claim 12, wherein user identifying
35 information and/or identifying information of a remotely-accessed device in the allowance entry is information copied from user

identifying information and/or identifying information of a remotely-accessed device in a list of allowed devices, the information being stored associated with device identifying information extracted from input argument of a remote access
5 permission action received from a device allowing remote access.

17. The apparatus of claim 16, wherein the list of allowed devices is created according to receiving an action for setting allowed devices from a control application for managing the
10 networked devices, the action having device identifying information and user identifying information and/or identifying information of a remotely-accessed device as input argument.

18. A networked apparatus, comprising:
15 a gateway device for conducting data arbitration among networked devices and configuration/management of network addresses and for storing permission information of which one entry consists of identifying information of a remotely-accessed device and remote access enabled device information; and
20 a proxy, when receiving device search message from a remote device, searching the permission information for a target device and transmitting a response of the device search message to the remote device for only remote access enabled devices.

FIG. 1

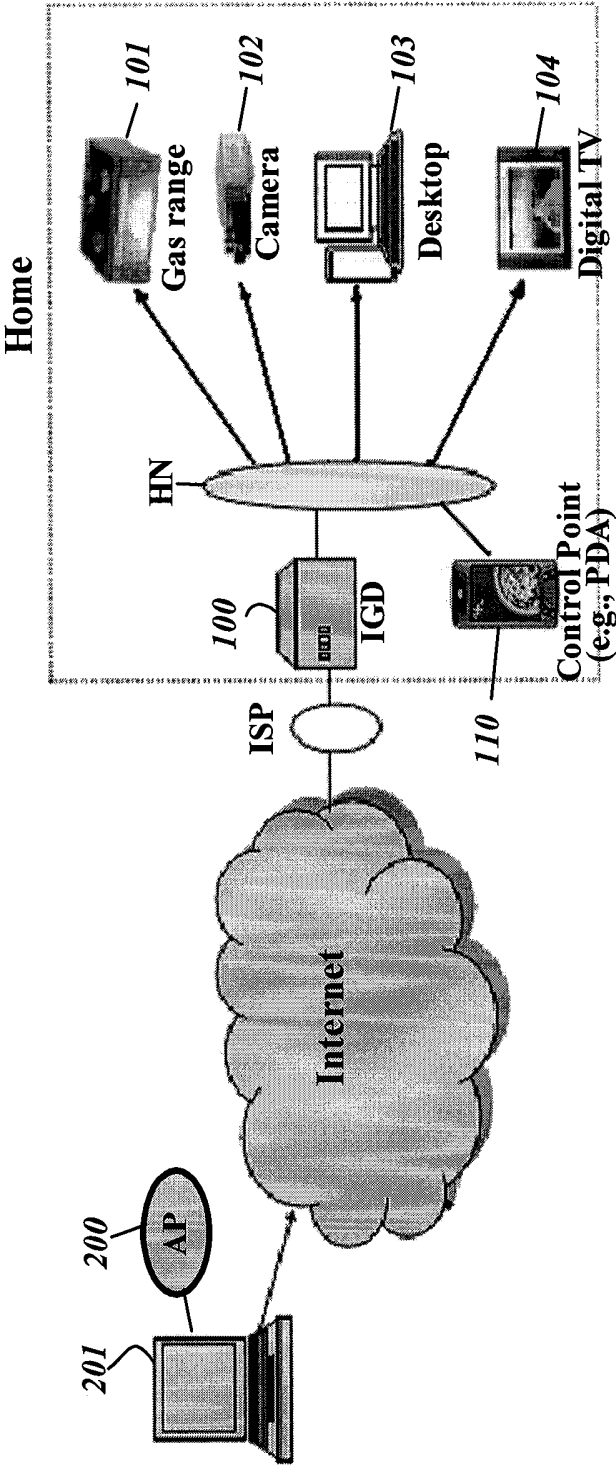

2/3

FIG. 2a**ConfigureExternalAccessPermission()**

Argument	Direction	Description
user_id	IN	Identifier of a user to allow remote access
UDN	IN	UDN of a device to allow remote access
Permission	IN	enable or disable remote access

FIG. 2b

User ID (or credential)	Remote Access Enabled Devices
Kalen	e99b630e-0000-1000-aa40-285d8fd86a0c
Kevin	138efbcb-4807-47fb-b484-22dfb2cc0c60

FIG. 3a**ExternalAccessPermitted()**

Argument	Direction	Description
PortMappingProtocol	IN	Protocol of a service to allow remote access
InternalIPAddress	IN	local IP address assigned to a service to allow remote access
InternalPort	IN	local port no. assigned to a service to allow remote access
user_id	IN	Identifier of a user to allow remote access
UDN	IN	UDN of a device to allow remote access
permission	IN	enable or disable remote access

FIG. 3b

User ID (or credential)	Remote Access Enabled Ports
Kalen	TCP/192.168.1.22/21
Kalen	TCP/192.168.1.45/9000
Kevin	TCP/192.1.45/21

3/3

FIG. 4a

RA Device's Credential	Remote Access Enabled Devices
BnFsdllkgjdghlfSPDA)	e99b630e-0000-1000-aa40-285d8fd86a0c
GkdfgjrEdfkgjsa (Notebook)	138efbcb-4807-47fb-b484-22dfb2cc0c60

401

FIG. 4b

RA Device's Credential	Remote Access Enabled Ports
BnFsdllkgjdghlfSPDA)	TCP/192.168.1.22/21
BnFsdllkgjdghlfSPDA)	TCP/192.168.1.45/9000
GkdfgjrEdfkgjsa(Notebook)	TCP/192.1.45/21

FIG. 5

RA Device's Credential	User's Credential	Remote Access Enabled Devices
BnFsdllkgjdghlfS (PDA)	Unc90tuoopxlfS (Kalen)	e99b630e-0000-1000-aa40-285d8fd86a0c
GkdfgjrEdfkgjsa (Notebook)	kiXope aio903nHo (Kevin)	138efbcb-4807-47fb-b484-22dfb2cc0c60
BnFsdllkgjdghlfS (PDA)	kiXope aio903nHo (Kevin)	e99b630e-0000-1000-aa40-285d8fd86a0c

FIG. 6

Group	Remote Access Enabled Devices
Administrator	UDNs of Printer, TV, Desktop, and Air-conditioner
User	UDNs of TV and Desktop
Guest	UDN of TV

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2006/001454**A. CLASSIFICATION OF SUBJECT MATTER****H04L 12/22(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC8 G06F, H04B, L, M, N, P, Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and Applications for Inventions since 1975

Korean Utility Models and Applications for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

KIPO NPS System : (remote* <and> (home*) <and> (network*) <and> (device*) <and> (access*) <and> (secur* | protect*))

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP1182823A1 (SONY) 27.02.2002 see the whole documents	1 -18
Y	KR20040021305 A (LG ELECTRONICS) 10.04.2003 see the whole documents	1 - 18
Y	EP1345381A2 (SAMSUNG ELECTRONICS) 17.09.2003 see the whole documents	1
A	JP16112505 (SANWA SHUTTER CORP) 08.04.2004 see the whole documents	1
A	JP15092636 (NTT Corp JAPAN) 28.03.2003 see the whole documents	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 JUNE 2006 (29.06.2006)

Date of mailing of the international search report

29 JUNE 2006 (29.06.2006)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SHIN, Sung Kil

Telephone No. 82-42-481-5688



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2006/001454

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
----- EP1182823A1 -----	27.02.2002	EP1182823A1	27.02.2002
KR20040021305	10.04.2003	NONE	
----- EP1345381A2 -----	17.09.2003	EP01345381A2 EP01345381A3 EP1345381A2 EP1345381A3 JP15330825 JP2003330825A2 KR1020030073544 KR2003073544A US2003177271AA	17.09.2003 18.08.2004 17.09.2003 18.08.2004 21.11.2003 21.11.2003 19.09.2003 19.09.2003 18.09.2003
----- JP16112505 -----	08.04.2004	JP16112505 JP2004112505A2	08.04.2004 08.04.2004
----- JP15092636 -----	28.03.2003	JP15092636 JP2003092636A2	28.03.2003 28.03.2003