

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2017292028 B2**

(54) Title
Fluid flow sensing

(51) International Patent Classification(s)
A61J 1/00 (2006.01) **A61M 27/00** (2006.01)
A61M 1/00 (2006.01)

(21) Application No: **2017292028** (22) Date of Filing: **2017.07.07**

(87) WIPO No: **WO18/009879**

(30) Priority Data

(31) Number	(32) Date	(33) Country
62/360,248	2016.07.08	US

(43) Publication Date: **2018.01.11**

(44) Accepted Journal Date: **2023.03.02**

(71) Applicant(s)
Convatec Technologies Inc.

(72) Inventor(s)
Selby, Robert Gordon Maurice;Perdigo-Oliveras, Arnau;Van Den Bergh, Roderick Marcus

(74) Agent / Attorney
Houlihan Intellectual Property Pty Ltd, 832 High St, Kew East, VIC, 3102, AU

(56) Related Art
US 2012/0100538 A1
EP 1905465 A1



(51) International Patent Classification:

A61J 1/00 (2006.01) A61M 27/00 (2006.01)
A61M 1/00 (2006.01)

(21) International Application Number:

PCT/US2017/041216

(22) International Filing Date:

07 July 2017 (07.07.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/360,248 08 July 2016 (08.07.2016) US

(71) Applicant: **CONVATEC TECHNOLOGIES INC.**
[US/US]; 3993 Howard Hughes Parkway, Suite 250, Las Vegas, Nevada 89169 (US).

(72) Inventors: **SELBY, Robert Gordon Maurice**; Melbourn Science Park, Melbourn, Royston Hertfordshire SG8 6EE (GB). **PERDIGO-OLIVERAS, Arnau**; Melbourn Science Park, Melbourn, Royston Hertfordshire SG8 6EE (GB). **VAN DEN BERGH, Roderick Marcus**; Melbourn Science Park, Melbourn, Royston Hertfordshire SG8 6EE (GB).

(74) Agent: **WESTIN, Lorelei P.**; Wilson Sonsini Goodrich & Rosati, 650 Page Mill Road, Palo Alto, California 94304 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: FLUID FLOW SENSING

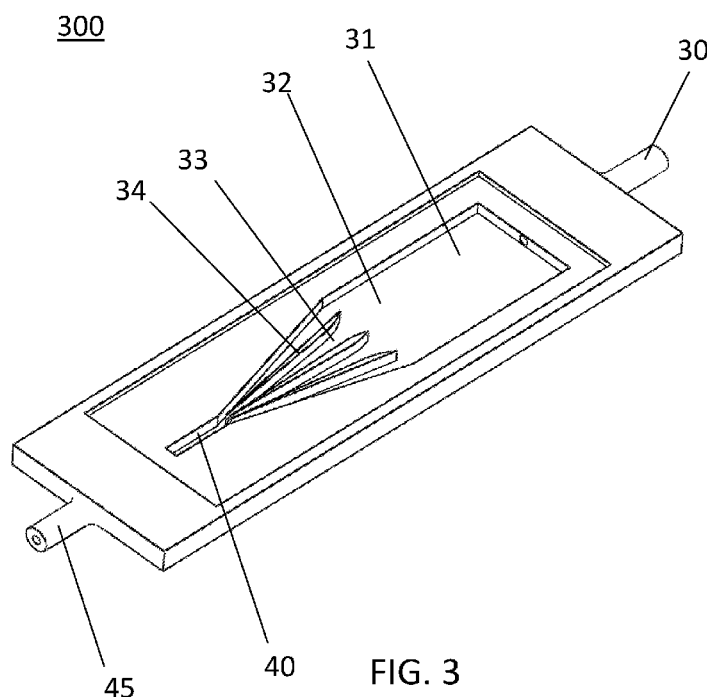


FIG. 3

(57) Abstract: Devices and methods for collecting and sensing fluid flow are provided.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

FLUID FLOW SENSING

CROSS-REFERENCE

[0001] This application claims the benefit of U.S. provisional patent application number 62/360,248, filed July 8, 2016, the entirety of which is incorporated by reference herein.

BACKGROUND OF THE INVENTION

[0002] Wounds may be treated by providing negative pressure to the space above the wound to promote healing in a process often referred to a negative pressure wound therapy (NPWT). In monitoring the progress of the wound, it is often beneficial to monitor the rate of exudate discharged from the wound to assist in an assessment of wound healing.

SUMMARY OF THE INVENTION

[0003] Medical procedures often involve the removal of fluid and wound exudate from a patient including, for example, during negative pressure wound therapy (NPWT). For NPWT, as a negative pressure is applied over a wound site of the patient, fluid and wound exudate is drawn from the wound and collected, for example, in a dressing positioned over the wound site and/or in a canister. For systems that employ collection canisters, the volume of fluid collected is often sensed and recorded to build a picture of the rate of fluid discharge from the wound. However, this approach can be problematic due to the uncertainty of canister orientation, especially during use in portable therapies. Measurement of readings when the canister is not oriented properly can lead to false readings and assessment of the wound. It is therefore beneficial to measure the flow rate of fluid prior to or as it is drawn into the canister. Nevertheless, due to the nature of NPWT there are challenges with measuring fluid at this point because the fluid to be measured is typically a mixture of air and liquid. For example, air may be introduced into the system through small leak paths at the wound site. Therefore, there is a need for managing the flow of fluid through a system so that parameters of the fluid can be sensed. By providing an air bypass device, or fluid collection device, small quantities of liquid accumulate in the fluid collection device while air passes through the device. Once there is a significant volume of liquid collected, the liquid is released through a detection conduit as a column of liquid, or a slug, which is then measurable using a sensor.

[0004] In one aspect of the disclosure, provided are fluid collection devices comprising: (a) a housing comprising an inlet and an outlet, the inlet located at a proximal end of the housing and the outlet located at a distal end of the housing; (b) a reservoir positioned within the housing at the proximal end of the housing; (c) a plurality of channel dividers positioned within the housing

between the reservoir and the distal end of the housing, the plurality of channel dividers having a proximal end and a distal end; wherein the plurality of channel dividers define a plurality of fluid channels within the housing; and (d) a liquid collection region positioned within the housing between the distal end of the plurality of channel dividers and the distal end of the housing; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing. In some embodiments, the fluid collection device is tapered and a proximal end of the reservoir has a width greater than the width of a distal end of the liquid collection region. In some cases, the width of the proximal end of the reservoir is at least equal to, or 2 to 5 times the width of the distal end of the liquid collection region. In some embodiments, the liquid collection region is configured to receive a slug of liquid having a volume between about 10 uL and about 200 uL. In some embodiments, the interior of the housing is configured to hold between about 100 uL and about 1000 uL of fluid. In some embodiments, the width of the liquid collection region is smaller near the distal end of the housing than the width of the liquid collection region near the proximal end of the housing. In some embodiments, the width of the liquid collection region is between about 0.5 mm and about 8 mm. In some embodiments, the length of the reservoir is between about 5 mm and about 50 mm. In some embodiments, the length of one or more of the plurality of channel dividers is between about 2 mm and about 50 mm. In some embodiments, the height of the reservoir is between about 0.1 mm and about 5 mm. In some embodiments, the height of one or more of the plurality of channel dividers is between about 0.1 mm and about 5 mm. In some embodiments, the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm. In some embodiments, the width of one or more of the plurality of channels is tapered to reduce direction of flow by about 1 degree to about 20 degrees. In some embodiments, the plurality of channels is from about 2 to about 15 channels. In some embodiments, the housing comprises a planer surface from the proximal end to the distal end of the housing. In some embodiments, the housing comprises a curved surface from the proximal end to the distal end of the housing.

[0005] In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises a hydrophobic material. In some cases, the hydrophobic material is coated on the surface by plasma treatment. In some cases, the hydrophobic material has a water contact angle greater than or equal to about 155°. In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises polytetrafluoroethylene (PTFE). In some embodiments, the

housing comprises a plastic material. In some embodiments, the housing comprises a transparent material.

[0006] Further provided are canisters comprising any fluid collection device described herein. Further provided are canisters operably connected to any fluid collection device described herein. In another aspect of the disclosure, provided are systems comprising any fluid collection device described herein. In some embodiments, provided are fluid collection systems comprising any fluid collection device described herein and a canister, wherein the outlet of the fluid collection device is in fluid communication with an inlet of the canister. In some embodiments, provided are fluid collection systems comprising any fluid collection device described herein and a wound dressing, wherein the inlet of the fluid collection device is in fluid communication with an outlet of the wound dressing.

[0007] In some embodiments, provided are fluid collection systems comprising any fluid collection device described herein and a sensing device comprising: (a) source of negative pressure; and (b) a plurality of sensors situated within a casing such that a column of liquid located outside of the casing is in the field of view of the plurality of infrared sensors. In some cases, one or more of the plurality of sensors is an infrared sensor. In some embodiments, the casing comprises a thin layer of plastic within the field of view of the plurality of infrared sensors. In some cases, the thin layer has a thickness up to about 5 mm. In some cases, the plastic comprises polyvinyl chloride, polycarbonate, polystyrene, polyester film, or a combination thereof. In some embodiments, the casing comprises one or more windows within the field of view of the plurality of infrared sensors. In some cases, the one or more windows are transmissive to infrared at a wavenumber between about 3000 cm^{-1} to about 4000 cm^{-1} . In some cases, the one or more windows have a thickness between about 0.1 mm and about 5 mm. In some cases, the one or more windows comprise polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof. In some embodiments, the fluid collection system further comprises a light source situated within the interior of the casing such that the column of liquid located outside of the casing is in the path of the light source. In some embodiments, the plurality of infrared sensors is two or more reflective optical sensors. In some embodiments, the source of negative pressure comprises a diaphragm pump. In some embodiments, a first infrared sensor in the plurality of infrared sensors is positioned between about 0.5 cm and about 10 cm from a second infrared sensor in the plurality of infrared sensors. In some embodiments, the fluid collection system further comprises one or more pressure sensors. In some cases, one of the one or more pressure sensors is configured to detect a pressure of a wound environment by measuring a pressure at a first end of a conduit positioned within the casing, wherein the second end of the conduit is positioned at the wound

environment. In some cases, one of the one or more pressure sensors is configured to detect a pressure of a canister by measuring a pressure at a first end of a conduit positioned within the casing, wherein the second end of the conduit is positioned within the canister; and wherein the conduit is configured to apply a negative pressure from the source of negative pressure to the canister. In some cases, the fluid collection system further comprises a controller configured to control an amount of negative pressure applied by the source of negative pressure. In some cases, the controller controls the amount of negative pressure applied by the source of negative pressure in response to a measurement of pressure by the one or more pressure sensors. In some embodiments, the fluid collection system further comprises a display for displaying one or more parameters of the column of liquid corresponding to measurements of the column of liquid taken by the plurality of infrared sensors. In some embodiments, the fluid collection system further comprises a power source. In some embodiments, the sensing device does not comprise a power source and power is supplied to the sensing device by an external unit connected to the sensing device. Further provided are fluid sensing systems comprising any fluid collection system described herein and a canister.

[0008] In another aspect of the disclosure, provided are fluid flow sensing systems comprising: (a) a fluid collection device comprising a housing having an inlet located at a proximal end of the fluid collection device and an outlet located at a distal end of the fluid collection device, the interior of the housing comprising: a reservoir, a plurality of channel dividers defining a plurality of fluid channels, and a liquid collection region; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing; (b) a canister comprising an inlet and an outlet, the inlet of the canister configured to be in fluid communication with the outlet of the fluid collection device housing via a detection conduit; and (c) a sensing device comprising: a casing having an inlet, a source of negative pressure and a plurality of sensors; the inlet of the sensing device casing configured to be in fluid communication with the outlet of the canister via a negative pressure conduit. In some embodiments, the inlet of fluid collection device is configured to be connected to a wound site of a patient via a wound conduit. In some embodiments, the detection conduit has an inner diameter of less than or equal to about 0.5 mm to about 5 mm. In some embodiments, the fluid collection device and canister are configured to withstand a negative pressure applied by the source of negative pressure between about 80 and about 125 mmHg below atmospheric pressure. In some embodiments, the fluid collection device is integral with the canister. In some embodiments, the source of negative pressure comprises a diaphragm pump. In some

embodiments, at least a portion of the negative pressure conduit is housed within a connector. In some cases, the connector comprises a power source. In some embodiments, the detection conduit comprises a material transmissive of infrared at a wavenumber between about 3000 cm^{-1} to about 4000 cm^{-1} . In some embodiments, the detection conduit has a thickness between about 0.1 mm and about 5 mm. In some embodiments, the detection conduit comprises polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof. In some embodiments, the plurality of fluid channels are configured to accumulate between about 10 uL and about 200 uL of liquid. In some embodiments, the sensing device further comprises a pressure sensor configured to detect a pressure within the negative pressure conduit. In some embodiments, the fluid collection device is tapered and a proximal end of the fluid collection device has a width greater than the width of a distal end of the fluid collection device. In some cases, the width of the proximal end of the fluid collection device is at least about 2 to 5 times the width of the distal end of the fluid collection device. In some embodiments, a first width of the liquid collection region is between about 1 mm and about 8 mm. In some cases, the liquid collection region is tapered and a second width of the collection region is between about 0.5 and about 7 mm. In some embodiments, the length of one or more of the plurality of channel dividers is between about 2 mm and about 50 mm. In some embodiments, the height of the interior of the housing is between about 0.1 mm and about 5 mm. In some embodiments, the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm. In some embodiments, the plurality of channels is from about 2 to about 15 channels. In some embodiments, the housing comprises a planer surface between the proximal end and distal end of the of the fluid collection device. In some embodiments, the housing comprises a curved surface between the proximal end and distal end of the of the fluid collection device.

[0009] In some embodiments, a surface of the reservoir, plurality of channels, collection region, or a combination thereof comprises a hydrophobic material. In some cases, the hydrophobic material is coated on the surface by plasma treatment. In some cases, the hydrophobic material has a water contact angle greater than or equal to about 155° . In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises polytetrafluoroethylene (PTFE). In some embodiments, the housing comprises a plastic material. In some embodiments, the housing comprises a transparent material.

[0010] In some embodiments, the casing comprises a thin layer of plastic material within the field of view of the plurality of sensors. In some cases, the thin layer has a thickness up to about 5 mm. In some cases, the plastic material comprises polyvinyl chloride, polycarbonate, polystyrene, polyester film, or a combination thereof. In some embodiments, the casing comprises one or more windows within the field of view of the plurality of infrared sensors. In

some cases, the one or more windows are transmissive to infrared at a wavenumber between about 3000 cm^{-1} to about 4000 cm^{-1} . In some cases, the one or more windows have a thickness between about 0.1 mm and about 5 mm. In some embodiments, the one or more windows comprise polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof.

[0011] In some embodiments, the sensing device further comprises a light source. In some embodiments, the plurality of sensors is two sensors. In some embodiments, one or more of the plurality of sensors is an infrared sensor. In some embodiments, a sensor in the plurality of sensors is positioned between about 0.5 cm and about 10 cm from a second sensor in the plurality of sensors. In some embodiments, the sensing device further comprises a controller configured to control the amount of negative pressure applied by the source of negative pressure. In some embodiments, the sensing device further comprises a display for displaying one or more parameters of a column of liquid corresponding to measurements of the column of liquid taken by the plurality of sensors as the column of liquid passes through the detection conduit. the sensing device further comprising a power source. In some embodiments, the sensing device does not comprise a power source and power is supplied to the sensing device by an external unit connected to the sensing device.

[0012] In another aspect of the disclosure, provided are methods for sensing fluid flow, the methods comprising: (a) providing: (i) a fluid collection device comprising a housing having an inlet located at a proximal end of the fluid collection device and an outlet located at a distal end of the fluid collection device, the interior of the housing comprising: a reservoir, a plurality of channel dividers defining a plurality of fluid channels, and a liquid collection region; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing; (ii) a canister comprising an inlet and an outlet, the inlet of the canister in fluid communication with the outlet of the fluid collection device housing via a detection conduit; and (iii) a sensing device comprising: a casing having an inlet, a source of negative pressure and a plurality of sensors; the inlet of the sensing device casing in fluid communication with the outlet of the canister via a negative pressure conduit; (b) applying a negative pressure from the source of negative pressure to the fluid collection device via the canister to draw a fluid mixture of liquid and air through the inlet of the fluid collection device and along the one or more fluid passageways of the fluid collection device housing; wherein the liquid of the fluid mixture accumulates at the plurality of flow channels while the air of the fluid mixture passes through flow channels until the plurality of flow channels have accumulated liquid of the fluid mixture;

(c) drawing the accumulated fluid into the liquid collection region as a slug of liquid when the plurality of flow channels become blocked with the accumulated fluid; (d) drawing the slug from the liquid collection region, through the outlet of the fluid collection housing, and through the detection conduit; and (e) detecting passage of the slug through the detection conduit with the plurality of sensors. In some embodiments, the time it takes for the beginning of the slug to reach each of the plurality of sensors is detected successively; and wherein the time it takes for the end of the slug to reach each of the plurality of sensors is detected successively. In some embodiments, the method further comprises comparing the time delay between the beginning and the end of the liquid slug passing the plurality of sensors to calculate the speed and length of the slug. In some embodiments, the method further comprises calculating the rate of the flow of the mixture from the fluid collection device.

[0013] In some embodiments, the inlet of fluid collection device is connected to a wound site of a patient via a wound conduit, and the fluid mixture drawn through the inlet of the fluid collection device is fluid drawn from the wound site of the patient. In some cases, the fluid collection device is connected to the wound site of the patient in an orientation-independent manner. In some embodiments, the detection conduit has an inner diameter of about 0.5 mm to about 5 mm. In some embodiments, the negative pressure applied is between about 80 and about 125 mmHg below atmospheric pressure. In some embodiments, the volume of the slug is between about 10 and about 200 μL . In some embodiments, the length of the slug is between about 3 mm and about 100 mm. In some embodiments, the fluid mixture comprises less than about 5% of air by volume. In some embodiments, the fluid mixture comprises greater than about 5% of air by volume. In some embodiments, the fluid mixture provided to the fluid collection device comprises less than about 1% of liquid by volume. In some embodiments, the fluid mixture provided to the fluid collection device comprises greater than about 1% of liquid by volume. In some cases, the fluid mixture is exudate from a wound site of a patient sealed with a dressing, and the liquid and air composition of the fluid mixture is dependent on: the rate of exudate flow from the patient, the rate of air leak into the dressing, or a combination thereof. In some embodiments, the fluid collection device is integral with the canister. In some embodiments, the source of negative pressure comprises a diaphragm pump. In some embodiments, at least a portion of the negative pressure conduit is housed within a connector. In some cases, the connector comprises a power source.

[0014] In some embodiments, the detection conduit comprises a material transmissive to infrared at a wavenumber between about 3000 cm^{-1} to about 4000 cm^{-1} . In some embodiments, the detection conduit comprises a material having a thickness between about 0.1 mm and about 5 mm. In some embodiments, the detection conduit comprises polyvinyl chloride,

polycarbonate, high density polyethylene, polystyrene, or a combination thereof. In some embodiments, the plurality of fluid channels are configured to accumulate between about 10 uL and about 200 uL of liquid. In some embodiments, the method further comprises sensing a pressure within the negative pressure conduit with a pressure sensor positioned within the casing of the sensing device. In some cases, the application of negative pressure from the source of negative pressure is modulated to maintain a predetermined pressure within the negative pressure conduit. In some embodiments, the fluid collection device is tapered and a proximal end of the fluid collection device has a width greater than the width of the distal end of the fluid collection device. In some cases, the width of the proximal end of the fluid collection device is at least about 5x the width of the distal end of the fluid collection device. In some embodiments, a first width of the liquid collection region is between about 1 mm and about 8 mm. In some cases, a second width of the liquid collection region is between about 0.5 and about 7 mm. In some embodiments, the length of one or more of the plurality of channel dividers is between about 2 mm and about 50 mm. In some embodiments, the height of the interior of the housing is between about 0.1 mm and about 5 mm. In some embodiments, the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm. In some embodiments, the plurality of channels is from about 2 to about 15 channels.

[0015] In some embodiments, the housing comprises a planer surface between the proximal end and distal end of the of the fluid collection device. In some embodiments, the housing comprises a curved surface between the proximal end and distal end of the of the fluid collection device. In some embodiments, a surface of the reservoir, plurality of channels, collection region, or a combination thereof comprises a hydrophobic material. In some cases, the hydrophobic material is coated on the surface by plasma treatment. In some cases, the hydrophobic material has a water contact angle greater than or equal to about 155°. In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises polytetrafluoroethylene (PTFE). In some embodiments, the housing comprises a plastic material. In some embodiments, the housing comprises a transparent material. In some embodiments, the casing comprises a thin layer of plastic material within the field of view of the plurality of sensors. In some cases, the thin layer has a thickness up to about 5 mm. In some cases, the plastic material comprises polyvinyl chloride, polycarbonate, polystyrene, polyester film, or a combination thereof. In some embodiments, the casing comprises one or more windows within the field of view of the plurality of sensors. In some cases, the one or more windows are transmissive to infrared at a wavenumber between about 3000 cm⁻¹ to about 4000 cm⁻¹. In some cases, the one or more windows have a thickness between about 0.1 mm and about 5 mm. In some cases, the one or more windows comprise

polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof.

[0016] In some embodiments, the sensing device further comprises a light source situated within the interior of the casing such that the slug is in the path of the light source. In some embodiments, the plurality of sensors is two sensors. In some embodiments, one or more of the plurality of sensors is an infrared sensor. In some embodiments, a sensor in the plurality of sensors is positioned between about 0.5 cm and about 10 cm from a second sensor in the plurality of sensors. In some embodiments, the method further comprises measuring a pressure of a wound environment by measuring a pressure at a first end of a pressure sensor conduit, wherein a first end of the pressure sensor conduit is positioned within the casing and a second end of the pressure sensor conduit is positioned at the wound environment. In some embodiments, the sensing device further comprises a controller configured to control the amount of negative pressure applied by the source of negative pressure. In some cases, the controller controls the amount of negative pressure applied by the source of negative pressure in response to a measurement of pressure. In some embodiments, the sensing device further comprises a display for displaying one or more parameters of the slug corresponding to measurements of the slug taken by the plurality of sensors. In some embodiments, the sensing device further comprising a power source. In some embodiments, the sensing device does not comprise a power source and power is supplied to the sensing device by an external unit connected to the sensing device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] Figure 1 shows an embodiment of a fluid flow sensing system for negative pressure wound therapy.

[0018] Figure 2 shows a top view of a path for fluid flow through a first embodiment of a fluid collection device.

[0019] Figure 3 shows an isometric representation of a second embodiment of a fluid collection device.

[0020] Figure 4 shows graphs of response signals from two sensors in a sensing device detecting the passage of slugs through a detection conduit for 1 min.

[0021] Figure 5 shows graphs of response signals from two sensors in a sensing device detecting the passage of slugs through a detection conduit for 15 min.

[0022] Figure 6 shows graphs of processed response signals from the graphs of Figure 5.

[0023] Figure 7 shows a section of the processed response signal from the graphs of Figure 6, indicating when flow is detected.

[0024] **Figure 8** shows graphs plotting the mass of liquid detected flowing through the detection conduit as a function of time in minutes, and the nominal mass of liquid actually flowing through the detection conduit as a function of time in minutes.

DETAILED DESCRIPTION OF THE INVENTION

[0025] In one aspect of the disclosure, provided herein are devices and systems for collecting and sensing parameters of a fluid. In some embodiments, provided are fluid collection devices configured to collect liquid from a fluid comprising liquid and air, and then release the collected liquid as a column of liquid, which may be interchangeably referred to herein as a slug. The slug is then passed through a detection conduit where a sensor is positioned to detect a property of the slug, and thus the fluid input into the collection device. Systems for collecting and sensing parameters of a fluid may comprise a fluid collection device and the sensor for detecting the property of the slug formed during passage of fluid through the fluid collection device. For NPWT systems, the fluid collection device may be a disposable part of the system, while the sensor may be part of a durable or reusable portion of the system. As a non-limiting example, the sensor is part of a durable unit comprising a source of negative pressure drawing the fluid through the fluid collection device.

[0026] A system for sensing fluid flow comprising a fluid collection device and a flow sensor is shown in FIG. 1. System **100** is an NPWT system comprising a wound dressing **1** and a source of negative pressure, pump **9**, for drawing fluid such as wound exudate from a space between wound dressing **1** and a wound into a canister **8**. System **100** further comprises a connector **14** configured to provide communication between wound dressing **1**, canister **8**, and the main unit **11**, which houses the pump **9**.

[0027] Wound dressing **1** is connected to a wound dressing airway **53** comprising a first end in fluid communication with the underside of dressing **1**, and a second end **2**, the second end **2** configured to join with a first end **3** of tubing **4** and a sensing line **5**. Both the tubing **4** and sensing line **5** are joined to connector **14** at attachment portion **50** of connector **14**. Connector **14** comprises a sensing pathway **51** connecting sensing line **5** to a pressure sensor **12** via connection between an attachment portion **18** of connector **14** and an attachment portion **13** of a main unit **11**, the main unit **11** comprising the pressure sensor **12**. Connector **14** is connected to a fluid collection device **7** at an attachment portion **6** of connector **14** and an attachment portion **54** of the fluid collection device **7**. The fluid collection device **7** comprises a fluid pathway **21** in fluid connection with detection conduit **16**, which then opens to canister **8**. Thus, the fluid pathway of system **100** is configured for fluid to be drawn from under dressing **1**, through the

dressing airway **53**, through tube **4**, through connector **14**, through pathway **21**, through detection conduit **16**, and into canister **8**.

[0028] Negative pressure is communicated through system **100** to a site under dressing **1** from pump **9** housed within main unit **11**. Negative pressure is applied from pump **9**, through tube **19** of connector **14**, through fluid collection device **7**, through connector **14**, through tubing **4**, and through the dressing airway **53** to dressing **1**.

[0029] Fluid drawn through system **100** is separated into liquid slugs during passage of the fluid through fluid collection device **7**. The slugs are released into detection conduit **16**, which is positioned within the pathway of sensors **15** and **17**, which are housed within main unit **11**. Two embodiments of a fluid collection device **7** are shown in FIGS. 2-3.

[0030] An exemplary method for sensing fluid flow in system **100** comprises drawing exudate from a wound positioned under dressing **1** to canister **8** using the pressure difference between the dressing and the canister **8** connected to pump **9**. Typically the exudate flow will be mixed with air, for example, due to small air leaks in the wound dressing. The pump is controlled by a controller that uses sensors **10** and **12** to sense the pressure in the canister **8** and sensing line **5**, respectively. When exudate reaches the canister at **7**, it is directed along the fluid pathway **21** of the fluid collection device **7** where it is partitioned into slugs of liquid, which are then passed through detection conduit **16**. As a slug passes along detection conduit **16**, it successively passes fluid detection sensors **17** and **15**. These sensors may be the same or a different type of sensor and are inclusive of infrared optical sensors, capacitive sensors and thermal time of flight sensors. In the case of infrared sensors or transducers, the sensors detect the presence of water based liquids due to selective absorption. These sensors are available to one of skill in the art and include those that operate in reflective mode so both the light source and detector can be held in the main unit **11**. The start and end of the slug is detected successively by sensors **17** and **15**. By comparing the time delay between start and end of the slug passing the two sensors, both the speed and length of slug can be calculated. For system **100**, the sensors are placed in the main unit **11** of the NPWT device such that they can sense the slug in the detection conduit **16** from their position within the main unit **11**. In some embodiments, the main unit is a reusable portion of the system and the sensors are positioned such that they can sense through the main unit **11**, for example, through thin layers of plastic or other suitable material that form the main unit **11** and/or detection conduit **16**. In some embodiments, fluid conduit **16** is an open channel covered by a thin wall of an adhesive film. In some embodiments, the fluid conduit **16** is moulded into the top of canister **8**.

[0031] The system of FIG. 1 is for illustrative purposes only and it is intended that a fluid sensing system may comprise additional components and/or lack one or more components

shown. For example, one or more sensors within the main unit **11** may not be necessary for the system to function as described. As a further example, the connector **14** may be configured in a different manner or not present in the fluid sensing system.

[0032] The devices and systems described herein may be used with any canister available in the art, including the fluid collection apparatus described in the corresponding provisional application having docket number CV0642, filed on July 8, 2017 as U.S. provisional patent application number 62/360,211, concurrently with the provisional application to this application, the contents of which are fully incorporated herein.

Fluid Collection Device

[0033] In one aspect of the disclosure, provided herein are fluid collecting devices configured to collect liquid from a fluid input comprising a combination of liquid and air. The collected liquid may then be discharged from the device into a conduit as a column of liquid, or a slug, which can then be detected by one or more sensors. In some embodiments, a fluid collection device comprises: (a) a housing comprising an inlet and an outlet, the inlet located at a proximal end of the housing and the outlet located at a distal end of the housing; (b) a reservoir positioned within the housing at the proximal end of the housing; (c) a plurality of channel dividers positioned within the housing between the reservoir and the distal end of the housing, the plurality of channel dividers having a proximal end and a distal end; wherein the plurality of channel dividers define a plurality of fluid channels within the housing; (d) and a liquid collection region positioned within the housing between the distal end of the plurality of channel dividers and the distal end of the housing; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing.

[0034] Fluid collection devices described herein are configured to accumulate liquid from a fluid, for example, within the plurality of flow channels, while air from the fluid bypasses the channels. Once all of the flow channels are filled with liquid, pressure from incoming air from the fluid pushes the liquid accumulated from the flow channels into the liquid collection region where the liquid is collected before being passed through a conduit as a slug. In some embodiments, the shape of a fluid collection device facilitates the accumulation and collection of liquid. In some embodiments, the width of the liquid collection region is smaller near the distal end of the housing than the width of the liquid collection region near the proximal end of the housing. In some cases, the fluid collection device is tapered and a proximal end of the reservoir has a width greater than the width of a distal end of the liquid collection region. As a

non-limiting example, the width of the proximal end of the reservoir is about or at least about 2 to 5 times the width of the distal end of the liquid collection region. In some cases, the ratio of sizes can be as small as 1:1 provided there is a means of allowing air or gas to bypass liquid that is accumulating such that fluid and air are collated into discrete . The ratio of sizes can then be much larger while still providing the bypass function for air or gas. The limit of the size ratio is, at least in part, driven by the preferred size of liquid column for sensing and by the effect of the pressure difference needed to drive liquid through to the distal liquid region. If the ratio of volumes is large then the length of the liquid column becomes large and the pressure differential to drive the fluid consequently increases. The ratio of sizes relates to the ratio of lengths of liquid column entering and leaving the reservoir region. An alternative form to a planar reservoir includes a circular or conical form where the fluid channels are arranged around the circumference of the cone such that air or gas can bypass liquid that is accumulating in the fluid channels until the accumulated liquid bridges the last empty channel and the accumulated liquid is driven into the distal tubing as a column of liquid, or slug.

[0035] In some embodiments, the interior of the housing is configured to hold between about 100 uL and about 500 uL of fluid, or about 100 uL, 200 uL, 300 uL, 400 uL or 500 uL of fluid. In some cases, the interior of the housing holds about 200 uL of fluid. In some embodiments, the liquid collection region is configured to receive a slug of liquid having a volume between about 10 uL and about 200 uL, or about 10 ul, 20 ul, 50 ul, 80 ul, 100 ul, 120 ul, 150 ul, or 200 uL. In some cases, the liquid collection region is configured to receive a slug of liquid having a volume of about 100 uL. In some embodiments, a width of the liquid collection region is between about 0.5 mm and about 8 mm, or about 0.5 mm, 1 mm, 2 mm, 3 mm, 4 mm, 5 mm, 6 mm, 7 mm or 8 mm. In some cases, a first width of the liquid collection region is between about 0.5 mm and about 8 mm, and a second width of the liquid collection region is between about 0.5 mm and about 7 mm. In some embodiments, the length of the reservoir is between about 0.5 cm and about 5 cm, or between about 1 cm and about 2 cm. In some cases, the length of the reservoir is between about 1.5 cm and 2 cm. In some embodiments, the height of the reservoir is between about 0.1 mm and about 5 mm, or about 1 mm to 2 mm.

[0036] The configuration and length of the plurality of channel dividers facilitates accumulation of liquid within the channels defined by the channel dividers. A plurality of channel dividers includes about 2-15, 3-12, 3-10, 3-8 or 3-5 channel dividers. In some embodiments, the length of one or more of the plurality of channel dividers is between about 0.2 cm and about 5 cm, or about 0.2 cm, 0.5 cm, 1 cm, 1.5 cm, 2 cm, 2.5 cm, 3 cm, or 5 cm. In some embodiments, the height of one or more of the plurality of channel dividers is between about 0.1 mm and about 5 mm, or about 1 mm to about 2 mm. In many cases, the channel dividers extend from the bottom

of the housing to the top of the housing such that when fluid is passed through the housing, if liquid is collected within the channels, air can only pass through an open channel. In such a configuration, once all open channels are filled with liquid, incoming air forces the collected liquid out of the channels to be released from the distal end of the housing as a column of liquid, or slug. In some embodiments, the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm, or between about 1 mm and about 3 mm. In some cases, the width is about 2 mm. In some cases, the plurality of channels have a reducing width from entrance to exit where the change in width is about 1 to 20 degrees, or typically about 5 degrees.

[0037] For fluid collection devices configured for use with a source of negative pressure, the device is configured to withstand pressures of up to about 200 mmHg without breaking. In general, for typically sized components of fluid collection devices described herein, a 0.5 mm to 1 mm thickness of plastic will provide adequate strength under pressures without breaking. For example, the forces due to the pressure differential, such as 200 mmHg applied over a square cm applies a load of about 2.6N. In some cases, the housing comprises a plastic material such as ABS (acrylonitrile-butadiene-styrene), PC (polycarbonate), PC-ABS, PP (polypropylene), HDPE (high-density polyethylene), or a combination thereof. In some cases, the housing comprises a transparent material.

[0038] The fluid collection device, or any region or surface thereof, may be substantially planar or flat, as well as have a curvature. The region or surface thereof includes any surface or portion of the housing, reservoir, channel divider, and liquid collection region. In some cases, a surface of a fluid collection device comprises one or more non-planar features, for example, a well and/or pillar. In some embodiments, housing comprises a planar surface from the proximal end to the distal end of the housing. In some embodiments, the housing comprises a curved surface from the proximal end to the distal end of the housing. An alternative form to a planar reservoir includes a circular conical form where the fluid channels are arranged around the circumference of the cone such that air or gas can bypass liquid that is accumulating in the fluid channels until the accumulated liquid bridges the last empty channel and the accumulated liquid is driven into the distal tubing. In some cases, this format is suited for use in line in fluid tubes where the overall circular cross section could be convenient.

[0039] In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises a hydrophobic surface. In some cases, the hydrophobic surface is applied using a plasma treatment available to one of skill in the art. This includes, but is not limited to, plasma treatments provided by Hennika Plasma. In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises a coating configured to enhance release of liquid from the

surface. In some cases, a surface is coated with polytetrafluoroethylene. A non-limiting example of a surface coating that enhances liquid release is NANOMYTE® SuperCN, supplied by NEI Corporation.

[0040] In some embodiments, a fluid collection device comprises: (a) a housing comprising an inlet and an outlet, the inlet located at a proximal end of the housing and the outlet located at a distal end of the housing; (b) a reservoir positioned within the housing at the proximal end of the housing; (c) a plurality of channel dividers positioned within the housing between the reservoir and the distal end of the housing, the plurality of channel dividers having a proximal end and a distal end; wherein the plurality of channel dividers define a plurality of fluid channels within the housing; (d) and a liquid collection region positioned within the housing between the distal end of the plurality of channel dividers and the distal end of the housing; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing. In some embodiments, the liquid collection region is configured to receive a slug of liquid having a volume between about 10 and about 200 uL. In some embodiments, the interior of the housing is configured to hold between about 100 uL and about 1000 uL of fluid and typically 500 uL. In some embodiments, the height of the reservoir, channels, liquid collection region, or any combination thereof, is between about 0.1 mm to about 5 mm, or typically about 1 mm to about 2 mm. In some embodiments, the reservoir has a width from about 5 mm to about 50 mm, or typically from about 15 mm to about 20 mm. In some embodiments, the reservoir has a length from about 5 mm to about 50 mm, or typically from about 15 mm to about 20 mm. In some embodiments, the proximal end of the housing has a width about 2 to 5 times the width of the distal end of the housing. In some embodiments, the proximal end of the liquid collection region has a width between about 0.5 mm and 8 mm, or typically about 5 mm. In some embodiments, the distal end of the liquid collection region has a width between about 0.5 mm and 7 mm, or typically about 3 mm. In some embodiments, the length of one or more of the plurality of channel dividers is between about 2 mm to 50 mm, or typically about 15 mm. In some embodiments, the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm, or typically about 2 mm. In some embodiments, the plurality of channels are tapered in the direction of flow by about 1 degree to 20 degrees, or typically about 5 degrees. In some embodiments, the plurality of channels is from about 2 to about 15 channels, or typically about 3 to 5 channels. In some embodiments, a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises a hydrophobic material.

[0041] A top view of exemplary fluid passageways formed through an interior of a fluid collection device is shown in FIG. 2. Positioned at the proximal end of device **200** is reservoir **31**, which receives fluid **30** through the inlet of the device (not shown). Positioned at the distal end of device **200** is a liquid collection region **40**, which releases slugs of liquid **41** collected within region **40** to tube section **37**. Positioned between reservoir **31** and liquid collection region **40** are four channel dividers **34**, which define five channels **33**. The plurality of channel dividers **34** has a tapered configuration, so that the proximal end of the plurality **32** is wider than the distal end of the plurality. This configuration facilitates accumulation of liquid within channels **33** near the distal end of the channels.

[0042] In an exemplary fluid collection method using device **200**, fluid comprising a mixture of liquid and air enters the device at reservoir **31**. The fluid is then drawn to channels **33** formed by channel dividers **34**, where liquid from the fluid accumulates at the distal end of the channels due to the capillary force provided by the reducing section of the channels **33**. Liquid accumulates in the channels **33** while continuing to allow air to pass through the remaining open channels. Periodically, all of the fluid channel **33** become blocked with liquid and as further air or fluid is drawn into the fluid collection device, this air or fluid drives the accumulated liquid forward to liquid collection region **40**, where the liquid is then drawn along the tube section **37** as a slug of liquid **41**. This cycle repeats such that air drawn into the device, for example, in NPWT from the dressing and/or any other system leaks, separated successive fluid slugs **41** and **42**. By timing the start **36**, **38** and end **35**, **39** of the slugs, both the speed and length of the slugs can be determined. Knowledge of the cross sectional area of the tube section **37** then allows a volumetric flow to be calculated.

[0043] An isometric representation of an exemplary fluid collection device is shown in FIG. 3. Positioned at the proximal end of device **300** is reservoir **31**, which receives fluid through the inlet **30** of the device housing. Positioned at the distal end of device **300** is a liquid collection region **40**, which releases slugs of liquid collected within region **40** to outlet **45**. Positioned between reservoir **31** and liquid collection region **40** are three channel dividers **34**, which define four channels **33** having a proximal end **32** in communication with reservoir **31**, and a distal end in communication with liquid collection region **40**. In an exemplary method for fluid collection using device **300**, fluid comprising liquid and air enters the device housing at inlet **30** and then collects in reservoir **31**. As fluid is drawn from the reservoir **31** through the device, liquid from the fluid accumulates within channels **33**, while air from the fluid bypasses the channels and passes through outlet **45**. Liquid gradually fills channels **33** until there is no channel open for air to pass through. The accumulated liquid is forced to liquid collection region **40** as fluid continues to enter the housing. The liquid collected in region **40** is released from the device

through outlet **45** and into a conduit for detection by one or more sensors as described elsewhere herein.

Flow Sensors

[0044] Liquid collected as a slug using a fluid collection device described herein may be detected by one or more flow sensors. In some embodiments, a flow sensor is housed within a durable or reusable portion of a system that can be used with more than one fluid collection device over time. As a non-limiting example, a flow sensor is housed in a main unit of a negative pressure system, the main unit comprising the source of negative pressure and optionally one or more additional elements, including pressure sensors. In some embodiments, a flow sensor is an infrared sensor known and available to one of skill in the art. As a non-limiting example a flow sensor is an infrared sensor such as a reflective optical sensor. Particular examples of reflective optical sensors include those made by Broadcom, part number HSDL-9100-024. Such sensors combine an analogue-output reflective sensor with an IR emitter and photodiode. These sensors have a typical rise time of 50ns and typical fall time of 50ns, which minimizes timing delays to detecting the start and end of liquid slugs. Further sensors available to those of skill in the art include tube sensors, such as those produced by Optek Technology, part number OPB350. Such tube sensors operate for tubing of a specific size, for example, 1/8th inch tubing, and operate such that clear liquid present causes the phototransistor to sink the maximum current, while dark liquid present causes it to sink the minimum current. These sensors may have a slower response time, less than 50 microseconds rise time and a fall time in the region of 50 to 250 microseconds, however, still provide a response time suitable for use in the methods described herein.

[0045] In one aspect, provided herein is a sensing device for use with a fluid collection device as described elsewhere herein. In some embodiments, the sensing device is part of a main unit of a negative pressure system, wherein the main unit comprises both a source of negative pressure and one or more flow sensors for detecting liquid collected as a slug using a fluid collection device. In some embodiments, a sensing device comprises a casing comprising a source of negative pressure and one or more flow sensors situated within the casing such that a material located outside of the casing is in the field of view of the sensors. A non-limiting example of a flow sensor is an infrared sensor. In some cases, the sensing device comprises a plurality of flow sensors, the plurality comprising about 2, 3, 4, 5, 6, 7, 8, 9 or 10 flow sensors. For some instances where the sensing device comprises two or more flow sensors, a first flow sensor is positioned between about 0.5 cm and about 4 cm, or typically about 2 cm from a second flow sensor, as measured center-to-center.

[0046] In some embodiments, the casing comprises a thin layer of plastic within the field of view of the flow sensor. Plastics include, polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, and any other plastic having suitable infrared transmittance at the frequency where liquid is absorbing. In some embodiments, a casing has a typical thicknesses from about 0.1 mm as a film to about 3 mm as a moulding. In some embodiments, a film bonded over an open channel is used. In some embodiments, a casing comprises a moulded section of about 1 mm to about 1.5mm thickness. In some embodiments, the casing comprises one or more windows within the field of view of the flow sensor which can allow the main casework to be of an infrared absorbing material and to still provide visibility of the fluid for the sensors. The windows can be provided by plastics that are transmissive of infrared at wave-numbers between 3000 and 4000 cm^{-1} . In some cases, a thickness of the window is between about 0.1 mm and about 5 mm, or about 1 to 1.5 mm. In some embodiments, the window is comprised of a plastic, for example, polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof. Alternatively, the window is an open window with a transmissive-reflective sensor as known to one of skill in the art. By way of example, a Broadcom sensor, part number HSDL-9100-024. The transmissive-reflective sensor is positioned either close to the window or fitted into the aperture within the casework. In some embodiments, the sensing device further comprises a light source situated within the interior of the casing such that the material located outside of the casing is in the path of the light source. In many implementations, a sensor and light source are combined as a unit as described above.

[0047] In some embodiments, the flow sensor is housed with one or more pressure sensors. Pressure sensors suitable are known to those of skill in the art. Non-limiting examples of pressure sensors include: Omron part number SMPP03, range +/-50kPa; Honeywell, part number ABP L LN N 250MD A A 3, range +/-250mbar; and NXP, part number MPXV7025DP, with range -25kPa to 25 kPa. Fluid sensors then include those as described, such as reflective optical sensors made by Broadcom, part number HSDL-9100-024 and Optek Technology, part number OPB350.

[0048] As a non-limiting example, one of the one or more pressure sensors is configured to detect a pressure of a wound environment by measuring a pressure at a first end of a conduit positioned within the casing, wherein the second end of the conduit is positioned at the wound environment. As another example, one of the one or more pressure sensors is configured to detect a pressure of a canister by measuring a pressure at a first end of a conduit positioned within the casing, wherein the second end of the conduit is positioned within the canister; and wherein the conduit is configured to apply a negative pressure from the source of negative pressure to the canister.

[0049] In some embodiments, the sensing device comprises a controller configured to control an amount of negative pressure applied by the source of negative pressure. In some embodiments, the source of negative pressure comprises a diaphragm pump. Diaphragm pumps are available to one of skill in the art and include, by way of example, those provided by Gardener Denver, model number 2002, 3003 or 3013; KNF part numbers NMS010S or NMS020S; and Koge, part number KPV08A-3A or KPV14A. In some implementations where the sensing device comprises a pressure sensor, the controller controls the amount of negative pressure applied by the source of negative pressure in response to a measurement of pressure by one or more pressure sensors. In some embodiments, a sensing device comprises a display for displaying one or more parameters of the material corresponding to measurements of the material taken by the plurality of infrared sensors. In some embodiments, a sensing device comprises a power source for providing power to the source of negative pressure, controller, display, or a combination thereof. In some embodiments, a sensing device lacks a power source for powering the source of negative pressure, controller, display, or a combination thereof, and the power source is provided by an external unit connected to the sensing device. As a non-limiting example, a connector, such as connector **14** exemplified in FIG. 1, provides the power source. A source of power includes a battery, such as an alkaline or lithium ion battery, for example, a CR123A cell as provided by manufactures such as Panasonic or Duracell or AA lithium batteries such as those supplied by Energiser. In some other cases, a rechargeable battery is used, such as a lithium polymer cell as supplied by Panasonic or Sanyo or NIMH batteries supplied by companies such as Panasonic and FDK.

[0050] A non-limiting example of a sensing device is shown as the main unit **11** in the system **100** of FIG. 1. Main unit **11** comprises two flow sensors **15** and **17**, such as infrared sensors, a pump **9**, and pressure sensors **10** and **12**. Flow sensors **15** and **17** are positioned adjacent a side of the unit **11** configured to allow for a material located outside of the casing to be in the field of view of, and detected by, the sensors.

Systems and Methods

[0051] In one aspect of the disclosure, provided herein are systems comprising a fluid collection device and/or flow sensing device as described herein. In some embodiments, provided is a device system comprising the fluid collection device and flow sensing device. Systems provided herein may further comprise one or more accessory elements, for example, elements useful for performing a negative pressure therapy. In some embodiments, an accessory comprises a wound dressing. In some embodiments, an accessory comprises a collection canister. In some embodiments, an accessory comprises one or more conduits or tubings

configured to connect to the dressing, canister, and/or sensing device. In some embodiments, an accessory comprises a connector configured to connect the dressing to a collection canister, connect the collection canister to the sensing device, and connect the dressing to the sensing device.

[0052] In some embodiments, provided herein is a system comprising a fluid collection device and a fluid collection canister. The fluid collection device may be an integral component of the collection device, or operably connected to the collection device via one or more connectors and/or tubings. The fluid collection device can be formed as a combination of an open channel moulded into the top of the canister and sealed by a film. Alternatively the fluid collection device is built into the connector that connects the dressing to the main unit and the fluid channel can be made from two or more moulded components bonded or sealed together by adhesive, sealant or welding. Similarly, the fluid channel can be formed by a thin film bonded to cover and seal an open channel. The outward (distal) end of the fluid collection device is then connected to the canister via a sealed connection provided by means such as an O ring seal or face seal.

[0053] In some embodiments, provided herein is a fluid flow sensing system comprising a fluid collection device, a canister, and a sensing device. The fluid collection device of the fluid flow sensing system comprises a housing having an inlet located at a proximal end of the fluid collection device and an outlet located at a distal end of the fluid collection device, the interior of the housing comprising: a reservoir, a plurality of channel dividers defining a plurality of fluid channels, and a liquid collection region; wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing. The canister of the fluid flow sensing system comprises an inlet and an outlet, the inlet of the canister in fluid communication with the outlet of the fluid collection device housing via a detection conduit. In some fluid flow sensing systems, the fluid collection device is integral with the canister. The sensing device of the fluid flow sensing system comprises a casing having an inlet, a source of negative pressure and a plurality of sensors; the inlet of the sensing device casing in fluid communication with the outlet of the canister via a negative pressure conduit. In some fluid flow sensing systems, the source of negative pressure comprises a diaphragm pump. In some cases, the plurality of sensors comprises from about 2 to about 5 flow sensors. An exemplary flow sensor is an infrared sensor. In some cases, the plurality of flow sensors comprises two infrared sensors.

[0054] In some embodiments, the fluid flow sensing system further comprises a connector. The connector may house at least a portion of the negative pressure conduit. In some cases, the connector comprises a power source for providing power to the source of negative pressure.

[0055] In some embodiments, the detection conduit comprises plastic material, such as polyvinyl chloride, polycarbonate, high density polyethylene, polystyrene, or a combination thereof. In some embodiments, the conduit has a thickness of about 0.1 mm to about 3 mm, or typically about 0.1 mm thick if a film of plastic is used and about 0.5 mm to 1.5 mm thick if a moulded wall is used. In some embodiments, the detection conduit has an inner diameter of less than or equal to about 5 mm, or typically about 1 to 3 mm. In some embodiments, the volume of the slug to be detected is between about 10 uL and about 3000 uL, or typically about 30 uL. In some embodiments, the length of the slug to be detected is between about 1 mm and about 100 mm, or typically between about 20 mm and 80 mm.

[0056] In some embodiments, the sensing device further comprises a pressure sensor. For some methods employing the fluid flow sensing system, application of negative pressure from the source of negative pressure is modulated to maintain a predetermined pressure within the negative pressure conduit.

[0057] The fluid collection device of the flow sensing system may be configured and sized as appropriate to enable the collection of liquid from a fluid mixture of liquid and air. As a non-limiting example, the fluid collection device comprises from about 3 to about 8 channel dividers defining from about 4 to about 9 channels for accumulating fluid prior to fluid collection and release as a slug of liquid. In some embodiments, the plurality of fluid channels is configured to accumulate between about 20 uL and about 300 uL of liquid. In some cases, the length of one or more of the plurality of channel dividers is between about 0.5 cm and about 2 cm. In some embodiments, the height of one or more of the plurality of channel dividers is between about 0.5 mm and about 2 mm. In some embodiments, the width of one or more of the plurality of channels is between about 0.5 mm and about 2 mm. In some embodiments, the fluid collection device is tapered and a proximal end of the reservoir has a width greater than the width of a distal end of the liquid collection region. In some embodiments, the width of the proximal end of the reservoir is at least about 5x the width of the distal end of the liquid collection region. As a non-limiting example, the width of the liquid collection region is between about 5 mm and about 20 mm. In some cases, the length of the reservoir is between about 0.5 cm and about 3 cm. In some embodiments, the height of the reservoir is between about 1 mm and about 2 mm. In some embodiments, the housing comprises a plastic material.

[0058] In some embodiments, the casing of the sensing device comprises a thin layer of plastic material so that a flow sensor positioned next to the thin layer of plastic material detects a slug

located on the other side of the thin layer of plastic material. In general, depending on the particular sensor selected, the distance between the sensor and fluid conduit should be sized to match the sensor. Some sensors are set for detection distances of a few millimeters (1 to 5mm) and others are set for longer ranges not limited to 50mm. In some embodiments, the sensing device further comprises a light source situated within the interior of the casing such that the slug is in the path of the light source. In some embodiments, the sensing device further comprises a controller configured to control the amount of negative pressure applied by the source of negative pressure. As a non-limiting example, the controller controls the amount of negative pressure applied by the source of negative pressure in response to a measurement of pressure. In some embodiments, the sensing device further comprises a display for displaying one or more parameters of the slug corresponding to measurements of the slug taken by the plurality of sensors. In some embodiments, the sensing device further comprises a power source. In further embodiments, the sensing device does not comprise a power source and power is supplied to the sensing device by an external unit connected to the sensing device.

[0059] A non-limiting method for sensing fluid using a fluid flow sensing system comprises applying a negative pressure from the source of negative pressure to the fluid collection device via the canister to draw a fluid mixture of liquid and air through the inlet of the fluid collection device and along the one or more fluid passageways of the fluid collection device housing; wherein the liquid of the fluid mixture accumulates at the plurality of flow channels while the air of the fluid mixture passes through flow channels until the plurality of flow channels have accumulated liquid of the fluid mixture; drawing the accumulated fluid into the liquid collection region as a slug of liquid when the plurality of flow channels become blocked with the accumulated fluid; drawing the slug from the liquid collection region, through the outlet of the fluid collection housing, and through the detection conduit; and detecting passage of the slug through the detection conduit with the plurality of sensors. In some embodiments, the fluid provided to the fluid collection apparatus comprises less than or greater than about 5% of air by volume. In other embodiments the fluid provided to the fluid collection apparatus comprises less than or greater than about 1% of liquid by volume. For applications of NPWT, the ratio of the percentage of air to liquid depending on the ratio of exudates flow from the patient and the rate of air leak into the dressing. Suitable negative pressures applied in such a method include pressures between about 80 and about 125 mmHg below atmospheric pressure.

[0060] In some embodiments, the time it takes for the beginning of the slug to reach each of the plurality of sensors is detected successively; and the time it takes for the end of the slug to reach each of the plurality of sensors is detected successively. Some methods comprise comparing the time delay between the beginning and the end of the liquid slug passing the plurality of sensors

to calculate the speed and length of the slug. The rate of the flow of the mixture from the fluid collection device can also then be calculated.

[0061] The method for sensing fluid flow may be performed as part of a negative pressure wound therapy, where the fluid drawn to the canister is exudate from the wound of a patient and the inlet of fluid collection device is fluidically connected to the wound site of the patient via a wound conduit. In some methods, the canister is positioned relative to the patient in an orientation-independent manner.

EXAMPLES

Example 1: Fluid Collection Device

[0062] A fluid collection device as generally shown by 2 was manufactured. Positioned at the proximal end of the device is a reservoir having a 15-20 mm width and 15-30 mm length, and configured to receive through an inlet of the device. Positioned at the distal end of the device is a liquid collection region having a 1-10 mm length, 0.5-8 mm proximal width, 0.5-7 mm distal width, and configured to releases slugs of liquid collected within this region to a tube.

Positioned between the reservoir and liquid collection region are four channel dividers defining five channels. Each flow divider is 0.1-5 mm in width, defining channels having 0.1-5 mm widths. The dividers are tapered to 1-20 degrees, so that the proximal end of the plurality is wider than the distal end of the plurality. This configuration facilitates accumulation of liquid within the channels near the distal end of the channels. The overall length of the device is 75 mm, with a 30 mm width.

Example 2: Flow Sensing

[0063] The fluid collection device of Example 1 was used to collect slugs of liquid from a fluid input comprising a mixture of fluid and air. The nominal flow of liquid was set to 3 cc per minute and an air flow of 10 cc per minute was mixed with the liquid so that a two phase flow was established. When the slugs were collated by the device of Example 1, they were passed through a detection conduit where they were detected by a pair of infrared sensors. The infrared sensors were of the type made by Optek Technology, part number OPB350 and the pair of sensors were placed 50 mm apart.

[0064] FIG. 4 shows graphs of response signals from the two sensors as the slugs passed through the detection conduit for 1 min. FIG. 5 shows graphs of response signals from the two sensors as the slugs passed through the detection conduit for 15 min. FIG. 6 shows graphs of processed response signals from the graphs of Figure 5. FIG. 7 shows a section of the processed response signal from the graphs of FIG. 6, indicating when flow was detected. FIG. 8 shows

graphs plotting the mass of liquid detected flowing through the detection conduit as a function of time in minutes, and the nominal mass of liquid actually flowing through the detection conduit as a function of time in minutes.

[0065] While preferred embodiments of the present disclosure have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the inventions described herein may be employed in practicing the inventions. It is intended that the following claims define a scope of the inventions and that methods and structures within the scope of these claims and their equivalents be covered thereby.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A fluid collection device comprising:
 - a) a housing comprising an inlet and an outlet, the inlet located at a proximal end of the housing and the outlet located at a distal end of the housing;
 - b) a reservoir positioned within the housing at the proximal end of the housing;
 - c) a plurality of channel dividers positioned within the housing between the reservoir and the distal end of the housing, the plurality of channel dividers having a plurality of fluid channels within the housing; and
 - d) a liquid collection region positioned within the housing between the distal end of the plurality of channel dividers and the distal end of the housing;wherein the housing comprises one or more fluid passageways connecting the inlet and the outlet through the interior of the housing; and wherein the reservoir, the plurality of channels, and the liquid collection region are in fluid communication within the one or more fluid passageways in the housing, and wherein the fluid collection device is configured to collect liquid from a fluid comprising liquid and air, and then release the collected liquid as a slug.
2. The fluid collection device of claim 1, wherein the fluid collection device is tapered and a proximal end of the reservoir has a width greater than the width of a distal end of the liquid collection region.
3. The fluid collection device of claim 1 or claim 2, wherein the liquid collection region is configured to receive a slug of liquid having a volume between about 10 uL and about 200 uL.
4. The fluid collection device of any one of claims 1 to 3, wherein the length of one or more of the plurality of channel dividers is between about 2 mm and about 50 mm.
5. The fluid collection device of any one of claims 1 to 4, wherein the width of one or more of the plurality of channels is between about 0.1 mm and about 5 mm.

6. The fluid collection device of any one of claims 1 to 5, wherein the width of one or more of the plurality of channels is tapered to reduce direction of flow by about 1 degree to about 20 degrees.
7. The fluid collection device of any one of claims 1 to 6, wherein a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises a hydrophobic material.
8. The fluid collection device of claim 7, wherein the hydrophobic material has a water contact angle greater than or equal to about 155°.
9. The fluid collection device of any one of claims 1 to 8, wherein a surface of the reservoir, plurality of channels, liquid collection region, or a combination thereof comprises polytetrafluoroethylene (PTFE).
10. The fluid collection device of any one of claims 1 to 9, wherein the housing comprises a transparent material.
11. A canister comprising the fluid collection device of any one of claims 1 to 10.
12. A fluid collection system comprising the fluid collection device of any one of claims 1 to 10 and a canister, wherein the outlet of the fluid collection device is in fluid communication with an inlet of the canister.
13. A fluid collection system comprising the fluid collection device of any one of claims 1 to 10 and a wound dressing, wherein the inlet of the fluid collection device is in fluid communication with an outlet of the wound dressing.
14. A fluid collection system comprising the fluid collection device of any one of claims 1 to 10 and a sensing device comprising:
 - a) source of negative pressure; and
 - b) a plurality of infrared sensors situated within a casing such that a column of liquid located outside of the casing is in the field of view of the plurality of infrared sensors.

15. A fluid flow sensing system comprising:
- a) the fluid collection device of any one of claims 1 to 10;
 - b) a canister comprising an inlet and an outlet, the inlet of the canister configured to be in fluid communication with the outlet of the fluid collection device housing via a detection conduit; and
 - c) a sensing device comprising: a casing having an inlet, a source of negative pressure and a plurality of sensors; the inlet of the sensing device casing configured to be in fluid communication with the outlet of the canister via a negative pressure conduit.

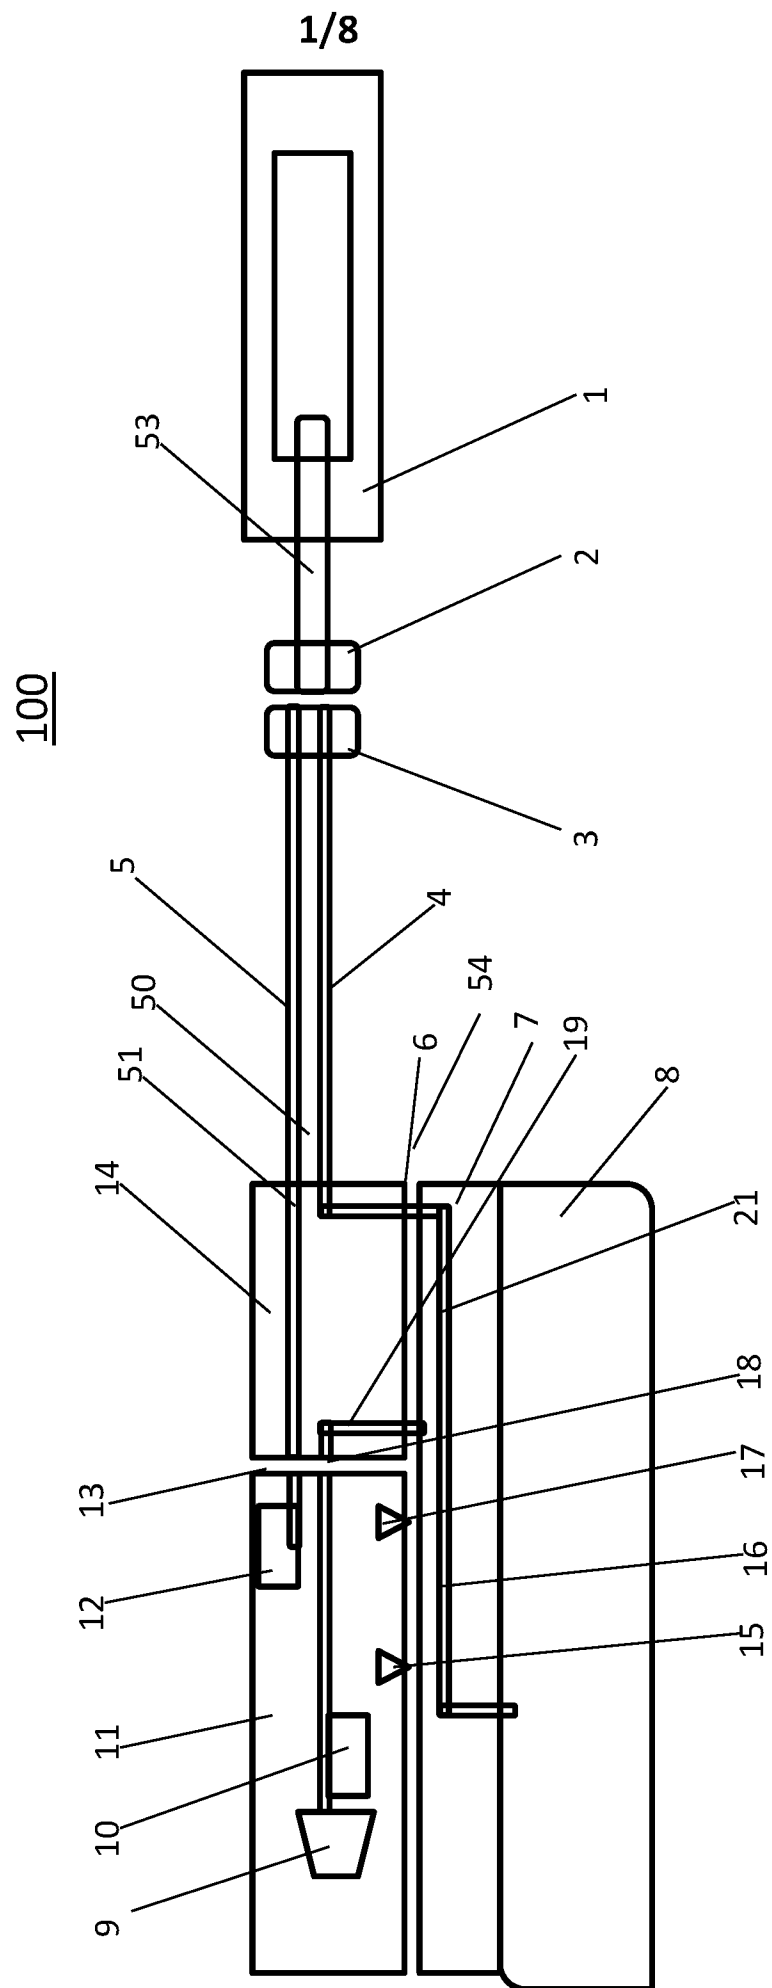


FIG. 1

200

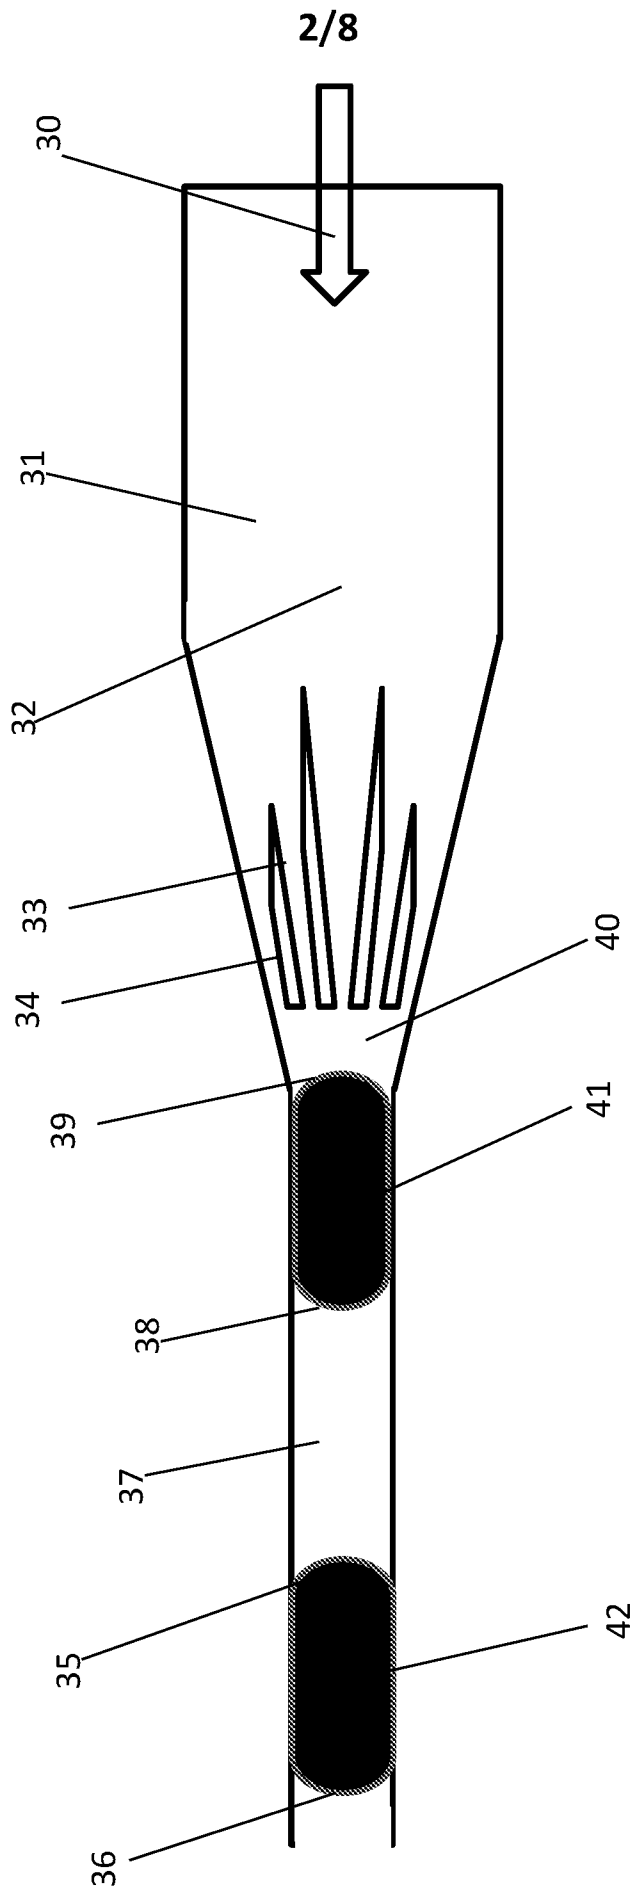
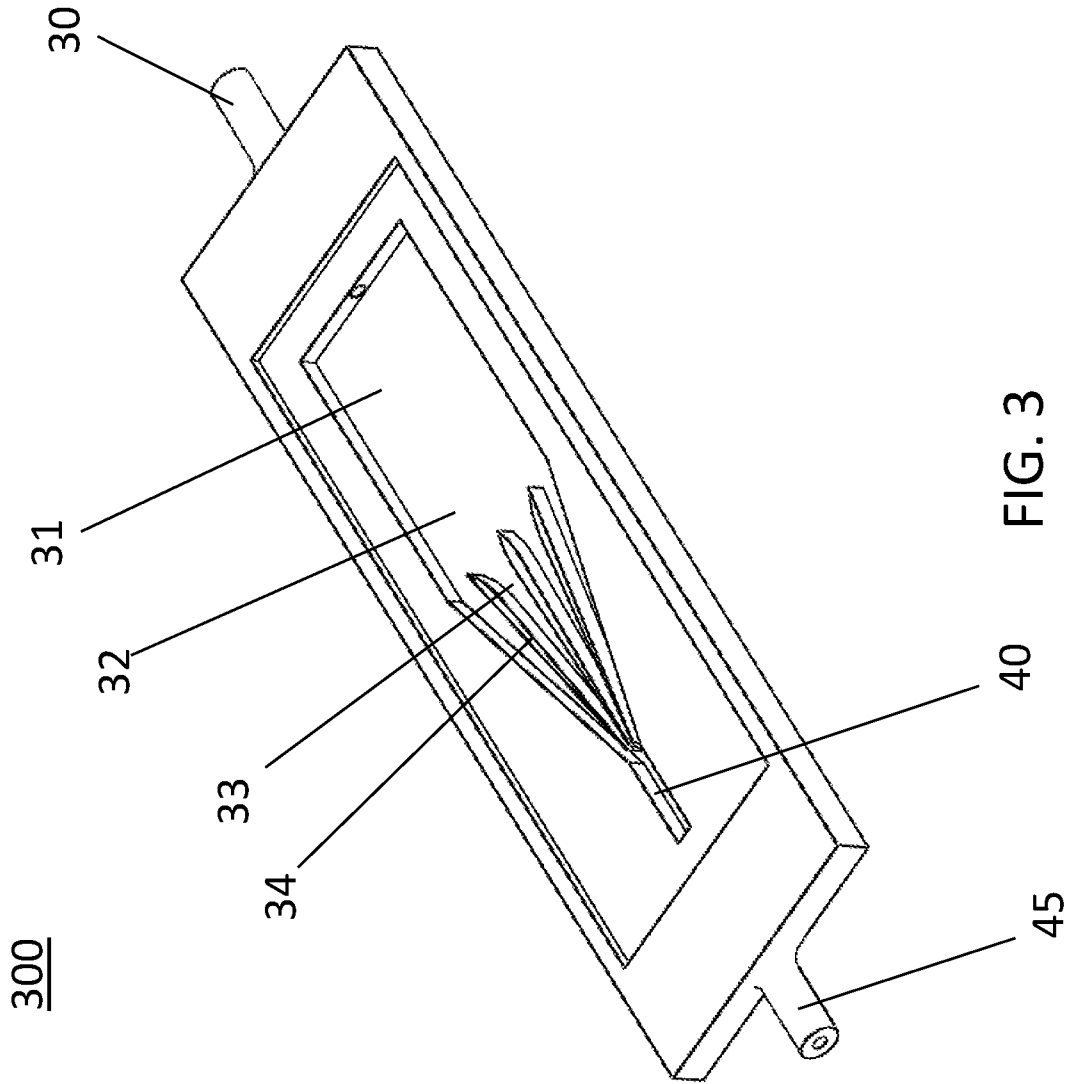


FIG. 2



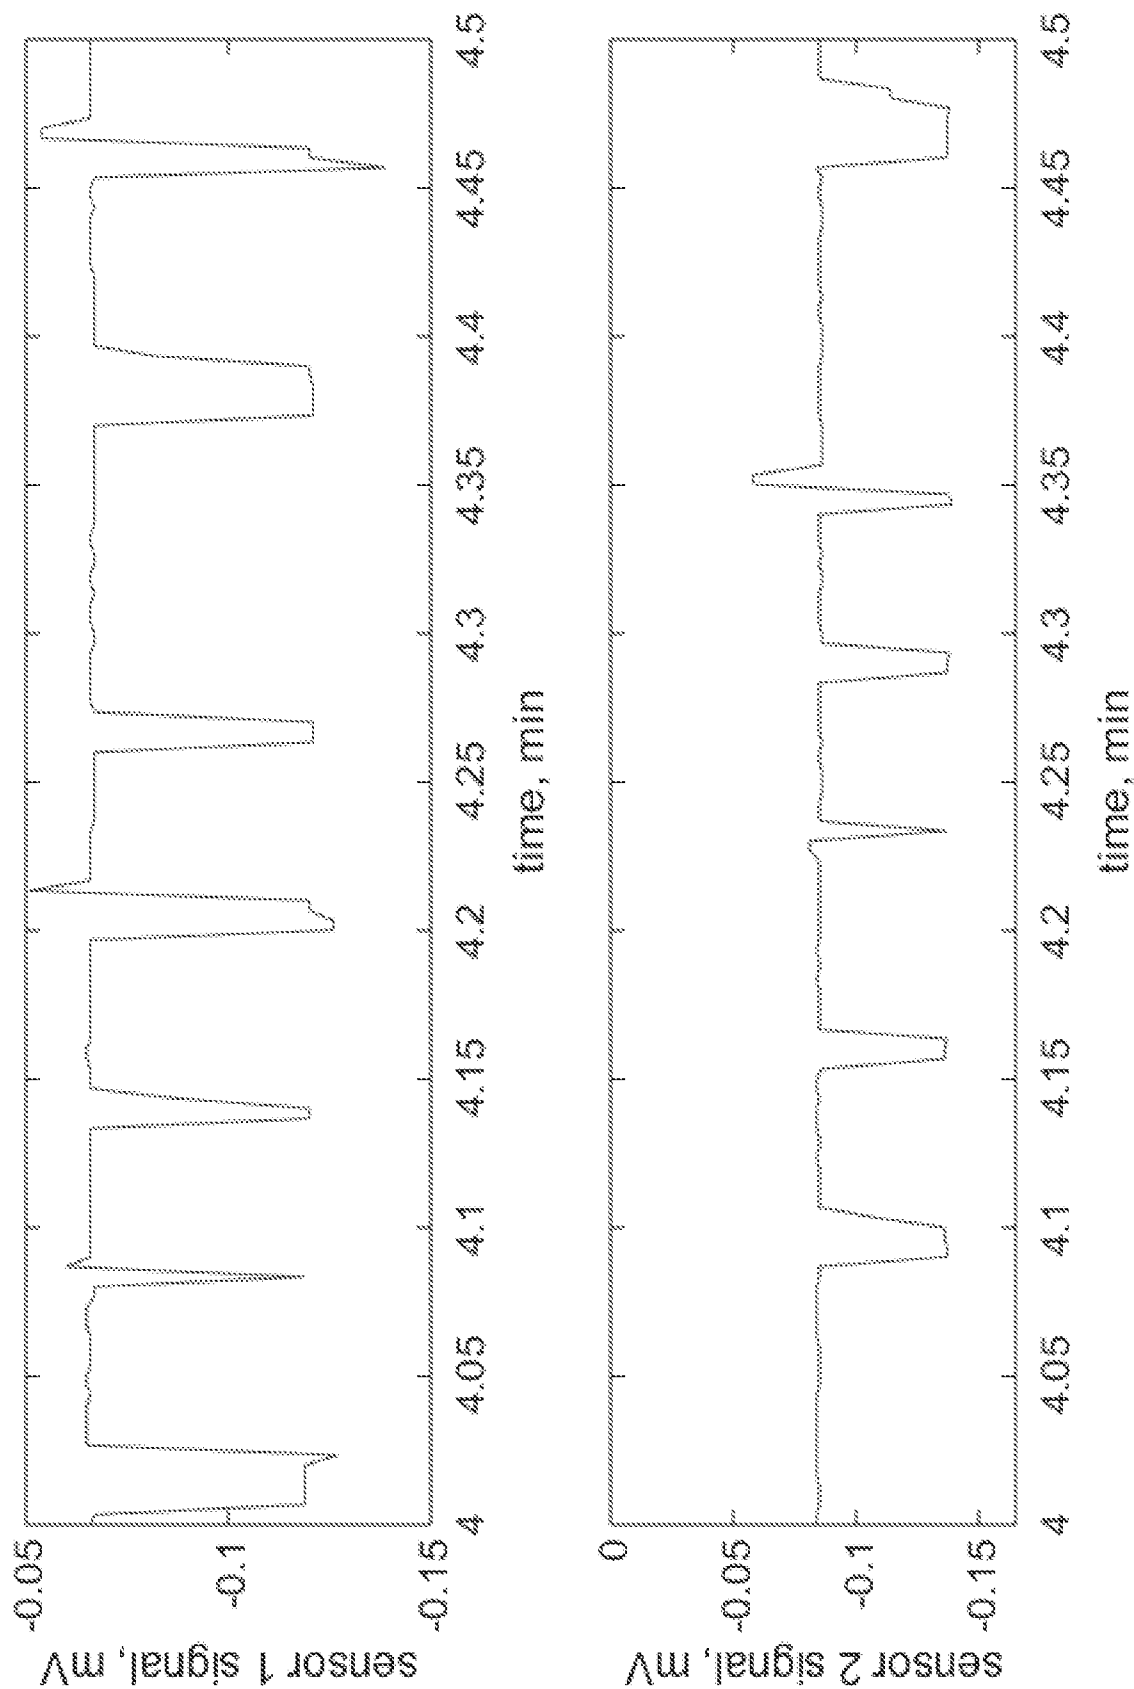


FIG. 4

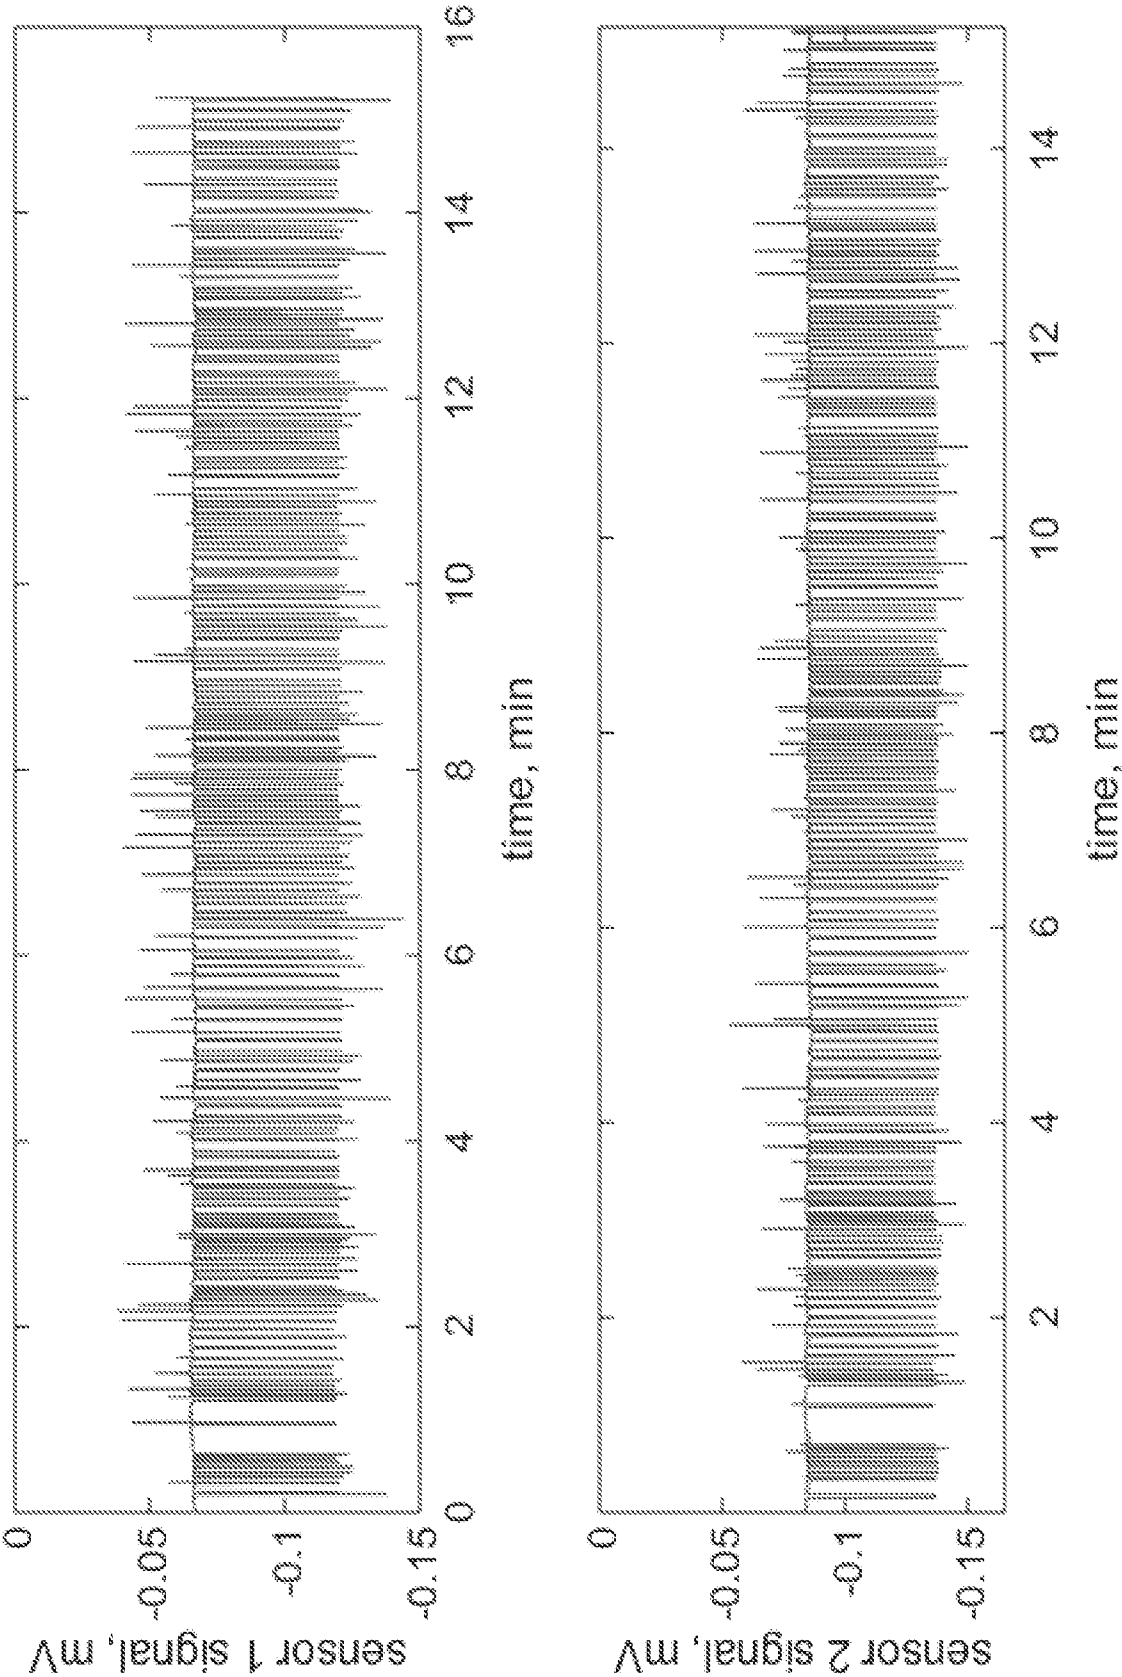


FIG. 5

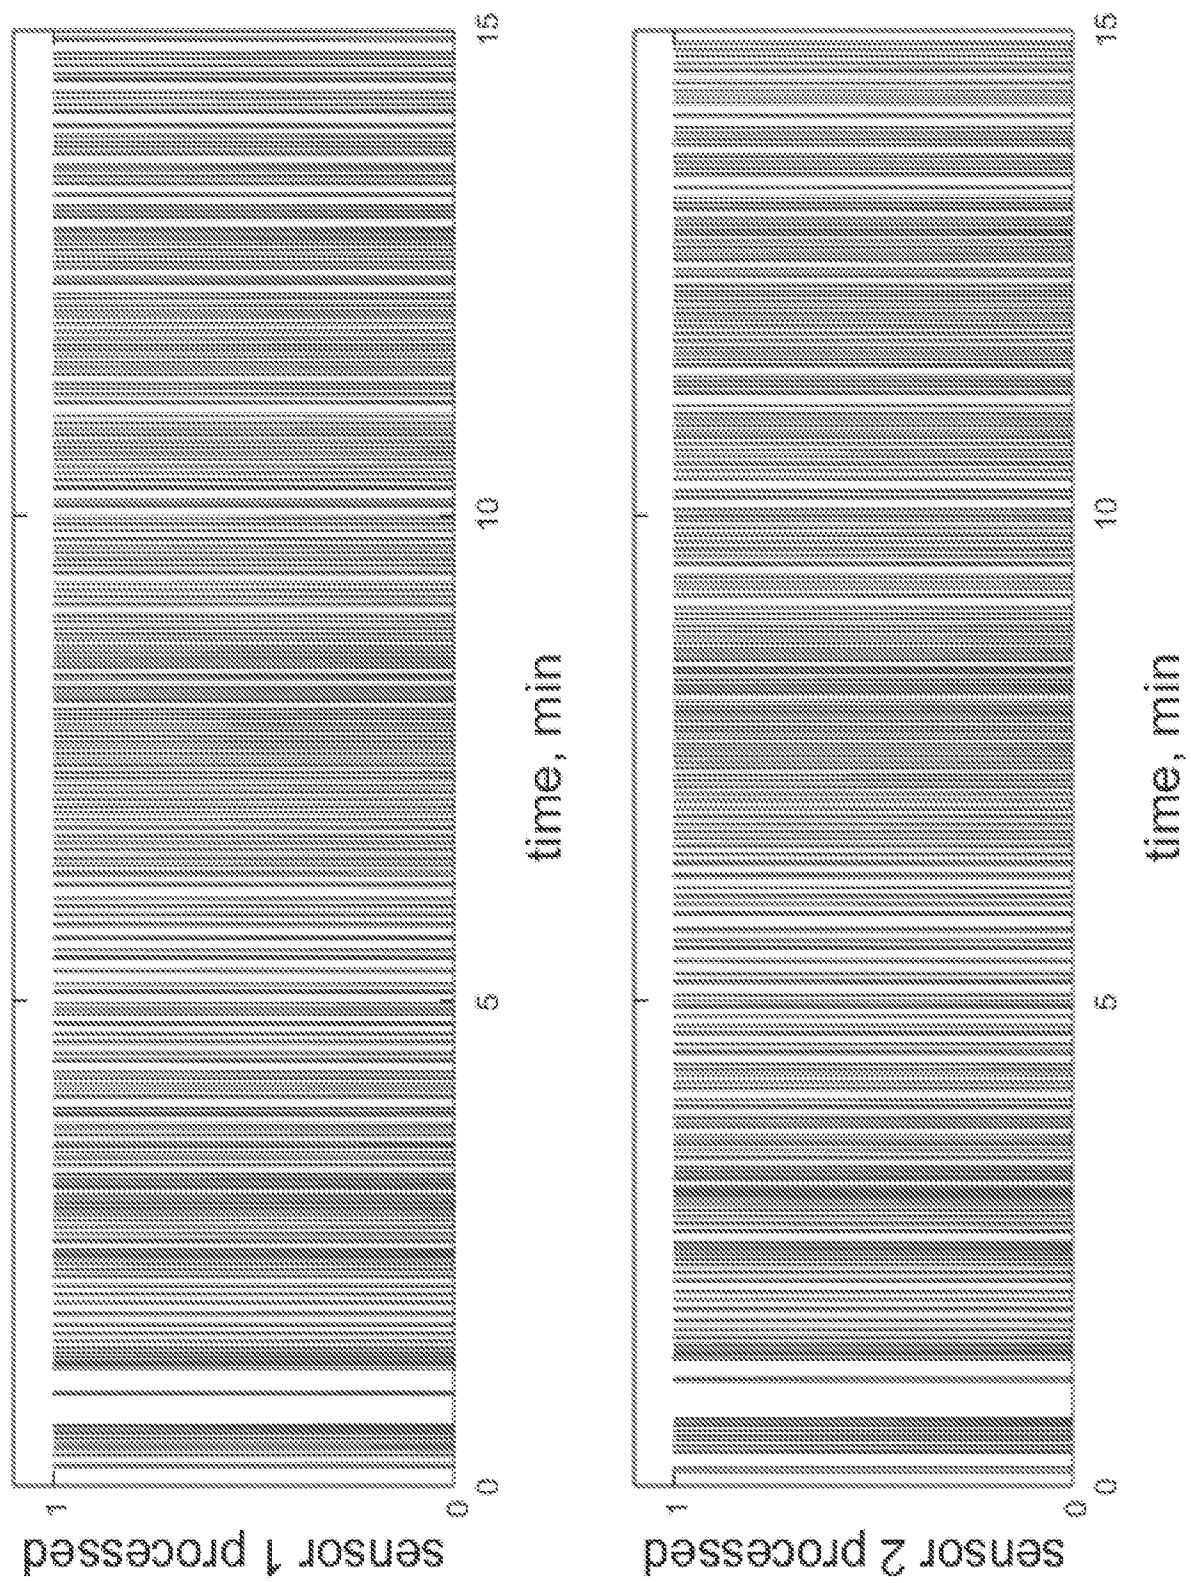


FIG. 6

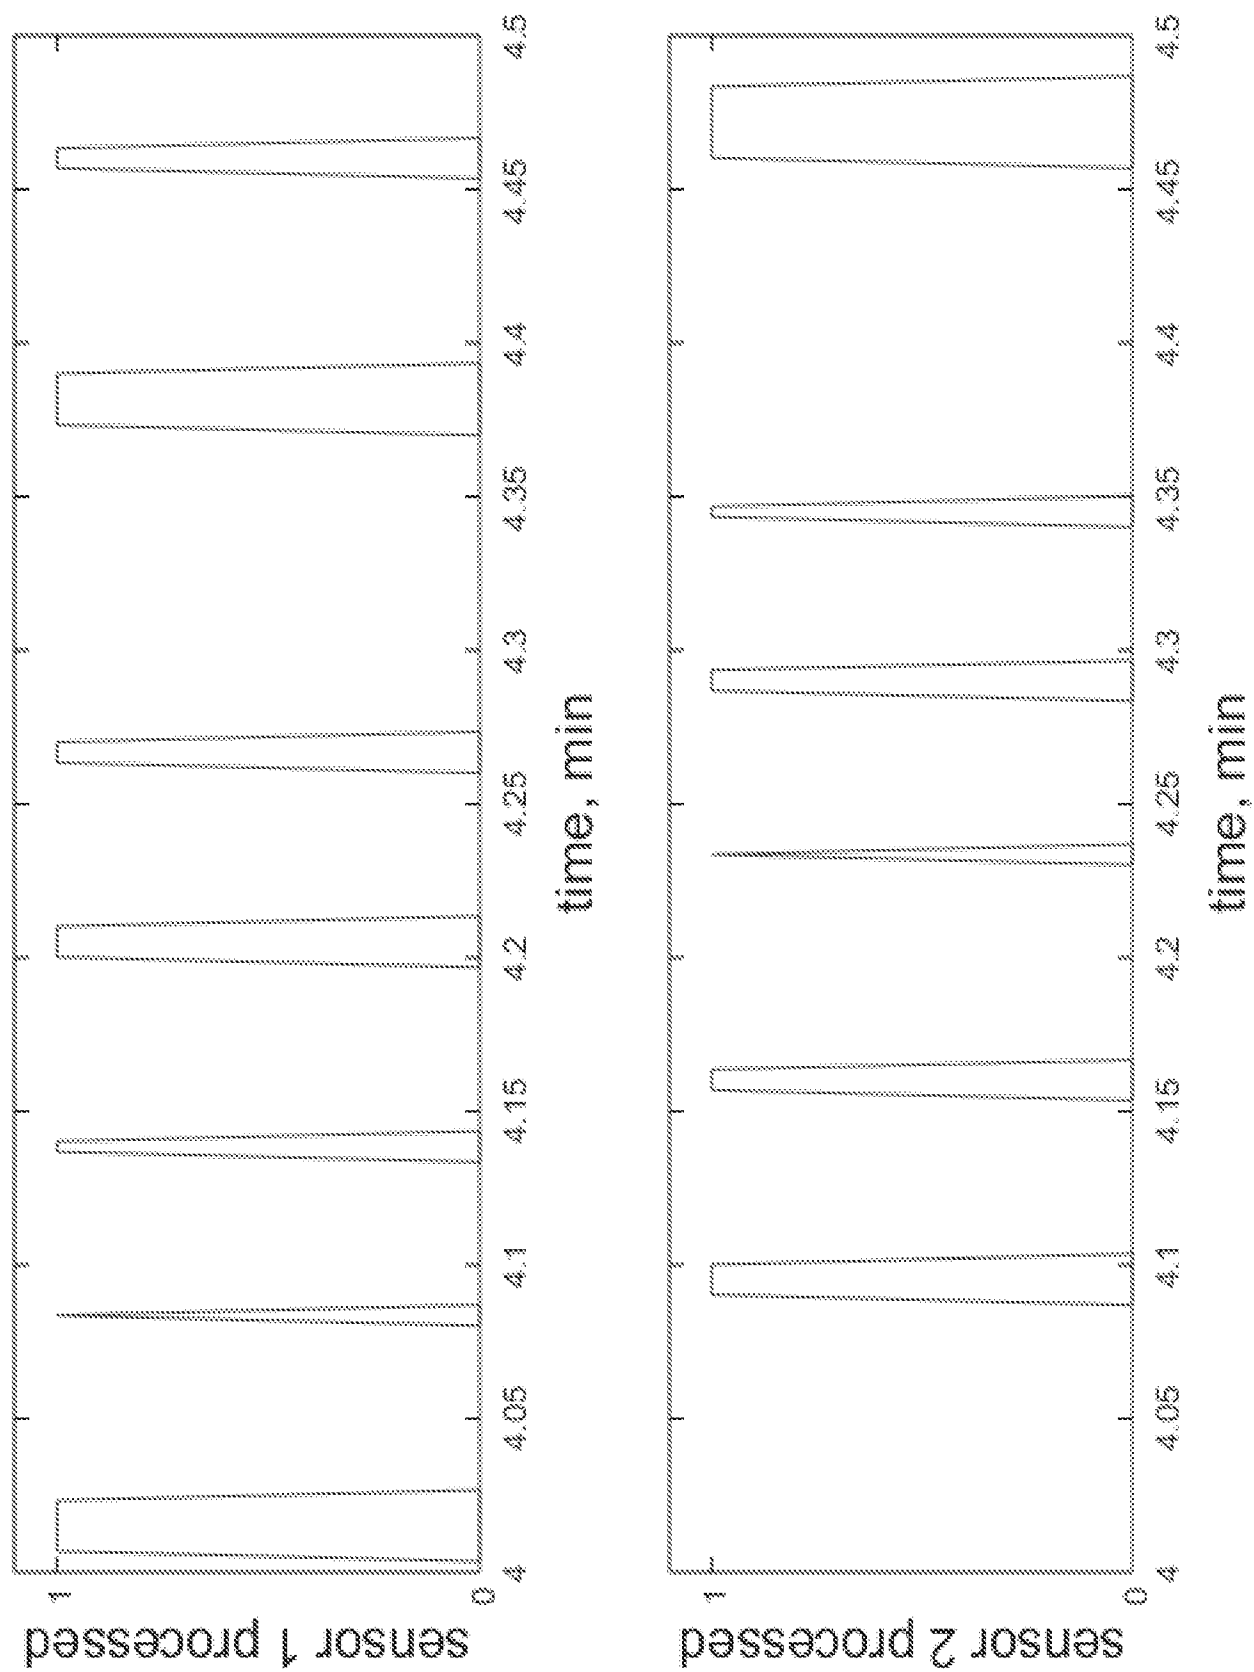


FIG. 7

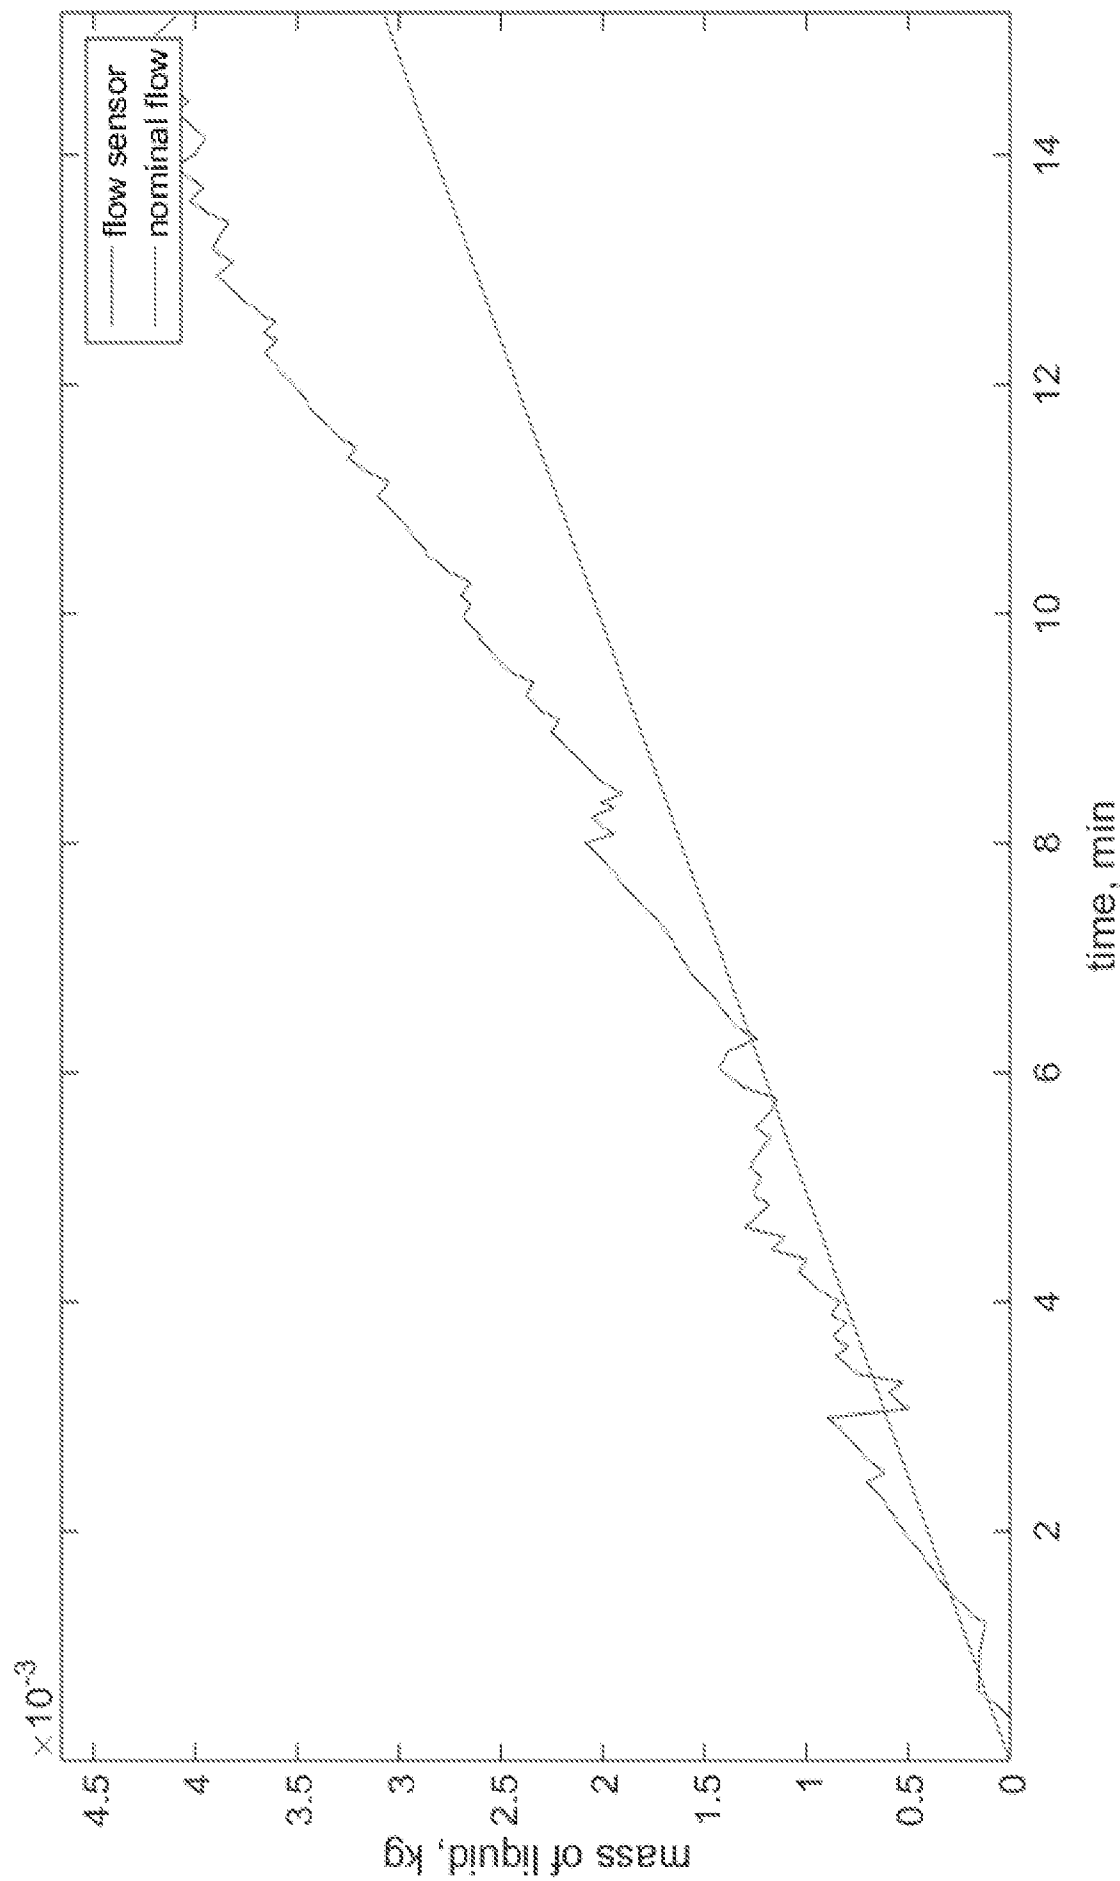


FIG. 8