



(22) **Date de dépôt/Filing Date:** 2015/12/01

(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/06/04

(30) **Priorité/Priority:** 2014/12/04 (FIU20144258)

(51) **Cl.Int./Int.Cl.** *H05B 3/06* (2006.01),
H01B 5/08 (2006.01), *H01R 4/00* (2006.01)


(71) **Demandeur/Applicant:**
WICETEC OY, FI

(72) **Inventeurs/Inventors:**
WALLENIS, TOMAS, FI;
VUOMAJOKI, PAULI, FI

(74) **Agent:** GOWLING WLG (CANADA) LLP


(54) **Titre : JOINT CONDUCTEUR ET COMPOSANTE DE JOINT CONDUCTEUR**

(54) **Title: CONDUCTOR JOINT AND CONDUCTOR JOINT COMPONENT**

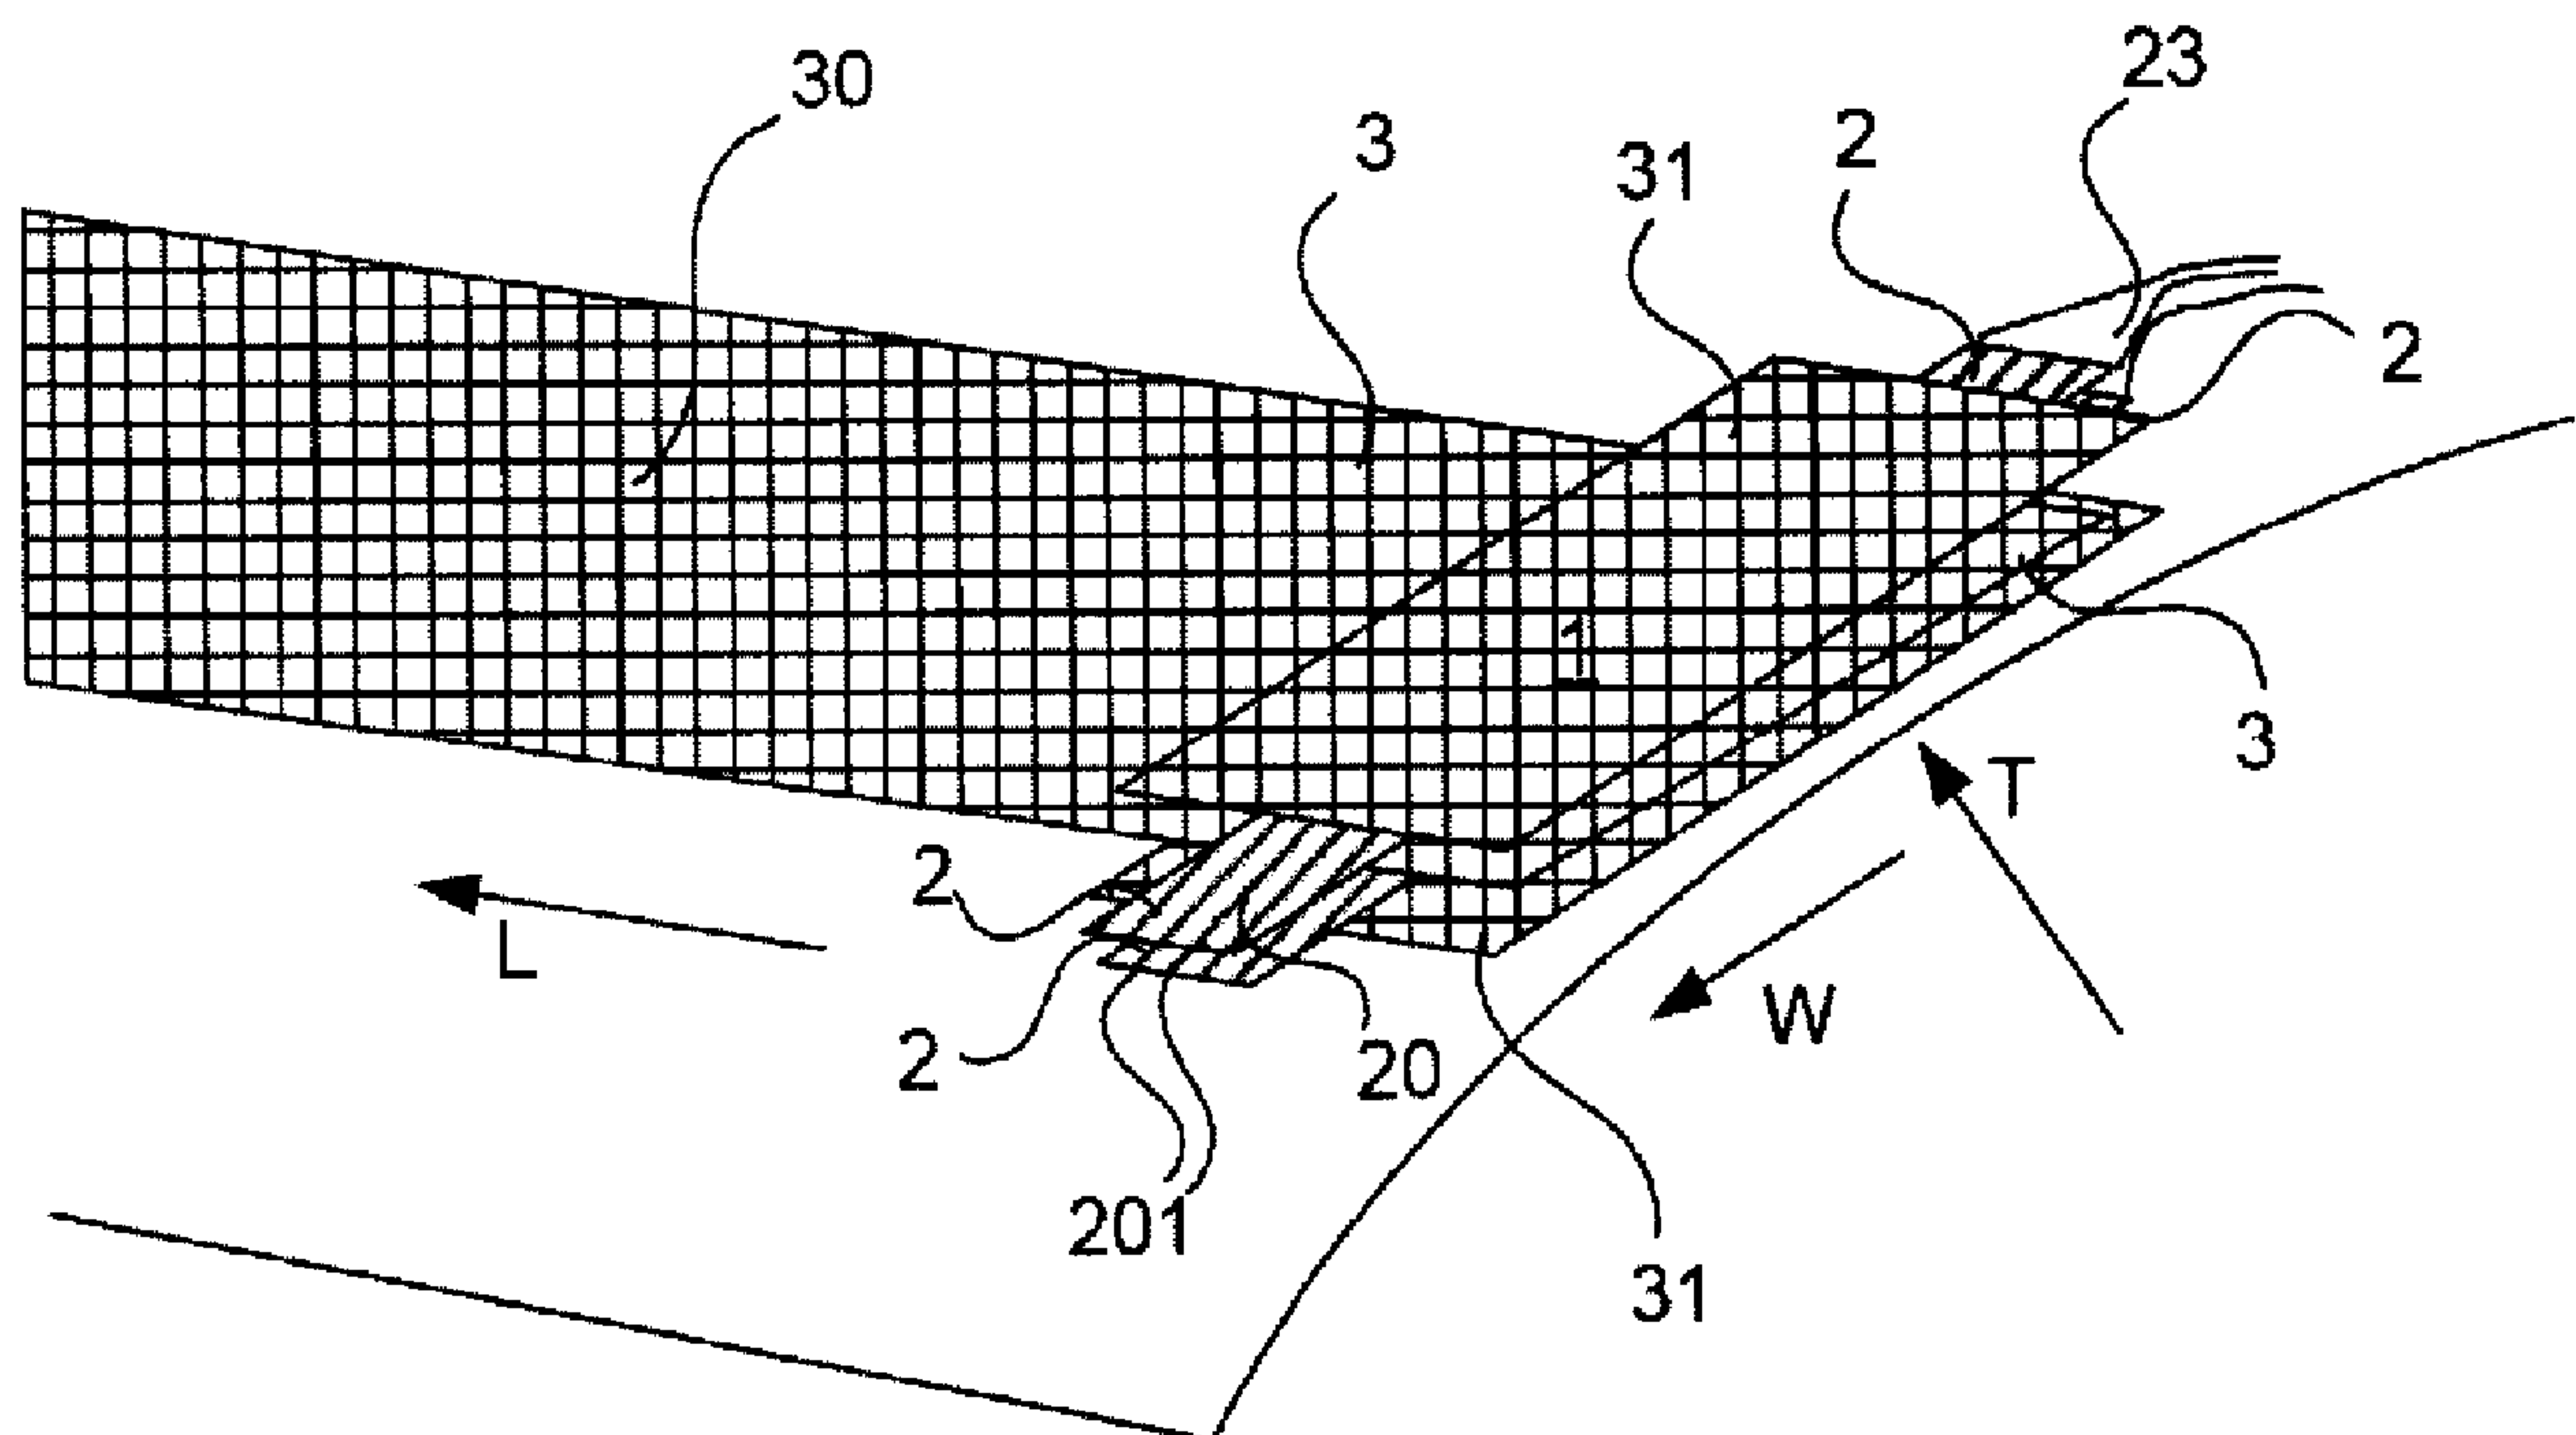

(57) **Abrégé/Abstract:**

A conductor joint (1) for joining a copper conductor (2) to a fiber-structured heating element (3) whose dimensions are length (L) >> width (W) >> thickness (T), and which heating element (3) comprises carbon fiber strands (30), wherein the copper conductor (2) is transversely disposed to the longitudinal direction (L) of the heating element (3) to form a layered structure in the thickness direction (T), on both sides of the heating element (3), the copper conductor (2) comprising strands (20) separable from each other. The strands (20) of the copper conductor (2), the number and diameter of which are suitable for transferring a power of more than ten kW, are quantitatively substantially evenly distributed on both sides of the heating element (3), the strands (20) are disposed in a planar manner in such a way that the strands (20) substantially lie in one plane, adjacent to each other, and the ends (201) of the strands extend, in the width direction (W) of the heating element (3), beyond the heating element (3), wherein the portions of the ends (201) of the strands extending beyond the heating element (3) overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands (20).

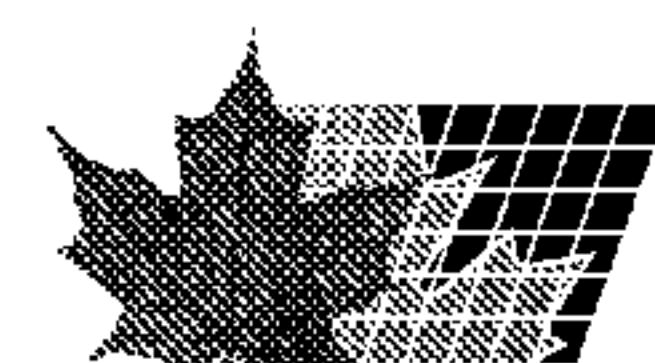

Abstract

A conductor joint (1) for joining a copper conductor (2) to a fiber-structured heating element (3) whose dimensions are length (L) $\gg$ width (W) $\gg$ thickness (T), and which heating element (3) comprises carbon fiber strands (30), wherein the copper conductor (2) is transversely disposed to the longitudinal direction (L) of the heating element (3) to form a layered structure in the thickness direction (T), on both sides of the heating element (3), the copper conductor (2) comprising strands (20) separable from each other. The strands (20) of the copper conductor (2), the number and diameter of which are suitable for transferring a power of more than ten kW, are quantitatively substantially evenly distributed on both sides of the heating element (3), the strands (20) are disposed in a planar manner in such a way that the strands (20) substantially lie in one plane, adjacent to each other, and the ends (201) of the strands extend, in the width direction (W) of the heating element (3), beyond the heating element (3), wherein the portions of the ends (201) of the strands extending beyond the heating element (3) overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands (20).

Conductor Joint and Conductor Joint Component

[001] The invention relates to a connecting piece for connecting a copper conductor to a carbon fiber heating element. More particularly, the invention relates to connecting a copper conductor to an anti-icing carbon fiber heating element in a wind turbine blade for electric heating. The invention is a conductor joint for joining a copper conductor to a fiber-structured heating element whose dimensions can be length >> width >> thickness, and which heating element comprises carbon fiber strands, wherein the copper conductor is transversely disposed to the longitudinal direction of the heating element to form a layered structure in the thickness direction, on both sides of the heating element, the copper conductor comprising strands separable from each other.

[002] The invention is intended to be used in wind turbines where any ice-forming environmental conditions may, due to deteriorated blade aerodynamics, decrease the efficiency of the wind turbine. The present invention is intended for use in megawatt-class wind turbines typically requiring a power transfer efficiency of dozens of kilowatts, such as 25 to 45 kW, from the conductor joint. Further, the aerodynamic properties of the blade, that is the shape and rigidity thereof, must remain, despite the electric heating, within the manufacturing and design tolerances for the blade. This imposes special requirements on the conductor joint because the conductor joint must be very thin and unnoticeable shape but it still has to transmit quite a high electric power. In addition to the above-mentioned, the fact that the blades of a wind turbine are very likely to be struck by lightning, determines which kind of structure can be used. If a blade, or a heating element in the blade, is struck by lightning, a huge voltage and current peak, possibly running through the present conductor joint, is created. Because the conductor joint is very difficult to reach for service and reparation, the conductor joint must also be lightning-proof.

[003] WO2012/164167A1 is known from the prior art, disclosing solutions for transferring an electric current to a heating element in a wind turbine blade. In particular, the embodiment described in Figure 2b of the specification, and in the corresponding section of the description, has proven to be a technically successful solution. Therein, the heating element is a multilayered structure having an intermediate conductor.

[004] An objective of the present invention is to improve the solution known from the prior art and to ensure a reliable transfer of a high electric power from a copper conductor to a carbon fiber heating element. A particular objective is to provide a solution where so-called hotspots can be avoided, i.e. points where the density of the current flow increases compared to the rest of the joint and which may start to become heated, possibly causing damage to the structure or making it weaker in some other way.

[005] The conductor joint according to the invention is characterized in what is set forth in the characterizing part of the independent claim.

[006] Hence, the invention is a conductor joint for joining a copper conductor to a fiber-structured heating element whose dimensions are length $\gg$ width $\gg$ thickness, and which heating element comprises carbon fiber strands, wherein the copper conductor is transversely disposed to the longitudinal direction of the heating element to form a layered structure in the thickness direction, on both sides of the heating element, the copper conductor comprising strands separable from each other. The strands of the copper conductor, the number and diameter of which typically are suitable for transferring a power of more than ten kW, are quantitatively substantially evenly distributed on both sides of the heating element, the strands are disposed in a planar manner in such a way that the strands substantially lie in one plane, adjacent to each other, and the ends of the strands extend, in the width direction of the heating element, beyond the heating element, wherein the portions of the ends of the strands extending beyond the heating

element overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands.

[007] The above shows, by means of a conventional mathematical operator that, as for the dimensions of heating element, the length of the heating element typically is considerably greater than its width, which, in turn, is considerably greater than its thickness. As a practical example, the length, width and thickness of the heating element can vary from meters to dozens of meters, from ten centimeters to one meter and from less than millimeter to one millimeter, respectively. In some cases, the width and length can be approximately of the same magnitude, if heating only is needed locally in a small area.

[008] In an embodiment, the heating element comprises carbon fiber strands, possibly intersecting each other, or, the heating element can be made of a unidirectional carbon fiber mat. The intersecting carbon fiber strands can be positioned, for example, at a 45° angle relative to the longitudinal direction, resulting in a very neutral behavior of the heating element with respect to the rest of the blade structure. That is, the heating element does not stiffen the blade structure. Overall, the type of the heating element used is of hardly any importance to the conductor joint. The solution is also applicable to other electrical heating elements having a lower conductivity than copper, wherein, because of the lower conductivity, the conductor joint is increased in area and is similar in shape as explained above.

[009] A special feature of the invention is that it provides a low-profile conductor joint in the thickness direction of the structure. A particularly functional structure is obtained if the strand diameter of the copper conductor and the thickness of the heating element are 0.3 mm and 0.2 mm, respectively. The thickness of the layered structure is thus $2 \times 0.3 \text{ mm} + 3 \times 0.2 \text{ mm}$, 1.2 mm in total. Of course, the invention is not restricted to these dimensions but other dimensions are feasible. The number of strands needed is given by the following equation: $n = k \cdot 4 \cdot A / \pi d^2$

where A is the cross-sectional area of the copper conductor, determined by how high a current transfer capacity is required, based on the standards and regulations on electrical safety and installations, whereas k is a strand number constant based on experience on the number of strands needed, typically $k = 0.9 - 1.1$.

[010] The above-mentioned number of the copper conductor strands is quantitatively substantially evenly distributed on both sides of the heating element, the strands being disposed in a planar manner to substantially lie in one plane, adjacent to each other. Of course, when the strands are very abundant in number, the accuracy is not absolute but 45 % of them can be disposed one side and 55 % of them can be disposed on the other side, without any great consequences on the conductor joint. The planarity provides a maximum area between the strands of the copper conductor and the carbon fiber strands of the heating element. At the same time, any electric cross-currents caused by strands crossing over each other, possibly contributing to hotspots, are avoided. That is, strands crossing over each other cause a diminished conductive contacting area and a local accumulation of the current in very conductive spots, resulting in an undesired increased local current flow.

[011] Further, the ends of the strands extend, in the width direction of the heating element, beyond the heating element, wherein the portions of the ends of the strands extending beyond the heating element overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands. This maximizes the current transferred from the lateral faces of the strands of the copper conductor to the carbon fiber structure. Studies show that a current transferred from the end of a strand to a heating element is considerably more likely to create a hotspot there, i.e. the current is accumulated in the end region of the strand. When the strands of the copper conductor form a joint brought together outside the heating element, this portion aids, to a great extent, the current to pass

from the strands of the copper conductor to the heating element, exactly in the desired manner. This is another feature providing a more steady current flow.

[012] In the following, the invention will be explained in more detail with reference to the accompanying drawings wherein

- Figure 1 shows an embodiment of the conductor joint, and
- Figure 2 shows a partial width of a copper conductor.

[013] Figure 1 shows a conductor joint 1 for joining a copper conductor 2 to a fiber-structured heating element 3 whose dimensions are length $L \gg$ width $W \gg$ thickness T , and which heating element 3 comprises intersecting carbon fiber strands 30, wherein the copper conductor 2 is transversely disposed to the longitudinal direction L of the heating element 3 to form a layered structure in the thickness direction T , on both sides of the heating element 3, the copper conductor 2 comprising strands 20 separable from each other. The strands 20 of the copper conductor, the number and diameter of which are suitable for transferring a power of dozens kilowatts, such as 25 - 45 kW, are quantitatively substantially evenly distributed on both sides of the heating element 3, the strands 20 are disposed in a planar manner in such a way that the strands 20 substantially lie in one plane, adjacent to each other, and the ends 201 of the strands extend, in the width direction W of the heating element 3, beyond the heating element 3, wherein the portions of the ends 201 of the strands extending beyond the heating element 3 overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands 20. In the inlet end of the copper conductor 2, the suitably spaced strands extending in one plane can be bundled up 23 and connected to a transmission cable by means of a conventional conductor joint (not shown). The layers are laminated or glued together during the manufacture, using a suitable method and materials. For a carbon fiber heating element, reinforced plastic construction methods, typically manual laminating and vacuum-bag curing, are used as the method. It is also possible to use other known laminating methods.

[014] In an embodiment, the strands 20 of the copper conductor 2 extend, at the ends 201 of the strands, beyond the heating element by a distance, this distance being more than 10 times greater than the strand diameter d , preferably more than 30 times greater than the strand diameter. This ensures, up to the end of the edge of the heating element 3, that the electric current is evenly transferred from the copper conductor 2 to the heating element 3, throughout the entire width W of the heating element 3. Preferably, the proportions length $\gg$ width $\gg$ thickness also apply to the conductor joint, the orientation just is transverse to the longitudinal direction compared to the corresponding dimensions of the heating element.

[015] The layered structure also comprises, on the side of the strands 20 of the copper conductor 2 facing away from the heating element 3 in the thickness direction T , a strip 31 of the heating element 3 adapted to equalize the electric potential between the heating element 3 and the copper conductor 2 as well as to increase the conductive area between the heating element and the copper conductor.

[016] Figure 2 is a view of an embodiment, or, more particularly, a part of the embodiment, across a short width of the copper conductor 2 and the strands 20 thereof. The figure is intended to illustrate how some of the strands 20 can be attached to each other while others of the strands can be slightly detached from each other. The strands preferably consist of a straight, unbraided and uninsulated copper wire in order to avoid a weakened contact caused by strand bending. The easiest way of obtaining a desired very conductive joint is to use straight strands. Figure 2 shows the diameter d of one strand which preferably is approximately 0.3 mm. The number of strands needed is calculated by the following equation: $n = k \cdot 4 \cdot A / \pi d^2$ where A is the cross-sectional area of the copper conductor determined by how high a current transfer capacity is required. The strand number constant k is based on experience on the number of strands needed, typically $k = 0.9 - 1.1$. Further, the magnitude of the current transfer capacity is chosen to allow

an electric power of dozens of kilowatts, such as 30 kW, through the conductor joint, also resulting in a reliable ability to withstand most lightning strikes.

[017] In an aspect of the invention, the invention also relates to a prefabricated conductor joint component for making a conductor joint according to the invention. Therein, the strands of the copper conductor are removably fixed to an auxiliary substrate, such as adhesive tape, on which the strands are disposed in a planar manner in such a way that the strands substantially extend in one plane only, adjacent to each other.

Claims

1. A conductor joint (1) for joining a copper conductor (2) to a fiber-structured heating element (3) whose dimensions are length (L) $\gg$ width (W) $\gg$ thickness (T), and which heating element (3) comprises carbon fiber strands (30), wherein the copper conductor (2) is transversely disposed to the longitudinal direction (L) of the heating element (3) to form a layered structure in the thickness direction (T), on both sides of the heating element (3), the copper conductor (2) comprising strands (20) separable from each other, **characterized** in that the strands (20) of the copper conductor (2), the number and diameter of which are suitable for transferring a power of more than ten kW, are quantitatively substantially evenly distributed on both sides of the heating element (3), the strands (20) are disposed in a planar manner in such a way that the strands (20) substantially lie in one plane, adjacent to each other, and the ends (201) of the strands extend, in the width direction (W) of the heating element (3), beyond the heating element (3), wherein the portions of the ends (201) of the strands extending beyond the heating element (3) overlap each other, and an electric joint is formed between the lateral faces of these overlapping strands (20).
2. A conductor joint (1) as defined in claim 1, **characterized** in that the strands (20) of the copper conductor (2) extend, at the ends (201) of the strands, beyond the heating element (3) by a distance, this distance being more than 10 times greater than the strand diameter (d), preferably more than 30 times greater than the strand diameter (d).
3. A conductor joint (1) as defined in claim 1, **characterized** in that the layered structure also comprises, on the side of the strands (20) of the copper conductor (2) facing away from the heating element (3) in the thickness direction (T), a strip (31) of the heating element (3) adapted to equalize the electric potential between the heating element (3) and the copper conductor (2) as well as to increase the conductive area between the heating element (3) and the copper conductor (2).

4. A conductor joint (1) as defined in claim 1, **characterized** in that the strands (20) consist of a straight, unbraided and uninsulated copper wire.
5. A conductor joint (1) as defined in claim 1, **characterized** in that the magnitude of the current transfer capacity is chosen to allow an electric power of dozens of kilowatts, such as 25 to 45 kW, through the conductor joint (1).
6. A conductor joint (1) as defined in claims 1 and 5, **characterized** in that the number of strands (20) needed is calculated by the following equation: $n = k \cdot 4 \cdot A / \pi d^2$ where A is the cross-sectional area of the copper conductor determined by how high a current transfer capacity is required.
7. A conductor joint component for making a conductor joint (1) according to claim 1, **characterized** in that the strands (20) of the copper conductor (2) are removably fixed to an auxiliary substrate, such as adhesive tape, on which the strands (20) are disposed in a planar manner in such a way that the strands (20) substantially extend in one plane, adjacent to each other.

1/1

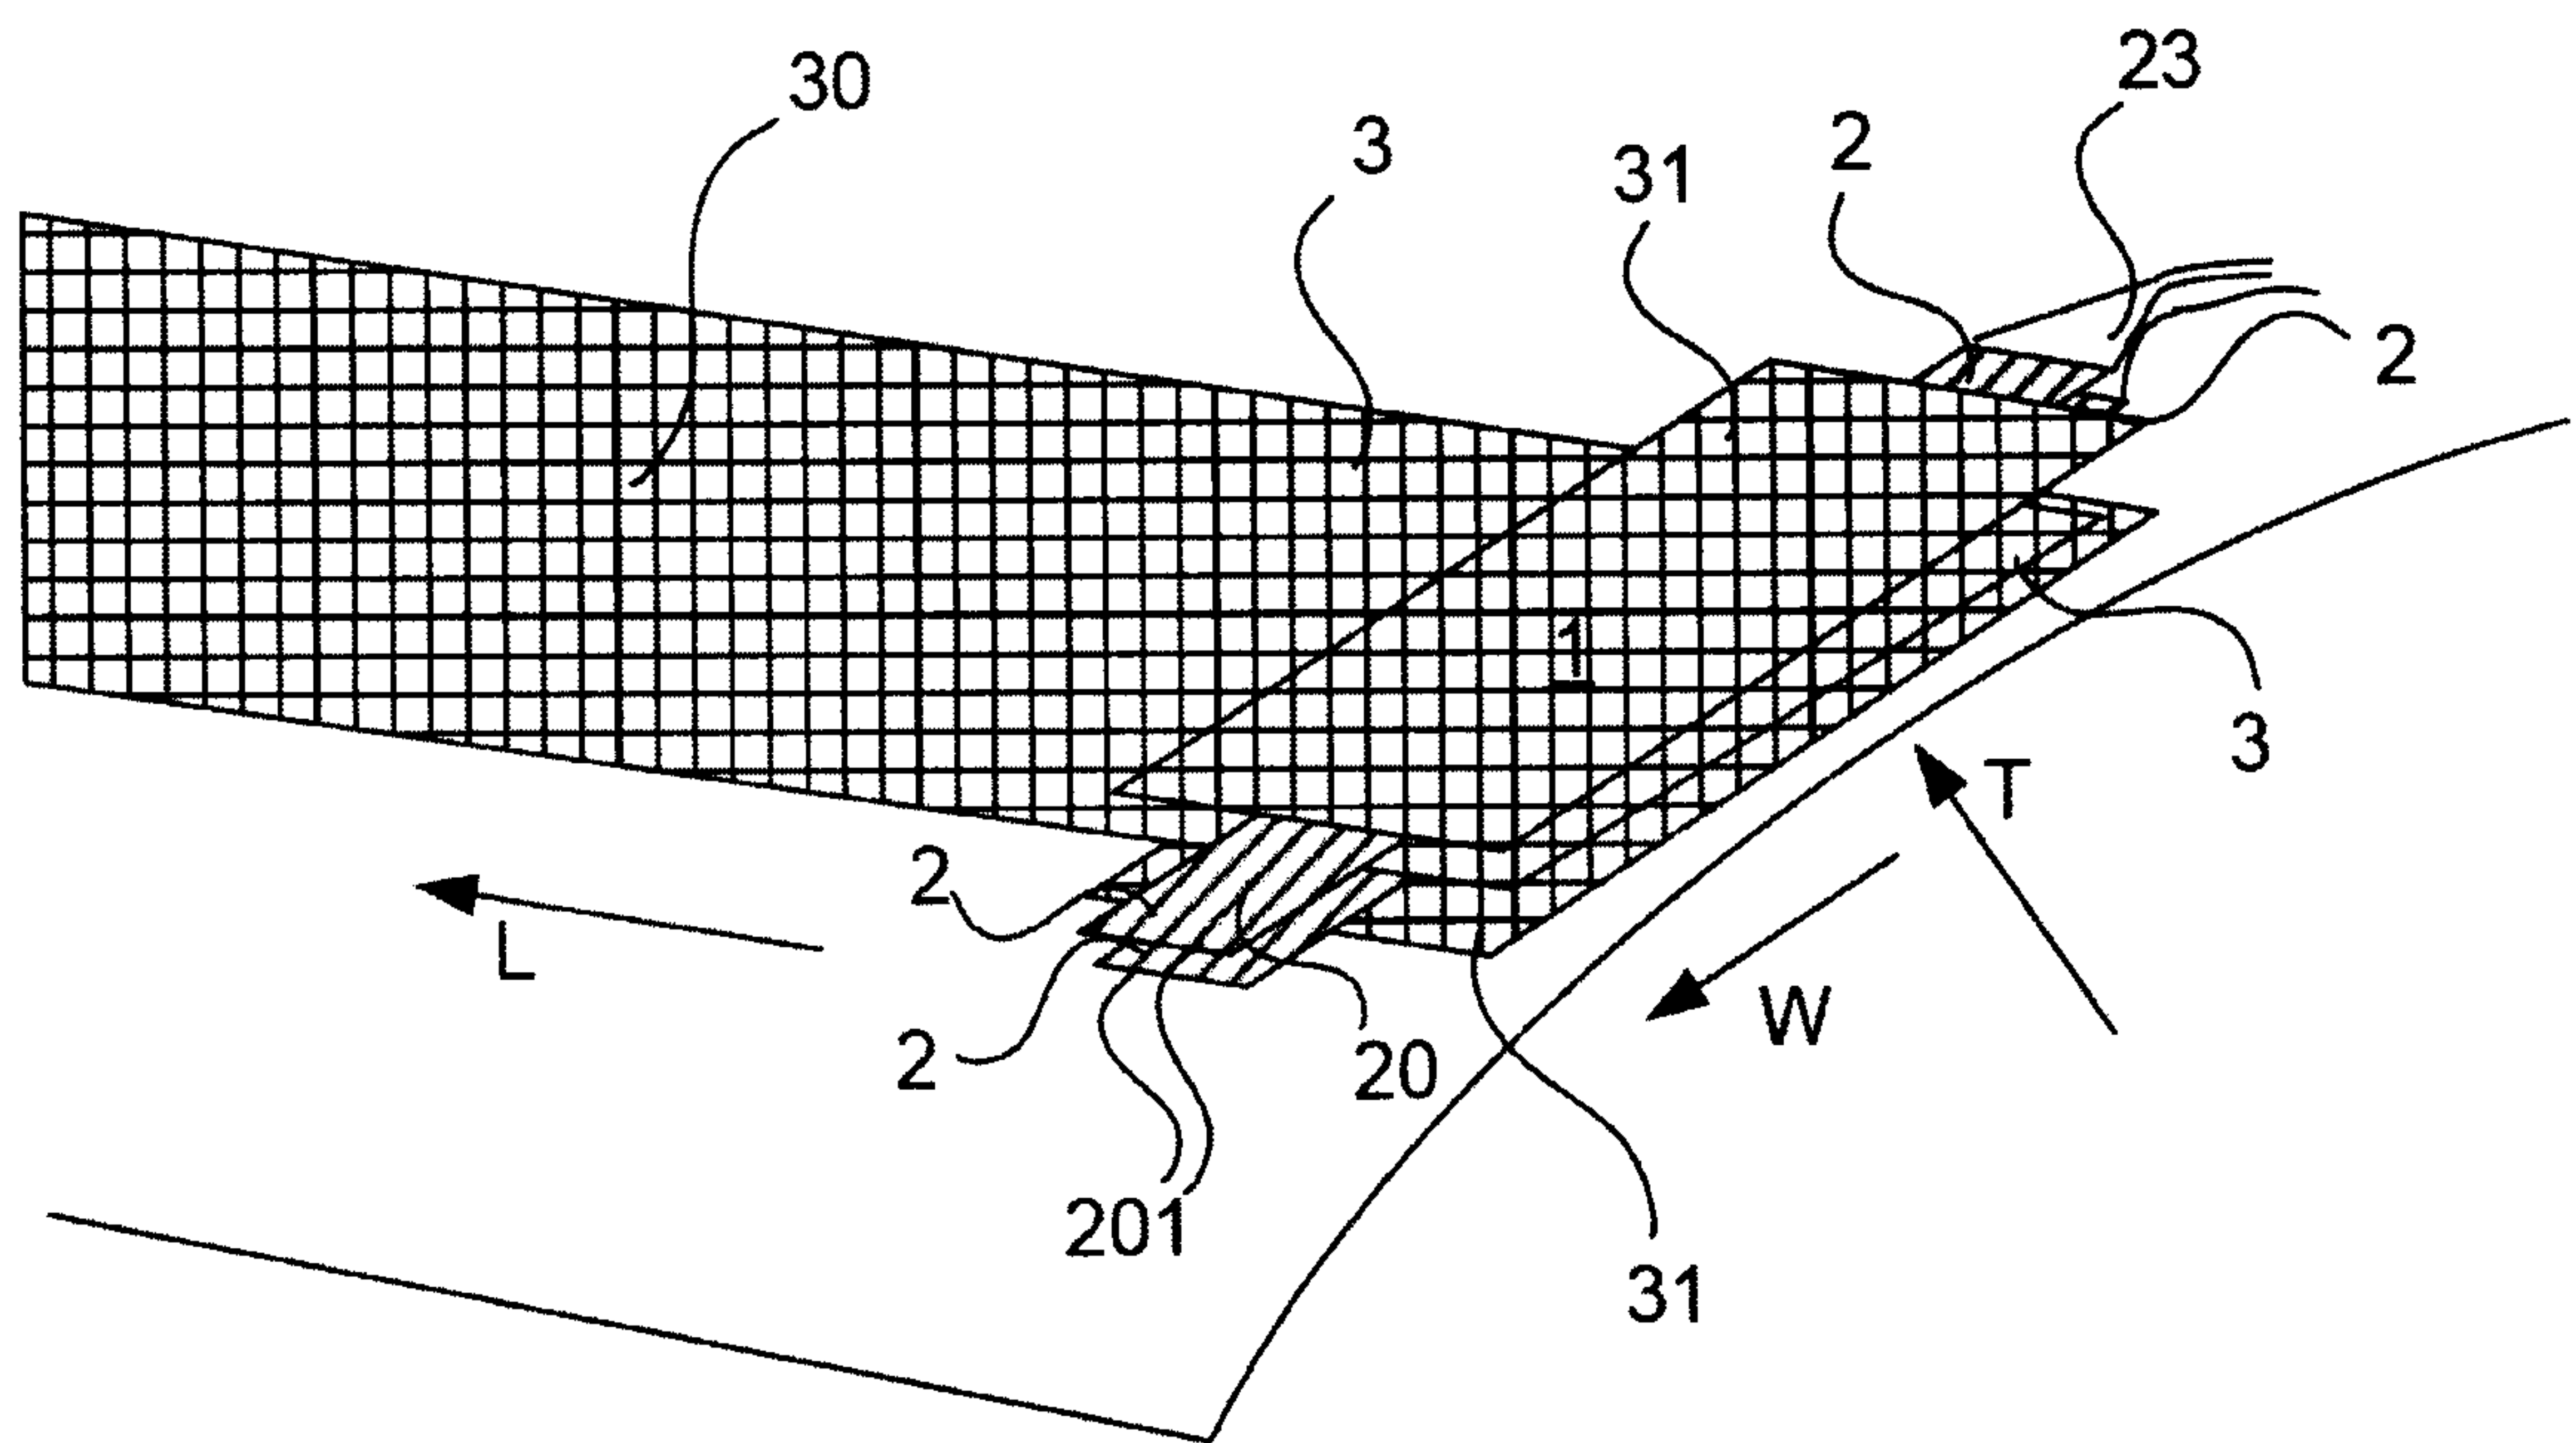


FIG. 1

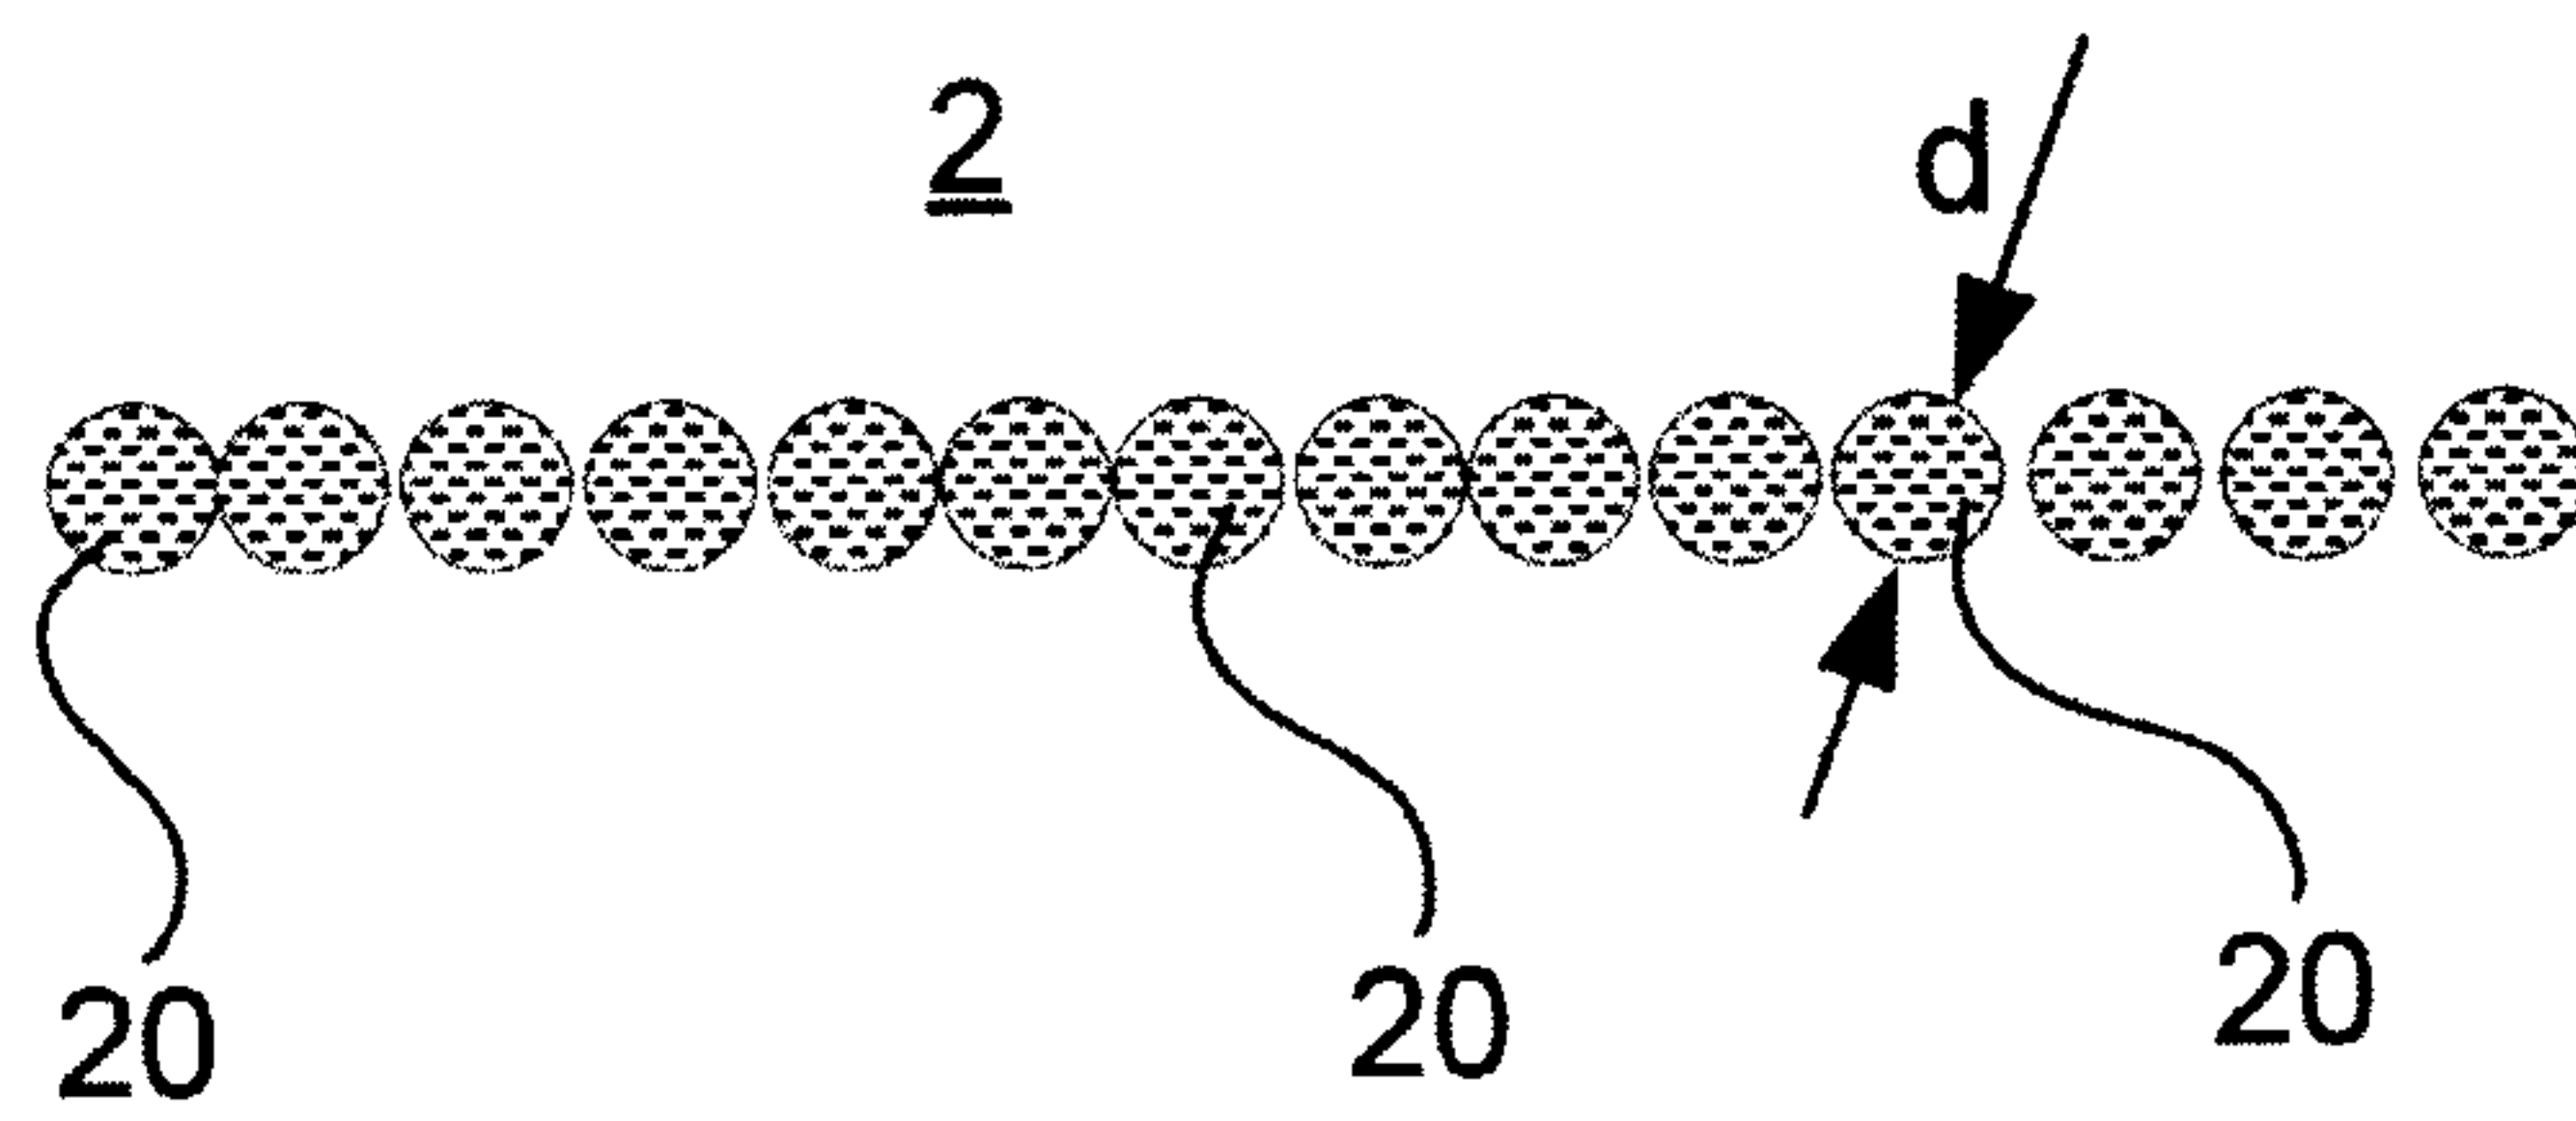


FIG. 2

