



US 20010013980A1

(19) **United States**

(12) **Patent Application Publication**

**Kohno et al.**

(10) **Pub. No.: US 2001/0013980 A1**

(43) **Pub. Date: Aug. 16, 2001**

(54) **ZOOM LENS SYSTEM**

(76) Inventors: **Tetsuo Kohno**, Osaka (JP); **Genta Yagyu**, Osaka (JP)

Correspondence Address:

**Platon N. Mandros**

**BURNS, DOANE, SWECKER & MATHIS,**  
**L.L.P.**

**P.O. Box 1404**

**Alexandria, VA 22313-1404 (US)**

(21) Appl. No.: **09/810,245**

(22) Filed: **Mar. 19, 2001**

**Related U.S. Application Data**

(62) Division of application No. 09/468,366, filed on Dec. 21, 1999, now Pat. No. 6,229,655.

(30) **Foreign Application Priority Data**

Dec. 22, 1998 (JP) ..... H10-363664

Jan. 12, 1999 (JP) ..... H11-005056

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **G02B 15/14**

(52) **U.S. Cl.** ..... **359/689**; 359/684; 359/683;  
359/676; 359/694

(57)

**ABSTRACT**

A zoom lens system has, from the object side, a first lens unit, a second lens unit and a third lens unit. The first lens unit has a negative optical power as a whole. The second and third lens units have a positive optical power as a whole. In the zoom lens system, zooming is achieved by varying the distance between the first and second lens units, and at least one of the lens elements is a plastic lens element.

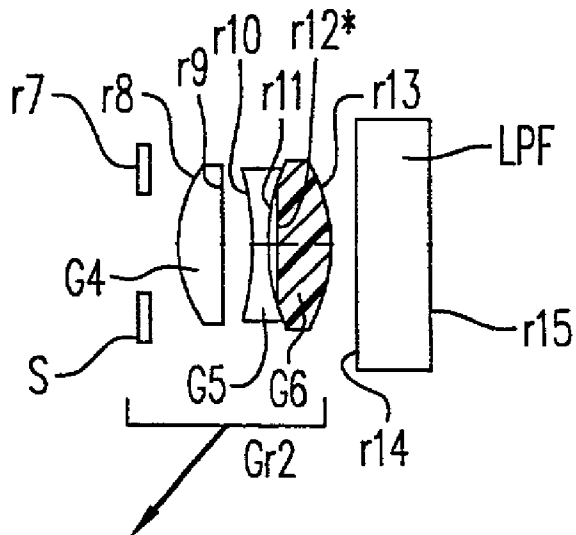
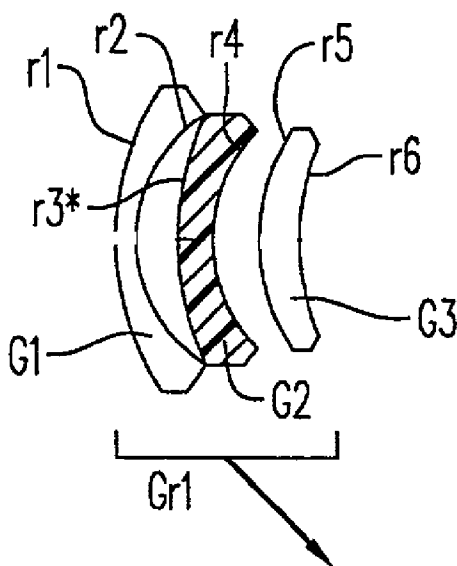


FIG. 1

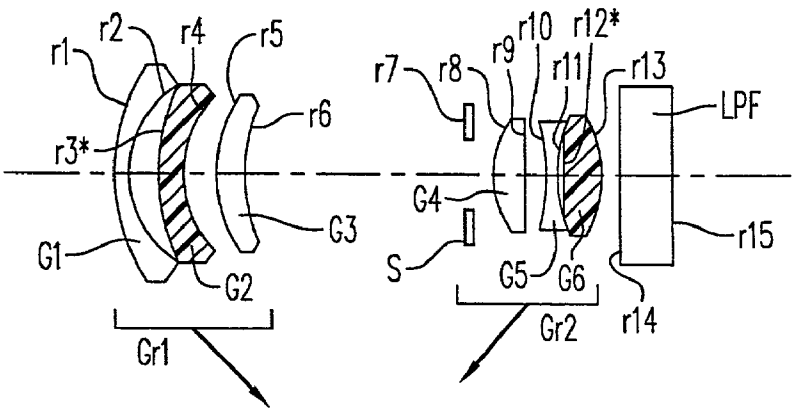


FIG. 2

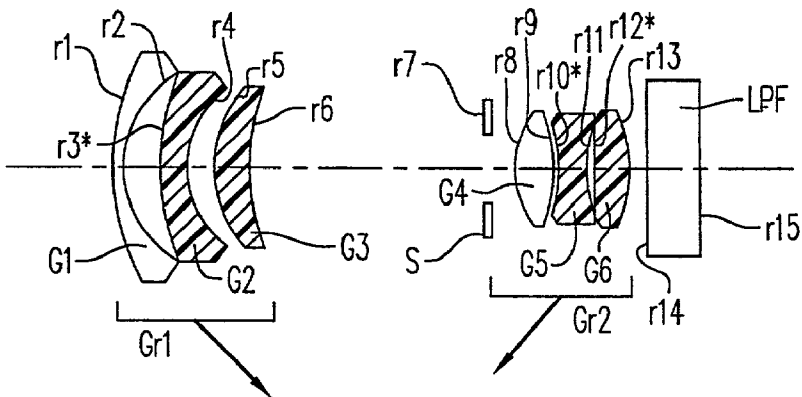
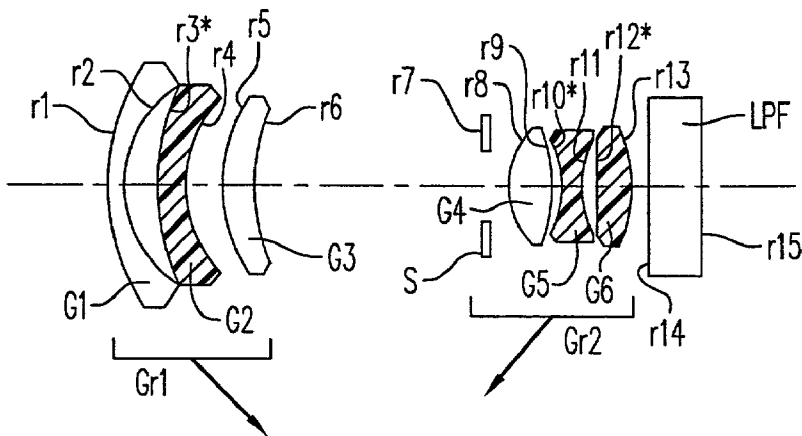
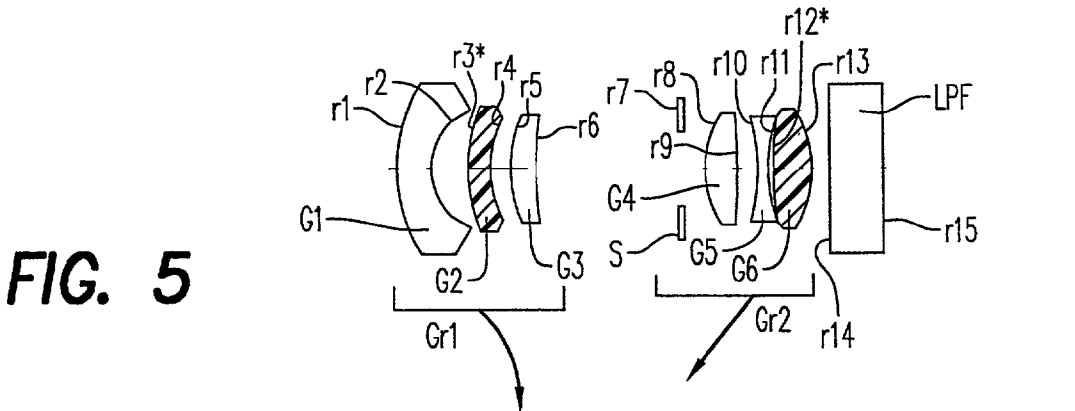
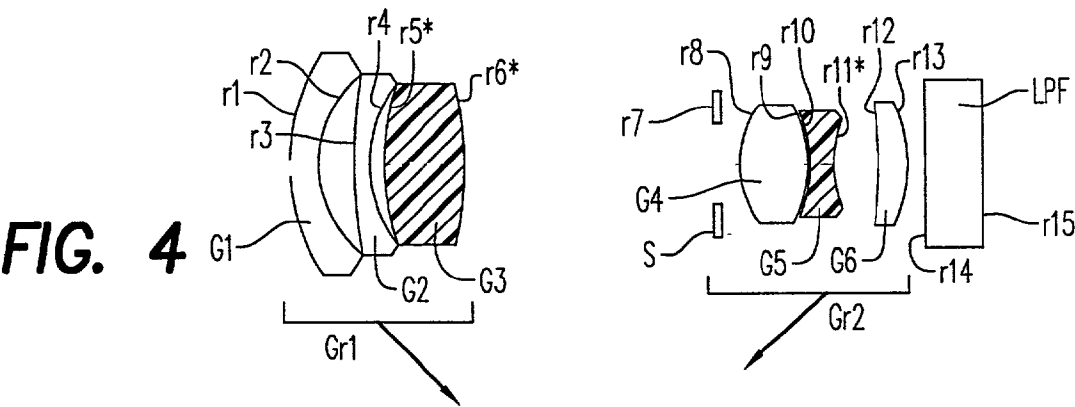
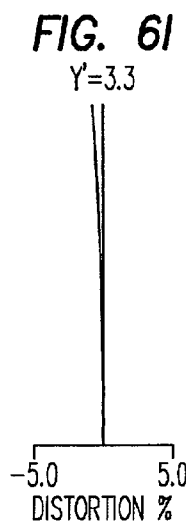
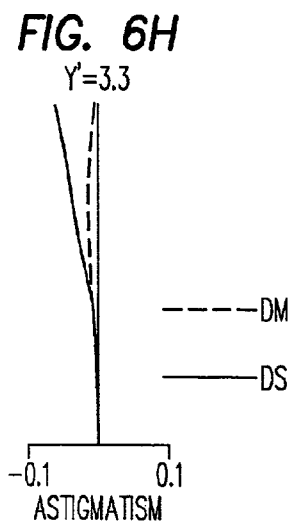
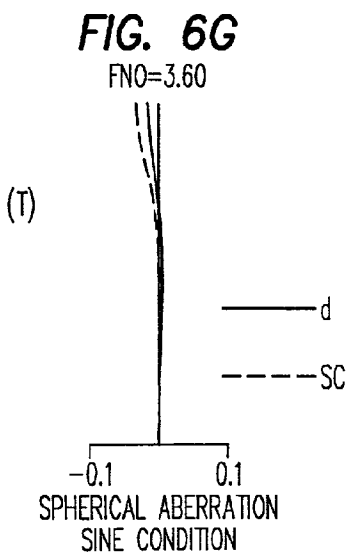
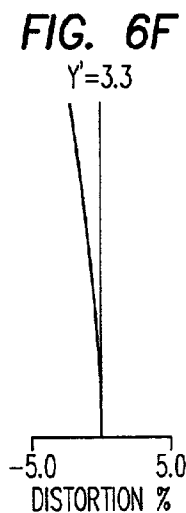
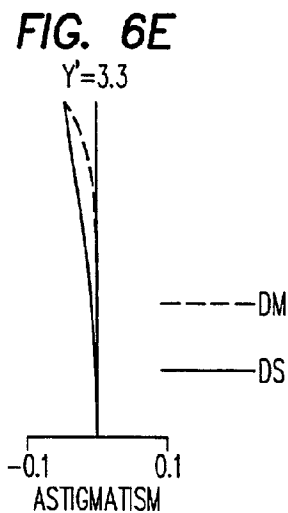
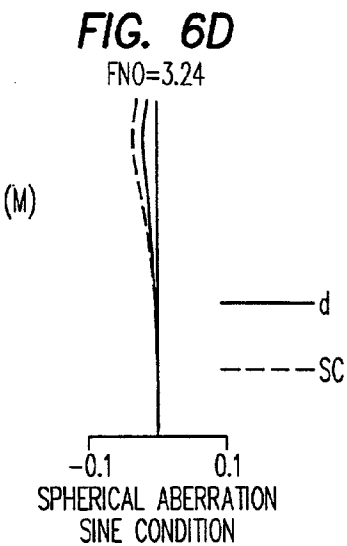
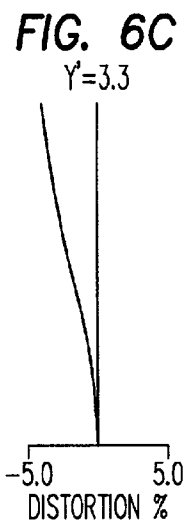
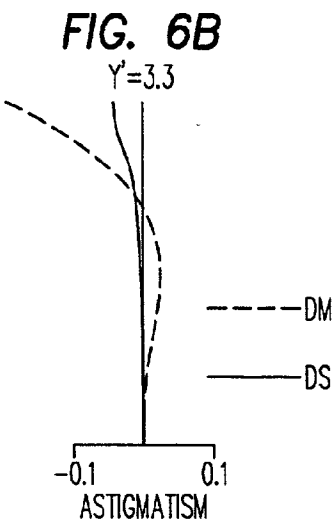
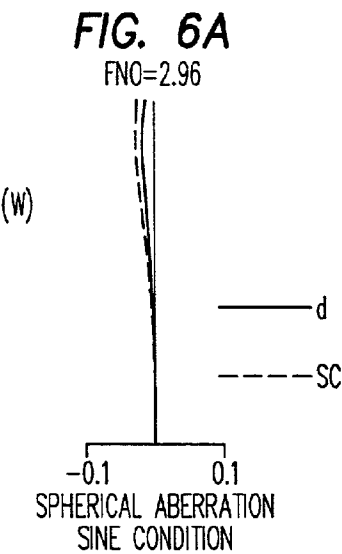
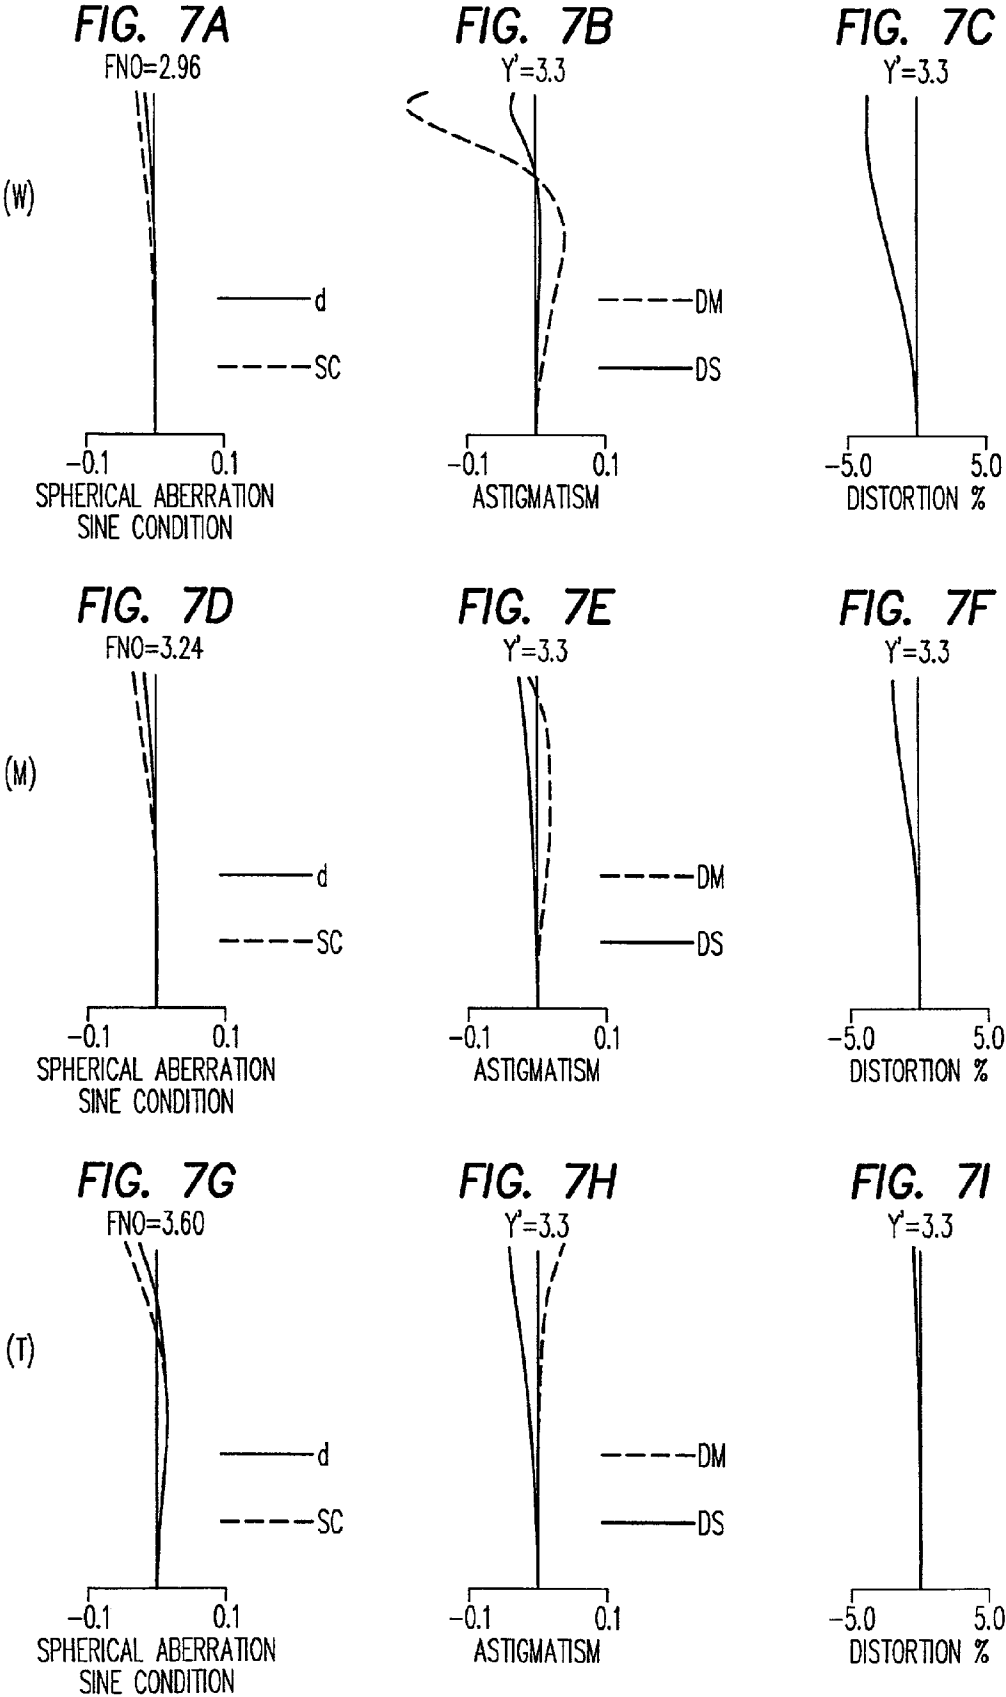










FIG. 3




























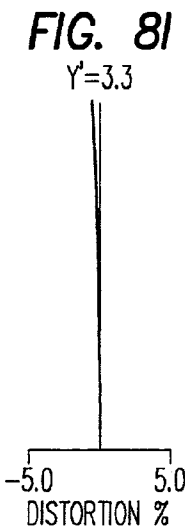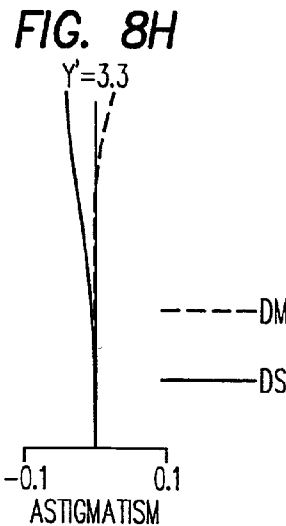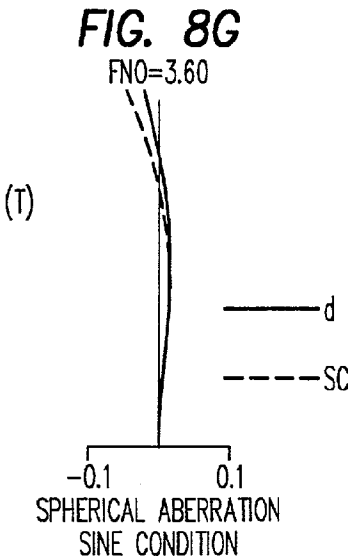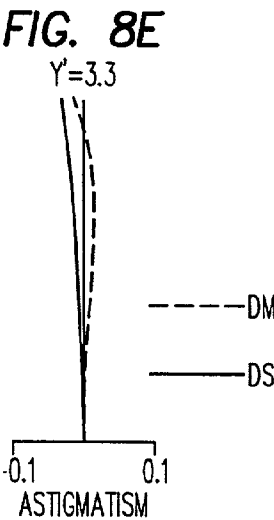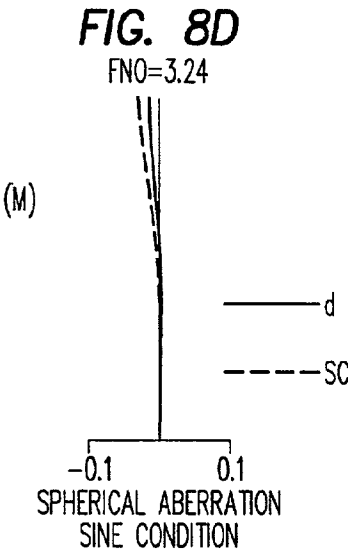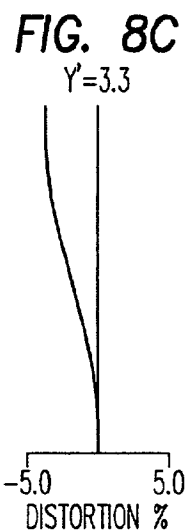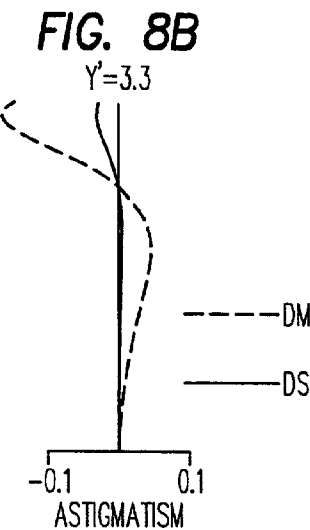
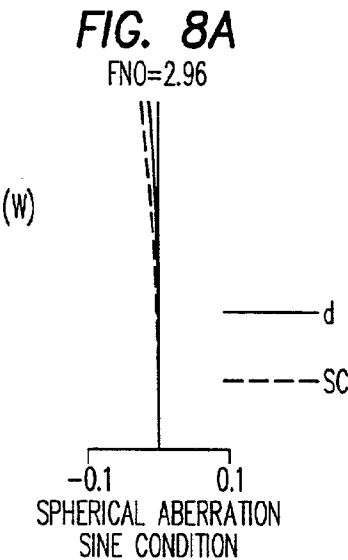


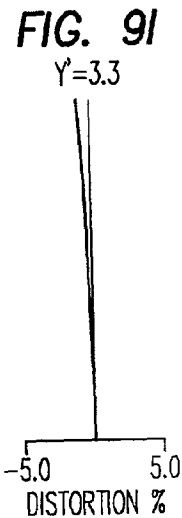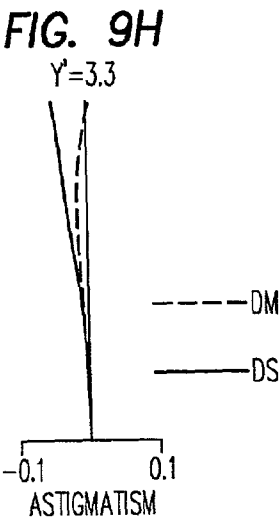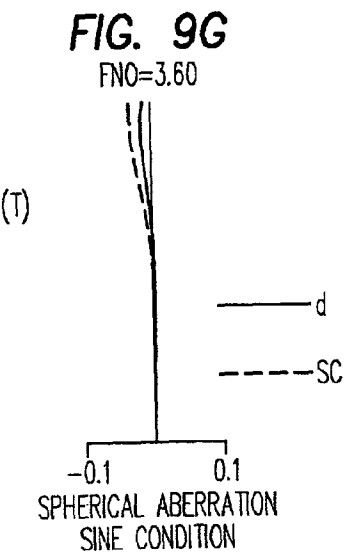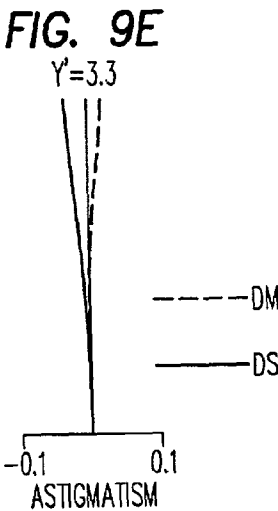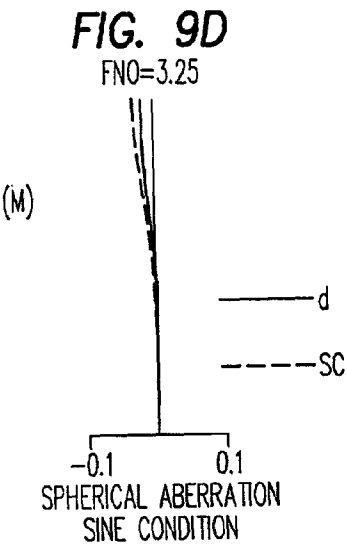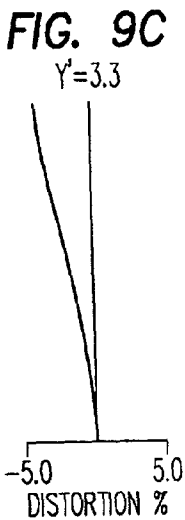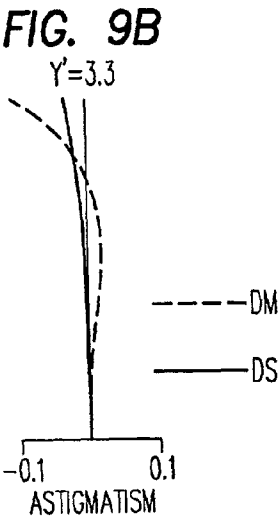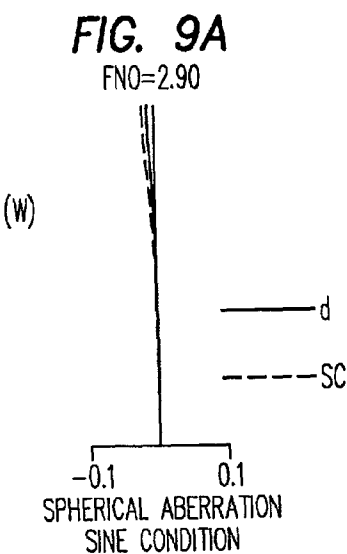

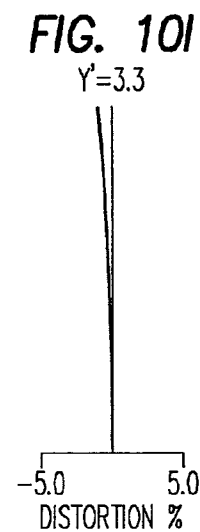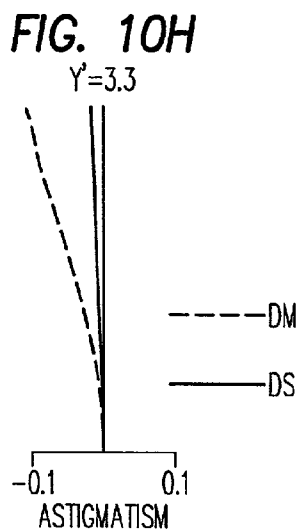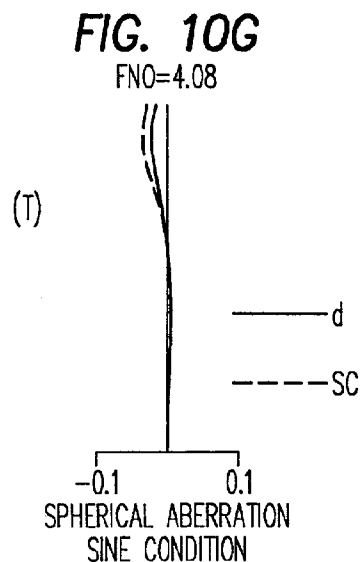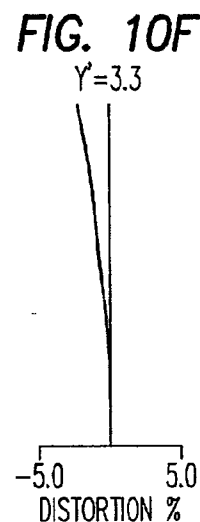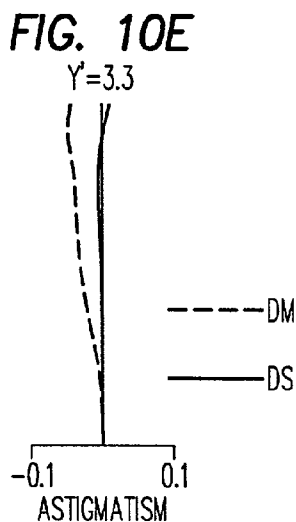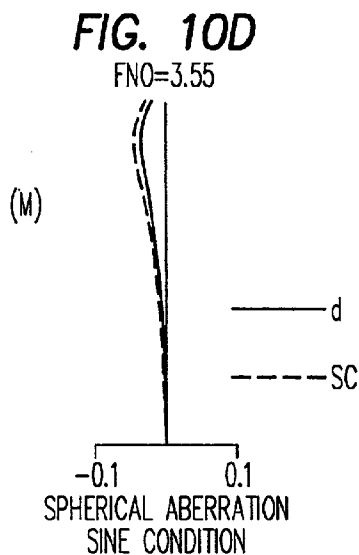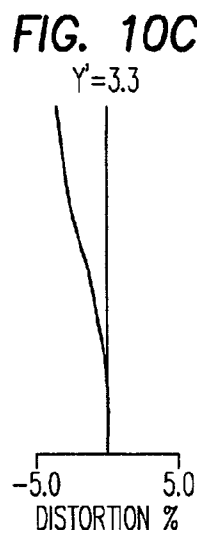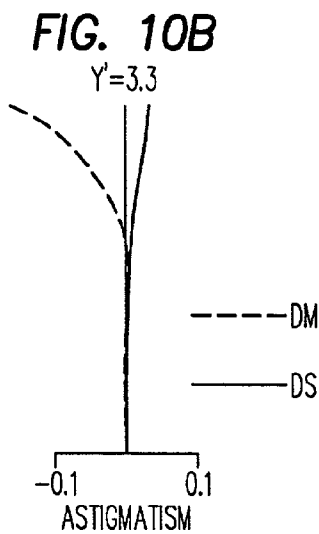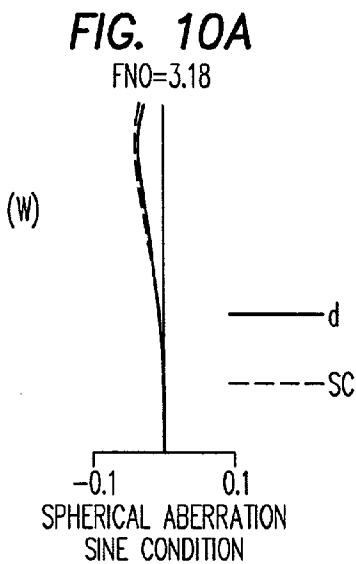



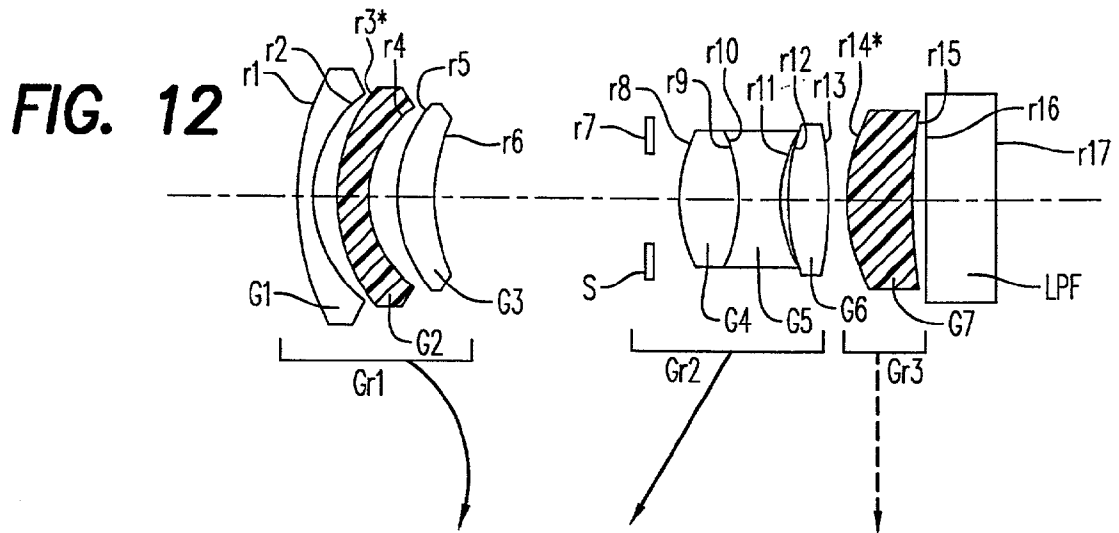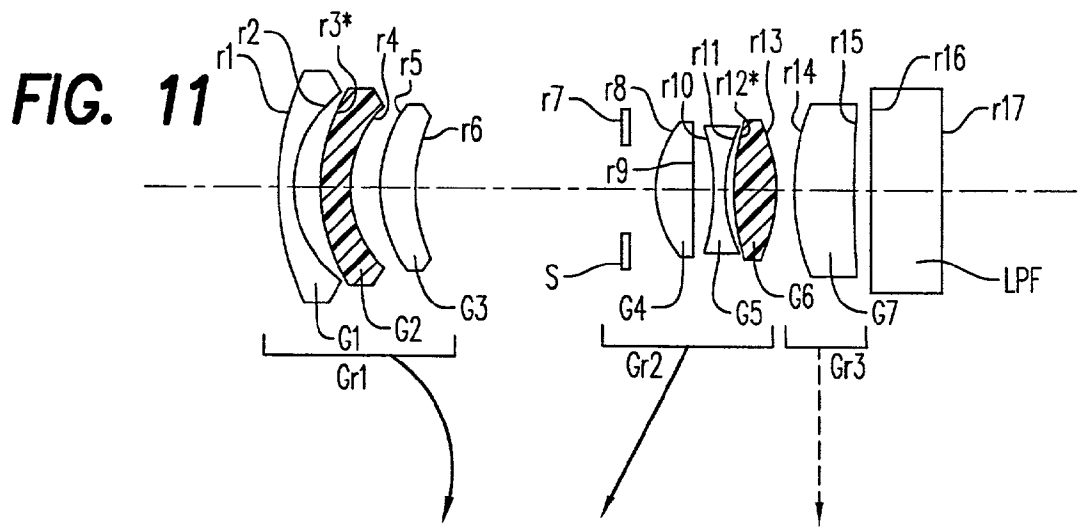

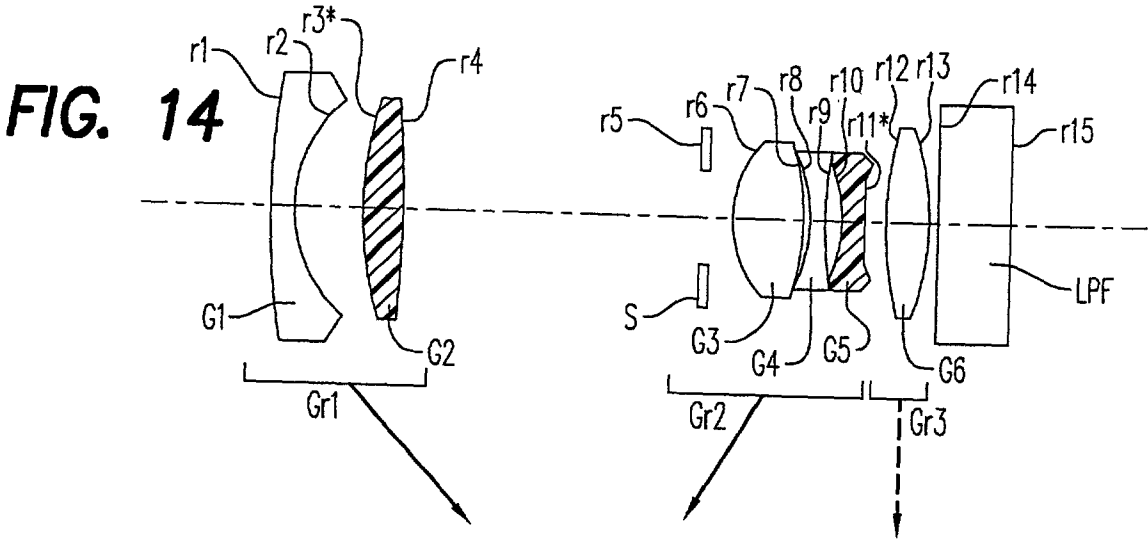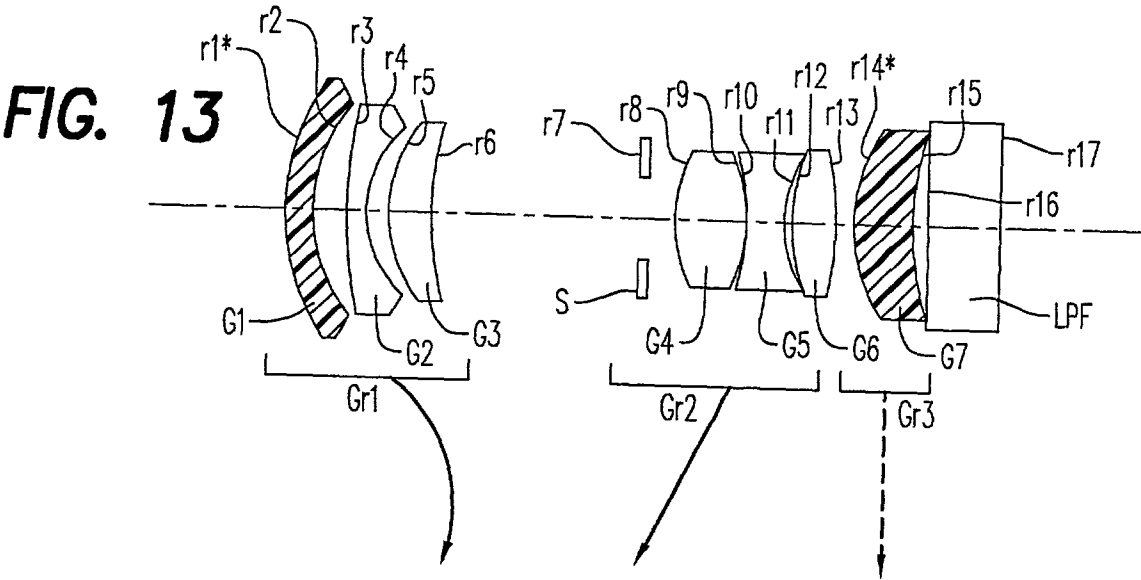

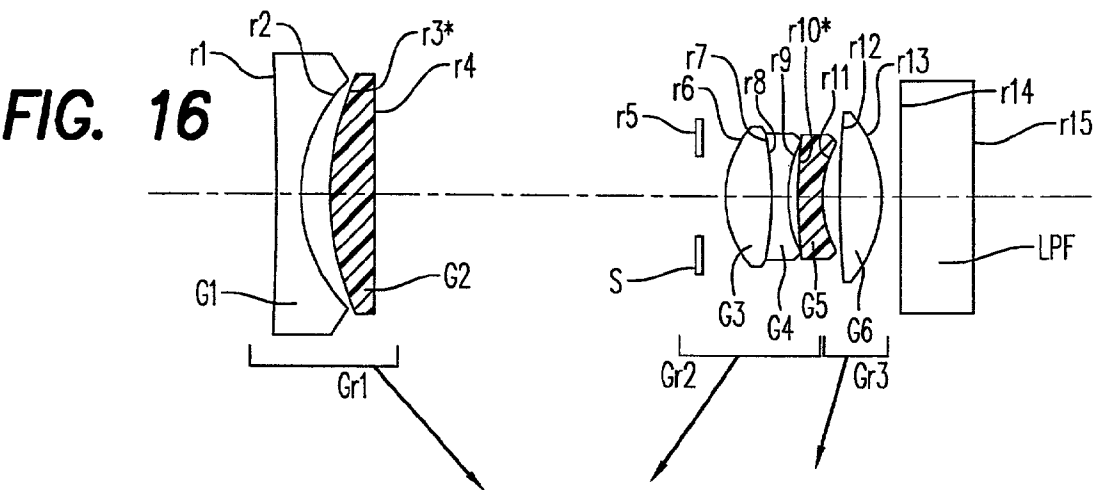
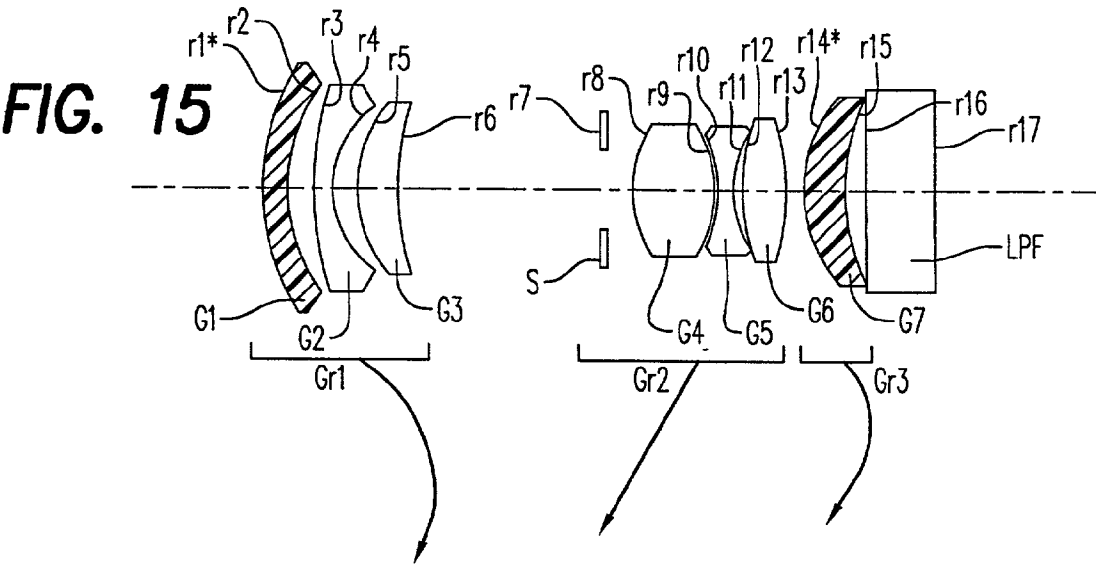


FIG. 17

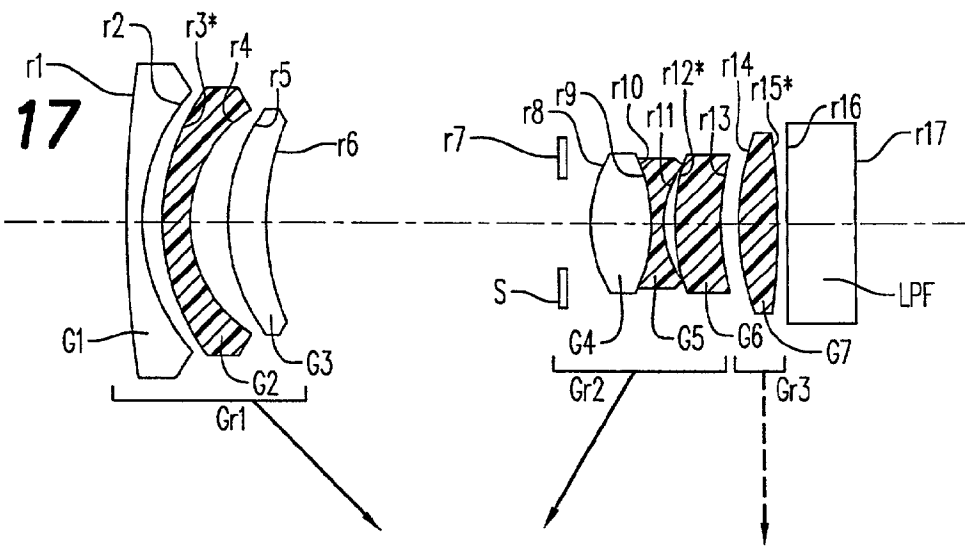
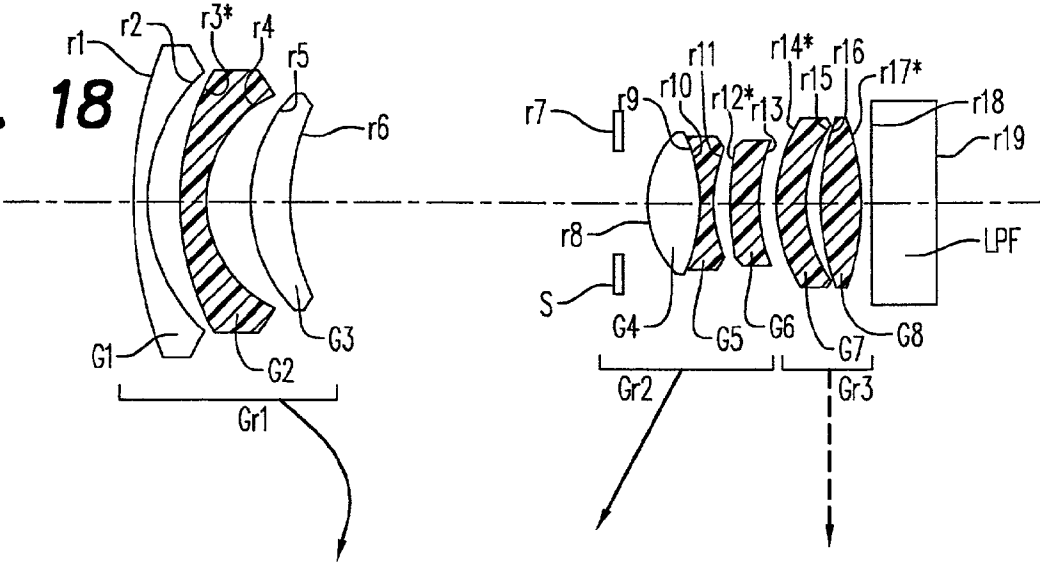
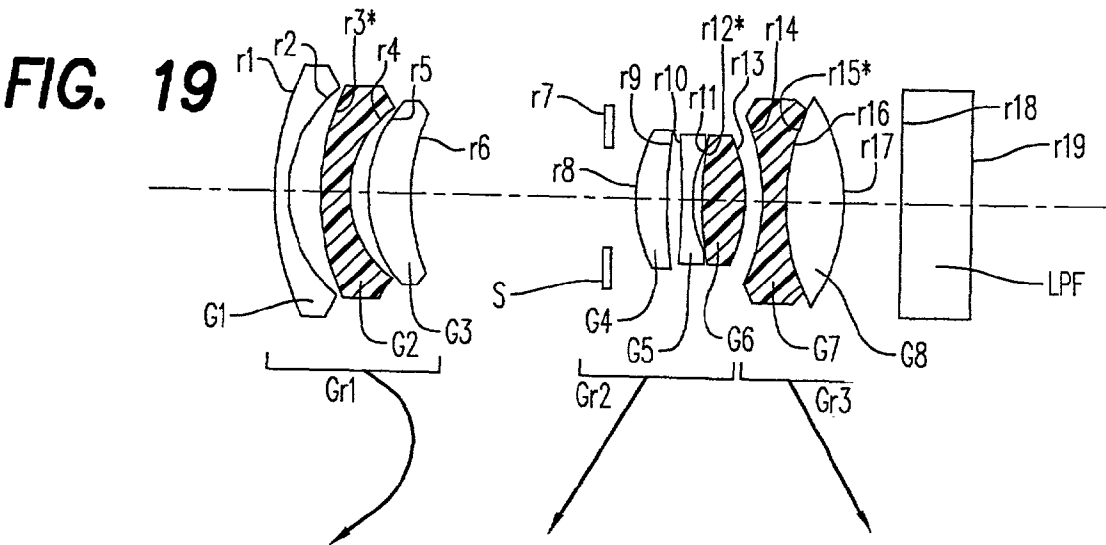
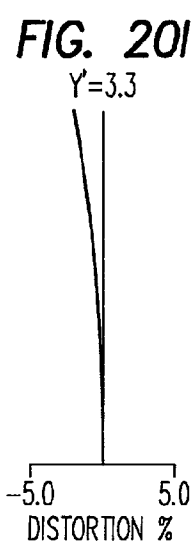
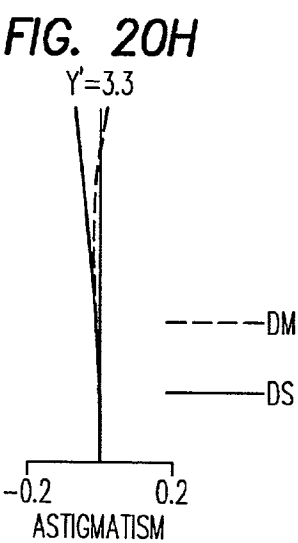
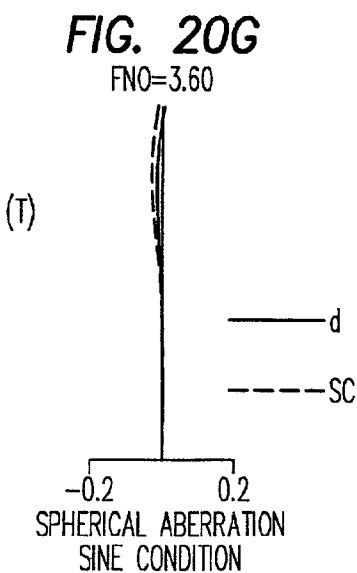
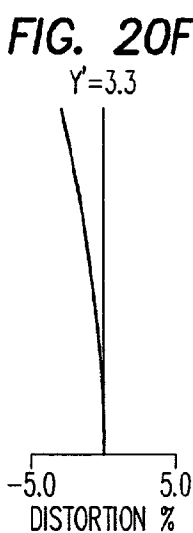
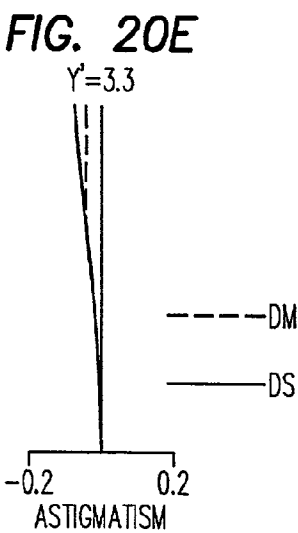
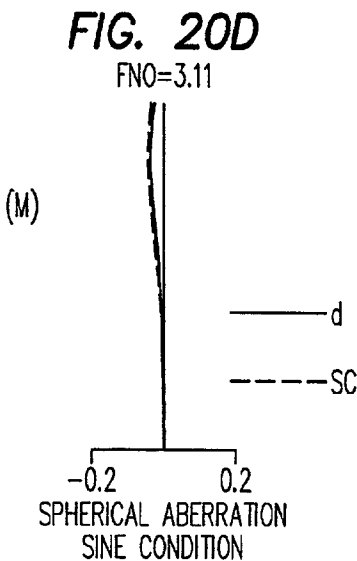
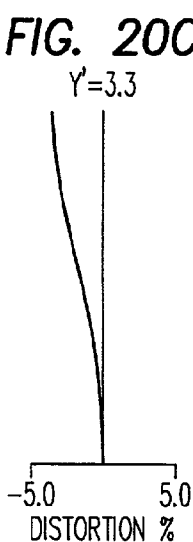
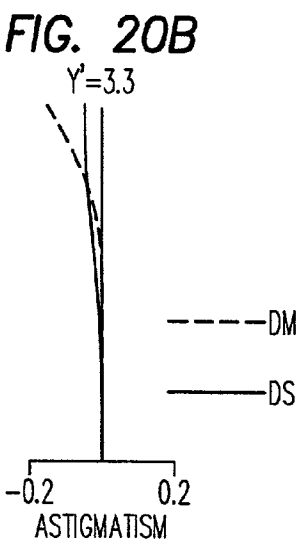
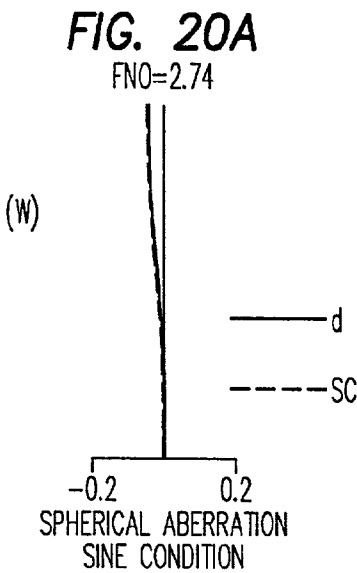
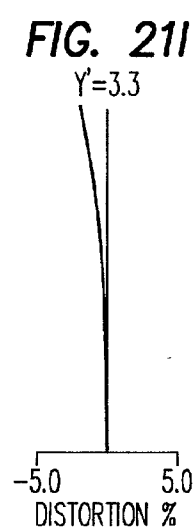
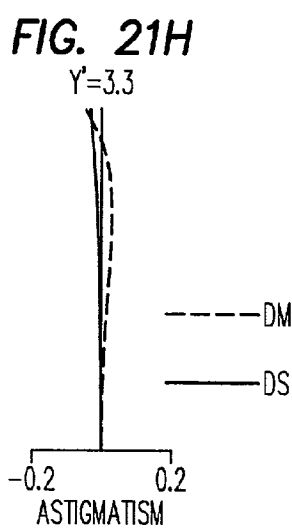
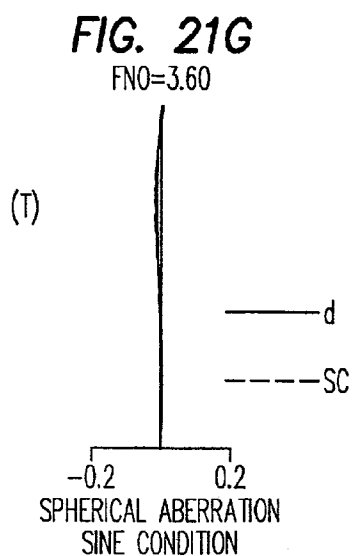
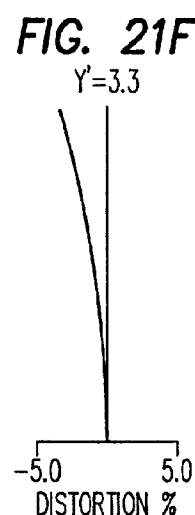
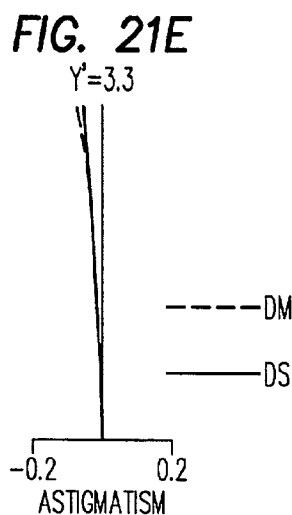
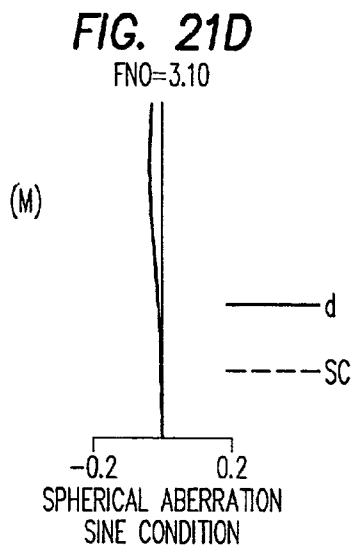
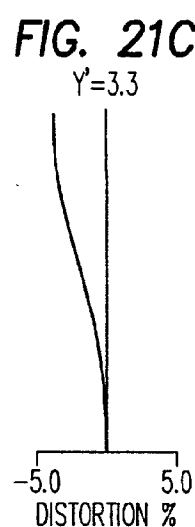
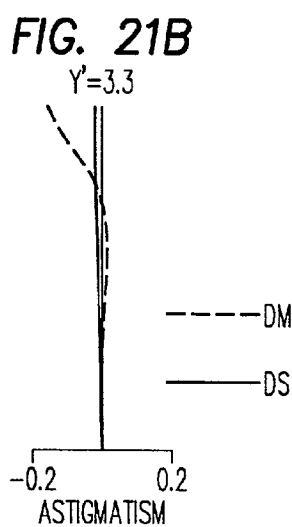
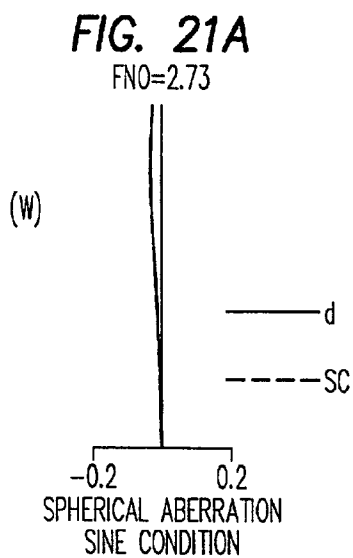











FIG. 18




































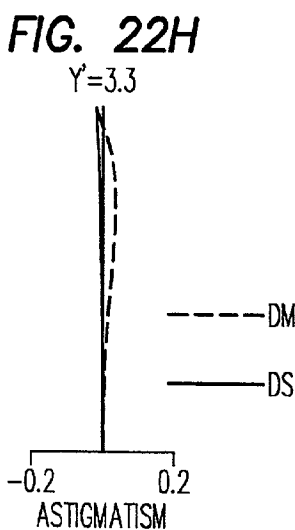
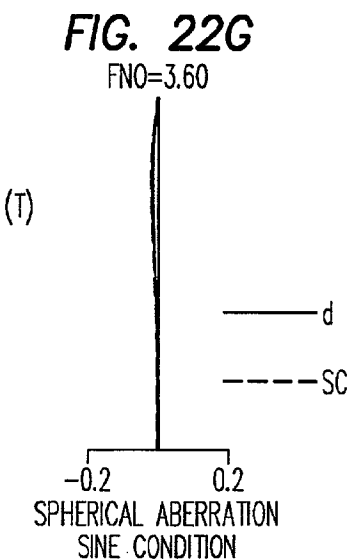
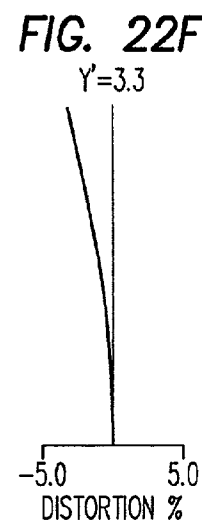
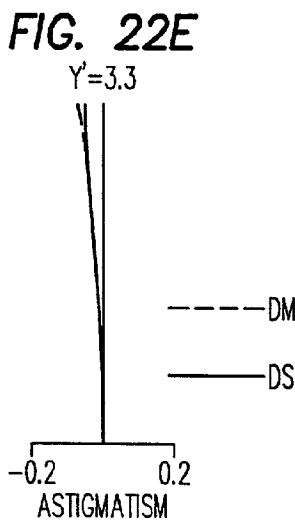
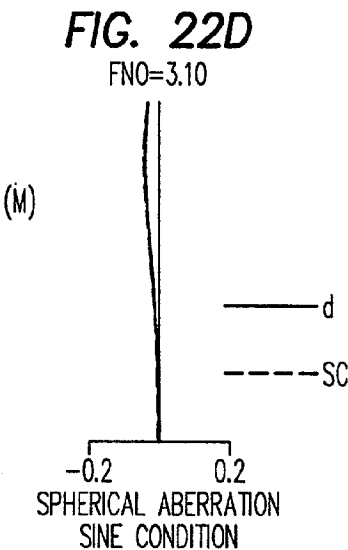

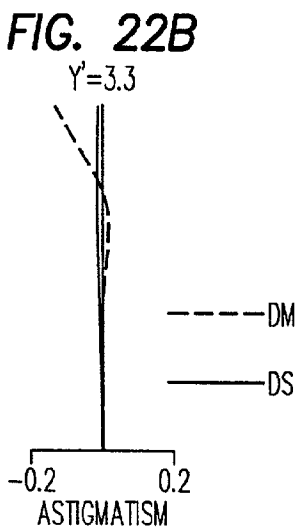
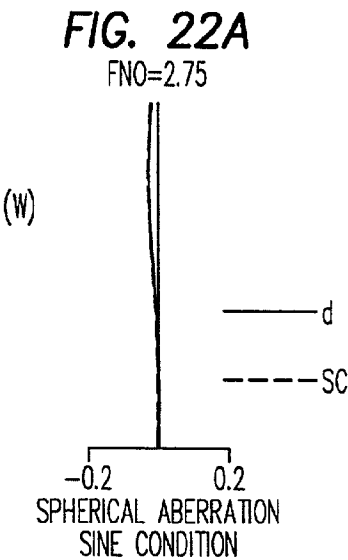














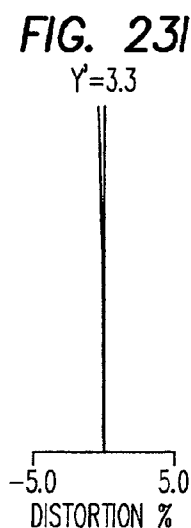
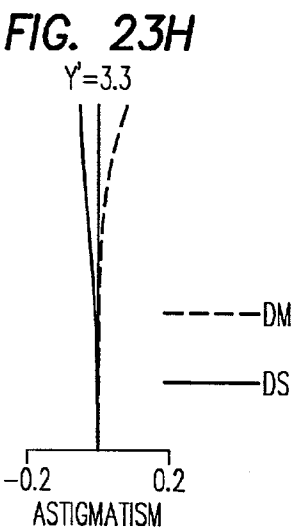
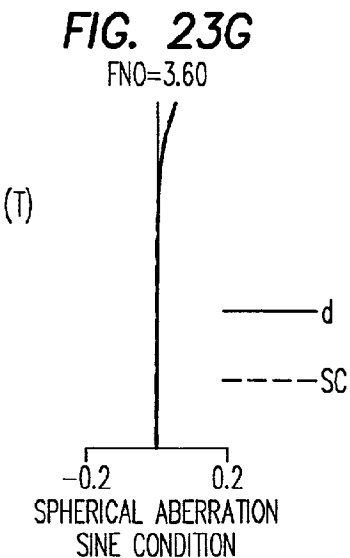
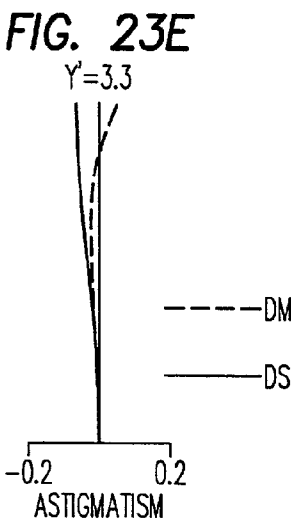
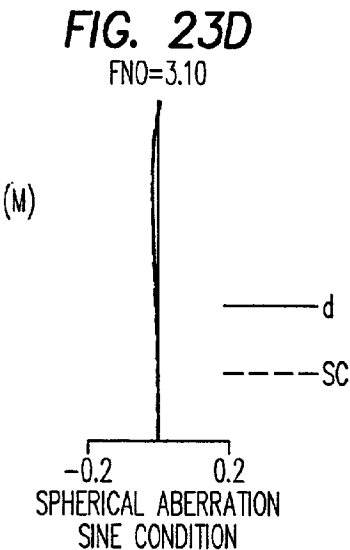
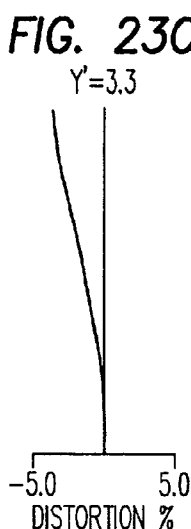
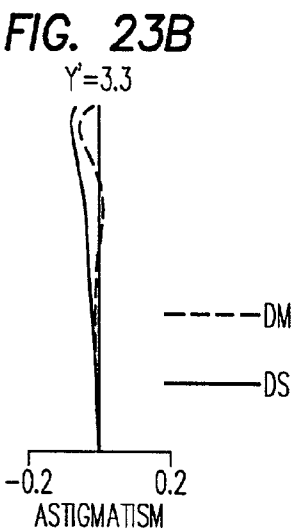
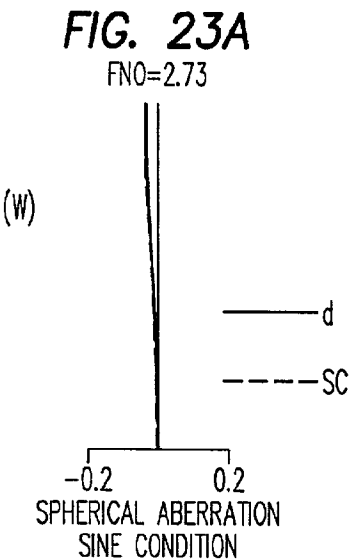


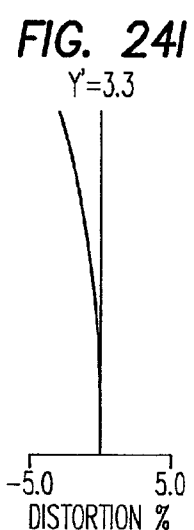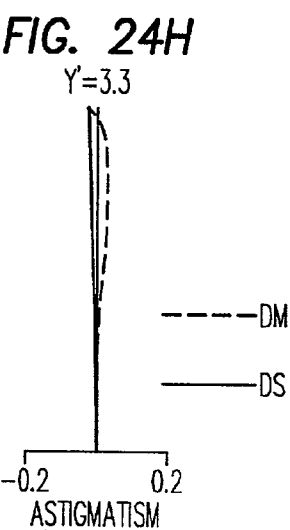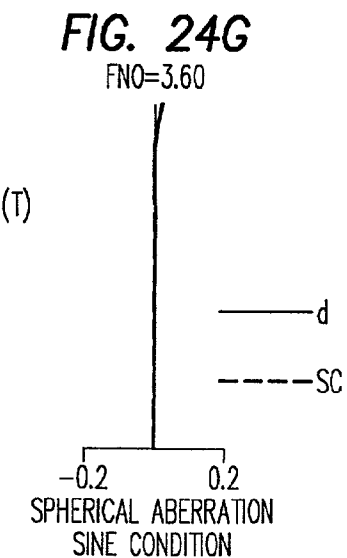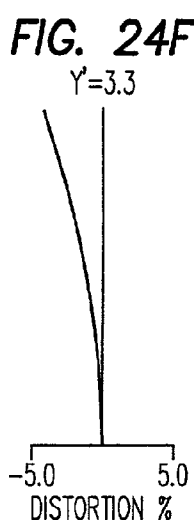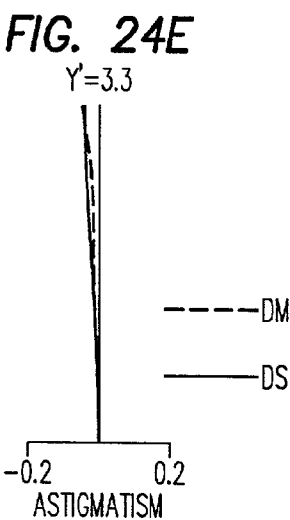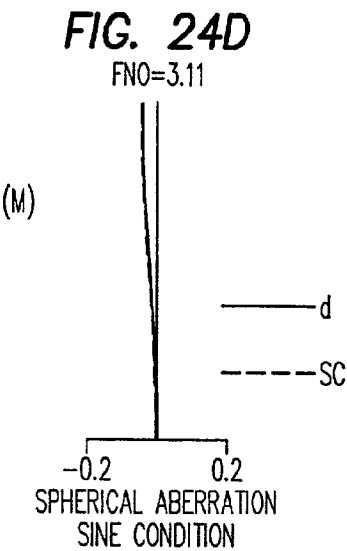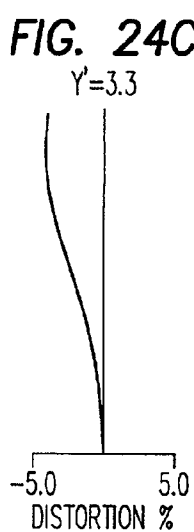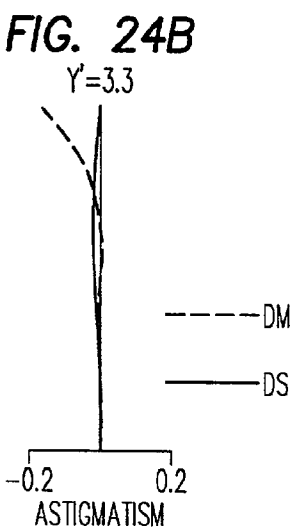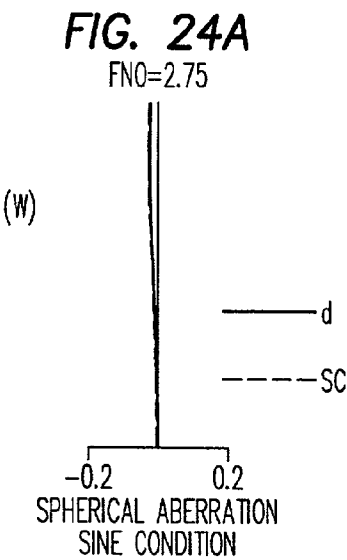

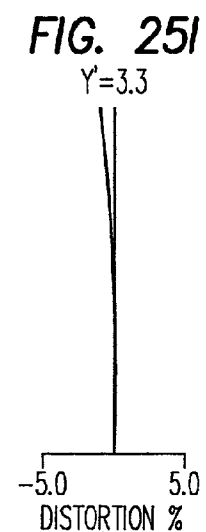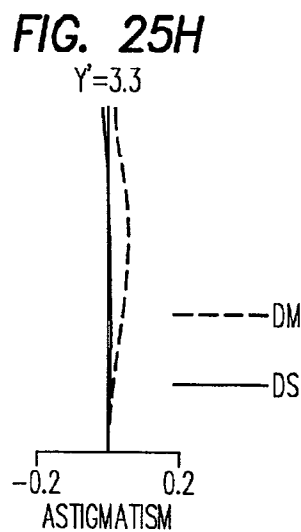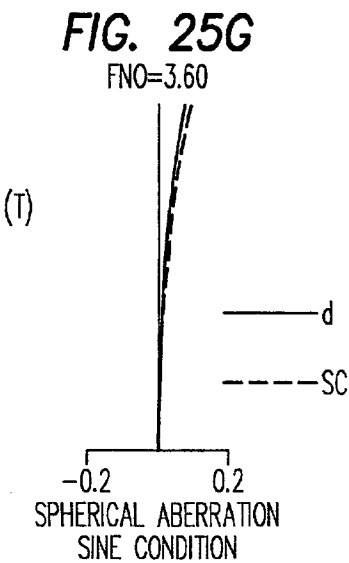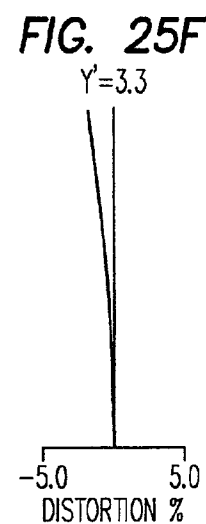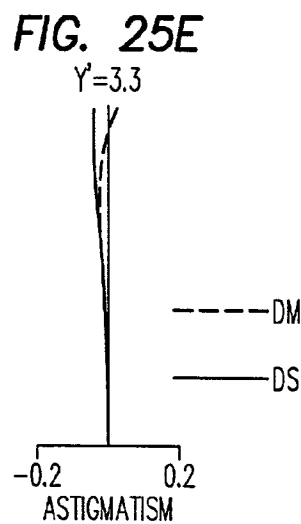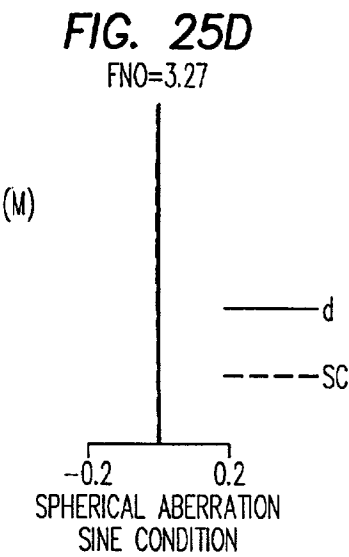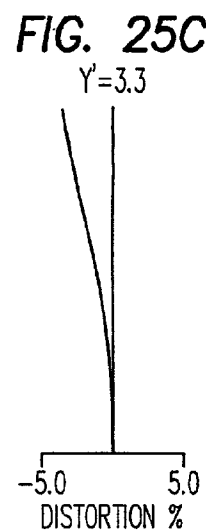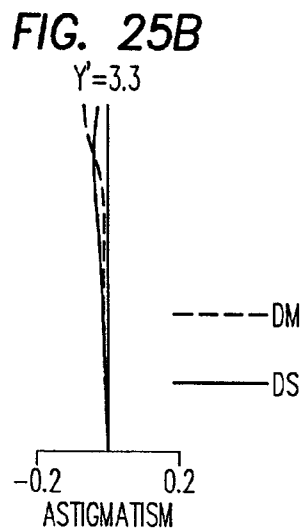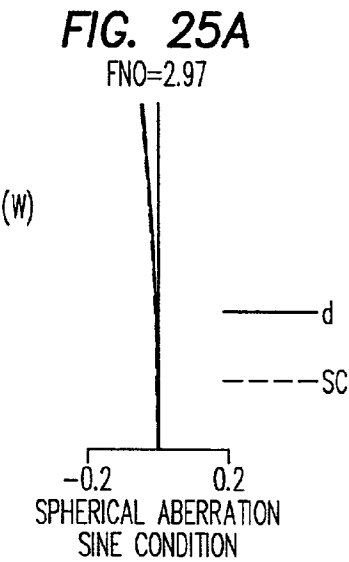

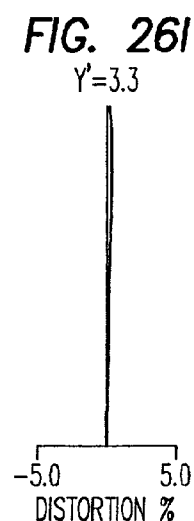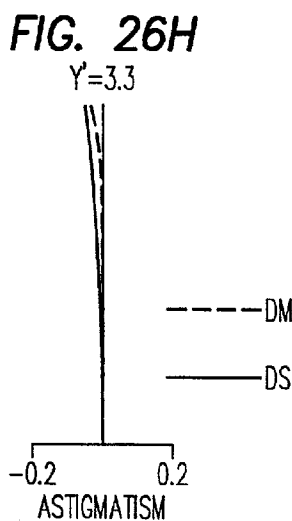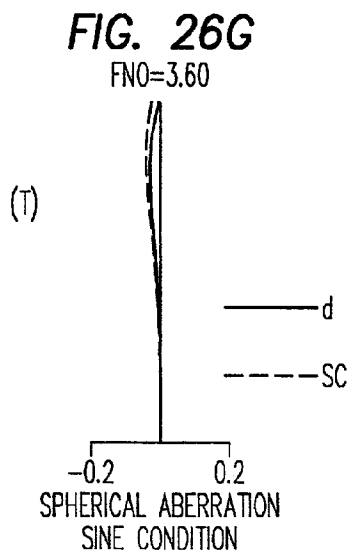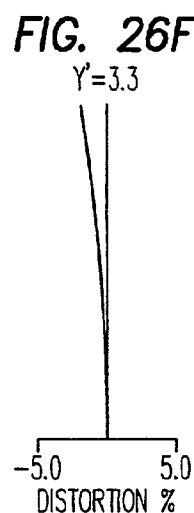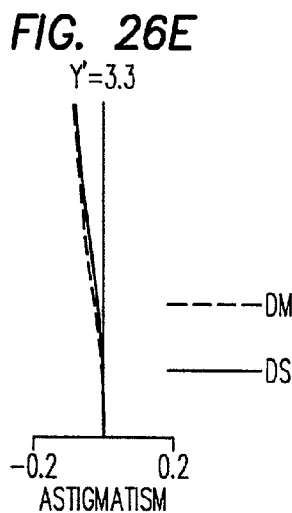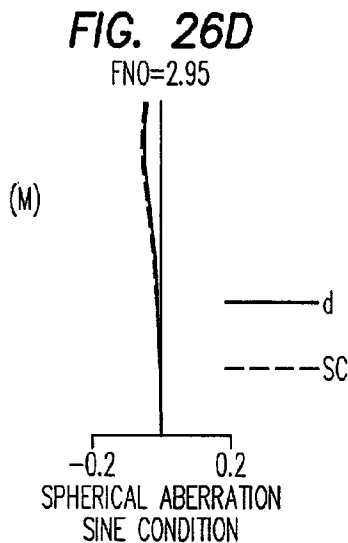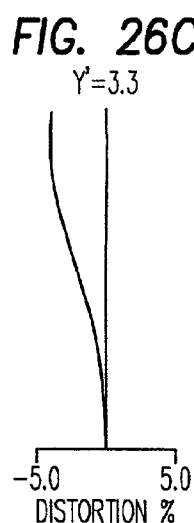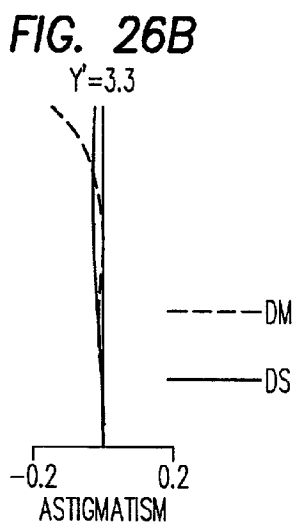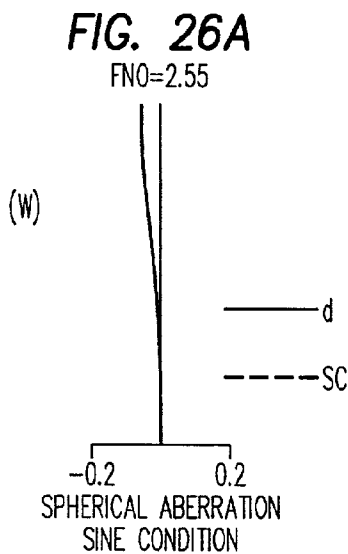

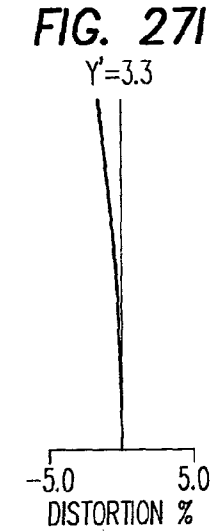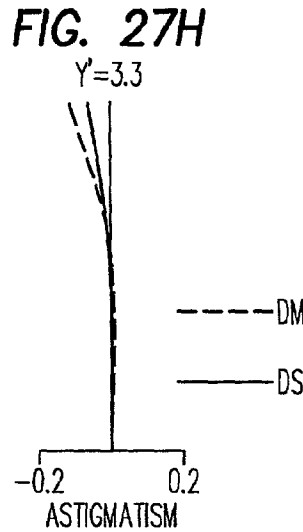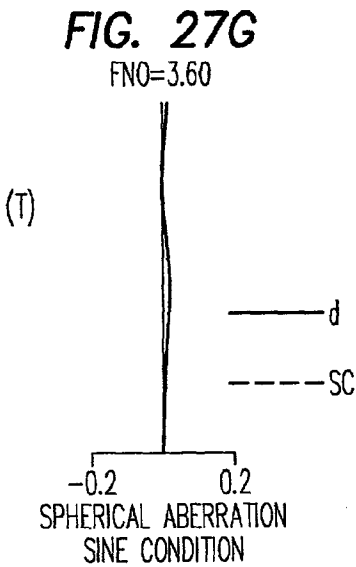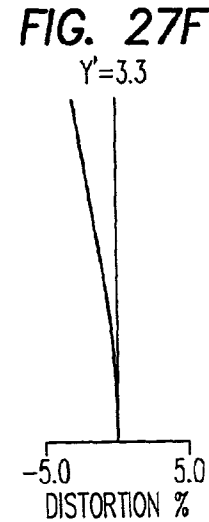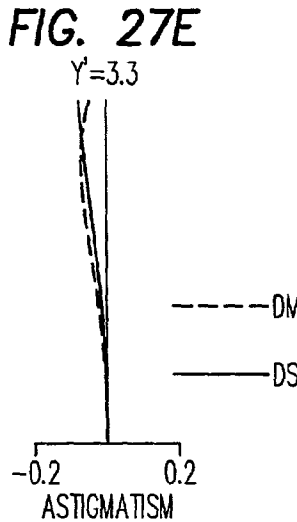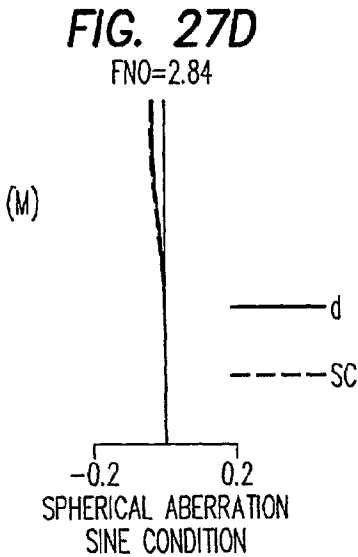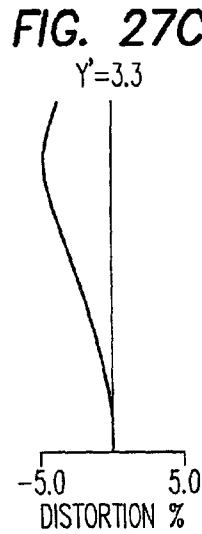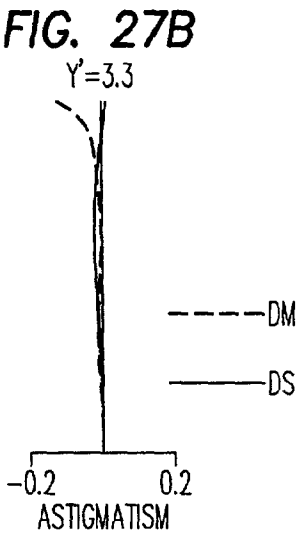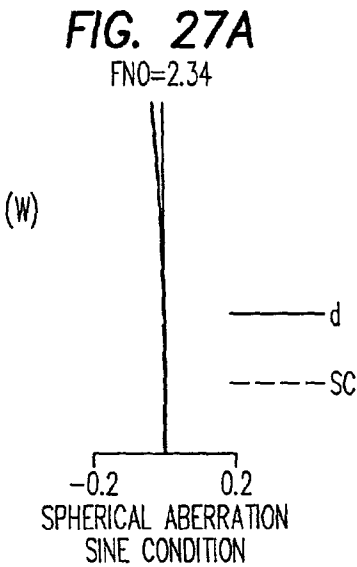

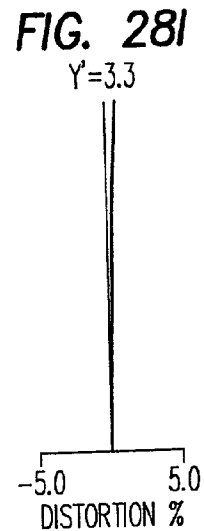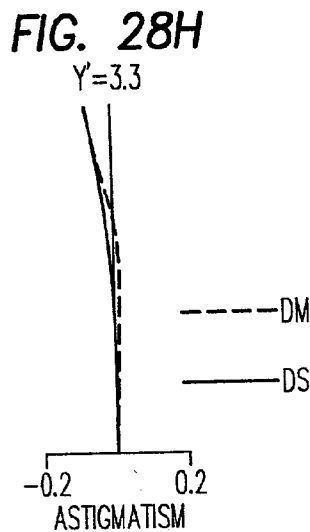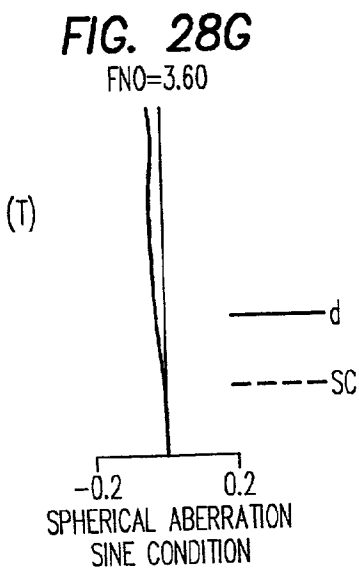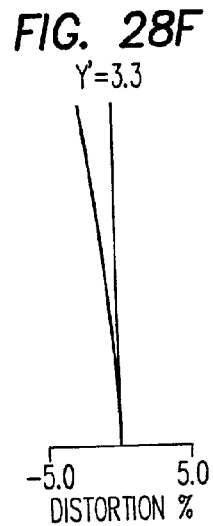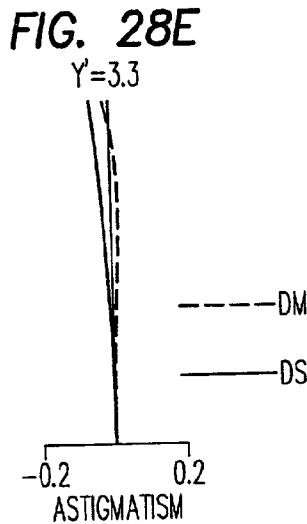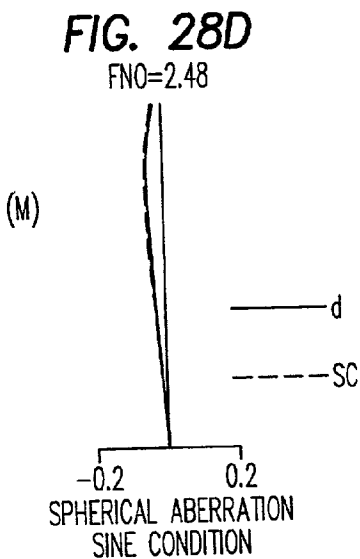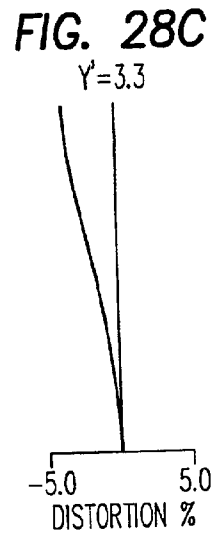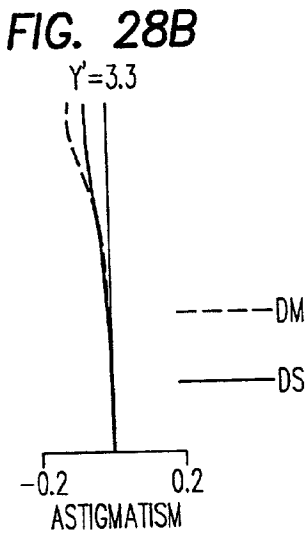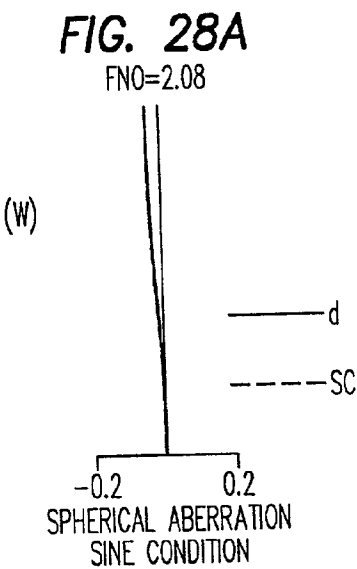

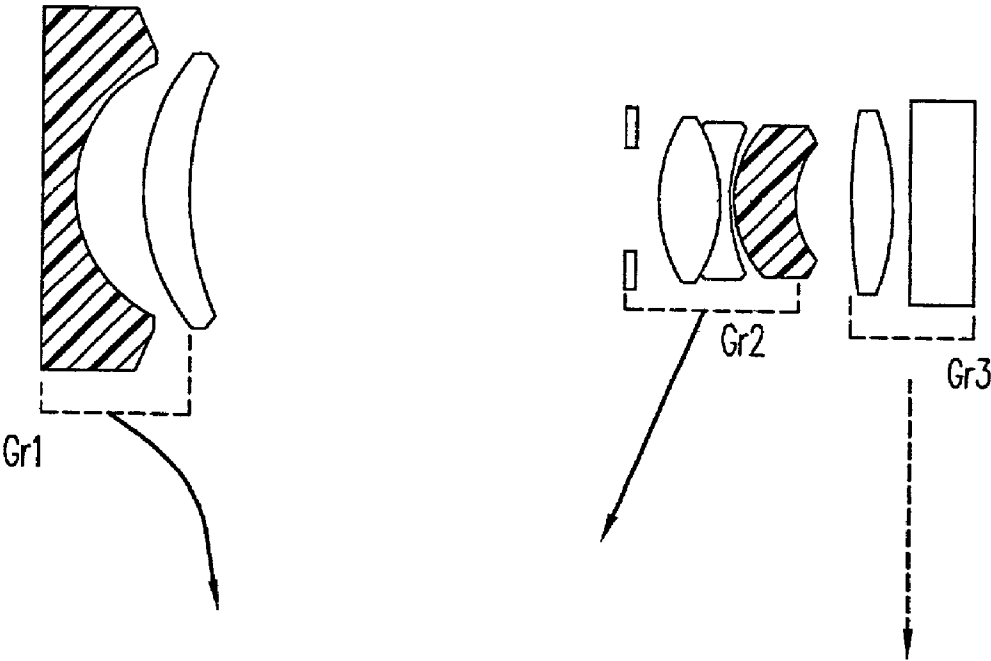


FIG. 29









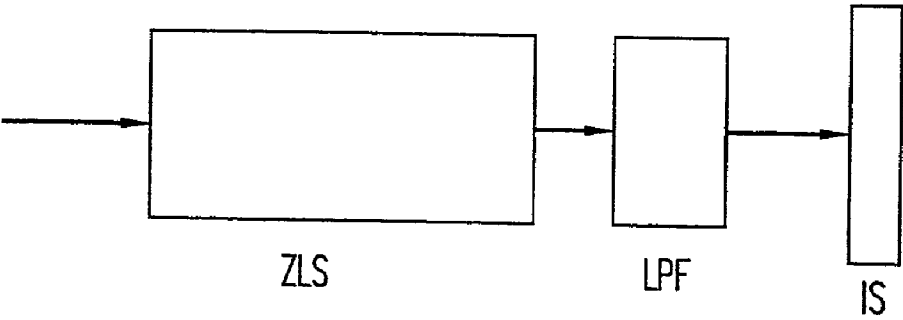


FIG. 31

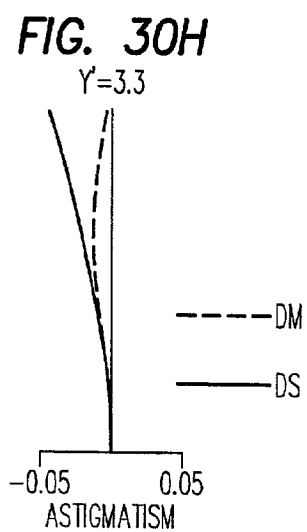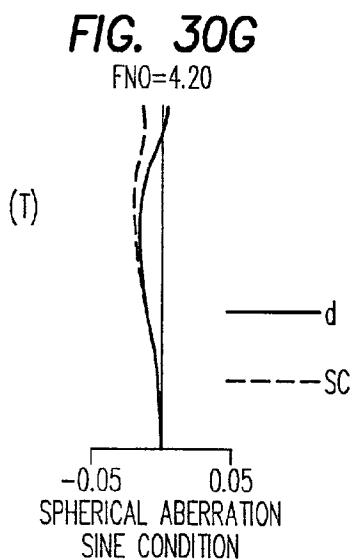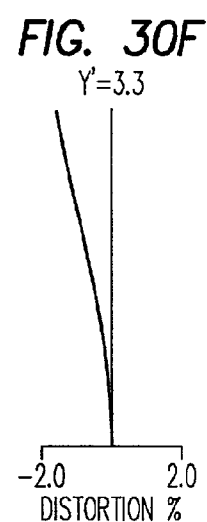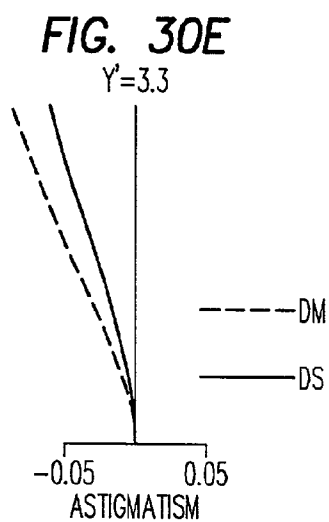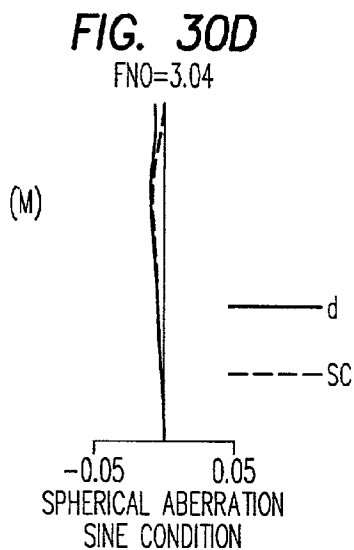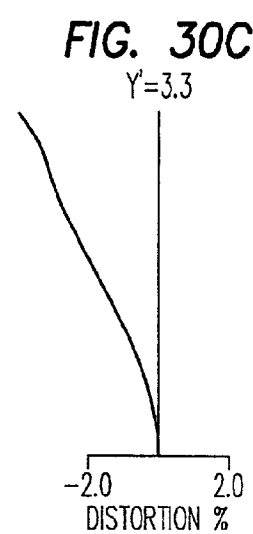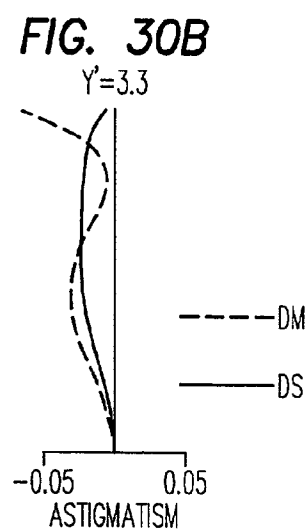

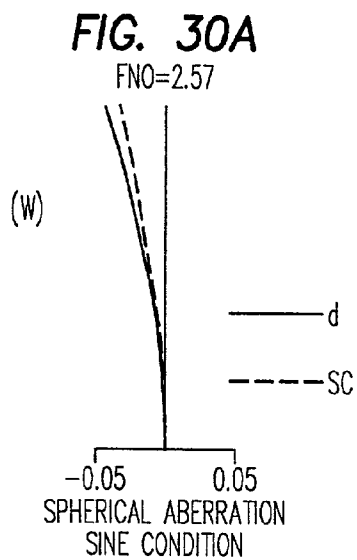

## ZOOM LENS SYSTEM

[0001] This disclosure is based on applications No. H10-363664 filed in Japan on Dec. 22, 1998 and No. H11-005056 filed in Japan on Jan. 12, 1999, the entire contents of which are hereby incorporated by reference.

## BACKGROUND OF THE INVENTION

## [0002] 1. Field of the Invention

[0003] The present invention relates to a zoom lens system, and more particularly to a compact and inexpensive zoom lens system particularly suited for use in digital still cameras.

## [0004] 2. Description of the Prior Art

[0005] In recent years, as personal computers become more prevalent, digital still cameras that allow easy storage of image data on a recording medium such as a floppy disk have been coming into wider use. This trend has created an increasing demand for more inexpensive digital still cameras. This in turn has created an increasing demand for further cost reduction in imaging optical systems. On the other hand, photoelectric conversion devices have come to have an increasingly large number of pixels year by year, which accordingly demands imaging optical systems that offer higher and higher performance. To comply with such requirements, it is necessary to produce a high-performance imaging optical system at comparatively low cost.

[0006] To achieve this objective, for example, Japanese Laid-open Patent Applications Nos. H1-183615 and H9-311273 propose optical systems having a first lens unit of a negative-negative-positive configuration and a second lens unit of a positive-negative-positive configuration. Moreover, the optical systems proposed in Japanese Laid-open Patent Applications Nos. H7-113956, H6-300969, and H7-63991 have a second lens unit including a doublet lens element formed by cementing together negative lens elements; and the optical system proposed in Japanese Laid-open Patent Application No. H5-93858 has a second lens unit including a doublet lens element formed by cementing together, from the object side, a positive lens element and a negative lens element. If a doublet lens element is considered to be a single lens element, it is assumed that those optical systems are each composed of a first lens unit of a negative-negative-positive configuration and a second lens unit of a positive-negative-positive configuration.

[0007] Furthermore, Japanese Laid-open Patent Applications Nos. H6-201993 and H1-191820 propose optical systems that are composed of a first lens unit having a negative optical power, a second lens unit having a positive optical power, and a third lens unit having a positive optical power and employ a plastic lens element.

[0008] In the optical systems proposed in the above-mentioned patent applications, however, there is still plenty of room for improvement from the viewpoint of miniaturization, high performance, and cost reduction.

## SUMMARY OF THE INVENTION

[0009] An object of the present invention is to provide a compact, high-resolution, and low-cost zoom lens system suitable, in particular, for use in a digital still camera by arranging plastic lens elements effectively in a two-unit zoom lens system of a negative-positive configuration.

[0010] To achieve the above object, according to one aspect of the present invention, a zoom lens system includes, from the object side, a first lens unit and a second lens unit. The first lens unit is composed of a negative, a negative, and a positive lens element and has a negative optical power as a whole. The second lens unit is composed of a positive, a negative, and a positive lens element and has a positive optical power as a whole. In the zoom lens system, zooming is achieved by varying the distance between the first and second lens units, and at least one of those lens elements is a plastic lens element.

[0011] According to another aspect of the present invention, a zoom lens system includes, from the object side, a first lens unit having a negative optical power and a second lens unit having a positive optical power. In the zoom lens system, zooming is achieved by varying the distance between the first and second lens units, and at least a negative lens element and a positive lens element of the lens elements included in the lens units are plastic lens elements that fulfill the following condition:

$$-1.2 < \phi P_i / \phi W \times h_i < 1.2$$

[0012] where

[0013]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0014]  $\phi P_i$  represents the optical power of the  $i$ th plastic lens element; and

[0015]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha_1$  and the height  $h_1$ , for paraxial tracing, are 0 and 1, respectively.

[0016] According to another aspect of the present invention, an image taking apparatus is composed of a zoom lens system, a photoelectric conversion device, and an optical low-pass filter. The photoelectric conversion device has a light sensing surface on which an image is formed by the zoom lens system. The optical low-pass filter is disposed on the object side of the photoelectric conversion device. The zoom lens system is composed of, from the object side, a first lens unit and a second lens unit. The first lens unit is composed of a negative, a negative, and a positive lens element, and has a negative optical power as a whole. The second lens unit is composed of a positive, a negative, and a positive lens element, and has a positive optical power as a whole. In the zoom lens system, zooming is achieved by varying the distance between the first and second lens units, and at least one of those lens elements is a plastic lens element.

[0017] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second

lens unit is composed of at least a positive and a negative lens element, and has a positive optical power. The third lens unit has a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the lens units is a plastic lens element that fulfills the following conditions:

$$-0.8 < C_p \times (N' - N) / \phi W < 0.8$$

$$-0.45 < M3/M2 < 0.90 \text{ (where } \phi T / \phi W > 1.6 \text{)}$$

[0018] where

[0019]  $C_p$  represents the curvature of the plastic lens element;

[0020]  $HW$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0021]  $N'$  represents the refractive index of the object-side medium of the aspherical surface for the d line;

[0022]  $N$  represents the refractive index of the image-side medium of the aspherical surface for the d line;

[0023]  $M3$  represents the amount of movement of the third lens unit (the direction pointing to the object side is negative with respect to the wide-angle end);

[0024]  $M2$  represents the amount of movement of the second lens unit (the direction pointing to the object side is negative with respect to the wide-angle end); and

[0025]  $\phi T$  represents the optical power of the entire zoom lens system at the telephoto end.

[0026] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit is composed of at least a positive and a negative lens element, and has a negative optical power. The second and third lens units have a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the first lens unit is a plastic lens element that fulfills the following conditions:

$$|\phi P / \phi 1| < 1.20$$

$$0.20 < |\phi 1 / \phi W| < 0.70$$

$$-0.45 < M3/M2 < 0.90 \text{ (where } \phi T / \phi W > 1.6 \text{)}$$

[0027] where

[0028]  $\phi P$  represents the optical power of the plastic lens element;

[0029]  $\phi 1$  represents the optical power of the first lens unit;

[0030]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0031]  $M3$  represents the amount of movement of the third lens unit (the direction pointing to the object side is negative with respect to the wide-angle end);

[0032]  $M2$  represents the amount of movement of the second lens unit (the direction pointing to the object side is negative with respect to the wide-angle end); and

[0033]  $\phi T$  represents the optical power of the entire zoom lens system at the telephoto end.

[0034] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second lens unit is composed of at least a positive and a negative lens element, and has a positive optical power. The third lens unit has a positive optical power. In the zoom lens system, zooming is achieved by varying the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the second lens unit is a plastic lens element that fulfills the following conditions:

$$|\phi P / \phi 2| < 2.5$$

$$0.25 < \phi 2 / \phi W < 0.75$$

[0035] where

[0036]  $\phi P$  represents the optical power of the plastic lens element;

[0037]  $\phi 2$  represents the optical power of the second lens unit; and

[0038]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end.

[0039] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second and third lens units have a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the third lens unit is a plastic lens element that fulfills the following conditions:

$$-0.30 < M3/M2 < 0.90$$

$$|\phi P / \phi 3| < 1.70$$

$$0.1 < \phi 3 / \phi W < 0.60$$

[0040] where

[0041]  $M3$  represents the amount of movement of the third lens unit (the direction pointing to the object side is negative with respect to the wide-angle end);

[0042]  $M2$  represents the amount of movement of the second lens unit (the direction pointing to the object side is negative with respect to the wide-angle end);

[0043]  $\phi P$  represents the optical power of the plastic lens element;

[0044]  $\phi 3$  represents the optical power of the third lens unit; and

[0045]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end.

[0046] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second and third lens units have a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the second lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / W \times h_i < 1.4$$

$$0.5 < \log(\beta 2T / \beta 2W) / \log Z < 2.2$$

[0047] where

[0048]  $\phi P_i$  represents the optical power of the  $i$ th plastic lens element;

[0049]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0050]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha 1$  and the height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

[0051]  $\beta 2W$  represents the lateral magnification of the second lens unit at the wide-angle end;

[0052]  $\beta 2T$  represents the lateral magnification of the second lens unit at the telephoto end;

[0053]  $Z$  represents the zoom ratio; and

[0054]  $\log$  represents a natural logarithm (since the condition defines a proportion, the base does not matter).

[0055] According to another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second lens unit is composed of at least a positive and a negative lens element, and has a positive optical power. The third lens unit has a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the third lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4$$

$$-1.2 < \log(\beta 3T / \beta 3W) / \log Z < 0.5$$

[0056] where

[0057]  $\phi P_i$  represents the optical power of the  $i$ th plastic lens element;

[0058]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0059]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha 1$  and the height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

[0060]  $\beta 3W$  represents the lateral magnification of the third lens unit at the wide-angle end;

[0061]  $\beta 3T$  represents the lateral magnification of the third lens unit at the telephoto end;

[0062]  $Z$  represents the zoom ratio; and

[0063]  $\log$  represents a natural logarithm (since the condition defines a proportion, the base does not matter).

[0064] According to still another aspect of the present invention, a zoom lens system is composed of, from the object side, a first lens unit, a second lens unit, and a third lens unit. The first lens unit has a negative optical power. The second lens unit is composed of at least a positive and a negative lens element, and has a positive optical power. The third lens unit has a positive optical power. In the zoom lens system, zooming is achieved by moving at least two lens units so as to vary the distance between the first and second lens units and the distance between the second and third lens units, and at least one of the lens elements included in the second lens unit and at least one of the lens elements included in the third lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4$$

$$-0.75 < \log(\beta 3T / \beta 3W) / \log(\beta 2T / \beta 2W) < 0.65$$

[0065] where

[0066]  $\phi P_i$  represents the optical power of the  $i$ th plastic lens element;

[0067]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0068]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha 1$  and the height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

[0069]  $\beta 2W$  represents the lateral magnification of the second lens unit at the wide-angle end;

[0070]  $\beta 2T$  represents the lateral magnification of the second lens unit at the telephoto end;

[0071]  $\beta 3W$  represents the lateral magnification of the third lens unit at the wide-angle end;

[0072]  $\beta 3T$  represents the lateral magnification of the third lens unit at the telephoto end; and

[0073]  $\log$  represents a natural logarithm (since the condition defines a proportion, the base does not matter).

## BRIEF DESCRIPTION OF THE DRAWINGS

[0074] The objects and features of this invention will become clear from the following description, taken in conjunction with the preferred embodiments with reference to the accompanied drawings in which:

[0075] FIG. 1 is a lens arrangement diagram of the zoom lens system of a first embodiment (Example 1) of the present invention;

[0076] FIG. 2 is a lens arrangement diagram of the zoom lens system of a second embodiment (Example 2) of the present invention;

[0077] FIG. 3 is a lens arrangement diagram of the zoom lens system of a third embodiment (Example 3) of the present invention;

[0078] FIG. 4 is a lens arrangement diagram of the zoom lens system of a fourth embodiment (Example 4) of the present invention;

[0079] FIG. 5 is a lens arrangement diagram of the zoom lens system of a fifth embodiment (Example 5) of the present invention;

[0080] FIGS. 6A to 6I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 1;

[0081] FIGS. 7A to 7I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 2;

[0082] FIGS. 8A to 8I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 3;

[0083] FIGS. 9A to 9I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 4;

[0084] FIGS. 10A to 10I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 5;

[0085] FIG. 11 is a lens arrangement diagram of the zoom lens system of a sixth embodiment (Example 6) of the present invention;

[0086] FIG. 12 is a lens arrangement diagram of the zoom lens system of a seventh embodiment (Example 7) of the present invention;

[0087] FIG. 13 is a lens arrangement diagram of the zoom lens system of an eighth embodiment (Example 8) of the present invention;

[0088] FIG. 14 is a lens arrangement diagram of the zoom lens system of a ninth embodiment (Example 9) of the present invention;

[0089] FIG. 15 is a lens arrangement diagram of the zoom lens system of a tenth embodiment (Example 10) of the present invention;

[0090] FIG. 16 is a lens arrangement diagram of the zoom lens system of an eleventh embodiment (Example 11) of the present invention;

[0091] FIG. 17 is a lens arrangement diagram of the zoom lens system of a twelfth embodiment (Example 12) of the present invention;

[0092] FIG. 18 is a lens arrangement diagram of the zoom lens system of a thirteenth embodiment (Example 13) of the present invention;

[0093] FIG. 19 is a lens arrangement diagram of the zoom lens system of a fourteenth embodiment (Example 14) of the present invention;

[0094] FIGS. 20A to 20I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 6;

[0095] FIGS. 21A to 21I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 7;

[0096] FIGS. 22A to 22I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 8;

[0097] FIGS. 23A to 23I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 9;

[0098] FIGS. 24A to 24I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 10;

[0099] FIGS. 25A to 25I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 11;

[0100] FIGS. 26A to 26I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 12;

[0101] FIGS. 27A to 27I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of the Example 13;

[0102] FIGS. 28A to 28I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of the Example 14;

[0103] FIG. 29 is a lens arrangement diagram of the zoom lens system of a fifteenth embodiment (Example 15) of the present invention;

[0104] FIGS. 30A to 30I are graphic representations of the aberrations observed in an infinite-distance shooting condition in the zoom lens system of Example 15; and

[0105] FIG. 31 is a schematic illustration of the optical components of a digital camera.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0106] Embodiments 1 to 5

[0107] Hereinafter, zoom lens systems embodying the present invention will be described with reference to the drawings. FIGS. 1 to 5 are lens arrangement diagrams of the zoom lens systems of a first, a second, a third, a fourth, and a fifth embodiment, respectively. In each diagram, the left-hand side corresponds to the object side, and the right-hand side corresponds to the image side. Note that, in each diagram, arrows schematically indicate the movement of the

lens units during zooming from the wide-angle end to the telephoto end. Moreover, each diagram shows the lens arrangement of the zoom lens system during zooming, as observed at the wide-angle end. As shown in these diagrams, the zoom lens systems of the embodiments are each built as a two-unit zoom lens system of a negative-positive configuration that is composed of, from the object side, a first lens unit Gr1 and a second lens unit Gr2. Both the first and second lens units (Gr1 and Gr2) are movably disposed in the zoom lens system.

[0108] The first lens unit Gr1 is composed of, from the object side, a negative lens element, a negative lens element, and a positive lens element and has a negative optical power as a whole. The second lens unit Gr2 is composed of an aperture stop S, a positive lens element, a negative lens element, and a positive lens element and has a positive optical power as a whole. In the zoom lens system, the first to sixth lens elements counted from the object side are represented as G1 to G6, respectively. Note that a flat plate disposed at the image-side end of the zoom lens system is a low-pass filter LPP. As illustrated in FIG. 31, within a digital camera the low-pass filter LPP is disposed between the zoom lens system ZLS and a photoelectric image sensor is having a light-sensing surface on which an image is formed by the zoom lens system.

[0109] As shown in FIG. 1, in the first embodiment, the second and sixth lens elements (G2 and G6) counted from the object side (hatched in the figure) are plastic lens elements. As shown in FIG. 2, in the second embodiment, the second, third, fifth, and sixth lens elements (G2, G3, G5, and G6) counted from the object side (hatched in the figure) are plastic lens elements.

[0110] Moreover, as shown in FIG. 3, in the third embodiment, the second, fifth, and sixth lens elements (G2, G5, and G6) counted from the object side (hatched in the figure) are plastic lens elements. As shown in FIG. 4, in the fourth embodiment, the third and fifth lens elements (G3 and G5) counted from the object side (hatched in the figure) are plastic lens elements. Lastly, as shown in FIG. 5, in the fifth embodiment, the second and sixth lens elements (G2 and G6) counted from the object side (hatched in the figure) are plastic lens elements.

[0111] The conditions to be preferably fulfilled by an optical system will be described below. It is preferable that the zoom lens systems of the embodiments fulfill Condition (1) below.

$$0.25 < \phi_1 / \phi W \leq 0.80 \quad (1)$$

[0112] where

[0113]  $\phi_1$  represents the optical power of the first lens unit; and

[0114]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end.

[0115] Condition (1) defines, in the form of the optical power of the first lens unit, the condition to be fulfilled to achieve proper correction of aberrations and keep the size of the zoom lens system appropriate. If the value of Condition (1) is equal to or less than its lower limit, the optical power of the first lens unit is so weak that aberrations can be corrected properly, but simultaneously the total length, as well as the diameter of the front-end lens unit, of the zoom

lens system becomes unduly large. In contrast, if the value of Condition (1) is equal to or greater than its upper limit, the optical power of the first lens unit is so strong that the total length of the zoom lens system is successfully minimized, but simultaneously the inclination of the image plane toward the over side becomes unduly large. In addition, barrel-shaped distortion becomes unduly large at the wide-angle end.

[0116] It is preferable that the zoom lens systems of the embodiments fulfill Condition (2) below.

$$0.35 < \phi_2 / \phi W < 0.75 \quad (2)$$

[0117] where

[0118]  $\phi_2$  represents the optical power of the second lens unit.

[0119] Condition (2) defines, in the form of the optical power of the second lens unit, the condition to be fulfilled to achieve, as in Condition (1), proper correction of aberrations and keep the size of the zoom lens system appropriate. If the value of Condition (2) is equal to or less than its lower limit, the optical power of the second lens unit is so weak that aberrations can be corrected properly, but simultaneously the total length, as well as the diameter of the front-end lens unit, of the zoom lens system becomes unduly large. In contrast, if the value of Condition (2) is equal to or greater than its upper limit, the optical power of the second lens unit is so strong that the total length of the zoom lens system is successfully minimized, but simultaneously spherical aberration appears notably on the under side.

[0120] It is preferable that the zoom lens systems of the embodiments fulfill Condition (3) below.

$$-1.2 < \phi_{Pi} / \phi W \times h_i < 1.2 \quad (3)$$

[0121] where

[0122]  $\phi_{Pi}$  represents the optical power of the  $i$ th plastic lens element; and

[0123]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha_1$  and the height  $h_1$ , for paraxial tracing, are 0 and 1, respectively.

[0124] Condition (3) defines, in the form of the sum of the degrees in which the individual plastic lens elements, by their temperature variation, affect the back focal distance, the condition to be fulfilled to suppress variation in the back focal distance resulting from temperature variation. When a plurality of plastic lens elements are used, it is preferable that positively-powered and negatively-powered lens elements be combined in such a way that the degree in which they affect the back focal distance are canceled out by one another. If the value of Condition (3) is equal to or less than its lower limit, the variation in the back focal distance caused by temperature variation in the negatively-powered plastic lens element becomes unduly great. In contrast, if the value of Condition (3) is equal to or greater than its upper limit, the variation in the back focal distance caused by temperature variation in the positively-powered plastic lens element becomes unduly great. Thus, in either case, the zoom lens system needs to be provided with a mechanism that corrects the back focal distance in accordance with temperature variation.

[0125] It is preferable that the zoom lens systems of the embodiments fulfill Condition (4) below.

$$|\phi P/\phi 1| < 1.35 \quad (4)$$

[0126] where

[0127]  $\phi P$  represents the optical power of the plastic lens element.

[0128] Condition (4) defines, in the form of the optical power of the plastic lens element included in the first lens unit, the condition to be fulfilled to keep the variation of aberrations resulting from temperature variation within an appropriate range. If the value of Condition (4) is equal to or greater than its upper limit curvature of field, in particular, the curvature of field on the wide-angle side varies too greatly with temperature.

[0129] It is preferable that the zoom lens systems of the embodiments fulfill Condition (5) below.

$$|\phi P/\phi 2| < 2.15 \quad (5)$$

[0130] Condition (5) defines, in the form of the optical power of the plastic lens element included in the second lens unit, the condition to be fulfilled to keep, as in Condition (4), the variation of aberrations resulting from temperature variation within an appropriate range. If the value of Condition (5) is equal to or greater than its upper limit, spherical aberration, in particular, the spherical aberration on the telephoto side, varies too greatly with temperature.

[0131] No lower limit is given for Conditions (4) and (5). This is because, as the value of either of the conditions decreases, the optical power of the plastic lens element becomes weaker, and this is desirable in terms of suppression of the variation of aberrations resulting from temperature variation. This, however, has no effect on correction of aberrations under normal temperature, and accordingly makes the use of plastic lenses meaningless. To avoid this, where the plastic lens element fulfills Condition (6) below, it is essential to use an aspherical surface.

$$0 \leq |\phi P/\phi 4| < 0.45 \quad (6)$$

[0132] where

[0133]  $\phi A$  represents the optical power of the lens unit including the plastic lens element.

[0134] Note however that this is not to discourage providing an aspherical surface on the lens surface of a plastic lens element having an optical power that makes the value of Condition (6) equal to or greater than its upper limit.

[0135] As described above, if an aspherical surface is used, it is preferable that the following conditions be fulfilled. First, where an aspherical surface is used in the first lens unit, it is preferable that Condition (7) below be fulfilled.

$$-0.85 < (|X| - |X_0|) / \{C_0(N' - N)/f1\} < -0.05 \quad (7)$$

[0136] where

[0137]  $C_0$  represents the curvature of the reference spherical surface of the aspherical surface;

[0138]  $N$  represents the refractive index of the image-side medium of the aspherical surface for the d line;

[0139]  $N'$  represents the refractive index of the object-side medium of the aspherical surface for the d line;

[0140]  $X$  represents the deviation of the aspherical surface along the optical axis at the height in a direction perpendicular to the optical axis (the direction pointing to the object side is negative);

[0141]  $X_0$  represents the deviation of the reference spherical surface of the aspherical surface along the optical axis at the height in a direction perpendicular to the optical axis (the direction pointing to the object side is negative); and

[0142]  $f1$  represents the focal length of the first lens unit.

[0143] Condition (7) defines the surface shape of the aspherical surface and assumes that the aspherical surface is so shaped as to weaken the optical power of the first lens unit. Fulfillment of Condition (7) makes it possible to achieve proper correction of the distortion and the image plane on the wide-angle side, in particular. If the value of Condition (7) is equal to or less than its lower limit, positive distortion becomes unduly large on the wide-angle side, in particular, in a close-shooting condition, and simultaneously the inclination of the image plane toward the over side becomes unduly large. In contrast, if the value of Condition (7) is equal to or greater than its upper limit, negative distortion becomes unduly large on the wide-angle side, in particular, in a close-shooting condition, and simultaneously the inclination of the image plane toward the under side becomes unduly large. Note that, in a case where the first lens unit includes a plurality of aspherical surfaces, at least one of those aspherical surfaces needs to fulfill Condition (7) above; that is, the other aspherical surfaces do not necessarily have to fulfill Condition (7) above, if that is advantageous for the correction of other aberrations.

[0144] In a case where an aspherical surface is used in the second lens unit, it is preferable that Condition (8) below be fulfilled.

$$-0.95 < (|X| - |X_0|) / \{C_0(N' - N)/2\} < -0.05 \quad (8)$$

[0145] where

[0146]  $f2$  represents the focal length of the second lens unit.

[0147] Condition (8) defines the surface shape of the aspherical surface and assumes that the aspherical surface is so shaped as to weaken the optical power of the second lens unit. Fulfillment of Condition (8) makes it possible to achieve proper correction of spherical aberration, in particular. If the value of Condition (8) is equal to or less than its lower limit, in particular, spherical aberration appears notably on the over side at the telephoto end. In contrast, if the value of Condition (8) is equal to or greater than its upper limit, spherical aberration appears notably on the under side at the telephoto end. Note that, in a case where the second lens unit includes a plurality of aspherical surfaces, at least one of those aspherical surfaces needs to fulfill Condition (8) above; that is, the other aspherical surfaces do not necessarily have to fulfill Condition (8) above, if that is advantageous for the correction of other aberrations.

[0148] Embodiments 6 to 15

[0149] FIGS. 11 to 19 and 29 are lens arrangement diagrams of the zoom lens systems of a sixth, a seventh, an eighth, a ninth, a tenth, an eleventh, a twelfth, a thirteenth, a fourteenth and a fifteenth embodiment, respectively. In each diagram, the left-hand side corresponds to the object side, and the right-hand side corresponds to the image side. In addition, in each diagram, arrows schematically indicate the movement of the lens units during zooming from the wide-angle end to the telephoto end. Note that arrows with a broken line indicate that the lens unit is kept in a fixed position during zooming. Moreover, each diagram shows the lens arrangement of the zoom lens system during zooming, as observed at the wide-angle end. As shown in these diagrams, the zoom lens systems of the embodiments are each built as a three-unit zoom lens system of a negative-positive-positive configuration that is composed of, from the object side, a first lens unit Gr1, a second lens unit Gr2, and a third lens unit Gr3. In this zoom lens system, at least two lens units are moved during zooming.

[0150] The first lens unit Gr1 has a negative optical power as a whole. The second and third lens units (Gr2 and Gr3) have a positive optical power as a whole. In the zoom lens system, the first to eighth lens elements counted from the object side are represented as G1 to G8, respectively. The lens units provided in the zoom lens system of each embodiment are each realized by the use of a plurality of lens elements out of those lens elements G1 to G8. The second lens unit Gr2 includes an aperture stop S. Note that a flat plate disposed at the image-side end of the zoom lens system is a low-pass filter LPP.

[0151] As shown in FIG. 11, in the sixth embodiment, the second and sixth lens elements (G2 and G6) counted from the object side (hatched in the figure) are plastic lens elements. Moreover, as shown in FIG. 12, in the seventh embodiment, the second and seventh lens elements (G2 and G7) counted from the object side (hatched in the figure) are plastic lens elements.

[0152] As shown in FIG. 13, in the eighth embodiment, the first and seventh lens elements (G1 and G7) counted from the object side (hatched in the figure) are plastic lens elements. Moreover, as shown in FIG. 14, in the ninth embodiment, the second and fifth lens elements (G2 and G5) counted from the object side (hatched in the figure) are plastic lens elements. Furthermore, as shown in FIG. 15, in the tenth embodiment, the first and seventh lens elements (G1 and G7) counted from the object side (hatched in the figure) are plastic lens elements.

[0153] As shown in FIG. 16, in the eleventh embodiment, the second and fifth lens elements (G2 and G5) counted from the object side (hatched in the figure) are plastic lens elements. Moreover, as shown in FIG. 17, in the twelfth embodiment, the second, fifth, sixth, and seventh lens elements (G2, G5, G6, and G7) counted from the object side (hatched in the figure) are plastic lens elements.

[0154] As shown in FIG. 18, in the thirteenth embodiment, the second, fifth, sixth, seventh, and eighth lens elements (G2, G5, G6, G7, and G8) counted from the object side (hatched in the figure) are plastic lens elements. As shown in FIG. 19, in the fourteenth embodiment, the second, sixth, and seventh lens elements (G2, G6, and G7)

counted from the object side (hatched in the figure) are plastic lens elements. Referring to FIG. 29, in the fifteenth embodiment, the first and fifth lens elements (G1 and G5) are plastic lens elements.

[0155] The conditions to be preferably fulfilled by an optical system will be described below. It is preferable that the zoom lens systems of the sixth to fifteenth embodiments fulfill Condition (9) below.

$$-0.8 < C_p \times (N' - N) / \phi W < 0.8 \quad (9)$$

[0156] where

[0157]  $C_p$  represents the curvature of the plastic lens element;

[0158]  $\phi W$  represents the optical power of the entire zoom lens system at the wide-angle end;

[0159]  $N'$  represents the refractive index of the object-side medium of the aspherical surface for the d line; and

[0160]  $N$  represents the refractive index of the image-side medium of the aspherical surface for the d line.

[0161] Condition (9) defines the optical power of the lens surface of the plastic lens element. If the optical power of the lens surface is too strong, the surface shape varies with temperature, with the result that various aberrations become unduly large. If the value of Condition (9) is equal to or less than its lower limit, the negative optical power is too strong. In contrast, if the value of Condition (9) is equal to or greater than its upper limit, the positive optical power is too strong. As a result, in the plastic lens element provided in the first lens unit, curvature of field varies too greatly with temperature, in particular; in the plastic lens element provided in the second lens unit, spherical aberration varies too greatly with temperature, in particular; and, in the plastic lens element provided in the third lens unit, spherical aberration and the coma aberration in marginal rays vary greatly with temperature, in particular.

[0162] It is preferable that the zoom lens systems of the embodiments fulfill Condition (10) below.

$$-0.45 < M3/M2 < 0.90 \quad (10)$$

[0163] where

[0164]  $M3$  represents the amount of movement of the third lens unit (the direction pointing to the object side is negative with respect to the wide-angle end); and

[0165]  $M2$  represents the amount of movement of the second lens unit (the direction pointing to the object side is negative with respect to the wide-angle end).

[0166] Condition (10) defines, in the form of the ratio of the amount of movement of the second lens unit to that of the third lens unit, the condition to be fulfilled to keep the amount of movement of the second and third lens units in appropriate ranges in order to achieve zooming efficiently. Thus, in an optical system in which a sufficient zoom ratio needs to be secured, fulfillment of Condition (10) is effective. Moreover, it is more preferable that the following condition be additionally fulfilled.

$$\phi T / \phi W > 1.6$$

[0167] where

[0168]  $\phi T$  represents the optical power of the entire zoom lens system at the telephoto end.

[0169] If the value of Condition (10) is equal to or less than its lower limit, the responsibility of the third lens unit for zooming is so heavy that spherical aberration and the coma aberration in marginal rays vary too greatly with zooming. In contrast, if the value of Condition (10) is equal to or greater than its upper limit, the amount of the movement of the second lens unit is so large that the diameter of the front-end lens unit needs to be unduly large in order to secure sufficient amount of peripheral light on the wide-angle side, and simultaneously, the responsibility of the second lens unit for zooming is so heavy that spherical aberration varies too greatly with zooming.

[0170] Moreover, where a plastic lens element is used in the third lens unit, the ability of the third lens unit to correct aberrations tends to be insufficient. To avoid this, it is preferable to make the range of Condition (10) narrower so as to obtain the following condition:

$$-0.30 < M3/M2 < 0.90 \quad (10)$$

[0171] In a case where a plastic lens element is used in the first lens unit, it is preferable that Condition (11) below be fulfilled.

$$|\phi P/\phi 1| < 1.20 \quad (11)$$

[0172] where

[0173]  $\phi P$  represents the optical power of the plastic lens element; and

[0174]  $\phi 1$  represents the optical power of the first lens unit.

[0175] Condition (11) defines, in the form of the ratio of the optical power of the first lens unit to that of the plastic lens element included in the first lens unit, the condition to be fulfilled to keep the variation of aberrations resulting from temperature variation within an appropriate range. If the value of Condition (11) is equal to or greater than its upper limit, curvature of field, in particular, the curvature of field on the wide-angle side, varies too greatly with temperature. Moreover, to correct the aberrations that occur in the first lens unit, it is preferable to use at least a positive and a negative lens element.

[0176] In a case where a plastic lens element is used in the second lens unit, it is preferable that Condition (12) below be fulfilled.

$$|\phi P/\phi 2| < 2.5 \quad (12)$$

[0177] where

[0178]  $\phi 2$  represents the optical power of the second lens unit.

[0179] Condition (12) defines, in the form of the ratio of the optical power of the second lens unit to that of the plastic lens element included in the second lens unit, the condition to be fulfilled to keep the variation of aberrations resulting from temperature variation within an appropriate range. If the value of Condition (12) is equal to or greater than its upper limit, spherical aberration, in particular, the spherical aberration on the telephoto side, varies too greatly with temperature. Moreover, to correct the aberrations that occur in the second lens unit, it is preferable to use at least a positive and a negative lens element.

[0180] In a case where a plastic lens element is used in the third lens unit, it is preferable that Condition (13) below be fulfilled.

$$|\phi P/\phi 3| < 1.70 \quad (13)$$

[0181] where

[0182]  $\phi 3$  represents the optical power of the third lens unit.

[0183] Condition (13) defines, in the form of the ratio of the optical power of the third lens unit to that of the plastic lens element included in the third lens unit, the condition to be fulfilled to keep the variation of aberrations resulting from temperature variation within an appropriate range. If the value of Condition (13) is equal to or greater than its upper limit, spherical aberration and the coma aberration in marginal rays vary too greatly with temperature. Moreover, to correct the aberrations that occur in the third lens unit, it is preferable to use at least a positive and a negative lens element.

[0184] No lower limit is given for Conditions (11) to (13). This is because, as the value of either of the conditions decreases, the optical power of the plastic lens element becomes weaker, and this is desirable in terms of suppression of the variation of aberrations resulting from temperature variation. This, however, has no effect on correction of aberrations under normal temperature, and accordingly makes the use of plastic lenses meaningless. To avoid this, where the plastic lens element fulfills Condition (14) below, it is essential to use an aspherical surface.

$$0 \leq |\phi P/\phi A| < 0.45 \quad (14)$$

[0185] where

[0186]  $\phi A$  represents the optical power of the lens unit including the plastic lens element.

[0187] Note however that this is not to discourage providing an aspherical surface on the lens surface of a plastic lens element having an optical power that makes the value of Condition (14) equal to or greater than its upper limit.

[0188] As described above, if an aspherical surface is used, it is preferable that the following conditions be fulfilled. First, where an aspherical surface is provided on the lens surface of the plastic lens element of the first lens unit, it is preferable that Condition (15) below be fulfilled.

$$-1.10 < (|X| - |X_0|) / \{C_0(N' - N)\phi 1\} < -0.10 \quad (15)$$

[0189] where

[0190]  $C_0$  represents the curvature of the reference spherical surface of the aspherical surface;

[0191]  $N$  represents the refractive index of the image-side medium of the aspherical surface for the d line;

[0192]  $N'$  represents the refractive index of the object-side medium of the aspherical surface for the d line;

[0193]  $X$  represents the deviation of the aspherical surface along the optical axis at the height in a direction perpendicular to the optical axis (the direction pointing to the object side is negative);



[0194]  $X_0$  represents the deviation of the reference spherical surface of the aspherical surface along the optical axis at the height in a direction perpendicular to the optical axis (the direction pointing to the object side is negative); and

[0195]  $f_1$  represents the focal length of the first lens unit.

[0196] If the value of Condition (15) is equal to or less than its lower limit, positive distortion becomes unduly large on the wide-angle side, in particular, in a close-shooting condition, and simultaneously the inclination of the image plane toward the over side becomes unduly large. In contrast, if the value of Condition (15) is equal to or greater than its upper limit, it is impossible to make efficient use of the aspherical surface, which makes the use of an aspherical surface meaningless. As a result, the negative distortion on the wide-angle side, in particular, in a close-shooting condition, and the inclination of the image plane toward the under side are undercorrected. Note that, in a case where the first lens unit includes a plurality of aspherical surfaces, at least one of those aspherical surfaces needs to fulfill Condition (15) above; that is, the other aspherical surfaces do not necessarily have to fulfill Condition (15) above, if that is advantageous for the correction of other aberrations.

[0197] In a case where an aspherical surface is provided on the lens surface of the plastic lens element of the second lens unit, it is preferable that Condition (16) below be fulfilled.

$$-0.35 < (|X| - |X_0|) / \{C_0(N' - N)^2\} < -0.03 \quad (16)$$

[0198] where

[0199]  $f_2$  represents the focal length of the second lens unit.

[0200] Condition (16) assumes that the aspherical surface is so shaped as to weaken the positive optical power of the second lens unit. Fulfillment of Condition (16) makes it possible to achieve proper correction of spherical aberration, in particular. If the value of Condition (16) is equal to or less than its lower limit, in particular, spherical aberration appears notably on the over side at the telephoto end. In contrast, if the value of Condition (16) is equal to or greater than its upper limit, it is impossible to make efficient use of the aspherical surface, which makes the use of an aspherical surface meaningless. As a result, spherical aberration is undercorrected on the telephoto side, in particular. Note that, in a case where the second lens unit includes a plurality of aspherical surfaces, at least one of those aspherical surfaces needs to fulfill Condition (16) above; that is, the other aspherical surfaces do not necessarily have to fulfill Condition (16) above, if that is advantageous for the correction of other aberrations.

[0201] In a case where an aspherical surface is provided on the lens surface of the plastic lens element of the third lens unit, it is preferable that Condition (17) below be fulfilled.

$$-0.70 < (|X| - |X_0|) / \{C_0(N' - N)^3\} < -0.01 \quad (17)$$

[0202] where

[0203]  $f_3$  represents the focal length of the third lens unit.

[0204] Condition (17) assumes that the aspherical surface is so shaped as to weaken the positive optical power of the third lens unit. Fulfillment of Condition (17) makes it possible to achieve proper correction of spherical aberration and the coma aberration in marginal rays. If the value of Condition (17) is equal to or less than its lower limit, spherical aberration appears notably on the over side, and simultaneously the coma aberration in marginal rays becomes unduly large. In contrast, if the value of Condition (17) is equal to or greater than its upper limit, it is impossible to make efficient use of the aspherical surface, which makes the use of an aspherical surface meaningless. As a result, spherical aberration and the coma aberration in marginal rays are undercorrected. Note that, in a case where the third lens unit includes a plurality of aspherical surfaces, at least one of those aspherical surfaces needs to fulfill Condition (17) above; that is, the other aspherical surfaces do not necessarily have to fulfill Condition (17) above, if that is advantageous for the correction of other aberrations.

[0205] It is preferable that the zoom lens systems of the embodiments fulfill Condition (18) below.

$$0.20 < |\phi_1 / \phi W| < 0.70 \quad (18)$$

[0206] Condition (18) defines, in the form of the optical power of the first lens unit, the condition to be fulfilled to achieve proper correction of aberrations and keep the size of the zoom lens system appropriate. If the value of Condition (18) is equal to or less than its lower limit, the optical power of the first lens unit is so weak that aberrations can be corrected properly, but simultaneously the total length, as well as the diameter of the front-end lens unit, of the zoom lens system becomes unduly large. In contrast, if the value of Condition (18) is equal to or greater than its upper limit, the optical power of the first lens unit is so strong that aberrations become unduly large, in particular, the inclination of the image plane toward the over side becomes unduly large, and simultaneously barrel-shaped distortion becomes unduly large on the wide-angle side. In this case, the use of a plastic lens element, which offers a relatively low refractive index and a strictly restricted range of dispersion, makes it difficult to correct aberrations properly and thus requires more lens elements in the zoom lens system.

[0207] It is preferable that the zoom lens systems of the embodiments fulfill Condition (19) below.

$$0.25 < \phi_2 / \phi W < 0.75 \quad (19)$$

[0208] Condition (19) defines, in the form of the optical power of the second lens unit, the condition to be fulfilled to achieve proper correction of aberrations and keep the size of the zoom lens system appropriate. If the value of Condition (19) is equal to or less than its lower limit, the optical power of the second lens unit is so weak that aberrations can be corrected properly, but simultaneously the total length, as well as the diameter of the front-end lens unit, of the zoom lens system becomes unduly large. In contrast, if the value of Condition (19) is equal to or greater than its upper limit, the optical power of the second lens unit is so strong that aberrations become unduly large, in particular, spherical aberration appears notably on the under side. In this case, the use of a plastic lens element, which offers a relatively low refractive index and a strictly restricted range of dispersion, makes it difficult to correct aberrations properly and thus requires more lens elements in the zoom lens system.

[0209] It is preferable that the zoom lens systems of the embodiments fulfill Condition (20) below.

$$0.1 < \phi_3 / \phi W < 0.60 \quad (20)$$

[0210] Condition (20) defines, in the form of the optical power of the third lens unit, the condition to be fulfilled to achieve proper correction of aberrations and keep the size of the zoom lens system appropriate. If the value of Condition (20) is equal to or less than its lower limit, the optical power of the third lens unit is so weak that aberrations can be corrected properly, but simultaneously the total length, as well as the diameter of the front-end lens unit, of the zoom lens system becomes unduly large. In contrast, if the value of Condition (20) is equal to or greater than its upper limit, the optical power of the third lens unit is so strong that aberrations become unduly large, in particular, spherical aberration appears notably on the under side. In this case, the use of a plastic lens element, which offers a relatively low refractive index and a strictly restricted range of dispersion, makes it difficult to correct aberrations properly and thus requires more lens elements in the zoom lens system.

[0211] Moreover, if the values of Conditions (18) to (20) are equal to or greater than their upper limits, the optical power of the plastic lens element tends to be unduly strong. Thus, it is preferable that Conditions (11) and (18); (12) and (19); and (13) and (20) be fulfilled at the same time, respectively.

[0212] It is preferable that the zoom lens systems of the embodiments fulfill Condition (21) below.

$$-1.4 < \phi P_i / \phi W x_{hi} < 1.4 \quad (21)$$

[0213] where

[0214]  $\phi P_i$  represents the optical power of the  $i$ th plastic lens element; and

[0215]  $h_i$  represents the height of incidence at which a paraxial ray enters the object-side surface of the  $i$ th plastic lens element at the telephoto end, assuming that the initial values of the converted inclination  $\alpha_i$  and the height  $h_1$ , for paraxial tracing, are 0 and 1, respectively.

[0216] Condition (21) defines, in the form of the sum of the degrees in which the individual plastic lens elements, by their temperature variation, affect the back focal distance, the condition to be fulfilled to suppress variation in the back focal distance resulting from temperature variation. When a plurality of plastic lens elements are used, it is preferable that positively-powered and negatively-powered lens elements be combined in such a way that the degree in which they affect the back focal distance are canceled out by one another. If the value of Condition (21) is equal to or less than its lower limit, the variation in the back focal distance caused by temperature variation in the negatively-powered plastic lens element becomes unduly great. In contrast, if the value of Condition (21) is equal to or greater than its upper limit, the variation in the back focal distance caused by temperature variation in the positively-powered plastic lens element becomes unduly great. Thus, in either case, the zoom lens system needs to be provided with a mechanism that corrects the back focal distance in accordance with temperature variation.

[0217] It is preferable that the zoom lens systems of the embodiments fulfill Condition (22) below.

$$0.5 < \log(\beta_{2T} / \beta_{2W}) / \log Z < 2.2 \quad (22)$$

[0218] where

[0219]  $\beta_{2W}$  represents the lateral magnification of the second lens unit at the wide-angle end;

[0220]  $\beta_{2T}$  represents the lateral magnification of the second lens unit at the telephoto end;

[0221]  $Z$  represents the zoom ratio; and

[0222]  $\log$  represents a natural logarithm (since the condition defines a proportion, the base does not matter).

[0223] In a zoom lens system of the types like those of the present invention, the responsibility of the second lens unit for zooming is heavier than that of any other lens unit. The heavier the responsibility for zooming, the larger the aberrations that accompany zooming. Thus, in order to achieve proper correction of aberrations, it is preferable to distribute the responsibility for zooming among a plurality of lens units. Condition (22) defines the responsibility for zooming of the second lens unit, to which the heaviest responsibility for zooming is distributed in a zoom lens system of the types like those of the present invention.

[0224] If the value of Condition (22) is equal to or less than its lower limit, the responsibility of the second lens unit for zooming is so light that the aberrations occurring in the second lens unit can be corrected properly. This, however, affects the responsibility of the other lens units for correcting aberrations, and thus requires more lens elements in those other lens units, with the result that the entire optical system needs to have an unduly large size. In contrast, if the value of Condition (22) is equal to or greater than its upper limit, the responsibility of the second lens unit for zooming is so heavy that spherical aberration varies too greatly with zooming, in particular.

[0225] It is preferable that the zoom lens systems of the embodiments fulfill Condition (23) below.

$$-1.2 < \log(\beta_{3T} / \beta_{3W}) / \log Z < 0.5 \quad (23)$$

[0226] where

[0227]  $\beta_{3W}$  represents the lateral magnification of the third lens unit at the wide-angle end; and

[0228]  $\beta_{3T}$  represents the lateral magnification of the third lens unit at the telephoto end.

[0229] Condition (23) defines the responsibility of the third lens unit for zooming. If the value of Condition (23) is negative, the third lens unit reduces its magnification during zooming. This is disadvantageous from the viewpoint of zooming. In this case, however, by moving the third lens unit during zooming, it is possible to correct the aberrations occurring in the other lens units during zooming. If the value of Condition (23) is equal to or less than its lower limit, the third lens unit reduces its magnification at an unduly high rate during zooming, and thus the resulting loss in magnification needs to be compensated by the other lens units. This requires an unduly large number of lens elements in those other lens units and thus makes the entire optical system unduly long. In contrast, if the value of Condition (23) is equal to or greater than its upper limit, the responsibility of the third lens unit for zooming is so heavy that spherical aberration and coma aberration vary too greatly with zooming.

[0230] Moreover, it is preferable that the zoom lens systems of the embodiments fulfill Condition (24) below.

$$-0.75 < \log(\beta 3T/\beta 3W)/\log(\beta 2T/\beta 2W) < 0.65 \quad (24)$$

[0231] Condition (24) defines the preferable ratio of the responsibility of the second lens unit for zooming to the responsibility of the third lens unit for zooming. If the value of Condition (24) is equal to or less than its lower limit, the third lens unit reduces its magnification, and thus the responsibility of the second lens unit for zooming is excessively heavy. As a result, spherical aberration varies too greatly with zooming. In contrast, if the value of Condition (24) is equal to or greater than its upper limit, the responsibility of the third lens unit for zooming is so heavy that spherical aberration and coma aberration vary too greatly with zooming.

[0232] Hereinafter, examples of zoom lens systems embodying the present invention will be presented with reference to their construction data, graphic representations of aberrations, and other data. Tables 1 to 5 list the construction data of Examples 1 to 5, which respectively correspond to the first to fifth embodiments described above and have lens arrangements as shown in FIGS. 1 to 5. Tables 6 to 15 list the construction data of Examples 6 to 15, which respectively correspond to the sixth to fifteenth embodiments described above and have lens arrangements as shown in FIGS. 11 to 19 and 29.

[0233] In the construction data of each example,  $r_i$  ( $i=1, 2, 3, \dots$ ) represents the  $i$ th surface counted from the object side and its radius of curvature,  $d_i$  ( $i=1, 2, 3, \dots$ ) represents the  $i$ th axial distance counted from the object side, and  $N_i$  ( $i=1, 2, 3, \dots$ ) and  $n_i$  ( $i=1, 2, 3, \dots$ ) respectively represent the refractive index for the d line and the Abbe number of the  $i$ th lens element counted from the object side. The values listed for the focal length  $f$  and the F number FNO of the entire zoom lens system in Examples 1 to 5; the distance between the first and second lens units; and the distance between the second lens unit and the low-pass filter LPF are the values at, from left, the wide-angle end (W), the middle-focal-length position (M), and the telephoto end (T).

[0234] Moreover, the values listed for the focal length  $f$  and the F number FNO of the entire zoom lens system in Examples 6 to 15; the distance between the first and second lens units; the distance between the second and third lens units; and the distance between the third lens unit and the low-pass filter LPF are the values at, from left, the wide-angle end (W), the middle-focal-length position (M), and the telephoto end (T). Note that, in all of Examples, a surface whose radius of curvature  $r_i$  is marked with an asterisk (\*) is an aspherical surface, whose surface shape is defined by the following formulae.

$$X = X_0 + \sum S A_i Y^i \quad (a)$$

$$X_0 = CY^2 / \{1 + (1 - cCY^2)^{1/2}\} \quad (b)$$

[0235] where

[0236]  $X$  represents the displacement from the reference surface in the optical axis direction;

[0237]  $Y$  represents the height in a direction perpendicular to the optical axis;

[0238]  $C$  represents the paraxial curvature;

[0239]  $\epsilon$  represents the quadric surface parameter; and

[0240]  $A_i$  represents the aspherical coefficient of the  $i$ th order.

[0241] FIGS. 6A to 6I, 7A to 7I, 8A to 8I, 9A to 9I, and 10A to 10I show the aberrations observed in the infinite-distance shooting condition in Examples 1 to 5, respectively. Of these diagrams, FIGS. 6A to 6C, 7A to 7C, 8A to 8C, 9A to 9C, and 10A to 10C show the aberrations observed at the wide-angle end [W]; FIGS. 6D to 6F, 7D to 7F, 8D to 8F, 9D to 9F, and 10D to 10F show the aberrations observed at the middle focal length [M]; and FIGS. 6G to 6I, 7G to 7I, 8G to 8I, 9G to 9I, and 10G to 10I show the aberrations observed at the telephoto end [T]. In the spherical aberration diagrams, the solid line (d) represents the d line and the broken line (SC) represents the sine condition. In the astigmatism diagrams, the solid line (DS) and the broken line (DM) represent the astigmatism on the sagittal plane and on the meridional plane, respectively. In Examples 1 to 5, Conditions (1) to (5) mentioned above are fulfilled.

[0242] FIGS. 20A to 20I, 21A to 21I, 22A to 22I, 23A to 23I, 24A to 24I, 25A to 25I, 26A to 26I, 27A to 27I, 28A to 28I, and 30A to 30I show the aberrations observed in the infinite-distance shooting condition in Examples 6 to 15, respectively. Of these diagrams, FIGS. 20A to 20C, 21A to 21C, 22A to 22C, 23A to 23C, 24A to 24C, 25A to 25C, 26A to 26C, 27A to 27C, 28A to 28C, and 30A to 30C show the aberrations observed at the wide-angle end [W]; FIGS. 20D to 20F, 21D to 21F, 22D to 22F, 23D to 23F, 24D to 24F, 25D to 25F, 26D to 26F, 27D to 27F, 28D to 28F, and 30D to 30F show the aberrations observed at the middle focal length [M]; and FIGS. 20G to 20I, 21G to 21I, 22G to 22I, 23G to 23I, 24G to 24I, 25G to 25I, 26G to 26I, 27G to 27I, 28G to 28I, and 30G to 30I show the aberrations observed at the telephoto end [T]. In the spherical aberration diagrams, the solid line (d) represents the d line and the broken line (SC) represents the sine condition. In the astigmatism diagrams, the solid line (DS) and the broken line (DM) represent the astigmatism on the sagittal plane and on the meridional plane, respectively. In Examples 6 to 15, the conditions mentioned above are fulfilled.

[0243] The variables used in Conditions (1) to (5) in Examples 1 to 5 are listed in Table 16.

[0244] The values corresponding to Conditions (1) to (5) in Examples 1 to 5 are listed in Table 17.

[0245] The values corresponding to Conditions (9) to (13) and (18) to (24) in Examples 6 to 15 are listed in Table 18.

[0246] The values corresponding to Conditions (7) and (8) to be fulfilled by the aspherical surface in Examples 1 to 5 are listed in Table 19. Note that  $Y$  represents the maximum height of the optical path on the aspherical surface.

[0247] The values corresponding to Conditions (15) to (17) to be fulfilled by the aspherical surface in Examples 6 to 15 are listed in Table 20. Note that  $Y$  represents the maximum height of the optical path on the aspherical surface.

TABLE 1

Construction Data of Example 1			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.96 mm 3.24 mm 3.6 mm (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 11.333	d1 = 0.779	N1 = 1.85000	v1 = 40.04
r2 = 6.007	d2 = 1.940		
r3* = 17.418	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 6.396	d4 = 1.895		
r5 = 7.432	d5 = 1.763	N3 = 1.84666	v3 = 23.82
r6 = 10.246	d6 = 13.009 6.374 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.989	d8 = 1.829	N4 = 1.75450	v4 = 51.57
r9 = -125.715	d9 = 1.268		
r10 = -12.153	d10 = 0.635	N5 = 1.75000	v5 = 25.14
r11 = 9.023	d11 = 0.447		
r12* = 13.010	d12 = 2.293	N6 = 1.52510	v6 = 56.38
r13 = -6.778	d13 = 1.000 2.559 4.786		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.21447 × 10 <sup>-3</sup>			
A6 = 0.50169 × 10 <sup>-5</sup>			
A8 = 0.14584 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10			
A4 = -0.20572 × 10 <sup>-2</sup>			
A6 = -0.42994 × 10 <sup>-5</sup>			
A8 = -0.32617 × 10 <sup>-5</sup>			

[0248]

TABLE 2

Construction Data of Example 2			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.96 mm 3.24 mm 3.6 mm (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 14.260	d1 = 0.650	N1 = 1.53359	v1 = 64.66
r2 = 6.334	d2 = 2.341		
r3* = 24.115	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 5.871	d4 = 1.561		
r5 = 6.894	d5 = 2.091	N3 = 1.58340	v3 = 30.23
r6 = 13.124	d6 = 14.102 6.837 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.164	d8 = 2.262	N4 = 1.61555	v4 = 57.97
r9 = -9.593	d9 = 0.479		
r10* = -5.666	d10 = 1.472	N5 = 1.58340	v5 = 30.23
r11 = 9.833	d11 = 0.604		
r12* = 22.822	d12 = 1.943	N6 = 1.52510	v6 = 56.38
r13 = -8.802	d13 = 1.000 2.422 4.454		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.16907 × 10 <sup>-3</sup>			
A6 = 0.35415 × 10 <sup>-5</sup>			
A8 = 0.80238 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 10th Surface (r10)]			
ε = 0.10000 × 10			
A4 = 0.79103 × 10 <sup>-3</sup>			
A6 = 0.24186 × 10 <sup>-4</sup>			
A8 = 0.30525 × 10 <sup>-5</sup>			

TABLE 2-continued

[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10			
A4 = -0.25573 × 10 <sup>-2</sup>			
A6 = -0.15034 × 10 <sup>-5</sup>			
A8 = -0.18614 × 10 <sup>-4</sup>			

[0249]

TABLE 3

Construction Data of Example 3			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.96 mm 3.24 mm 3.6 mm (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 11.551	d1 = 1.213	N1 = 1.75450	v1 = 51.57
r2 = 6.152	d2 = 2.230		
r3* = 21.819	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 6.113	d4 = 1.835		
r5 = 7.256	d5 = 2.216	N3 = 1.69961	v3 = 26.60
r6 = 11.287	d6 = 13.126 6.424 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.207	d8 = 2.259	N4 = 1.61213	v4 = 58.19
r9 = -9.240	d9 = 0.467		
r10* = -5.774	d10 = 1.430	N5 = 1.58340	v5 = 30.23
r11 = 9.548	d11 = 0.601		
r12* = 22.409	d12 = 1.984	N6 = 1.52510	v6 = 56.38
r13 = -8.485	d13 = 1.000 2.495 4.630		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.19262 × 10 <sup>-3</sup>			
A6 = 0.34894 × 10 <sup>-5</sup>			
A8 = 0.12515 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 10th Surface (r10)]			
ε = 0.10000 × 10			
A4 = 0.43913 × 10 <sup>-3</sup>			
A6 = 0.33312 × 10 <sup>-4</sup>			
A8 = 0.24577 × 10 <sup>-5</sup>			
[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10			
A4 = -0.22305 × 10 <sup>-2</sup>			
A6 = -0.11486 × 10 <sup>-4</sup>			
A8 = -0.15332 × 10 <sup>-4</sup>			

[0250]

TABLE 4

Construction Data of Example 4			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.9 mm 3.25 mm 3.6 mm (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 13.912	d1 = 1.500	N1 = 1.75450	v1 = 51.57
r2 = 6.626	d2 = 2.111		
r3 = 25.350	d3 = 1.000	N2 = 1.75450	v2 = 51.57
r4 = 7.001	d4 = 0.893		
r5* = 14.283	d5 = 4.843	N3 = 1.58340	v3 = 30.23
r6* = -45.283	d6 = 15.765 7.542 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.964	d8 = 4.216	N4 = 1.65656	v4 = 55.63
r9 = -7.373	d9 = 0.208		
r10 = -6.131	d10 = 1.300	N5 = 1.58340	v5 = 30.23
r11* = 9.768	d11 = 2.852		
r12 = -77.516	d12 = 1.708	N6 = 1.52200	v6 = 65.93

TABLE 4-continued

r13 = -8.818	d13 = 1.000 2.668 5.052		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 5th Surface (r5)]			
ε = 0.10000 × 10			
A4 = 0.90348 × 10 <sup>-4</sup>			
A6 = 0.13458 × 10 <sup>-5</sup>			
A8 = 0.14476 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 6th Surface (r6)]			
ε = 0.10000 × 10			
A4 = -0.32219 × 10 <sup>-3</sup>			
A6 = -0.25483 × 10 <sup>-5</sup>			
A8 = -0.86784 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 11th Surface (r11)]			
ε = 0.10000 × 10			
A4 = 0.20489 × 10 <sup>-2</sup>			
A6 = 0.27321 × 10 <sup>-4</sup>			
A8 = 0.40971 × 10 <sup>-5</sup>			
A10 = -0.20451 × 10 <sup>-6</sup>			

[0251]

TABLE 5

Construction Data of Example 5  
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)  
FNO = 3.18 mm 3.55 mm 4.08 mm (F numbers)

Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 10.456	d1 = 2.128	N1 = 1.85000	v1 = 40.04
r2 = 3.870	d2 = 2.166		
r3* = 16.226	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 6.827	d4 = 1.322		
r5 = 8.144	d5 = 1.514	N3 = 1.83350	v3 = 21.00
r6 = 13.791	d6 = 8.994 4.674 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.950	d8 = 1.897	N4 = 1.74989	v4 = 51.73
r9 = -43.969	d9 = 1.242		
r10 = -11.144	d10 = 0.753	N5 = 1.84714	v5 = 25.28
r11 = 10.245	d11 = 0.400		
r12* = 12.590	d12 = 2.297	N6 = 1.52510	v6 = 56.38
r13 = -6.634	d13 = 1.000 3.314 6.620		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.13045 × 10 <sup>-2</sup>			
A6 = 0.11643 × 10 <sup>-4</sup>			
A8 = 0.51406 × 10 <sup>-5</sup>			
[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10			
A4 = -0.22747 × 10 <sup>-2</sup>			
A6 = -0.36716 × 10 <sup>-5</sup>			
A8 = -0.32887 × 10 <sup>-6</sup>			

[0252]

TABLE 6

Construction Data of Example 6  
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)  
FNO = 2.74 3.11 3.60 (F numbers)

Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 13.380	d1 = 0.650	N1 = 1.75450	v1 = 51.57
r2 = 5.890	d2 = 1.499		
r3* = 12.328	d3 = 1.400	N2 = 1.52510	v2 = 56.38

TABLE 6-continued

r4 = 5.632	d4 = 1.632		
r5 = 7.068	d5 = 1.753	N3 = 1.84777	v3 = 27.54
r6 = 10.246	d6 = 10.406 5.264 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 5.643	d8 = 1.901	N4 = 1.79073	v4 = 46.15
r9 = -74.805	d9 = 0.921		
r10 = -12.842	d10 = 0.600	N5 = 1.72145	v5 = 25.50
r11 = 5.928	d11 = 0.400		
r12* = 11.144	d12 = 2.170	N6 = 1.52510	v6 = 56.38
r13 = -9.099	d13 = 1.000 3.519 7.154		
r14 = 11.107	d14 = 3.164	N7 = 1.51680	v7 = 64.20
r15 = 56.703	d15 = 0.796		
r16 = ∞	d16 = 3.400	N8 = 1.54426	v8 = 69.60
r17 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.38905 × 10 <sup>-3</sup>			
A6 = 0.24379 × 10 <sup>-5</sup>			
A8 = 0.38282 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10			
A4 = -0.13386 × 10 <sup>-2</sup>			
A6 = -0.11975 × 10 <sup>-4</sup>			
A8 = -0.53773 × 10 <sup>-5</sup>			

[0253]

TABLE 7

Construction Data of Example 7  
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)  
FNO = 2.73 3.10 3.60 (F numbers)

Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 14.718	d1 = 0.650	N1 = 1.75450	v1 = 51.57
r2 = 6.639	d2 = 1.307		
r3* = 11.594	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 5.294	d4 = 1.465		
r5 = 6.937	d5 = 1.858	N3 = 1.84759	v3 = 26.85
r6 = 10.034	d6 = 10.621 5.340 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 6.969	d8 = 2.905	N4 = 1.85000	v4 = 40.04
r9 = -11.743	d9 = 0.210		
r10 = -8.399	d10 = 1.855	N5 = 1.72131	v5 = 25.51
r11 = 5.522	d11 = 0.400		
r12 = 11.032	d12 = 2.012	N6 = 1.75450	v6 = 51.57
r13 = -21.657	d13 = 1.000 3.398 6.919		
r14* = 8.536	d14 = 3.241	N7 = 1.52510	v7 = 56.38
r15 = 29.006	d15 = 0.676		
r16 = ∞	d16 = 3.400	N8 = 1.54426	v8 = 69.60
r17 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.35342 × 10 <sup>-3</sup>			
A6 = 0.71258 × 10 <sup>-6</sup>			
A8 = 0.33647 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 14th Surface (r14)]			
ε = 0.10000 × 10			
A4 = -0.23473 × 10 <sup>-3</sup>			
A6 = 0.43912 × 10 <sup>-5</sup>			
A8 = 0.10409 × 10 <sup>-6</sup>			

[0254]

TABLE 8

Construction Data of Example 8			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.75 3.10 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1* = 14.652	d1 = 1.200	N1 = 1.58340	v1 = 30.23
r2 = 8.289	d2 = 1.623		
r3 = 26.068	d3 = 0.900	N2 = 1.79271	v2 = 45.90
r4 = 5.496	d4 = 1.179		
r5 = 7.356	d5 = 1.921	N3 = 1.84666	v3 = 23.82
r6 = 15.373	d6 = 10.224 5.176 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 7.124	d8 = 3.411	N4 = 1.85000	v4 = 40.04
r9 = -11.538	d9 = 0.154		
r10 = -8.339	d10 = 1.713	N5 = 1.72418	v5 = 25.37
r11 = 5.686	d11 = 0.401		
r12 = 10.731	d12 = 2.078	N6 = 1.75450	v6 = 51.57
r13 = -18.326	d13 = 1.000 3.307 6.708		
r14* = 8.148	d14 = 3.002	N7 = 1.52510	v7 = 56.38
r15 = 16.995	d15 = 0.795		
r16 = ∞	d16 = 3.400	N8 = 1.54426	v8 = 69.60
r17 = ∞			
[Aspherical Coefficients of 1st Surface (r1)]			
ε = 0.10000 × 10			
A4 = 0.15951 × 10 <sup>-3</sup>			
A6 = 0.14779 × 10 <sup>-6</sup>			
A8 = 0.56026 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 14th Surface (r14)]			
ε = 0.10000 × 10			
A4 = -0.27776 × 10 <sup>-3</sup>			
A6 = 0.23365 × 10 <sup>-5</sup>			
A8 = 0.19731 × 10 <sup>-6</sup>			

[0255]

TABLE 9

Construction Data of Example 9			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.73 3.10 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 52.355	d1 = 1.100	N1 = 1.72677	v1 = 52.55
r2 = 6.927	d2 = 3.324		
r3* = 23.902	d3 = 1.940	N2 = 1.58340	v2 = 30.23
r4 = -100.448	d4 = 14.827 7.138 1.500		
r5 = ∞ (Aperture Stop)	d5 = 1.500		
r6 = 5.036	d6 = 3.339	N3 = 1.77742	v3 = 47.95
r7 = -12.586	d7 = 0.234		
r8 = -10.396	d8 = 0.800	N4 = 1.79850	v4 = 22.60
r9 = 16.524	d9 = 0.740		
r10 = -7.142	d10 = 1.200	N5 = 1.58340	v5 = 30.23
r11* = -26.834	d11 = 1.000 2.921 5.663		
r12 = 15.086	d12 = 2.096	N6 = 1.48749	v6 = 70.44
r13 = -14.941	d13 = 0.500		
r14 = ∞	d14 = 3.400	N7 = 1.54426	v7 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10			
A4 = 0.24908 × 10 <sup>-3</sup>			
A6 = -0.62198 × 10 <sup>-7</sup>			
A8 = 0.10295 × 10 <sup>-6</sup>			
[Aspherical Coefficients of 11th Surface (r11)]			
ε = 0.10000 × 10			
A4 = 0.39625 × 10 <sup>-2</sup>			
A6 = 0.16585 × 10 <sup>-3</sup>			
A8 = 0.13563 × 10 <sup>-4</sup>			

[0256]

TABLE 10

Construction Data of Example 10			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.75 3.11 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1* = 17.928	d1 = 1.200	N1 = 1.58340	v1 = 30.23
r2 = 9.608	d2 = 1.325		
r3 = 19.410	d3 = 0.900	N2 = 1.80280	v2 = 44.68
r4 = 5.204	d4 = 1.288		
r5 = 7.294	d5 = 1.940	N3 = 1.84666	v3 = 23.82
r6 = 14.586	d6 = 10.102 5.348 1.500		
r7 = ∞ (Aperture Stop)	d7 = 1.500		
r8 = 6.594	d8 = 4.206	N4 = 1.81063	v4 = 43.80
r9 = -10.411	d9 = 0.208		
r10 = -7.270	d10 = 0.600	N5 = 1.70098	v5 = 26.53
r11 = 5.447	d11 = 0.504		
r12 = 10.684	d12 = 2.062	N6 = 1.75450	v6 = 51.57
r13 = -20.769	d13 = 1.000 3.880 6.996		
r14* = 6.351	d14 = 2.209	N7 = 1.52510	v7 = 56.38
r15 = 12.184	d15 = 1.055 0.800 1.067		
r16 = ∞	d16 = 3.400	N8 = 1.54426	v8 = 69.60
r17 = ∞			
[Aspherical Coefficients of 1st Surface (r1)]			
ε = 0.10000 × 10			
A4 = 0.19398 × 10 <sup>-3</sup>			
A6 = 0.47895 × 10 <sup>-6</sup>			
A8 = 0.46069 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 14th Surface (r14)]			
ε = 0.10000 × 10			
A4 = -0.37579 × 10 <sup>-3</sup>			
A6 = -0.11089 × 10 <sup>-5</sup>			
A8 = 0.87379 × 10 <sup>-7</sup>			

[0257]

TABLE 11

Construction Data of Example 11			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System)			
FNO = 2.97 3.27 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = -112.214			
r2 = 7.682	d1 = 1.200	N1 = 1.63347	v1 = 56.87
	d2 = 1.473		
r3* = 17.799	d3 = 2.175	N2 = 1.58340	v2 = 30.23
r4 = 274.206	d4 = 16.482	8.078 1.500	
r5 = ∞ (Aperture Stop)	d5 = 1.500		
r6 = 5.066	d6 = 2.164	N3 = 1.84746	v4 = 40.25
r7 = -15.255	d7 = 0.208		
r8 = -13.752	d8 = 0.800	N4 = 1.79850	v5 = 22.60
r9 = 7.640	d9 = 0.352		
r10* = 8.419	d10 = 1.200	N5 = 1.58340	v6 = 30.23
r11 = 4.700	d11 = 1.000	1.802 2.808	
r12 = 40.534	d12 = 2.262	N6 = 1.51838	v7 = 66.35
r13 * = -6.756			

TABLE 11-continued

Construction Data of Example 11			
f = 5.4 mm 7.5 mm 10.5 mm (Focal Length of the Entire Optical System) FNO = 2.97 3.27 3.60 (F numbers)			
r14 = ∞	d13 = 1.131	2.007 3.472	
	d14 = 3.400	N7 = 1.54426	v8 = 69.60
r15 = ∞			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10 A4 = 0.24372 × 10 <sup>-3</sup> A6 = -0.10309 × 10 <sup>-6</sup> A8 = 0.84837 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 10th Surface (r10)]			
ε = 0.10000 × 10 A4 = -0.35107 × 10 <sup>-2</sup> A6 = -0.17279 × 10 <sup>-3</sup> A8 = -0.80824 × 10 <sup>-5</sup>			
[Aspherical Coefficients of 13th Surface (r13)]			
ε = 0.10000 × 10 A4 = 0.11613 × 10 <sup>-3</sup> A6 = -0.34635 × 10 <sup>-4</sup> A8 = 0.66386 × 10 <sup>-6</sup>			

[0258]

TABLE 12

Construction Data of Example 12			
f = 5.4 mm 8.0 mm 12.0 mm (Focal Length of the Entire Optical System) FNO = 2.55 2.95 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 64.355			
r2 = 9.616	d1 = 0.650	N1 = 1.48749	v1 = 70.44
r3* = 15.072	d2 = 1.136		
r4 = 6.352	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r5 = 8.584	d4 = 1.939		
r6 = 12.547	d5 = 2.060	N3 = 1.84877	v3 = 32.01
r7 = ∞(Aperture Stop)	d6 = 15.531	7.207 1.500	
r8 = 5.666	d7 = 1.500		
r9 = -8.847	d8 = 3.346	N4 = 1.75450	v4 = 51.57
r10 = -7.390	d9 = 0.100		
r11 = 4.818	d10 = 0.600	N5 = 1.58340	v5 = 30.23
r12* = 6.048	d11 = 0.400		
r13 = 9.906	d12 = 2.459	N6 = 1.52510	v6 = 56.38
r14 = 11.941	d13 = 1.000	3.334 6.995	
r15* = -29.235	d14 = 1.979	N7 = 1.52510	v7 = 56.38
	d15 = 0.500		
r16 = ∞	d16 = 3.400	N8 = 1.54426	v8 = 69.60
r17 = ∞			

TABLE 12-continued

Construction Data of Example 12			
f = 5.4 mm 8.0 mm 12.0 mm (Focal Length of the Entire Optical System) FNO = 2.55 2.95 3.60 (F numbers)			
[Aspherical Coefficients of 3rd Surface (r3)]			
ε = 0.10000 × 10 A4 = 0.17978 × 10 <sup>-3</sup> A6 = -0.30828 × 10 <sup>-6</sup> A8 = 0.71904 × 10 <sup>-7</sup>			
[Aspherical Coefficients of 12th Surface (r12)]			
ε = 0.10000 × 10 A4 = -0.18066 × 10 <sup>-2</sup> A6 = -0.54257 × 10 <sup>-4</sup> A8 = -0.76508 × 10 <sup>-5</sup>			
[Aspherical Coefficients of 15th Surface (r15)]			
ε = 0.10000 × 10 A4 = 0.29756 × 10 <sup>-3</sup> A6 = -0.62953 × 10 <sup>-5</sup> A8 = -0.77785 × 10 <sup>-7</sup>			

[0259]

TABLE 13

Construction Data of Example 13			
f = 5.4 mm 8.8 mm 14.0mm (Focal Length of the Entire Optical System) FNO = 2.34 2.84 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 25.623			
r2 = 9.290	d1 = 0.650	N1 = 1.48749	v1 = 70.44
	d2 = 1.626		
r3* = 19.577	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 5.973	d4 = 2.273		
r5 = 7.949	d5 = 2.008	N3 = 1.84807	v3 = 28.75
r6 = 10.541	d6 = 16.801	7.154 1.500	
r7 = ∞(Aperture Stop)	d7 = 1.500		
r8 = 5.107	d8 = 2.743	N4 = 1.64626	v4 = 56.17
r9 = -9.178	d9 = 0.100		
r10 = -8.533	d10 = 0.600	N5 = 1.58340	v5 = 30.23
r11 = 7.962	d11 = 0.849		
r12* = 7.572	d12 = 1.401	N6 = 1.52510	v6 = 56.38
r13 = 8.290	d13 = 1.000	4.278 9.371	
r14* = 9.062	d14 = 1.423	N7 = 1.58340	v7 = 30.23
r15 = 6.924	d15 = 0.747		
r16 = 11.941	d16 = 1.979	N8 = 1.52510	v8 = 56.38
r17* = -29.488	d17 = 0.500		
r18 = ∞	d18 = 3.400	N9 = 1.54426	v9 = 69.60
r19 = ∞			

TABLE 13-continued

Construction Data of Example 13			
f = 5.4 mm 8.8 mm 14.0mm (Focal Length of the Entire Optical System) FNO = 2.34 2.84 3.60 (F numbers)			
[Aspherical Coefficients of 3rd Surface (r3)]			
$\epsilon = 0.10000 \times 10$ $A4 = 0.16055 \times 10^{-3}$ $A6 = 0.48397 \times 10^{-7}$ $A8 = 0.67121 \times 10^{-7}$			
[Aspherical Coefficients of 12th Surface (r12)]			
$\epsilon = 0.10000 \times 10$ $A4 = -0.25048 \times 10^{-2}$ $A6 = -0.87701 \times 10^{-4}$ $A8 = -0.12082 \times 10^{-4}$			
[Aspherical Coefficients of 14th Surface (r14)]			
$\epsilon = 0.10000 \times 10$ $A4 = -0.52484 \times 10^{31.3}$ $A6 = 0.58442 \times 10^{-5}$ $A8 = 0.87159 \times 10^{-8}$			
[Aspherical Coefficients of 17th Surface (r17)]			
$\epsilon = 0.10000 \times 10$ $A4 = -0.91828 \times 10^{-3}$ $A6 = -0.59033 \times 10^{-5}$ $A8 = 0.27335 \times 10^{-6}$			

[0260]

TABLE 14

Construction Data of Example 14			
f = 5.4 mm 7.5 mm 13.5 mm (Focal Length of the Entire Optical System) FNO = 2.08 2.48 3.60 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 14.018	d1 = 0.650	N1 = 1.74388	v1 = 51.93
r2 = 6.286	d2 = 1.790		
r3* = 17.191	d3 = 1.400	N2 = 1.52510	v2 = 56.38
r4 = 5.770	d4 = 0.907		
r5 = 6.726	d5 = 1.953	N3 = 1.84666	v3 = 23.82
r6 = 10.531	d6 = 9.731	5.843 1.500	
r7 = $\infty$ (Aperture Stop)	d7 = 1.500		
r8 = 6.489	d8 = 1.774	N4 = 1.85000	v4 = 40.04
r9 = 52.968	d9 = 0.665		
r10 = -31.304	d10 = 0.600	N5 = 1.77185	v5 = 23.46
r11 = 6.642	d11 = 0.400		
r12* = 11.190	d12 = 2.101	N6 = 1.52510	v6 = 56.38
r13 = -9.334	d13 = 1.000	5.310 15.247	
r14 = -10.861	d14 = 1.200	N7 = 1.58340	v7 = 30.23
r15* = 16.708	d15 = 0.100		
r16 = 12.354			

TABLE 14-continued

Construction Data of Example 14			
f = 5.4 mm 7.5 mm 13.5 mm (Focal Length of the Entire Optical System) FNO = 2.08 2.48 3.60 (F numbers)			
r17 = -10.876	d16 = 2.934	N8 = 1.84353	v8 = 40.59
	d17 = 2.914	2.385 0.717	
r18 = $\infty$	d18 = 3.400	N9 = 1.54426	v9 = 69.60
r19 = $\infty$			
[Aspherical Coefficients of 3rd Surface (r3)]			
$\epsilon = 0.10000 \times 10$ $A4 = 0.28799 \times 10^{-3}$ $A6 = 0.40089 \times 10^{-5}$ $A8 = 0.14823 \times 10^{-6}$			
[Aspherical Coefficients of 12th Surface (r12)]			
$\epsilon = 0.10000 \times 10$ $A4 = -0.62816 \times 10^{-3}$ $A6 = -0.22891 \times 10^{-4}$ $A8 = 0.42945 \times 10^{-6}$			
[Aspherical Coefficients of 15th Surface (r15)]			
$\epsilon = 0.10000 \times 10$ $A4 = 0.60130 \times 10^{-3}$ $A6 = -0.42374 \times 10^{-5}$ $A8 = 0.11268 \times 10^{-7}$			

[0261]

TABLE 15

Construction Data of Example 15			
f = 5.4 mm 8.4 mm 15.6 mm (Focal Length of the Entire Optical System) FNO = 2.57 3.04 4.20 (F numbers)			
Radius of Curvature	Axial Distance	Refractive Index (Nd)	Abbe Number (d)
r1 = 34.564	d1 = 1.600	N1 = 1.52510	v1 = 56.38
r2 = 7.185	d2 = 3.500		
r3* = 10.666	d3 = 2.344	N2 = 1.75000	v2 = 25.14
r4 = 17.516	d4 = 22.572	11.179 1.713	
r5 = $\infty$	d5 = 1.500		
r6 = 8.000	d6 = 2.941	N3 = 1.80420	v3 = 46.50
r7 = -8.598	d7 = 0.010	N4 = 1.51400	v4 = 42.83
r8 = -8.598	d8 = 0.600	N5 = 1.70055	v5 = 30.11
r9 = 8.182	d9 = 0.200		
r10* = 5.244	d10 = 3.249	N6 = 1.52510	v6 = 56.38
r11* = 6.000	d11 = 2.740	5.844 13.277	
r12 = 21.195	d12 = 2.000	N7 = 1.48749	v7 = 70.44
r13 = -16.672	d13 = 1.086		
r14 = $\infty$	d14 = 3.400	N8 = 1.51680	v8 = 64.20
r15 = $\infty$			



TABLE 15-continued

Construction Data of Example 15				
f = 5.4 mm 8.4 mm 15.6 mm (Focal Length of the Entire Optical System)				
FNO = 2.57 3.04 4.20 (F numbers)				
[Aspherical Coefficients of 3rd Surface (r1)]				
$\epsilon = 0.10000 \times 10$				
$A4 = 0.43400 \times 10^{-3}$				
$A6 = -0.55461 \times 10^{-5}$				
$A8 = 0.27915 \times 10^{-7}$				
[Aspherical Coefficients of 12th Surface (r2)]				
$\epsilon = 0.10000 \times 10$				
$A4 = 0.26861 \times 10^{-3}$				
$A6 = 0.25040 \times 10^{-5}$				
$A8 = 0.23353 \times 10^{-6}$				
[Aspherical Coefficients of 15th Surface (r10)]				
$\epsilon = 0.10000 \times 10$				
$A4 = -0.30306 \times 10^{-3}$				
$A6 = -0.13415 \times 10^{-4}$				
$A8 = -0.19911 \times 10^{-5}$				
[Aspherical Coefficients of 15th Surface (r11)]				
$\epsilon = 0.10000 \times 10$				
$A4 = 0.19342 \times 10^{-2}$				
$A6 = 0.59893 \times 10^{-4}$				
$A8 = -0.42081 \times 10^{-5}$				

[0262]

TABLE 16

The variables used in Conditions (1) to (5) in Examples 1 to 5					
	$\phi 1$	$\phi 2$	$\phi W$		
Example 1	0.076171	0.102604	0.185185		
		$\phi Pi$	hi	$\phi Pi/\phi W \times hi$	Sum
Example 1	G2:	-0.04968	1.088763	-0.292107	
	G6:	0.11313	1.264821	0.7726821	0.480575
Example 2	$\phi 1$	$\phi 2 \phi W$			
Example 2	0.069512	0.102665	0.185162		
		$\phi Pi$	hi	$\phi Pi/\phi W \times hi$	Sum
Example 2	G2:	-0.06587	1.090648	-0.387944	
	G3:	0.045137	1.299594	0.3167591	
	G5:	-0.16797	1.270288	-1.152222	
	G6:	0.080916	1.2079	0.5277862	-0.69562
Example 3	$\phi 1$	$\phi 2 \phi W$			
Example 3	0.07421	0.104252	0.185186		
		$\phi Pi$	hi	$\phi Pi/\phi W \times hi$	Sum
Example 3	G2:	-0.05994	1.070319	-0.346422	
	G3:	-0.16771	1.288669	-1.167062	
	G5:	0.083429	1.23342	0.555676	-0.95781
Example 4	$\phi 1$	$\phi 2$			
Example 4	0.070779	0.089085	0.185184		
		$\phi Pi$	hi	$\phi Pi/\phi W \times hi$	Sum
Example 4	G3:	0.05212	1.068396	0.3006979	
	G5:	-0.15954	1.348671	-1.161906	-0.86121
Example 5	$\phi 1$	$\phi 2$			
Example 5	0.115	0.104369	0.185185		
		$\phi Pi$	hi	$\phi Pi/\phi W \times hi$	Sum
Example 5	G2:	-0.04227	1.161585	-0.265113	
	G6:	0.11589	1.553375	0.9721086	0.706996

[0263]

TABLE 17

The values corresponding to Conditions (1) to (5) in Examples 1 to 5					
	$ \phi 1/\phi 2 $	$\phi 2/\phi W$	$ \phi P/\phi 1 $	$ \phi P/\phi 2 $	$E\phi Pi/\phi W \times hi$
Example 1	0.41	0.55	G2: 0.65	G6: 1.10	0.48
Example 2	0.38	0.55	G2: 0.95	G5: 1.64	-0.70
			G3: 0.65	G6: 0.79	
Example 3	0.40	0.56	G2: 0.81	G5: 1.61	-0.96
			G6: 0.80		
Example 4	0.38	0.48	G3: 0.74	G5: 1.79	-0.86
Example 5	0.62	0.56	G2: 0.37	G6: 1.11	0.71

[0264]

TABLE 18

The values corresponding to Conditions (9) to (13) and (18) to (20) in Examples 6 to 15					
	$ \phi P/\phi W $	$ \phi P/\phi 1 $	$ \phi P/\phi 2 $	$ \phi P/\phi 3 $	M3/M2
Example 6	G2: 0.25	0.63			0.00
	G6: 0.55		1.10		
Example 7	G2: 0.27	0.72			0.00
	G7: 0.25		1.00		
Example 8	G1: 0.15	0.39			0.00
	G7: 0.20		1.00		
Example 9	G2: 0.16	0.59			0.00
	G5: 0.32		0.68		
Example 10	G1: 0.14	0.38			0.00
	G7: 0.24		0.47	1.00	
Example 11	G2: 0.17	0.57		0.56	
	G5: 0.26		0.65		
Example 12	G2: 0.24	0.86		0.00	
	G5: 1.10		2.27		
	G6: 0.22		0.46		
Example 13	G7: 0.33			1.00	
	G2: 0.32	0.97			0.00
	G5: 0.78		1.64		
	G6: 0.05		0.11		
	G7: 0.08			0.35	
	G8: 0.33			1.40	
Example 14	G2: 0.31271	0.79		-0.18	
	G6: 0.5375		1.19		
	G7: 0.48626			1.38	
$\log(\beta 2T/\beta 2W)/\log Z$					
Example 6	G2:	1.00			0.00
Example 7	G2:	1.00			0.00
Example 8	G1:	1.00			0.00
Example 9	G2:	0.99			0.01
Example 10	G1:	1.00			0.00
Example 11	G2:	1.87			-0.87
Example 12	G2:	0.99			0.01
Example 13	G2:	1.00			0.00
Example 14	G2:	0.75			0.25
$\log(\beta 3T/\beta 3W)/\log(\beta 2T/\beta 2W)$					
Example 6	G2:				0.00
Example 7	G2:				0.00
Example 8	G1:				0.00
Example 9	G2:				0.01
Example 10	G1:				0.00
Example 11	G2:				-0.46
Example 12	G2:				0.01
Example 13	G2:				0.00
Example 14	G2:				0.34
$\cap P/ \phi W \times h$					
$E\phi Pi/\phi W \times hi$					

TABLE 18-continued

The values corresponding to Conditions (9) to (13) and (18) to (20) in Examples 6 to 15				
Example 6	G2:	-0.27		
	G6:	0.66		0.39
Example 7	G2:	-0.28		
	G7:	0.17		-0.12
Example 8	G1:	-0.15		
	G7:	0.14		-0.01
Example 9	G2:	0.21		
	G5:	-0.30		-0.09
Example 10	G1:	-0.14		
	G7:	0.16		0.02
Example 11	G2:	0.19		
	G5:	-0.26		-0.08
Example 12	G2:	-0.26		
	G5:	-1.20		
	G6:	0.23		
	G7:	0.16		-1.06
Example 13	G2:	-0.33		
	G5:	-0.93		
	G6:	0.06		
	G7:	-0.04		
Example 14	G8:	0.14		-1.10
	G2:	-0.34		
	G6:	0.68		
	G7:	-0.25		0.09
		$ \phi 1/\phi W $	$\phi 2/\phi W$	$\phi 3/\phi W$
Example 6	G2:	0.40	0.50	0.21
Example 7	G2:	0.37	0.50	0.25
Example 8	G1:	0.40	0.52	0.20
Example 9	G2:	0.27	0.47	0.34
Example 10	G1:	0.38	0.51	0.24
Example 11	G2:	0.29	0.40	0.48
Example 12	G2:	0.29	0.48	0.33
Example 13	G2:	0.33	0.47	0.23
Example 14	G2:	0.39	0.45	0.35
		$C_p \times (N'-N)/\phi W$		
		Object side	Image side	
Example 6	G2:	0.23	-0.50	
	G6:	0.25	0.31	
Example 7	G2:	0.25	-0.54	
	G7:	0.33	-0.10	
Example 8	G1:	0.22	-0.38	
	G7:	0.35	-0.17	
Example 9	G2:	0.13	0.031	
	G5:	-0.44	0.12	
Example 10	G1:	0.18	-0.33	
	G7:	0.45	-0.23	
Example 11	G2:	0.18	-0.01	
	G5:	0.37	-0.67	
Example 12	G2:	0.19	-0.45	
	G5:	-0.43	-0.65	
	G6:	0.47	-0.29	
Example 13	G7:	0.24	0.10	
	G2:	0.15	-0.48	
	G5:	-0.37	-0.40	
	G6:	0.37	-0.34	
Example 14	G7:	0.35	-0.46	
	G8:	0.24	0.10	
	G2:	0.17	-0.49	
	G6:	0.25	0.30	
	G7:	-0.29	-0.19	

**[0265]**

TABLE 19

The values corresponding to Conditions (7) and (8) in Examples 1 to 5	
Example 1	
<u>[3rd Surface (r3)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00037
0.40Y	-0.00634
0.60Y	-0.03585
0.80Y	-0.13341
1.00Y	-0.40394
<u>[12th Surface (r12)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f2\}$
0.00Y	-0.00000
0.20Y	-0.00037
0.40Y	-0.00598
0.60Y	-0.03057
0.80Y	-0.09885
1.00Y	-0.25219
Example 2	
<u>[3rd Surface (r3)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00051
0.40Y	-0.00870
0.60Y	-0.04931
0.80Y	-0.18376
1.00Y	-0.55608
<u>[10th Surface (r10)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f2\}$
0.00Y	0.00000
0.20Y	0.00005
0.40Y	0.00077
0.60Y	0.00408
0.80Y	0.01399
1.00Y	0.03852
<u>[12th Surface (r12)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00072
0.40Y	-0.01169
0.60Y	-0.06096
0.80Y	-0.20787
1.00Y	-0.58532
Example 3	
<u>[3rd Surface (r3)]</u>	
Height	$( X  -  X0 ) / \{C0(N^{\circ} \cdot N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00050
0.40Y	-0.00851
0.60Y	-0.04778
0.80Y	-0.17765
1.00Y	-0.54143

TABLE 19-continued

[10th Surface (r10)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	-0.00000
0.20Y	0.00003
0.40Y	0.00046
0.60Y	0.00259
0.80Y	0.00945
1.00Y	0.02790
[12th Surface (r12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00065
0.40Y	-0.01058
0.60Y	-0.05546
0.80Y	-0.19007
1.00Y	-0.53702
Example 4 [5th Surface (r5)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00008
0.40Y	-0.00129
0.60Y	-0.00719
0.80Y	-0.02684
1.00Y	-0.08390
[6th Surface (r6)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00066
0.40Y	-0.01070
0.60Y	-0.05580
0.80Y	-0.18492
1.00Y	-0.48426
[11th Surface (r11)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	-0.00000
0.20Y	-0.00017
0.40Y	-0.00282
0.60Y	-0.01457
0.80Y	-0.04772
1.00Y	-0.12247
Example 5 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00058
0.40Y	-0.00938
0.60Y	-0.04968
0.80Y	-0.17281
1.00Y	-0.49672
[12th Surface (n12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00039
0.40Y	-0.00630
0.60Y	-0.03215

TABLE 19-continued

0.80Y	-0.10366
1.00Y	-0.26303
The values corresponding to Conditions (15) and (17) in Examples 6 to 15	
Example 6 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00036
0.40Y	-0.00585
0.60Y	-0.03124
0.80Y	-0.10983
1.00Y	-0.31946
[12th Surface (r12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00016
0.40Y	-0.00266
0.60Y	-0.01382
0.80Y	-0.04620
1.00Y	-0.12441
Example 7 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00040
0.40Y	-0.00645
0.60Y	-0.03442
0.80Y	-0.12249
1.00Y	-0.36724
[14th Surface (r14)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00005
0.40Y	-0.00072
0.60Y	-0.00343
0.80Y	-0.00979
1.00Y	-0.02004
Example 8 [1st Surface (r1)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00047
0.40Y	-0.00762
0.60Y	-0.04017
0.80Y	-0.13975
1.00Y	-0.40512
[14th Surface (r14)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00007
0.40Y	-0.00103
0.60Y	-0.00497
0.80Y	-0.01421
1.00Y	-0.02846

TABLE 19-continued

Example 9 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00034
0.40Y	-0.00549
0.60Y	-0.02824
0.80Y	-0.09332
1.00Y	-0.24896
[11th Surface (r11)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00086
0.40Y	-0.01414
0.60Y	-0.07574
0.80Y	-0.26114
1.00Y	-0.14147
Example 10 [1st Surface (r1)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00077
0.40Y	-0.01256
0.60Y	-0.06639
0.80Y	-0.22928
1.00Y	-0.65070
[14th Surface (r14)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00008
0.40Y	-0.00129
0.60Y	-0.00655
0.80Y	-0.02065
1.00Y	-0.04955
Example 11 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00041
0.40Y	-0.00663
0.60Y	-0.03428
0.80Y	-0.11465
1.00Y	-0.31309
[10th Surface (r10)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00016
0.40Y	-0.00260
0.60Y	-0.01388
0.80Y	-0.04736
1.00Y	-0.12790
Example 12 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00058

TABLE 19-continued

0.40Y	-0.00940
0.60Y	-0.04961
0.80Y	-0.17667
1.00Y	-0.53893
[12th Surface (r12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00011
0.40Y	-0.00182
0.60Y	-0.00969
0.80Y	-0.03330
1.00Y	-0.09218
[15th Surface (r15)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00033
0.40Y	-0.00502
0.60Y	-0.02364
0.80Y	-0.06629
1.00Y	-0.13286
Example 13 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00082
0.40Y	-0.01333
0.60Y	-0.07171
0.80Y	-0.26196
1.00Y	-0.82010
[12th Surface (r12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00020
0.40Y	-0.00328
0.60Y	-0.01759
0.80Y	-0.06132
1.00Y	-0.17301
[14th Surface (r14)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00020
0.40Y	-0.00311
0.60Y	-0.01525
0.80Y	-0.04605
1.00Y	-0.10564
[17th Surface (r17)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	0.00068
0.40Y	0.01090
0.60Y	0.05583
0.80Y	0.17801
1.00Y	0.43402

TABLE 19-continued

Example 14 [3rd Surface (r3)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f1\}$
0.00Y	-0.00000
0.20Y	-0.00048
0.40Y	-0.00802
0.60Y	-0.04370
0.80Y	-0.15559
1.00Y	-0.44995
[12th Surface (r12)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f2\}$
0.00Y	0.00000
0.20Y	-0.00007
0.40Y	-0.00110
0.60Y	-0.00579
0.80Y	-0.01922
1.00Y	-0.04962
[15th Surface (r15)]	
Height	$( X  -  X0 )/\{C0(N'-N) \cdot f3\}$
0.00Y	0.00000
0.20Y	-0.00067
0.40Y	-0.01051
0.60Y	-0.05178
0.80Y	-0.15744
1.00Y	-0.36553

What is claimed is:

1. A zoom lens system comprising, in order from an object side:

- a first lens unit;
- a second lens unit having a positive optical power; and
- a third lens unit,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the lens units is a plastic lens element that fulfills the following conditions:

$-0.8 < C_p \times (N' - N) / \phi W < 0.8$   $-0.45 < M3 / M2 < 0.90$  (where  $\phi T / \phi W > 1.6$ )

where

- $C_p$  represents a curvature of the plastic lens element;
- $\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end;
- $N'$  represents a refractive index of an object-side medium of an aspherical surface for d line;
- $N$  represents a refractive index of an image-side medium of an aspherical surface for d line;
- $M3$  represents an amount of movement of the third lens unit (where the direction pointing to the object side is negative with respect to the wide-angle end);

$M2$  represents an amount of movement of the second lens unit; and

$\phi T$  represents an optical power of the entire zoom lens system at a telephoto end.

2. The zoom lens system of claim 1 wherein said first lens unit has a negative optical power.

3. The zoom lens system of claim 1 wherein said second lens unit includes a positive lens element and a negative lens element.

4. The zoom lens system of claim 1 wherein said third lens unit has a positive optical power.

5. The zoom lens system of claim 1 wherein said plastic lens element is contained in the first lens unit and fulfills the following conditions:

$|\phi P / \phi 1| < 1.20$   $0.20 < |\phi 1 / \phi W| < 0.70$

where

$\phi P$  represents an optical power of the plastic lens element;

$\phi 1$  represents an optical power of the first lens unit; and

$\phi T$  represents an optical power of the entire zoom lens system at a telephoto end.

6. The zoom lens system of claim 5 wherein said first lens unit has a negative optical power.

7. The zoom lens system of claim 6 wherein said first lens unit includes a positive lens element and a negative lens element.

8. The zoom lens system of claim 5 wherein said third lens unit has a positive optical power.

9. The zoom lens system of claim 1, wherein said plastic lens element is included in the second lens unit and fulfills the following conditions:

$|\phi P / \phi 2| < 2.5$   $0.25 < \phi 2 / \phi W < 0.75$

where

$\phi P$  represents an optical power of the plastic lens element; and

$\phi 2$  represents an optical power of the second lens unit.

10. The zoom lens system of claim 9 wherein said first lens unit has a negative optical power.

11. The zoom lens system of claim 9 wherein said second lens unit includes a positive lens element and a negative lens element.

12. The zoom lens system of claim 9 wherein said third lens unit has a positive optical power.

13. The zoom lens system of claim 1 wherein said plastic lens element is included in the third lens unit and fulfills the following conditions:

$-0.30 < M3 / M2 < 0.90$   $|\phi P / \phi 3| < 1.70$   $0.1 < \phi 3 / \phi W < 0.60$

where

$\phi P$  represents an optical power of the plastic lens element; and

$\phi 3$  represents an optical power of the third lens unit.

14. The zoom lens system of claim 13 wherein said first lens unit has a negative optical power.

15. The zoom lens system of claim 13 wherein said third lens unit has a positive optical power.

16. The zoom lens system of claim 1, wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the second lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad 0.5 < \log(\beta 2T / \beta 2W) / \log Z < 2.2$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 2W$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta 2T$  represents a lateral magnification of the second lens unit at the telephoto end;

$Z$  represents a zoom ratio; and

$\log$  represents a natural logarithm.

17. The zoom lens system of claim 16 wherein said first lens unit has a negative optical power.

18. The zoom lens system of claim 16 wherein said third lens unit has a positive optical power.

19. The zoom lens system as claimed in claim 1, wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the third lens element are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad -1.2 < \log(\beta 3T / \beta 3W) / \log Z < 0.5$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 3W$  represents a lateral magnification of the third lens unit at the wide-angle end;

$\beta 3T$  represents a lateral magnification of the third lens unit at the telephoto end;

$Z$  represents a zoom ratio; and

$\log$  represents a natural logarithm.

20. The zoom lens system of claim 19 wherein said first lens unit has a negative optical power.

21. The zoom lens system of claim 19 wherein said second lens unit includes a positive lens element and a negative lens element.

22. The zoom lens system of claim 19 wherein said third lens unit has a positive optical power.

23. The zoom lens system of claim 1, wherein at least one of the lens elements included in the second lens unit and at least one of the lens elements included in the third lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad 0.75 < \log(\beta 3T / \beta 3W) / \log(\beta 2T / \beta 2W) < 0.65$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 2W$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta 2T$  represents a lateral magnification of the second lens unit at the telephoto end;

$\beta 3W$  represents a lateral magnification of the third lens unit at the wide-angle end;

$\beta 3T$  represents a lateral magnification of the third lens unit at the telephoto end; and

$\log$  represents a natural logarithm.

24. The zoom lens system of claim 23 wherein said first lens unit has a negative optical power.

25. The zoom lens system of claim 23 wherein said second lens unit includes a positive lens element and a negative lens element.

26. The zoom lens system of claim 23 wherein said third lens unit has a positive optical power.

27. The zoom lens system comprising, in order from an object side:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit,

wherein zooming is achieved by varying a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the second lens unit is a plastic lens element that fulfills the following conditions:

$$|\phi P / \phi 2| < 2.5 \quad 0.25 < \phi 2 / \phi W < 0.75$$

where

$\phi P$  represents an optical power of the plastic lens element;

$\phi 2$  represents an optical power of the second lens unit; and

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end.

28. A zoom lens system comprising, in order from an object side:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the third lens unit is a plastic lens element that fulfill the following conditions:

$$-0.30 < M3 / M2 < 0.90 \quad |\phi P / \phi 3| < 1.70 \quad 0.1 < \phi 3 / \phi W < 0.60$$

where

$M3$  represents an amount of movement of the third lens unit (the direction pointing to the object side is negative with respect to a wide-angle end);

M2 represents an amount of movement of the second lens unit;

$\phi P$  represents an optical power of the plastic lens element;

$\phi 3$  represents an optical power of the third lens unit; and

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end.

29. A zoom lens system comprising, in order from an object side:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the second lens unit are plastic lens element that fulfills the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad 0.5 < \log(\beta 2T / \beta 2W) / \log Z < 2.2$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 2W$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta 2T$  represents a lateral magnification of the second lens unit at the telephoto end;

$Z$  represents a zoom ratio; and

$\log$  represents a natural logarithm.

30. A zoom lens system comprising, in order from an object side:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the third lens unit are plastic lens element that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad -1.2 < \log(\beta 3T / \beta 3W) / \log Z < 0.5$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 3W$  represents a lateral magnification of the third lens unit at the wide-angle end;

$\beta 3T$  represents a lateral magnification of the third lens unit at the telephoto end;

$Z$  represents a zoom ratio; and

$\log$  represents a natural logarithm.

31. A zoom lens system comprising, in order from an object side:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit having a positive optical power,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the second lens unit and at least one of the lens elements included in the third lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad -0.75 < \log(\beta 3T / \beta 3W) / \log(\beta 2T / \beta 2W) < 0.65$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 2W$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta 2T$  represents a lateral magnification of the second lens unit at the telephoto end;

$\beta 3W$  represents a lateral magnification of the third lens unit at the wide-angle end;

$\beta 3T$  represents a lateral magnification of the third lens unit at the telephoto end; and

$\log$  represents a natural logarithm.

32. A digital camera comprising a zoom lens system, a low pass filter and an image sensor, wherein said zoom lens system includes, in order from the object side thereof:

a first lens unit;

a second lens unit having a positive optical power; and

a third lens unit,

wherein zooming is achieved by moving at least two lens units so as to vary a distance between the first and second lens units and a distance between the second and third lens units, and wherein at least one of the lens elements included in the lens units is a plastic lens element that fulfills the following conditions:

$$-0.8 < C_p \times (N' - N) / \phi W < 0.8 \quad -0.45 < M3 / M2 < 0.90 \text{ (where } \phi T / \phi W > 1.6 \text{)}$$

where

$C_p$  represents a curvature of the plastic lens element;

$\phi W$  represents an optical power of the entire zoom lens system at a wide-angle end;

$N'$  represents a refractive index of an object-side medium of an aspherical surface for d line;

$N$  represents a refractive index of an image-side medium of an aspherical surface for d line;

$M3$  represents an amount of movement of the third lens unit (where the direction pointing to the object side is negative with respect to the wide-angle end);

$M2$  represents an amount of movement of the second lens unit; and

$\phi T$  represents an optical power of the entire zoom lens system at a telephoto end.

33. The digital camera of claim 32, wherein said first lens unit has a negative optical power.

34. The digital camera of claim 32, wherein said second lens unit includes a positive lens element and a negative lens element.

35. The digital camera of claim 32, wherein said third lens unit has a positive optical power.

36. The digital camera of claim 32, wherein said plastic lens element is contained in the first lens unit and fulfills the following conditions:

$$|\phi P / \phi 1| < 1.20 \quad 0.20 < \phi 1 / \phi W < 0.70$$

where

$\phi P$  represents an optical power of the plastic lens element;

$\phi 1$  represents an optical power of the first lens unit; and

$\phi T$  represents an optical power of the entire zoom lens system at a telephoto end.

37. The digital camera of claim 36, wherein said first lens unit has a negative optical power.

38. The digital camera of claim 37, wherein said first lens unit includes a positive lens element and a negative lens element.

39. The digital camera of claim 36, wherein said third lens unit has a positive optical power.

40. The digital camera of claim 32, wherein said plastic lens element is included in the second lens unit and fulfills the following conditions:

$$|\phi P / \phi 2| < 2.5 \quad 0.25 < \phi 2 / \phi W < 0.75$$

where

$\phi P$  represents an optical power of the plastic lens element; and

$\phi 2$  represents an optical power of the second lens unit.

41. The digital camera of claim 40, wherein said first lens unit has a negative optical power.

42. The digital camera of claim 40, wherein said second lens unit includes a positive lens element and a negative lens element.

43. The digital camera of claim 40, wherein said third lens unit has a positive optical power.

44. The zoom lens system of claim 32 wherein said plastic lens is included in the third lens unit and fulfills the following conditions:

$$-0.30 < M3 / M2 < 0.90 \quad |\phi P / \phi 3| < 1.70 \quad 0.1 < \phi W < 0.60$$

where

$\phi P$  represents an optical power of the plastic lens element; and

$\phi 3$  represents an optical power of the third lens unit.

45. The digital camera of claim 44, wherein said first lens unit has a negative optical power.

46. The digital camera of claim 44, wherein said third lens unit has a positive optical power.

47. The digital camera of claim 32, wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the second lens unit are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad 0.5 < \log(\beta 2T / \beta 2W) / \log Z < 2.2$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 2W$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta 2T$  represents a lateral magnification of the second lens unit at the telephoto end;

$Z$  represents a zoom ratio; and

$\log$  represents a natural logarithm.

48. The digital camera of claim 47, wherein said first lens unit has a negative optical power.

49. The digital camera of claim 47, wherein said third lens unit has a positive optical power.

50. The digital camera of claim 32, wherein at least one of the lens elements included in the first lens unit and at least one of the lens elements included in the third lens element are plastic lens elements that fulfill the following conditions:

$$-1.4 < \phi P_i / \phi W \times h_i < 1.4 \quad -1.2 < \log(\beta 3T / \beta 3W) / \log Z < 0.5$$

where

$\phi P_i$  represents an optical power of an  $i$ th plastic lens element;

$h_i$  represents a height of incidence at which a paraxial ray enters an object-side surface of the  $i$ th plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha 1$  and a height  $h1$ , for paraxial tracing, are 0 and 1, respectively;

$\beta 3W$  represents a lateral magnification of the third lens unit at the wide-angle end;



$\beta_{3T}$  represents a lateral magnification of the third lens unit at the telephoto end;

Z represents a zoom ratio; and

log represents a natural logarithm.

51. The digital camera of claim 50, wherein said first lens unit has a negative optical power.

52. The digital camera of claim 50, wherein said second lens unit includes a positive lens element and a negative lens element.

53. The digital camera of claim 50, wherein said third lens unit has a positive optical power.

54. The digital camera of claim 32, wherein at least one of the lens elements included in the second lens unit and at least one of the lens elements included in the third lens unit are plastic lens elements that fulfill the following conditions:

$$\begin{matrix} -1.4 < \phi_{Pi} / \phi_{W \times hi} < 1.4 & -0.75 < \log(\beta_{3T} / \beta_{3W}) / \log(\beta_{2T} / \beta_{2W}) < 0.65 \end{matrix}$$

where

$\phi_{Pi}$  represents an optical power of an ith plastic lens element;

hi represents a height of incidence at which a paraxial ray enters an object-side surface of the ith plastic lens element at a telephoto end, assuming that initial values of a converted inclination  $\alpha_1$  and a height h1, for paraxial tracing, are 0 and 1, respectively;

$\beta_{2W}$  represents a lateral magnification of the second lens unit at the wide-angle end;

$\beta_{2T}$  represents a lateral magnification of the second lens unit at the telephoto end;

$\beta_{3W}$  represents a lateral magnification of the third lens unit at the wide-angle end;

$\beta_{3T}$  represents a lateral magnification of the third lens unit at the telephoto end; and

log represents a natural logarithm.

55. The digital camera of claim 54, wherein said first lens unit has a negative optical power.

56. The digital camera of claim 54, wherein said second lens unit includes a positive lens element and a negative lens element.

57. The digital camera of claim 54, wherein said third lens unit has a positive optical power.

\* \* \* \* \*