



(51) International Patent Classification:

B66C 13/16 (2006.01) **B66C 1/12** (2006.01)
A61G 7/10 (2006.01) **B66C 1/40** (2006.01)

(21) International Application Number:

PCT/CA2011/000003

(22) International Filing Date:

6 January 2011 (06.01.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2,692,894 12 February 2010 (12.02.2010) CA

(71) Applicant (for all designated States except US): **BHM MEDICAL INC.** [CA/CA]; 2001 rue Tanguay Street, Magog, Quebec, J1X 5Y5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FAUCHER, Martin** [CA/CA]; 270 Cabana, Magog, Quebec, J1X 2C3 (CA). **JONCAS, Marie-Lou** [CA/CA]; 1256 Marini, Sherbrooke, Quebec, J1N 0L2 (CA). **BRULOTTE, Denis-Alexandre** [CA/CA]; 10 ch. des Peres, Magog, Quebec, J1X 5R9 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LIFT APPARATUS AND SYSTEM

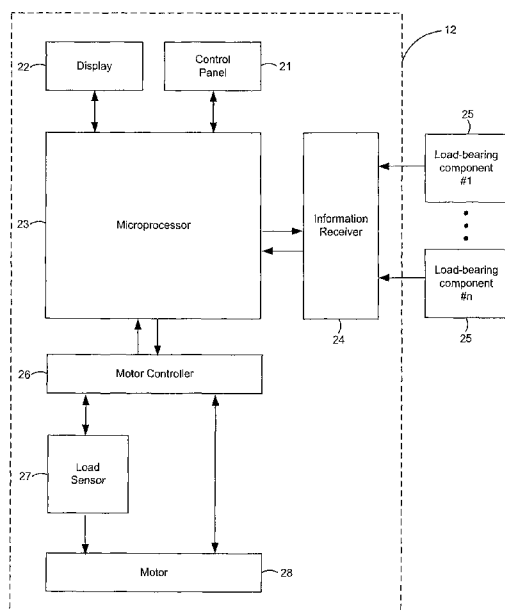


FIG. 2A

(57) Abstract: A lifting apparatus for a lift system is disclosed. The apparatus includes a) a motor adapted for providing a lifting force, b) at least one connector operatively connected to the motor, the connector adapted for connecting a load-bearing component to the motor, c) an information receiver for receiving a load limit information about the load-bearing component, d) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to limit the lifting force of the motor based on the load limit information received by the information receiver.

TITLE: LIFT APPARATUS AND SYSTEM

FIELD

[0001] Embodiments described herein relate to an apparatus and systems for a ceiling lift system. More particularly, embodiments described herein relate to apparatuses and systems for controlling the operation of the ceiling lift system based on load limit information.

INTRODUCTION

[0002] Lift systems are common to hospitals, care facilities, and even within homes. The systems often include a track, a motor, a spreader, and a sling for hoisting a user into the air and translating the user along the mounted track. Variants of lift systems include ceiling lift systems and floor lift systems. These types of systems for carrying the elderly and the invalid are popular as they provide improved mobility and independence for their users while reducing the risk of injury to assistants and caregivers.

SUMMARY

[0003] Embodiments described herein relate to apparatuses and systems for a ceiling lift system limiting the lifting force of the motor of the ceiling lift system based on load limit information.

[0004] In one broad aspect there is provided a lifting apparatus for a lift system. The apparatus includes a) a motor adapted for providing a lifting force, b) at least one connector operatively connected to the motor, the connector adapted for connecting a load-bearing component to the motor, c) an information receiver for receiving a load limit information about the load-bearing component, d) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to limit the lifting force of the motor based on the load limit information received by the information receiver.

[0005] In another feature of that aspect, the motor controller is adapted to limit the lifting force of the motor to a load limit contained in the load limit information.

[0006] In another feature of that aspect, the lifting apparatus includes a plurality of connectors and each of the connectors is adapted for connecting one of a plurality of load-bearing components. Furthermore, the motor controller can be adapted to compare the load limit of each load-bearing component and determine a lowest load

limit and use this information to limit the lifting force of the motor to the lowest load limit.

[0007] In another feature of that aspect, the lifting apparatus includes a display for displaying a limit of the lifting force of the motor.

5 [0008] In another feature of that aspect, the information receiver is adapted to receive a communication from a transmitter, wherein the transmitter is associated with the load-bearing component and wherein the communication comprises the load information. The receiver and the transmitter may be electrically coupled. Alternatively, the receiver and the transmitter may be optically coupled. The
10 information receiver may also comprise a radio frequency receiver. The transmitter may reside on the associated load-bearing component. The load-bearing components may be selected from the group consisting of a track, a spreader bar, and a sling. In some embodiments, the load-bearing components could also comprise additional components such as installation hardware including one or more brackets used to
15 mount the ceiling lift system. In some embodiments, the load bearing components can also comprise any structural feature of the lifting system including but not limited individual nuts and/or bolts used in the system. Furthermore, the load information transmitted by the transmitter may include a safe working load of the associated load-bearing component.

20 [0009] In another feature of that aspect, the lifting apparatus includes at least one key, wherein the information receiver is operatively coupled to a key interface and the key interface is adapted for receiving each of the at least one key. Each of the at least one key may be associated with a predetermined lifting force. The key interface may include a plurality of pin combinations, where each pin combination may be
25 associated with a predetermined lifting force; and a selected key may engage a corresponding pin combination to limit the lifting force of the motor to the predetermined lifting force associated with the selected key and the pin combination. Furthermore, the key may include the display for displaying the limit of the lifting force of the motor. Additionally, the key interface may reside on the apparatus. Alternatively,
30 the key interface may also reside on a load-bearing component, where the load-bearing component is adapted to be coupled to the apparatus.

[0010] In another broad aspect, there is provided a lift system. The lifting system includes a) a motor adapted for providing a lifting force, b) a plurality of connectors operatively connected to the motor, each of the connectors adapted for connecting one of a plurality of load-bearing components to the motor, c) an information receiver for receiving a load limit information associated with each of the plurality of load-bearing component; and d) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to compare the load limit information of each load-bearing component and determine a lowest load limit, wherein the motor controller is adapted to limit the lifting force of the motor to the lowest load limit.

[0011] In yet another broad aspect, there is provided another lift system. The lifting system includes a) a motor adapted for providing a lifting force, b) a plurality of connectors operatively connected to the motor, each of the connector adapted for connecting one of a plurality of load-bearing components to the motor, c) an information receiver for receiving a load limit information from a key interface; d) a key interface coupled to the information receiver, the key interface comprising a plurality of pin combinations, each pin combination associated with a predetermined lifting force; e) at least one key, each of the at least one key is associated adapted to engage a corresponding pin combination of the key interface; and f) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to determine the engaged pin combination, wherein the motor controller is adapted to limit the lifting force of the motor to the predetermined lifting force associated with the engaged pin combination.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] For a better understanding of embodiments of the apparatuses and systems described herein, and to show more clearly how they may be carried into effect, reference will be made, by way of example, to the accompanying drawings in which:

[0013] FIG. 1 is an isometric drawing of a lift system;

[0014] FIG. 2A is a block diagram of a lifting apparatus in accordance with a first embodiment;

[0015] FIG. 2B is a block diagram of a lifting apparatus in accordance with a second embodiment.

[0016] FIG. 3A is a schematic of a key in accordance with some embodiments of the present invention;

5 [0017] FIG. 3B is a schematic of a key interface receiving a first key in accordance with some embodiments of the present invention;

[0018] FIG. 3C is a schematic of a key interface receiving a second key in accordance with some embodiments of the present invention;

10 [0019] FIG. 4A is a flowchart of a method for determining if the limit of the lifting force of the motor has been exceeded in accordance with some embodiments of the present invention; and

[0020] FIG. 4B is a flowchart of a method for setting the lowest load limit of a ceiling lift system in accordance with some embodiments of the present invention.

15 [0021] It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity. Further, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DESCRIPTION OF VARIOUS EMBODIMENTS

20 [0022] It will be appreciated that numerous specific details are set forth in order to provide a thorough understanding of the example embodiments described herein. However, it will be understood by those of ordinary skill in the art that the embodiments described herein may be practiced without these specific details. In other instances, well-known methods, procedures and components have not been
25 described in detail so as not to obscure the embodiments described herein. Furthermore, this description is not to be considered as limiting the scope of the embodiments described herein in any way, but rather as merely describing the implementation of the various embodiments described herein.

30 [0023] Lift systems are becoming popular choices for installations within both care facilities and individual homes. They allow the caregiver, or sometimes the user

himself or herself, to gain mobility throughout the area where the lift system is installed. Floor lifts are common for hoisting a patient between two locations, such as between a bed and a chair. They provide assistance in situations where multiple people would normally need to assist a user and reduce the risk of injury to the caregiver. On the other hand, ceiling lift systems can be very versatile. Unlike floor lifts, they take up little floor space and the lifting apparatus itself may be stored at the end of the track **11**, often in corners or unobtrusively along walls. Such versatility can allow them to get into smaller and congested areas that may be unreachable by other solutions. In many situations, ceiling lift systems are also more efficient than floor lifts.

[0024] The embodiments disclosed herein may be incorporated as part of any suitable lift system, including but not limited to ceiling lift systems or floor lift systems. One example of a floor lift system to which the embodiments disclosed herein can be applied is Maxi Move™ manufactured by BHM Medical Inc. An example of a ceiling lift system to which the embodiments disclosed herein can be applied is Maxi Sky 600™ manufactured by BHM Medical Inc.

[0025] Reference is now made to FIG. 1, which shows an example ceiling lift system **10**. The ceiling lift system **10** includes a lifting apparatus **12** and load-bearing components **11**, **14**, **15** connected to the lifting apparatus **12**. The load-bearing components **11**, **14**, **15** include individual components, such as a track **11**, a spreader **14**, and a sling **15**. Those skilled in the art will understand that other load-bearing components, such as hardware components for installing the ceiling lift system may also be provided. These components may include brackets used to mount the ceiling lift apparatus. In some embodiments, load-bearing components may include any suitable structural elements of the ceiling lift system **10** or a floor lift system including, but not limited to individual fasteners such as nuts and/or bolts.

[0026] Although FIG. 1 illustrates an example of an embodiment of the present invention applicable to a ceiling lift system, those skilled in the art will understand that embodiments of the present invention may be adapted to floor lift systems as well. Embodiments of floor lift systems (not shown) generally do not include a track, such as track **11** discussed above, but can generally include each of the other load-bearing components illustrated in and discussed in relation to FIG. 1. Those skilled in the art will also understand that embodiments of floor lift systems may also include, for

example, a base, which can include legs, mounted on wheels, a mast mounted to the base, and a boom mounted to the mast. In such embodiments, a spreader bar and sling can be coupled to the end of the boom. Embodiments of both ceiling lift systems and floor lift systems can include other load bearing components as well.

5 [0027] The lifting apparatus **12** provides a lifting force in a substantially vertical direction. Connector **13** is used to connect some of the load-bearing components to the lifting apparatus **12**. Additionally, the lifting apparatus **12** can move horizontally. The system can include a track **11** mounted to a ceiling to accommodate movement in the horizontal direction. The lifting apparatus **12** can be operatively coupled to the
10 track **11** to allow movement along the track path. In some embodiments, the track path may include a vertical component such as for example when a ceiling is sloped in at least some areas.

[0028] To transfer a patient using a ceiling lift system, the user is placed in a load-bearing component, such as a sling **15**, which is connected to the lifting
15 apparatus **12**. A spreader **14** can form an additional load-bearing component and a flexible member **13** can act as a connector to connect the spreader **14** and the sling **15** to the lifting apparatus **12**. The lifting apparatus **12** then raises the user to the appropriate level. Once the lifting apparatus **12** has reached the appropriate height, a locking mechanism (not shown) may be engaged to hold the user in the lifted position.
20 The user is now positioned to travel along the track **11**. Some embodiments of ceiling lift systems **10** allow a caregiver to manually push or pull the lifting apparatus **12** along the track **11**. Other embodiments of ceiling lift systems **10** include a second motor (not shown) as part of the lifting apparatus **12** to move the user in the horizontal direction. The lifting apparatus **12** can be fixed to a particular laid track **11**. In other systems, the
25 lifting apparatus **12** is portable and can be removed from one track **11** and placed onto another track.

[0029] Each lifting apparatus **12** includes a motor adapted for providing a lifting force to raise a load-bearing component and its associated load. As mentioned, a lifting apparatus **12** may also include a second motor for providing a horizontal force
30 to power the lifting apparatus **12** along the track **11**. Each load-bearing component of ceiling lifting system **10** has a load limit. This rating is an indication of the load that the load bearing component can bear according to its design parameters. In some

embodiments, the load limit may be below the maximum load that the load-bearing component can actually bear. In some other embodiments, the load limit may be equal to the maximum load the load bearing component can actually bear. In some embodiments, the load limit may be referred to as a Safe Working Load (SWL).

5 [0030] Known lift systems generally limit the lifting force to the load limit of the motor that provides the lifting force. This load limit can be unique to each model of motor used and is dependent on the design, construction and current limitations of the motor. However, the load limit of a motor in known lift systems is generally independent of load limits of the load-bearing components to which the motor is
10 mechanically coupled. In known lift systems there is no communication between the load-bearing components of the lift system and the motor. While known lifting apparatuses may limit the lifting force to the load limit of the motor, they do not incorporate any load limit information from the individual load-bearing components **11**, **14**, **15**. In some embodiments, ceiling lift system **10** can account for the load limit
15 information from various load-bearing components attached to a lifting apparatus and can ensure that the ceiling lift system **10** responds appropriately to loads that are greater than a lifting force limit based on the load limit information.

[0031] Some embodiments described herein relate to a ceiling lift apparatus and systems adapted for limiting the lifting force of a motor based on the load limit
20 information received by the information receiver. In particular, some embodiments disclosed herein relate to ways of providing load limit information from one or more load-bearing components to the information receiver and preventing the lifting apparatus **12** from operating outside the received load limit information. Accordingly, some embodiments ensure that all the load-bearing components of the ceiling lift
25 system do not bear a load that is greater than their respective load limits.

[0032] Reference is now made to FIG. 2A, which shows a block diagram of a lifting apparatus **12**, in accordance with an embodiment. Lifting apparatus **12** may be utilized in any suitable lift system including but not limited to a ceiling lift system and a floor lift system. The lifting apparatus **12** includes a microprocessor **23** for coordinating
30 the functions of the lifting apparatus **12**, an information receiver **24** to receive load limit information about the one or more load-bearing components **25**, and a motor controller **26** for controlling the functions of the motor **28** and specifically adapted to

limit the lifting force of the motor based on the load limit information received by the information receiver **24**. In some embodiments, the microprocessor **23**, information receiver **24**, and motor controller **26** are implemented on a single chip. In other embodiments, the information receiver **24** and motor controller **26** are incorporated
5 into the functions of the microprocessor **23** and implemented in software or a combination of software and hardware. Those skilled in the art will understand that the microprocessor **23**, information receiver **24**, and motor controller **26** may be implemented in any other suitable configuration.

[0033] Some embodiments of the lifting apparatus **12** include a display **22** and
10 a control panel **21**. The display **22** can be used to indicate the different modes and settings of the lifting apparatus **12**. It can also be used to indicate different parameters, including but not limited to the load limits of one or more of the load bearing components or the overall load limit (e.g. the lowest load limit) of the lifting system. In some embodiments, display **22** can include any appropriate electronic
15 display device including but not limited to liquid crystal display (LCD). In some embodiments, display **22** can include any other appropriate manner of displaying information, such as for example a sticker on any appropriate component of the system. The control panel **21** is used to operate the lifting apparatus **12**. In some embodiments, the control panel **21** may also include a wired or wireless remote
20 control (not shown) to receive instructions from either the user or a caregiver.

[0034] The load sensor **27** is connected to the motor **28** and to the motor controller **26**. The load sensor **27** can also be directly coupled to the microprocessor **23**. Alternatively, the load sensor **27** can be coupled to a load-bearing component or a connector coupling a load-bearing component to the lifting apparatus **12**, such as the
25 flexible arm **13**.

[0035] The motor **28** used by the lifting apparatus **12** can be any appropriate motor including an electric motor known to persons skilled in the art. The motor **28** can be either a DC-controlled motor or an AC-controlled motor. Provided that a DC motor is used, the supply voltage will control the lifting speed of the motor. Provided
30 that an AC motor or a stepping motor is used, the lifting speed of the motor will be controlled by the supply frequency.

[0036] In a preferred embodiment, the information receiver **24** receives load limit information from one or more load-bearing components **25**. Each load-bearing component **25** is operatively coupled to send load information to the information receiver **24**. The information receiver **24** and the microprocessor **23** then limit the lifting force of the motor based on this load limit information.

[0037] The load limit information sent to the information receiver **24** may take a number of forms. In some embodiments, the load limit information may include the safe working load specific for the particular load-bearing component **25**. In other embodiments, the load limit information may only indicate to the information receiver **24** a predetermined lifting force.

[0038] In some embodiments, the microprocessor **23** and the information receiver **24** compare the load limit information received from each of the load-bearing components **25** and the motor **28** and limit the lifting force of the motor to the lowest load limit. The microprocessor **23** may also limit the lifting force of the motor using other methods.

[0039] In some embodiments, a user may input the load limit information directly into the lifting apparatus **12**. This may be done through the control panel. Some embodiments of the lifting apparatus **12** may allow the user to input load limit information for each of the load-bearing components **25**. Alternatively, the user may determine the lowest load limit and input a single safe working load into the lifting apparatus **12**. Once the lowest load limit has been set or a limit to the lifting force of the motor otherwise determined, the lifting apparatus **12** will not allow the motor **28** to provide a lifting force greater than this limit.

[0040] In some embodiments, the lifting apparatus **12** includes at least one connector (not shown) operatively coupled to the motor **28**. This connector can be the flexible arm **13** that is used to connect the motor **28** to a spreader **14** and to a sling **15**. Another connector, such as wheels or a pulley system, can be used to couple the motor **28** to the track **11**. Any other suitable connector for connecting the motor **28** to one or more load-bearing components **25**, may also be used.

[0041] The information receiver **24** is used to transfer to the microprocessor **23** load limit information from each of the load-bearing components **25**. This load limit

information can indicate the load limit for each load-bearing component **25**. For example, each of the load-bearing components **25**, such as the track **11**, the spreader **14** bar, and the sling **15**, can have a different load limit. The load limit of the load-bearing components **25** can be different from the load limit of the motor **28**. In some
5 embodiments, in order to ensure that the lifting apparatus **12** takes into consideration the load limit information of the motor **28** and all of the load-bearing components **25**, the information receiver **24** first gathers all of the load limit information from each of the load-bearing components **25**. Once all the load limit information has been gathered, the microprocessor **23** and the motor controller **26** limit the lifting force of
10 the motor based on the load limit information received by the information receiver **24**. This limit on the lifting force of the motor may be indicated to the user or caregiver on the display **22**. As mentioned above, display **22** can include any appropriate electronic display device or any other manner of displaying information such as for example a sticker attached to a component of the lifting apparatus **12** or implemented in any
15 appropriate manner.

[0042] Referring again to FIG. 2A, the load limit information from a load-bearing component **25** is received by the information receiver **24**. The information receiver **24** sends load limit information to the microprocessor **23**. In some embodiments, the information receiver **24** sends the lowest load limit to the microprocessor **23**. In other
20 embodiments, the information receiver **24** relays all of the load limit information to the microprocessor **23**. As mentioned above, the information receiver **24** can be a separate component of the lifting apparatus **12**. In other embodiments, the information receiver **24** may be part of the microprocessor **23** and implemented in hardware or software in accordance with methods known to persons skilled in the art.

[0043] Communication between the information receiver **24** and the load-bearing components **25** can be implemented in any appropriate manner. In some embodiments, the load limit information is stored on the load-bearing component **25** and transferred to the information receiver **24** upon request. For example, the load-bearing component **25** can include a transmitter (not shown in FIG. 2A) that
30 communicates with the information receiver **24** the load limit information for the particular load-bearing component **25**. This communication may occur over an electrical connection that couples the load-bearing component **25** to the information

receiver **24**. In another aspect of this feature, the connection between the load-bearing component **25** and the information receiver **24** may be an optical signal over a fiber-optic connection.

[0044] In some embodiments, separate connections for each load-bearing component **25** are used to indicate the load limit information to the information receiver **24**. In other embodiments, the communication occurs over a shared path or bus and use one of a number of known communication arrangements such as daisy chaining and multiplexing or one of a number of standards such as the Ethernet standard and the Universal Serial Bus (USB) protocol.

[0045] Communication between the load-bearing components **25** and the information receiver **24** can also occur wirelessly. The load-bearing component **25** may include a wireless transmitter (not shown in FIG. 2A) or a transceiver (not shown in FIG. 2A) and the information receiver **24** may include a wireless receiver (not shown in FIG. 2A) or a transceiver (not shown in FIG. 2A) to communicate the load limit information from the load-bearing components **25**. The information may be passed through two-way communication standards, such as the 802.11 standards, the Bluetooth™ protocol, or other known or custom wireless methods.

[0046] The information may also be passed through one-way communication methods such as radio frequency identification (RFID) tags. In such an embodiment, the RFID tag (not shown), upon interrogation by the information receiver **24**, responds to the interrogation with load limit information. The RFID tag associated with each load-bearing component **25** may be built into the load-bearing component **25**. Alternatively, the RFID tag may be placed onto the load-bearing component **25** using a sticker or other attachment means. The SWL of the load-bearing component **25** may be displayed on the sticker.

[0047] Reference is now made to FIG. 2B, which shows a block diagram of a lifting apparatus **12a**, in accordance with another embodiment. FIG. 2B is similar to FIG. 2A, except that communication between the information receiver **24** and the load-bearing components **25** include radio frequency transmitter/receiver **29a** and radio frequency transmitter receiver **29b**.

[0048] The information receiver **24** in the lifting apparatus **12a** includes a transmitter/receiver **29a** and each load-bearing component **25** includes a transmitter/receiver **29b**. As described above, the transmitters/receivers **29a**, **29b** allow the load-bearing components **25** to communicate load limit information to the information receiver **24** using one of a number of different communication methods. In some embodiments, the transmitters/receivers **29a**, **29b** can include only a transmitter or only a receiver with information flowing in a single direction. In other embodiments, the transmitters/receivers **29a**, **29b** may communicate in both directions and information may flow both to and from the load-bearing components **25**. In some
5
10
embodiments transceivers may be used for this purpose.

[0049] Those skilled in the art will appreciate that the communication methods described above were discussed by way of example only and are not intended to be limiting as to the form of communication between the load-bearing components **25** and the information receiver **24**. Any appropriate form of communication using any
15
combination of transmitter/receiver **29a** and transmitter/receiver **29b** may be used.

[0050] Reference is now made to FIG. 3A to FIG. 3C, which illustrate a method for utilizing one or more custom keys **30** to indicate load limit information, according to some embodiments. A key **30** can be received by a key interface **40** coupled to the information receiver **24**. The load limit information for a particular load-bearing
20
component may thus be separated from the physical load-bearing component **25**. Instead, the load limit information may reside on one or more separate keys **30** that can be coupled to the lifting apparatus **12**. Each key **30** may communicate the load limit information to the information receiver **24** through the key interface **40**.

[0051] The load-bearing component manufacturer may produce a key **30**
25
specific to the load-bearing component **25**. Alternatively, the lifting apparatus manufacturer may provide a number of keys **30** with the lifting apparatus **12** suitable for different load-bearing components **25**.

[0052] Each key **30** can be associated with a particular load-bearing component **25** and can include a label **34** or any other appropriate display to display
30
its safe working load. This label **34** can be visible to the user or the caregiver when inserted into the key interface **40** and can provide the user or caregiver the ability to

quickly determine the lowest load limit associated with either the motor **28** or the load-bearing components **25**. If there are multiple labels **34** associated with multiple keys **30**, the user or caregiver may have to compare the labels **34** of each of the keys **30** to determine the lowest load limit for the lifting apparatus **12**. In addition, the display **22** may also show the limit of the lifting force of the motor based on the load limit information. In some embodiments, the keys **30** comprise display **22**.

[0053] In some embodiments, the key interface **40** may receive a single key **30**. In such embodiments, the user or installer of the system determines prior to using the lifting apparatus **12** the limit of the lifting force of the motor. In many cases this will be the lowest load limit of the individual load-bearing components **25** and the motor **28**. In other embodiments, multiple keys **30** are inserted into the key interface **40**. Each key **30** may represent a different load-bearing component **25**. The information receiver **24** can then compare the multiple keys **30** to determine the lowest load limit for the lifting apparatus **12**.

[0054] The key interface **40** can reside directly on the lifting apparatus **12**. In other cases, the key interface **40** may reside on one of the load-bearing components **25** that is coupled to the lifting apparatus **12** or in any other suitable location. The key interface **40** may then communicate with the information receiver **24** as described by one of the communication methods above.

[0055] Referring now to FIG. 3A, an example key **30** is disclosed. The key **30** includes a label **34** indicating a predetermined load limit and a key circuit **32**. The key circuit **32** is received by the key interface **40** which when coupled to the key circuit **32** indicates load limit information to the information receiver **24**.

[0056] In some embodiments, each key **30** is associated with and represents a load-bearing component **25** and incorporates the load limit of the associated load-bearing component **25** within the key **30**. In other embodiments, each key **30** is associated with one of a number of predetermined lifting forces or range of lifting forces. The key **30** may then indicate to the information receiver **24**, which predetermined lifting force or predetermined range of lifting forces is associated with the load-bearing component **25**.

[0057] According to some embodiments, each key interface **40** includes a number of possible pin combinations, where each pin combination is associated with a predetermined lifting force or range of lifting forces. Accordingly, the selected key engages a corresponding pin combination via the key circuit **32** to limit the lifting force of the motor to the predetermined lifting force associated with the selected key **30** and pin combination.

[0058] Referring now to FIG. 3B and FIG. 3C, a key interface **40** is shown with two example keys **30**. The key interface **42** contains a number of pins **44**. Different combinations of pins **44** correspond with different predetermined lifting forces. When coupled, the key **30** via the key circuit **32** indicates to the key interface **42** the predetermined lifting force associated with the key **30**. By engaging different combinations of pins **44**, the key **30** is able to indicate a number of different predetermined lifting forces. In some embodiments, engaging a combination of pins **44** may comprise shorting one or more pins **44** to ground.

[0059] In other embodiments, the keys **30** include a memory unit (not shown) to store the load limit information from each of the load-bearing components **25**. The memory unit may take a number of forms. In some embodiments, the key interface **42** includes a USB hub and each key **30** incorporates flash memory to store the load limit information associated with the load-bearing component. Other forms of volatile and non-volatile memory are also possible for storing the load limit information within the key **30**.

[0060] Referring again to FIG. 2A, the load sensor **27** measures the lifting force of the motor. This information can be sent to the microprocessor **23**. In some embodiments, the load measured by the load sensor **27** is indicated to the user or caregiver on the display **22**. In some embodiments, the load sensor **27** measures the lifting force of the motor by measuring the amount of current drawn by the motor **28**. As known by persons skilled in the art, the amount of current drawn by a motor **28** is proportional to the load placed on the motor **28**. A motor **28** requiring a greater amount of torque in order to accommodate a larger load will draw more current. Accordingly, the load sensor **27** may measure the current being drawn by the motor **28** from the power supply (not shown) during a lifting motion to infer the lifting force of the motor.

[0061] A table can be provided for a given motor **28** correlating the amount of current drawn to the lifting force of the motor. The relation of current consumption during lifting to the amount of weight lifted may be determined by experimentation or may be obtained from the motor manufacturer. Referring to FIG. 2A, the load sensor **27** can be coupled to the power supply of the motor. The load sensor **27** may measure the amount of current drawn by the motor **28** from the power supply and transmit this information to the microprocessor **23** for table lookup. Accordingly, in some embodiments, a measurement of the current provided to the motor **28** is used by the motor controller **26** and the microprocessor **23** to determine the lifting force of the motor **28** for any given load. This measurement may take into account an inrush current experienced by the motor **28**. In some embodiments, the steady state current may be measured by implementing a delay in the current measurement. In other embodiments, any other suitable method for accounting for the inrush current can be used.

[0062] In other embodiments, the load sensor **27** is implemented using any suitable force measuring transducer. The transducer is coupled to the lifting apparatus **12** to directly measure the vertical force on the lifting apparatus **12**. Some examples of transducers known in the art include strain gauges, pressure sensors, or piezoelectric sensors. Such measuring transducers can measure the lifting force being applied to the lifting apparatus **12** whether or not the motor **28** is engaged. In such instances, it is possible to provide load information to the motor controller **26** and microprocessor **23** before attempting to lift the load and prior to supplying any current.

[0063] Once the lifting apparatus **12** has received load limit information from the load-bearing components **25** and has a method for measuring the lifting force of the motor, the microprocessor **23** and the motor controller **26** can limit the operation of the lifting apparatus **12** based on the load limit information. In some embodiments, the lifting force of the motor will be limited to a load limit contained in the load limit information from one of the load-bearing components **25**. In many situations, the limit will be the lowest load limit; however, this is not necessary and need not always be the case.

[0064] To limit the lifting force of the motor, the motor controller **26** can implement a control system that periodically monitors the load sensor **27**. When the

load sensor **27** indicates to the motor controller **26** that the weight of the load has approached or exceeded the safe working load of the lifting apparatus **12**, the motor controller **26** can disengage the motor **28** and safely bring the operation of the lifting apparatus **12** to a halt. Other actions may also be taken when the lifting force of the motor exceeds the set limit based on the load limit information. In some embodiments, the lifting apparatus **12** will provide an indication to the user or the caregiver that the lifting force of the motor has exceeded the set limit.

[0065] Reference is now made to FIG. 4A, where a flowchart shows a method **50** where measurements are taken and compared to the load limit information received from the information receiver **24**. In step (**52**), the method measures the lifting force of the motor. The measurement is made using one of the different methods described above. Next, a comparison is made with the load limit information in step (**54**) to determine if the lifting force of the motor exceeds the limit set by the information receiver **24** based on the load limit information from each of the load-bearing components. If the limit is not exceeded, the operation of the lifting apparatus **12** continues in step (**56**). Otherwise, the limit on the lifting force of the motor has been exceeded and the microprocessor **23** generates instruction to this overload condition in step (**58**). Such instruction includes stopping the motor **28** and providing an indication that the limit has been exceeded.

[0066] In some embodiments, the load lifted by the lifting apparatus **12** is not determined. In some embodiments the current supplied to the motor **28** of the lifting apparatus **12** is limited to an appropriate level. In some such embodiments, the system does not actively monitor the lifting force of the motor. Accordingly, some embodiments do not include load sensor **27**. In some embodiments, a certain value is set that provides a limiting factor for the lifting force of the motor. In some embodiments, a maximum current is set. If the current requirements of the motor **28** are well known, the lifting apparatus **12** uses the relationship between the current drawn by the motor **28** and the resultant lifting force. As described above, the lifting force of a motor **28** is directly proportional to the current being drawn. Accordingly, the maximum current supplied to the motor **28** can be limited to a maximum current corresponding to the desired lifting force limit. Because the motor **28** is current limited,

it will be unable to provide a force greater than that which is proportional to the maximum current.

[0067] Referring now to FIG. 4B, a flowchart of a method **60** is shown that incorporates a system with specific reference to limiting the current supplied to the motor **28**. In step (**60**), the lifting apparatus **12** reads the load limit information regarding the load-bearing components **25** from the information receiver **24**. Next, a determination is made in step (**64**) that correlates the appropriate maximum current for the set limit of the lifting apparatus limiting the lifting force of the motor. In certain embodiments, the lowest load limit is used to ensure that the lifting apparatus **12** stays within the load limits of all the load-bearing components **25**. Finally, based on this determination, a maximum current is set that limits the lifting force of the motor in step (**66**).

[0068] As mentioned, the method of limiting the current will accommodate for the inrush current. If the lifting force of the motor has reached its current limit, the lifting apparatus **12** may return an error condition to the user or caregiver. In some embodiments the motor **28** will stop lifting. The lifting apparatus **12** or the motor **28** may also engage a locking mechanism so that the user does not begin falling if already in a raised position.

[0069] The methods described in FIG. 4A and FIG. 4B can be implemented in both hardware and software. If implemented in software, the load limit information and maximum current are saved as software variables. Similarly, the methods **50** and **60** can be implemented using analogue or digital hardware components according to design methods known to skilled persons in the art.

[0070] While the above description provides examples of the embodiments, it will be appreciated that some features and/or functions of the described embodiments are susceptible to modification without departing from the spirit and principles of operation of the described embodiments. Accordingly, what has been described above has been intended to be illustrative of the invention and non-limiting and it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the invention as defined in the claims appended hereto.

CLAIMS:

1. A lifting apparatus for a lift system, the apparatus comprising:
 - a) a motor adapted for providing a lifting force;
 - 5 b) at least one connector operatively connected to the motor, the connector adapted for connecting a load-bearing component to the motor;
 - c) an information receiver for receiving a load limit information about the load-bearing component;
 - d) a motor controller electrically coupled to the motor and the
 - 10 information receiver, wherein the motor controller is adapted to limit the lifting force of the motor based on the load limit information received by the information receiver.
2. The apparatus of claim 1, wherein the motor controller is adapted to limit the lifting force of the motor to a load limit contained in the load limit information.
3. The apparatus of claims 1 or 2, wherein the at least one connector comprises a
- 15 plurality of connectors, each of the connectors adapted for connecting one of a plurality of load-bearing components.
4. The apparatus of claim 3, wherein the motor controller is adapted to compare the load limit of each load-bearing component and determine a lowest load limit, wherein the motor controller is adapted to limit the lifting force of the motor to the lowest load
- 20 limit.
5. The apparatus of any one of claims 1 to 4, further comprising a display for displaying a limit of the lifting force of the motor.
6. The apparatus of any one of claims 1 to 5, wherein the information receiver is adapted to receive a communication from a transmitter, wherein the transmitter is
- 25 associated with the load-bearing component and wherein the communication comprises the load information.
7. The apparatus of claim 6, wherein the receiver and the transmitter are electrically coupled.

8. The apparatus of claim 6, wherein the receiver and the transmitter are optically coupled.
9. The apparatus of any one of claims 1 or 2, wherein the information receiver comprises a radio frequency receiver.
- 5 10. The apparatus of any one of claims 6 to 9, wherein the transmitter resides on the associated load-bearing component.
11. The apparatus of claim 10, wherein at least one of the load-bearing components is selected from the group consisting of: a track, a spreader bar, and a sling.
12. The apparatus of claim 10 or claim 11, wherein the load information transmitted by
10 the transmitter comprises a safe working load of the associated load-bearing component.
13. The apparatus of any one of claims 1 to 3, further comprising at least one key, wherein the information receiver is operatively coupled to a key interface, the key interface is adapted for receiving each of the at least one key.
- 15 14. The apparatus of claim 13, wherein each of the at least one key is associated with a predetermined lifting force.
15. The apparatus of claim 14, wherein the key interface comprises a plurality of pin combinations, each pin combination is associated with a predetermined lifting force; and wherein a selected key engages a corresponding pin combination to limit the
20 lifting force of the motor to the predetermined lifting force associated with the selected key and the pin combination.
16. The apparatus of claim 15, wherein the key comprises the display for displaying the limit of the lifting force of the motor.
17. The apparatus of any one of claims 13 or 16, wherein the key interface resides on
25 the apparatus.

18. The apparatus of any one of claims 13 or 16, wherein the key interface resides on a load-bearing component, and wherein the load-bearing component is adapted to be coupled to the apparatus.

5 19. The apparatus of anyone of claims 1 to 18, wherein the lifting apparatus is mounted to a ceiling.

20. The apparatus of any one of claim 1-9 or 13-18, wherein the lifting apparatus is mounted to a base.

21. A lift system comprising:

- 10 a) a motor adapted for providing a lifting force;
- b) a plurality of connectors operatively connected to the motor, each of the connectors adapted for connecting one of a plurality of load-bearing components to the motor;
- c) an information receiver for receiving a load limit information associated with each of the plurality of load-bearing components; and
- 15 d) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to compare the load limit information of at least a portion of the each load-bearing component and determine a lowest load limit, wherein the motor controller is adapted to limit the lifting force of the motor to the lowest load limit.

20 22. The lift system of claim 21, wherein the lift system is a ceiling lift system.

23. The lift system of any one of claims 21 or 22, further comprising a track for mounting the motor to a ceiling.

24. The lift system of claim 23, wherein at least one of the load bearing components comprises the track.

25 25. The lift system of any one of claims 21 to 24, wherein at least one of the load-bearing components comprises a sling.

26. The lift system of any one of claims 21 to 24, wherein at least one of the load-bearing components comprises a spreader bar.

27. The lift system of claim 21, wherein the lift system is a floor lift system.

28. The lift system of any one of claims 21 or 27, further comprising:

- a) a base;
- b) a mast mounted to the base; and
- c) a boom mounted to the mast.

29. The lift system of claim 28, further comprising a plurality of wheels connected to a bottom of the base.

30. The lift system of any one of claims 21, 28, and 29 wherein at least one of the load-bearing components is a sling.

31. The lift system of any one of claims 21, 28, and 29 wherein at least one of the load-bearing components is a spreader bar.

32. A lift system comprising:

- a) a motor adapted for providing a lifting force;
- b) a plurality of connectors operatively connected to the motor, each of the connector adapted for connecting one of a plurality of load-bearing components to the motor;
- c) an information receiver for receiving a load limit information from a key interface;
- d) a key interface coupled to the information receiver, the key interface comprising a plurality of pin combinations, each pin combination associated with a predetermined lifting force;
- e) at least one key, each of the at least one key is adapted to engage a corresponding pin combination of the key interface; and
- f) a motor controller electrically coupled to the motor and the information receiver, wherein the motor controller is adapted to determine the engaged pin combination, wherein the motor controller is adapted to limit the lifting force of the motor to the predetermined lifting force associated with the engaged pin combination.

33. system of claim 32, wherein the lift system is a ceiling lift system.

34. The lift system of any one of claims 32 or 33 further comprising a track for mounting the motor to a ceiling.

5 35. The lift system of claim 34, wherein at least one of load bearing components comprises the track.

36. The lift system of any one of claims 32 to 35, wherein at least one of the load-bearing components comprises a sling.

37. The lift system of any one of claims 32 to 35, wherein at least one of the load-bearing components comprises a spreader bar.

10 38. The lift system of claim 32, wherein the lift system is a floor lift system.

39. The lift system of any one of claims 32 or 38, further comprising:

- a) a base;
- b) a mast mounted to the base; and
- c) a boom mounted to the mast.

15 40. The lift system of claim 39, further comprising a plurality of wheels connected to a bottom of the base.

41. The lift system of any one of claims 32, 39, and 40 wherein at least one of the load-bearing components comprises a sling.

20 42. The lift system of any one of claims, 32, 39 and 40 wherein at least one of the load-bearing components comprises a spreader bar.

1/5

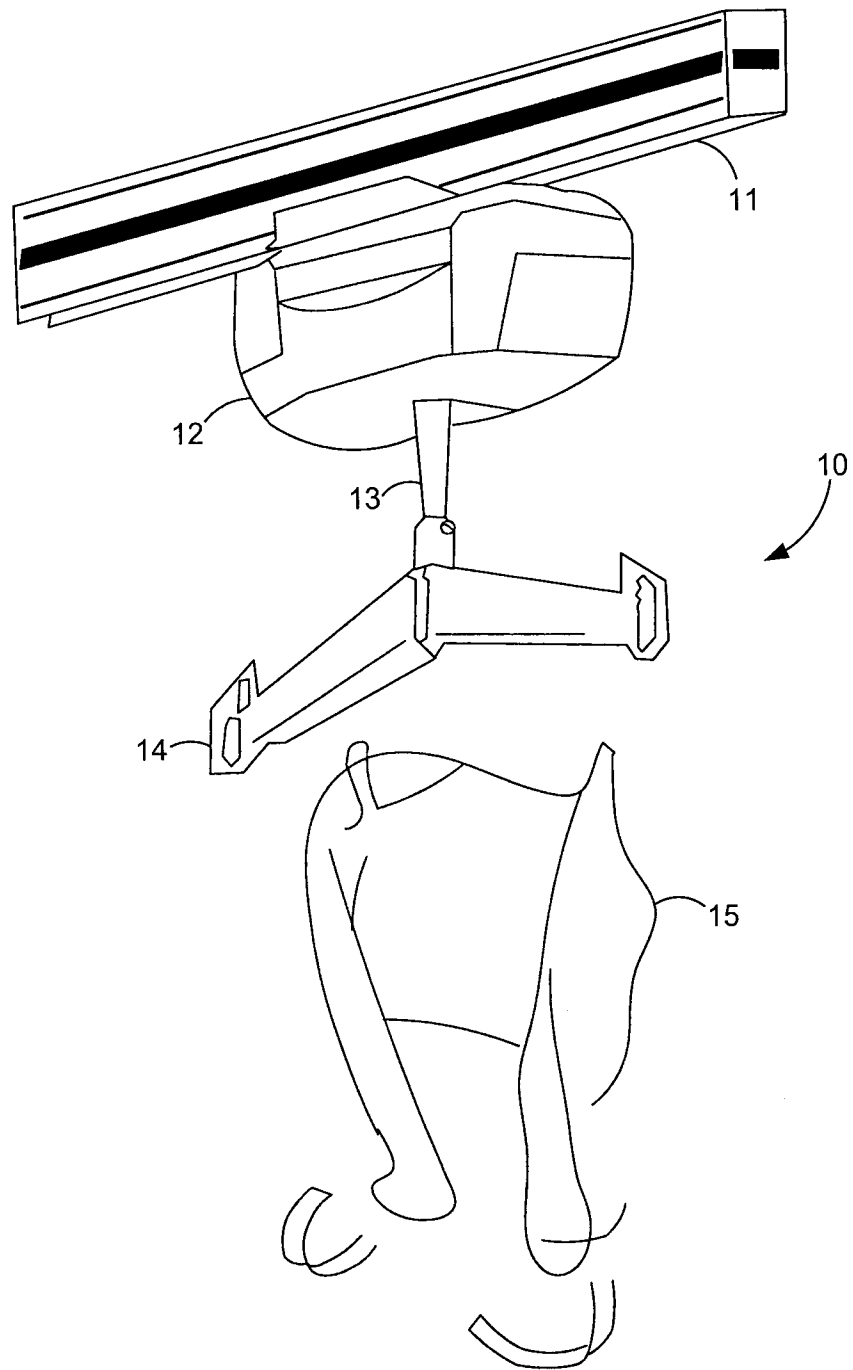


FIG. 1

2/5

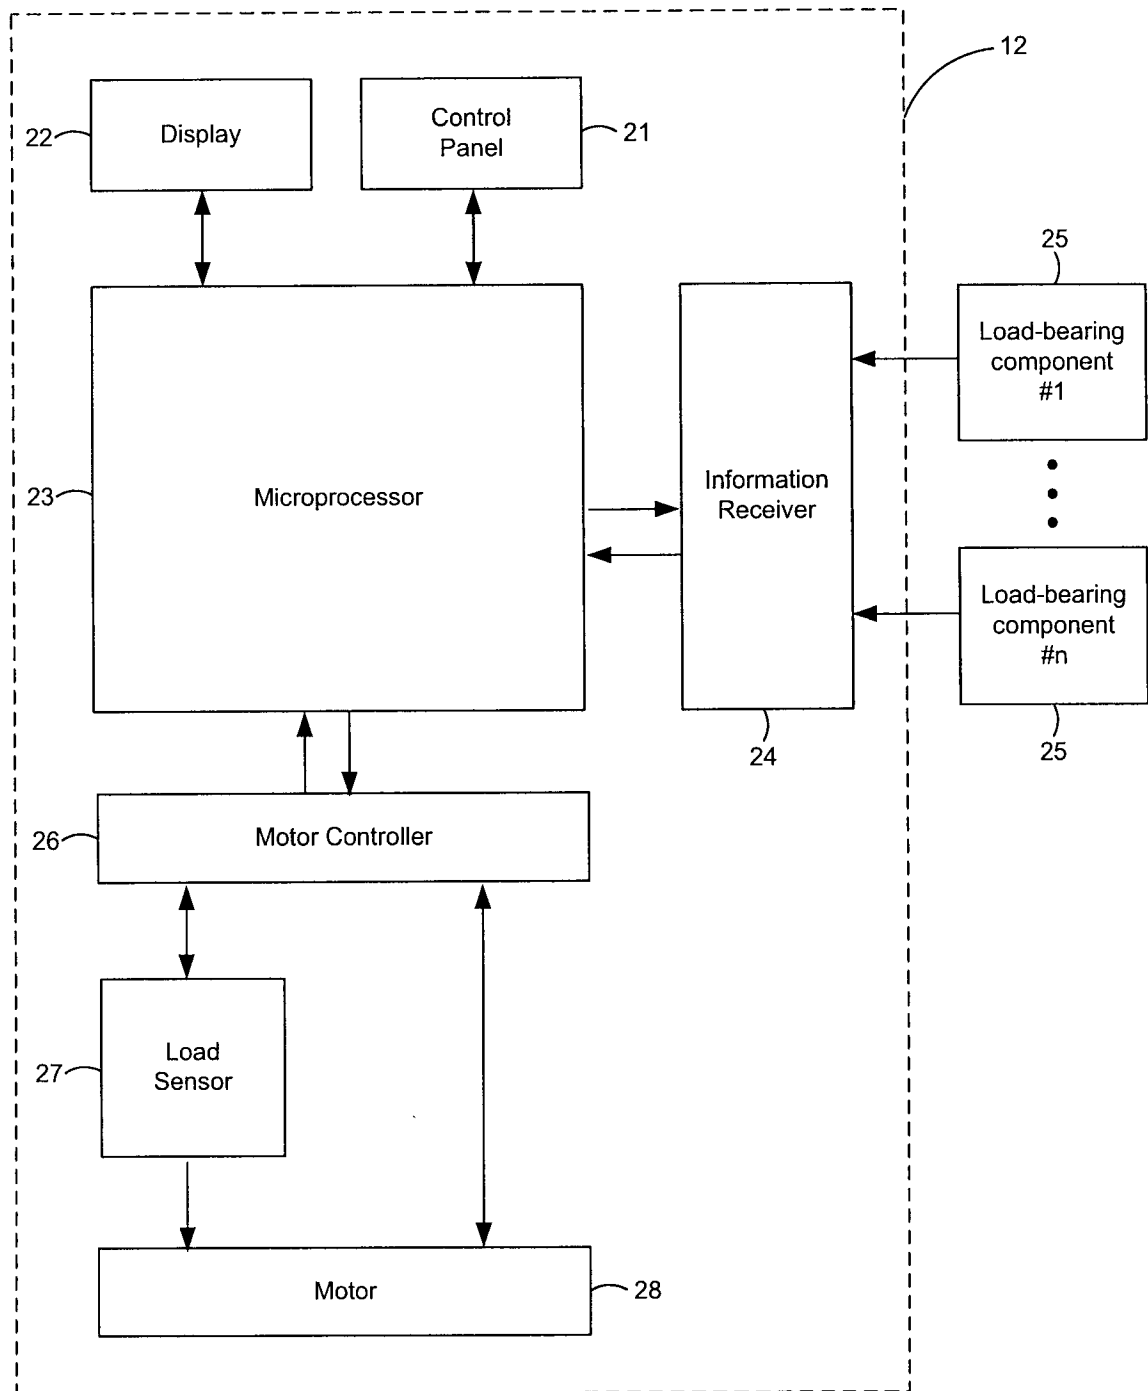


FIG. 2A

3/5




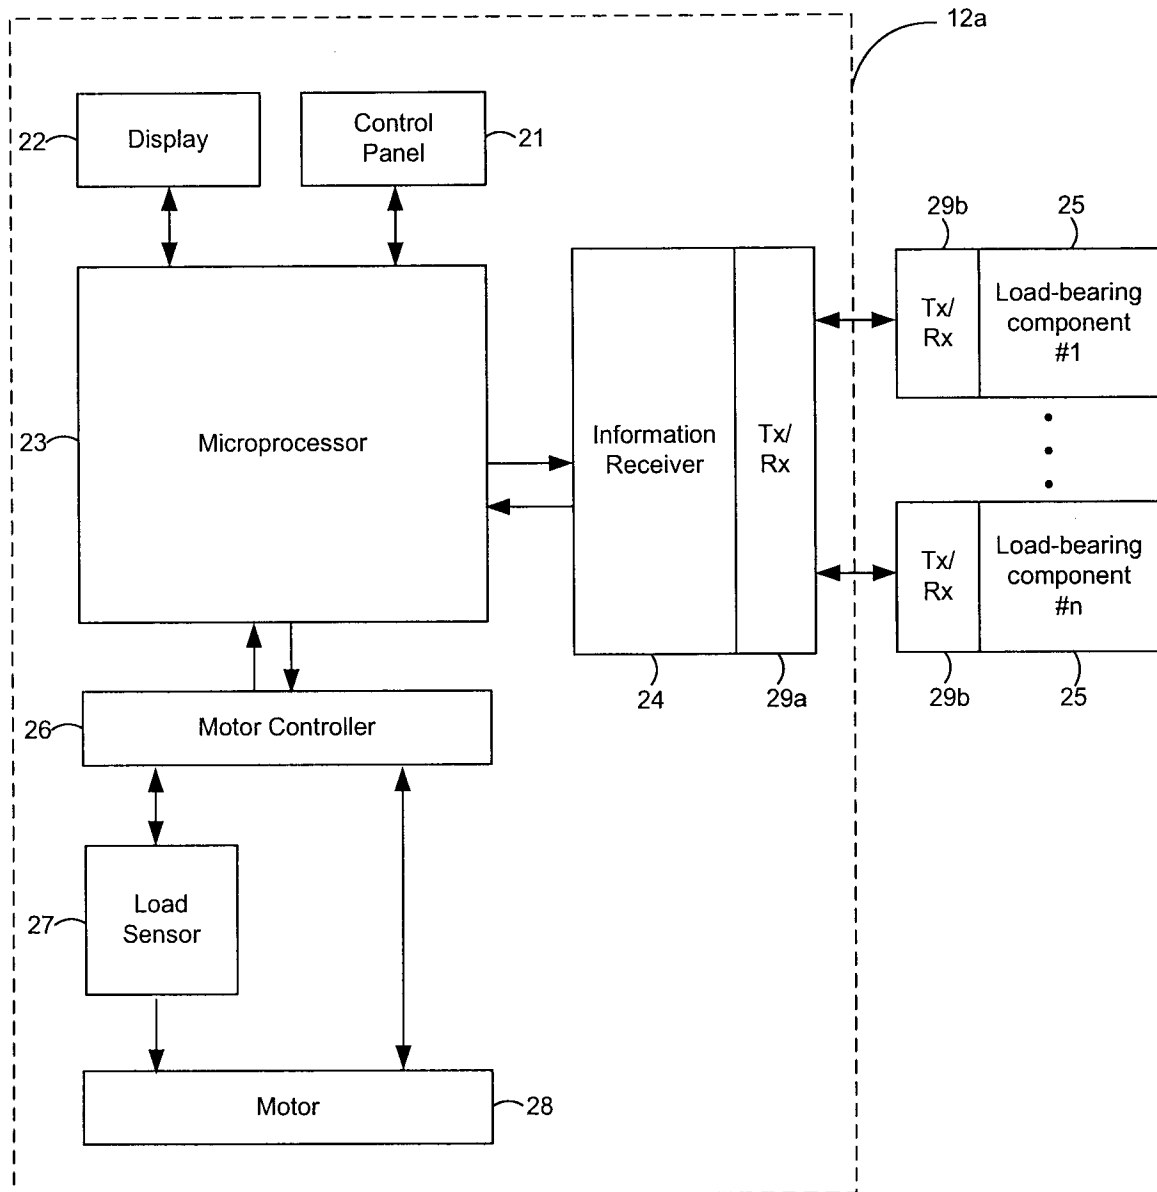


FIG. 2B

4/5

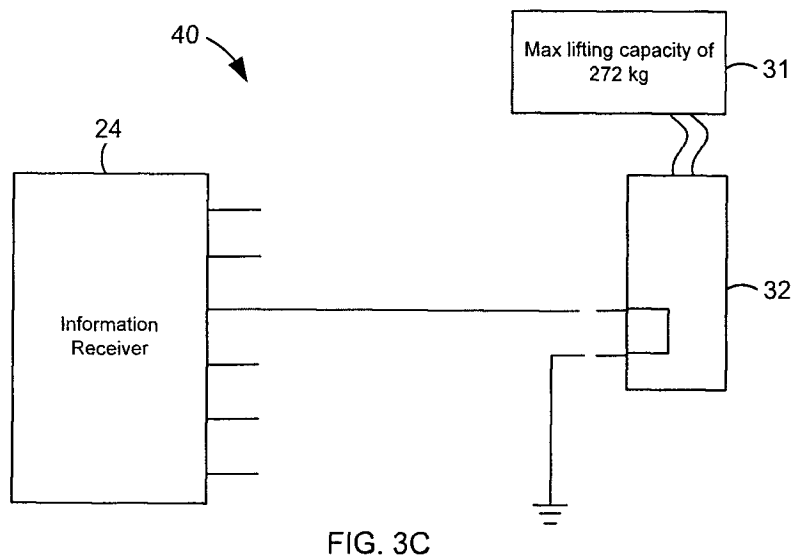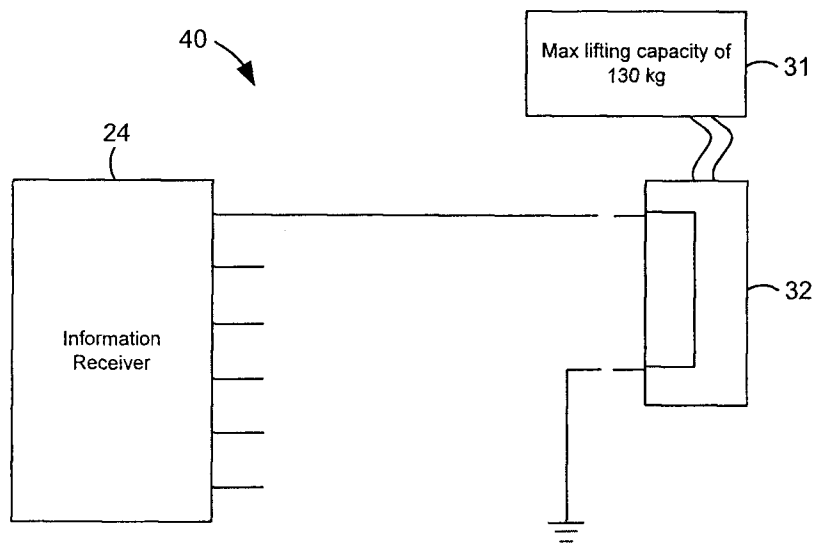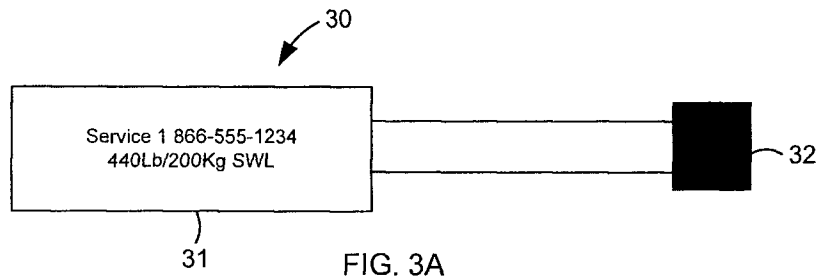

5/5

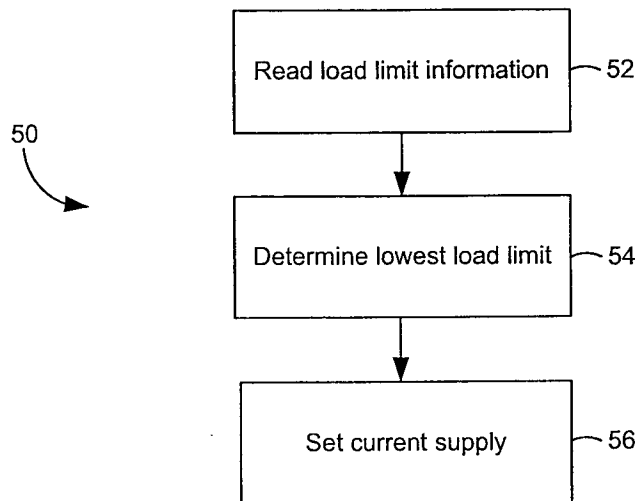


FIG. 4A

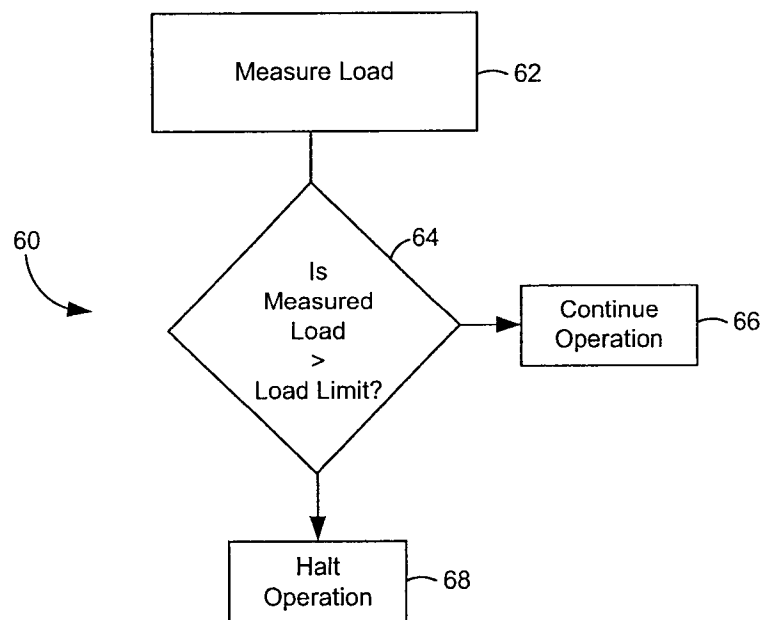


FIG. 4B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2011/000003

A. CLASSIFICATION OF SUBJECT MATTER IPC: B66C 13/16 (2006.01) , A61G 7/10 (2006.01) , B66C 1/12 (2006.01) , B66C 1/40 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (2006.01): B66C 13/16, A61G 7/10, B66C 1/12, B66C 1/40 ECLA: B66C 13/18, B66C 13/22, B66C 13/23, B66C 15/00 USPC: 212/276, 212/278, 212/284, 177/147 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Canadian Patents Database, Epoque (Epodoc, English Full-Text Databases) Keywords: motor, control+, key, load limit, information, detail, data														
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>US2009/0218975A1 (BASTHOLM, J.) 3 September 2009 (03-09-2009) *Paragraphs 12-16, Figure 1*</td> <td>1, 21, 32</td> </tr> <tr> <td>A, P</td> <td>US2010/0224841A1 (LILJEDAHL, G.) 9 September 2010 (09-09-2010) *Entire Disclosure*</td> <td>1, 21, 32</td> </tr> <tr> <td>A</td> <td>US7634825B2 (CHEPURNY, M., et al.) 22 December 2009 (22-12-2009) *Figure 1*</td> <td>1, 21, 32</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	A	US2009/0218975A1 (BASTHOLM, J.) 3 September 2009 (03-09-2009) *Paragraphs 12-16, Figure 1*	1, 21, 32	A, P	US2010/0224841A1 (LILJEDAHL, G.) 9 September 2010 (09-09-2010) *Entire Disclosure*	1, 21, 32	A	US7634825B2 (CHEPURNY, M., et al.) 22 December 2009 (22-12-2009) *Figure 1*	1, 21, 32
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
A	US2009/0218975A1 (BASTHOLM, J.) 3 September 2009 (03-09-2009) *Paragraphs 12-16, Figure 1*	1, 21, 32												
A, P	US2010/0224841A1 (LILJEDAHL, G.) 9 September 2010 (09-09-2010) *Entire Disclosure*	1, 21, 32												
A	US7634825B2 (CHEPURNY, M., et al.) 22 December 2009 (22-12-2009) *Figure 1*	1, 21, 32												
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex. <table border="1"> <tbody> <tr> <td>* Special categories of cited documents :</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </tbody> </table>			* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family													
"O" document referring to an oral disclosure, use, exhibition or other means														
"P" document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search 1 April 2011 (01-04-2011)		Date of mailing of the international search report 21 April 2011 (21-04-2011)												
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476		Authorized officer Kurtis Ulicny (819) 934-6356												

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2011/000003

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2009218975A1	03 September 2009 (03-09-2009)	AT428392T	15 May 2009 (15-05-2009)
		AU2006312849A1	18 May 2007 (18-05-2007)
		CN101304717A	12 November 2008 (12-11-2008)
		CN101304717B	08 September 2010 (08-09-2010)
		DE602006006333D1	28 May 2009 (28-05-2009)
		DK1945167T3	31 August 2009 (31-08-2009)
		EP1945167A1	23 July 2008 (23-07-2008)
		EP1945167B1	15 April 2009 (15-04-2009)
		ES2324240T3	03 August 2009 (03-08-2009)
		JP2009515500T	09 April 2009 (09-04-2009)
		WO2007054092A1	18 May 2007 (18-05-2007)
US2010224841A1	09 September 2010 (09-09-2010)	None	
US7634825B2	22 December 2009 (22-12-2009)	CA2369668A1	28 July 2003 (28-07-2003)
		CA2369668C	04 May 2010 (04-05-2010)
		CA2417506A1	28 July 2003 (28-07-2003)
		CA2417506C	07 December 2010 (07-12-2010)
		EP1472176A2	03 November 2004 (03-11-2004)
		US2005115914A1	02 June 2005 (02-06-2005)
		US7240621B2	10 July 2007 (10-07-2007)
		US2007215569A1	20 September 2007 (20-09-2007)
		US2010051889A1	04 March 2010 (04-03-2010)
		WO03064312A2	07 August 2003 (07-08-2003)
		WO03064312A3	20 November 2003 (20-11-2003)