



- (51) **International Patent Classification:**
G05B 19/418 (2006.01) *B23K 9/095* (2006.01)
- (21) **International Application Number:**
PCT/IB2014/000319
- (22) **International Filing Date:**
13 March 2014 (13.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/802,918 14 March 2013 (14.03.2013) US
13/802,883 14 March 2013 (14.03.2013) US
- (71) **Applicant:** LINCOLN GLOBAL, INC. [US/US]; 17721 Railroad Street, City of Industry, CA 91748 (US).
- (72) **Inventors:** DANIEL, Joseph, A.; 1135 Navajo Trail, Streetsboro, OH 44241 (US). ENYEDY, Edward; 36580 Garrett's Cove Drive, Eastlake, OH 44095 (US). HEARN, James; 1668 Maxwell Blvd., Brunswick, OH 44212 (US). JUDAH, Henry, B.; c/o Lincoln Global, Inc., 17721 Railroad Street, City of Industry, CA 91748 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** SYSTEMS AND METHOD FOR CREATING OR MODIFYING A WELDING SEQUENCE

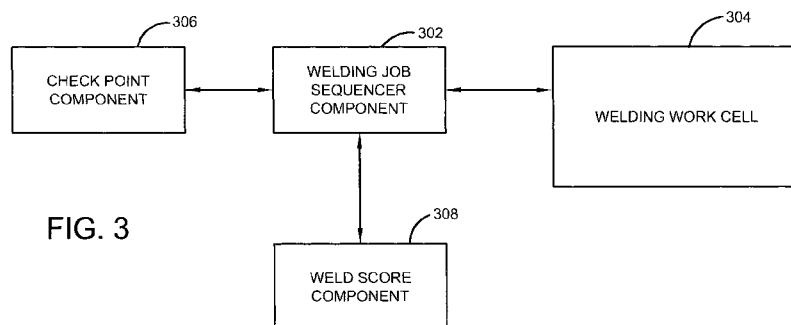


FIG. 3

(57) **Abstract:** The invention described herein generally pertains to a system (300) and method (1100) for welder system (300) that relates to creating a welding sequence (706) for a welding environment in which the welding sequence is based upon non-real time data collected from a welding procedure. Welding procedure information is collected and utilized to create a welding sequence (706) to perform two or more welds in which at least one parameter is based on the collected welding procedure information (e.g., non-real world welding procedure).



Systems and Method for Creating or Modifying a Welding Sequence

Cross-Reference to Related Applications

[0001] This application is a continuation-in-part of U.S. Application Serial No. 11/613,652, filed December 20, 2006, and entitled "WELDING JOB SEQUENCER." The entirety of the aforementioned application is incorporated herein by reference.

Technical Field

[0002] Devices, systems, and methods consistent with the invention relate to welding work cells. More particularly, the invention relates to a welder system and a method of welding in a welding cell according to the preamble of claims 1 and 10, respectively.

Background of the Invention

[0003] In the related art, work cells are used to produce welds or welded parts. There are at least two broad categories of work cells, including robotic work cells and semi-automatic work cells.

[0004] In robotic work cells, the scheduling and performing of welding operations is largely automated, with little operator involvement. Thus, these cells generally have a relatively low labor cost and a relatively high productivity. However, their repeating operations cannot easily adapt to varying welding conditions and/or sequences.

[0005] In contrast, semi-automatic work cells (*i.e.*, work cells involving at least some operator welding) generally provide less automation vis-à-vis robotic work cells, and accordingly have a relatively higher labor cost and a relatively lower productivity. Nevertheless, there are many instances where using a semi-automatic welding work cell can actually be advantageous over robotic work cells. For example, a semi-automatic welding work cell can more easily adapt to varying welding conditions and/or sequences.

[0006] Unfortunately, when welding more complex assemblies in related art semi-automatic work cells, multiple different welding schedules are often required for different types of welds on different parts of an assembly. In many systems, when a different welding schedule must be utilized, the operator is required to stop welding operations and manually adjust the output of the semi-automatic equipment according to the new schedule. In some other systems, this manual adjustment is eliminated by storing particular schedules in the work cell. Nevertheless, even in such systems, the operator still needs to cease welding operations and push a button to select the new welding schedule before he may continue welding.

[0007] Neither of these practices for setting a different welding schedule is particularly efficient. Thus, in practice, the number of welding schedules used in a semi-automatic work cell is often reduced in order to eliminate the need for constant adjustment of the output of the semi-automatic equipment. While this reduction of welding schedules makes the overall operation easier for the welder, the forced simplification of this approach can lead to reduced productivity and lower overall quality.

[0008] Additionally, when abiding by strict quality control specifications, it is sometimes necessary to perform welds in a specific sequence, verify that each weld is performed with a given set of conditions, and monitor the output of the equipment during the welding operations. In a robotic work cell, these requirements are easily fulfilled. However, in a semi-automatic work cell, these requirements are susceptible to human error, since the operator must keep track of all of these aspects in addition to performing the welding operations themselves.

[0009] An illustrative example of the above problems is shown in the related art semi-automatic welding method diagrammatically represented in *Fig. 1*. In this method, each of the various scheduling, sequencing, inspection and welding operations are organized and performed by the operator (*i.e.*, the welder) himself. Specifically, the operator begins the welding job at operation 10. Then, the operator sets up the welding equipment according to schedule A, at operation 20. Next, the operator performs weld #1, weld #2, and weld #3 using welding schedule A at operations 22, 24 and 26. Then, the operator stops welding operations and sets up the welding equipment according to schedule B at operation 30. Next, the operator performs weld #4 using welding schedule B at operation 32. Then, the operator checks the dimensions of the assembly at operation 40, and sets up the welding equipment according to schedule C at operation 50. Next, the operator performs weld #5 and weld #6 using welding schedule C at operations 52 and 54. After the welding operations are completed, the operator visually inspects the welded assembly at operation 60, and completes the welding job at operation 70.

[0010] Clearly, the method shown in *Fig. 1* depends on the operator to correctly follow the predefined sequencing for performing welds and inspections, to accurately change between welding schedules (such as at operation 30), and to perform the welding itself. Errors in any of these responsibilities can result either in rework (if the errors are caught during inspection at operation 60) or a defective part being supplied to the end user. Further, this exemplary semi-automatic welding method hampers productivity, because the operator must spend time configuring and reconfiguring weld schedules.

[0011] The above problems demand an improvement in the related art system.

Summary of the Invention

[0012] In accordance with an embodiment of the present invention, a welding system is provided that includes a first component that is configured to receive a parameter related to a welding schedule, wherein the parameter is collected from data representative of a portion of a welding process; a second component that is configured to create a welding sequence for a welding work cell, wherein the welding sequence defines at least the parameter and the welding schedule for a first welding procedure to create a first weld on a workpiece and a second welding procedure to create a second weld on the workpiece; and a welding job sequencer component that is configured to employ the welding sequence for the welding work cell.

[0013] In accordance with an embodiment of the present invention, a method of welding in a welding work cell is provided that includes at least the steps of: collecting data representative of a portion of a welding process; identifying a first parameter related to a first welding schedule based on the collected data; identifying a second parameter related to a second welding schedule based on at least one of the collected data or a real time weld procedure; creating a welding sequence based on the first parameter and the second parameter, wherein the welding sequence defines a first welding procedure that includes the first parameter to create a first weld on a workpiece and a second welding procedure that includes the second parameter to create a second weld on the workpiece; storing the created welding sequence remote from the welding work cell; and utilizing the welding sequence to automatically modify a welding equipment within the welding work cell without intervention from an operator creating at least one of the first weld or the second weld.

[0014] In accordance with an embodiment of the present invention, a welding system is provided that includes at least the following: means for collecting a data file that includes a parameter with a welding schedule for a workpiece; means for creating a welding sequence for a welding work cell, wherein the welding sequence defines at least the parameter and the welding schedule for a first welding procedure to create a first weld on a workpiece and a second welding procedure to create a second weld on the workpiece; and means for employing the welding sequence for the welding work cell to perform one or more welds to assemble the workpiece by automatically adjusting a setting on a welding equipment within the welding work cell.

[0015] These and other embodiments, features and objects of this invention will be evident when viewed in light of the drawings, detailed description and appended claims.

Brief Description of the Drawings

[0016] The invention may take physical form in certain parts and arrangements of parts, a preferred embodiment of which will be described in detail in the specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

[0017] *Fig. 1* illustrates a welding operation of the related art utilizing a semi-automatic welding work cell;

[0018] *Fig. 2* illustrates a welding operation according to the invention utilizing a semi-automatic welding work cell;

[0019] *Fig. 3* is a block diagram illustrating a welding system that utilizes a welding job sequencer component to configure welding equipment for two or more weld operations to assembly a workpiece;

[0020] *Fig. 4* is a block diagram illustrating a welding system that utilizes a welding job sequencer component;

[0021] Fig. 5 is a block diagram illustrating a distributed welding environment with a plurality of welding work cells that interface with a welding job sequencer component via a local, remote, or cloud database;

[0022] Fig. 6 is a block diagram illustrating a welding system that includes a plurality of welding work cells in which welding work cells are managed by a cloud-based welding job sequencer component;

5 [0023] Fig. 7 is a block diagram illustrating a system that generates a welding sequence based on welding procedure data;

[0024] Fig. 8 is a block diagram illustrating a system that creates a welding sequence from a work instruction related to at least one of a workpiece or an assembly of a workpiece;

10 [0025] Fig. 9 is a block diagram illustrating a system that creates a welding sequence for employment in a welding environment;

[0026] Fig. 10 is a block diagram illustrating a system that utilizes a welding sequence for automatic configuration of a welding system to perform two or more welds;

[0027] Fig. 11 is a flow diagram of creating a welding sequence for employment to automatically configure welding equipment within a welding work cell; and

15 [0028] Fig. 12 is a flow diagram of creating a welding sequence based on one or more parameters of a welding procedure collected from a data file.

Detailed Description of the Invention

20 [0029] Embodiments of the invention relate to methods and systems that relate to creating a welding sequence for a welding environment in which the welding sequence is based upon non-real time data collected from a welding procedure (e.g., data representative of a weld, among others). Welding procedure information is collected and utilized to create a welding sequence to perform two or more welds in which at least one parameter is based on the collected welding procedure information (e.g., non-real world welding procedure). The welding sequence is utilized to automatically configure a welding operation and/or at least one welding
25 equipment to perform two or more welds that include disparate welding schedules (at least a portion of the welding schedules differ). Moreover, the welding sequence can eliminate operator intervention to configure or update welding equipment which allows the operator to concentrate on an act of welding rather than welding equipment settings, configurations, among others.

30 [0030] According to an aspect of the invention, there is provided a semi-automatic welding work cell including a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell.

[0031] According to another aspect of the invention, there is provided a method of welding in a semi-automatic work cell, including automatically selecting a welding schedule for use by an operator in the semi-automatic welding work cell.

5 [0032] According to another aspect of the invention, there is provided a welding production line including at least one semi-automatic welding work cell, where the semi-automatic work cell includes a welding job sequencer that automatically selects a welding schedule for use by an operator therein.

[0033] According to another aspect of the invention, there is provided a method of monitoring a welding production line, including automatically selecting a welding schedule for use by an operator in a semi-automatic welding work cell.

10 [0034] The term "component" as used herein can be defined as a portion of hardware, a portion of software, or a combination thereof. A portion of hardware can include at least a processor and a portion of memory, wherein the memory includes an instruction to execute.

[0035] The term "Welding Procedure Specification (WPS)" as used herein can be defined as information for specific application to assure repeatability by at least one of a welder or an operator.

15 [0036] The best mode for carrying out the invention will now be described for the purposes of illustrating the best mode known to the applicant at the time of the filing of this patent application. The examples and figures are illustrative only and not meant to limit the invention, which is measured by the scope and spirit of the claims. Referring now to the drawings, wherein the showings are for the purpose of illustrating an exemplary embodiment of the invention only and not for the purpose of limiting same, *Fig. 2* is referenced. In an exemplary embodiment of the invention as illustrated in *Fig. 2*, a welding job sequencer is provided. The welding
20 job sequencer improves the semi-automatic work cell of the related art by increasing the productivity of the semi-automatic work cell without compromising the number of weld schedules usable therein. The welding job sequencer accomplishes this improvement by implementing automatic changes in the semi-automatic work cell, and by providing the operator with an array of commands and instructions.

25 [0037] More specifically, in an exemplary embodiment, the welding job sequencer automatically selects and implements a function of the welding work cell. An example of such a function includes a particular weld schedule to be used with the semi-automatic work cell. In other words, the welding job sequencer may select a weld schedule to be used for a particular weld, and modify the settings of the semi-automatic work cell in accordance with the selected weld schedule, automatically for the operator (*i.e.*, without the operator's
30 specific intervention).

[0038] Additionally, in the exemplary embodiment, the welding job sequencer may automatically indicate a sequence of operations that the operator should follow to create a final welded assembly. In conjunction with the automatic selection of welding schedules, this indicated sequence allows an operator to follow the se-

quence to create a final welded part, without having to spend time adjusting, selecting, or reviewing each individual weld schedule and/or sequence.

[0039] Accordingly, since the welding job sequencer sets up the welding equipment and organizes the workflow, and since the operator only performs the welding operations themselves, the chance for error in the welding operation is greatly reduced, and productivity and quality are improved.

[0040] The exemplary embodiment is diagrammatically represented in *Fig. 2*. In *Fig. 2*, at operation **110**, the welding job sequencer begins operation, and immediately sets the welding equipment to use weld schedule A (operation **120**) and instructs the operator to perform welds #1, #2 and #3. Then, the operator performs welds #1, #2 and #3 using weld schedule A (operations **122**, **124** and **126**). Next, the welding job sequencer sets the welding equipment to use weld schedule B (operation **130**), and instructs the operator to perform weld #4. Then the operator performs weld #4 using weld schedule B (operations **132**). After completion of weld schedule B, the welding job sequencer sets the welding equipment to use weld schedule C (operation **150**), and instructs the operator to perform welds #5 and #6, and to inspect the part. Then, the operator performs welds #5 and #6 (operations **152**, and **154**) using weld schedule C, and inspects the completed part to confirm that it is correct (operation **160**). This inspection may include dimensional verification, visual defect confirmation, or any other type of check that might be needed. Further, operation 160 may include a requirement that the operator affirmatively indicate that the inspection is complete, such as by pressing an "OK" button, before it is possible to proceed to the next operation. Lastly, the welding job sequencer indicates that the welding operation is at an end (operation **170**), and re-sets for the next operation.

[0041] Accordingly, as noted above, the sequencing and scheduling of welding operations is completed by the sequencer, and frees the operator to focus on performing welds according to instruction.

[0042] The welding job sequencer may select and implement a new function, such as the selection and implementation of weld schedules A, B and C shown in *Fig. 2*, based upon various variables or inputs. For example, the welding job sequencer may simply select new weld schedules based upon a monitoring of elapsed time since the beginning of the welding operations, or since the cessation of welding (such as the time after weld #3 in *Fig. 2* above). Alternatively, the welding job sequencer may monitor the actions of the operator, compare the actions to the identified sequence of welds, and select new weld schedules appropriately. Still further, various combinations of these methods, or any other effective method, may be implemented, as long as the end effect is to provide an automatic selection and implementation of a function, such as the weld schedule, for use by the operator.

[0043] Parameters of the selected weld schedule may include such variables as welding process, wire type, wire size, WFS, volts, trim, which wire feeder to use, or which feed head to use, but are not limited thereto.

[0044] While the above description focuses on the selection of a weld schedule as a function which is automatically selected and implemented, the welding job sequencer is not limited to using only this function.

[0045] For example, another possible function that may be selected and implemented by the welding job sequencer is a selection of one of multiple wire feeders on a single power source in accordance with the weld schedule. This function provides an even greater variability in welding jobs capable of being performed by the operator in the semi-automatic work cell, since different wire feeders can provide a great variance of, for example, wire sizes and types.

[0046] Another example of a function compatible with the welding job sequencer is a Quality Check function. This function performs a quality check of the weld (either during welding or after the weld is completed) before allowing the job sequence to continue. The quality check can monitor various welding parameters and can pause the welding operation and alert the operator if an abnormality is detected. An example of a welding parameter measurable by this function would be arc data.

[0047] Another example of such a function would be a Repeat function. This function would instruct the operator to repeat a particular weld or weld sequence. An example of the use of this function includes when the Quality Check function shows an abnormality, or when multiple instances of the same weld are required.

[0048] Another example of such a function would be a Notify Welder function, which communicates information to the welder. This function would display information, give an audible signal, or communicate with the welder by some other means. Examples of use of this function include an indication to the operator that he is free to begin welding, or an indication that the operator should check some portion of the welded part for quality purposes.

[0049] Another example of such a function would be a Enter Job Information function. This function will require the welder to enter information, such as the part serial number, a personal ID number, or other special conditions before the job sequencer can continue. This information could also be read from a part or inventory tag itself through Radio Frequency Identification (RFID), bar code scanning, or the like. The welding job sequencer could then utilize the entered information for the welding operations. An example of the use of this function would be as a predicate to the entire welding operation, so as to indicate to the welding job sequencer which schedules and/or sequences should be selected.

[0050] A further example of such a function would be a Job Report function. This function will create a report on the welding job, which could include information such as: the number of welds performed, total and individual arc timing, sequence interruptions, errors, faults, wire usage, arc data, and the like. An example of the use of this function would be to report to a manufacturing quality department on the efficiency and quality of the welding processes.

[0051] A still further example of such a function would be a System Check function. This function will establish whether the welding job can continue, and could monitor such parameters as: wire supply, gas supply, time left in the shift (as compared to the required time to finish the job), and the like. The function could then determine whether the parameters indicate that there is enough time and/or material for the welding job to continue. This function would prevent down-time due to material depletion, and would prevent work-in-process assemblies from being delayed, which can lead to quality problems due to thermal and scheduling issues.

[0052] Further, as mentioned above, the welding job sequencer may select and implement a new function, based upon various variables or inputs. These variables and inputs are not particularly limited, and can even be another function. For example, another function compatible with the welding job sequencer is a Perform Welding Operation function. This function is designed to detect the actual welding performed by the operator, and to report that welding so that the welding job sequencer can determine whether to proceed with further operations. For example, this function can operate by starting when the operator pulls the trigger to start the welding operation, and finishing when the operator releases the trigger after the welding is complete, or after a predetermined period of time after it starts. This function could end when the trigger is released or it could be configured to automatically turn off after a period of time, a quantity of wire, or an amount of energy is delivered. This function may be used to determine when to select a new function, such as a new weld schedule, as discussed above.

[0053] Still further, various semi-automatic and/or robotic work cells can be integrated together on a single network, and the sequencing of welding steps at a single work-cell can be fully integrated into a complete production schedule, which itself can be modified as needed to track variations in the production schedule. Sequencing and/or scheduling information can also be stored in a database, be stored by date as archival information, and be accessed to provide various production reports

[0054] In an embodiment, a semi-automatic welding work cell for welding an assembly defined by a plurality of welds can be provided, the plurality of welds being defined by at least two weld schedules can include welding equipment for use by a welding operator to perform said plurality of welds and complete the assembly with said welding equipment having a plurality of functions. In the embodiment, the work cell can include a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can select the welding schedule according to an elapsed time. In an embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and selects the welding schedule based upon that detection. In the embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and the welding job sequencer selects the welding schedule according to an amount of welding wire supplied for the welding operation. In the embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and the welding job sequencer selects the welding schedule according to an amount of energy supplied for the welding operation. In the embodiment, the welding schedule includes

information about at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use.

[0055] In an embodiment, the welding work cell can include the welding job sequencer which select and implements at least one of a plurality of functions to define at least a first weld schedule and a second weld schedule from the at least two weld schedules so as to organize a workflow for creating the welded assembly and indicate to the welding operator a sequence of working operations for completing the assembly. In the embodiment, the welding job sequencer can automatically modify the welding equipment in accordance with the workflow and sequence of the welding operations without the welding operator intervening.

[0056] In the embodiment, the second weld schedule is defined according to an elapsed time of the first weld schedule. In the embodiment, the at least one function detects completion of said first weld schedule by said operator and automatically changes from said first weld schedule to said second weld schedule. In the embodiment, at least one function detects when the operator is conducting said first weld schedule, and said second weld schedule is defined according to an amount of welding wire supplied for said first weld schedule. In the embodiment, at least one function detects when the operator is conducting said first weld schedule, and said second weld schedule is defined according to an amount of energy supplied for said first weld schedule. In the embodiment, the at least one first weld set up parameter and said at least one second weld set up parameter comprise at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use. In the embodiment, at least one first weld set up parameter and said at least one second weld set up parameter comprise a feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, at least one function monitors quality measurables of said weld assembly, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In the embodiment, at least one function indicates information to the operator in the semiautomatic welding work cell. In the embodiment, at least one function accepts job information comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, at least one function produces a job report comprising at least one of a number of welds preformed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, at least one function includes a system check of said cell, the system check comprising at least a detection of wire supply, gas supply, and time.

[0057] In the embodiment, the welding job sequencer can select a welding sequence for use by the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can indicate the selected welding sequence to the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can select a wire feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can monitor quality measurables of a weld created by the operator, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In the embodiment, the welding job sequencer can indicate information to the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can accept

job information comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, the welding job sequencer can produce a job report comprising at least one of a number of welds preformed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, the welding job sequencer can perform a system check comprising at least a de-
5 detection of wire supply, gas supply, and time.

[0058] In an embodiment, a method of welding in a semi-automatic work cell can be provided that includes automatically selecting a welding schedule for use by an operator in the semi-automatic welding work cell. In the embodiment, the automatic selection can be performed after an elapsed time. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic
10 selection is performed based upon that detection. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic selection is performed according to an amount of welding wire supplied for the welding operation. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic selection is performed according to an amount of energy supplied for the welding operation. In the embodiment, the welding
15 schedule can include information about at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use.

[0059] In the embodiment, the method can include selecting a welding sequence for use by the operator in the semi-automatic welding work cell. In the embodiment, the method can include indicating the selected welding sequence to the operator in the semi-automatic welding work cell. In the embodiment, the method
20 can include selecting a wire feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, the method can include monitoring quality measurables of a weld created by the operator, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In the embodiment, the method can include indicating information to the operator in the semi-automatic welding work cell. In the embodiment, the method can include accepting job information
25 comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, the method can include producing a job report comprising at least one of a number of welds performed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, the method can include performing a system check comprising at least a detection of wire supply, gas supply, and time.

[0060] In an embodiment, a welding production line is provided with at least one semi-automatic welding work cell, wherein the semi-automatic work cell that includes a welding job sequencer that automatically selects a welding schedule for use by an operator therein. In the embodiment, the welding production line includes a monitoring system that communicates with the welding job sequencer to direct the welding job
30 sequencer to automatically select the welding schedule for use by the operator therein.

[0061] In an embodiment, a method of monitoring a welding production line is provided that includes automatically selecting a welding schedule for use by an operator in a semi-automatic welding work cell. In the embodiment, the method can include directing the welding job sequencer to automatically select the welding schedule for use by the operator therein.

5 [0062] In an embodiment, a semi-automatic welding work cell is provided that includes a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell. The automatic selection may be by way of elapsed time, a detection of welding operations, a detection of the amount of welding wire supplied for the welding operation, or a detection of the amount of energy supplied for the welding operation.

10 [0063] In an embodiment, a method of welding in a semi-automatic work cell having welding equipment and a welding job sequencer to complete an assembly defined by a plurality of welds can be provided in which the plurality of welds can be defined by at least two weld schedules. The embodiment can include at least the steps of the following: implementing a welding equipment function with the welding job sequencer to define from the at least two weld schedules a first weld schedule having at least one first weld set up parameter
15 and at least one first weld instruction and a second weld schedule having at least one second weld set up parameter and at least one second weld instruction, at least one of the said second weld set up parameter and said second weld instruction is different from said first weld set up parameter and said first weld instruction; indicating to a welding operator a sequence of welding operations for completing the assembly based on said first and second weld schedules; and automatically modifying said welding equipment in accordance
20 with said sequence of welding operations for completing the assembly based on said first and second weld schedules.

[0064] In the embodiment, the method can include defining said second weld schedule is performed after an elapsed time defined by said first weld schedule. In the embodiment, the method can include detecting when the operator is conducting said first weld schedule, wherein defining said second schedule is based
25 upon that detection. In the embodiment, defining said first and second weld schedules can include defining an amount of welding wire supplied for the welding operation. In the embodiment, defining said second weld schedule is according to an amount of energy supplied for the welding operation for said first weld schedule. In the embodiment, defining at least one of the first and second weld schedules can include selecting at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed bead to use. In
30 an embodiment, defining at least one of the first and second weld schedules can include selecting a wire feeder for use by an operator in the semi-automatic welding work cell. In an embodiment, the method can include monitoring quality measurables of a weld created by the operator, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In an embodiment, the method can include indicating information to the operator in the semi-automatic welding work cell. In an
35 embodiment, the method can include accepting job information comprising at least a part ID number, operator ID number, or welding instructions. In an embodiment, the method can include producing a job report

comprising at least one of a number of welds performed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data performing a system check comprising at least a detection of wire supply, gas supply, and time.

[0065] In an embodiment, a welding production line is provided that includes at least one semi-automatic welding work cell for welding an assembly defined by a plurality of welds, the plurality of welds being defined by at least weld schedules, the semi-automatic welding work cell including welding equipment for use by a welding operator to perform the plurality of welds and complete the assembly, the welding equipment having a plurality of functions. In the embodiment, the production line can include a welding job sequencer which selects and implements at least one of the plurality of functions to define at least a first and a second weld schedule in a sequence of welding operations from the at least two weld schedules to be used by said welding operator for completing the weld assembly. In an embodiment, the production line can include said first weld schedule contains at least one first weld set up parameter and at least one first weld instruction for said welding operator and said second weld schedule contains at least one second weld set up parameter and at least one second weld instruction for said welding operator, at least one of said first weld set up parameter and said first weld instruction is different from said second weld set up parameter and said second weld instruction, said welding job sequencer automatically modifying said welding equipment in accordance with said sequence of operations without said welding operator intervention. In an embodiment, the production line can include a monitoring system in communication with the welding job sequencer to monitor completion of the at least one weld instruction of each of the first and second weld schedule.

[0066] In an embodiment, a method for monitoring a welding production line in at least one semi-automatic welding work cell for use by a welding operator to complete an assembly defined by a plurality of welds, the plurality of welds being defined by at least two weld schedules, the semi-automatic welding work cell including welding equipment and a welding job sequencer. The method can include at least the following steps: defining at least a first and a second weld schedule in a sequence of welding operations from the at least two weld schedules with the welding job sequencer said first weld schedule having at least one first weld set up parameter and at least one first weld instruction and said second weld schedule defining at least one second weld set up parameter and at least one second weld instruction with at least one of said second weld set up parameter and said second weld instruction being different from said first weld set up parameter and said first weld instruction; determining completion of said first weld schedule by said welding operator; automatically modifying the welding equipment in accordance with said second weld schedule without said welding operator intervention; and monitoring the welding operations. In the embodiment, the method can include automatically modifying the welding equipment in accordance with said second weld schedule is based on said completion of said first weld schedule.

[0067] In an embodiment, a semi-automatic welding work cell for use by an operator is provided. The embodiment can include welding equipment having a plurality of functions for performing welds by the operator and a welding job sequencer selecting from the plurality of functions to set up and organize the welding

equipment for the operator. The embodiment can include the plurality of functions including: a weld schedule function defined by a sequence of weld operations; a notify function to instruct the operator to perform the weld schedule; and a quality check function to monitor at least one weld operation of the sequence of weld operations.

5 [0068] In the embodiment, the quality check function performs a quality check on a weld completed by the at least one weld operation. In the embodiment, the quality check function monitors the at least one weld operation during the at least one weld operation. In the embodiment, the quality check function monitors the at least one weld operation after completion of the at least one weld operation. In the embodiment, the weld
10 schedule function defines a plurality of weld schedules, each weld schedule having a first weld operation and at least a second weld operation. In the embodiment, the quality check function monitors the at least one weld operation before allowing the sequence of weld operations to continue. In the embodiment, the quality check function detects an abnormality, the sequencer pauses the sequence of weld operations and the notify function alerts the operator of the abnormality.

[0069] *Fig. 3* is a schematic block diagram of an exemplary embodiment of welding system **300** that utilizes
15 welding job sequencer component **302** to configure welding equipment for two or more weld operations to assembly a workpiece. Welding job sequencer component **302** is configured to implement a welding sequence that includes settings, configurations, and/or parameters to perform two or more welding procedures on a workpiece. In particular, welding job sequencer component **302**, as discussed above as welding job
20 sequencer, automatically configures welding equipment to create two or more welds that include two or more welding schedules. Moreover, welding job sequencer component **302** utilizes the welding sequence to aid an operator to perform the two or more welds. As discussed above, welding job sequencer component **302** can be utilized with welding work cell **304** that is semi-automatic. However, it is to be appreciated and understood that welding job sequencer component **302** can be implemented in a suitable welding environment or system that includes at least welding equipment and an operator to facilitate creating one or more welds.

25 [0070] Welding system **300** further includes check point component **306** that is configured to monitor a welding process and/or a welding operator in real time. For instance, the welding process is monitored in real time to detect at least one of a welding parameter (e.g., voltage, current, among others), a welding schedule parameter (e.g., welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, feed
30 head to use, among others), a weld on a workpiece as the weld is created, a movement of an operator, a position of a welding tool, a position or location of a welding equipment, a position or location of an operator, sensor data (e.g., video camera, image capture, thermal imaging device, heat sensing camera, temperature sensor, among others), and the like. Check point component **306** includes an alert system (not shown) that can communicate an alert or notification to indicate a status of the real time monitoring. In an embodiment, check point component **306** can utilize thresholds, ranges, limits, and the like for the real time monitoring to
35 precisely identify a abnormality with welding system **300**. Furthermore, check point component **306** can communicate an alert or notification to welding work cell **304** or the operator to at least one of stop the weld-

ing procedure, continue with the welding procedure, pause the welding procedure, terminate the welding procedure, or request approval of the welding procedure. In an embodiment, check point component **306** can store monitoring data (e.g., video, images, results, sensor data, and the like) in at least one of a server, a data store, a cloud, a combination thereof, among others.

5 [0071] Weld score component **308** is included with welding system **300** and is configured to evaluate a weld created by an operator within welding work cell **304** upon completion of such weld. Weld score component **308** provides a rating or score for the completed weld to facilitate implementing a quality control on the work-
piece and/or assembly of the workpiece. For instance, weld score component **308** can alert a quality inspec-
10 tion upon completion, provide data collection of a job (e.g., assembly of workpiece, weld on workpiece, among others), and the like. In an embodiment, an in-person quality inspection can be performed upon completion of a portion of the assembly (e.g., completion of a weld, completion of two or more welds, com-
pletion of assembly, among others). In another embodiment, weld score component **308** can utilize a sensor to collect data (e.g., video camera, image capture, thermal imaging device, heat sensing camera, tempera-
15 ture sensor, among others) to determine approval of the job. For instance, a quality inspection can be per-
formed remotely via video or image data collected upon completion of a job.

[0072] It is to be appreciated that welding job sequencer component **302** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into check point component **306**, incor-
porated into weld score component **308**, or a suitable combination thereof. Additionally, as discussed below, welding job sequencer component **302** can be a distributed system, software-as-a-service (SaaS), a cloud-
20 based system, or a combination thereof. Further, it is to be appreciated and understood that check point component **306** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into welding job sequencer component **302**, incorporated into weld score component **308**, or a suitable combination thereof. Additionally, check point component **306** can be a distributed system, soft-
ware-as-a-service (SaaS), a cloud-based system, or a combination thereof. Moreover, it is to be appreciated
25 and understood that weld score component **308** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into welding job sequencer component **302**, incorporated into check point component **306**, or a suitable combination thereof. Additionally, weld score component **308** can be a distributed system, software-as-a-service (SaaS), a cloud-based system, or a combination thereof.

[0073] *Fig. 4* illustrates a schematic block diagram of an exemplary embodiment of welding system **400**
30 including welding circuit path **405**. It is to be appreciated that welding system **400** is also referred to as the welding work cell, wherein the welding work cell and/or welding system **400** can produce welds or welded parts. Welding system **400** includes welder power source **410** and display **415** operationally connected to welder power source **410**. Alternatively, display **415** may be an integral part of welder power source **410**. For instance, display **415** can be incorporated into welder power source **410**, a stand-alone component (as
35 depicted), or a combination thereof. Welding system **100** further includes welding cable **120**, welding tool **430**, workpiece connector **450**, spool of wire **460**, wire feeder **470**, wire **480**, and workpiece **440**. Wire **480** is

fed into welding tool **430** from spool **460** via wire feeder **470**, in accordance with an embodiment of the present invention. In accordance with another embodiment of the present invention, welding system **400** does not include spool of wire **460**, wire feeder **470**, or wire **480** but, instead, includes a welding tool comprising a consumable electrode such as used in, for example, stick welding. In accordance with various embodiments of the present invention, welding tool **430** may include at least one of a welding torch, a welding gun, and a welding consumable.

[0074] Welding circuit path **405** runs from welder power source **410** through welding cable **420** to welding tool **430**, through workpiece **440** and/or to workpiece connector **450**, and back through welding cable **420** to welder power source **110**. During operation, electrical current runs through welding circuit path **405** as a voltage is applied to welding circuit path **405**. In accordance with an exemplary embodiment, welding cable **420** comprises a coaxial cable assembly. In accordance with another embodiment, welding cable **420** comprises a first cable length running from welder power source **410** to welding tool **430**, and a second cable length running from workpiece connector **450** to welder power source **410**.

[0075] Welding system **400** includes welding job sequencer component **302** (as described above). Welding job sequencer component **302** is configured to interact with a portion of welding system **400**. For instance, welding job sequencer component **302** can interact with at least the power source **410**, a portion of welding circuit path **405**, spool of wire **460**, wire feeder **470**, or a combination thereof. Welding job sequencer component **302** automatically adjusts one or more elements of welding system **400** based on a welding sequence, wherein the welding sequence is utilized to configure welding system **400** (or an element thereof) without operator intervention in order to perform two or more welding procedures with respective settings or configurations for each welding procedure.

[0076] In an embodiment, welding job sequencer component **302** employs a welding sequence to automatically configure welding equipment. It is to be appreciated that welding system **400** or welding work cell can employ a plurality of welding sequences for assembly of one or more workpieces. For instance, a workpiece can include three (3) welds to complete assembly in which a first welding sequence can be used for the first weld, a second welding sequence can be used for the second weld, and a third welding sequence can be used for the third weld. Moreover, in such example, the entire assembly of the workpiece including the three (3) welds can be referenced as a welding sequence. In an embodiment, a welding sequence that includes specific configurations or steps can further be included within a disparate welding sequence (e.g., nested welding sequence). A nested welding sequence can be a welding sequence that includes a welding sequence as part of the procedure. Moreover, the welding sequence can include at least one of a parameter, a welding schedule, a portion of a welding schedule, a step-by-step instruction, a portion of media (e.g., images, video, text, and the like), a tutorial, among others. In general, the welding sequence can be created and employed in order to guide an operator through welding procedure(s) for specific workpieces without the operator manually setting welding equipment to perform such welding procedures. The subject innovation relates to creating a welding sequence and/or modifying a welding sequence.

[0077] One or more welder power source(s) (e.g., welder power source **410**) aggregates data respective to a respective welding process to which the welder power source is providing power to implement. Such collected data relates to each welder power source and is herein referred to as "weld data." Weld data can include welding parameters and/or information specific to the particular welding process the welder power source is supplying power. For instance, weld data can be an output (e.g., a waveform, a signature, a voltage, a current, among others), a weld time, a power consumption, a welding parameter for a welding process, a welder power source output for the welding process, and the like. In an embodiment, weld data can be utilized with welding job sequencer component **302**. For example, weld data can be set by a welding sequence. In another example, weld data can be used as a feedback or a feedforward loop to verify settings.

[0078] In one embodiment, welding job sequencer component **302** is a computer operable to execute the disclosed methodologies and processes, including methods **1100** and **1200** described herein. In order to provide additional context for various aspects of the present invention, the following discussion is intended to provide a brief, general description of a suitable computing environment in which the various aspects of the present invention may be implemented. While the invention has been described above in the general context of computer-executable instructions that may run on one or more computers, those skilled in the art will recognize that the invention also may be implemented in combination with other program modules and/or as a combination of hardware and/or software. Generally, program modules include routines, programs, components, data structures, etc., that perform particular tasks or implement particular abstract data types.

[0079] Moreover, those skilled in the art will appreciate that the inventive methods may be practiced with other computer system configurations, including single-processor or multiprocessor computer systems, mini-computers, mainframe computers, as well as personal computers, hand-held computing devices, microprocessor-based or programmable consumer electronics, and the like, each of which may be operatively coupled to one or more associated devices. The illustrated aspects of the invention may also be practiced in distributed computing environments where certain tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices. For instance, a remote database, a local database, a cloud-computing platform, a cloud database, or a combination thereof can be utilized with welding job sequencer **302**.

[0080] Welding job sequencer **302** can utilize an exemplary environment for implementing various aspects of the invention including a computer, wherein the computer includes a processing unit, a system memory and a system bus. The system bus couples system components including, but not limited to the system memory to the processing unit. The processing unit may be any of various commercially available processors. Dual microprocessors and other multi-processor architectures also can be employed as the processing unit.

[0081] The system bus can be any of several types of bus structure including a memory bus or memory controller, a peripheral bus and a local bus using any of a variety of commercially available bus architectures. The system memory can include read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within welding job sequencer **302**, such as during start-up, is stored in the ROM.

[0082] Welding job sequencer **302** can further include a hard disk drive, a magnetic disk drive, e.g., to read from or write to a removable disk, and an optical disk drive, e.g., for reading a CD-ROM disk or to read from or write to other optical media. Welding job sequencer **302** can include at least some form of computer readable media. Computer readable media can be any available media that can be accessed by the computer. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by welding job sequencer **302**.

[0083] Communication media typically embodies computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, Radio Frequency (RF), Near Field Communications (NFC), Radio Frequency Identification (RFID), infrared, and/or other wireless media. Combinations of any of the above should also be included within the scope of computer readable media.

[0084] A number of program modules may be stored in the drives and RAM, including an operating system, one or more application programs, other program modules, and program data. The operating system in welding job sequencer **302** can be any of a number of commercially available operating systems.

[0085] In addition, a user may enter commands and information into the computer through a keyboard and a pointing device, such as a mouse. Other input devices may include a microphone, an IR remote control, a track ball, a pen input device, a joystick, a game pad, a digitizing tablet, a satellite dish, a scanner, or the like. These and other input devices are often connected to the processing unit through a serial port interface that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, a game port, a universal serial bus ("USB"), an IR interface, and/or various wireless technologies. A monitor (e.g., display **415**), or other type of display device, may also be connected to the system bus via an interface, such as a video adapter. Visual output may also be accomplished through a remote display network protocol such as

Remote Desktop Protocol, VNC, X-Window System, etc. In addition to visual output, a computer typically includes other peripheral output devices, such as speakers, printers, etc.

[0086] A display (in addition or in combination with display 415) can be employed with welding job sequencer 302 to present data that is electronically received from the processing unit. For example, the display can be an LCD, plasma, CRT, etc. monitor that presents data electronically. Alternatively or in addition, the display can present received data in a hard copy format such as a printer, facsimile, plotter etc. The display can present data in any color and can receive data from welding job sequencer 302 via any wireless or hard wire protocol and/or standard. In another example, welding job sequencer 302 and/or system 400 can be utilized with a mobile device such as a cellular phone, a smart phone, a tablet, a portable gaming device, a portable Internet browsing device, a Wi-Fi device, a Portable Digital Assistant (PDA), among others.

[0087] The computer can operate in a networked environment using logical and/or physical connections to one or more remote computers, such as a remote computer(s). The remote computer(s) can be a workstation, a server computer, a router, a personal computer, microprocessor based entertainment appliance, a peer device or other common network node, and typically includes many or all of the elements described relative to the computer. The logical connections depicted include a local area network (LAN) and a wide area network (WAN). Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

[0088] When used in a LAN networking environment, the computer is connected to the local network through a network interface or adapter. When used in a WAN networking environment, the computer typically includes a modem, or is connected to a communications server on the LAN, or has other means for establishing communications over the WAN, such as the Internet. In a networked environment, program modules depicted relative to the computer, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that network connections described herein are exemplary and other means of establishing a communications link between the computers may be used.

[0089] Alternatively or in addition, a local or cloud (e.g., local, cloud, remote, among others) computing platform can be utilized for data aggregation, processing, and delivery. For this purpose, the cloud computing platform can include a plurality of processors, memory, and servers in a particular remote location. Under a software-as-a-service (SaaS) paradigm, a single application is employed by a plurality of users to access data resident in the cloud. In this manner, processing requirements at a local level are mitigated as data processing is generally done in the cloud, thereby relieving user network resources. The software-as-a-service application allows users to log into a web-based service (e.g., via a web browser) which hosts all the programs resident in the cloud.

[0090] Turning to *Fig. 5*, system **500** illustrates a welding environment with a plurality of welding work cells via a local, remote, or cloud database. System **500** includes a plurality of welding work cells such as first welding work cell **515**, second welding work cell **520** to Nth welding work cell **530**, where N is a positive integer. In an embodiment, each welding work cell includes a welding job sequencer component **535**, **540**, and **545**, that is used to implement a welding schedule(s) to each welding work cell as well as or in the alternative to an enterprise-wide welding operation(s) and/or enterprise-wide welding work cell. Welding sequence(s) from each welding job sequencer component **535**, **540**, and **545** is received from the local or cloud database (e.g., local database, cloud database, remote database, among others) computing platform **510**.

[0091] In an embodiment, each welding work cell further includes a local data store. For instance, first welding work cell **515** includes welding job sequencer component **535** and data store **550**, second welding work cell **520** includes welding job sequencer component **540** and data store **555**, and Nth welding work cell **530** includes welding job sequencer component **545** and data store **560**. It is to be appreciated that system **500** includes welding job sequencer **302** hosted by computing platform **510** in which each welding work cell includes a distributed and respective welding job sequencer component. Yet, it is to be understood that welding job sequencer **302** (and distributed welding job sequencer components **535**, **540**, and **545**) can be a stand-alone component in each welding work cell or a stand-alone component in the computing platform **510**.

[0092] Each welding work cell can include a respective data store that stores a portion of at least one welding sequence. For instance, welding sequences related to a welding process A is employed at one or more welding work cell. The welding sequence is stored in a respective local data store (e.g., data stores **550**, **555**, and **560**). Yet, it is to be appreciated and understood that each welding work cell can include a local data store (as depicted), a collective and shared remote data store, a collective and shared local data store, a cloud data store hosted by computing platform **510**, or a combination thereof. A "data store" or "memory" can be, for example, either volatile memory or nonvolatile memory, or can include both volatile and nonvolatile memory. The data store of the subject systems and methods is intended to comprise, without being limited to, these and other suitable types of memory. In addition, the data store can be a server, a database, a hard drive, a flash drive, an external hard drive, a portable hard drive, a cloud-based storage, and the like.

[0093] For instance, welding job sequencer component **302** can manage each welding job sequencer component **535**, **540**, **545** in each welding work cell **515**, **520**, **530**. In another embodiment, the communications can be transmitted from welding job sequencer **302** to each welding work cell (e.g., each welding job sequencer component). In another embodiment, the communications can be received from each welding work cell (e.g., each welding job sequencer component) from the welding job sequencer component **302**. For instance, a welding sequence can be used with 1st welding work cell **515** and communicated directly to a disparate welding work cell or via computing platform **510**.

[0094] Fig. 6 illustrates welding system **600** that includes a plurality of welding work cells in which welding job sequencer component **302** is hosted with computing platform **510** to utilize one or more welding sequences to configure welding equipment within one or more welding systems, welding environments, and/or welding work cells. Welding system **600** includes a local or cloud-based welding job sequencer component **302** hosted in computing platform **510**. Welding job sequencer component **302** can utilize a welding sequence with a number of welding work cell. For instance, welding system **600** can a number of welding work cells such as, but not limited to, 1st welding work cell **620**, 2nd welding work cell **630**, to Nth welding work cell, where N is a positive integer. It is to be appreciated that the locality of the welding job sequencer component **302** is in relation to each 1st welding work cell **620**, 2nd welding work cell **630**, and/or Nth welding work cell **640**.

[0095] In an embodiment, welding job sequencer **302** communicates one or more welding sequence to a target welding work cell, wherein the target welding work cell is a welding work cell that is to utilize the communicated welding sequence. Yet, in another embodiment, welding job sequencer **302** utilizes memory **650** hosted by computing platform **510** in which one or more welding sequences are stored. Yet, the stored welding sequence can be related or targeted to one or more welding work cells regardless of a storage location (e.g., local, cloud, remote, among others).

[0096] Fig. 7 illustrates system **700** that generates a welding sequence based on welding procedure data. System **700** includes collect component **702** that is configured to receive a portion of welding procedure data to create welding sequence **706**. Collect component **702** receives, collects, aggregates, and/or identifies a portion of welding procedure data in which generate component **704** utilizes to create welding sequence **706**. As discussed above, welding sequence **706** is used by a welding job sequencer component (See Figs. 3-6) to perform two or more welds with two or more respective welding parameters (e.g., welding schedules, parameters, configurations, settings, and the like). In particular, welding sequence **706** is employed to automatically configure welding equipment without operator intervention to perform a first welding operation with a first welding schedule and a second welding operation with a second welding schedule.

[0097] The portion of welding procedure data is data representative of a weld in a non-real world environment. For instance, a portion of welding procedure data is data based upon a non-real world welding operation (e.g., computer-based replication or representation of a weld, data, among others). By way of example and not limitation, welding procedure data can be at least one of a data file (e.g., text file, word processing document file, spreadsheet data file, email, text message, computer-aided design (CAD) file, image file, 3-dimensional (3D) data file, work instructions, Welding Procedure Specification (WPS), among others), wherein the data file can include welding parameters, settings (e.g., voltage, current, and the like), welding type, weld size, weld dimensions (e.g., length, width, height, among others), material for workpiece, among others. From the data file or welding procedure data, system **700** can aggregate and identify other welding parameters used with the weld or welding procedure such as, but not limited to, welding equipment configurations (e.g., power source settings, waveforms, wire feed speed, and the like), welder setup (e.g., workpiece

type, wire type, material type, weld to perform, and the like), among others. In another embodiment, a welding sequence and/or a welding sequence step can be created from a work instruction, work order, order request, purchase order, among others.

5 [0098] In an embodiment, a group of steps for welding sequence **706** can be inserted with a data file. For instance, a welding sequence with ten (10) welding operations can be added with a data file that includes welding procedure data for each step. By way of example and not limitation, welding procedure data and/or a data file can be utilized as a source code and/or with a compiler (not shown) to generate welding sequence **706** based on data contained therein. For instance, commands, operators, operators, expressions, inputs, and the like can be included within the data file and/or welding procedure data and be further employed to
10 create (e.g., compiled) welding sequence.

[0099] In an embodiment, a CAD model can be utilized as a data file and/or welding procedure data to generate welding sequence **706**. By way of example and not limitation, the CAD model can be used to import weld sequence(s). Thus, a hypothetical weld, created in with CAD or other computer-generated imagery, can be utilized as a foundation for a weld sequence to create real world weld(s). In another example, a 3D
15 model that is printed or created from 3D printing can be utilized as a data file or data representative of a weld. 3D printing can be a process of making a three-dimensional solid object of virtually any shape from a digital model, wherein the 3D printing is achieved using an additive process with successive layers of material being laid down in different shapes.

[00100] As discussed above, system **700** creates welding sequence **706** based on welding procedure data or
20 data file(s) to train a welding job sequencer component, wherein the welding job sequencer component utilizes the created welding sequence **706** to perform two or more welds. In an embodiment, welding procedure data is a data file representative of a weld such as, for instance, a CAD file, CAD model, CAD drawing, among others. Welding sequence **706** can be generated based on such data file(s). In another embodiment, such data file(s) can be used for revision control or changes to be made for welding sequence **706**. In
25 still another embodiment, WPS information can be utilized alone or in combination with the data file(s).

[00101] Although system **700** is illustrated as a stand-alone system, it is to be appreciated that system **700** can be a stand-alone system (as depicted), incorporated into welding job sequencer component (not shown), or a combination thereof. Further, welding procedure data can be received via welding job sequencer and thus from a local data store, a remote data store, a cloud-based data store, a computing platform, and/or any
30 other network or computing environment configuration discussed above in regards to the welding job sequencer. For instance, a welding environment A can collect welding procedure data or parameters in which such welding procedure data is communicated (e.g., via Internet, cloud, computing platform, among others) to welding environment B. Welding environment B can utilize the welding procedure data from environment A to create a welding sequence for welding environment B based on a correlation or matched parameter for
35 the welding procedure to perform.

[00102] In an embodiment, non-real world weld data can be utilized by generate component **704** to create welding sequence **706** independent of a welding environment to which welding procedure data originates. For instance, welding procedure data can be collected from data representative (e.g., data file) of a weld, wherein additional welding data parameters can be determined related to, for instance, welding equipment, welding environments, welding work cells, and the like. Based on data file(s), generate component **704** can further be configured to identify one or more parameters to use as welding sequence **706**. In an embodiment, a computer-based evaluation can be utilized to determine additional welding parameters or settings for a welding sequence based on the data file utilized by generate component **704**. In another embodiment, an operator or user can create data file(s) to use as a basis for welding sequence **706**, wherein the welding sequence can be automatically supplemented with settings or configurations based upon the created data file(s). As discussed above, a cloud-based platform or computing platform can be employed to utilize welding procedure data used to generate welding sequence(s) **706**.

[00103] In an example, a welding sequence can include a replenishment of a consumable. The welding sequence can be created or edited to include a replenishment of a consumable for at least one of a welding work cell, a welding equipment, among others. For instance, a replenishment of a consumable can be included with a welding sequence after a period of time, wherein the period of time is estimated based on the duration the welding equipment is used (e.g., estimate the use of consumables). Thus, a welding environment, welding system, and/or welding work cell can be evaluated in real time or from collected real time data and identify data to determine a replenishment of a consumable.

[00104] In an embodiment, welding sequence can be compiled or created to include a replenishment of a consumable during downtime (e.g., shift change, duration of time welding equipment is not used, among others). In particular, a gas mixture changeover can be programmed within welding sequence **706**. In another example, a gas mixture changeover can be performed during downtime between sequence steps and/or between one welding sequence and another welding sequence. By way of example and not limitation, a functional block for gas solenoid selection can be utilized for each pass.

[00105] In another example, a welding sequence can include an inspection or a repair. The welding sequence can be created or edited to include an inspection request or a repair request based on a factor such as, but not limited to, a time, a duration, among others. A welding work cell can have a maintenance period for a particular time and if a welding sequence is created for such welding work cell, a repair or maintenance can be included with the created welding sequence. Thus, a welding environment, welding system, and/or welding work cell can be evaluated in real time or from collected real time data and identify data to determine inspections or repairs.

[00106] Furthermore, it is to be appreciated and understood that collect component **702** can be a stand-alone component (as depicted), incorporated into generate component **704**, incorporated into the welding job sequencer component (not shown), or a combination thereof. Additionally, generate component **704** can be a

stand-alone component (as depicted), incorporated into collect component **704**, incorporated into the welding job sequencer component (not shown), or a combination thereof.

[00107] Fig. 8 illustrates system **800** that creates a welding sequence from a work instruction related to at least one of a workpiece or an assembly of a workpiece. System **800** further includes work instructions **802** related to at least one of workpiece **808** or the assembly of workpiece **808** utilizing welding equipment **806**. It is to be appreciated and understood that work instructions **802** are used solely for example and any suitable welding procedure data as discussed above can be utilized. Work instructions can be created or identified by at least one of a user, a computer-based system, or a combination thereof. For instance, a first system can be used by a user to create a data file representative of a weld (e.g., work instruction) and a second system can be used by a second user to identify or create a welding sequence based on such data file. In another embodiment, operator **804** can input work instructions received from a client, wherein a welding sequence can be generated therefrom. By way of example and not limitation, welding sequence based upon work instructions **802** allow operator **804** to perform a weld (e.g., create the weld with welding equipment **806** on workpiece **808**).

[00108] In another embodiment, data file(s) or data representative of a weld (e.g., work instructions **802**, among others) can be stored in a data store (discussed in more detail below). With a data store, characteristics (e.g., weld type, material, workpiece, type of welding equipment, wire feed speed, wire gauge, time, pace, among others) can be identified from which individual characteristics can be aggregated to create one or more welding sequences. In other words, individual data (welding procedure data representative of a single weld) can be collected for a particular welding sequence (already created or being used) from which a best individual weld data tracked can replace existing data with the welding sequence (e.g., based upon performance analysis, among others).

[00109] Fig. 9 illustrates system **900** that creates a welding sequence for employment in a welding environment. System **900** includes media component **902** that is configured to include media to a welding sequence. It is to be appreciated that media can be, but is not limited to being, photos, images, graphics, text, audio, video, computer generated imagery, animations, dictations, voice recordings, and the like. For example, media component **902** includes media to facilitate performing a weld or welding operation from an operator perspective. In an embodiment, media component **902** includes a video of a weld being created for the welding sequence. Thus, when the welding sequence is used to create a weld, the video can guide an operator on how to perform the weld. In another example, media component **902** provides media related to at least one of safety concerns for utilizing the welding procedure, areas of caution, problematic situations, warnings, potential mistakes, scores, time, date, ranking of welding performed, among others. Media component **902** includes data with the welding sequence that can be displayed, communicated, or output to the operator, a location where the welding sequence is used, within a welding work cell, a welding environment, and the like. It is to be further appreciated that media component **902** is further configured to identify media from, for instance, welding procedure data, data representative of a weld, and/or a data file. For instance,

media can be extracted from a work instruction, work order, purchase order, image data, among others. In still another embodiment, media related to a recorded virtual simulation of a weld can be included or associated with welding sequence(s) to facilitate performing a weld.

[00110] System **900** further includes identification component **904** that is configured to aggregate data for specification of the created welding sequence. Identification component **904** associates data to a welding sequence during or after creation, wherein the data can specify such welding sequence. By way of example and not limitation, the data can relate to date, time, user identification of who created, user identification of who modified, welding job, client, workpiece information, welding information (e.g., welding parameters, welding equipment settings, and the like), environment data (e.g., welding environment that welding sequence will be used, target welding equipment, and the like), job information (e.g., work order, client, work instructions, and the like), data file specifics, data file storage location, data file information (e.g., format, date created, time created, application to open the data file, and the like), among others. Identification component **904** is customizable to include data to locate and employ a welding sequence via search and/or query based on a criteria defined or included with a welding sequence. In an embodiment, a job-based criteria can be employed in which job related data is aggregated for a created welding sequence and associated therewith. Thus, after creation of the welding sequence, a query (discussed in more detail below) with job-based data can be utilized to locate and find the welding sequence. It is to be appreciated that various data can be collected and associated with a created welding sequence at various points of creation and that any suitable data can be collected at any suitable point during the creation of a welding sequence.

[00111] For instance, identification component **904** can collect an employee identification of a creator of a welding sequence. By way of example and not limitation, the employee identification can be related to a creator of the welding sequence, a creator of a data file used as part of a creation of a welding sequence, an editor of a welding sequence, among others. It is to be appreciated that identification component **904** can associate one or more employee identifications to a welding sequence to provide a tracking of each welding sequence creation, edit, and/or modification of a welding sequence. This employee identification information can be used to provide query results for one or more creators (e.g., employees, workers, users, and the like).

[00112] Moreover, it is to be appreciated and understood that identification component **904** can collect data for a portion of a welding sequence to enable portions or parts of a welding sequence to be identified or located. This, for instance, can allow a user to identify a part or portion of a welding sequence to reuse in a creation of another welding sequence.

[00113] System **900** further includes communication component **906** that is configured to transmit and/or receive at least a portion of a welding sequence. In an embodiment, communication component **906** can transmit a portion of a welding sequence from a first location to a second location. For example, a welding sequence can be communicated from a welding work cell to a disparate welding work cell, a welding environment to a disparate welding environment, an operator to a disparate operator, a combination thereof,

among others. In an embodiment, communication component **906** is further configured to print data related to the welding sequence, wherein the data is at least one of work instructions, related media, client information, welding parameters, welding equipment settings, details of the welding sequence, among others. In an embodiment, communication component **906** is configured to print a work instruction from a welding sequence. In other words, the data file or welding procedure data (e.g., work instructions) utilized to create the welding sequence can be utilized to identify the work instructions from the welding sequence. In a particular example, communication component **906** can be configured to communicate a work instruction for a workpiece based on association with a welding sequence (e.g., wherein the work instruction is derived from the welding sequence) and the work instruction is physically coupled or connected to one or more workpieces or material used for assembly.

[00114] *Fig. 10* illustrates system **1000** that utilizes a welding sequence for automatic configuration of a welding system to perform two or more welds. System **1000** includes query component **1002** that is configured to receive a query and provide a result based on the query. Query component **1002** can query one or more data stores discussed above. In particular, query component **1002** can query data stored with welding sequence data store **1004**. Welding sequence data store **1004** stores at least one of a welding sequence, a portion of a welding sequence, and/or data (e.g., metadata, metadata tags, and the like) associated with a welding sequence. In an embodiment, data store **1004** stores data representative of a weld, data file(s), and/or welding procedure data. Query component **1002**, based on a received query, can generate results from at least welding sequence data store **1004**. Query component **1002** and welding sequence data store **1004** facilitate creating welding sequences (e.g., by allowing reuse of portions of a welding sequence, reuse data file(s), reuse data representative of a weld, and the like), management of welding sequences, and/or locating welding sequences (e.g., updating, synchronizing, consistency, and the like). As discussed above, query component **1002** can leverage data collected via identification component (See *Fig. 9*).

[00115] In an embodiment, welding procedure data and/or data file(s) can be identified by querying welding sequence data store **1004** and/or other data stores (discussed above). For instance, data file(s) or data representative of a weld can be evaluated by collect component **702** and/or generate component **704**, wherein the evaluation allows identification of at least one portion of a welding sequence that matches or correlates to the data file(s) or data representation of a weld. In other words, data file(s) used to create a welding sequence can be supplemented with information from previously created welding sequences, real-world weld data collected in real time, other data files (e.g., other data files or data representative of a weld, other CAD files, other work instructions, and the like), among others. Thus, in a particular example, CAD data (e.g., a type of data representative of a weld) can be queried by query component **1002** to identify other CAD data that relates to the CAD data or real world weld data previously collected or utilized to create a welding sequence.

[00116] In an embodiment, query component **1002** is further configured to match a welding sequence based on a received query or data. For instance, a query requesting a welding sequence related to a particular

data file(s) can be received by query component **1002** in which a welding sequence matching or including the particular data file is returned. In a more particular example, data representative of a weld (e.g., weld simulation program, 3D CAD model, CAD file, and the like) can be monitored and the query component **1002** can identify a welding sequence that matches or includes a portion of the data representative of the weld.

5 Utilizing the matched welding sequence, welding equipment and/or operator(s) can be guided through the welding procedure. For instance, a CAD data file can be used as a basis to create a welding sequence which allows a physical weld to be created based on a virtual representation and/or data file representative of the weld.

[00117] System **1000** further includes update component **1006** that is configured to modify a previously created welding sequence. Update component **1006** modifies an existing welding sequence with new (e.g., non-existing data) or edited (e.g., previously existing data) information. It is to be appreciated that update component **1006** can create a new welding sequence that includes modified data and archive the previous welding sequence. In another embodiment, update component **1006** can replace the new welding sequence with modified data in place of the previous welding sequence. Moreover, it is to be appreciated that update component **1006** can be utilized with query component **1002**, welding sequence data store **1004**, and/or identification component (See *Fig. 9*).

[00118] For instance, a user can utilize query component **1002** to identify a previously created welding sequence in order to update the welding sequence with an updated media. Once identified via query component **1002** in welding sequence data store **1004** with identification component **904**, the user or operator can add or replace media with the welding sequence to provide up-to-date specifications.

[00119] In an embodiment, upon completion of a created welding procedure, a data model and/or software model can be employed to manage factors of the welding procedure used for the welding procedure. The software model and/or data model evaluates welding procedures performed with a corresponding welding sequence from which factors can be adjusted. For instance, a cycle time and/or a progression for a welding procedure can be adjusted based upon at least one of a software model and/or a data model.

[00120] In view of the exemplary devices and elements described supra, methodologies that may be implemented in accordance with the disclosed subject matter will be better appreciated with reference to the flow charts and/or methodologies of *Fig. 11* and *12*. The methodologies and/or flow diagrams are shown and described as a series of blocks, the claimed subject matter is not limited by the order of the blocks, as some blocks may occur in different orders and/or concurrently with other blocks from what is depicted and described herein. In an embodiment, a first input can be received prior to a second input (as described below). In another embodiment, a second input can be received prior to a first input. In an embodiment, the a first input and a second input can be received at substantially the same time. Moreover, not all illustrated blocks may be required to implement the methods and/or flow diagrams described hereinafter.

[00121] Sequentially, the following occurs as illustrated in the decision tree flow diagram **1100** of *Fig. 11* which is a flow diagram **1100** that creates a welding sequence for employment to automatically configure welding equipment within a welding work cell. Methodology **1100** leverages data representative of a weld to create a welding sequence. Data representative of a portion of a welding process is collected (reference block **1102**). A first parameter is identified in which the first parameter is related to a first welding schedule based on the collected data (reference block **1104**). A second parameter is identified in which the second parameter is related to a second welding schedule based on at least one of the collected data or a real time weld procedure (reference block **1106**). It is to be appreciated that the first parameter and/or the second parameter can be based upon at least one of data file(s) representative of a weld in which the data file(s) not captured from a real time welding procedure. For instance, the first parameter and/or the second parameter can be a CAD file, a work instruction, a 3-dimensional (3D) model, a work instruction, a work order, WPS data, computer generated image of a weld, among others. A welding sequence is created based on the first parameter and the second parameter, wherein the welding sequence defines a first welding procedure that includes the first parameter to create a first weld on a workpiece and a second welding procedure that includes the second parameter to create a second weld on the workpiece (reference block **1108**). The created welding sequence is stored remote from the welding work cell (reference block **1110**). For instance, the welding sequence is stored on a disparate network than a network that hosts a portion of the welding work cell. In another embodiment, the welding sequence can be stored locally in reference to the welding work cell (e.g., welding sequence stored on a same network as the welding work cell). The welding sequence is utilized to automatically modify a welding equipment within the welding work cell without intervention from an operator creating at least one of the first weld or the second weld (reference block **1112**).

[00122] The following occurs as illustrated in the flow diagram **1200** of *Fig. 12*. Flow diagram **1200** relates to creating a welding sequence based on one or more parameters of a welding procedure collected from a data file. A data file is collected that includes a parameter with a welding schedule for a workpiece (reference block **1202**). A welding sequence is created for a welding work cell, wherein the welding sequence defines at least the parameter and the welding schedule for a first welding procedure to create a first weld on a workpiece and a second welding procedure to create a second weld on the workpiece (reference block **1204**). The welding sequence is employed for the welding work cell to perform one or more welds to assemble the workpiece by automatically adjusting a setting on a welding equipment within the welding work cell (reference block **1206**).

[00123] By way of example and not limitation, welding equipment (e.g., controller for a welder power source, wire feeder, welder power source, among others) can include one or more steps related to a particular welding process for a specific workpiece, wherein a step can include a respective setting or configuration for at least one welding equipment. For instance, a first workpiece can include steps A, B, C, and D based on welding parameters desired, the welding process used, and/or the workpiece. In another example, a second workpiece can include steps B, C, A, E, and F. With the employment of a welding sequence, the controller

implementing the steps for the welding process via the welder power source and/or welding equipment can be managed and/or instructed. For instance, the welding sequence can indicate at least one of the following: which steps to perform, redo a step, skip a step, pause a sequence of steps, among others. Furthermore, a controller (e.g., or other suitable component) can control one or more welder power sources, parameters, welding schedules, among others associated with one or more welding processes, wherein each welding process can have a corresponding welding sequence(s).

[00124] In an embodiment, a welder system is provided that includes a weld score component that is configured to evaluate at least one of the first weld or the second weld performed on the workpiece based upon at least one of an image of the first weld or the second weld or a user inspection. In an embodiment, a welder system is provided that includes a check point component that is configured to monitor the creation of at least one of the first weld or the second weld in real time. In an embodiment, a welder system is provided in which a welding job sequencer component instructs an operator of the welding work cell to assemble the workpiece with the first welding procedure and the second welding procedure having two separate welding schedules.

[00125] In an embodiment of a welder system, the data representative of the portion of the welding process is a computer-aided design (CAD) file. In an embodiment of a welder system, the data representative of the portion of the welding process is a work order instruction. In an embodiment of a welder system, the data representative of the portion of the welding process is a data file that includes information related to at least one of a welding equipment setting, a weld type, a material of the workpiece, or a customer for the workpiece. In an embodiment of a welder system, the data representative of the portion of the welding process is a welding procedure specification (WPS), wherein the WPS includes information for specific application to assure repeatability by at least one of a welder or an operator.

[00126] In an embodiment of a welder system, a second component (e.g., generate component) can utilize the welding sequence as a portion of an additional welding sequence. In an embodiment, a welder system can include a third component that is configured to create a work instruction based upon the welding sequence. In an embodiment, a welder system can include a data store that stores at least one of the parameter, the work schedule, or the welding sequence; and a fourth component that is configured to generate a query result based on a received query, wherein the query result is a welding sequence originating from a previously performed welding procedure from the data store that satisfies the received query.

[00127] In an embodiment, a welder system can include a fifth component that is configured to collect identification information for the welding sequence. In the embodiment, the identification information is metadata related to at least one of a user that created the welding sequence, a weld type, a client name, a material of the workpiece, a date, a time, a location, a serial number, a price, a wire speed, an originating welding procedure that is a source for the welding sequence, data location, data filename, data source, data file type, or a wire type.

5 [00128] In an embodiment, a method is provided that includes modifying the created welding sequence to update at least a portion of the first welding schedule or the second welding schedule based on data representative of the portion of the welding process. In an embodiment, a method is provided that includes modifying the created welding sequence with a portion of data related to a welding procedure performed in real time.

10 [00129] In an embodiment, the creating the welding process further includes evaluating at least one of the first parameter or the second parameter in comparison with a previously created welding sequence; identifying a correlation between the first parameter and the second parameter with a portion of at least one previously created welding sequence; and utilizing a portion of the previously created welding sequence to create the welding sequence. In an embodiment, a method is provided that includes appending the welding sequence with media to aid in performing at least one of the first weld or the second weld, the media is at least one of a video or an image.

15 [00130] The above examples are merely illustrative of several possible embodiments of various aspects of the present invention, wherein equivalent alterations and/or modifications will occur to others skilled in the art upon reading and understanding this specification and the annexed drawings. In particular regard to the various functions performed by the above described components (assemblies, devices, systems, circuits, and the like), the terms (including a reference to a "means") used to describe such components are intended to correspond, unless otherwise indicated, to any component, such as hardware, software, or combinations thereof, which performs the specified function of the described component (e.g., that is functionally equivalent), even though not structurally equivalent to the disclosed structure which performs the function in the illustrated implementations of the invention. In addition although a particular feature of the invention may have been disclosed with respect to only one of several implementations, such feature may be combined with one or more other features of the other implementations as may be desired and advantageous for any given or particular application. Also, to the extent that the terms "including", "includes", "having", "has", "with", or variants thereof are used in the detailed description and/or in the claims, such terms are intended to be inclusive in a manner similar to the term "comprising."

20 [00131] This written description uses examples to disclose the invention, including the best mode, and also to enable one of ordinary skill in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that are not different from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

25 [00132] The best mode for carrying out the invention has been described for purposes of illustrating the best mode known to the applicant at the time. The examples are illustrative only and not meant to limit the inven-

tion, as measured by the scope and merit of the claims. The invention has been described with reference to preferred and alternate embodiments. Obviously, modifications and alterations will occur to others upon the reading and understanding of the specification. It is intended to include all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

Reference numbers:

100	welding system	545	welding job sequencer component
110	operation/welder power source	550	data store
120	operation/welding cable	555	data store
122	operation	560	data store
124	operation	600	welding system
126	operation	620	1 st welding work cell
130	operation	630	2 nd welding work cell
132	operations	640	Nth welding work cell
150	operation	650	memory
152	operation	700	system
154	operation	702	collect component
160	operation	704	generate component
170	operation	706	welding sequence
300	welding system	800	system
302	sequencer component	802	work instructions
304	welding work cell	804	operator
306	check point component	806	welding equipment
308	weld score component	808	workpiece
400	welding system	900	system
405	welding circuit path	902	media component
410	welder power source	904	identification component
415	display	906	communication component
420	welding cable	1000	system
430	welding tool	1002	query component
440	workpiece	1004	welding sequence data store
450	workpiece connector	1006	update component
460	wire	1100	method/tree flow diagram
470	wire feeder	1102	reference block
480	wire	1104	reference block
500	system	1106	reference block
510	computing platform	1108	reference block
515	first welding work cell	1110	reference block
520	second welding work cell	1200	method/flow diagram
530	Nth welding work cell	1202	reference block
535	welding job sequencer component	1204	reference block
540	welding job sequencer component	1206	reference block

A weld schedule
B weld schedule

C weld schedule
N positive integer

CLAIMS

1. A welder system (300), characterized by:
 - a first component that is configured to receive a parameter related to a welding schedule, wherein the parameter is collected from data representative of a portion of a welding process;
 - a second component (704) that is configured to create a welding sequence (706) for a welding work cell (304), wherein the welding sequence (706) defines at least the parameter and the welding schedule for a first welding procedure to create a first weld on a workpiece (440) and a second welding procedure to create a second weld on the workpiece (440); and
 - a welding job sequencer component (302) that is configured to employ the welding sequence for the welding work cell (304).
2. The welder system of claim 1, further comprising a weld score component (308) that is configured to evaluate at least one of the first weld or the second weld performed on the workpiece (440) based upon at least one of an image of the first weld or the second weld or a user inspection.
3. The welder system of claim 1 or 2, further comprising a check point component (306) that is configured to monitor the creation of at least one of the first weld or the second weld in real time.
4. The welder system of one of the claims 1 to 3, wherein the welding job sequencer component (302) further instructs an operator (804) of the welding work cell (304) to assemble the workpiece (440) with the first welding procedure and the second welding procedure having two separate welding schedules.
5. The welder system of one of the claims 1 to 4, wherein the data representative of the portion of the welding process is a computer-aided design (CAD) file, and/or a work order instruction, and/or a data file that includes information related to at least one of a welding equipment setting, a weld type, a material of the workpiece, or a customer for the workpiece, and/or a welding procedure specification (WPS), wherein the WPS includes information for specific application to assure repeatability by at least one of a welder or an operator.
6. The welder system of one of the claims 1 to 5, wherein the second component (704) utilizes the welding sequence (706) as a portion of an additional welding sequence (706).
7. The welder system of one of the claims 1 to 6, further comprising a third component that is configured to create a work instruction based upon the welding sequence (706).
8. The welder system of one of the claims 1 to 7, further comprising:

a data store (1004) that stores at least one of the parameter, the work schedule, or the welding sequence; and

a fourth component that is configured to generate a query result based on a received query, wherein the query result is a welding sequence originating from a previously performed welding procedure from the data store (1004) that satisfies the received query.

9. The welder system of one of the claims 1 to 8, further comprising a fifth component that is configured to collect identification information for the welding sequence (706), wherein preferably: the identification information is metadata related to at least one of a user that created the welding sequence, a weld type, a client name, a material of the workpiece, a date, a time, a location, a serial number, a price, a wire speed, an originating welding procedure that is a source for the welding sequence, data location, data filename, data source, data file type, or a wire type.

10. A method (1100) of welding in a welding work cell (304), characterized by:
Collecting (1102) data representative of a portion of a welding process;
Identifying (1104) a first parameter related to a first welding schedule based on the collected data;

Identifying (1106) a second parameter related to a second welding schedule based on at least one of the collected data or a real time weld procedure;

creating (1108) a welding sequence (706) based on the first parameter and the second parameter,

wherein the welding sequence (706) defines a first welding procedure that includes the first parameter to create a first weld on a workpiece (440) and a second welding procedure that includes the second parameter to create a second weld on the workpiece (440);

storing (1110) the created welding sequence (706) remote from the welding work cell (304);
and

utilizing (1112) the welding sequence (706) to automatically modify a welding equipment within the welding work cell (304) without intervention from an operator (804) creating at least one of the first weld or the second weld.

11. The method of claim 10, further comprising modifying the created welding sequence (706) to update at least a portion of the first welding schedule or the second welding schedule based on data representative of the portion of the welding process.

12. The method of claim 10 or 11, further comprising modifying the created welding sequence (706) with a portion of data related to a welding procedure performed in real time.

13. The method of one of the claims 10 to 12, wherein the creating the welding process further comprising:

evaluating at least one of the first parameter or the second parameter in comparison with a previously created welding sequence (706);

identifying a correlation between the first parameter and the second parameter with a portion of at least one previously created welding sequence (706); and

utilizing a portion of the previously created welding sequence (706) to create the welding sequence (706).

14. The method of one of the claims 10 to 13, further comprising appending the welding sequence (706) with media to aid in performing at least one of the first weld or the second weld, the media is at least one of a video or an image.

15. A welder system (300), comprising:

means for collecting a data file that includes a parameter with a welding schedule for a workpiece;

means for creating a welding sequence for a welding work cell, wherein the welding sequence defines at least the parameter and the welding schedule for a first welding procedure to create a first weld on a workpiece and a second welding procedure to create a second weld on the workpiece; and

means for employing the welding sequence for the welding work cell to perform one or more welds to assemble the workpiece by automatically adjusting a setting on a welding equipment within the welding work cell, and preferably comprising one or more of the claims 1 to 9.

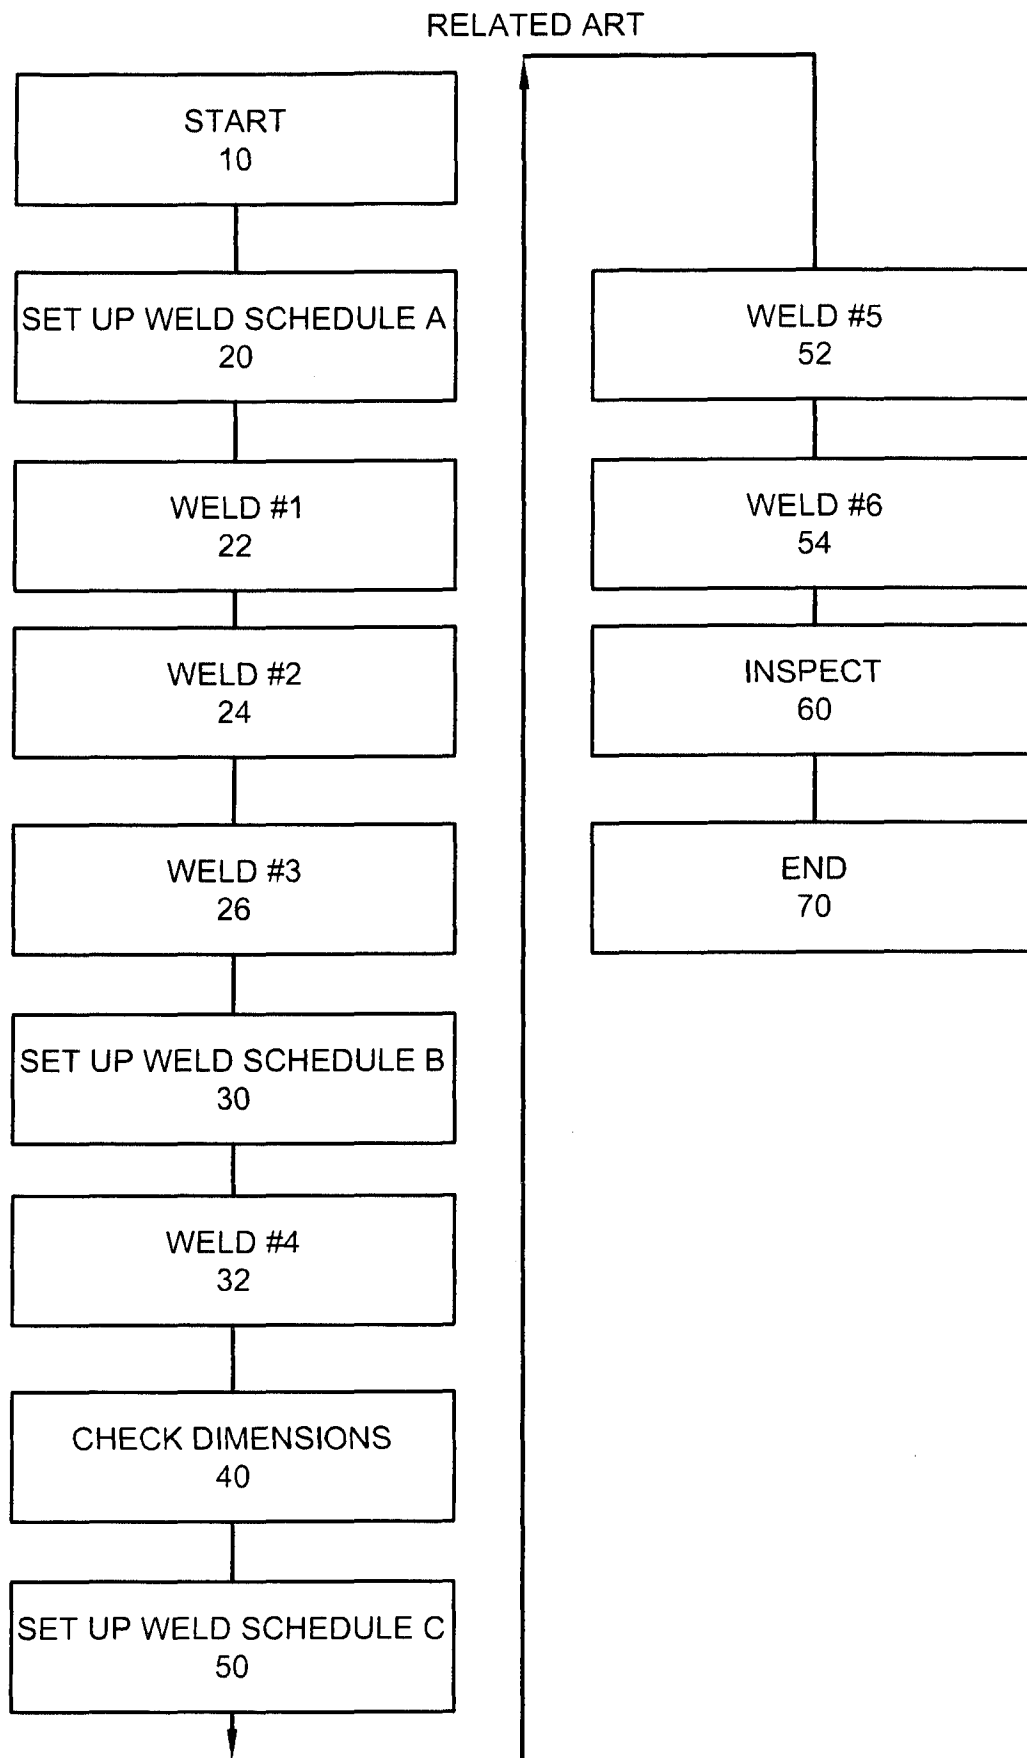


FIG. 1

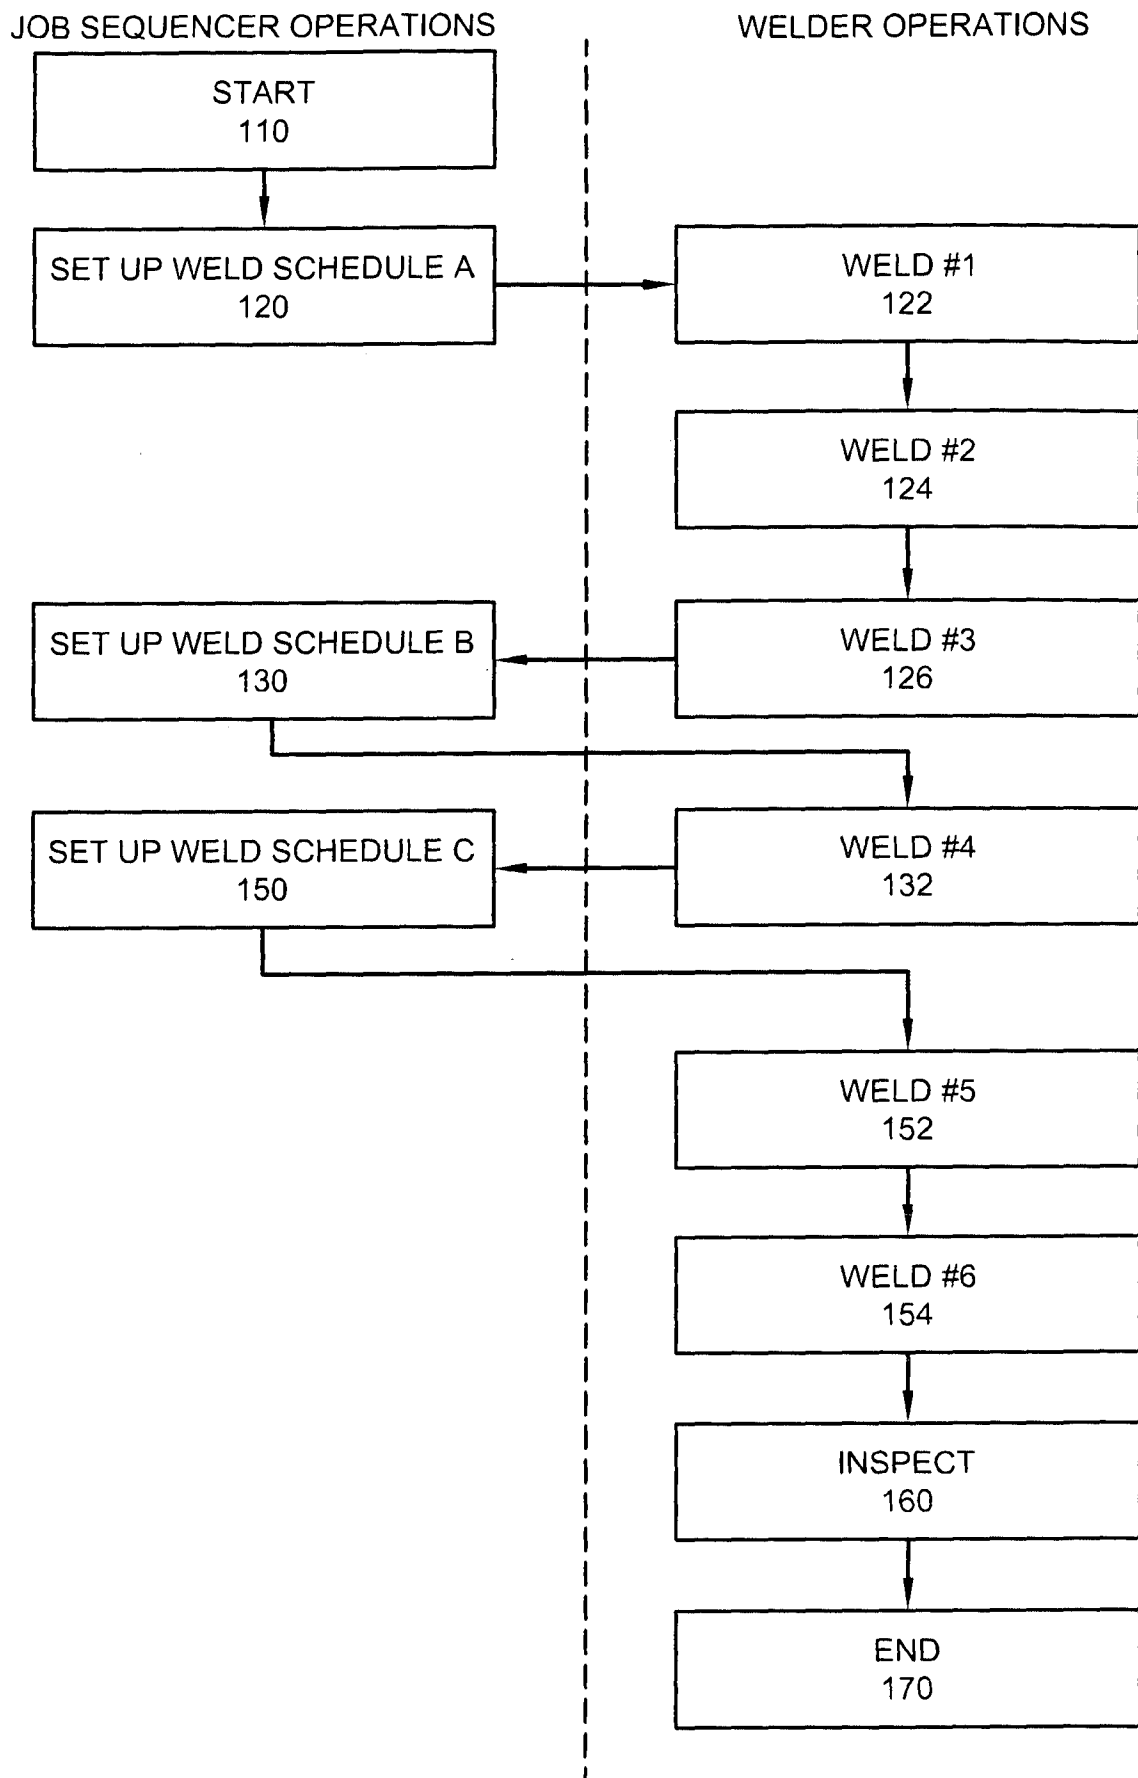


FIG. 2

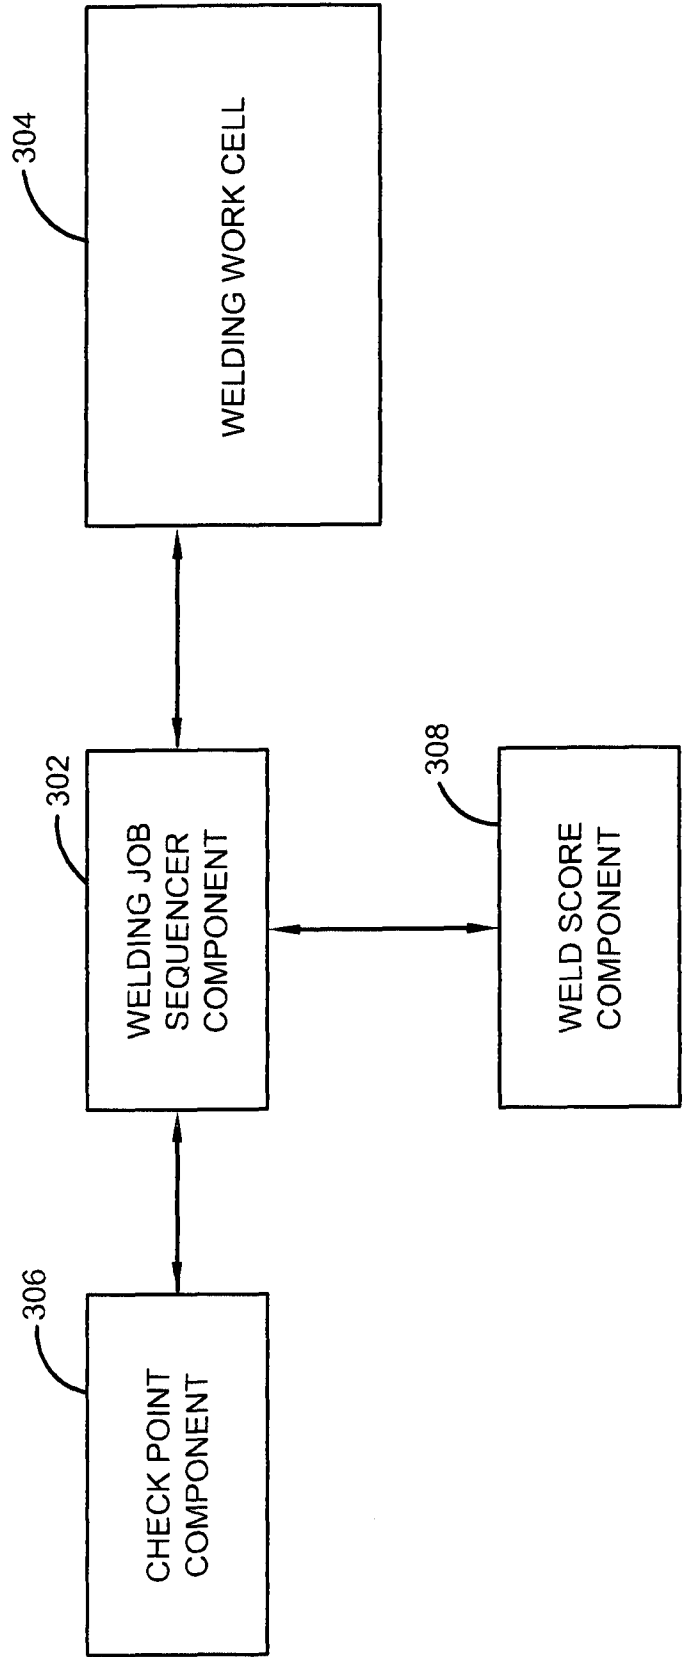


FIG. 3

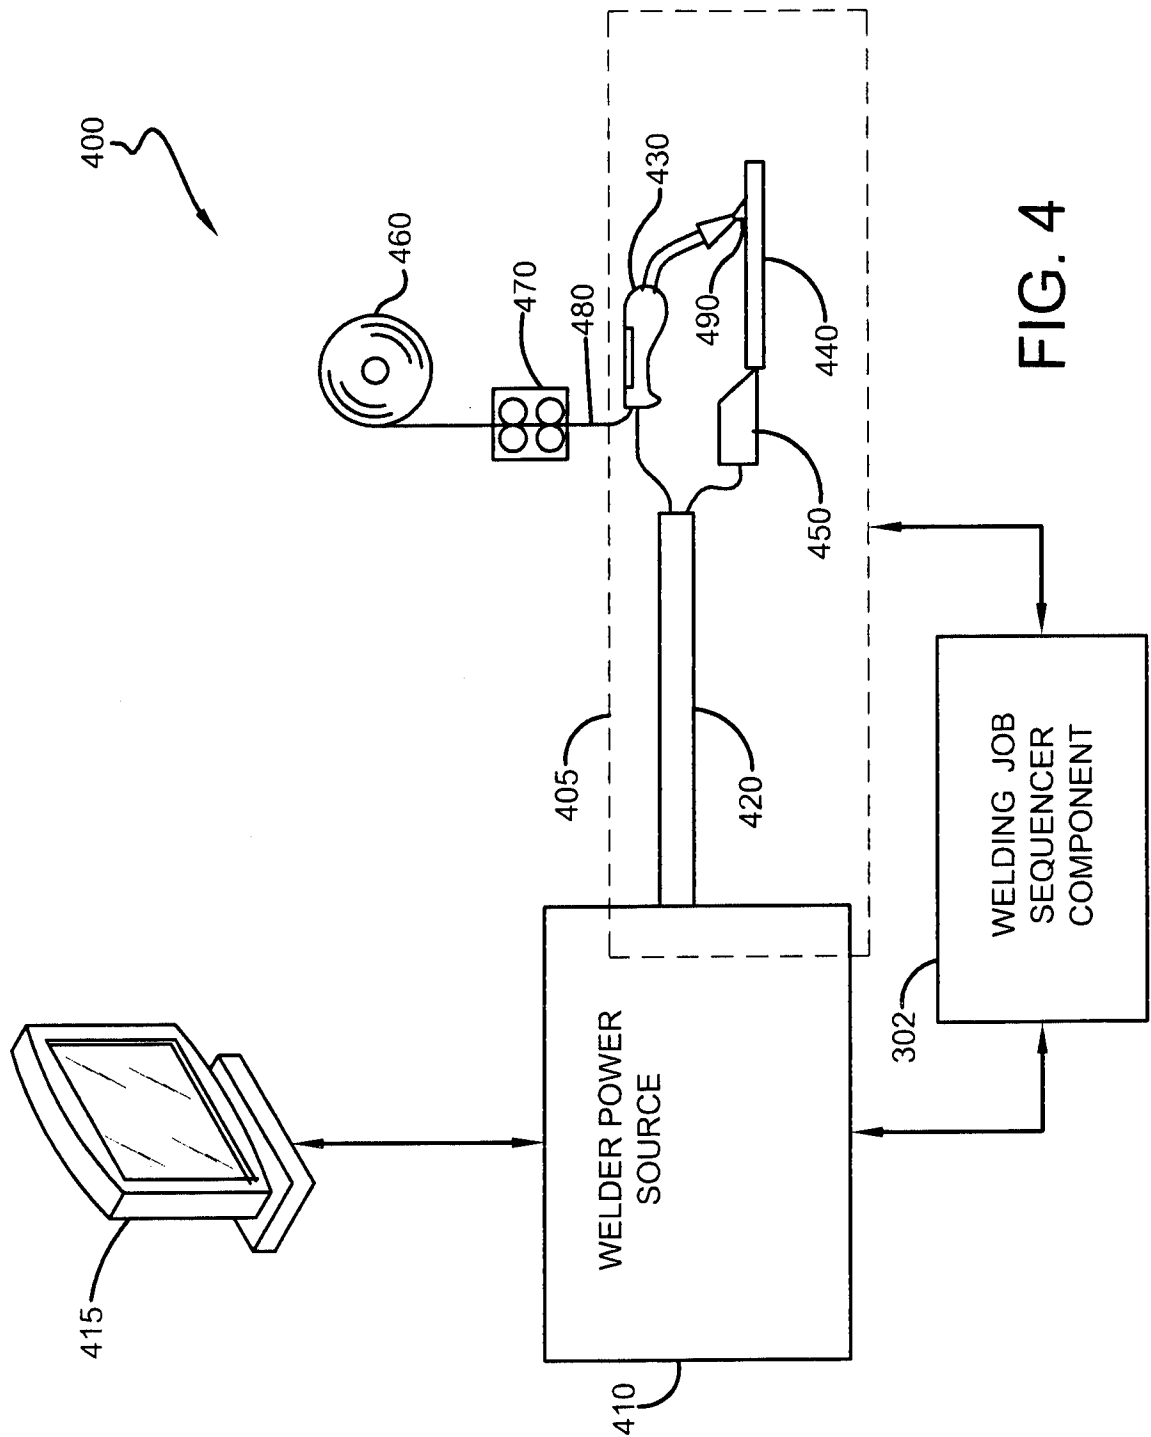


FIG. 4

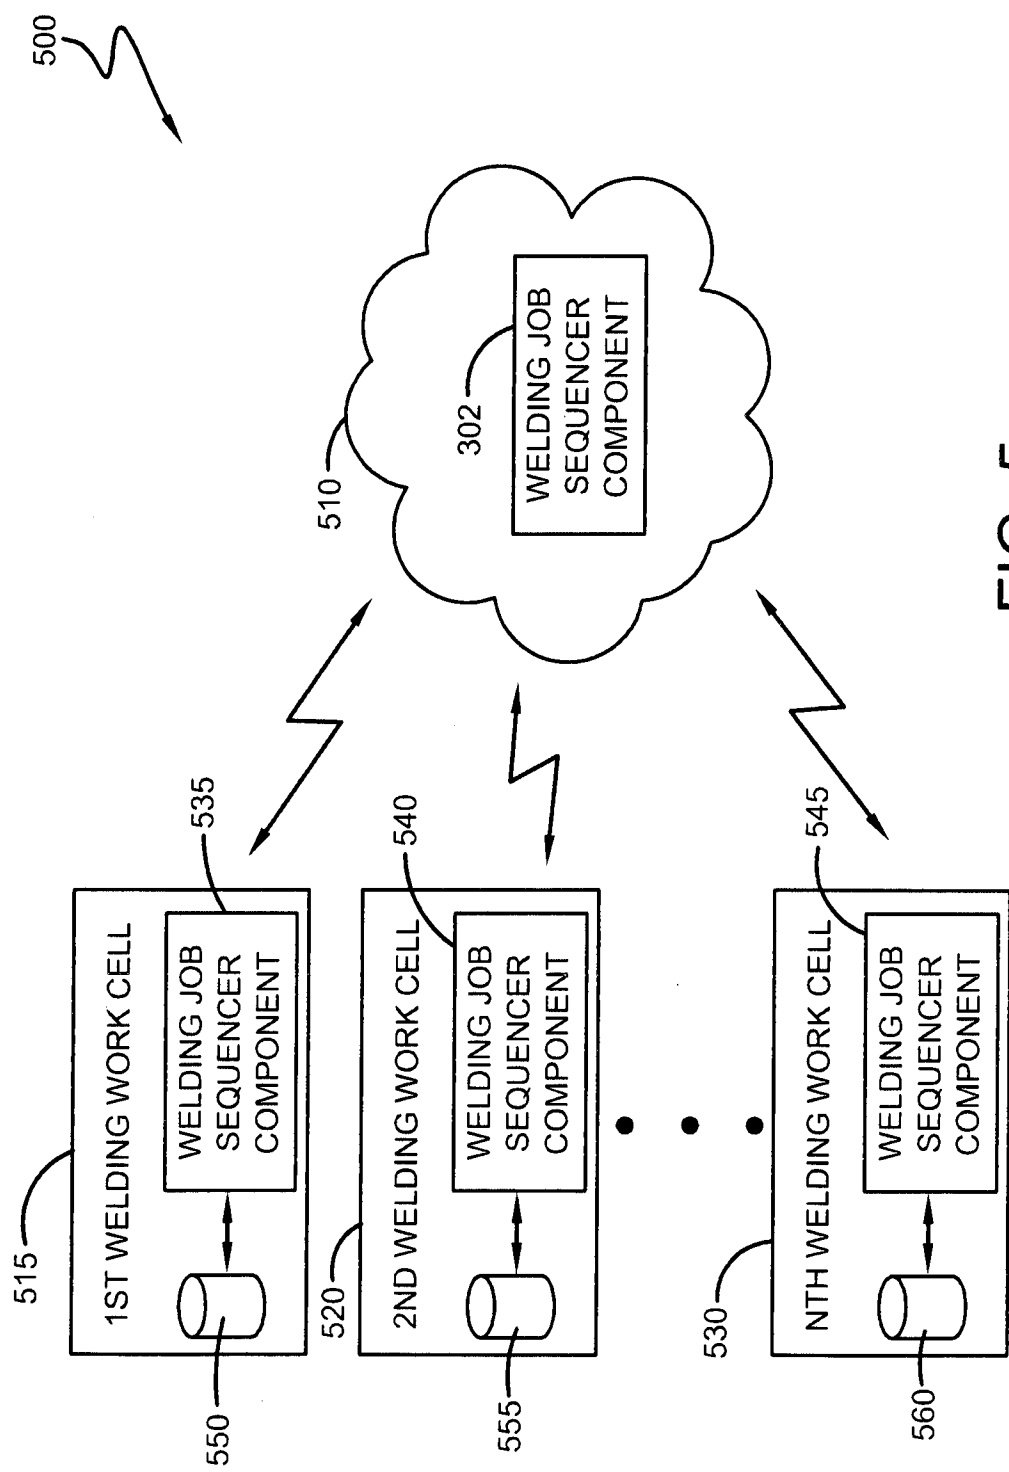


FIG. 5

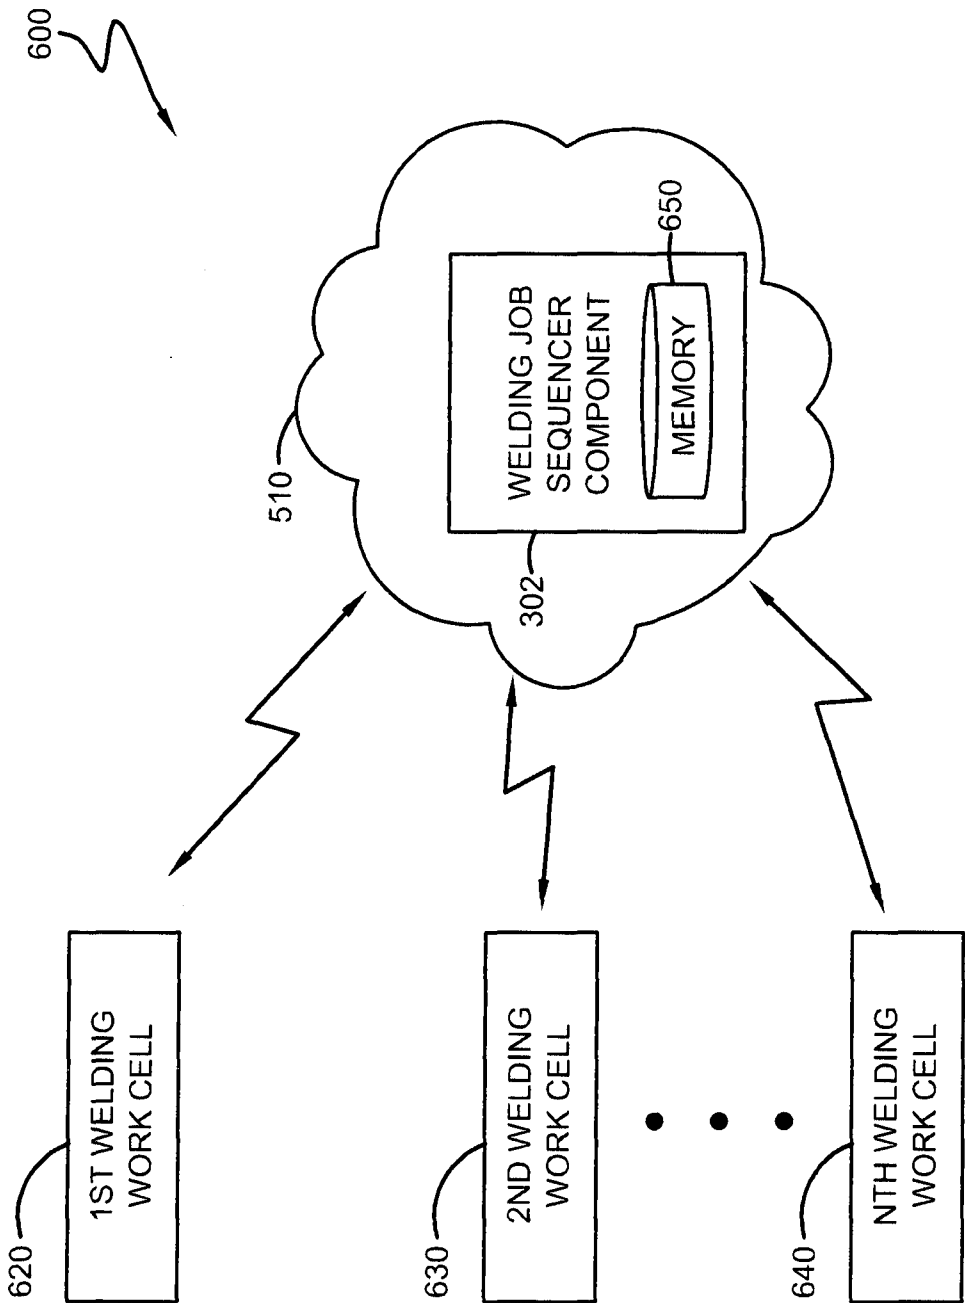


FIG. 6

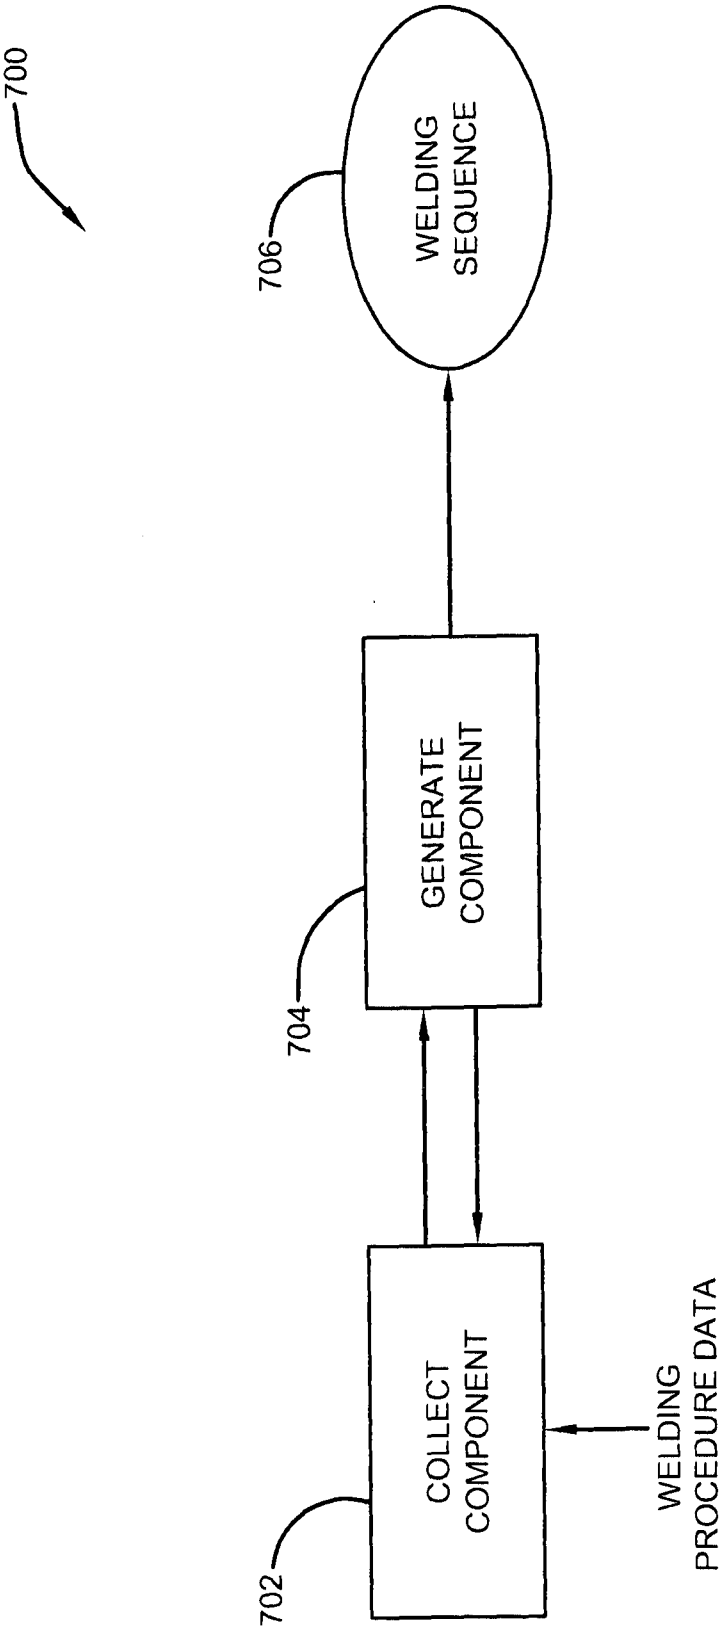


FIG. 7

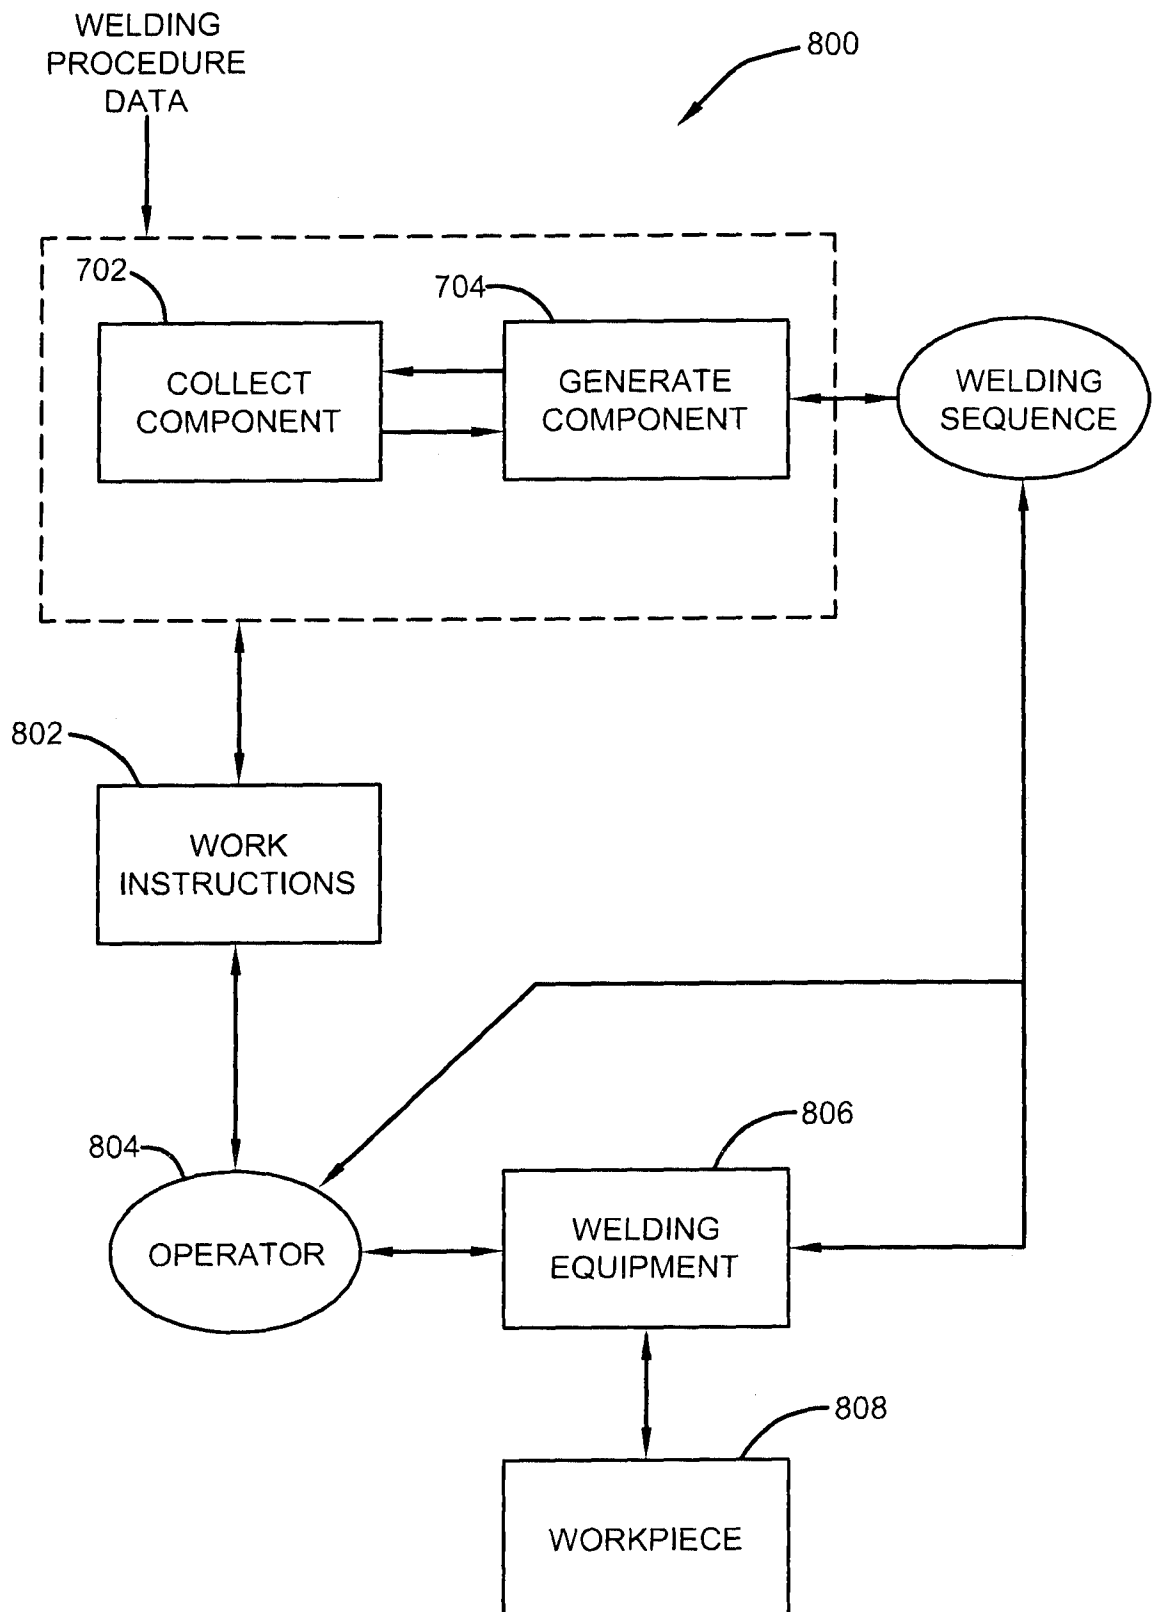


FIG. 8

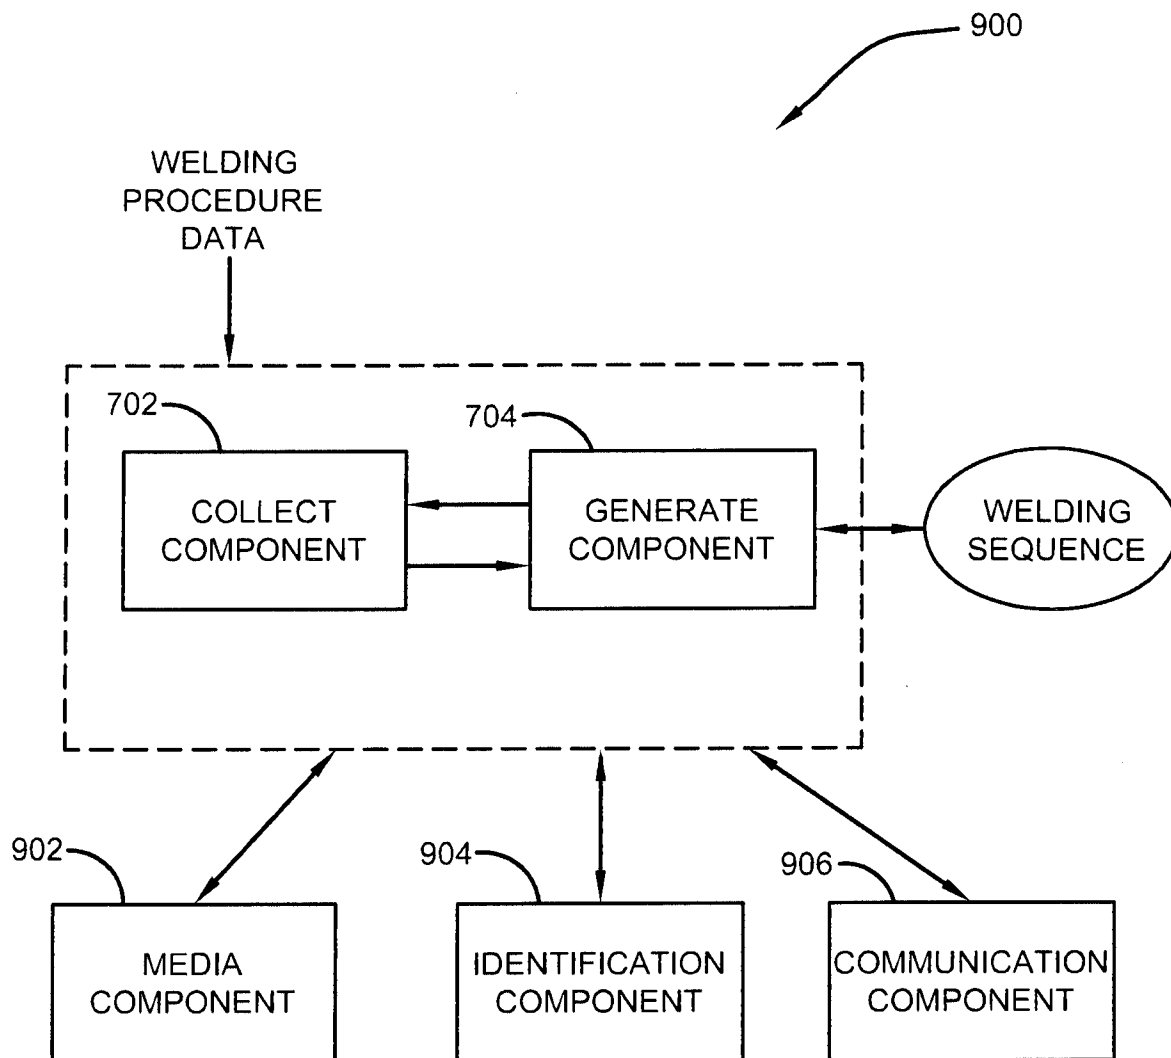


FIG. 9

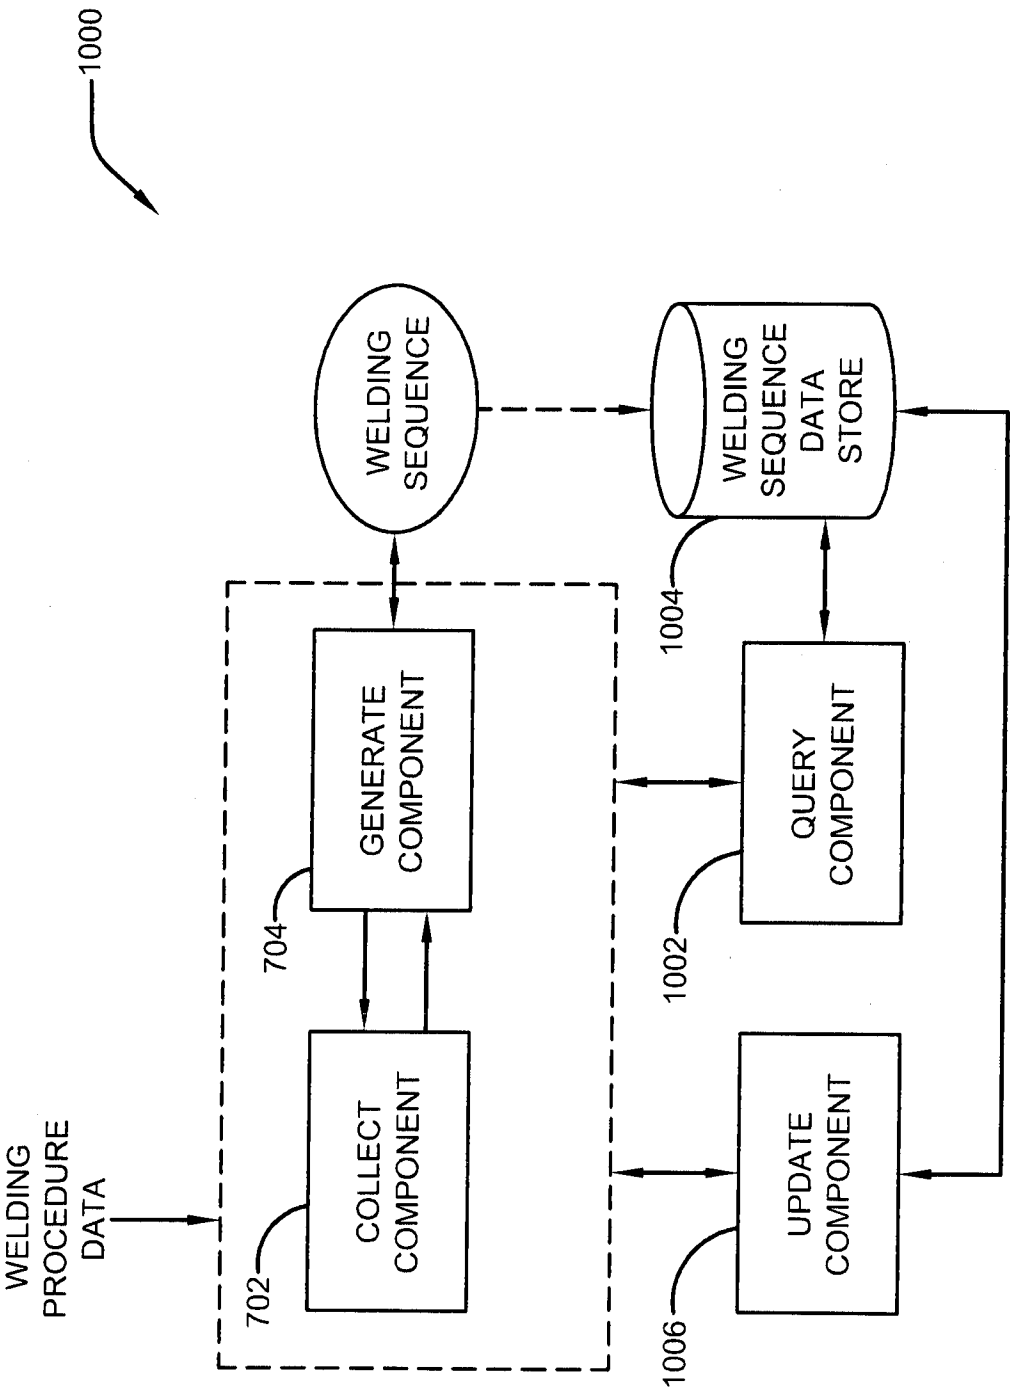


FIG. 10

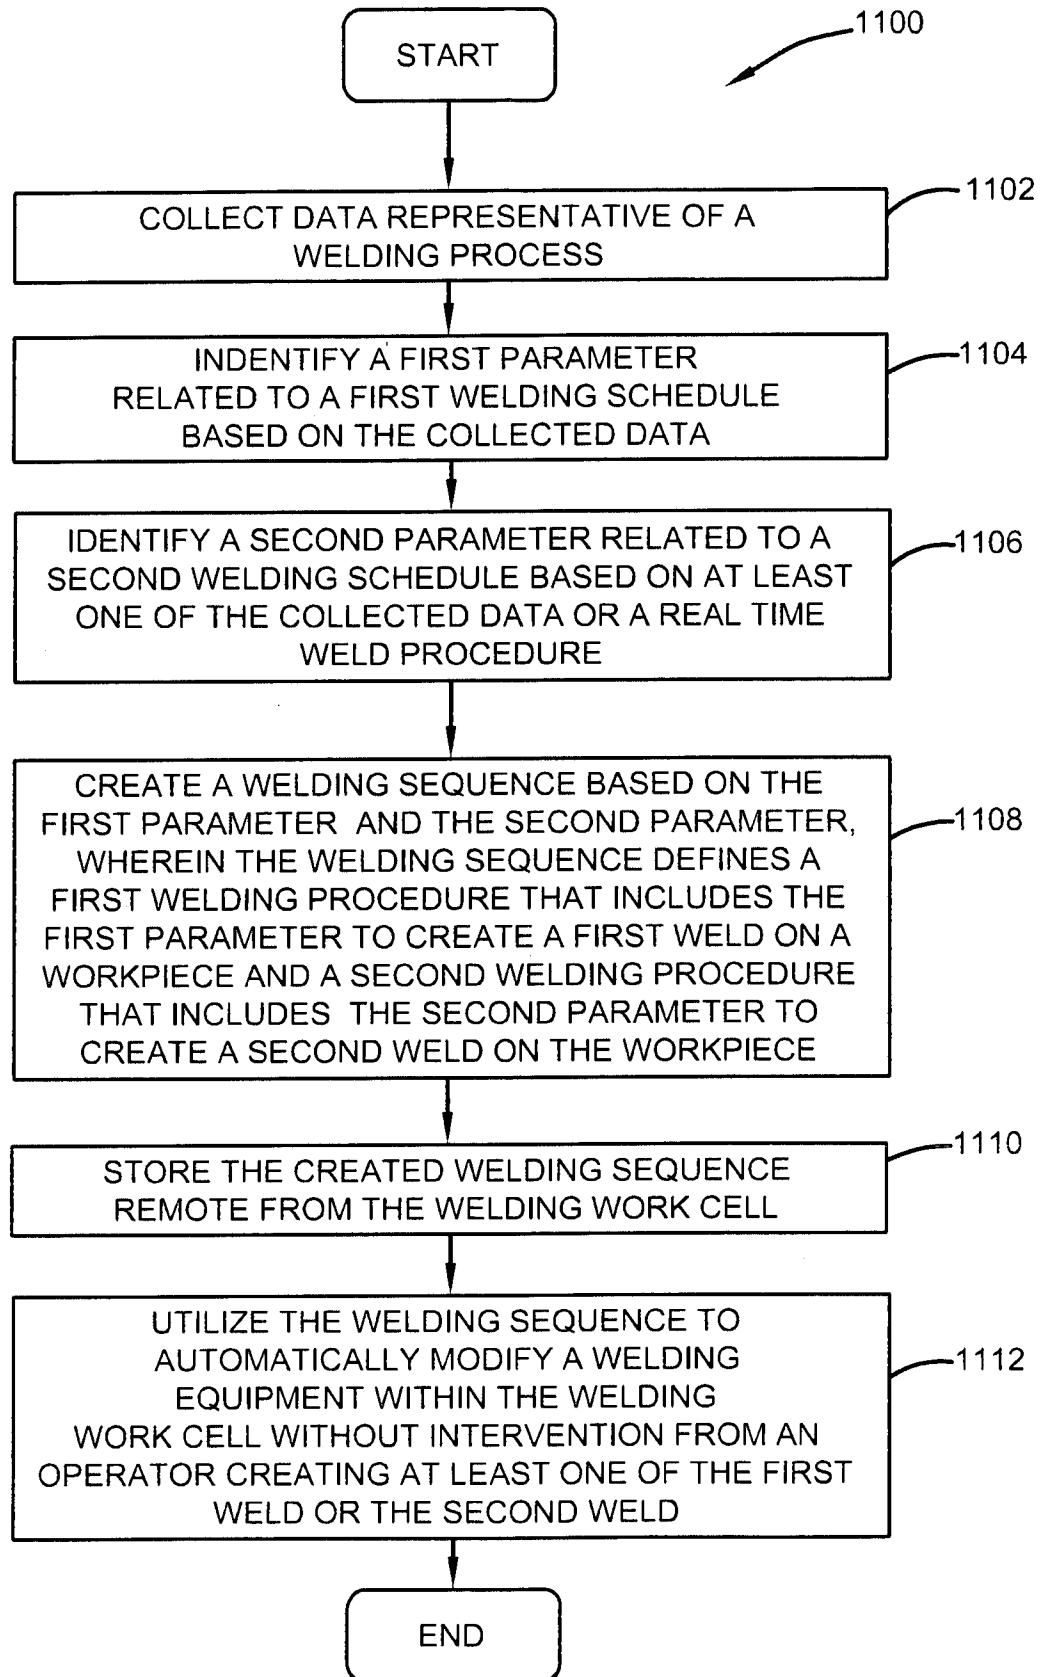


FIG. 11

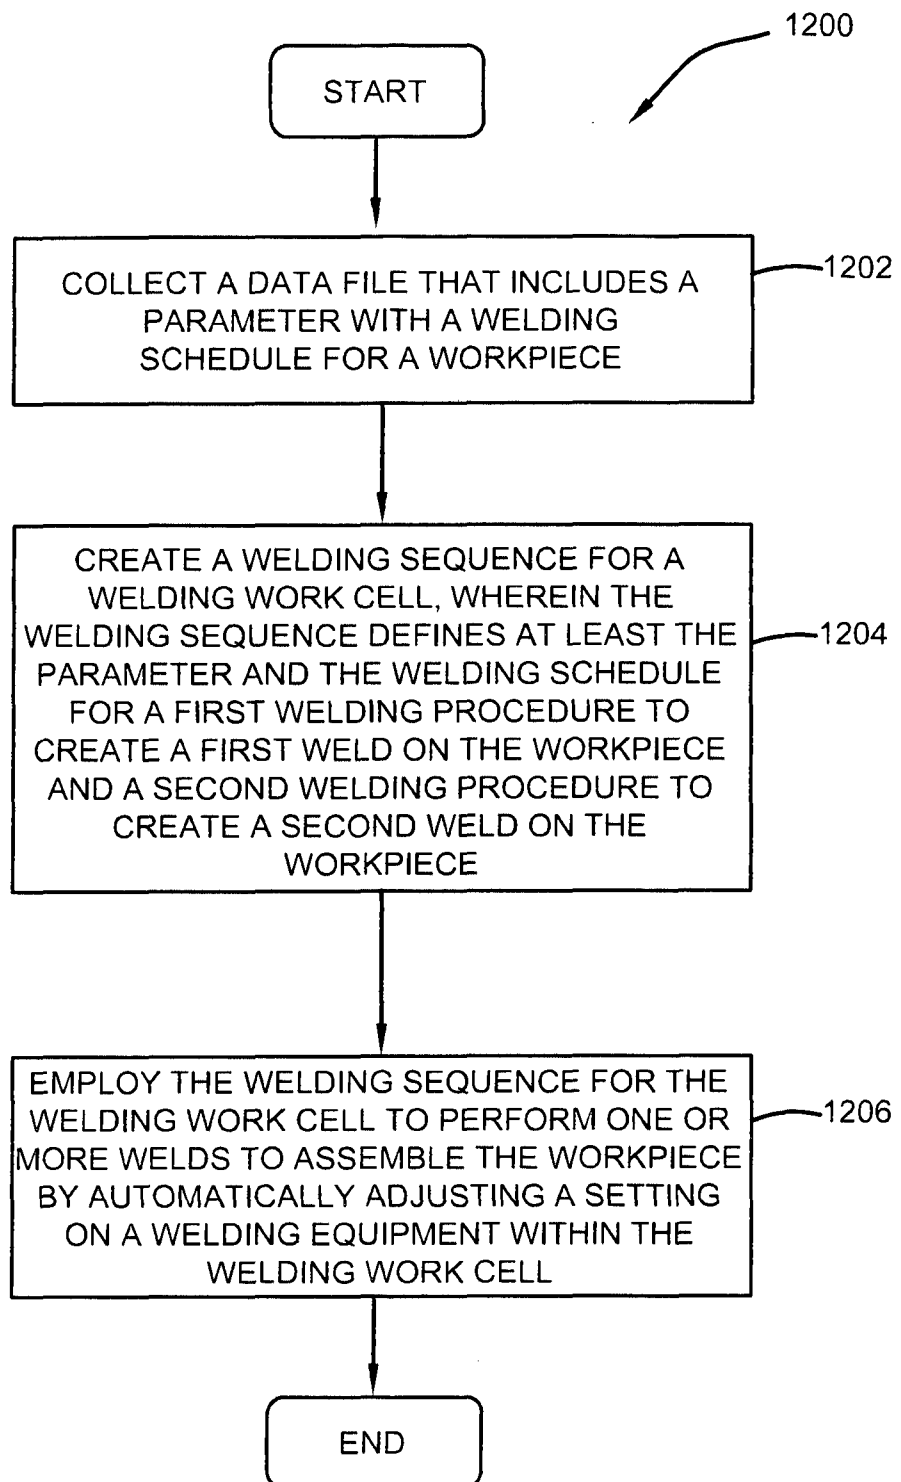


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/000319

A. CLASSIFICATION OF SUBJECT MATTER
INV. G05B19/418
ADD. B23K9/095

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G05B B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/122550 A1 (KLIMKO ROBERT [US] ET AL) 24 June 2004 (2004-06-24) paragraphs [0004], [0028] - [0050], [0054] - [0059], [0100] -----	1,4-15
X	RUBINOVITZ J ET AL: "TASK LEVEL OFF-LINE PROGRAMMING SYSTEM FOR ROBOTIC ARC WELDING - AN OVERVIEW", JOURNAL OF MANUFACTURING SYSTEMS, SOCIETY OF MANUFACTURING ENGINEERS, DEARBORN, MI, US, vol. 7, no. 4, 1 January 1988 (1988-01-01), pages 293-305, XP000000724, ISSN: 0278-6125 page 293 - page 296, left-hand column page 298, right-hand column, paragraph 6 - page 299, right-hand column, last line ----- -/--	1,5-8, 10-12,15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 August 2014

Date of mailing of the international search report

29/08/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Prokopiou, Platon

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2014/000319

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/056942 A1 (DANIEL JOSEPH A [US] ET AL DANIEL JOSEPH ALLEN [US] ET AL) 15 March 2007 (2007-03-15) paragraphs [0024], [0027], [0032] - [0035], [0047], [0048] -----	1-3,5,8, 10,12,15
X	EP 1 700 667 A1 (FANUC LTD [JP]) 13 September 2006 (2006-09-13) paragraphs [0014] - [0021], [0030] - [0033] -----	1,3,5,7, 8,10,12, 15
A	US 2008/149686 A1 (DANIEL JOSEPH A [US] ET AL) 26 June 2008 (2008-06-26) paragraphs [0022] - [0039] -----	1-4, 8-10,13, 15
A	MOHAMMAD GIVEHCHI ET AL: "Evolutionary optimization of robotic assembly operation sequencing with collision-free paths", JOURNAL OF MANUFACTURING SYSTEMS, SOCIETY OF MANUFACTURING ENGINEERS, DEARBORN, MI, US, vol. 30, no. 4, 5 August 2011 (2011-08-05), pages 196-203, XP028319101, ISSN: 0278-6125, DOI: 10.1016/J.JMSY.2011.08.003 [retrieved on 2011-08-11] page 197, left-hand column, last paragraph - page 198, right-hand column, last paragraph page 200, right-hand column, paragraph 3 - page 201, right-hand column, paragraph 1 page 202, left-hand column, paragraph 5 - page 202, right-hand column, paragraph 2 -----	1-15
A	US 2009/173726 A1 (DAVIDSON ROBERT RAIMUND [US] ET AL) 9 July 2009 (2009-07-09) paragraphs [0009] - [0017], [0032], [0033], [0035], [0037], [0039], [0041] - [0055] -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/000319

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2004122550	A1	24-06-2004	NONE	

US 2007056942	A1	15-03-2007	NONE	

EP 1700667	A1	13-09-2006	CN 1830613 A	13-09-2006
			EP 1700667 A1	13-09-2006
			JP 2006247677 A	21-09-2006
			US 2006212170 A1	21-09-2006

US 2008149686	A1	26-06-2008	AU 2007338858 A1	03-07-2008
			BR PI0721005 A2	21-05-2013
			CA 2672717 A1	03-07-2008
			CN 101600532 A	09-12-2009
			EP 2094426 A1	02-09-2009
			RU 2009127710 A	27-01-2011
			US 2008149686 A1	26-06-2008
			WO 2008079165 A1	03-07-2008

US 2009173726	A1	09-07-2009	US 2009173726 A1	09-07-2009
			WO 2009089337 A1	16-07-2009
