

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 031 251
B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **11.05.83**

(51) Int. Cl.³: **A 61 B 10/00,
G 01 K 13/00**

(21) Application number: **80304613.5**

(22) Date of filing: **19.12.80**

(54) **Measurement of basal body temperature.**

(30) Priority: **21.12.79 GB 7944063**

(43) Date of publication of application:
01.07.81 Bulletin 81/26

(45) Publication of the grant of the patent:
11.05.83 Bulletin 83/19

(84) Designated Contracting States:
DE FR NL

(56) References cited:
**FR - A - 2 154 722
US - A - 3 822 598
US - A - 4 031 365
US - A - 4 148 304
US - A - 4 151 831**

(73) Proprietor: **NATIONAL RESEARCH DEVELOPMENT
CORPORATION
101 Newington Causeway
London SE1 6BU (GB)**

(72) Inventor: **Wolff, Heinz Siegfried
53 Meadway
London N.W.1 (GB)
Inventor: Royston, John Patrick
85 Canfield Gardens
London NW6 3EA (GB)
Inventor: Abrams, Robert Marlow
1900 N.W.21st Street
Gainesville Florida 32605 (US)
Inventor: Humphrey, Simon John Everard
6 Sylvan Avenue Mill Hill
London NW7 2JJ (GB)**

(74) Representative: **Smith, Philip Antony et al,
REDDIE & GROSE 16 Theobalds Road
London WC1X 8PL (GB)**

EP 0 031 251 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Measurement of basal body temperature

The present invention relates to the measurement of basal body temperature for the purpose of natural family planning.

This method of family planning is based on the fact that an upward shift in a woman's basal body temperature to an established higher level indicates that sufficient time has elapsed from the occurrence of ovulation for the commencement of a period of infertility. The basal body temperature is obtained by taking a temperature measurement at a standard time which should be just after waking and before rising. As at present used the method involves taking temperature measurements with a mercury-in-glass thermometer, recording the daily measurements in graphical form, and interpreting the graph by some simple algorithm in order to identify the occurrence of the significant upward shift in temperature.

U.S. Patent Specification No. 4,151,831 describes an electrical instrument for basal body temperature measurement comprising a clock, an entry circuit for electrical temperature signals from a temperature sensor, a store for accumulating entered daily temperature signals and means for processing the accumulated signals. However this instrument requires the temperature readings to be taken at almost exactly the same time each day. In some versions of the instrument the clock generates an alarm to inform the user that it is time to take a reading. This is inconvenient for the user and the accuracy of the results depends upon the user responding immediately to the alarm. Alternatively the instrument must be worn throughout the period during which a reading is automatically taken, that is to say while the user is asleep, and this is inconvenient for the user.

In U.S. Patent Specification No. 4,031,365 body temperature is continuously monitored by readings taken at regular intervals throughout the day. A mean temperature is established and subsequent readings are compared with the mean temperature in order to detect any significant rise and indicate this occurrence.

The invention overcomes the problems of the prior art by allowing a predetermined time window within which temperature readings can be taken.

In accordance with the invention there is provided an electrical instrument for basal body temperature measurement comprising a clock, an entry circuit for electrical temperature signals from a temperature sensor, a store for accumulating entered daily temperature signals and means for processing the accumulated signals characterized in that the entry circuit is so controlled by the clock that entry of a temperature signal is permitted only during a predetermined time period of each day, means are provided to reduce each temperature signal in proportion to the time between the beginning

of the predetermined period and the entry of the temperature signal, and in that the processing means includes means to establish a mean temperature level, means for comparing subsequently entered temperature signals with the mean temperature level and calculating when a rise in temperature of predetermined significance has taken place, and an indicator for displaying the fact of occurrence of the significant temperature rise.

Conveniently such an instrument is used with a thermistor temperature transducer which is placed under the user's tongue. In a preferred embodiment the mode of the use is as follows.

(i) The first temperature measurement is made on the 1st day after the onset of menstrual bleeding. The user inserts the transducer into the mouth and presses the "enter" button. If the sequence is initiated within a 4 hour time window (say between 6.00 am and 10.00 am) which has been preset into the machine, the user is answered by a bleep. If outside the window no measurement can be entered. The transducer is then retained in the mouth until a second bleep sound (say after 3 mins).

(ii) For the first three days the temperature readings are ignored by the instrument and for the next eight readings they are accumulated, the average of the eight temperatures being determined. If days are missed or if readings are rejected as invalid because they are outside a set range of temperature (35.8 to 37.6°C) the instrument will carry on, until it has accumulated eight valid readings.

(iii) After the eighth valid reading, the instrument performs the following calculations each day. B is the mean temperature derived from the first eight readings, T_n is the temperature measured on the current day, K is a pre-programmed constant related to the minimum BBT rise considered to be physiologically significant and H is the decision level, also constant.

1st Calculation: $E_n = T_n - (B + K)$, where $n = 1, 2, 3 \dots$

2nd Calculation: $S_n = S_{n-1} + E_n$. (S_0 is taken to equal zero)

3rd Calculation: If S_n is less than zero, S_n is set equal to zero; otherwise no change.

4th Calculation: $D_n = H - S_n$.

If $D_n \leq 0$ for the current day and if $E_n \geq 0$ for the current day and also for the past two days, then the instrument latches in that state and displays an indication that the "infertile period" has started.

(iv) The user may then stop taking daily temperatures until the start of the next menstrual period.

The user resets the instrument at the

commencement of the next menstrual cycle by pressing the "enter" and "read" buttons simultaneously.

The calculations made constitute a modified Cusum statistical test to determine when an upward temperature shift is significant. The details of the test and the magnitude of K and H may be changed as further records are accumulated and analysed. In essence the instrument makes whatever statistical check is necessary to establish that the significant temperature change has occurred.

To reduce the scatter of the temperature readings and thus improve the reliability of the Cusum test, the instrument makes an automatic correction to each temperature reading according to the time of measurement. This is possible because the rate of rise of post-menstrual temperature of women before waking has been found to be close to 0.1°C/hr . and by reducing the measured temperature in accordance with this rate of rise all the temperatures are adjusted to a value close to that which would have been obtained if the reading had always been taken at the beginning of the time window.

The instrument incorporates a digital clock which provides a normal time display for the user and also gives an alarm signal which sets the temperature measuring and evaluation circuits at the beginning of the four hour period each day. The time window setting is not accessible to the user of the instrument but the user can adjust the time on the clock in case of a change of time zone and this automatically adjusts the 4-hour window.

An additional counter and display are reset to zero when the instrument is re-set at the beginning of a cycle and increments by one at the start of each 4-hour window, thus counting the day of the cycle regardless of whether a temperature measurement is taken.

The instrument could be constructed using a microprocessor chip, memory devices, a clock oscillator, and a small number of peripheral chips. The present embodiment, however, uses CMOS counters and logic blocks in a hard-wired configuration together with a quartz crystal clock.

By way of example this embodiment will now be described in detail with reference to the accompanying drawings, in which:—

Figs. 1A, 1B, 1C and 1D, when assembled as shown in Fig. 3, show the circuit logic of the instrument, omitting the digital clock and the day counter,

Fig. 2 is a schematic diagram of the operations performed by the instrument.

Referring first to Fig. 2, the instrument incorporates a digital clock 10 providing a conventional time display 11. The time recorded by the clock can be set by the user but the time of commencement of the four hour window can only be set inside the instrument and does not thereafter need changing. The clock 10

generates an alarm signal each day at the beginning of the four hour window. This is passed to a day counter 12 with manual reset, which controls a day display 13 showing the day of the cycle.

The alarm signal from the clock 10 is also applied to the measurement and evaluation circuits which are shown in detail in Figs. 1A to 1D. As shown in outline in Fig. 2 the alarm signal triggers a time window circuit 14 which controls a gate 15 through which temperature signals from a temperature sensor 16 pass to a self-balancing bridge circuit 17. The time window circuit 14 measures the 4 hour window within which temperature readings can be taken and for this purpose is supplied with timing pulses from an internal clock 18. These timing pulses are also fed to a 3-day inhibit circuit 19 which holds the gate 15 closed until the fourth day to prevent entry of temperature readings in the first three days.

The bridge 17 is controlled by a temperature counter 20 which records the value at which the bridge is balanced and passes this temperature measurement by way of a diurnal correction circuit 21 to the evaluation circuits. The correction circuit 21 is triggered at the beginning of each 4 hour window by the alarm signal and corrects each measured temperature according to the time during the window at which the measurement was taken.

The first eight temperature readings (after rejection of readings taken on the first three days) are passed to an 8 day store 22 and the mean 23 of these readings is passed to a comparator 24 for comparison with subsequent readings. The differences ascertained by the comparator 24 are passed to an accumulator 25 and the accumulated excess over the mean is passed to an evaluation circuit 26. The evaluation circuit also receives the individual outputs from the comparator 24 and requires three of these in succession to be positive and the accumulated excess to be above the significance level before switching an output display 27 to indicate the commencement of an infertile period.

The temperature measurement is effected by a self-balancing bridge. A thermistor Th (Fig. 1D) is connected in series with a linearising resistor 100 in one arm of the bridge. A second arm is a resistor 101 and a third arm is a resistor 102 (Fig. 1B) equal in value to resistor 101 and preferably also approximately equal to the combined value of resistor 100 and thermistor Th for maximum sensitivity. The fourth, balancing, arm of the bridge comprises a resistor 103 in parallel with which resistor 104 and resistor 105 can be selectively connected by switches S and T. The null point of the bridge is detected by an amplifier RR connected as a comparator. Power is supplied to the bridge and amplifier RR through transistor TR1 in response to a control signal at the base of transistor TR2.

The switches S and T, in the form of ana-

logue gates, are controlled by counters R1+R2. At the beginning of a measurement these have been re-set and they begin to count up when clock pulses from VV are supplied through O1 and A3. As the counters are incremented the resistors 104 and 105 are connected in parallel with resistor 103 according to a binary sequence until the bridge is balanced. The values of the resistors are calculated such that each step in the sequence corresponds to the same change of temperature of the thermistor Th. When balance is reached the output of the comparator RR changes over and triggers monostable M1 through O2 and C3. The output of M1 resets latch A1/A2 which then switches off the transistors TR2 and TR1 and closes gate O1, stopping the supply of clock pulses to the counters R1+R2.

The gate O2 is controlled by the output of latch QQ1 so that a high pulse from RR can only be transmitted to M1 if QQ1 is high. At the start of the measurement QQ1 is low but is set high when output Q1 of counter R1 goes high. This prevents a pulse from RR, occurring when power is switched on, instantly resetting A1/A2.

The counters R1+R2 thus hold the measured temperature value, which will only be accepted as valid if in a predetermined temperature range. Gate F1 is only opened by setting of K2 when a minimum temperature count is reached in R2. If the temperature count has gone beyond an upper limit the decoder SS1 sets latch K1 to reset counters R1+R2 and closes gate F1 by resetting latch K2 via C1. This prevents the temperature reading being passed to the evaluating circuits in the manner now to be described.

With F1 open the output of M1, which terminates the measurement, also sets B1 through F1. This in turn opens F4 and allows clock pulses from VV to reach R1+R2 through F4 and A3. These decrement the counter and when the counter reaches zero, an output through P3 resets B2, closing F4. At the same time K2 and K3 are reset. K2 closes F1 and triggers monostable N1, thereby triggering M1 through C3 and resetting A1 and K1 to complete the temperature measurement. K3 was set when B1 was set by the output of M1. The setting of K3 indicates a valid temperature reading and triggers N2 to pass a pulse to counter YY.

As the counters R1+R2 are counted down the clock pulses passing through F4 reach one input of gate F2 whose output is applied via I2 to a counter XX which records the valid temperature readings. However, by delaying the opening of gate F2 a correction is made to allow for the time at which the temperature reading was taken. This involves the timing of the whole apparatus and the equipment for maintaining the correct timing will now be described.

A conventional clock with a digital display is provided in the apparatus and controls the commencement of the period within which

temperature measurements can be taken. Thus if the clock is adjusted on passing into a different time zone the alarm signal from the clock controlling the temperature measurement circuits automatically occurs at the same hour. This alarm signal, the hour of which is pre-set within the equipment, is applied to the circuit of Fig. 1A via a transistor TR3. The occurrence of the alarm signal marks the beginning of a four hour measurement period and the alarm signal is effective to re-set counters UU, V1+V2, and R1+R2 and latches K4 and QQ1 and L3 and set latch L1. A crystal-controlled oscillator VV provides fast clock pulses at 1024 Hz to F4 and O1 and slow timing pulses at 2 Hz to counter UU. The gate J1 connected to the output of UU provides 12 minute pulses to counters U and WW. Counter U controls the four hour measurement period by counting twenty of the 12 minute pulses when enabled by output from L1 applied to $\overline{A}PE$, after which the output \overline{ZD} , inverted by P4, resets latch L1, thereby closing gate F3 to prevent entry of any further measurement.

To make a temperature reading, the user places the temperature sensor in position and presses an enter button to operate a switch 106 and cause the output of F3 to go high. This resets UU and sets L2 to open gate G2. A gate G1 connected to the output of UU provides a pulse after a delay of 3 minutes 12 seconds. This pulse is passed by gate G2 to set A2 high and commence a temperature measurement. The delay allows the thermistor to reach body temperature after being placed in position. The output of A1 resets L2 and closes gate G2 to stop any further pulses from G1.

The counter UU is reset via E1 by the alarm signal at the beginning of the 4 hour period, by the output of J1 every twelve minutes, and by the output of F3 when the enter button is pressed. Also when the enter button is pressed the output of F3 triggers monostable M2 whose output generates an audible bleep signal by means of transistor TR4 and microphone 107. The output from M2 also resets L1 via C2, to prevent further entries during the 4 hour window. M2 is also triggered to produce a bleep when M1 is triggered as a result of C3 going high. Thus the first bleep when the entry button is pressed is followed by a second bleep when the measurement is taken or when the upper limit of temperature is reached by the counters R1+R2.

At the beginning of every 4 hour time window for the entry of temperature measurements the counters V1+V2 are reset to zero by the alarm signal from TR3. Gate G3 is held open by latch L1 and allows clock pulses from J1 to pass to A4 and count up in the counters V1+V2 from the beginning of the four hour window. When latch L1 is reset as a result of pressing of the entry button G3 is closed and the count stopped. When the counters R1+R2 are being counted down by the fast clock pulses from F4

these initially also pass via A4 to counters V1+V2, where they count down a recorded count which is representative of the time during the 4 hour window at which the measurement is taken. The measured temperature is reduced by 0.1°C per hour to adjust the temperature to a value close to that which would have been obtained at the beginning of the 4 hour period. When the diurnal correction counters V1+V2 have been counted down to zero a signal through inverter P5 sets K4 which inhibits any further count by the counters V1+V2 and opens the gate F2. Thus the remaining pulses during the count-down of R1+R2 are sent as corrected temperature readings to counter XX (Fig. 1D) via gate I2.

The enter button switch 106 supplies one input of a gate O3. The other input is from a read button switch 108. The pressing of the read and enter buttons provides a reset signal at the output of O3. This occurs on day one of a new cycle of temperature measurements and, in particular, resets latch QQ2. A counter WW supplied with 12 minute clock pulses from J1 is initially held reset at zero by a reset pulse from O3. On day 2 the alarm signal at the beginning of the 4 hour window resets latch L3 and starts the counter WW. The output of gate O4 goes high after a further two days and resets L4 at the beginning of the time window on day 4. The output of L4, which has been high for 3 days and has held a shift register Z and counters W1+W2, Y1+Y2, YY and XX reset during that period, now goes low and allows readings taken from day 4 onwards to be evaluated.

The mean temperature B is determined by taking the mean of the first eight temperature readings, starting with the reading on day 4. For this purpose the corrected temperature readings received by XX are fed from a divide-by-eight terminal to the counters Y1+Y2 which carry a preset count of 5. This represents the constant K with a value of 0.1°C related to the minimum BBT rise considered to be physiologically significant. The counter Y receives a pulse from N2 for every valid temperature reading. When it has counted eight readings its output inhibits any further count, closes the gate I2 and opens a gate I3. Subsequent readings therefore pass from I3 to D1 and thence via I1 and Q4 to counter X. Counter X is preset to (B+K), the value in the counters Y, by an enter pulse from F3 received via Q3. The new reading counts down from this preset value. When the counter X reaches zero, output ZD goes low and this signal closes I1 and, inverted by Q2, opens H1 so that any remaining pulses pass via H1 and D2 to counter W1+W2 which is incremented by the excess of this reading over (B+K). Output ZD going low also closes I4 and the inverted signal through Q2 resets B3 and is applied to pin 15 of shift register Z.

If counter X does not reach zero when a reading is taken, the control pulse from N2

opens gate H2 by setting B4 through I4. Fast clock pulses from VV are then passed by H2 to D1 and D2 to count down counters X and W1+W2. When X reaches zero the output ZD goes low (closing I1 and I4) and the inverted signal through Q2 resets B3, closing H2 and setting counters W1+W2 to count up. The counters W1+W2 are prevented from going below zero by the low output from C0 passed by Q1 and D4 to hold the counter reset at zero.

When X has reached zero before the control pulse from N2 is applied to the shift register Z, the pin 15 has been set high and the control pulse clocks in a "1" to the shift register, indicating a temperature reading exceeding B+K. If the control pulse arrives before X has reached zero, a "0" is recorded by the shift register Z. When three "1"s have been recorded ($E_n > 0$) for successive readings and when the Cusum exceeds the significance level ($D_n \leq 0$) the output of J2 goes high and sets latch QQ2. This then opens gate H3 and closes gate H4 so that pressing the read button to close switch 108 illuminates a green light-emitting diode 109 via transistor TR5 instead of a red diode 110 via transistor TR6.

The significance level of 13 representing 0.25°C is set in counter ZZ and is compared with the Cusum accumulated in counters W1+W2. When the Cusum exceeds the significance level the output of D3 goes high either by a signal from ZZ or by a higher count recorded in W1 and reaching D3 via E2. If, in addition, the shift register Z has recorded three successive high readings, J2 sets the latch QQ2 as described above.

Claims

1. An electrical instrument for basal body temperature measurement comprising a clock (10), an entry circuit (15) for electrical temperature signals from a temperature sensor (16), a store (22) for accumulating entered daily temperature signals and means for processing the accumulated signals characterized in that the entry circuit (15) is so controlled by the clock (10) that entry of a temperature signal is permitted only during a predetermined time period (14) of each day, means (21) are provided to reduce each temperature signal in proportion to the time between the beginning of the predetermined period and the entry of the temperature signal, and in that the processing means includes means (23) to establish a mean temperature level, means (24) for comparing subsequently entered temperature signals with the mean temperature level and calculating (26) when a rise in temperature of predetermined significance has taken place, and an indicator (27) for displaying the fact of occurrence of the significant temperature rise.

2. An instrument as claimed in claim 1 including an entry switch (106) operable by the user to initiate entry of a temperature signal.

3. An instrument as claimed in claim 2 including delay means (G1) coupled to said entry switch to delay entry of the temperature signal by a predetermined time period to allow the temperature to attain body temperature.

4. An instrument as claimed in claim 3 including indicator means (M1, M2) for indicating to the user when a temperature signal is entered.

5. An instrument as claimed in claim 1 including validating means (K1, K2) permitting only temperature signals within a predetermined temperature range to be entered.

6. An instrument as claimed in claim 1 including means (19) for preventing the first three daily temperature signals reaching the store.

7. An instrument as claimed in claim 1 wherein said calculating means includes means (W1 and W2) for recording the algebraic sum of the differences between the said subsequent temperature signals and the mean temperature level, and means (D3) for comparing the said algebraic sum with a predetermined decision level (22).

8. An instrument as claimed in claim 7 including means (QQ2, TR5) for recording when the temperature signal exceeds the mean temperature, said indicator being activated only when both the decision level is exceeded and three successive temperature signals have exceeded the mean.

9. An instrument as claimed in claim 7 in which said means for comparing the temperature signals with the mean temperature level reduces each temperature signal before comparison by a constant amount (K).

10. An instrument as claimed in claim 1 in which the entry circuit is connected to a self-balancing bridge circuit (17) for determining the resistance of a thermistor temperature sensor.

11. An instrument as claimed in claim 1 in which the clock (10) generates an alarm signal at a specified time each day which is the beginning of the predetermined time period and the instrument includes timing circuits (14) triggered by the alarm signal from the clock for controlling the entry circuit.

12. An instrument as claimed in claim 1 including a day counter (12) for recording and displaying the day of the cycle.

Patentansprüche

1. Elektrisches Meßinstrument zur Messung der Basaltemperatur mit einem Zeitgeber (10), einer Eingabeschaltung (15) für die mittels eines Temperaturfühlers (16) erhaltenen elektrischen Temperatursignale, einem Speicher (22) zum Sammeln der täglich eingegebenen Temperatursignale und einer Bearbeitungsschaltung für die gesammelten Temperatursignale, dadurch gekennzeichnet, daß die Eingabeschaltung (15) derart vom Zeitgeber (10) gesteuert ist, daß die Eingabe eines Temperatursignals nur während eines vorgegebenen Zeit-

intervalls (14) jedes Tages zugelassen ist, daß Mittel (21) zur Reduzierung jedes Temperatursignals im Verhältnis der Zeitspanne zwischen dem Beginn des vorgegebenen Zeitintervalls und der Eingabe des Temperatursignals vorgesehen sind, und daß die Bearbeitungsschaltung eine Einrichtung (23) zur Bildung eines mittleren Temperaturniveaus, einen Vergleichler (24) zum Vergleichen der nachfolgend eingegebenen Temperatursignale mit dem mittleren Temperaturniveau, eine Einrichtung (26) zum Errechnen, wann ein Temperaturanstieg vorgegebener Bedeutung stattgefunden hat, und eine Anzeigeeinrichtung (27) zum Sichtbarmachen der Tatsache des Erscheinens des bedeutenden Temperaturanstiegs aufweist.

2. Meßinstrument nach Anspruch 1, dadurch gekennzeichnet, daß es einen vom Benutzer zum Starten der Eingabe eines Temperatursignals betätigbaren Eingangsschalter (106) aufweist.

3. Meßinstrument nach Anspruch 2, dadurch gekennzeichnet, daß mit dem Eingangsschalter (106) eine Verzögerungsschaltung (G1) gekoppelt ist, mittels derer die Eingabe des Temperatursignals um eine vorgegebene Zeitspanne verzögerbar ist, um die Temperatur auf Körpertemperatur ansteigen zu lassen.

4. Meßinstrument nach Anspruch 3, gekennzeichnet durch Anzeigeeinrichtungen (M1, M2), mittels derer dem Benutzer die Eingabe eines Temperatursignals anzeigbar ist.

5. Meßinstrument nach Anspruch 1, gekennzeichnet durch eine Validitätseinrichtung (K1, K2), mittels derer nur innerhalb eines vorgegebenen Temperaturbereichs liegende Temperatursignale eingebar sind.

6. Meßinstrument nach Anspruch 1, gekennzeichnet durch eine Sperrschaltung (19), mittels derer die ersten drei täglich erhaltenen Temperatursignale am Erreichen des Speichers gehindert werden.

7. Meßinstrument nach Anspruch 1, dadurch gekennzeichnet, daß die Einrichtung zum Errechnen des Temperaturanstiegs vorgegebener Bedeutung Mittel (W1 und W2) zum Aufzeichnen der algebraischen Summe der Differenzen zwischen den nachfolgend eingegebenen Temperatursignalen und dem mittleren Temperaturniveau sowie Mittel (D3) zum Vergleichen dieser algebraischen Summe mit einem vorgegebenen Entscheidungsniveau (22) enthält.

8. Meßinstrument nach Anspruch 7, gekennzeichnet durch Mittel (QQ2, TR5) zum Aufzeichnen, wann das Temperatursignal die mittlere Temperatur übersteigt, wobei die Anzeigeeinrichtung (27) zur Aktiviert wird, wenn sowohl das Entscheidungsniveau überschritten wurde als auch drei aufeinander folgende Temperatursignale das mittlere Temperaturniveau überschritten haben.

9. Meßinstrument nach Anspruch 7, dadurch gekennzeichnet, daß der Vergleichler (24) jedes

Temperatursignal vor dem Vergleich um einen konstanten Betrag (K) reduziert.

10. Meßinstrument nach Anspruch 1, dadurch gekennzeichnet, daß die Eingabeschaltung (15) mit einer Brückenschaltung (17) mit Selbstabgleich zur Ermittlung des Widerstands eines Thermistor-Temperaturfühlers verbunden ist.

11. Meßinstrument nach Anspruch 1, dadurch gekennzeichnet, daß der Zeitgeber (10) täglich zu einer vorgeschriebenen, mit dem Beginn des vorgegebenen Zeitintervalls übereinstimmenden Zeit ein Alarmsignal abgibt und eine vom Alarmsignal getriggerte Taktgeberschaltung (14) zur Steuerung der Eingabeschaltung vorgesehen ist.

12. Meßinstrument nach Anspruch 1, gekennzeichnet durch einen Tageszähler (12) zum Aufzeichnen und Sichtbarmachen des Tages des Zyklus.

Revendications

1. Instrument électrique pour la mesure de la température du corps au repos comprenant une horloge (10), un circuit d'admission (15) pour des signaux de température électriques en provenance d'un capteur de température (16), une mémoire (22) pour la totalisation de signaux de température admis quotidiennement et un moyen de traitement des signaux totalisés caractérisé en ce que le circuit d'admission (15) est commandé de telle façon par l'horloge (10) que l'admission d'un signal de température n'est autorisée que pendant une période temporelle prédéterminée (14) de chaque journée, en ce qu'il est fait appel à des moyens (21) propres à réduire chaque signal de température à proportion du temps écoulé entre le début de la période prédéterminée et l'admission du signal de température, et en ce que le moyen de traitement comporte un moyen (23) propre à établir un niveau de température moyen, un moyen (24) propre à comparer des signaux de température admis ultérieurement avec le niveau de température admis ultérieurement avec le niveau de température moyen et à calculer (26) le moment auquel une élévation de température d'importance prédéterminée a eu lieu, et un indicateur (27) propre à visualiser le fait de la survenue de l'élévation de température importante.

2. Instrument selon la revendication 1, caractérisé par le fait qu'il comporte un commutateur d'admission (106) actionnable par le sujet utilisateur pour provoquer l'admission d'un signal de température.

3. Instrument selon la revendication 2, caractérisé par le fait qu'il comporte un moyen retardateur (G1) couplé audit commutateur d'admis-

sion à l'effet de retarder l'admission du signal de température d'un délai prédéterminé à l'effet de permettre à la température d'atteindre la température du corps.

4. Instrument selon la revendication 3, caractérisé par le fait qu'il comporte des moyens indicateurs (M1, M2) propres à indiquer au sujet utilisateur le moment auquel un signal de température est admis.

5. Instrument selon la revendication 1, caractérisé par le fait qu'il comporte des moyens de validation (K1, K2) n'autorisant l'admission de signaux de température que dans une plage de température prédéterminée.

6. Instrument selon la revendication 1, caractérisé par le fait qu'il comporte un moyen (19) propre à empêcher les trois premiers signaux de température quotidiens d'atteindre la mémoire.

7. Instrument selon la revendication 1, caractérisé par le fait que ledit moyen de calcul comporte des moyens (W1 et W2) propres à enregistrer la somme algébrique des différences entre lesdits signaux de température ultérieurs et le niveau de température moyen, et un moyen (D3) propre à comparer ladite somme algébrique avec un niveau de décision prédéterminé (22).


8. Instrument selon la revendication 7, caractérisé par le fait qu'il comporte des moyens (QQ2, TR5) propres à enregistrer le moment de dépassement de la température moyenne par le signal de température, ledit indicateur n'étant activé qu'aux conditions conjointes que le niveau de décision soit dépassé et que trois signaux de température successifs aient dépassé la moyenne.

9. Instrument selon la revendication 7, caractérisé par le fait que ledit moyen de comparaison des signaux de température avec le niveau de température moyen réduit chaque signal de température d'une quantité constante (K) avant comparaison.

10. Instrument selon la revendication 1, caractérisé par le fait que le circuit d'admission est relié à un circuit en pont à auto-équilibrage (17) propre à déterminer la résistance d'un capteur de température à thermistance.

11. Instrument selon la revendication 1, caractérisé par le fait que l'horloge (10) émet chaque jour un signal avertisseur à un instant spécifié qui marque le début de la période temporelle prédéterminée, et qu'il comporte des circuits de cadencement (14) déclenchés par le signal avertisseur provenant de l'horloge à l'effet de commander le circuit d'admission.

12. Instrument selon la revendication 1, caractérisé par le fait qu'il comporte un compteur de jours (12) propre à enregistrer et à afficher le jour du cycle.

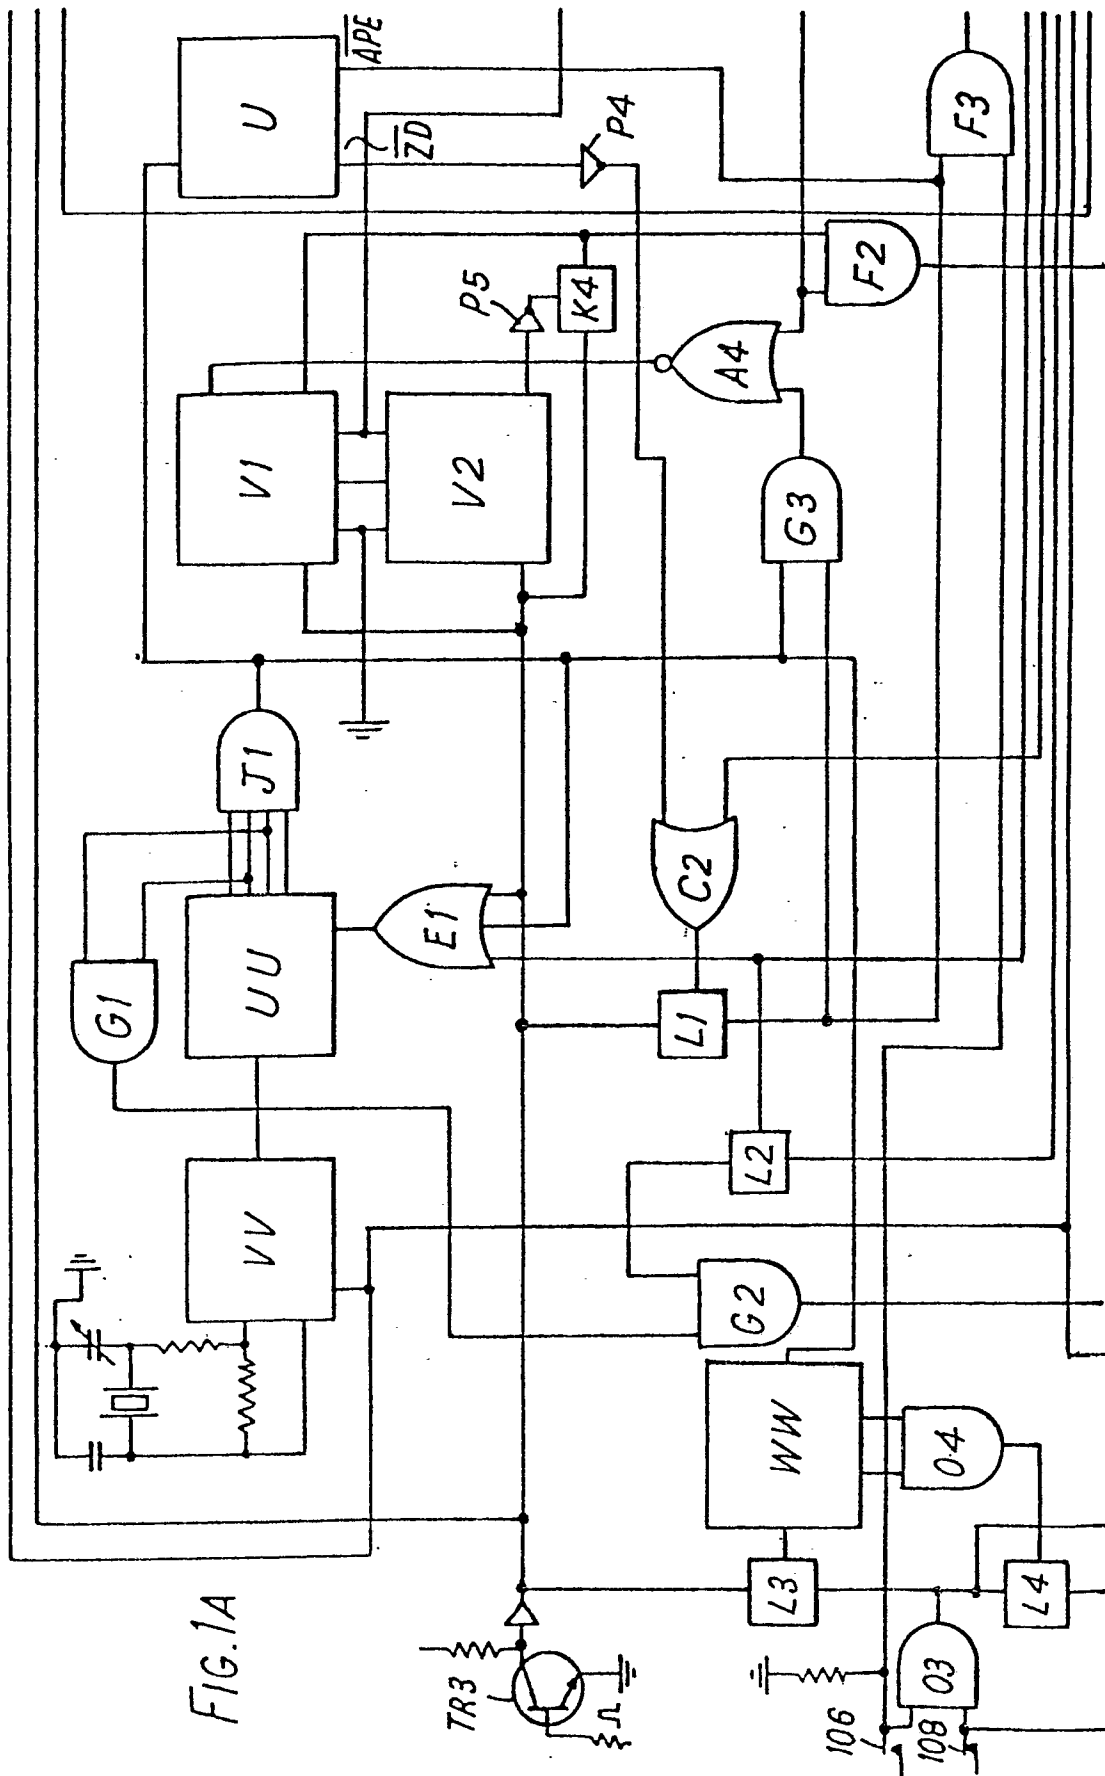

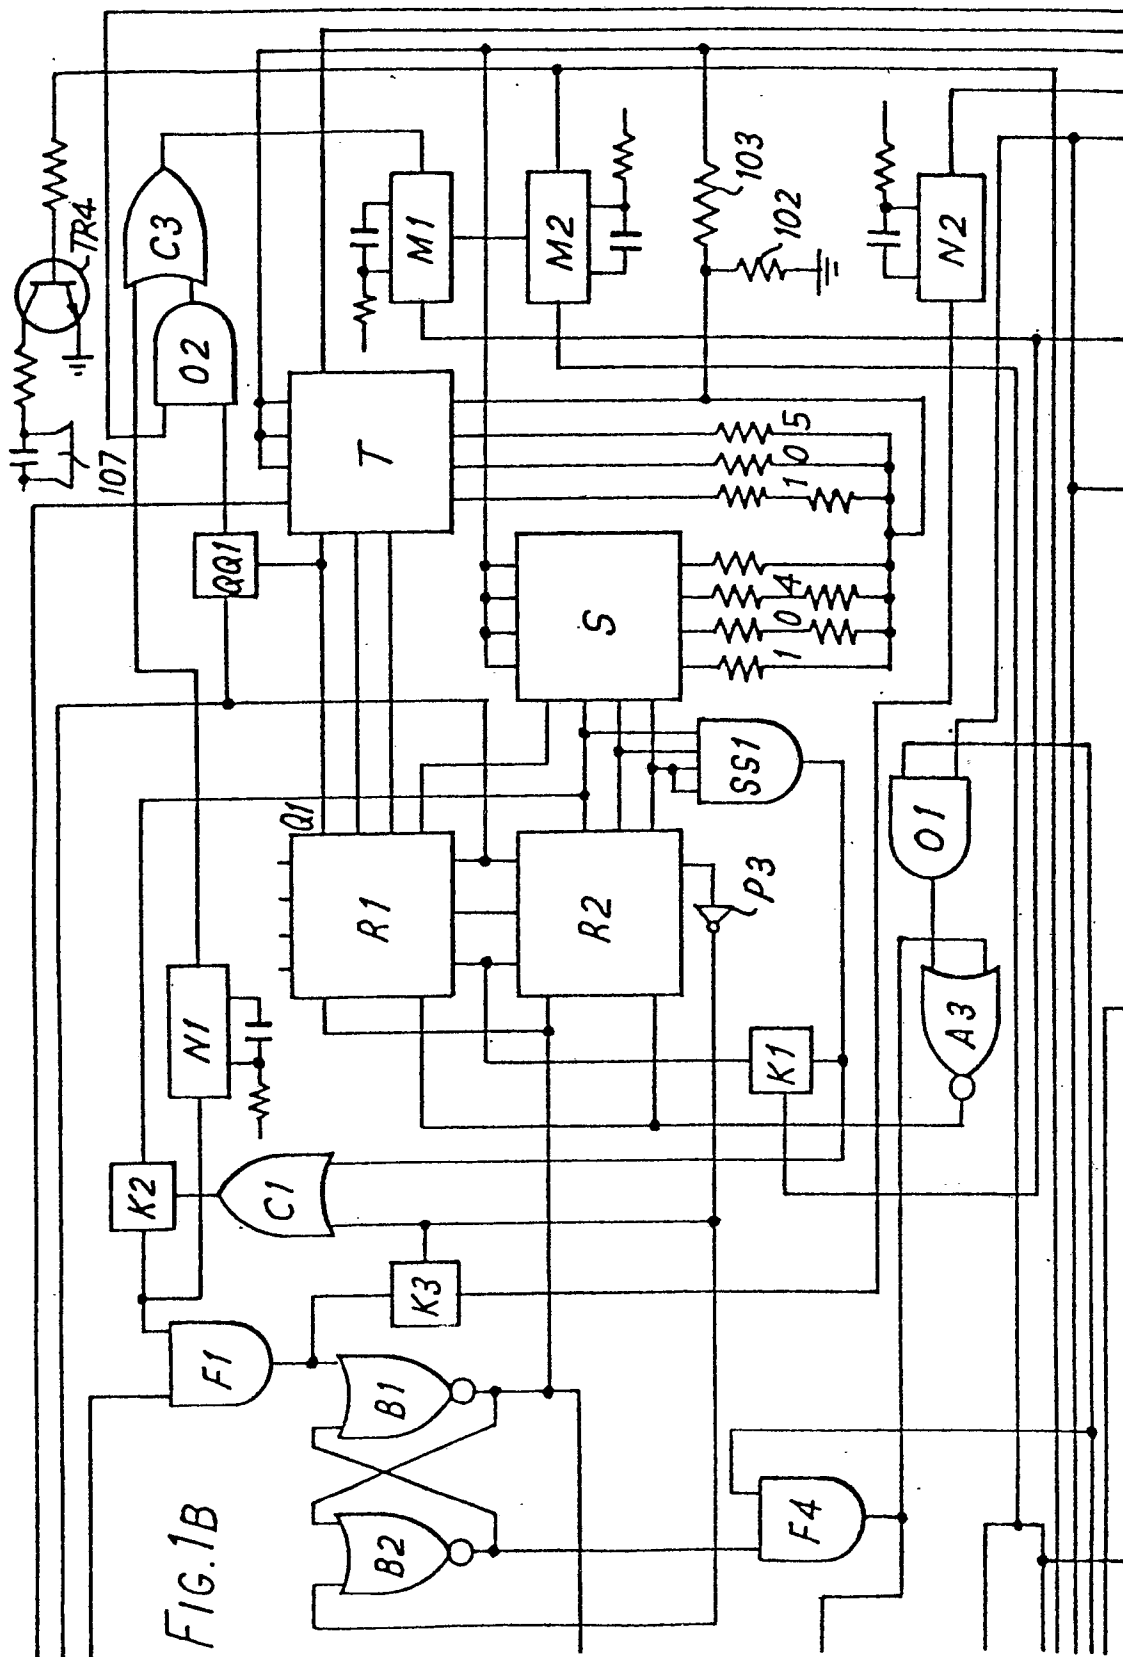


FIG. 1C

