




(86) Date de dépôt PCT/PCT Filing Date: 2001/11/20
(87) Date publication PCT/PCT Publication Date: 2002/05/23
(85) Entrée phase nationale/National Entry: 2003/05/16
(86) N° demande PCT/PCT Application No.: AU 2001/001503
(87) N° publication PCT/PCT Publication No.: 2002/040250
(30) Priorité/Priority: 2000/11/20 (PR 1583) AU

(51) Cl.Int.⁷/Int.Cl.⁷ B29C 59/02, B29C 33/38, B26F 1/24,
B29C 67/20, B29C 59/04
(71) Demandeur/Applicant:
AMCOR PACKAGING (AUSTRALIA) PTY LTD, AU
(72) Inventeurs/Inventors:
HARVEY, EROL CRAIG, AU;
WAYCOTT, RAMON GLENNY, AU;
CAREW, DAVID LEE, AU
(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE DE TRAITEMENT DE PELLICULES
(54) Title: METHOD FOR TREATING FILMS

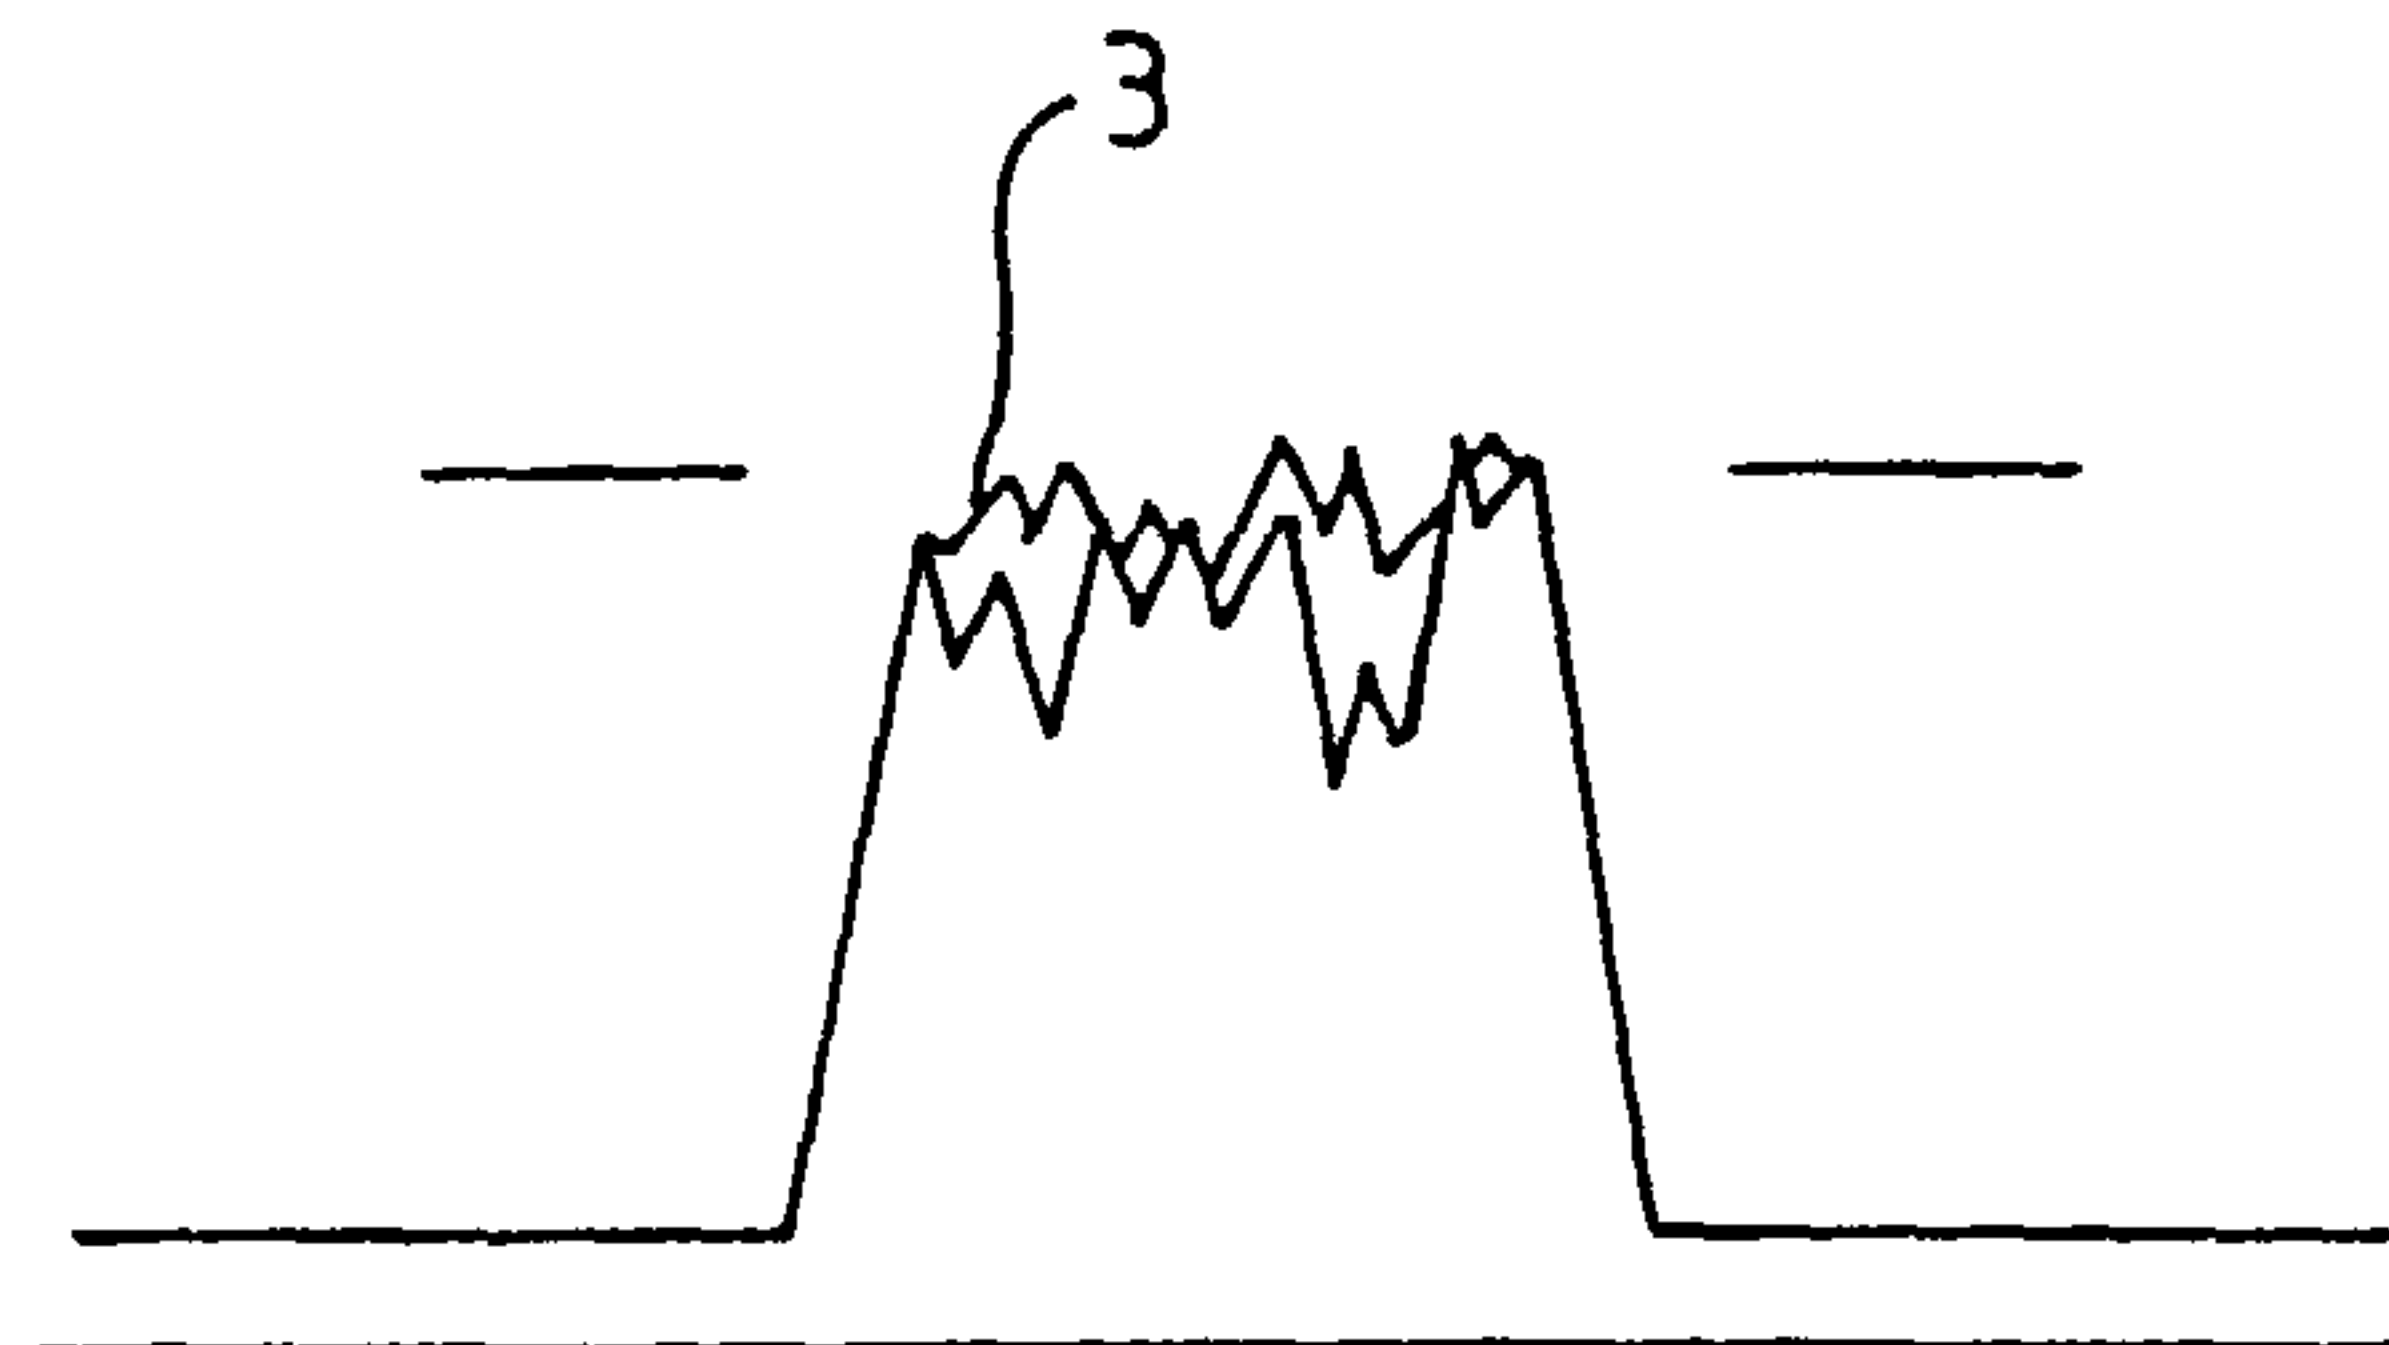

(57) **Abrégé/Abstract:**

A method for treating a film by providing a structure including a substrate and an array of upstanding projections each of which includes multiple contact points. The structure is pressed against the surface of a polymeric film to cause deformation or rupture of the film. The film may then be pressed to partially reseal the perforations. The structure can be produced by electroplating a mould which includes an array of elements of dimensions corresponding to the projections of the desired structure.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/40250 A1

(51) International Patent Classification⁷: **B29C 59/02**,
59/04, 67/20, 33/38, B26F 1/24

(74) Agent: **BORHAM, Janelle**; Griffith Hack, 509 St Kilda
Road, Melbourne, Victoria 3004 (AU).

(21) International Application Number: PCT/AU01/01503

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZW.

(22) International Filing Date:
20 November 2001 (20.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PR 1583 20 November 2000 (20.11.2000) AU

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).


(71) Applicant (*for all designated States except US*): **AMCOR
PACKAGING (AUSTRALIA) PTY LTD** [AU/AU];
971-973 Burke Road, Camberwell, Victoria 3124 (AU).

Published:
— with international search report


(72) Inventors; and
(75) Inventors/Applicants (*for US only*): **HARVEY, Erol,
Craig** [AU/AU]; 104 Glenvale Road, Ringwood North,
Victoria 3134 (AU). **WAYCOTT, Ramon, Glenney**
[AU/AU]; 26 Craig Road, Donvale, Victoria 3111 (AU).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR TREATING FILMS

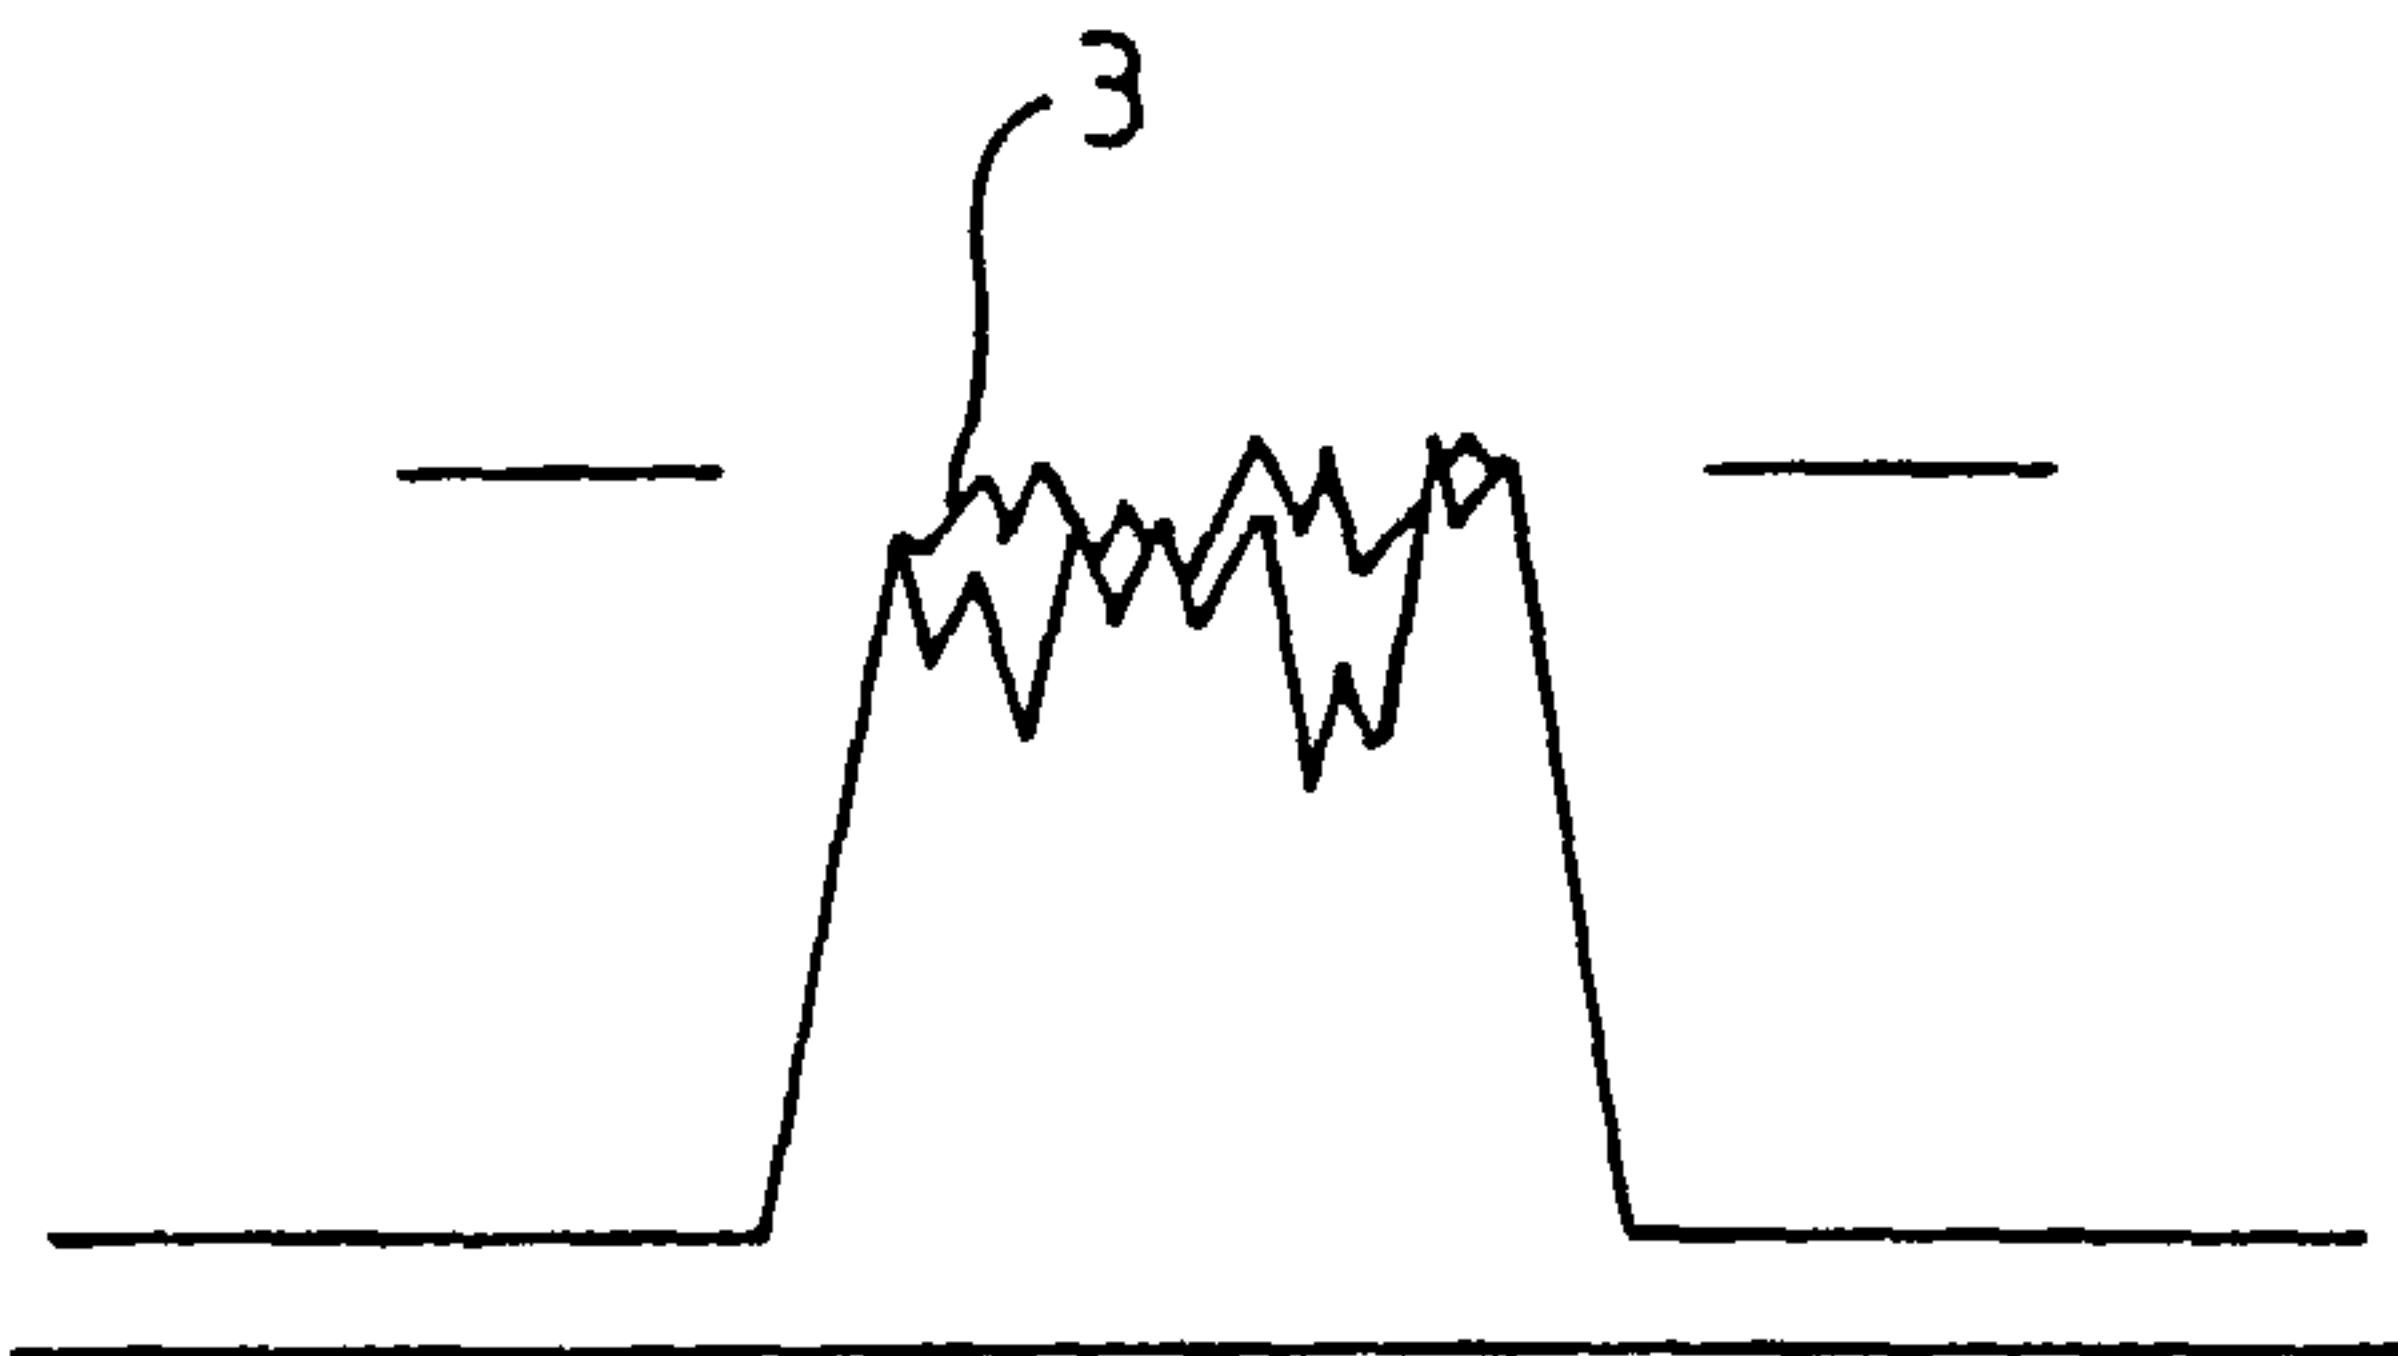

(57) Abstract: A method for treating a film by providing a structure including a substrate and an array of upstanding projections each of which includes multiple contact points. The structure is pressed against the surface of a polymeric film to cause deformation or rupture of the film. The film may then be pressed to partially reseal the perforations. The structure can be produced by electroplating a mould which includes an array of elements of dimensions corresponding to the projections of the desired structure.

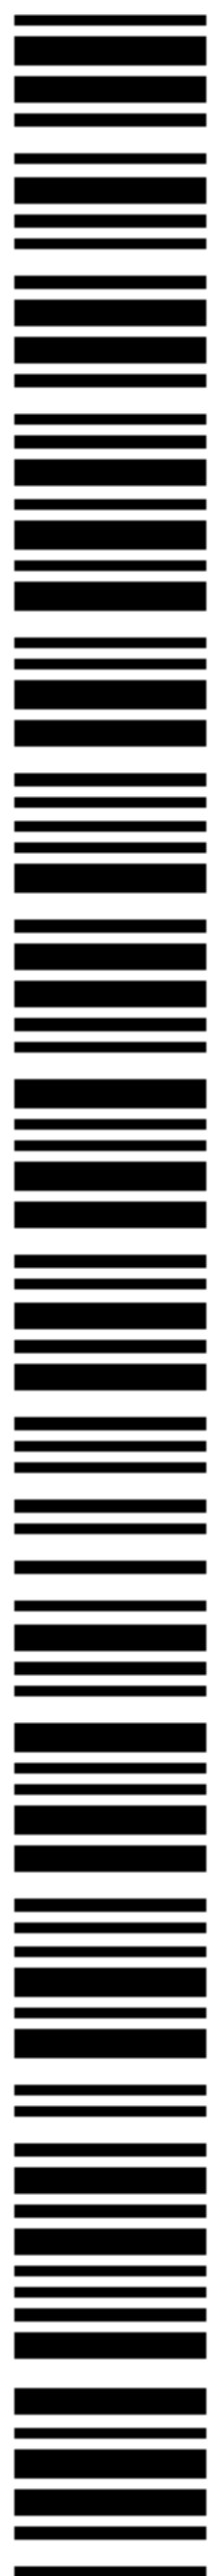

WO 02/40250 A1

METHOD FOR TREATING FILMS

The present invention relates to methods for treating films such as polymeric films for a variety of purposes. The treatment technique involves the formation of very small deformations or ruptures (perforations) in the film to form treated films suitable for use as breathable films or controlled tearing films.

Polymeric films for use in the packaging of food products are sometimes subjected to perforating treatments to form a "breathable" or "controlled atmosphere" food packaging. The perforations in such films are most commonly formed by mechanical perforating methods. Whilst these methods are capable of forming perforations of a reasonably uniform size, the known methods cannot be used to form very small perforations (for example less than 25µm in diameter). Perforations at least as small as 25µm in diameter are required to produce films that allow different gases (such as O₂ and CO₂) to pass across the film barrier into or out of a package at different rates. Such controlled atmosphere packaging made with these films is advantageous in extending the shelf life of food products.

In other industries, for example the clothing industry, materials such as fabrics are available which provide breathability. However, these materials and techniques for manufacturing these materials are not appropriate for the manufacture of low-cost polymeric films for use in the food packaging or in the production of sanitary products such as diapers.

One of the main difficulties associated with forming perforations of less than 25µm in diameter is the difficulty in forming a structure having spikes less than 25µm in diameter. Accordingly, a number of proposals have been put forward that involve the use of laser radiation to

- 2 -

form very small perforations in polymeric films. However, these techniques have also encountered a number of problems that principally relate to the time taken for laser irradiation to create the holes through the full film thickness. These drawbacks currently make it infeasible for laser to be used to create minute perforations in low cost, high production speed polymeric films.

During the course of investigating the problem of creating low-cost breathable films, the applicant has also identified other adverse characteristics of polymeric films that may be compensated for by different treatment techniques. One such characteristic is the difficulty in tearing biaxially oriented films in a controlled manner.

15

The applicant has now developed new techniques for treating films to form very small deformations or ruptures in the film. These techniques make it possible to create breathable films or controlled-tearing films at high production speeds. These techniques may also be applied to the formation of breathable fabrics based on the films prepared in accordance with the present invention.

20

According to the present invention there is provided a method for treating a film, comprising:

25

- providing a web of polymeric film having a front face and a reverse face,
- providing a structure including a substrate and an array of upstanding projections, each projection including multiple contact points, and
- pressing the projection-bearing surface of the structure into one face of the polymeric film a sufficient distance to fix the film against the contact points to cause deformation or rupture of the film.

30

35

- 3 -

The contact points of the projections may be described as being geometric features that provide a non-uniform pressure distribution across the film when pressed against the film. Rupture or deformation thereby occurs between the contact points. Since the pressure differences are greatest between the contact points of the one projection, a deformation or rupture (ie a perforation) is generated within the diameter of the perforation. When the projection is of a suitably small size, it becomes possible to create microperforations or microdeformations in the film. Accordingly, in a preferred embodiment, the projections includes contact points having a spacing less than 500 μ m, preferably less than 250 μ m, more preferably less than 150 μ m and most preferably less than 100 μ m.

It is to be noted that the contact points or geometric features may be of a wide range of configurations. Almost any shaped projection with the exception of "pinpoint" projections will have such contact points that create the non-uniform pressure distribution across the width of the projection. It is not necessary for the contact points to be constituted by a plurality of peaks of the projection. The projection may have a smooth upper profile and still contain contact points along this profile that cause rupture or perforation of the film between the contact points.

This treatment technique can be put to use to produce films having a variety of characteristics. For one example, a breathable or "controlled atmosphere" film can be produced by this method. If deformations or indentations are formed only, these leave a very thin layer of the film that divides one face of the polymeric film from the reverse face. This layer of film can be controlled to be small enough for different gases to diffuse at controlled rates across this very thin barrier.

- 4 -

In addition, liquids may be prevented from passing through the film.

5 This technique can also be used to form a film
such as a polymeric film that has controlled tearing
characteristics. Specifically, the deformations or
indentations can be formed in a line in the film, thereby
providing a line of weakness in the film that enables the
10 film to be torn along the line joining the deformations or
indentations. If the indentations are formed that do not
extend through the full thickness of the film, a product
packaged in the film will not be exposed to the outside
air. At the same time, the package can be opened with ease
when torn along the line defined by the indentations.

15 The term "film" has been used in this
specification in its broadest sense and includes single
layer films, biaxially oriented polymeric films, composite
films, multilayer films, coextruded films and laminates of
20 polymeric films with layers of other materials, such as
metal. The film treated by the method of the present
invention may be laminated to another layer or layers
following treatment of the film according to the present
invention. Accordingly, a treated film may be laminated to
25 another layer or layers following the formation of the line
of weakness (tear-line) in the polymeric film.

In the case where the pressing step involves
pressing the structure into the polymeric film a sufficient
30 distance to rupture the film to form perforations in the
film, the perforations can be controlled to be sufficiently
small by controlling the pressure applied to the film
against the structure. The perforation size, due to the
configuration of the structure and the treatment technique,
35 can be controlled such that the effective size of at least
80% of the perforations is less than 25 μm in diameter. In
the art of the invention, the effective size of a

- 5 -

perforation is measured by a MOCON oxygen transmission tester calibrated against a film with a perforation of the defined size. More preferably, the effective aperture size of at least 80% of the perforations formed in the film is
5 less than or equal to 10µm, as measured using the Mocon Oxygen transmission tester calibrated against a film of the defined size..

In an alternative embodiment of the invention the
10 technique can be used to form deformations or indentations in the film. In one application of this embodiment, the indentations can be formed in a line to create a line of weakness in the film that enables the film to be torn along the line. To accomplish this, the film is pressed
15 relatively lightly against the structure.

Preferably, the film is pressed between the structure and a backing form that pushes the film against the structure. The backing form preferably has an outer
20 surface that is of an appropriate stiffness to force the projections into or through the film surface. Neoprene and rubberised elastomers are examples of suitable materials for forming the outer surface of the backing form. The stiffness of this backing form would usually be between 40
25 and 100 as measured by the Shore hardness test.

In most commercial situations the pressing step will be conducted as a continuous process. In this situation, the structure may be mounted onto, or in the
30 form of, a roller or a platen. In the case of a roller, the pressing step may then involve passing the film between the roller form of the structure and a backing form in the shape of a backing roller. In the case of a platen, the platen may be a reciprocating platen including a structure
35 on one plate and a backing plate. A combination of a platen with a roller is another option.

- 6 -

In a preferred embodiment of the invention, the penetrating structure and the backing form are indexed or oscillate in either one or two axes perpendicular to the direction of penetration to maintain the pressure of application for an extended period as wear of the structures or backing material takes place. To further maintain the uniformity of the deformations or ruptures in the film over time, the structure preferably has a wear-consistent design. In other words, the cross-section of each projection should remain uniform through a significant portion of the height thereof.

In some situations it may be desirable to heat the film and/or the structure (in roller form or otherwise) to assist in the deformation or rupturing of the film.

The projections of the structure preferably have an average height of between 5 μ m and 250 μ m, more preferably between 10 μ m and 200 μ m, and most preferably between 10 μ m and 100 μ m.

The average maximum width dimension of the projections should be less than 1mm. Usually the average maximum width dimension of the projections is less than 500 μ m, preferably less than 250 μ m, more preferably less than 200 μ m, and most preferably less than 150 μ m. In order to form perforations or deformations in the film as small as possible, an average maximum width dimension of less than 100 μ m is particularly suitable.

The method outlined above may be utilised in a novel technique for the treatment of a thermoplastic polymeric film which involves:

- (a) providing a web of thermoplastic polymeric film;

- 7 -

(b) rupturing the film to form perforations in the film; and

5 (c) pressing the film to at least partially re-seal the perforations, or to modify the surface of the film.

In step (b), the film is ruptured in such a way that the polymeric material previously located in the position of the perforation is displaced but remains connected to and a part of the polymeric film. This is in distinct contrast to techniques for forming perforations in film that involve laser ablation of the material in the region of the perforation, or involve punching out a disc of the polymer film to leave a perforation in its place. As will be described below in further detail, the polymeric material is stretched, snaps, and recoils in a curled ribbon-like formation or fringe around the region of the perforation in the film. The pressing step d can be used to iron flat the recoiled plastic in the region of the perforations.

Preferably, the film is heated to a temperature greater than or equal to its softening point prior to or at the same time as the pressing step (c). The heating step could be conducted contemporaneously with the pressing step by passing the film between heated nip rollers. Alternatively the heating step could involve heating the film by hot air, infrared radiation or conduction to raise the film to the necessary temperature prior to step (d).

In one embodiment the treatment technique also includes a step in which the film is printed. The print is advantageously indexed with a tear-line generated by the treatment technique of the present invention.

The film surface can be modified by the

- 8 -

techniques outlined above to vary the softness and texture of the film. As will be appreciated from closer inspection of the films depicted in the preferred embodiments, the films formed using the structures of the present invention
5 may have a rough surface resulting from stretching and gouging of the film surface. Step (c) can therefore be used to flatten the film and to restore the smooth surface thereof.

10 This technique makes it possible to form perforations of a size greater than is required for a particular application in a first mechanical perforating step, followed by a re-sealing step in which these perforations are reduced in size to the final desired
15 perforation size. Otherwise, the perforations may be eliminated entirely to leave a line of weakness in the film. Accordingly the perforations formed in the film by this technique can be made even smaller than can be obtained using the mechanical perforating technique alone.
20 Nevertheless, the high production speeds required to form low-cost films can still be achieved.

According to the present invention there is also provided an assembly for forming indentations or
25 perforations in a web of polymeric film, comprising:

- a film unwinding station;
- a film treatment station including a structure as described above; and
- 30 - a film rewind station located downstream of the treatment station.

Preferably, the assembly also includes at least one, and preferably a plurality of printing stations.
35 Further, the assembly may beneficially include stations for film lamination after treatment, slitting, or post processing such as the manufacture of bags from the

- 9 -

finished film.

Other preferred features of the apparatus will be apparent from the description of the methods outlined
5 above.

According to the present invention there is also provided a film produced by any of the methods or the assembly described above. These films can be used as
10 controlled atmosphere films or controlled tearing films. Another possible application for the films is use as a breathable textile. In this application, the film may be laminated with one or more other layers of material such as a fabric.

15

Preferably, the polymeric film has a thickness of 120 μm to 8 μm . When indentations as opposed to perforations are formed in the film, it is preferred that the indentations extend into the film a distance of up to
20 80% of the total film thickness.

As will be shown with reference to the preferred embodiments, the perforations formed in the film may not be circular, and may be slit-shaped or irregular in shape.
25 However, it is preferred that the area of the openings (ie at least 80% of the openings) in the film be equivalent to a circular opening of diameter 25 μm or less (as measured by the MOCON oxygen transmission tester).

30

Preferably, the polymeric film is a polyolefin film. One particularly suitable polymer for forming the films according to the present invention is polyethylene.

According to the present invention there is also
35 provided a structure of the configuration described in general terms in the methods outlined above. As noted above, the projections of this structure may be of a wide

- 10 -

range of configurations, the one notable exception being that the projections cannot be pinpoint projections since a pinpoint projection does not have multiple contact points and therefore does not have the capacity to create a deformation or rupture in the film that is of a significantly smaller width than the diameter of the projection.

The applicant has found that a mould for creating a structure of this configuration can advantageously be manufactured by utilising laser irradiation to generate a mould from a blank block of material. The blank can be made of any suitable material, such as plastic, ceramic, single crystal silicon or metal. Preferably the blank is made from a laser-machinable polymer. Examples include polyvinyl chloride, polyethylene terephthalate, polyimide, polycarbonate and polyacrylates (such as polymethylmethacrylate) This mould can then be electroplated to generate the structure.

In one embodiment of the invention, the projections include a rim or margin that is of a greater height than the central part of the projection inside the rim or margin. The corresponding mould to form this structure should conveniently be formed with cavities that are deeper in the edge or margin regions. Such a mould can be made by laser micromachining of a blank, as described above. During laser ablation, a deeper margin region effect is obtained when the plastic towards the edge of the cavity absorbing the laser radiation explodes away. Due to the presence of plastic in the surrounding area, the explosion creates a deeper crevice in the margin region of the cavity.

In one optional form of the structure of the invention, the structure includes a substrate and an array of upstanding projections, said projections including a

- 11 -

jagged rim or margin defining an upper edge of the projection.

In one embodiment of the invention, the
5 projections include a central axially hollowed region. The
hollowed region may extend through the full height of the
projections, or may extend axially only part way through
the projections. Accordingly, it becomes possible for the
structure to form suitably small perforations and
10 indentations in a film at high speeds for the creation of a
low cost controlled atmosphere film.

Preferably, the structure is in the form of a
roller.

15

Preferably, a series of structures in the form of
plates are produced and are assembled together to form the
outer surface of a roller.

20

According to the present invention, there is also
provided a method of producing a structure having an array
of projections suitable for pressing against a film to
produce deformations or ruptures in the film, the method
comprising:

25

- producing a mould including an array of
elements of dimensions corresponding to the
projections of the structure; and
- electroplating the mould with electroplating
30 material to produce the structure.

30

Preferably, the projections are between 5µm and
1mm in height.

35

Preferred mould forming techniques have been
described above.

- 12 -

The mould may be of a variety of different constructions. In one embodiment of the invention, the elements may be a series of protrusions that may be coated with the electroplating material on their surface to form a thin sheet of electroplating material on the mould. This sheet can then be removed from the mould. The protrusions will therefore be of a similar size to the intended projections of the indenting or penetrating structure, or a little smaller. The metal sheet thus produced will have a series of hollow projections. This metal sheet may be used directly as the structure, or it could be used as a "mother plate", and a number of "daughter plates" can be generated from this plate.

In another embodiment of the invention, the elements may be a series of cavities of size corresponding at least substantially to the dimensions of the projections of the desired resultant structure, and the electroplating material is plated onto the surface of the mould and into the cavities.

This second mould type can be electroplated in two different ways to form two different structure types. According to one embodiment of the invention, this technique of producing the structure can be utilised to provide the type of structure described above which includes an array of upstanding projections that have jagged rims defining upper edges of the projections. According to this embodiment of the invention, insufficient material is electroplated onto the mould to fill the mould cavities thereby resulting in the formation of a structure including a substrate and an array of upstanding projections having jagged rims defining upper edges of the projections.

35

Preferably, the cavities of the mould are of a size and have a ratio of depth to width such that

- 13 -

electroplating of the mould with metal does not result in complete filling of the mould cavities with metal.

It has been found by the present applicant that,
5 when using electroplating techniques to form a structure suitable for pressing into a polymeric film to provide suitably sized pores to form a breathable film, if the ratio of depth to width of the cavities (i.e. the aspect ratio) for these very narrow cavities is significantly
10 high, it is not possible for metal being electroplated into the cavity to fill the cavity. This results in the formation of projections having a jagged upper rim having height corresponding to the depth into the cavity to which metal can be thrown in the electroplating operation.

15

Preferably, the side walls of the cavities of the mould are corrugated so as to receive and support the deposition of electroplated metal.

20

The present invention will now be described in further detail with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a section of a
25 penetrating structure of a first embodiment of a first aspect of the invention illustrating the projections;

Figure 2 is a schematic cross-sectional view of one preferred method of forming the penetrating structure
30 illustrated in Figure 1;

Figure 3 is a schematic side profile of a projection of the penetrating structure illustrated in Figure 1;

35

Figure 4 is a schematic side profile of an alternative form of projection for the penetrating

- 14 -

structure of the first aspect of the invention;

Figure 5 is a scanning electron micrograph of a sheet of polyethylene film which has been pressed against the penetrating structure illustrated in Figure 1, with Figure 5(a) illustrating the reverse face of the film, Figure 5(b) illustrating a section of the film 10um into the film depth, and Figure 5(c) illustrating the top face of the film;

10

Figure 6, 7, 8 and 9 illustrate cross sectional views of alternative cavity configurations for forming alternative structures according to various alternative embodiments of the invention;

15

Figure 10 is a schematic cross-sectional view of a sheet of polyethylene film that has been pressed against the structure illustrated in Figure 1;

20

Figures 11a - 11h, 12a - 12f, 13a - 13h, 14a - 14h, 15a - 15h and 16a - 16f are electron micrographs of various indenting or penetrating structures according to the present invention;

25

Figure 17 is an electron micrograph of one face of a sheet of polymeric film that has had an indentation formed by an indenting structure according to the present invention;

30

Figure 18 is an electron micrograph of the reverse face of the sheet illustrated in Figure 17;

Figure 19 is an electron micrograph of one face of a sheet of polymeric film that has had an indentation formed therein by the indenting structure illustrated in Figures 16c - 16f;

35

- 15 -

Figure 20 is an electron micrograph of the reverse face of the sheet illustrated in Figure 19;

Figure 21 is a schematic view of the assembly for forming perforations in accordance with one embodiment of the invention;

Figure 22 is a schematic perspective view of a section of film with one elongate perforation formed in one part of the assembly of Figure 21;

Figure 23 is a schematic perspective view of the section of film illustrated in Figure 21 following re-sealing in the assembly of Figure 21;

Figure 24 is a schematic perspective view of another projection configuration for the structure of a preferred embodiment of the invention; and

Figure 25 is a schematic side view of 3 perforations formed from a tool having the projection configuration as illustrated in Figure 24.

During the course of investigating techniques for forming microperforations or indentations in polymeric films, the present applicant has tested a variety of structures and assessed the films produced after being pressed against the structures. All structures investigated contained multiple contact points, which, when fixed against the film, caused deformation or rupture of the film. The properties and configuration of the film in the area of the perforations and immediately surrounding the perforations was investigated using a number of analytical techniques. Although not wishing to be bound by theory, the results appeared to indicate that the films formed from the structures having jagged projection may have a different configuration to the films produced from a

- 16 -

structure having a more blunt configuration. The different possible projection shapes created are described in detail below.

5 Figure 1 illustrates an enlarged view of a section of a penetrating structure according to a first embodiment of the invention. The penetrating structure includes a substrate 1 in the form of a metal plate or sheet and an array of upstanding projections 2. Each
10 projection includes a jagged rim 3 defining the uppermost peripheral edge of the projection 2. The configuration of each projection includes multiple contact points which, when pressed against a film, will fix the film and cause minute deformations or ruptures in the film surface.

15 The projection 2 of the penetrating structure of the first preferred embodiment of the invention is illustrated schematically in Figure 3. From this figure, it can be seen that the projection is substantially frusto-
20 conical, and includes a central axially hollowed region. The upper rim of the projection 2 has an unevenly jagged formation. According to an alternative embodiment of the invention illustrated in Figure 4, this upper rim of the projection 3' may be angled. As can be seen with reference
25 to the figures, the projections have the appearance of a volcano, with angled sides and a jagged upper rim or margin.

 This penetrating structure and the other
30 structures of the preferred embodiments of the invention are generated by:

- 35 - producing a mould 4 including an array of elements (such as cavities, 5) of dimensions corresponding to the projections 2 of the resultant structure; and
- electroplating the mould 4 with electroplating

- 17 -

material to produce the structure.

According to the first preferred embodiment of the invention, the penetrating structure is produced by
5 generating a mould 4 including an array of cavities 5, which is electroplated with a suitable metal to form the penetrating structure thereon.

The structure so-formed may be used directly as
10 the penetrating structure, or may be used as a "mother plate" from which a number of "daughter plates" are generated. These daughter plates are bent into a roller configuration and are then used as the penetrating structure.

15 The mould is formed by taking a block of polycarbonate and micromachining cavities in the block of polycarbonate by laser ablation. Micromachining by using laser ablation has not, to the knowledge of the applicant,
20 been used for creating structures with the level of micro-detail required to practice the present invention. An EXCIMER laser was used for this purpose.

This mould is then electroplated with an
25 appropriate metal. In this embodiment of the invention, during the electroplating operation, insufficient metal was electroplated onto the mould to fill the mould cavities, thereby resulting in the formation of a penetrating structure having the configuration illustrated in Figure 1.
30 The electroplating operation can be controlled to ensure insufficient material is electroplated onto the mould by designing the cavities of the mould to be of a size and having a ratio of depth to width such that the electroplating operation is incapable of throwing metal to
35 the deepest region of the cavities. In the preferred embodiments illustrated with reference to Figures 1-10, the width of the cavities is approximately 50µm, and the depth

- 18 -

of the cavities is approximately 70 μ m. After electroplating, the approximate height of the jagged upper rims of the projections was approximately 10 μ m.

5 As illustrated in Figure 2, the electroplating operation may result in closing of the central axial region of the projections 2. However, it will be understood to persons skilled in the art that the central region will not necessarily close up and may remain hollow through the
10 height of the projections 2. Whether or not the central axial region of the projections will remain hollow will depend on the aspect ratio, that is, the ratio of depth to width of the cavities of the mould.

15 A variety of possible cavity shapes for the moulds are illustrated in Figures 6 to 9.

 In Figure 6 it is shown that the cavities may be chevron-shaped, and may have corrugated side walls. The
20 corrugations are only approximately 8-10 μ m wide. These corrugations are generated by fine micromachining using laser ablation. It will be appreciated by persons skilled in the art that a very high level of control is required to obtain the fine corrugated wall effect using laser
25 ablation.

 These corrugations facilitate the production of projections having evenly jagged or serrated upper rims. Each of these projections accordingly has a number of
30 contact points that provide a non-uniform pressure distribution across the film when the structure is pressed against the film. Rupture will occur between some of these contact points where the strain applied is great enough, and between other contact points deformation will occur.
35 Since the pressure differences are greatest between the contact points of the one projection, these deformations and/or ruptures (ie a perforations) will be generated

- 19 -

within the diameter of the perforation.

Figure 7 illustrates a conical cavity having corrugated walls.

5

Figure 8 illustrates a crescent-shaped cavity having corrugated walls.

Figure 9 illustrates cavities of chevron or triangular shape in an alternative staggered arrangement.

A series of structures in the form of plates can be produced and assembled together to form the outer surface of a roller. Thereafter, the roller can be
15 utilised in an assembly for forming deformations (eg. indentations) or ruptures in a web of polymeric film. The example of one assembly illustrated in Figure 21 includes a film unwinding station 13 at which a web of polymeric film 14 is unwound, and a film treatment station 15 including a
20 roller 16 or structure as described above. Following the film treatment station is a film rewind station 17. In one arrangement, the treatment station may be incorporated into an assembly for manufacturing a product formed from breathable polymeric film, such as a food package or
25 diaper. In the arrangement illustrated, the assembly may include a printing station 18, which may be one of a series of printing stations. In the case where the assembly is used to form a controlled-tearing film, preferably the print is indexed with the projections on the roller so that
30 the tear-line is located at an appropriate position with respect to the printed material.

The roller 16 forms one of a pair of rollers between which the polymeric film passes so as to effect
35 perforation at high throughputs. The structure of this configuration is capable of perforating the polymeric film at a rate in excess of 300 meters per minute. The material

- 20 -

used for the outer surface of the backing roller 19 of the pair of rollers is a resilient material such as a rubberised elastomer or neoprene of appropriate stiffness to enable the projections of the penetrating structure to
5 penetrate into the surface of the polymeric film.

Figures 5a - 5c are scanning electron micrographs of a polyethylene film that has been pressed against the structure illustrated in Figure 1. Figure 5a is the
10 reverse face of the film, Figure 5b is a cross-section through the film 10µm into the 25µm thick film, and Figure 5c is the top surface of the film. As illustrated, the penetrating structure was pressed into the polymeric film sufficiently firmly to generate a series of micro-sized
15 deformations between contact points of the projections. Figure 5a illustrates the reverse face of the polyethylene film. The dark regions correspond to regions where the contact points along the jagged upper rim of each projection have caused deformations and ruptures in the
20 film within the area or width of the single subject projection.

Figure 5b illustrates a cross-section through the polyethylene film 10µm into the 25µm thick polyethylene
25 film. The regions marked with the numeral 7 correspond to those regions also marked by the numeral 7 illustrated in Figure 5a.

On the top surface of the film illustrated in
30 Figure 5c it can be seen that these deformations or recesses do not open to the top face of the polyethylene film. Whilst none of the recesses open to the upper face of the polyethylene film in this embodiment, the pressing of the structure against the film can be controlled to
35 ensure that the projections do go through the film to open to the upper surface of the polyethylene film. Since the jagged peaks are very narrow (only a few microns wide), the

- 21 -

pores formed through the polyethylene film 6 are likewise very narrow.

The recessed regions that do not extend the full distance through the film leave a very small barrier of material dividing one side of the polymeric film from the other. This very thin barrier is capable of allowing gases to diffuse from one side of the film to the other at controlled rates. It is believed by the present applicants based on the SEM images that the cross-section of the film can be approximated to that illustrated in Figure 10. As can be seen, as a result of the very narrow jagged peaks of the projections (which are only a fraction of the width of the full projection), the open pores or perforations which extend through the full width of the film are very narrow (eg. 10µm or less). The film also includes a recessed region 11 and closed pores 12 which extend part-way through the film, but do not break through the upper surface 9 of the film 6. These closed pores allow gases to diffuse across the film, as illustrated by the dashed arrow.

According to a second embodiment of the invention, an indenting or penetrating structure is formed having projections of a uniform construction.

A variety of projection configurations for this embodiment of the invention are illustrated in Figures 11 to 16 and 24. The projections of some of these structures have raised or relatively sharp edges (for example, see the projection of Figure 11c), whereas others, notably that of Figure 24, are comparatively blunt. However, it will be noted that none of the projections are pin-point projections. The projections are in some instances chevron shaped, triangular, circular, prismatic, serrated, diamond shaped, zigzagging, cross shaped or crescent shaped, or are arranged in a honeycomb configuration. Different shapes

- 22 -

are appropriate for different applications.

5 As can be seen from the shading on the electron
micrographs, the projections of the indenting structures of
figures 11 - 16 have a rim or margin that is of a greater
height than the central part of the projection inside the
rim or margin. In some instances this margin is sharply
10 defined, and in other instances the rim is more blunt. The
body of the projection may be of a greater height than the
thickness of a polymeric film that is pressed against the
indenting structure. However, the difference in height
between margin region and the central region of the
15 projection is advantageously controlled to be less than the
thickness of the polymeric film.

A mould for creating a structure of this
configuration can advantageously be manufactured by
20 utilising laser irradiation to generate a mould from a
blank block of laser-machinable material. In the preferred
embodiment polycarbonate blanks are used. Laser
micromachining of the blank to create a mould having an
array of cavities can be controlled so that the cavities
25 are deeper in the edge or margin regions. During laser
ablation, the deeper margin region effect is obtained when
the plastic towards the edge of the cavity absorbing the
laser radiation explodes away. Due to the presence of
plastic in the surrounding area, the explosion creates a
30 deeper crevice in the margin region of the cavity.

Regardless of the height of the projections of
the structure, the structure can be used to form
indentations in a polymeric film by deforming or stretching
35 the film between the contact points. Rupturing of the film
can be avoided by controlling the spacing between the
rollers (in the situation where the substrate is in the

- 23 -

form of a roller that is mounted adjacent to a backing roller) or by otherwise controlling the pressure of application of the film against the structure. Other measures of control include but are not limited to control of the relative height of the penetrating structures and hardness of the backing material. The result using a structure having projections of oval cross-section, and sharp raised margins is illustrated in Figures 17 and 18. The film in this instance is a polyethylene film of a thickness of 25 μm . The sharp margin regions of the projections of the structure have formed a deeper indentation in the film, and the reverse face of the film illustrated in Figure 18 is slightly protuberant.

The same result for a crescent-shaped projection is illustrated in Figures 19 and 20. As can be seen, the points of the crescents form contact points between which the film is stretched. In each instance, in the tests illustrated, a neoprene-coated backing plate was used to press the film against the indenting structure. In a commercial situation, the backing plate would be in the form of a roller corresponding to that illustrated in Figure 21 (numeral 19).

With respect to the cross-shaped projection 24 illustrated in Figure 24, it is noted that each cross 24 is 200 μm tall, 100 μm in width, and the cross-bars are 50 μm wide. The maximum diameter dimension of the cross shaped projection is approximately 200 μm . These projections 24 would ideally be spaced about the substrate with a minimum separation corresponding to the width of the projection (200 μm).

Three tools having a cross-shaped projection 24 as described above were generated and pressed into a 60 μm thick polymeric film, with a rubber backing form. Three dimensional (stereo) images of the perforations formed in

- 24 -

the film were created to investigate the shape of the perforations created by each tool.

Schematic representations of the configurations of the perforation generated by the three tools are illustrated in Figure 25. Whilst not wishing to be bound by theory, it is the conjecture of the applicant that the film is stretched by coming into contact with the projections until rupture occurs, at which point the stretched film in the area of the perforation recoils to leave a very fine (possibly curled) ribbon-like fringe of plastic around the perforation. The fine plastic fringe is believed to have the potential to partially obstruct the perforation.

15

This recoiling effect can be utilised in one particular embodiment of the invention to form a film having a "sieve" in the region of the perforation. According to this embodiment of the invention, the structure of the invention is pressed against a multiple-layer film, preferably a two layer film. One suitable film has 40µm lower layer of LLDPE (linear low density polyethylene) and a 20µm upper layer of BDPP (biaxially oriented polypropylene). This film is perforated by pressing a structure of the present invention against the LLDPE surface of the film. The tool stretches the two layers of plastic until the point where the films rupture. The LLDPE layer of film stretches significantly prior to rupture, and recoils to form a curled spaghetti-like web of material which is trapped under the (also perforated) upper BOPP layer, so that the film contains a perforation with a trapped internal "sieve" of curled plastic. The internal sieve of curled plastic would be capable of preventing matter of size greater than 0.45µm to pass through the film. Accordingly, the film may advantageously provide bacterial filtering.

30
35

- 25 -

The structures of the present invention can be utilised to create breathable films having specific target oxygen transmission rates, with minimal liquid transmission. This has hitherto not been possible, since
5 the perforations generated by prior art techniques were not small enough to enable the oxygen transmission rate of a film to modified incrementally to achieve the desired oxygen transmission rate. One example of how this can be achieved will now be explained.

10

The oxygen transmission rate for a single perforation that can be created by a specific structure in a particular film is calculated. For example, the cross-shaped projections 24 of the dimensions described above are
15 calculated to each individually create a hole in a certain type of film that has an oxygen transmission rate of 20 cc/hole.atm.day. An unperforated film having a base oxygen transmission rate of 60 cc/100 in².atm.day (a standard unit of measurement in the field of the invention) can have the
20 oxygen transmission rate thereof increased incrementally by 20 cc/(selected area).atm.day by creating perforations in the film with a tool having the cross-shaped projections 24 at the necessary spacing to achieve the desired oxygen transmission rate. Due to the small size of each
25 perforation, liquid transmission across the film can be substantially avoided.

The perforated films produced in accordance with the present invention can be further distinguished from the
30 prior art perforated films by virtue of the surface properties of the film. Prior art perforated films usually have a hydrophilic surface as a result of the procedures used to form the films, even if the film prior to perforation was hydrophobic in nature. In contrast, the
35 perforating technique of the present invention does not modify the surface properties of the film. As a consequence, a film having a hydrophobic surface can be

- 26 -

obtained. Such a film is particularly useful in applications where the film is required to provide a barrier to liquid transmission, whilst allowing gas transmission to occur.

5

The structures of the present invention may also be utilised to form indentations in a film. Indentations may be formed in a film for a variety of purposes. Indentations may be desired to modify the texture or roughness of a film to make the film suitable for certain applications. Alternatively, a structure having a linear arrangement of projections could be used to create indentations in a film in a line, to thereby create a line of weakness in the film.

15

Biaxially oriented films are difficult to tear in a desired direction. Sometimes a line of perforations is formed in polymeric packaging films to assist in opening the packaging film, however such perforated lines cannot be used when packaging products such as food products that cannot come into contact with the outside atmosphere. By providing a line or linear arrangement of indentations in one surface of a polymeric film, it becomes possible to create a controlled-tearing film. This may be applied to laminated films optionally including a metal foil layer. The polymeric film side of the laminate may be provided with indentations that do not extend into the metallic film layer of the laminate.

30

The assembly illustrated in Figure 21 includes an additional station suitable for conducting the method of a particularly preferred embodiment of the invention. This embodiment of the invention involves

35

(a) providing a web of thermoplastic polymeric film such as polyethylene film, which is unwound at a film unwinding station 13;

- 27 -

(b) forming perforations in the film at a film treatment station 15 which includes roller 16 and a backing roller 19;

5

(c) heating the film to a temperature greater than or equal to its softening point and at least partially re-sealing the perforations to at least reduce the size thereof in a re-sealing station 20.

10

This film may also be printed in a printing station 18 which may be positioned before or after the penetrating and re-sealing stations. Finally, the film may be rewound or alternatively the film may proceed to further processing to construct an appropriate end product.

15

The re-sealing station includes a pair of heated nip rollers. The film is heated by and pressed between the nip rollers to thereby at least partially re-seal the perforations.

20

The re-sealing operation is illustrated schematically with reference to Figures 22 and 23. Figure 22 illustrates an elongate perforation 21 that is formed in a sheet of the polymeric film 14. The perforation illustrated in Figure 22 is a rough approximation of the type of perforation that may be obtained when the projection that formed the indentation illustrated in Figure 19 is pressed to break through the polymeric film. A slight fringe-effect is obtained from the edges of plastic surrounding the elongate perforation.

25

30

When the polymeric film bearing these perforations is passed through the heated nip rollers 20, the perforations are at least partially re-sealed to at least reduce the size thereof. As illustrated in Figure 23, the

35

- 28 -

two resultant perforations formed following the re-sealing step 22 are approximately 1/5 of the size of the original perforation 21.

5 For the avoidance of any doubt, it is to be understood that the perforations can be of any regular or irregular shape. In the case of irregular-shaped perforations, such as that illustrated with reference to numeral 21 in Figure 22, it is to be understood that the
10 cross-sectional area of this perforation will correspond to a circular perforation represented by the broken line 23. Any references to the size of a perforation in terms of a diameter is to be taken to require that the subject perforation has an area that corresponds to a circular
15 perforation of an equivalent area with the subject diameter.

 Many modifications may be made to the preferred embodiments described above without departing from the
20 spirit and scope of the invention.

- 29 -

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for treating a film, comprising:
- 5
- providing a web of polymeric film having a front face and a reverse face,
 - providing a structure including a substrate and an array of upstanding projections, each projection including multiple contact points,
 - 10 and
 - pressing the projection-bearing surface of the structure into one face of the polymeric film a sufficient distance to fix the film against the contact points to cause deformation or
 - 15 rupture of the film.
2. A method for treating a film according to claim 1, wherein the pressing step involves pressing the
- 20 structure into the polymeric film a sufficient distance to rupture the film to form perforations in the film to thereby change the gas permeability of the film.
3. A method for treating a film according to claim
- 25 2, wherein at least 80% of the perforations formed in the film have an effective aperture of less than or equal to 25 μ m as measured using the MOCON oxygen transmission tester calibrated against a film of the defined size.
- 30 4. A method for treating a film according to claim 3, wherein at least 80% of the perforations formed in the film have an effective aperture of less than or equal to 10 μ m.
- 35 5. A method for treating a film according to claim 1, wherein the pressing step involves pressing the structure into the polymeric film a sufficient distance to

- 30 -

create indentations in the film in a line, to thereby form a line of weakness in the film that enables the film to be torn along the line joining the indentations.

- 5 6. A method for treating a film according to any one of claims 1 to 5, wherein the film is pressed between the structure and a backing form that pushes the film against the structure.
- 10 7. A method for treating a film according to claim 6, wherein the backing form has an outer surface that is of an appropriate stiffness to force the projections into or through the film surface.
- 15 8. A method for treating a film according to claim 7, wherein the outer surface of the backing form is between 40 and 100 as measured by the Shore hardness test.
- 20 9. A method for treating a film according to any one of claims 6 to 8, wherein the structure is mounted onto, or is in the form of, a roller or a platen, and the pressing step is conducted as a continuous process.
- 25 10. A method for treating a film according to claim 9, wherein structure is mounted onto or in the form of a roller and the pressing step involves passing the film between the roller form of the structure and a backing roller.
- 30 11. A method for treating a film according to claim 10, wherein the roller form of the structure and the backing roller are indexed relative to one another to reduce the spacing therebetween, or to increase the pressure of application of the film against the structure,
- 35 12. A method for treating a film according to any one

- 31 -

of claims 1 to 11, wherein the projections of the structure have an average height of between 5 μ m and 250 μ m.

13. A method for treating a film according to claim
5 12, wherein the projections of the structure have an average height of between 10 μ m and 200 μ m.

14. A method for treating a film according to claim
10 12, wherein the projections of the structure have an average height of between 10 μ m and 100 μ m.

15. A method for treating a film according to any one
of claims 1 to 14, wherein the average maximum width dimension of the projections is less than 1mm.

15 16. A method for treating a film according to claim 15, wherein the average maximum width dimension of the projections is less than 500 μ m.

20 17. A method for treating a film according to claim 15, wherein the average maximum width dimension of the projections is less than 250 μ m.

25 18. A method for treating a film according to claim 15, wherein the average maximum width dimension of the projections is less than 200 μ m.

30 19. A method for treating a film according to claim 15, wherein the average maximum width dimension of the projections is less than 150 μ m.

20. A method for treating a film according to claim 15, wherein the average maximum width dimension of the projections is less than 100 μ m.

35 21. A method for treating a film according to claim any one of claims 1 to 20, wherein the projections of the

- 32 -

structure include a rim or margin that is of a greater height than the central part of the projection inside the rim or margin.

5 22. A method for treating a film according to claim 21, wherein the structure has a jagged rim or margin defining the upper edge of the projection, and the pressing step is controlled so that the pressure applied across the film against the indenting or penetrating structure is
10 appropriate for forming perforations of a sufficiently small size for the film to be a controlled atmosphere film.

23. A method of treating a thermoplastic polymeric film which involves:

15 (a) providing a web of thermoplastic polymeric film;

(b) forming perforations in the film; and

20 (c) pressing the film to at least partially re-seal the perforations, or to modify the surface of the film.

25 24. A method of treating a thermoplastic polymeric film according to claim 23, wherein step (b) involves providing a structure that includes a substrate and an array of upstanding projections, each projection including multiple contact points, and pressing the structure against
30 the film a sufficient distance to cause deformation or rupture of the film.

25. A method of treating a thermoplastic polymeric film according to claim 23 or claim 24, wherein the film is
35 heated to a temperature greater than or equal to its softening point prior to or at the same time as the pressing step (c).

- 33 -

26. A method of treating a thermoplastic polymeric film according to claim 19, wherein the film is heated to a temperature greater than or equal to its softening point during pressing step (c).

27. A method of treating a thermoplastic polymeric film according to claim 26, wherein the film is passed between heated nip rollers.

10

28. A method of treating a thermoplastic polymeric film according to claim 25, wherein the film is heated to a temperature greater than or equal to its softening point by exposure to hot air, infrared radiation or conduction prior to step (c).

15

29. A method of treating a thermoplastic polymeric film according to any one of claims 23 to 28, wherein the treatment technique also includes a step in which the film is printed.

20

30. A film produced by a method comprising the steps of:

25

- providing a web of polymeric film having a front face and a reverse face,
- providing a structure including a substrate and an array of upstanding projections, each projection including multiple contact points, and
- pressing the projection-bearing surface of the structure into one face of the polymeric film a sufficient distance to fix the film against the contact points to cause deformation or rupture of the film.

30

35

31. A film according to claim 30, wherein the polymeric film has a thickness of between 120 μm and 8 μm .

- 34 -

32. A film according to claim 30 or claim 31, wherein the film is a perforated film in which at least 80% of the perforations in the film have an effective aperture of less than or equal to 25µm as measured using the MOCON oxygen transmission tester calibrated against a film of the defined size.

33. A film according to claim 32, wherein at least 80% of the perforations in the film have an effective aperture of less than or equal to 10µm.

34. A film according to claim 28, wherein the polymeric film is a polyolefin film.

15

35. An assembly for forming indentations or perforations in a web of polymeric film, comprising:

- a film unwinding station;
- 20 - a film treatment station in which the film can be pressed against a structure, said structure including a substrate and an array of upstanding projections, each projection including multiple contact points against which the film can be fixed so as to cause deformation or rupture of the film; and
- 25 - a film rewind station located downstream of the treatment station.

36. The assembly according to claim 35, wherein the assembly also includes at least one printing station.

30

37. A structure for pressing into a polymeric film, the structure including a substrate and an array of upstanding projections, each projection including multiple contact points such that when the structure is pressed into a polymeric film, the film is fixed at the contact points to cause deformation or rupture of the film between the

35

- 35 -

contact points.

38. A structure according to claim 37, wherein the
projections of the structure have an average height of
5 between 5 μ m and 250 μ m.

39. A structure according to claim 37, wherein the
projections of the structure have an average height of
between 10 μ m and 200 μ m.

10

40. A structure according to any one of claims 37 to
39, wherein the average maximum width dimension of the
projections is less than 1mm.

15 41. A structure according to any one of claims 37 to
39, wherein the average maximum width dimension of the
projections is less than 500 μ m.

20 42. A structure according to any one of claims 37 to
39, wherein the average maximum width dimension of the
projections is less than 250 μ m.

43. A structure according to any one of claims 37 to
39, wherein the average maximum width dimension of the
projections is less than 200 μ m.

25

44. A structure according to any one of claims 37 to
39, wherein the average maximum width dimension of the
projections is less than 100 μ m.

30 45. A structure according to any one of claims 37 to
44, wherein the projections include a rim or margin that is
of a greater height than the central part of the projection
inside the rim or margin.

35 46. A structure according to claim 45, wherein the
rim or margin of the projection is between 5 and 25%
greater in height than the central region of the

- 36 -

projection.

47. A structure according to any one of claims 37 to 46, wherein the projections have a cross-section that is
5 circular, oval, cross-shaped, triangular, trapezoid, wedge-shaped, chevron-shaped, crescent-shaped, polygonal, diamond-shaped, serrated, zigzagging, prismatic and/or serrated, or an approximation of one or a combination of these shapes.

10

48. A structure according to any one of claims 37 to 47, wherein each projection has a jagged margin.

49. A structure according to claim 45, wherein the
15 rim or margin of the projection provides a sharp defined edge of the projection that assists in forming an indent or perforation in the film.

50. A structure according to claim 45, wherein the
20 structure is made by laser micromachining of a blank to create a mould having an array of cavities which are deeper in the edge or margin regions, and electroplating the mould to form the structure.

25 51. A structure according to claim 45, wherein the rim or margin defining the upper edge of the projection is jagged.

52. A method of producing structure having an array
30 of projections suitable for pressing against a film to deform or perforate in the film, the method comprising:

- producing a mould including an array of elements of dimensions corresponding to the
35 projections of the desired structure; and
- electroplating the mould with electroplating material to produce the structure.

- 37 -

53. The method according to claim 52, wherein the projections are between 5µm and 1mm in height.

5 54. The method according to claim 52, wherein the mould is formed by providing a blank and cutting or otherwise generating cavities in the blank by laser ablation, chemical etching, plasma etching, X-ray radiation or electrodischarge machining.

10

55. The method according to claim 52, wherein the mould is formed by providing a blank and cutting cavities in the blank by laser ablation.

15 56. The method according to claim 55, wherein the laser ablation is used to generate cavities in the blank which are deeper in the edge or margin regions as compared with the central regions of the cavities.

20 57. The method according to claim 52, wherein the elements are a series of protrusions and the protrusions are coated with the electroplating material on their surface to form a thin sheet of electroplating material on the mould.

25

58. The method according to claim 52, wherein the elements are a series of cavities of size corresponding at least substantially to the dimensions of the projections of the desired resultant structure, and the electroplating material is plated onto the surface of the mould and into the cavities.

30

59. The method according to claim 58, wherein insufficient material is electroplated onto the mould to fill the mould cavities thereby resulting in the formation of an penetrating structure including a substrate and an array of upstanding projections having jagged rims defining

35

- 38 -

upper edges of the projections.

60. A method according to claim 59, wherein the cavities of the mould are of a size and have a ratio of depth to width such that electroplating of the mould with metal does not result in complete filling of the mould cavities with metal.

61. A method according to claim 58, wherein the side walls of the cavities of the mould are corrugated so as to receive and support the deposition of electroplated metal.


62. A method according to claim 61, wherein the corrugations extend along the depth of the cavities.




63. A method for treating a film substantially as herein described with reference to the accompanying drawings.

64. A film produced by a method substantially as herein described with reference to the accompanying drawings.

65. A structure for forming indentations or perforations in a film substantially as herein described with reference to the accompanying drawings.

66. An assembly for forming indentations or perforations in a film substantially as herein described with reference to the accompanying drawings.

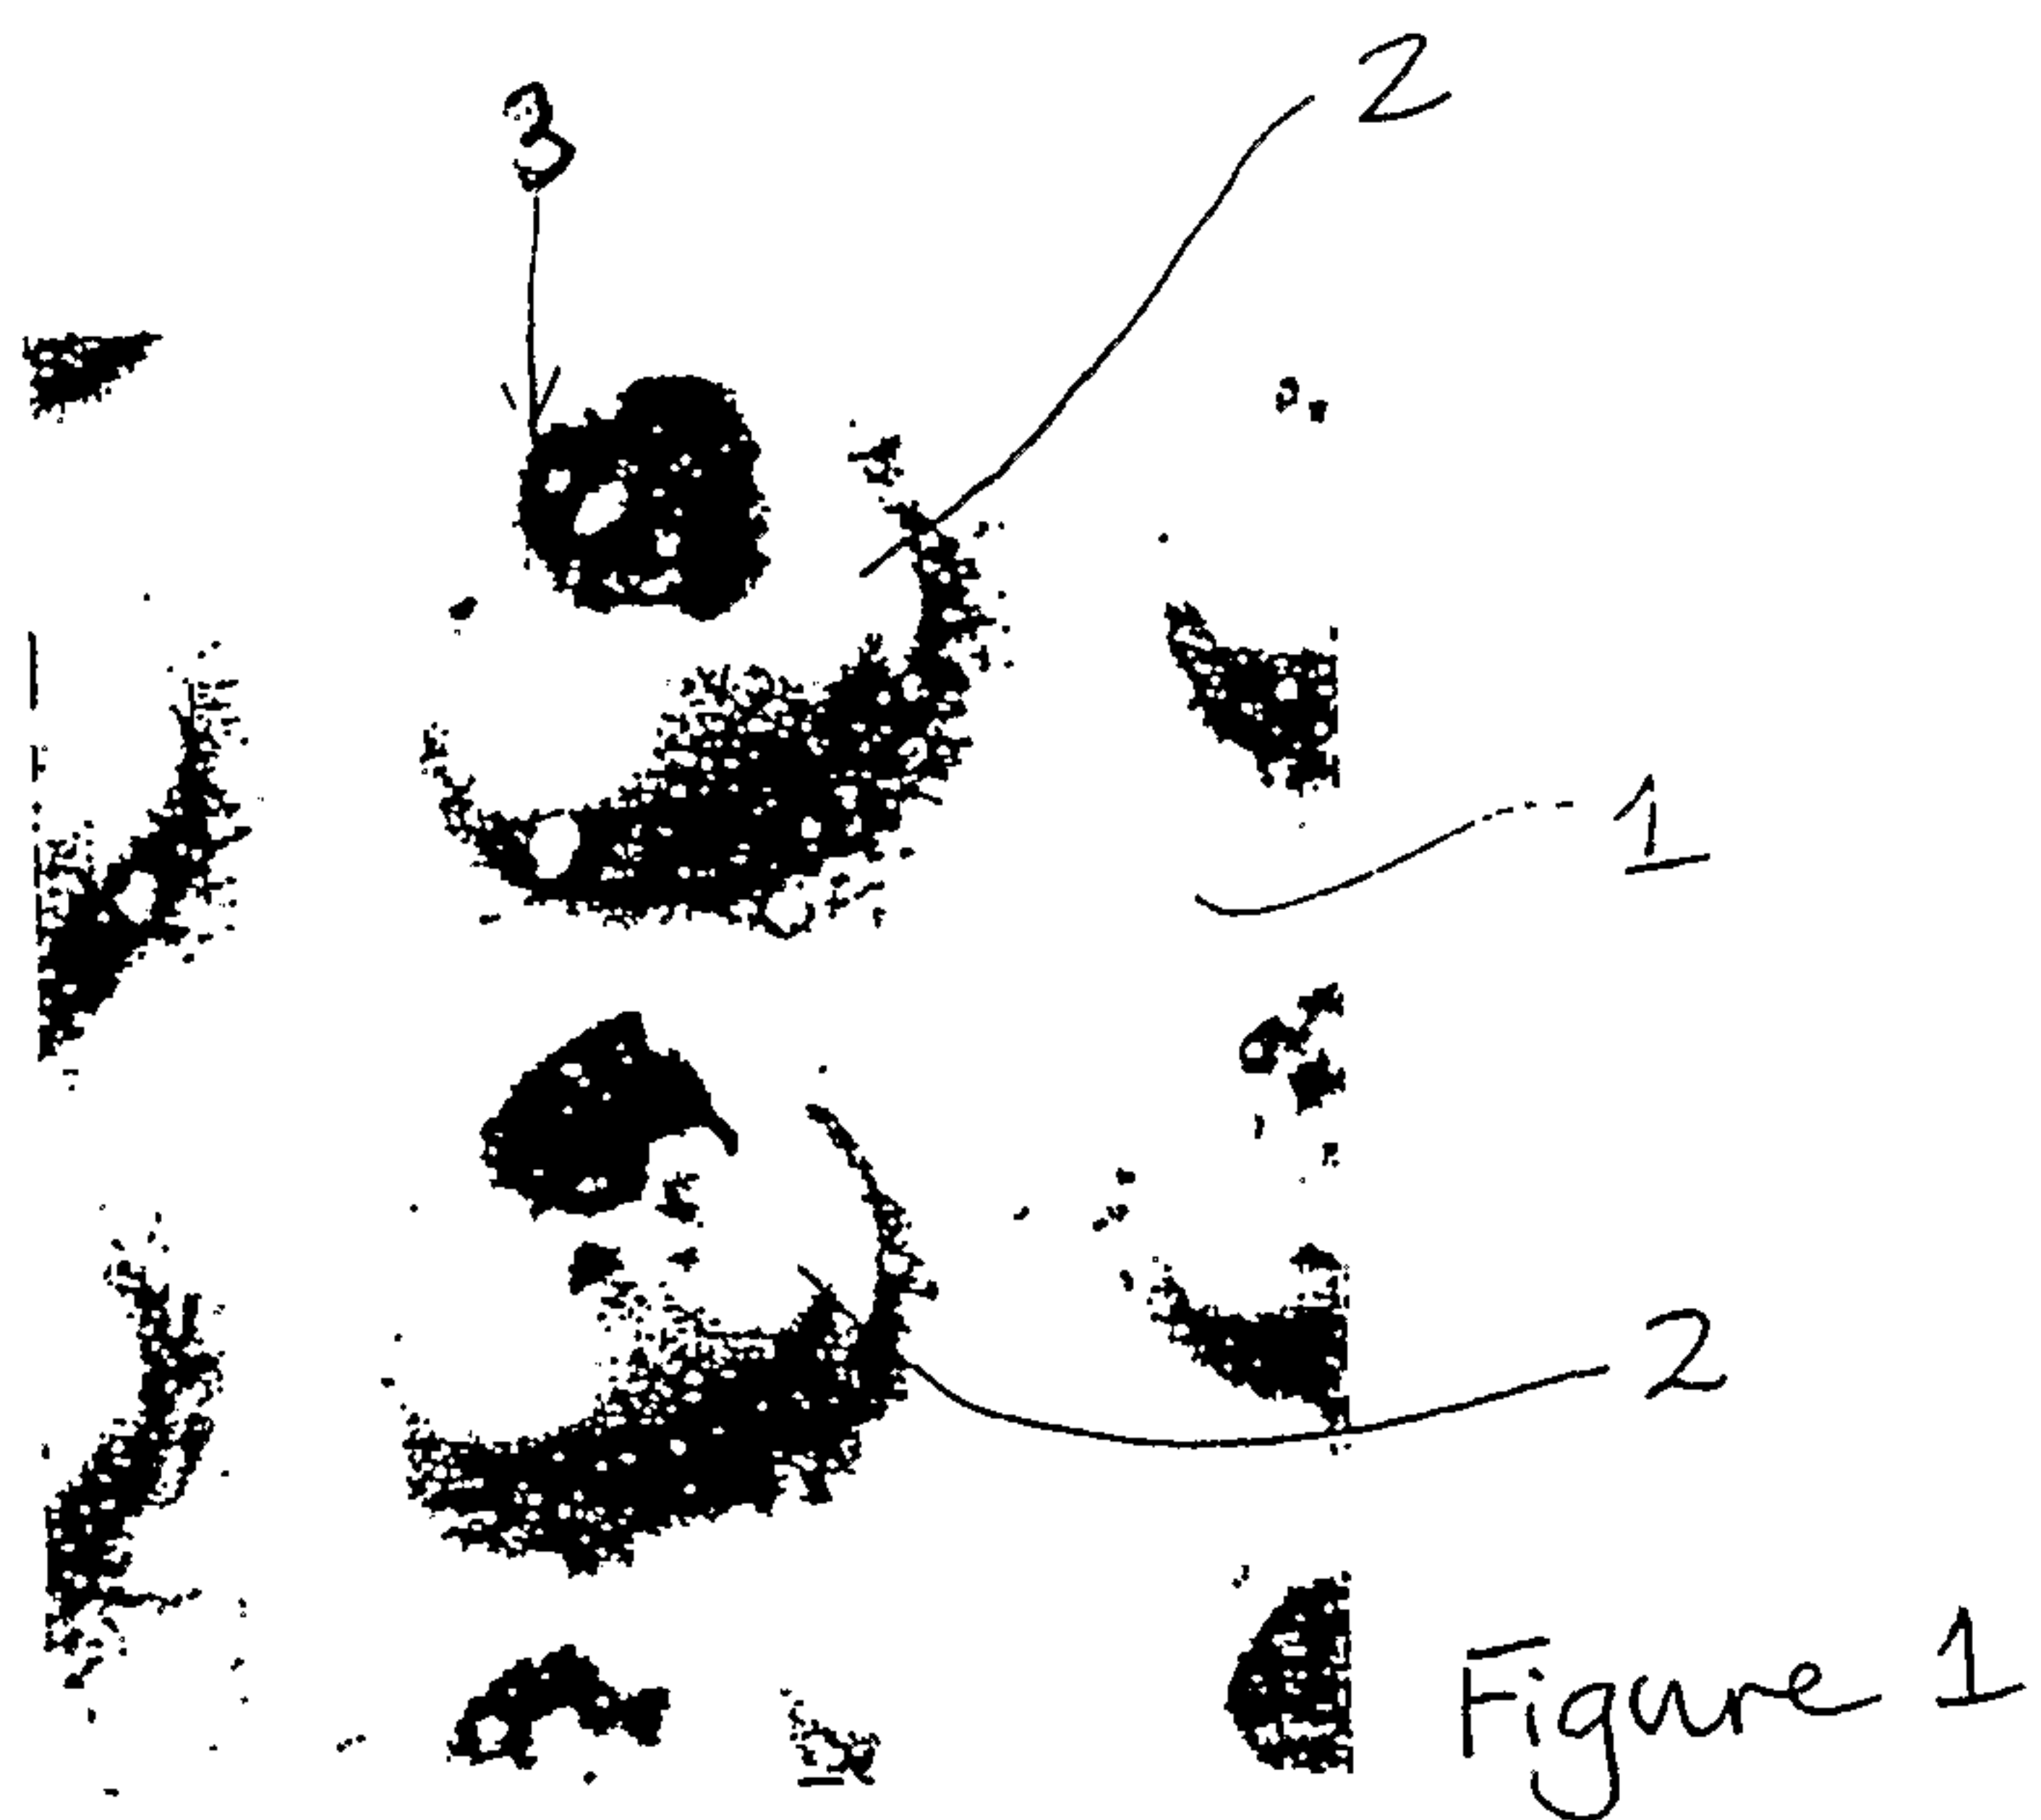

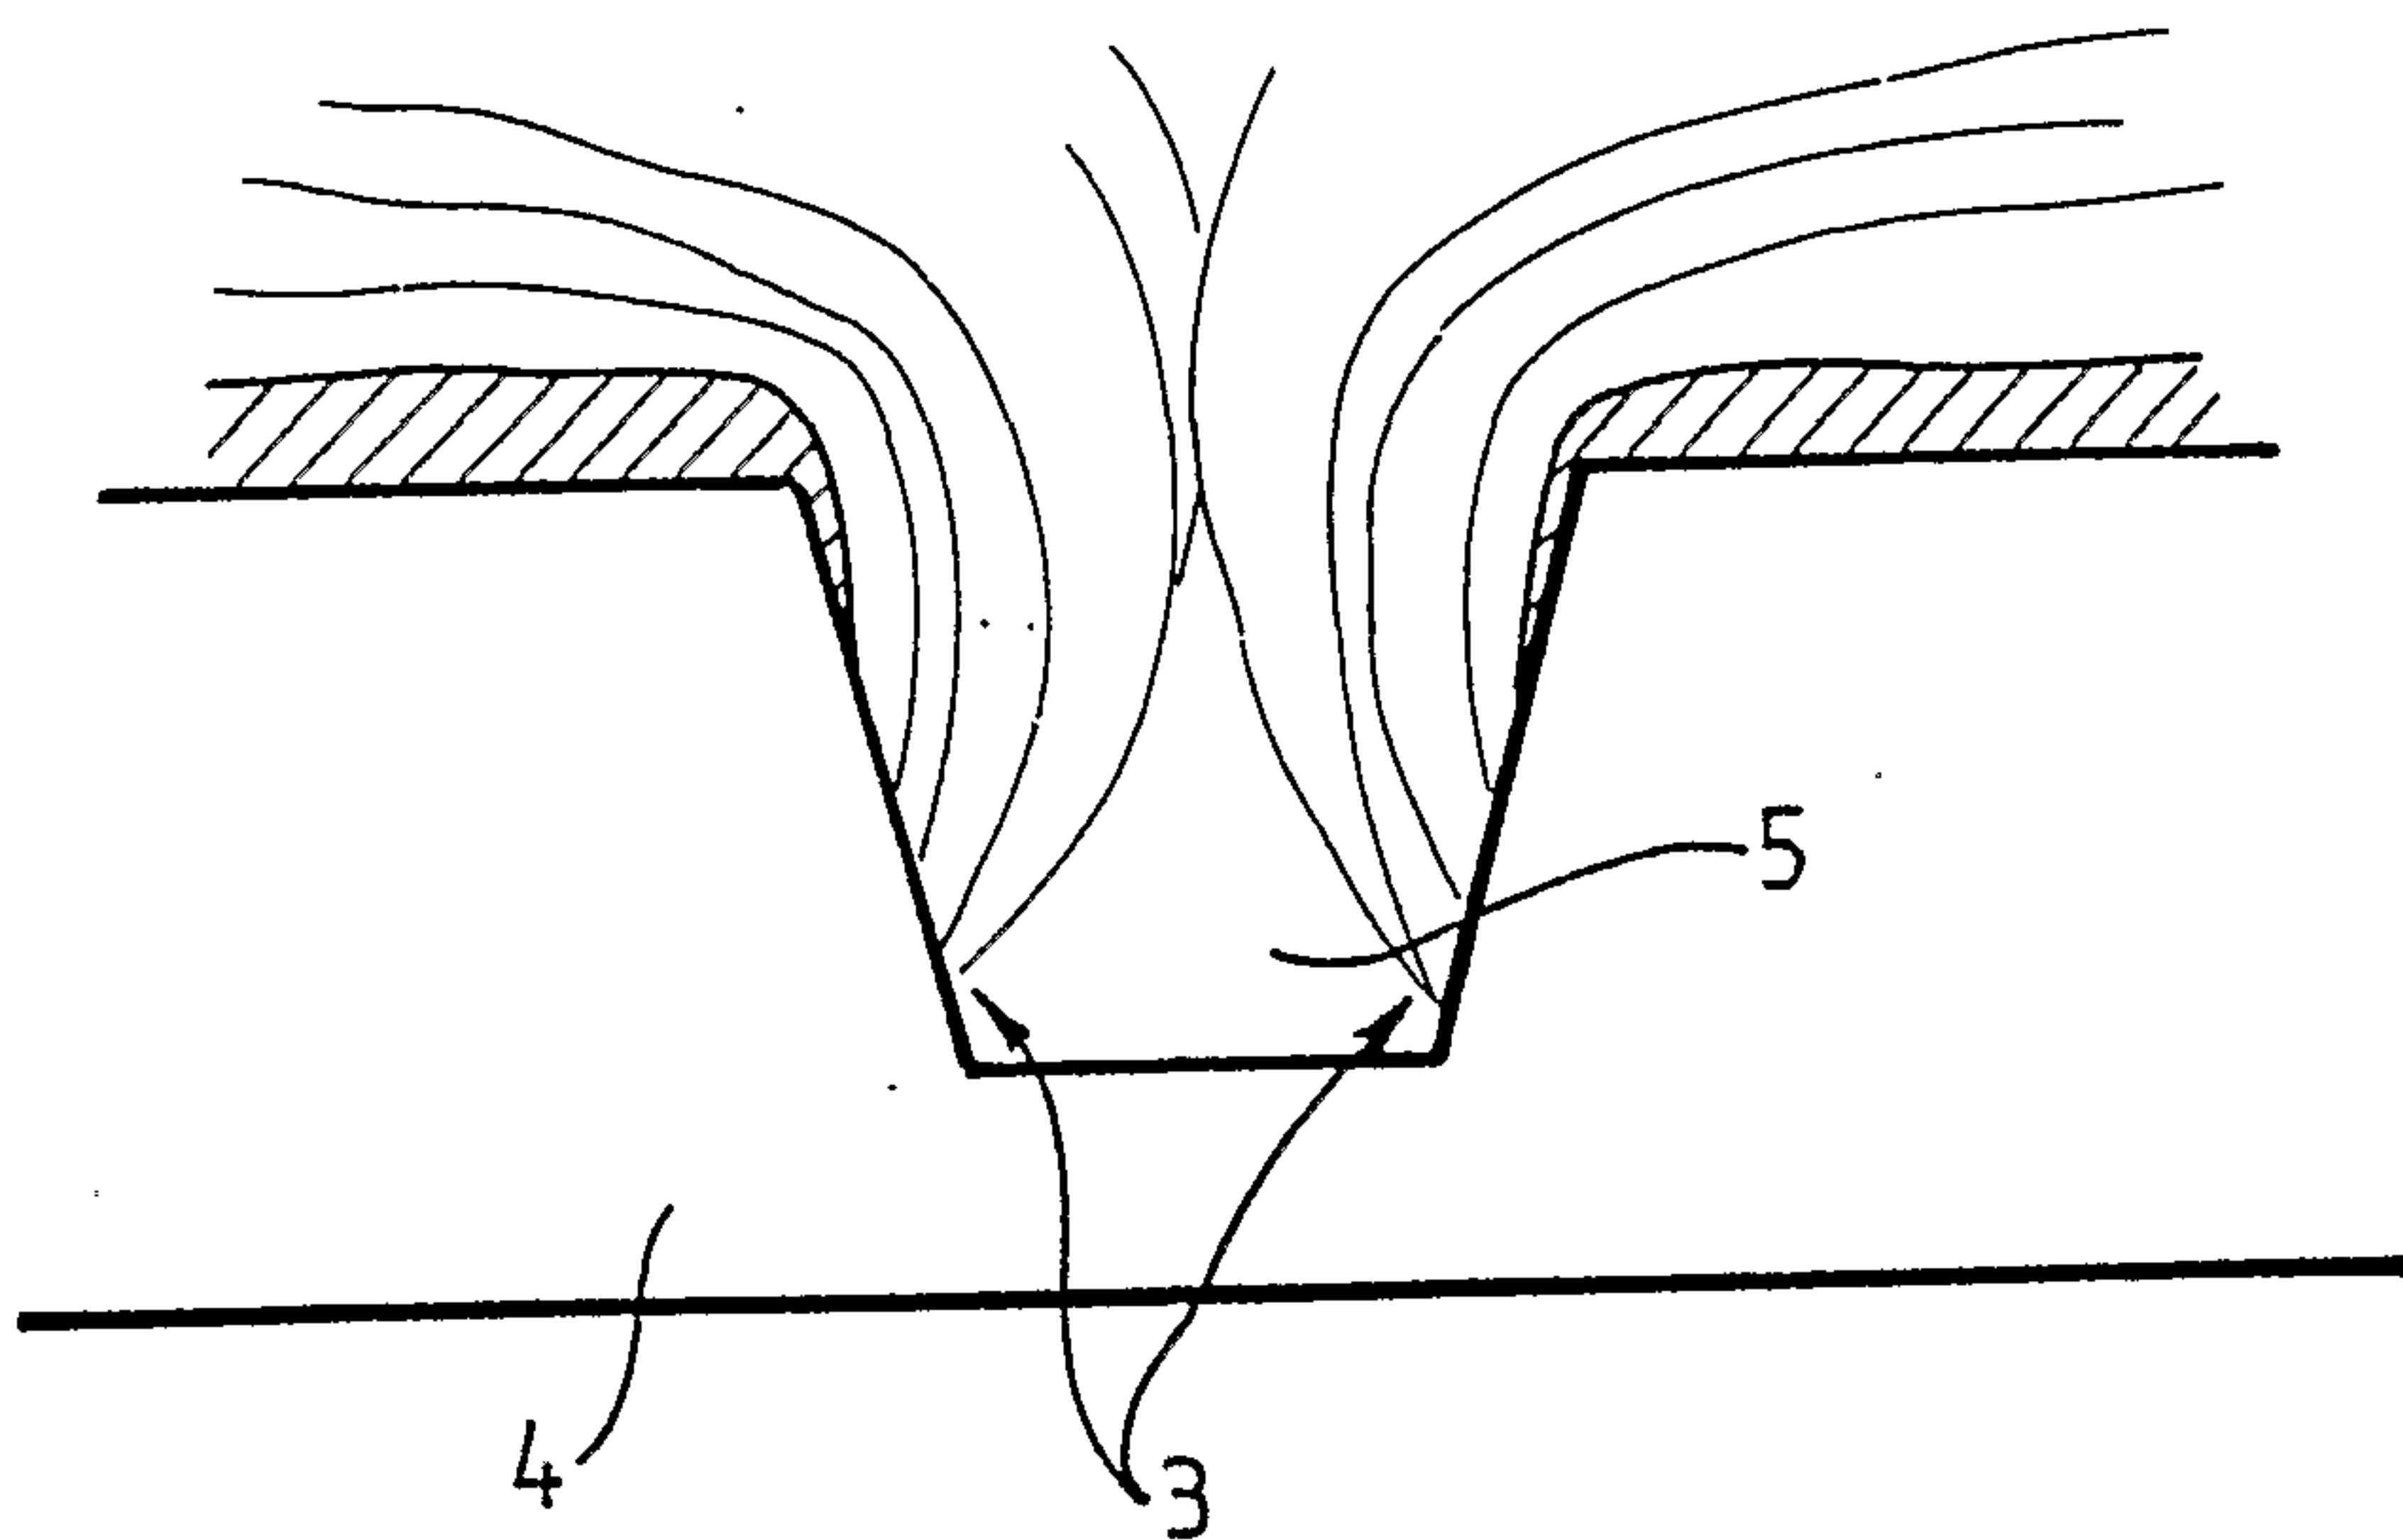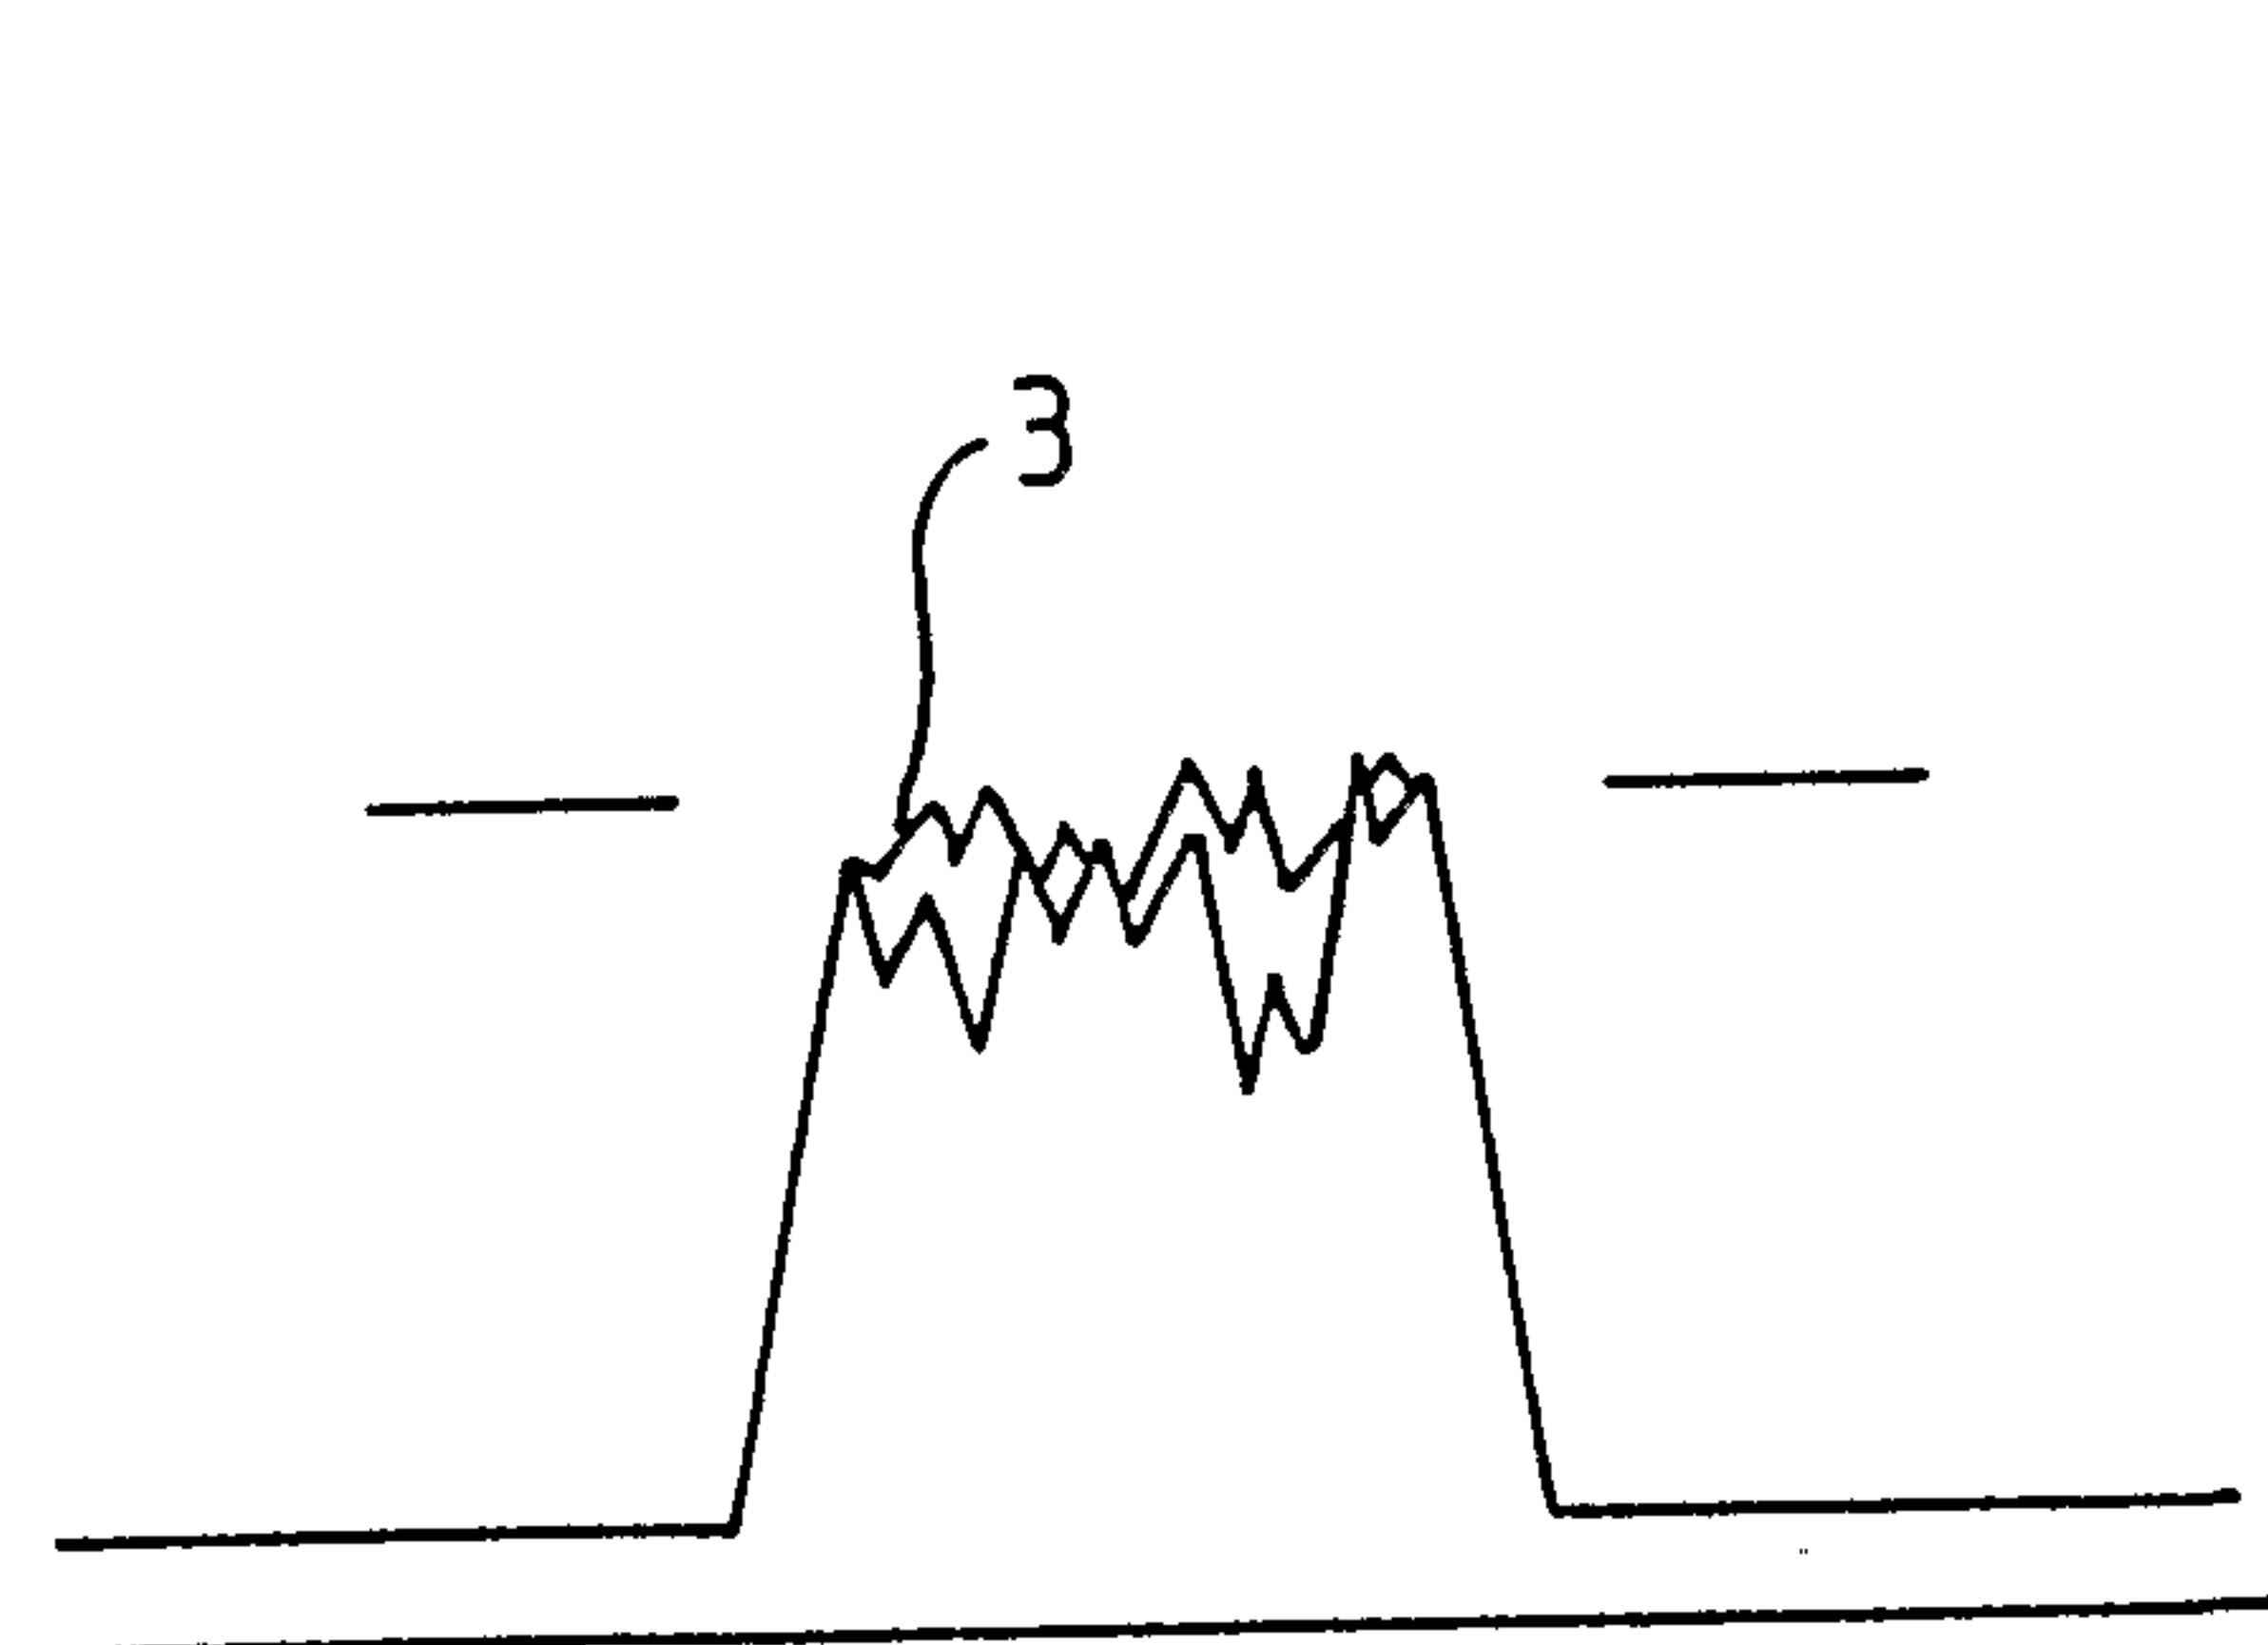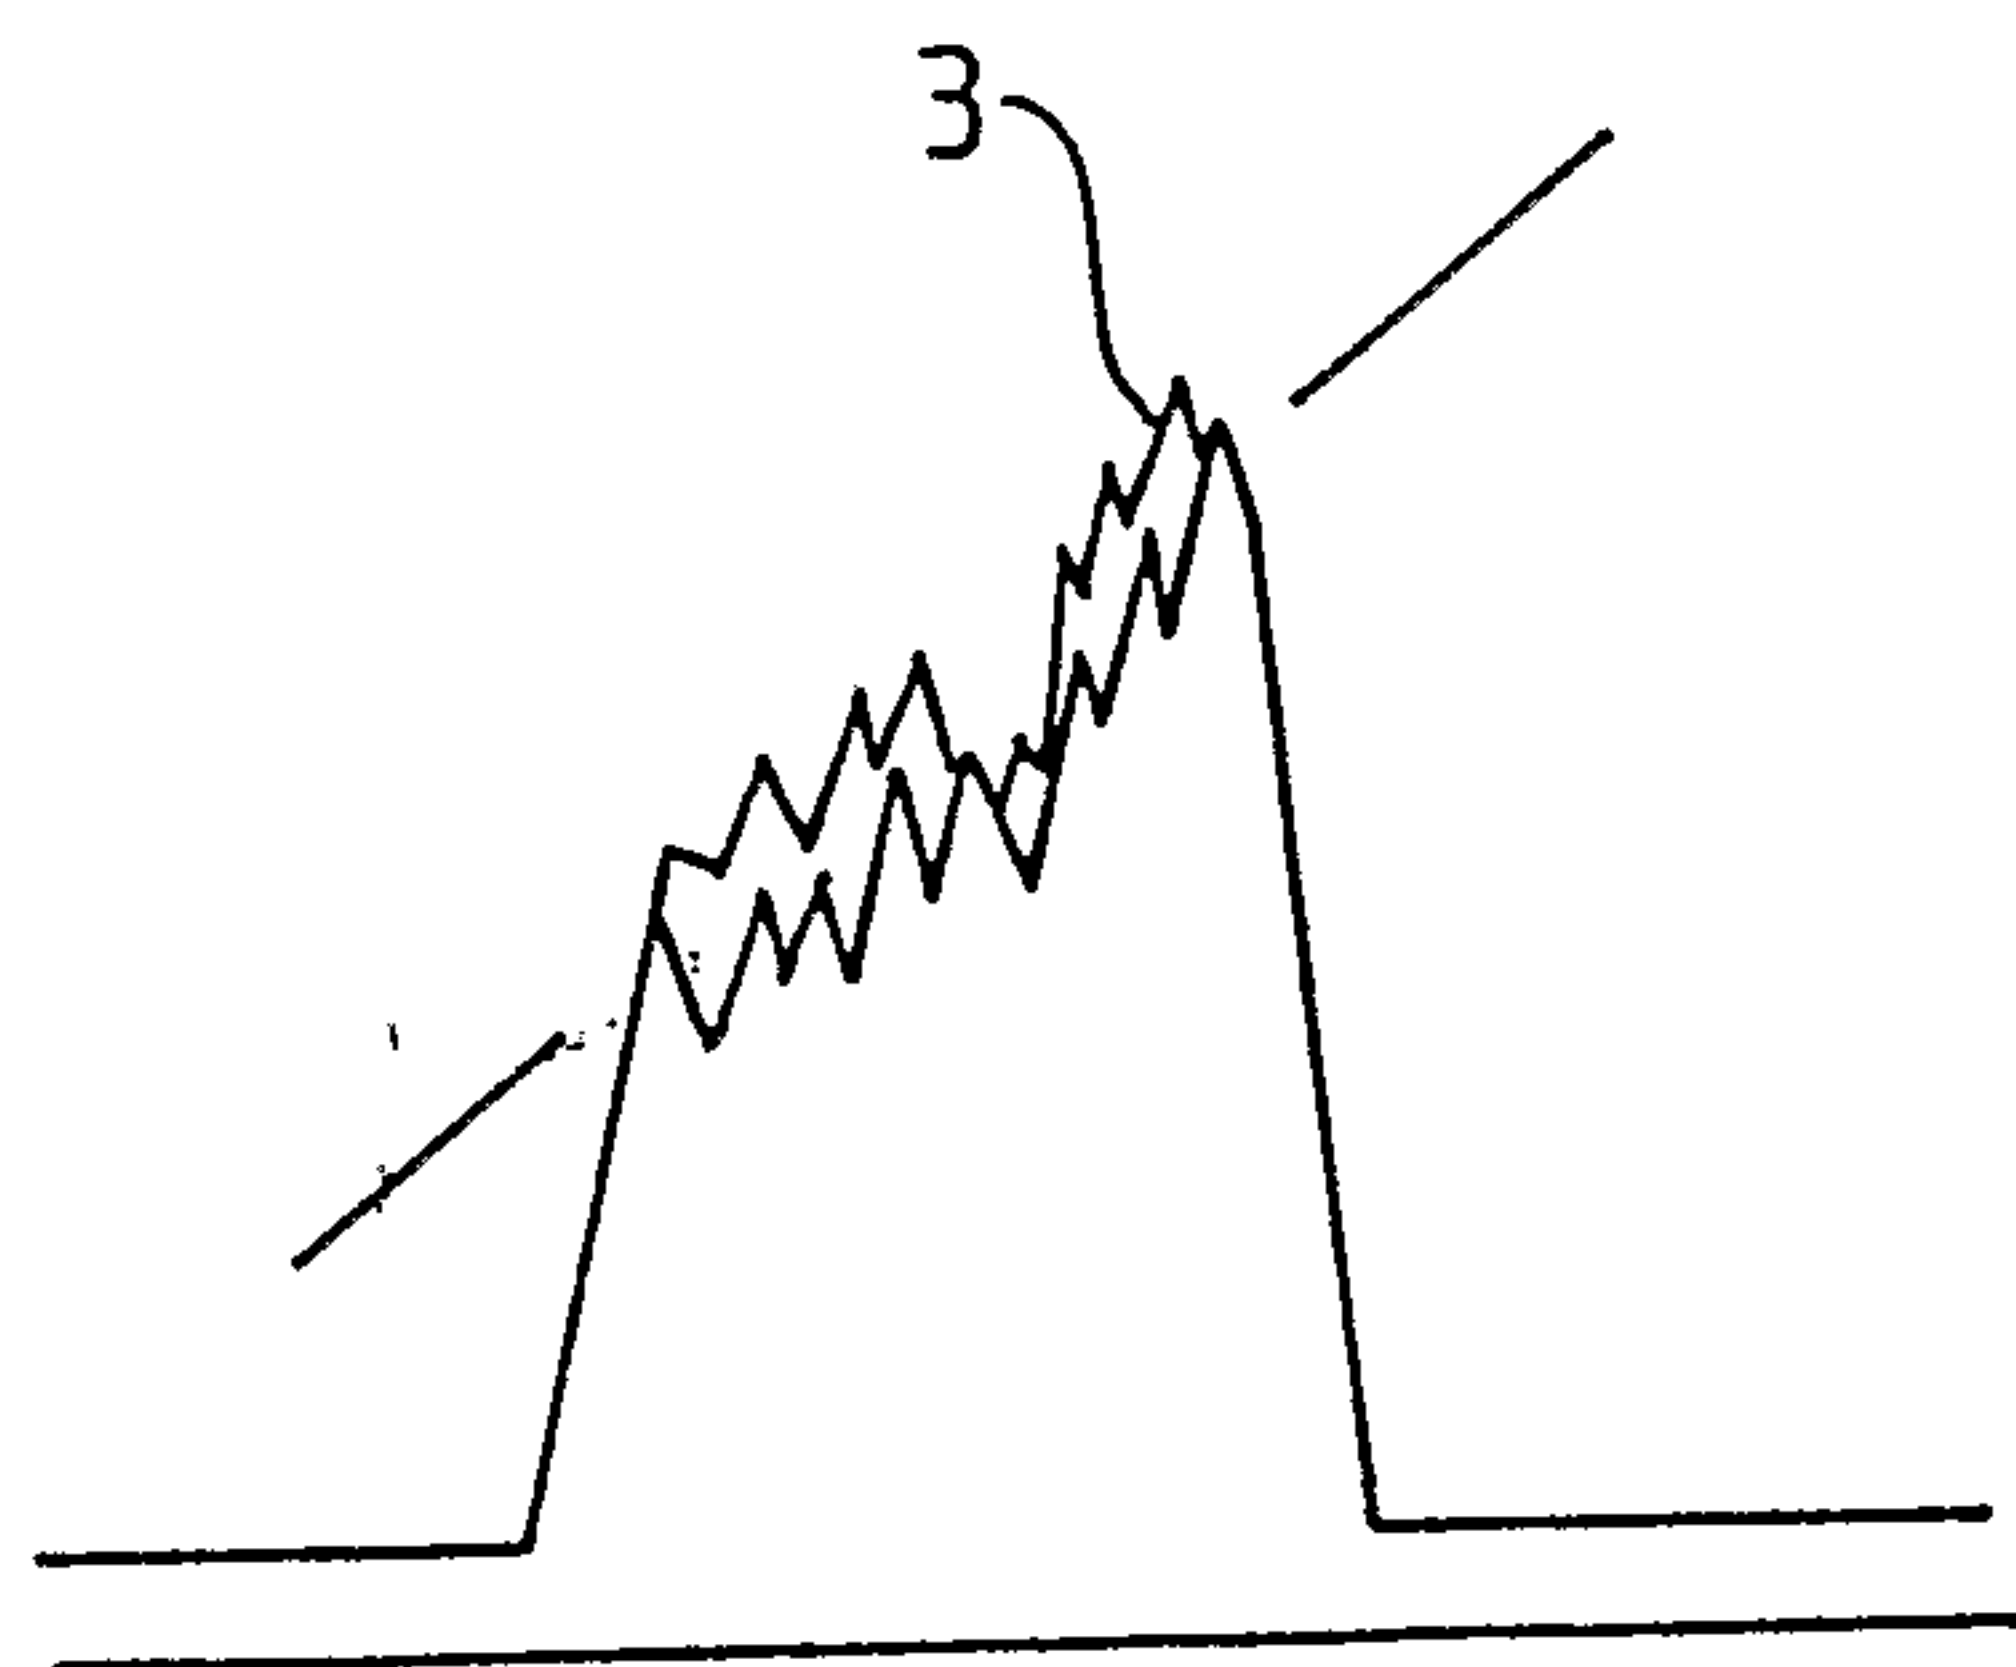FIG. 2.FIG. 3.FIG. 4.

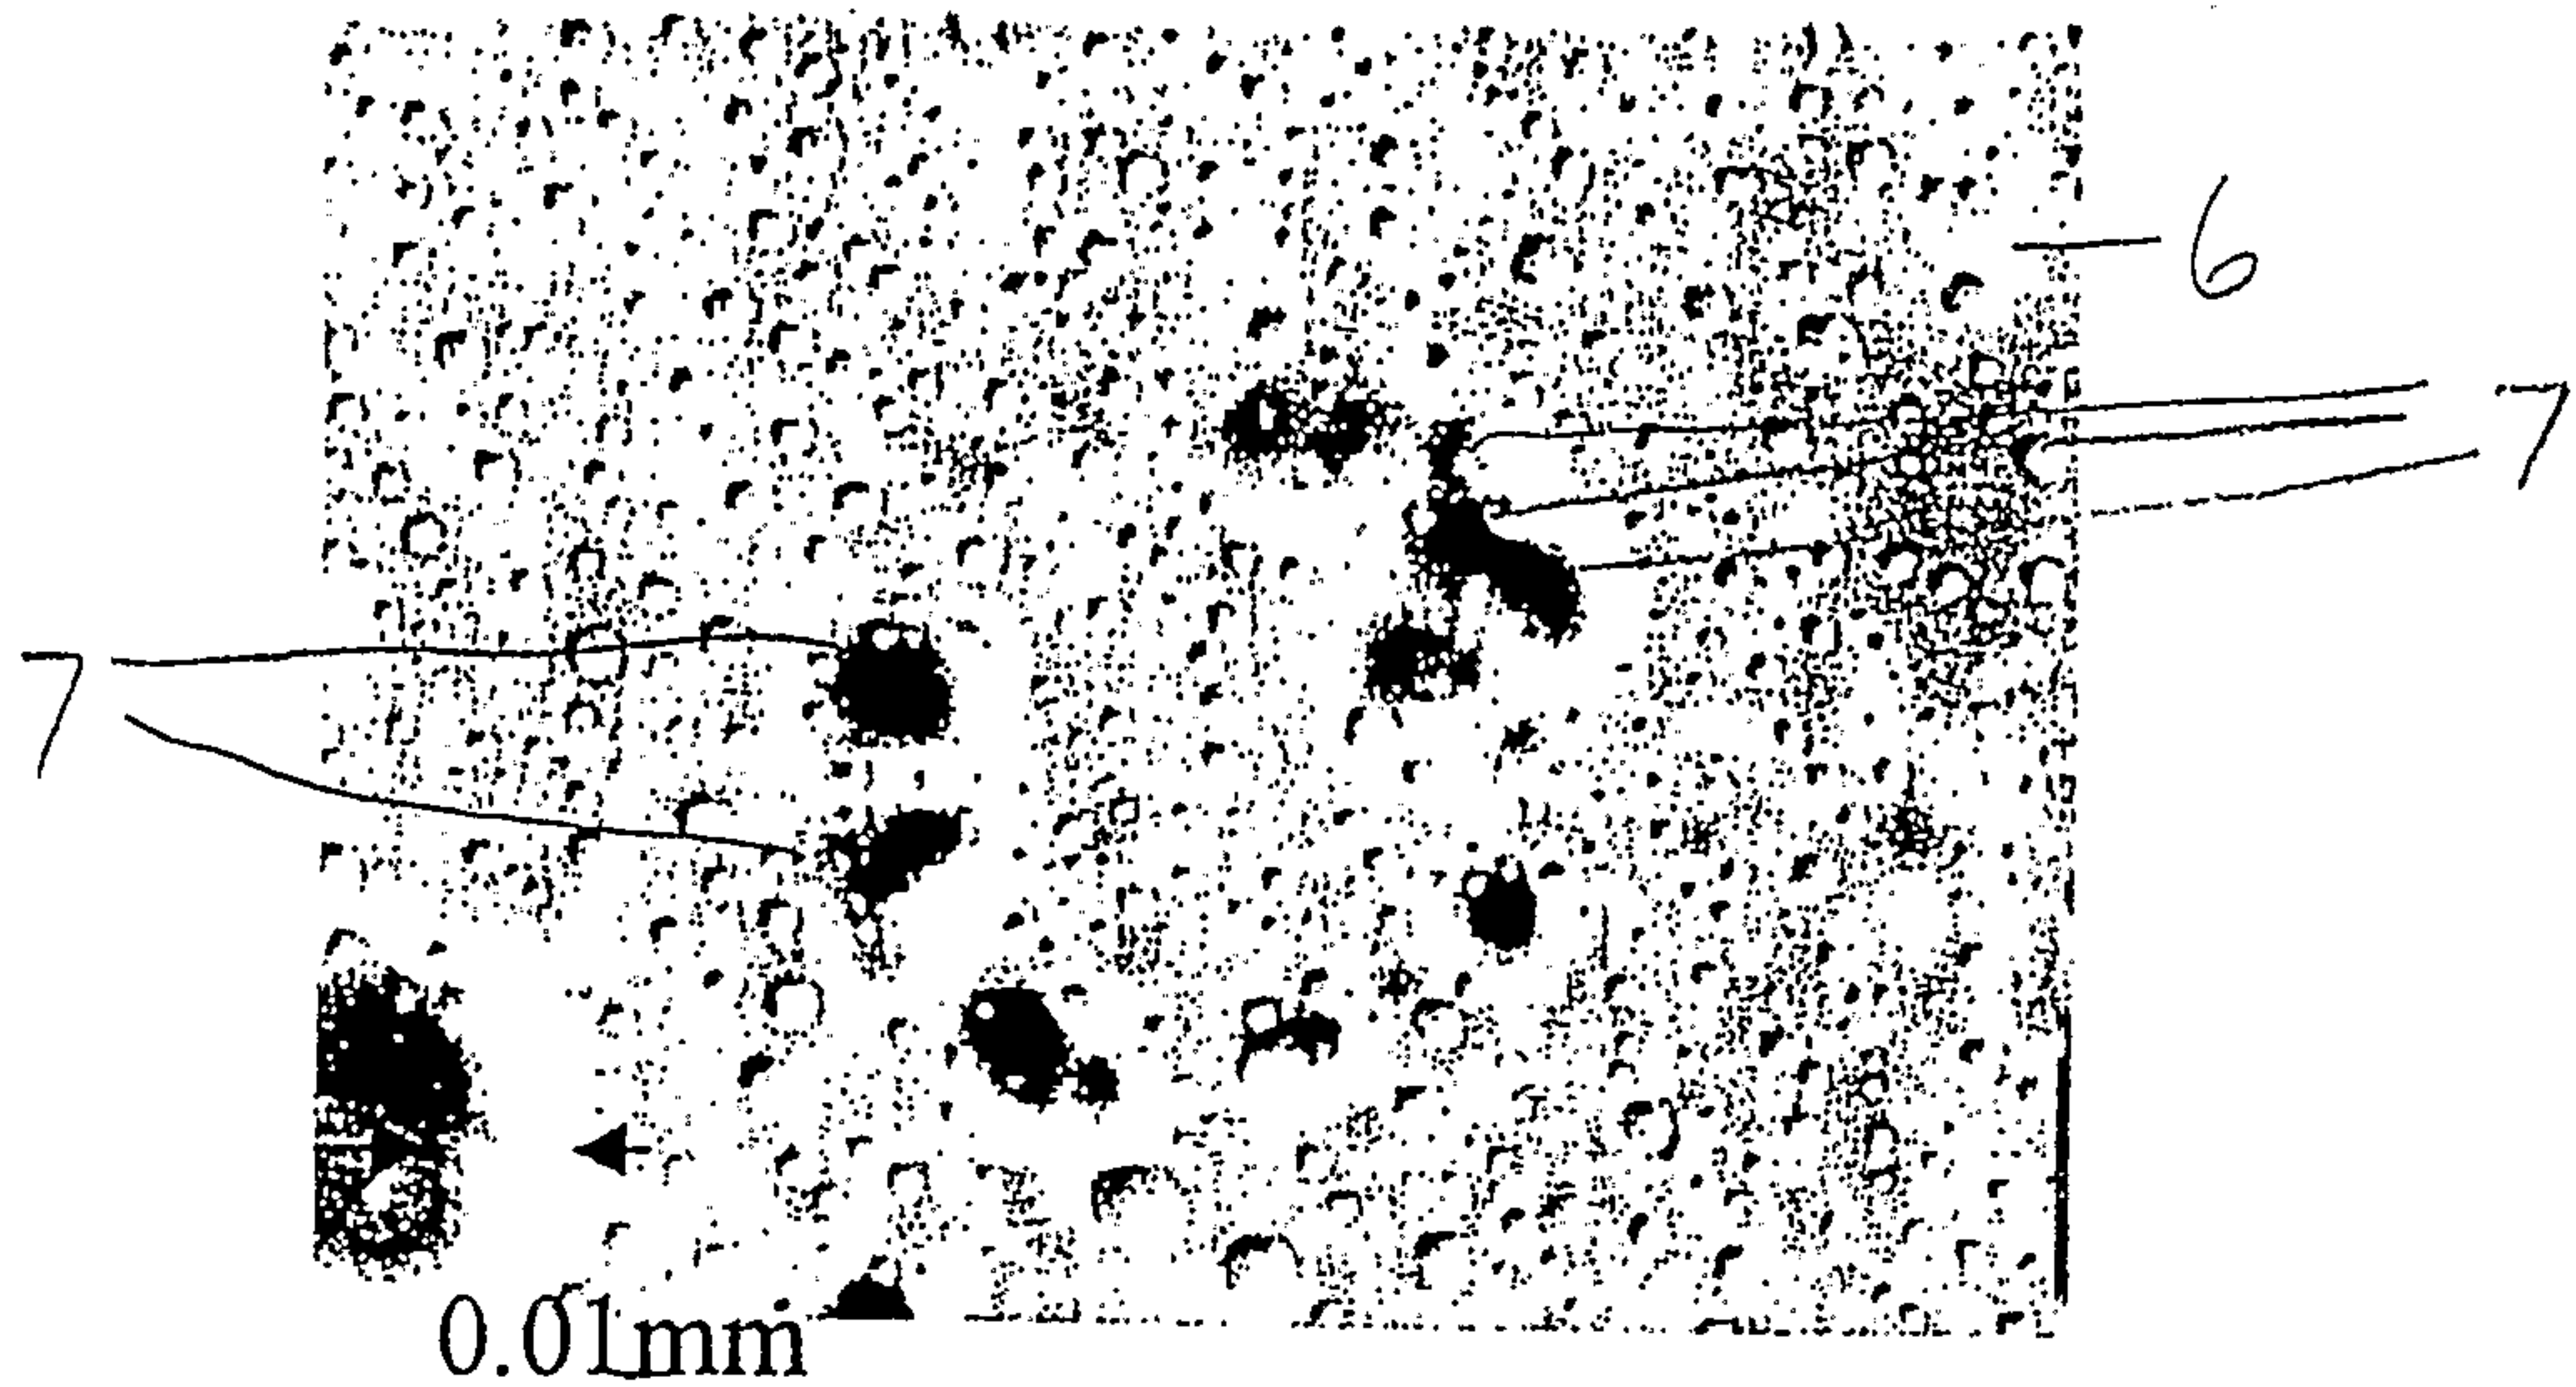


Figure 5(a)



Figure 5(b)

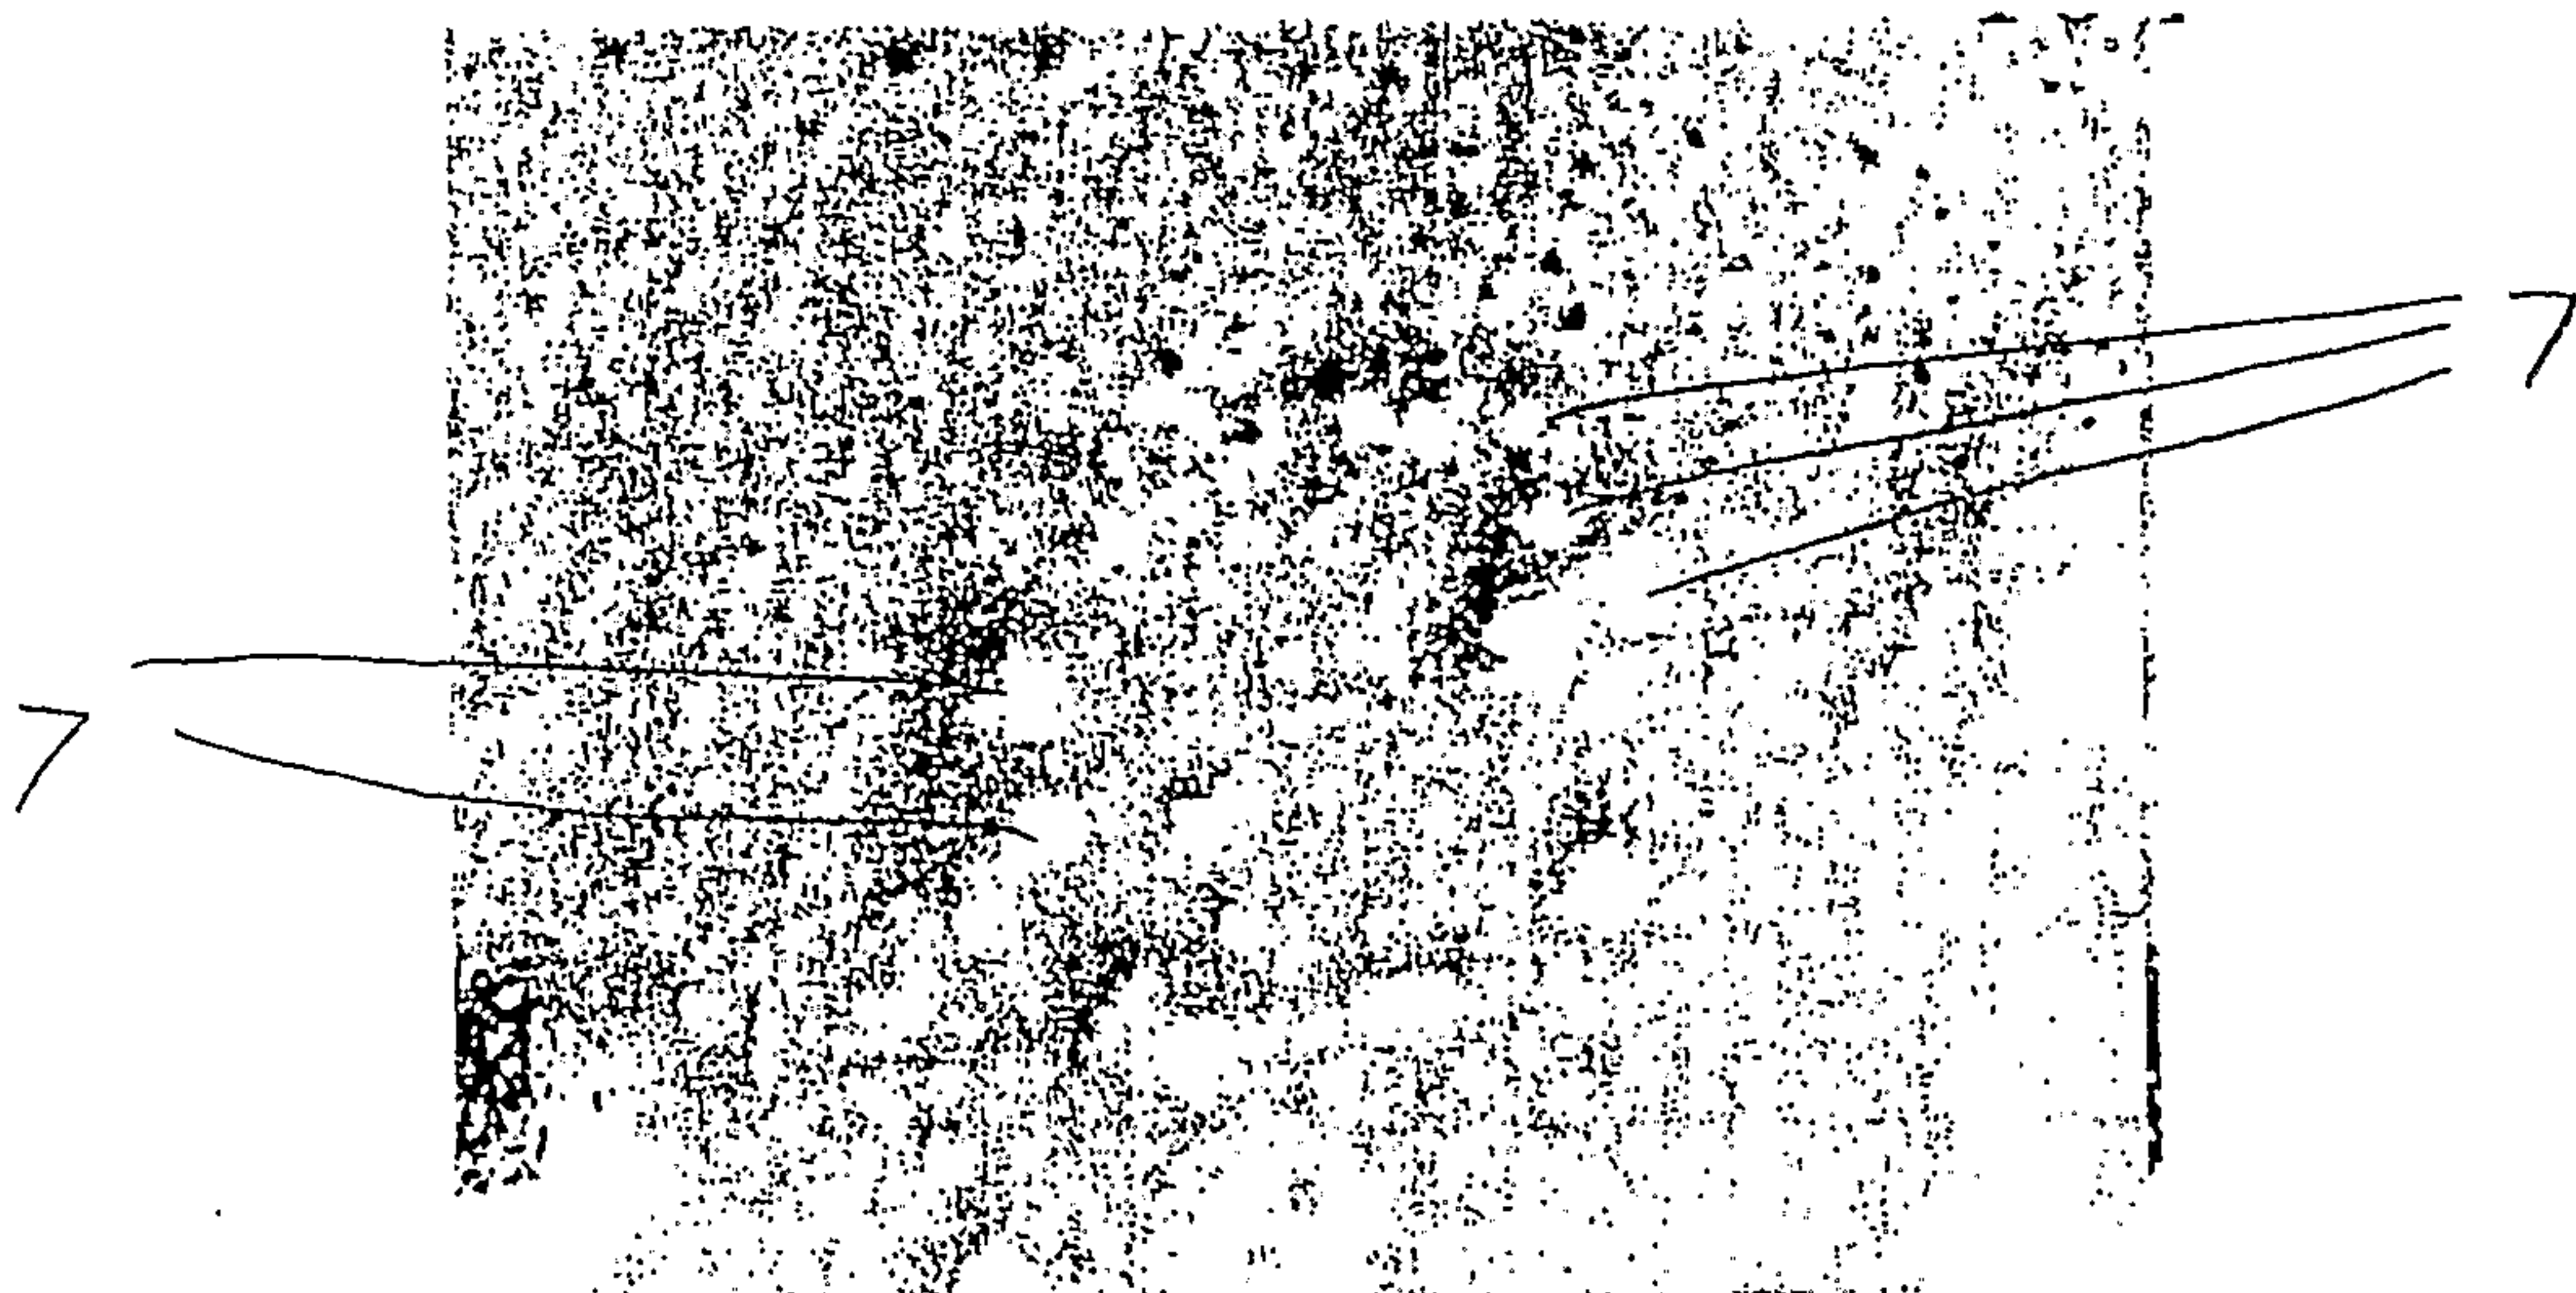


Figure 5(c)

4/17

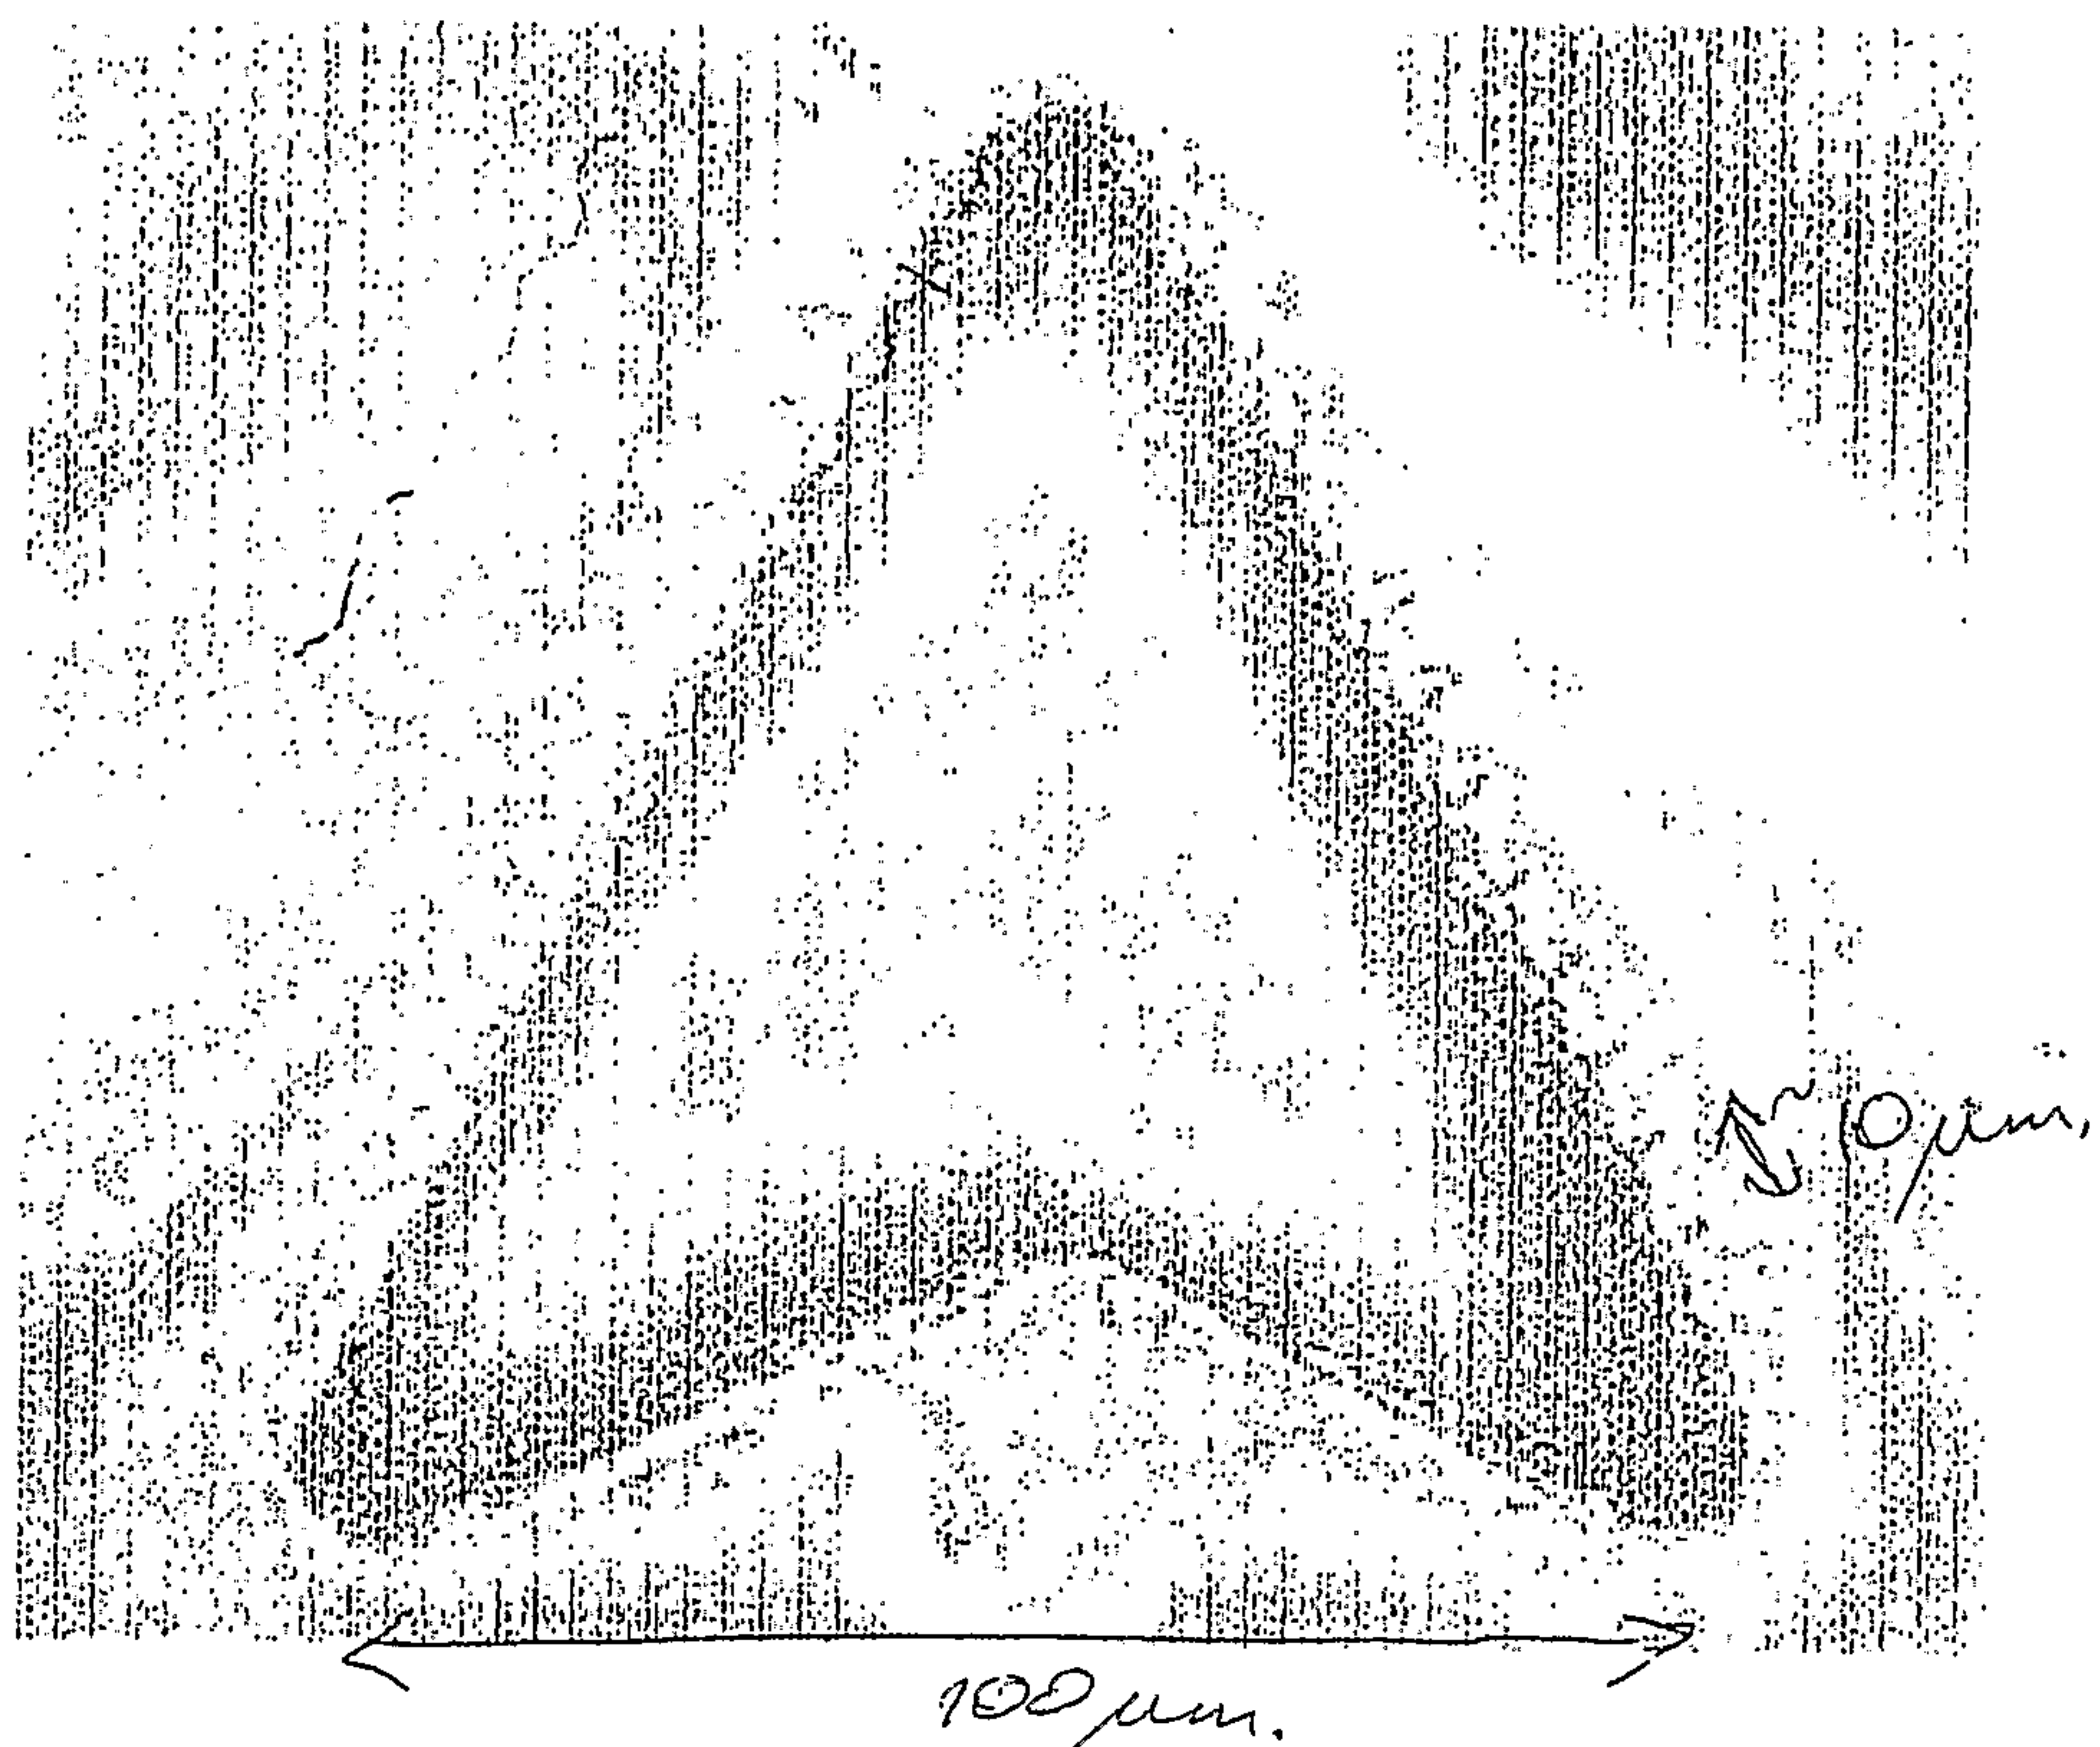


Figure 6

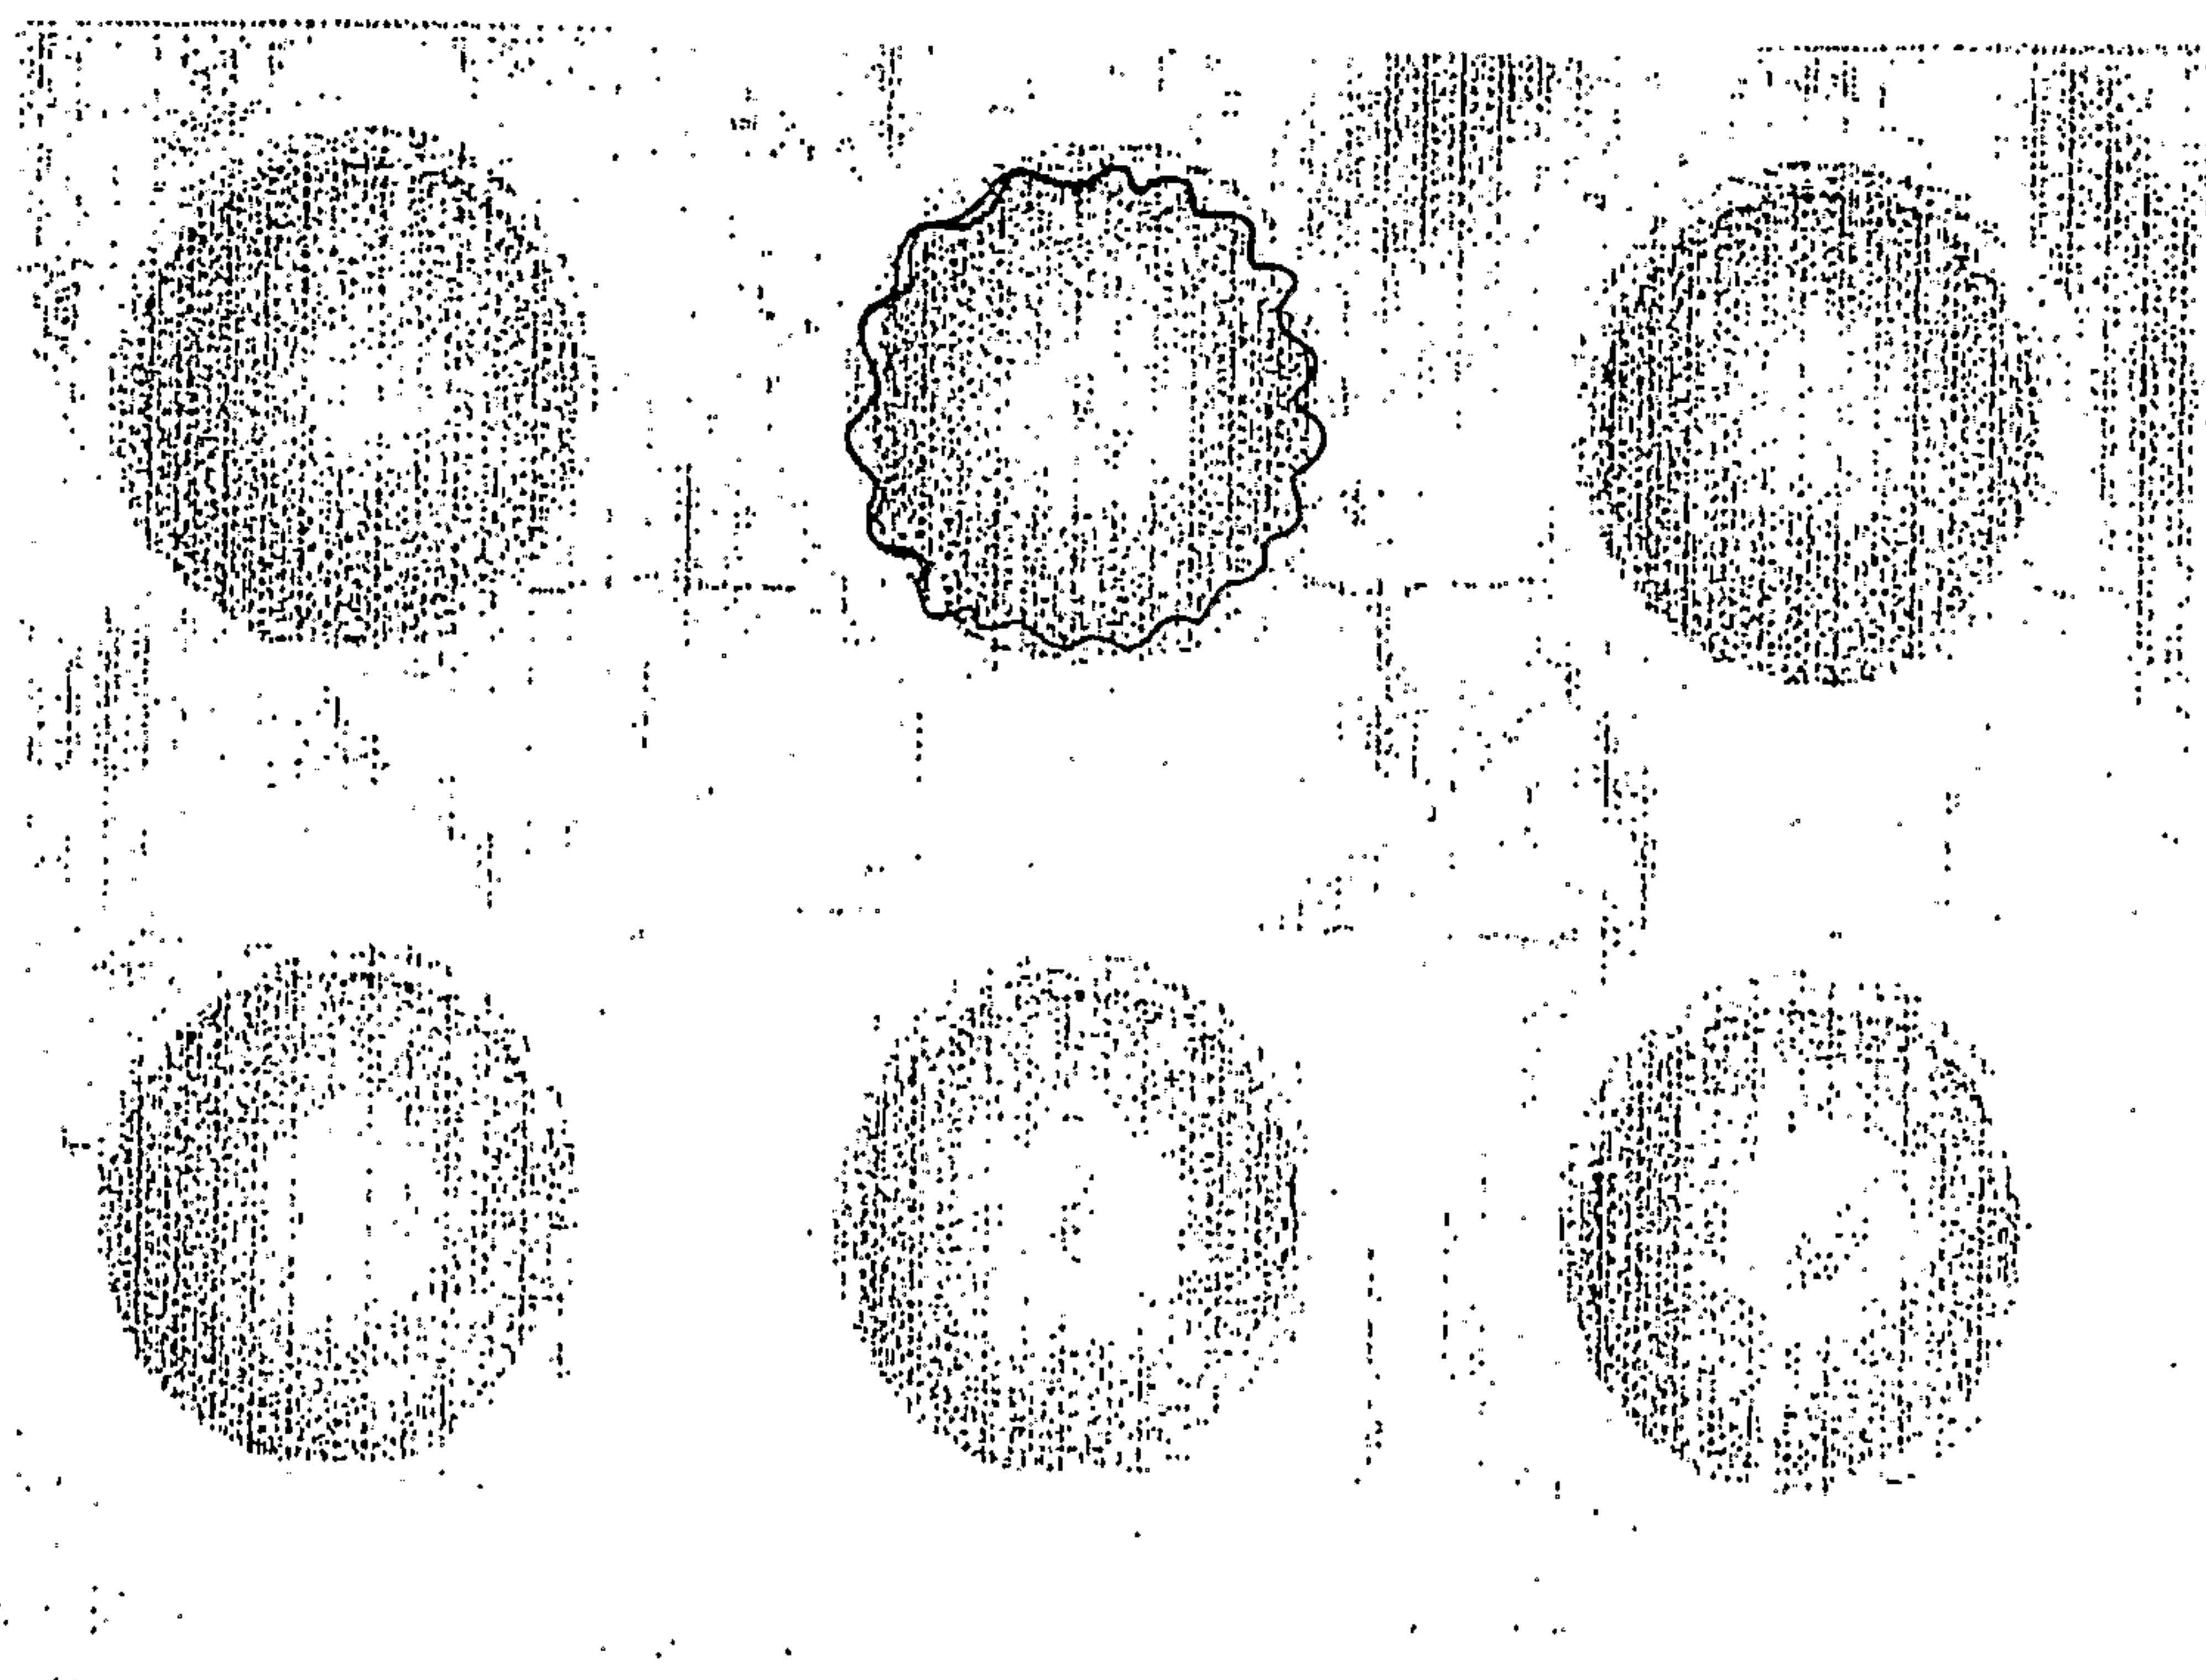


Figure 7

5/17

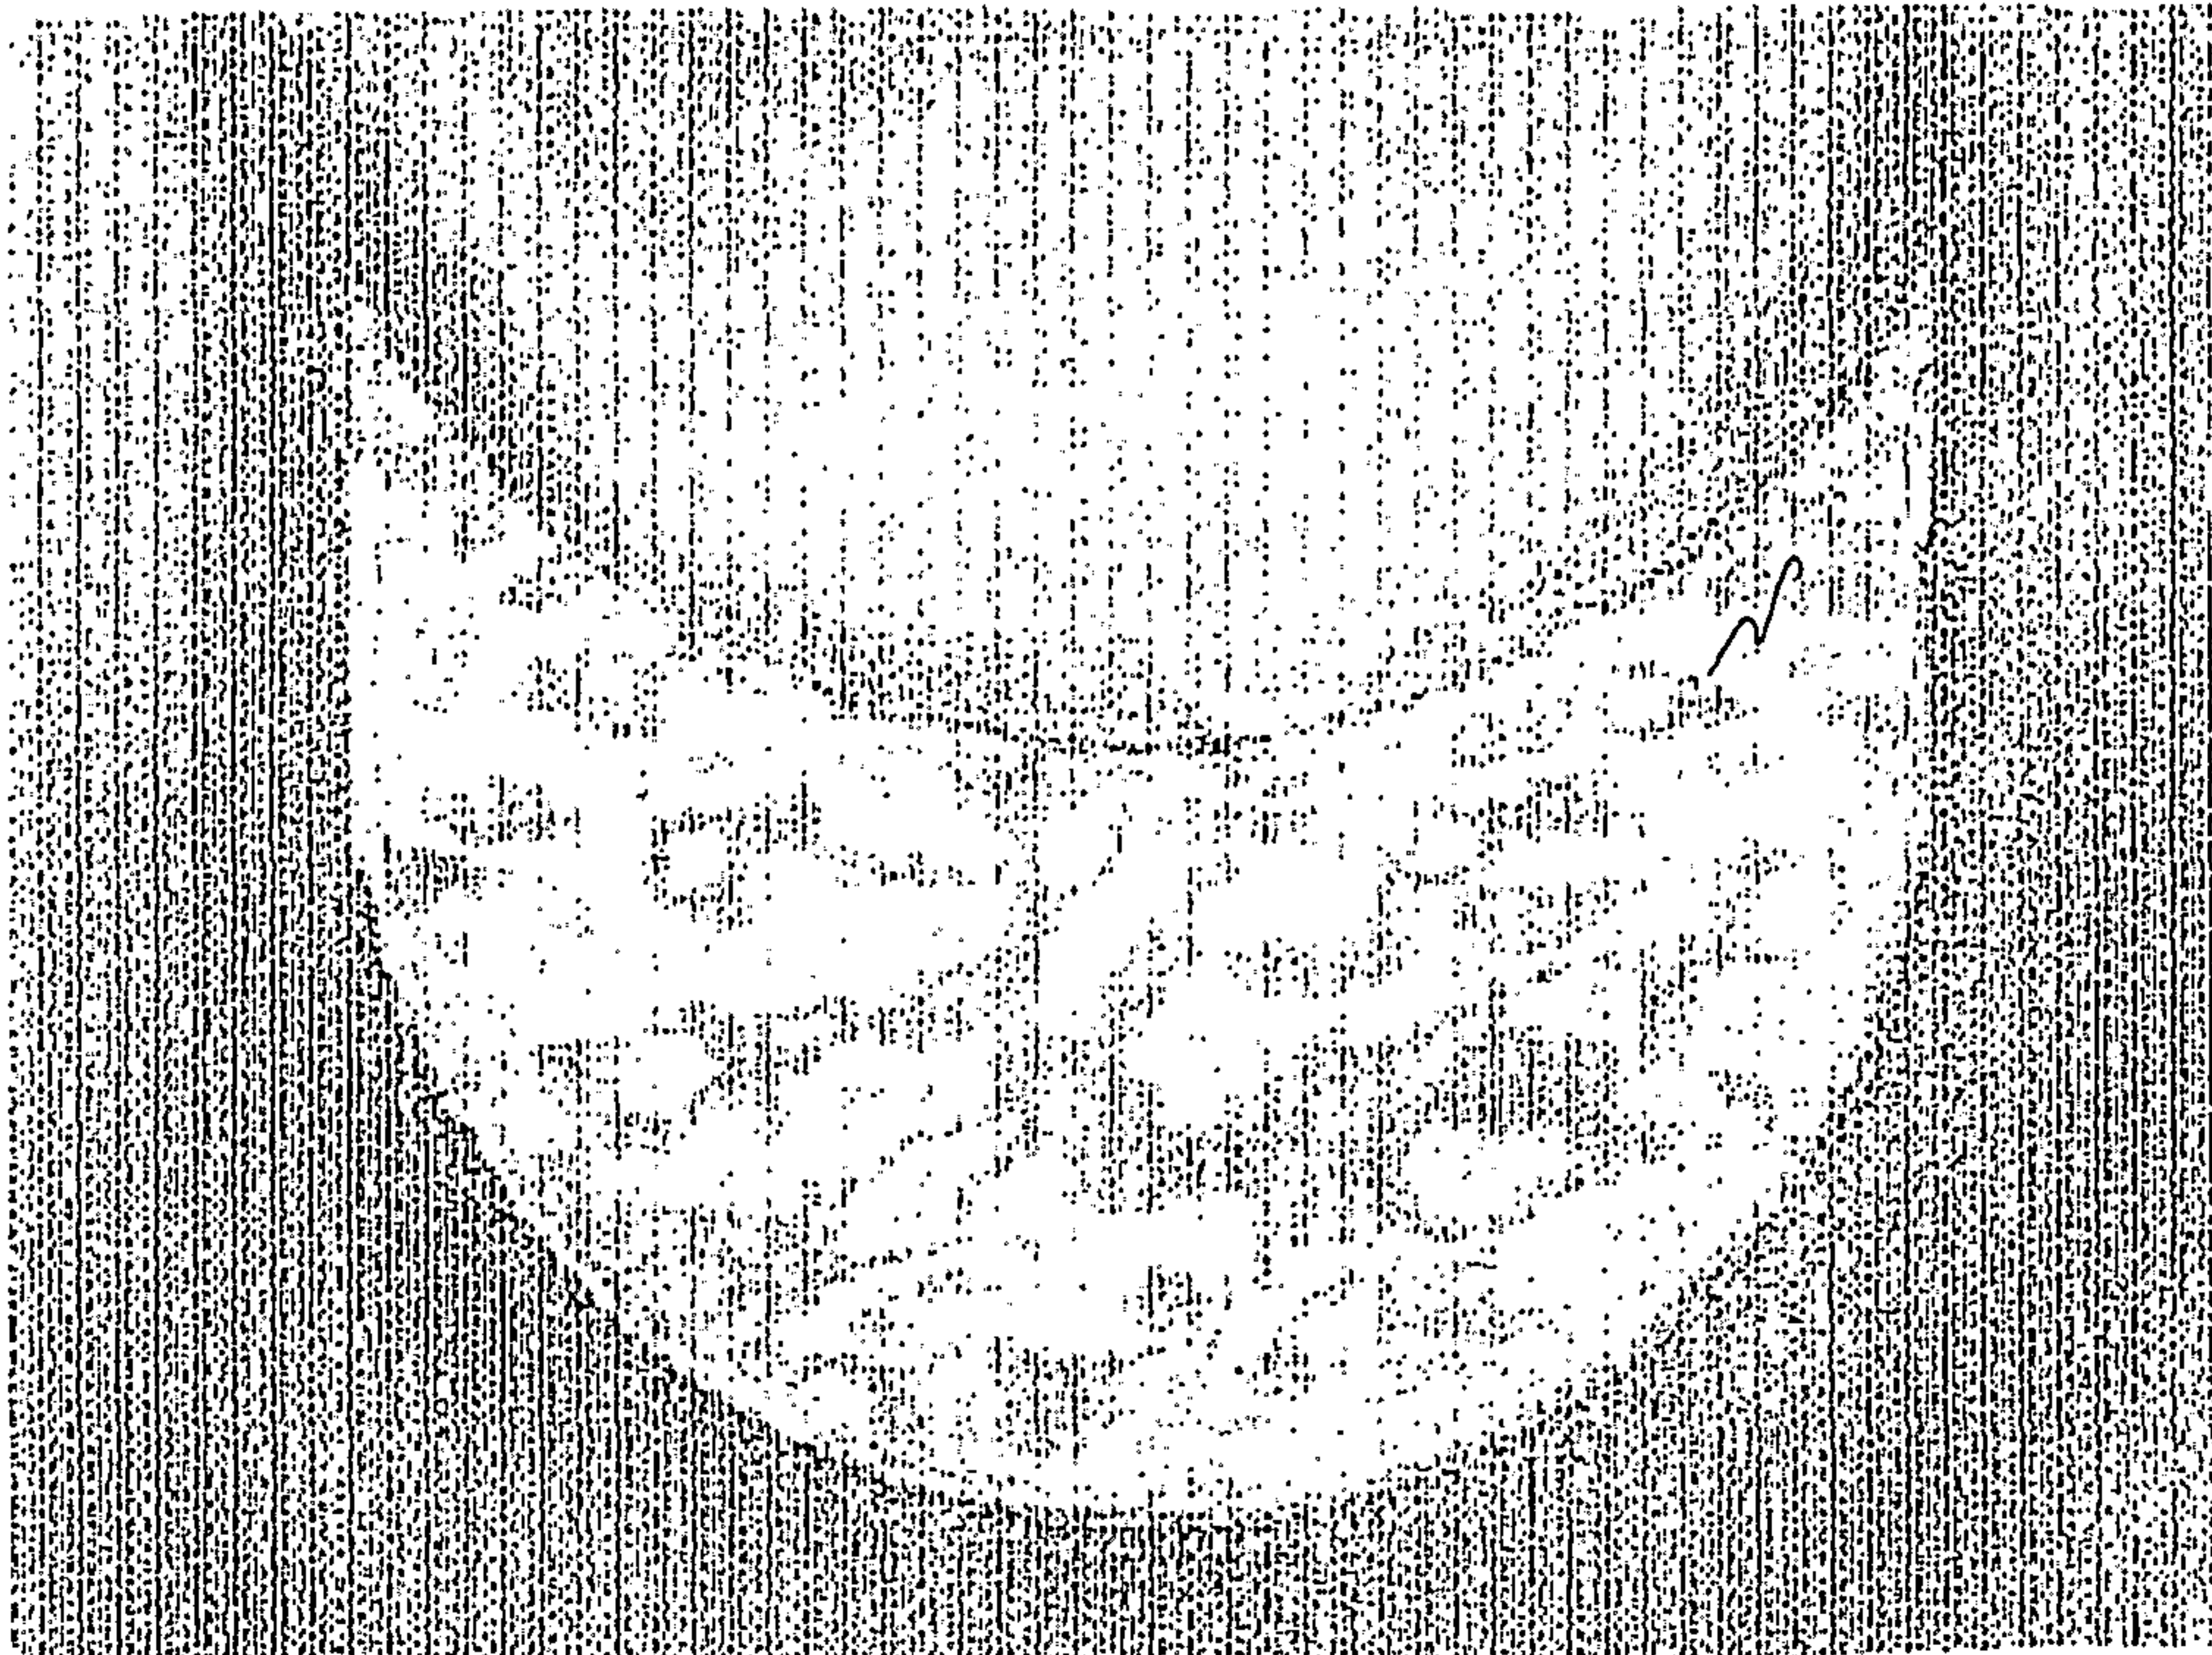


Figure 8



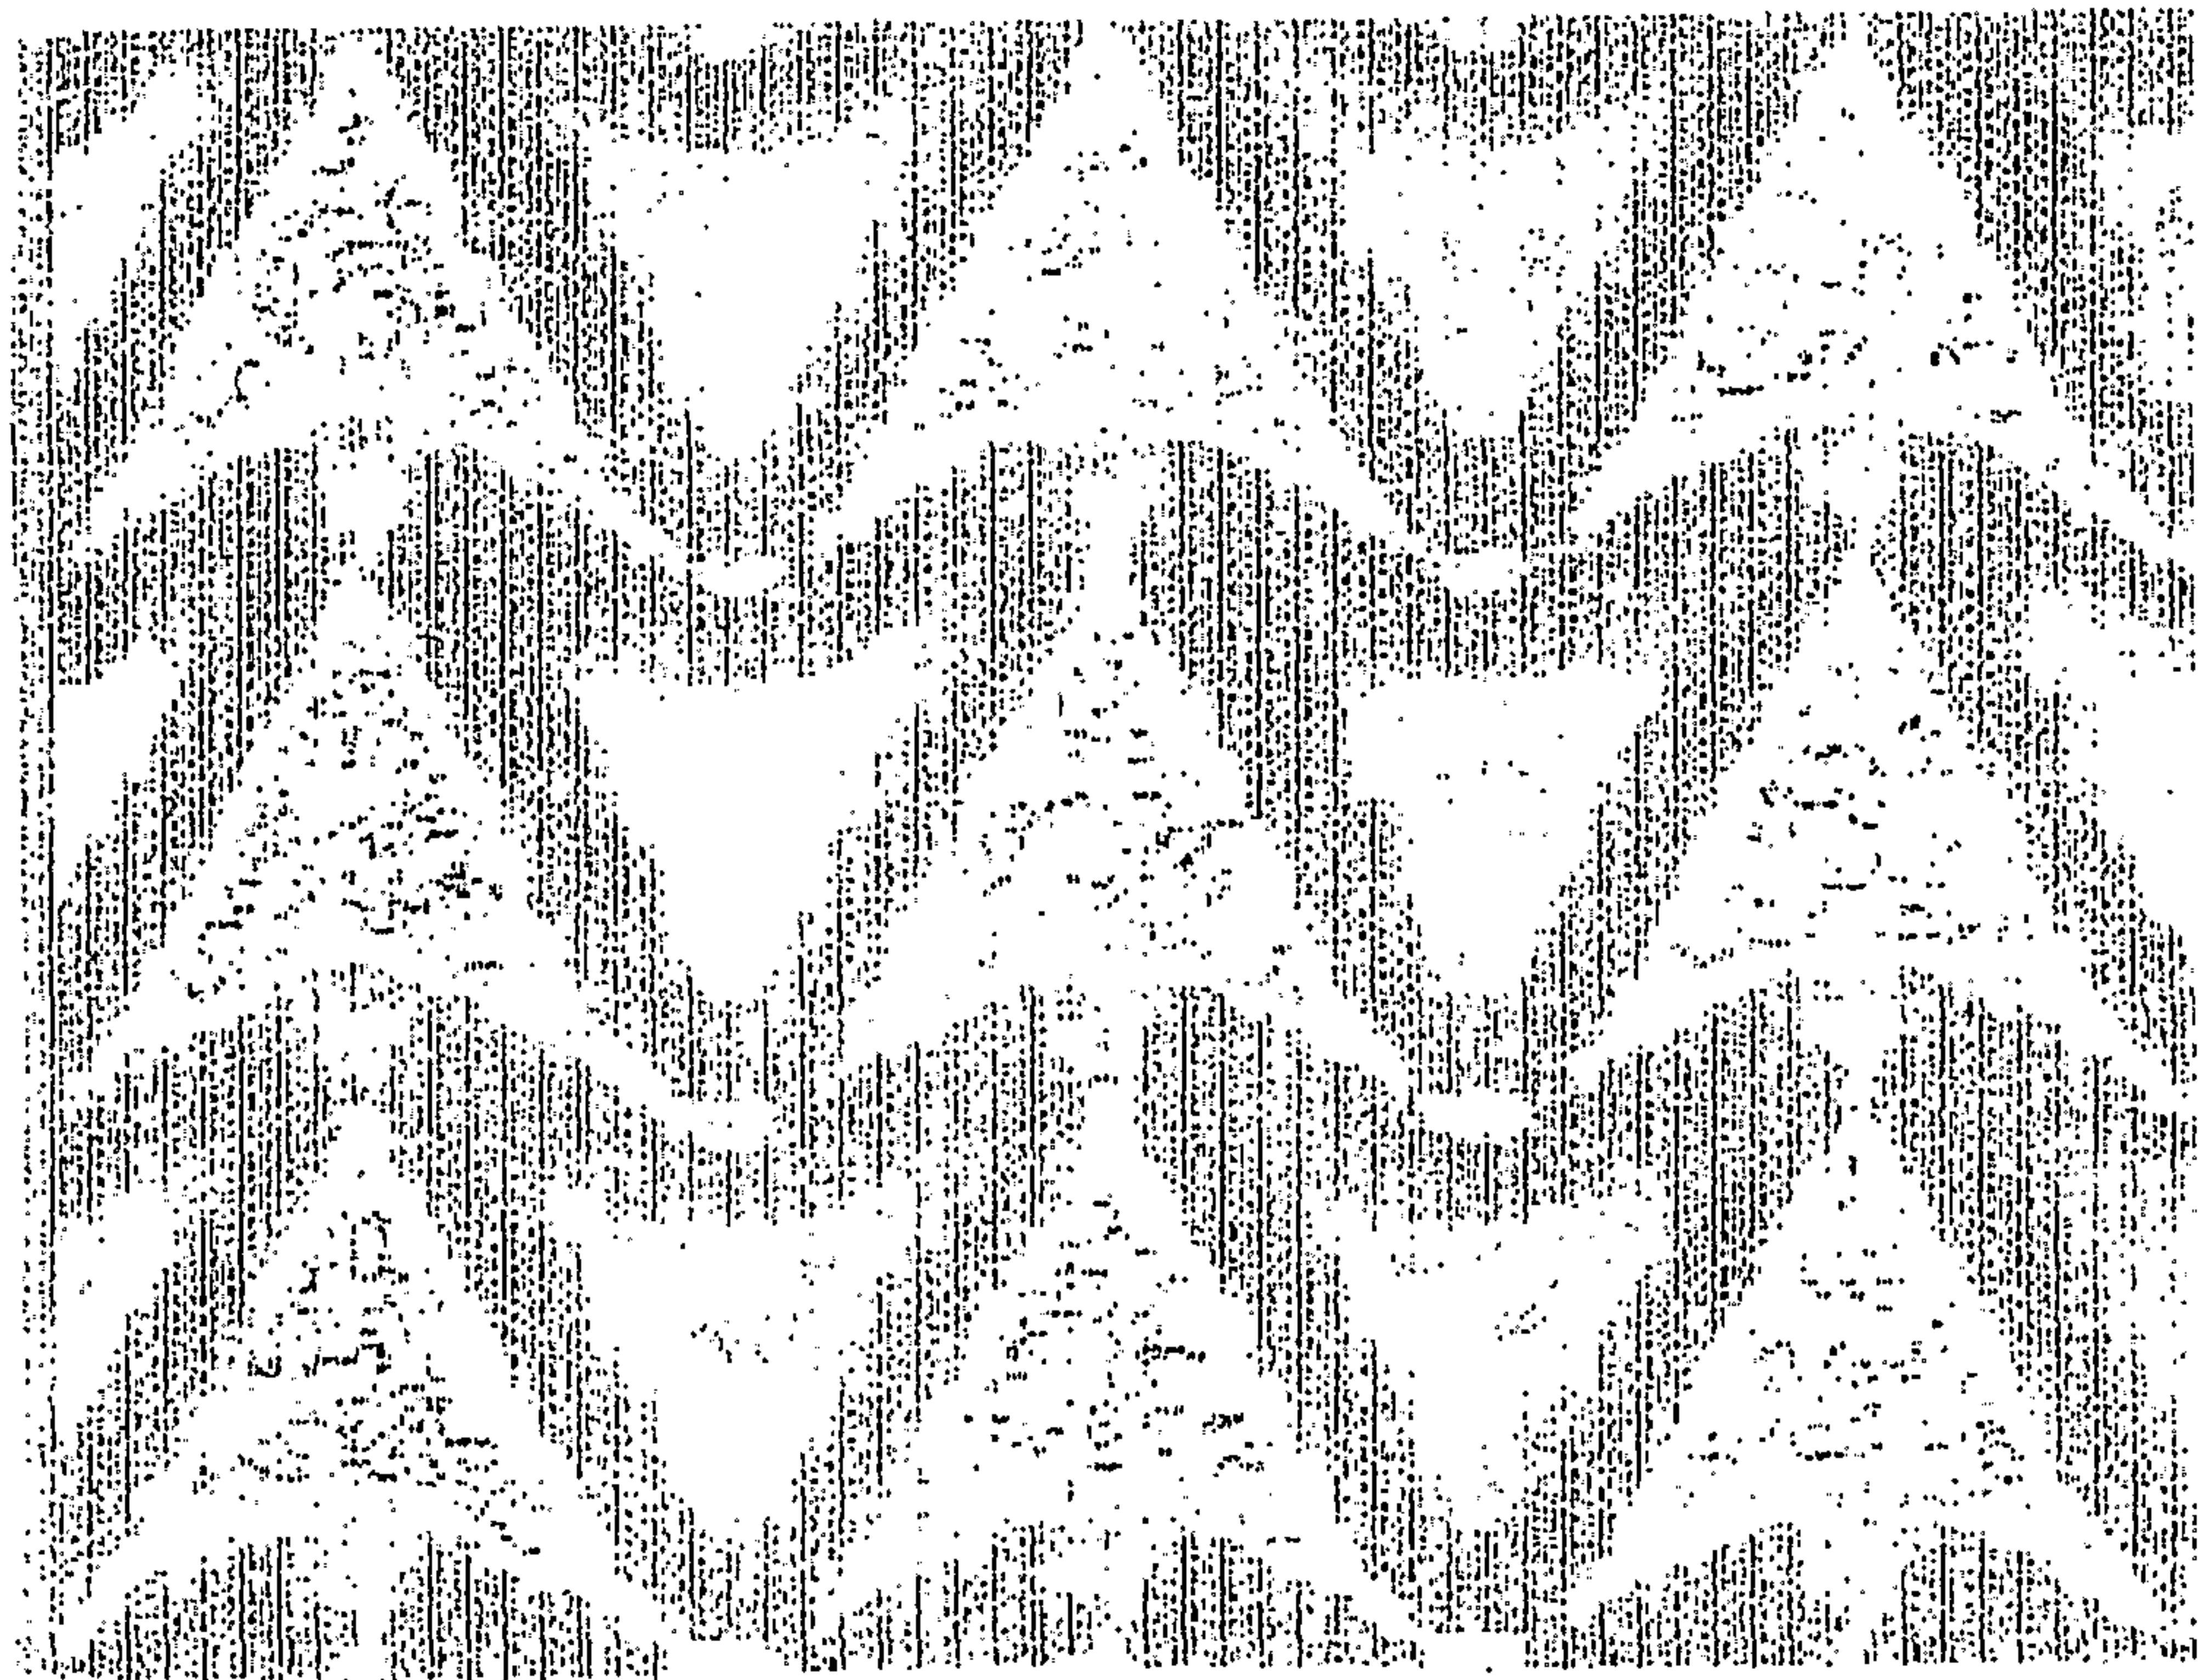


Figure 9

*FIG. 10*

7/17

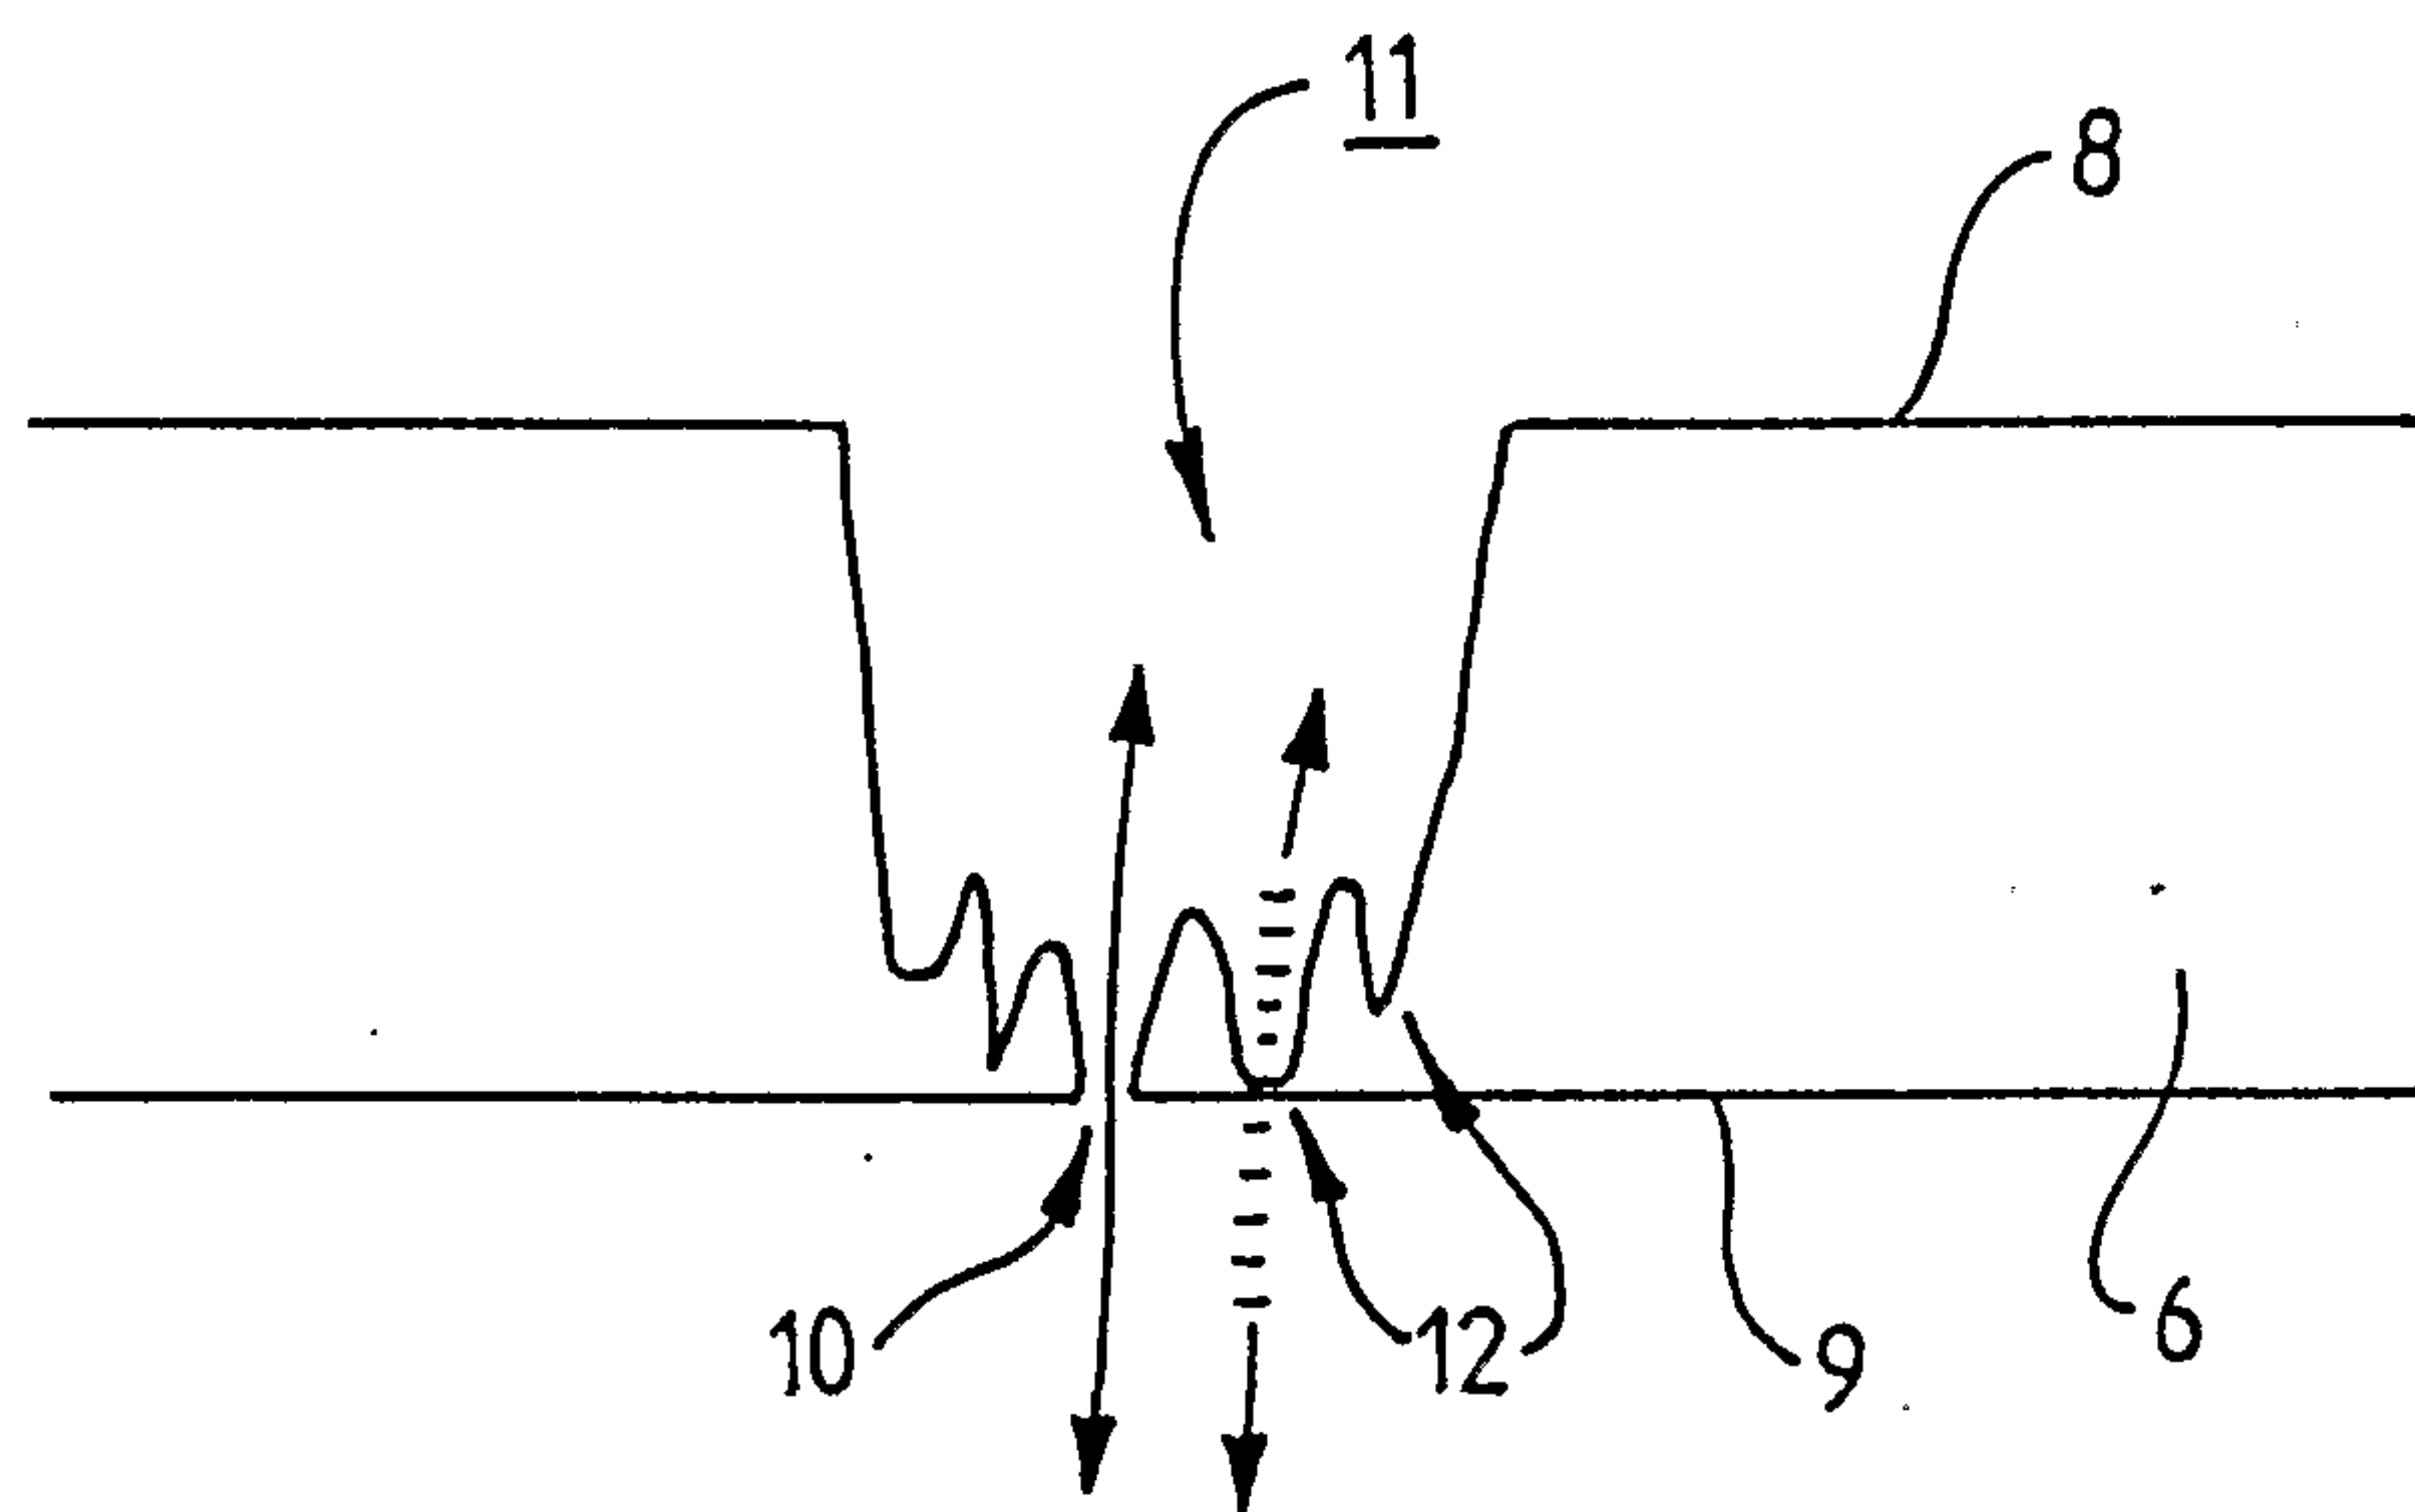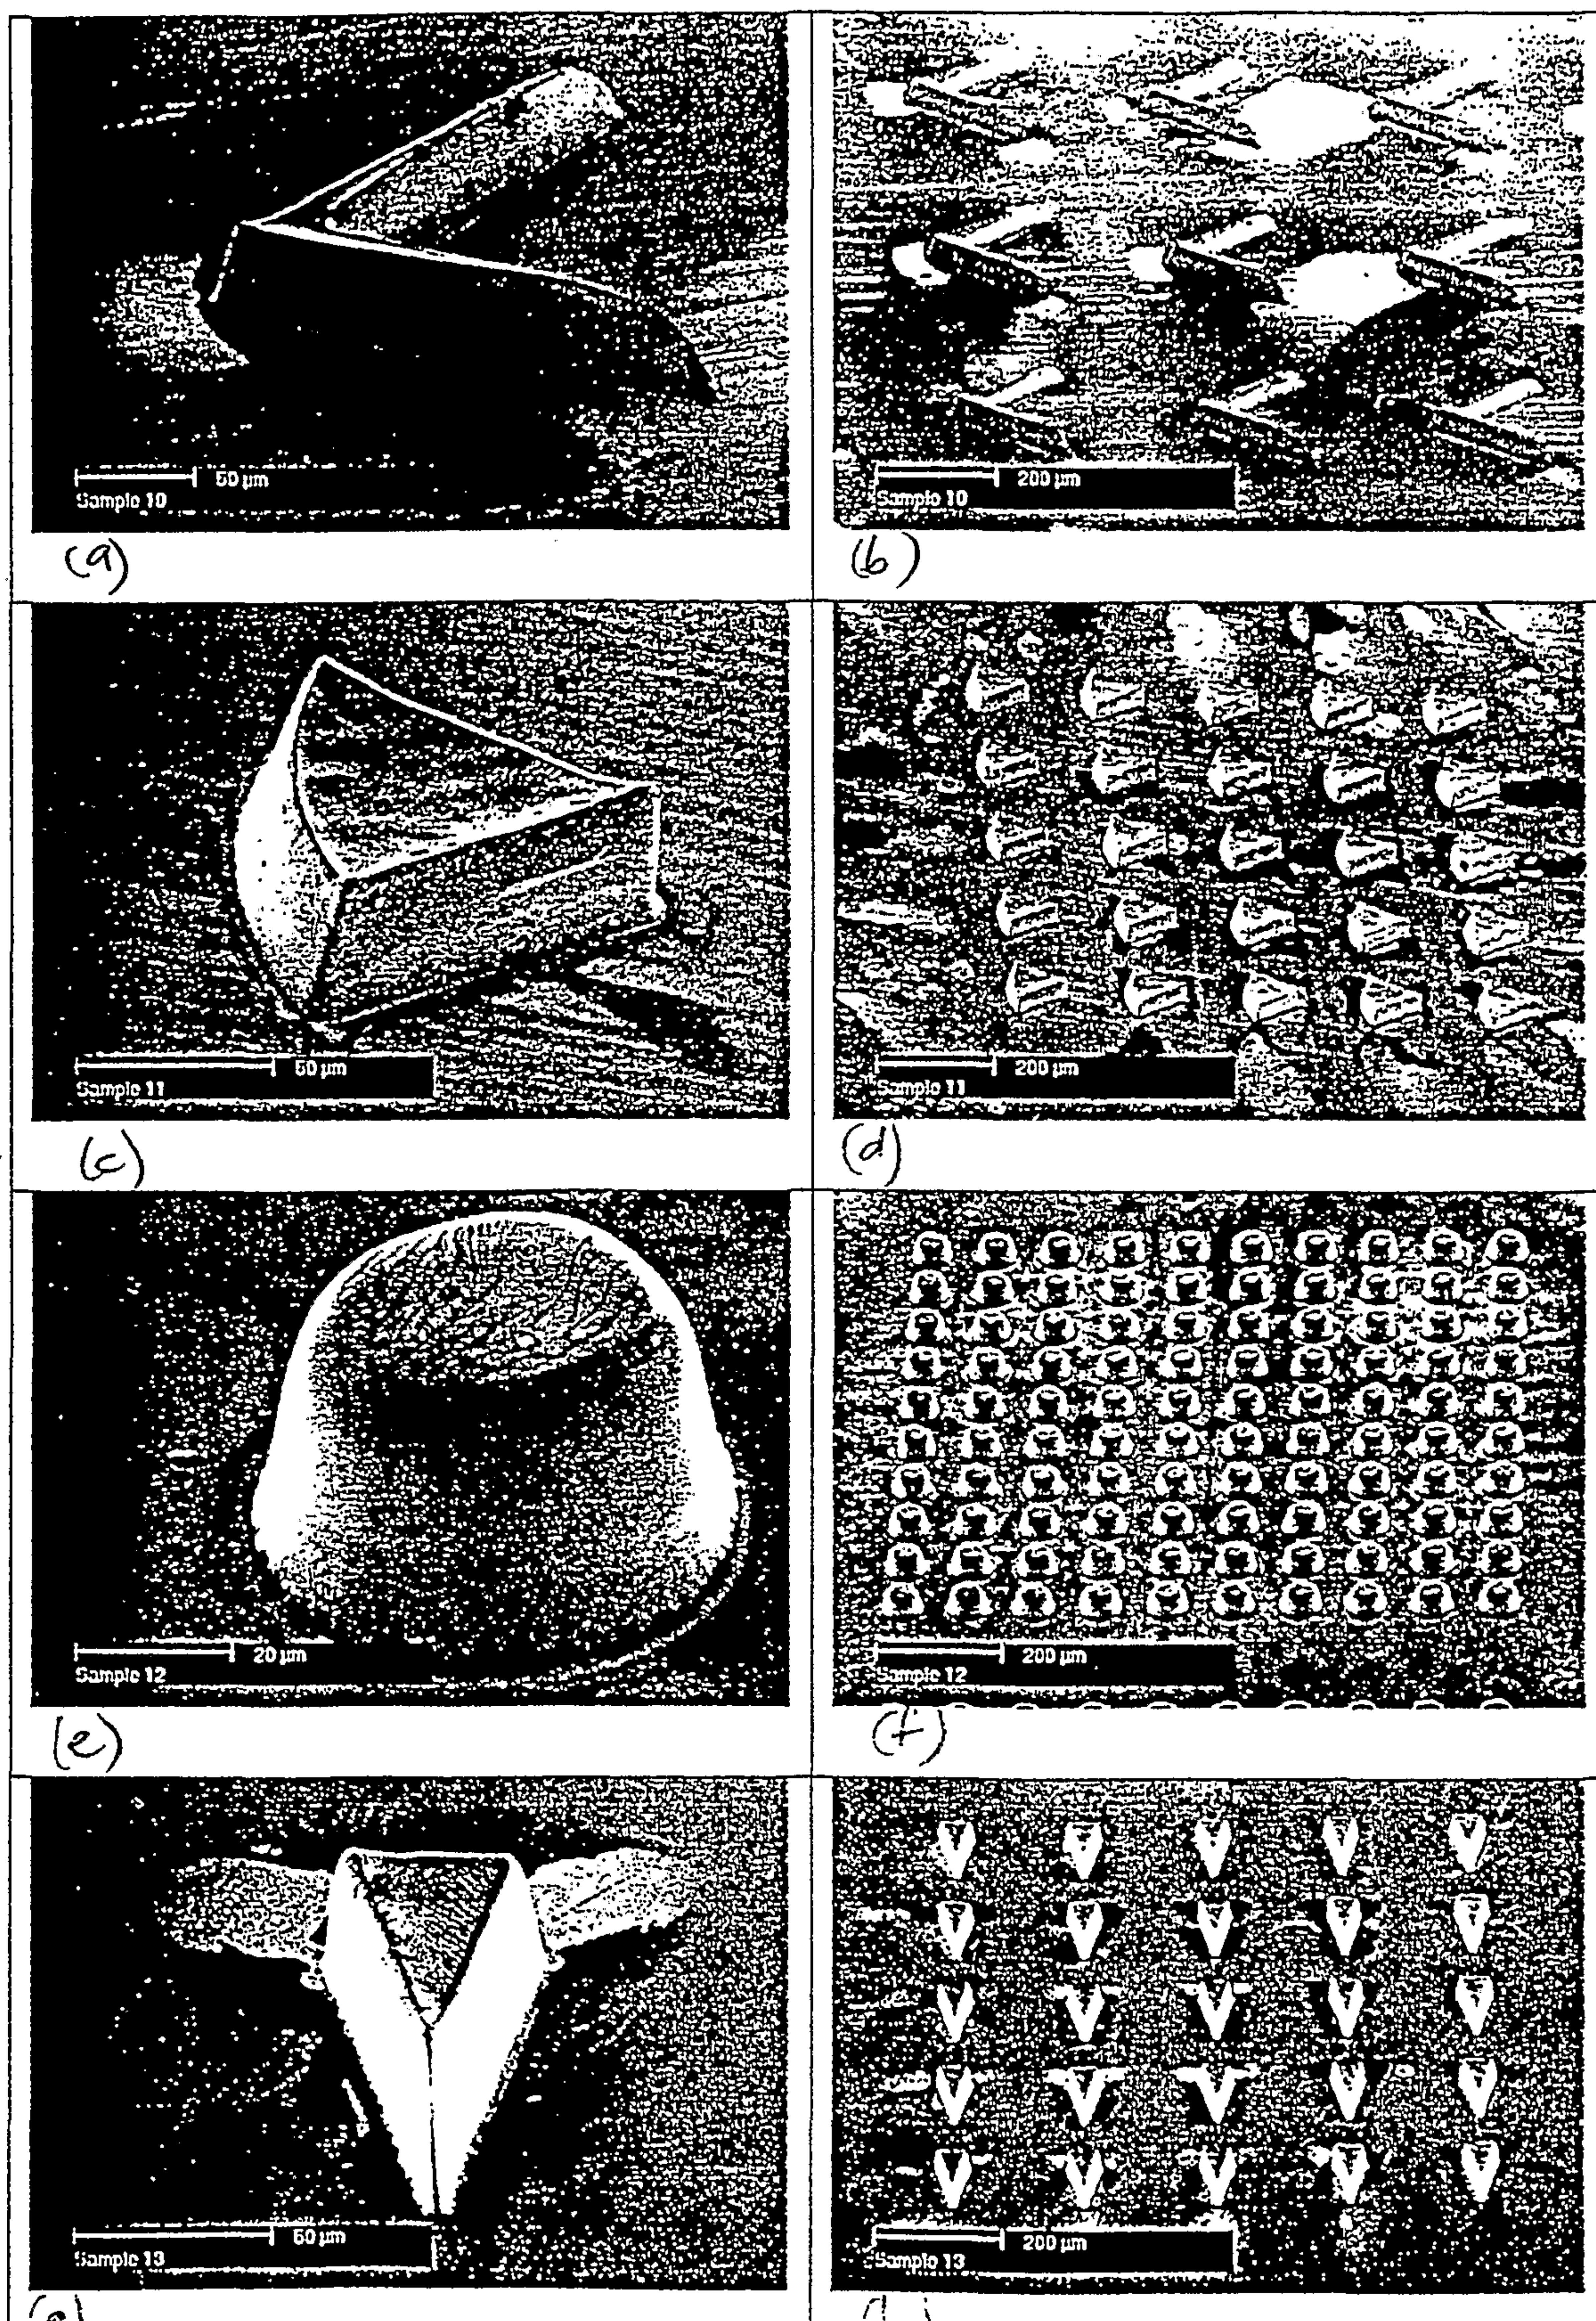

(g) Figure 11

(h)

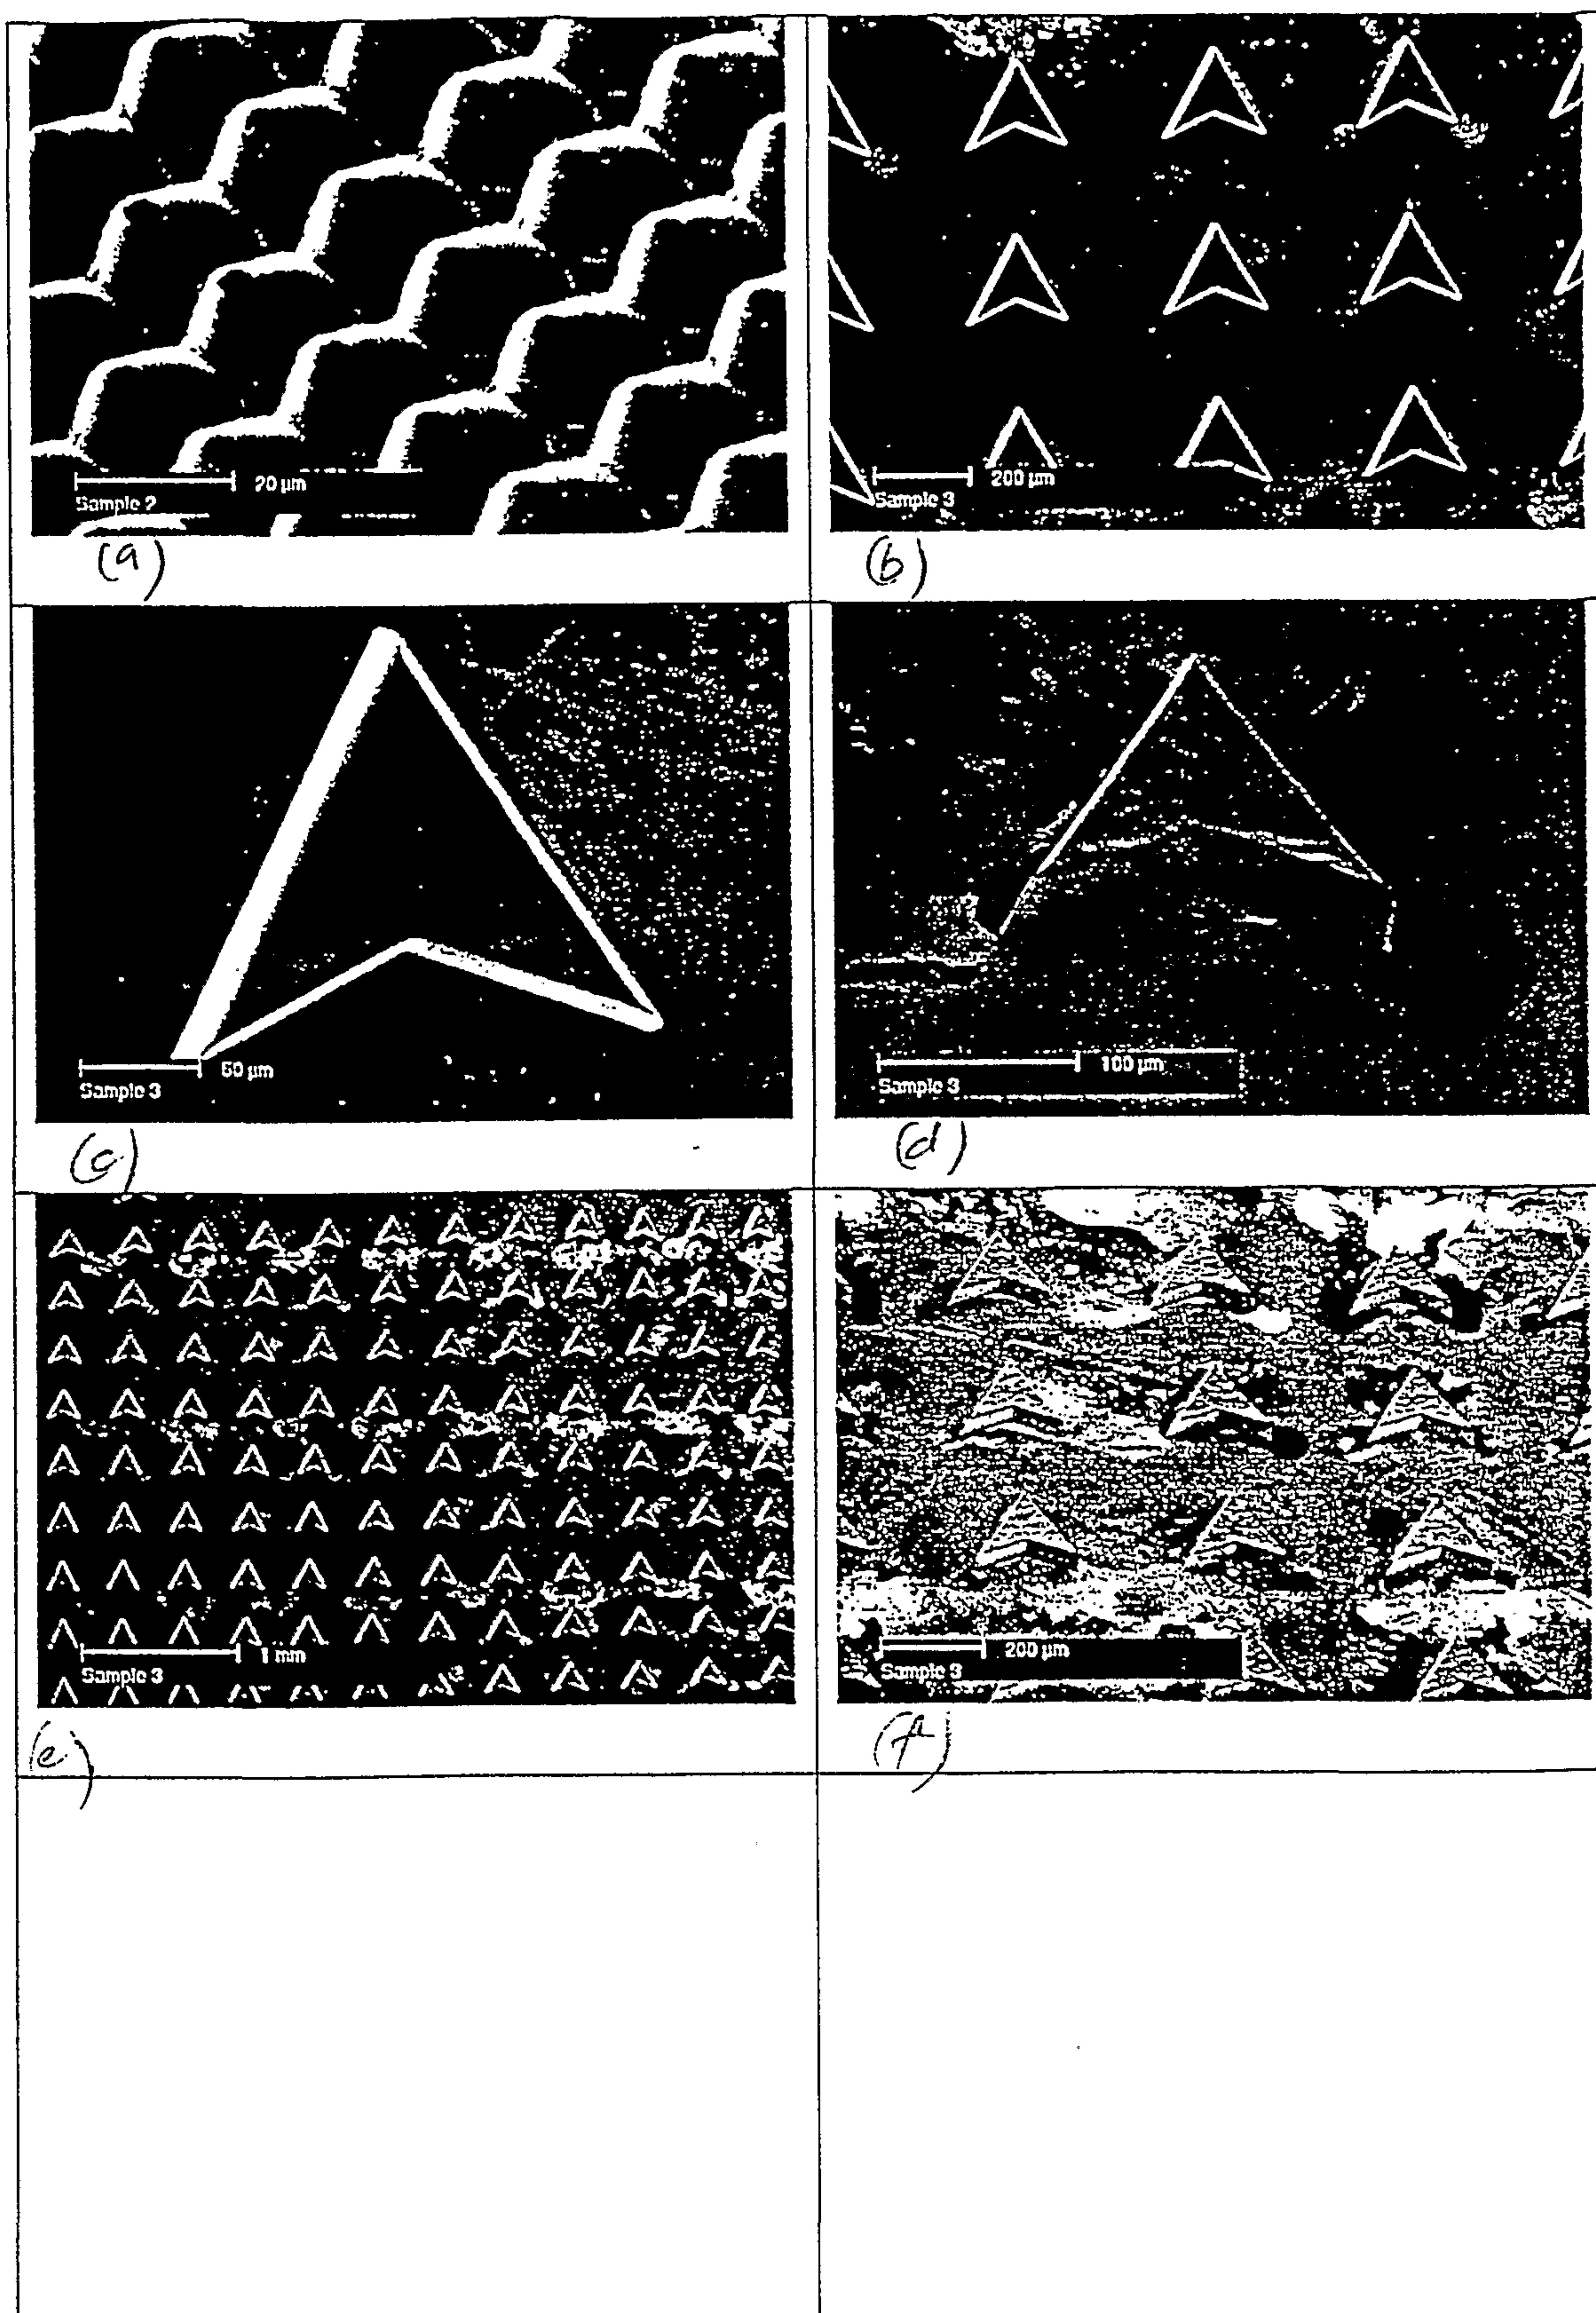


Figure 12

9/17

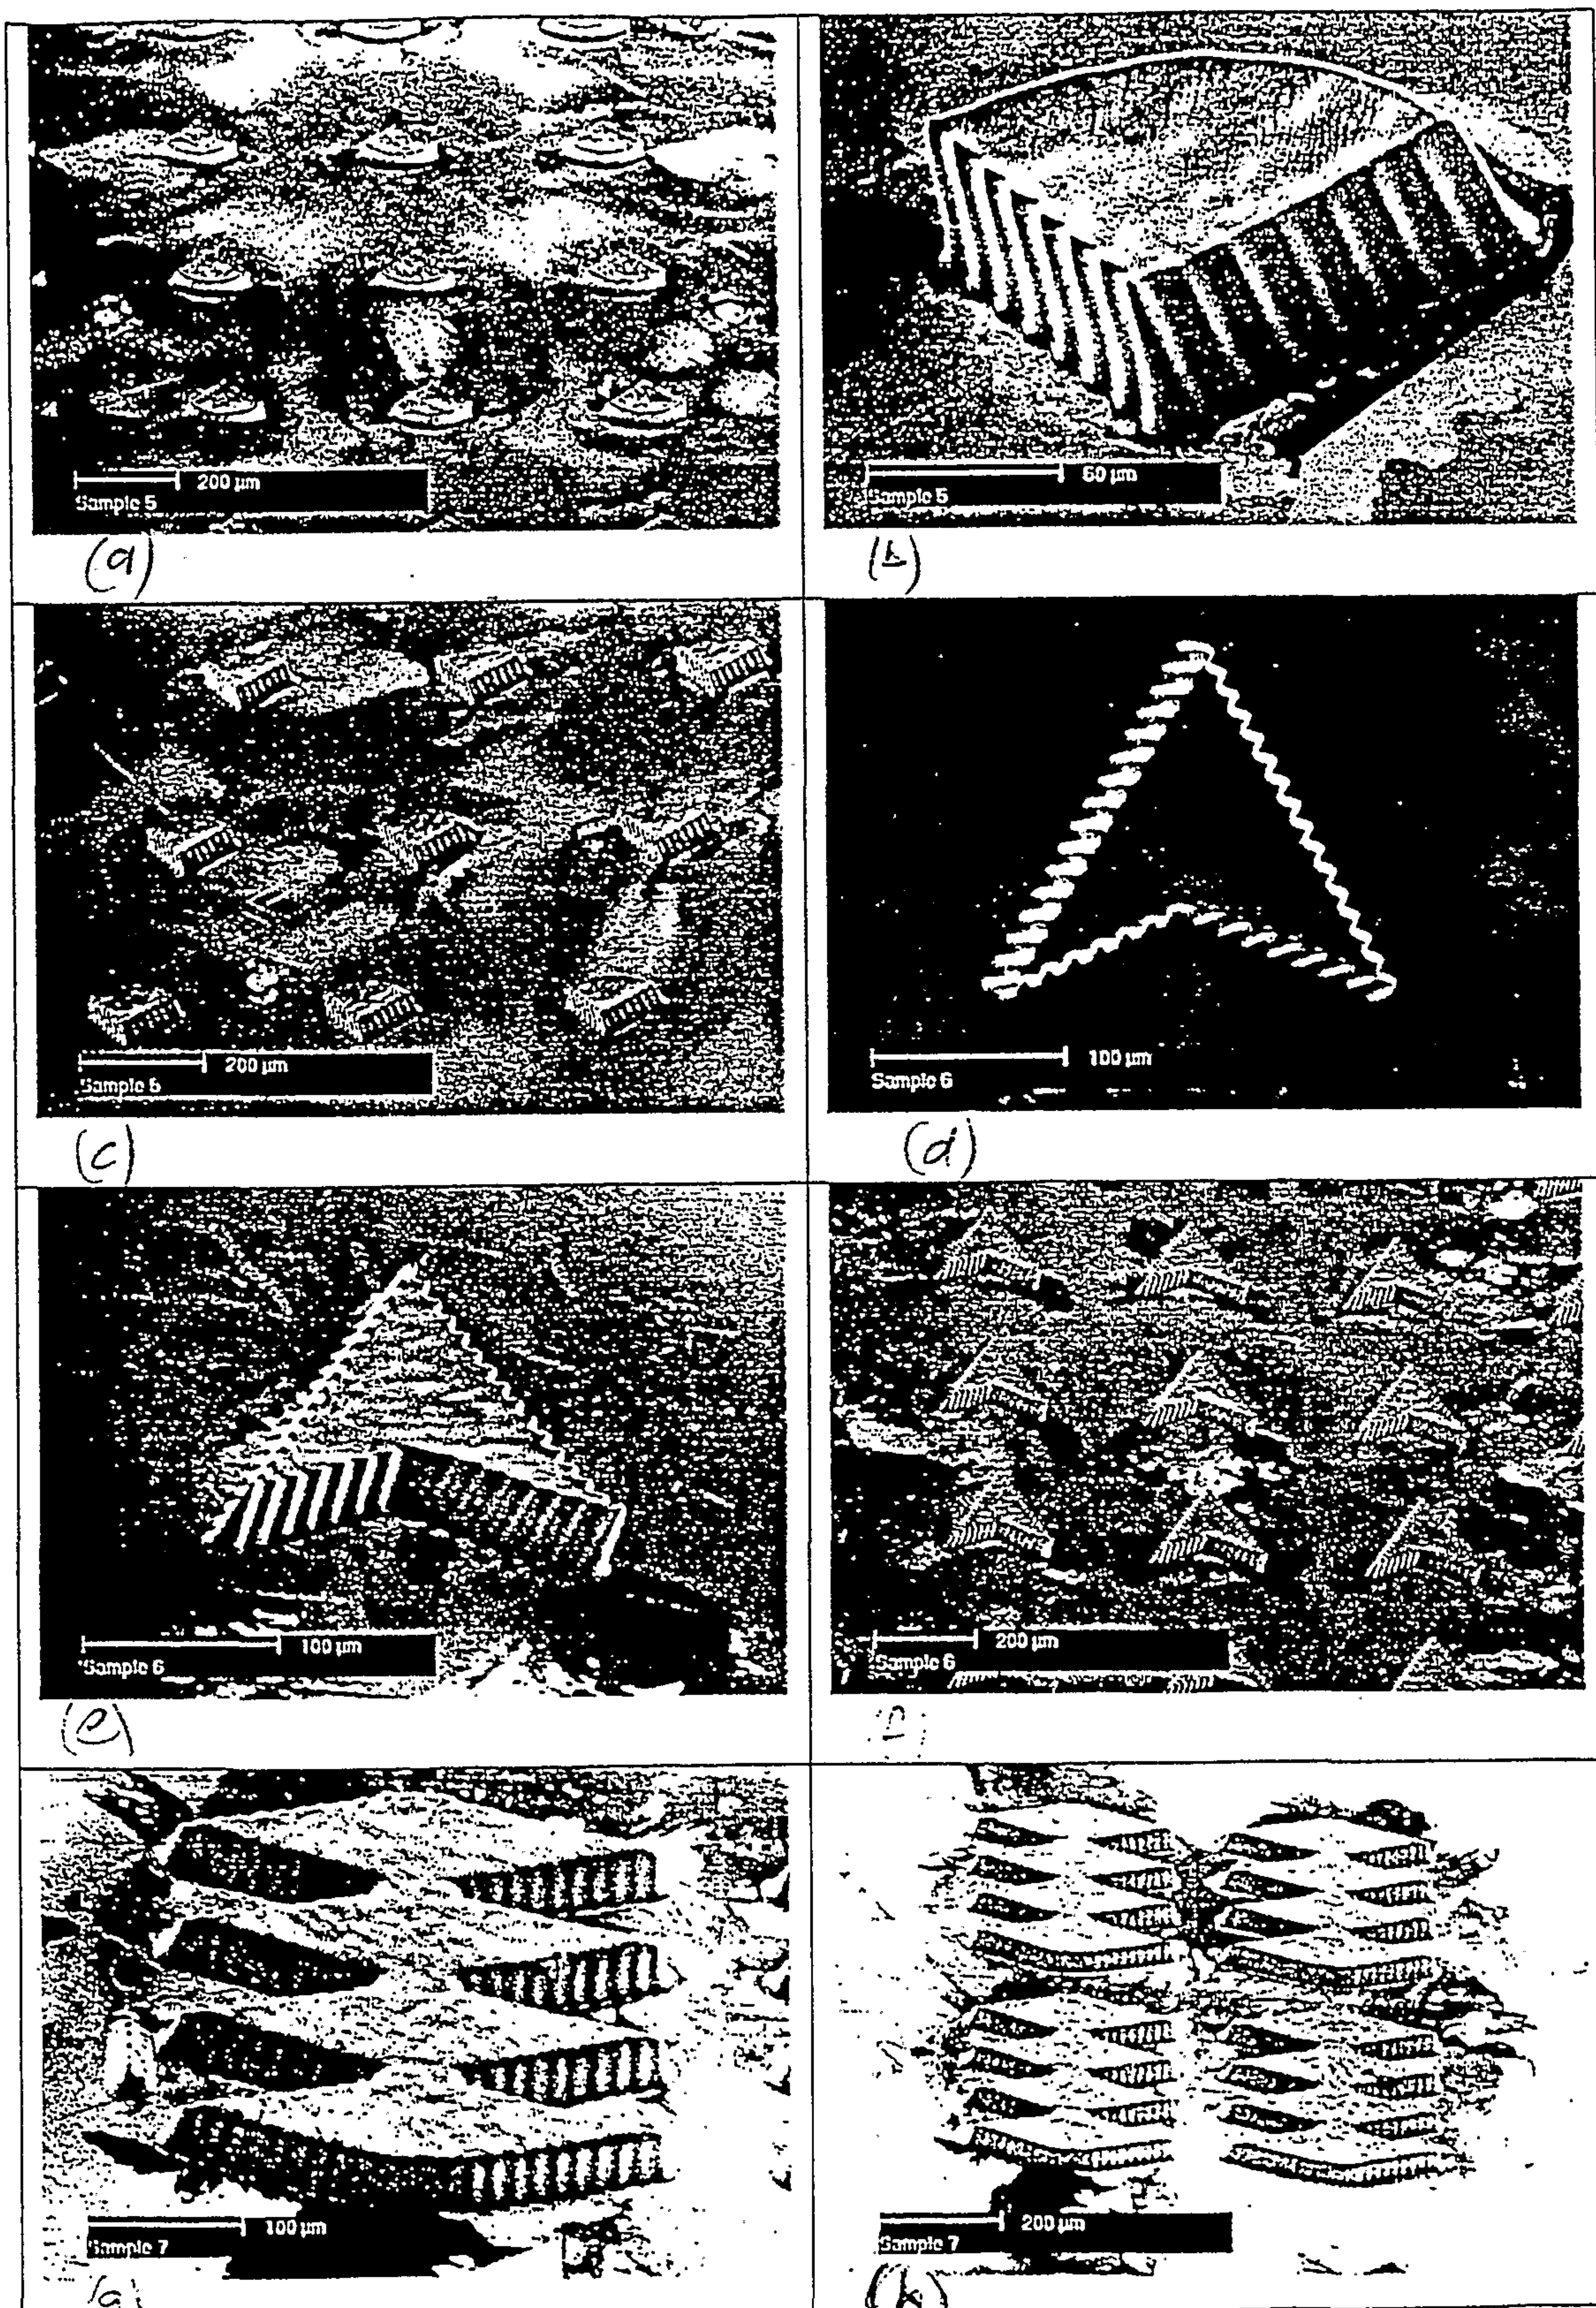


Figure 13

10/17

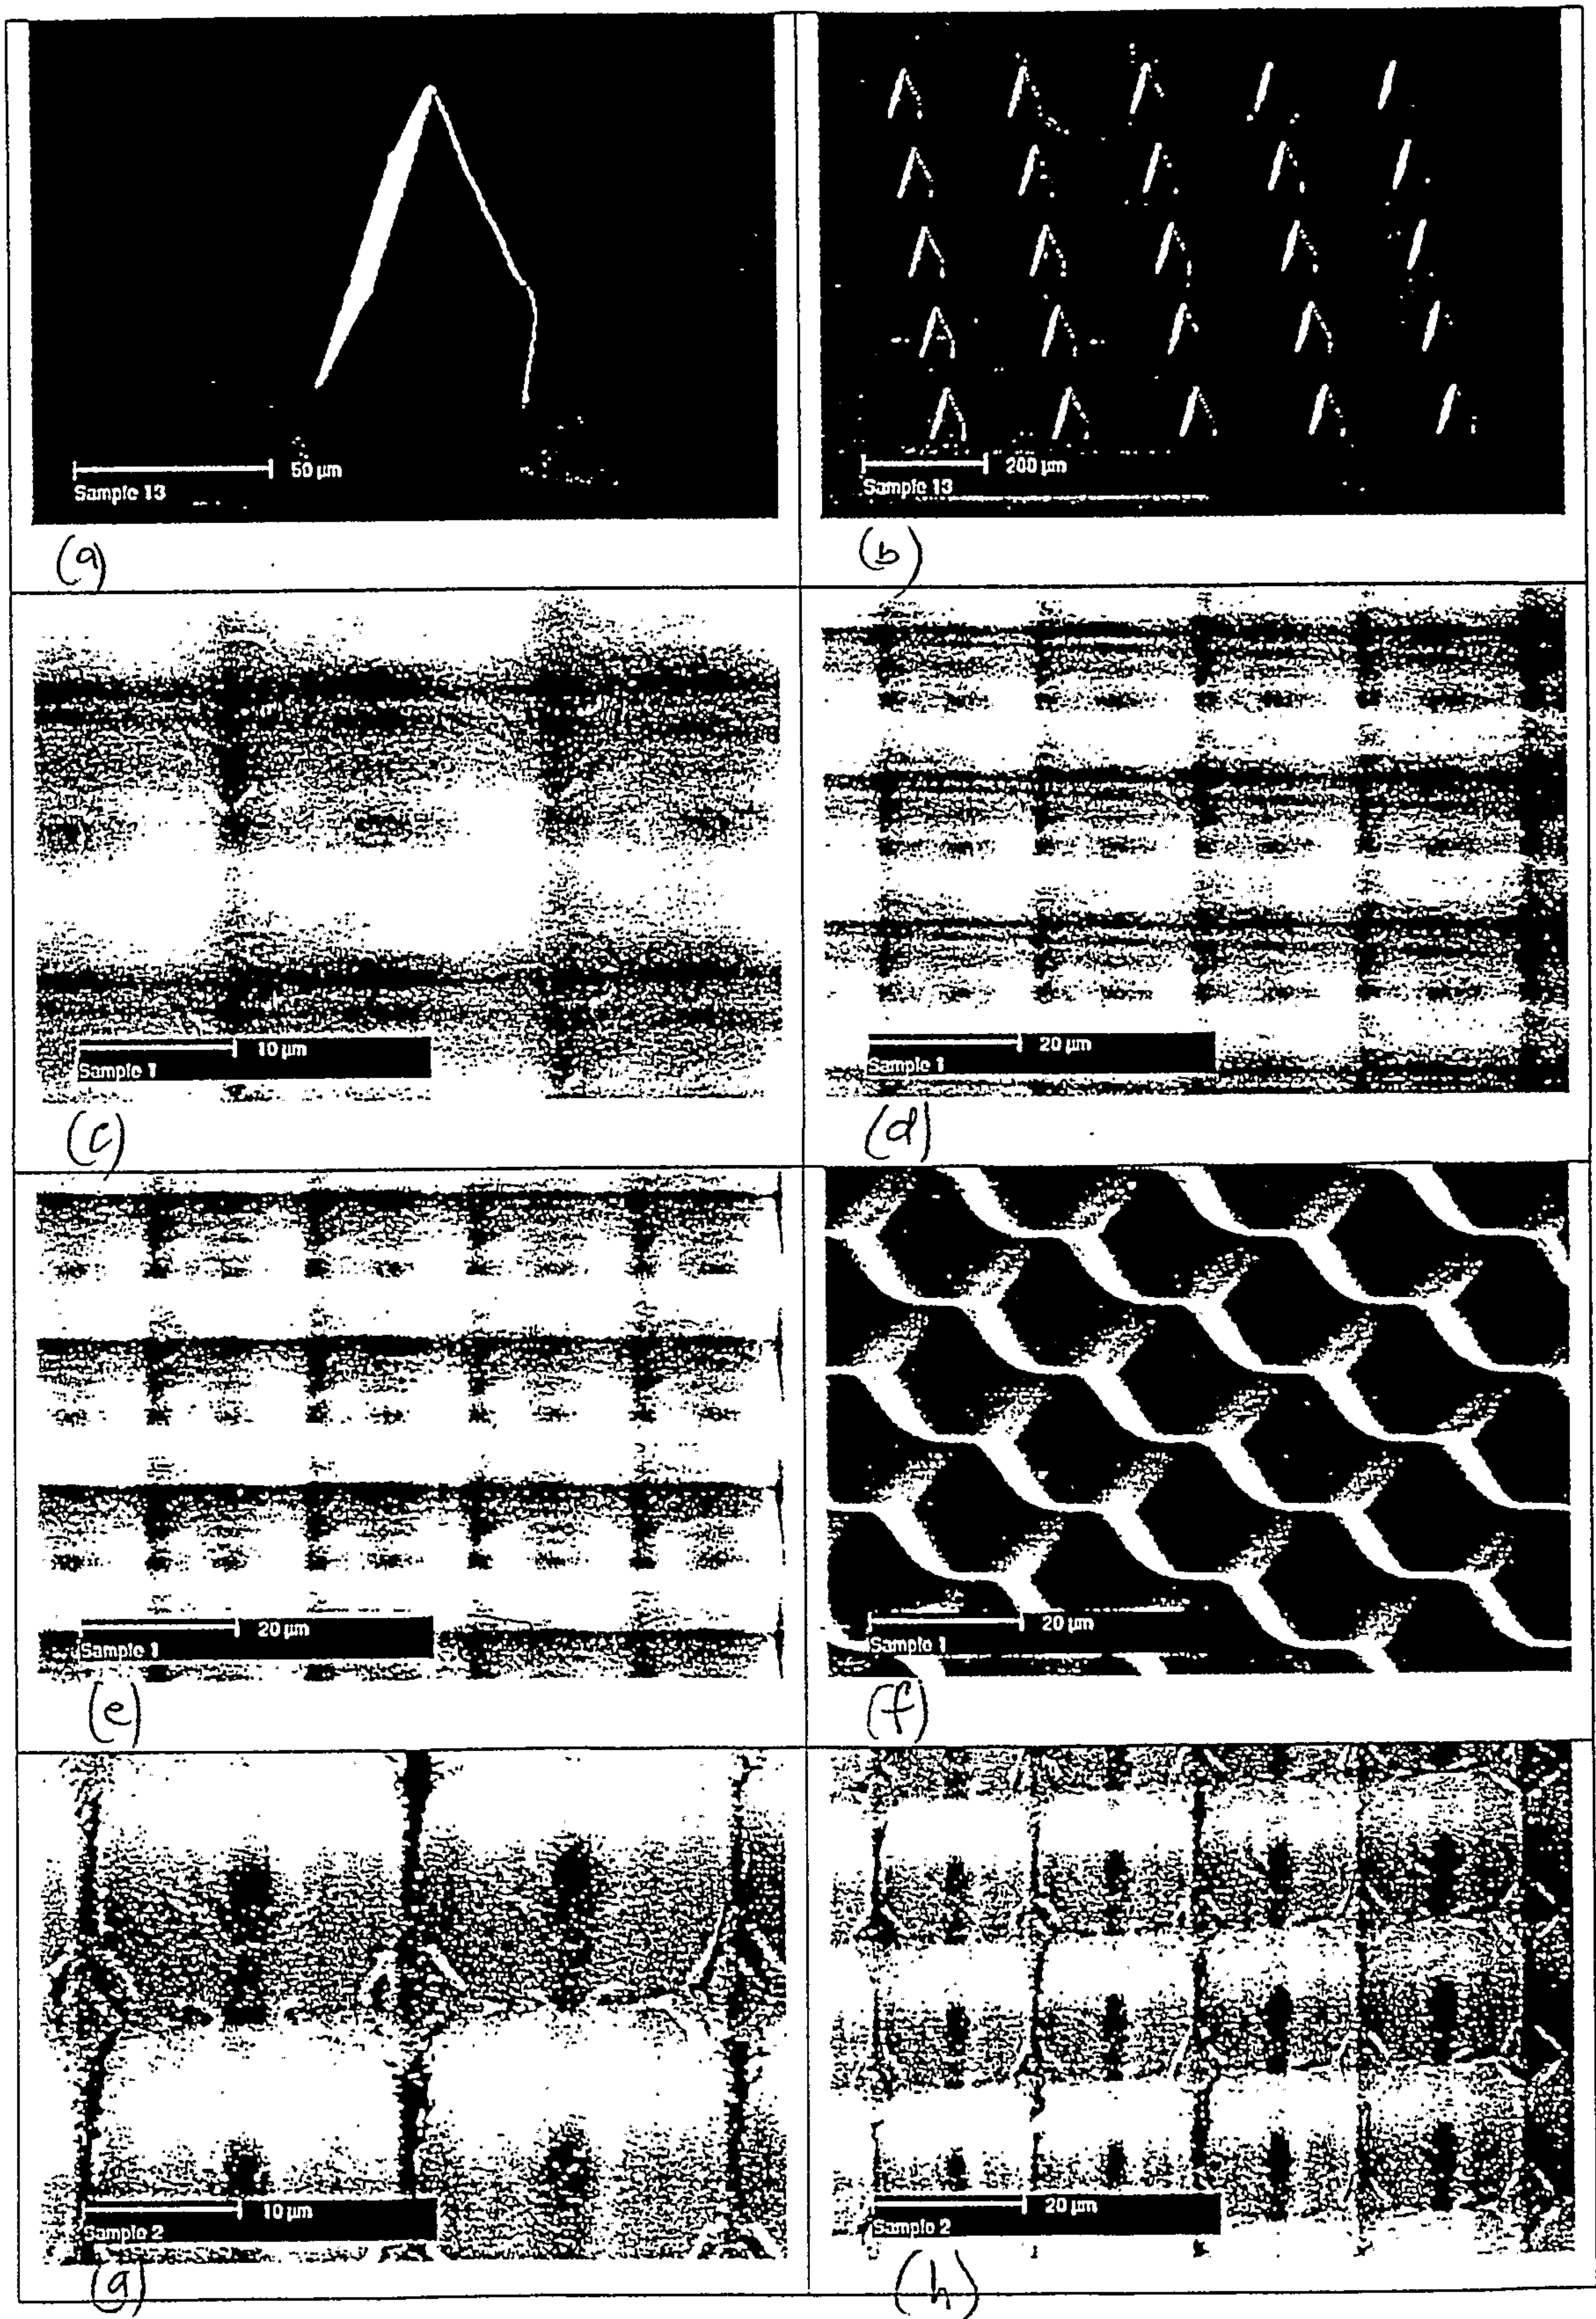


Figure 14

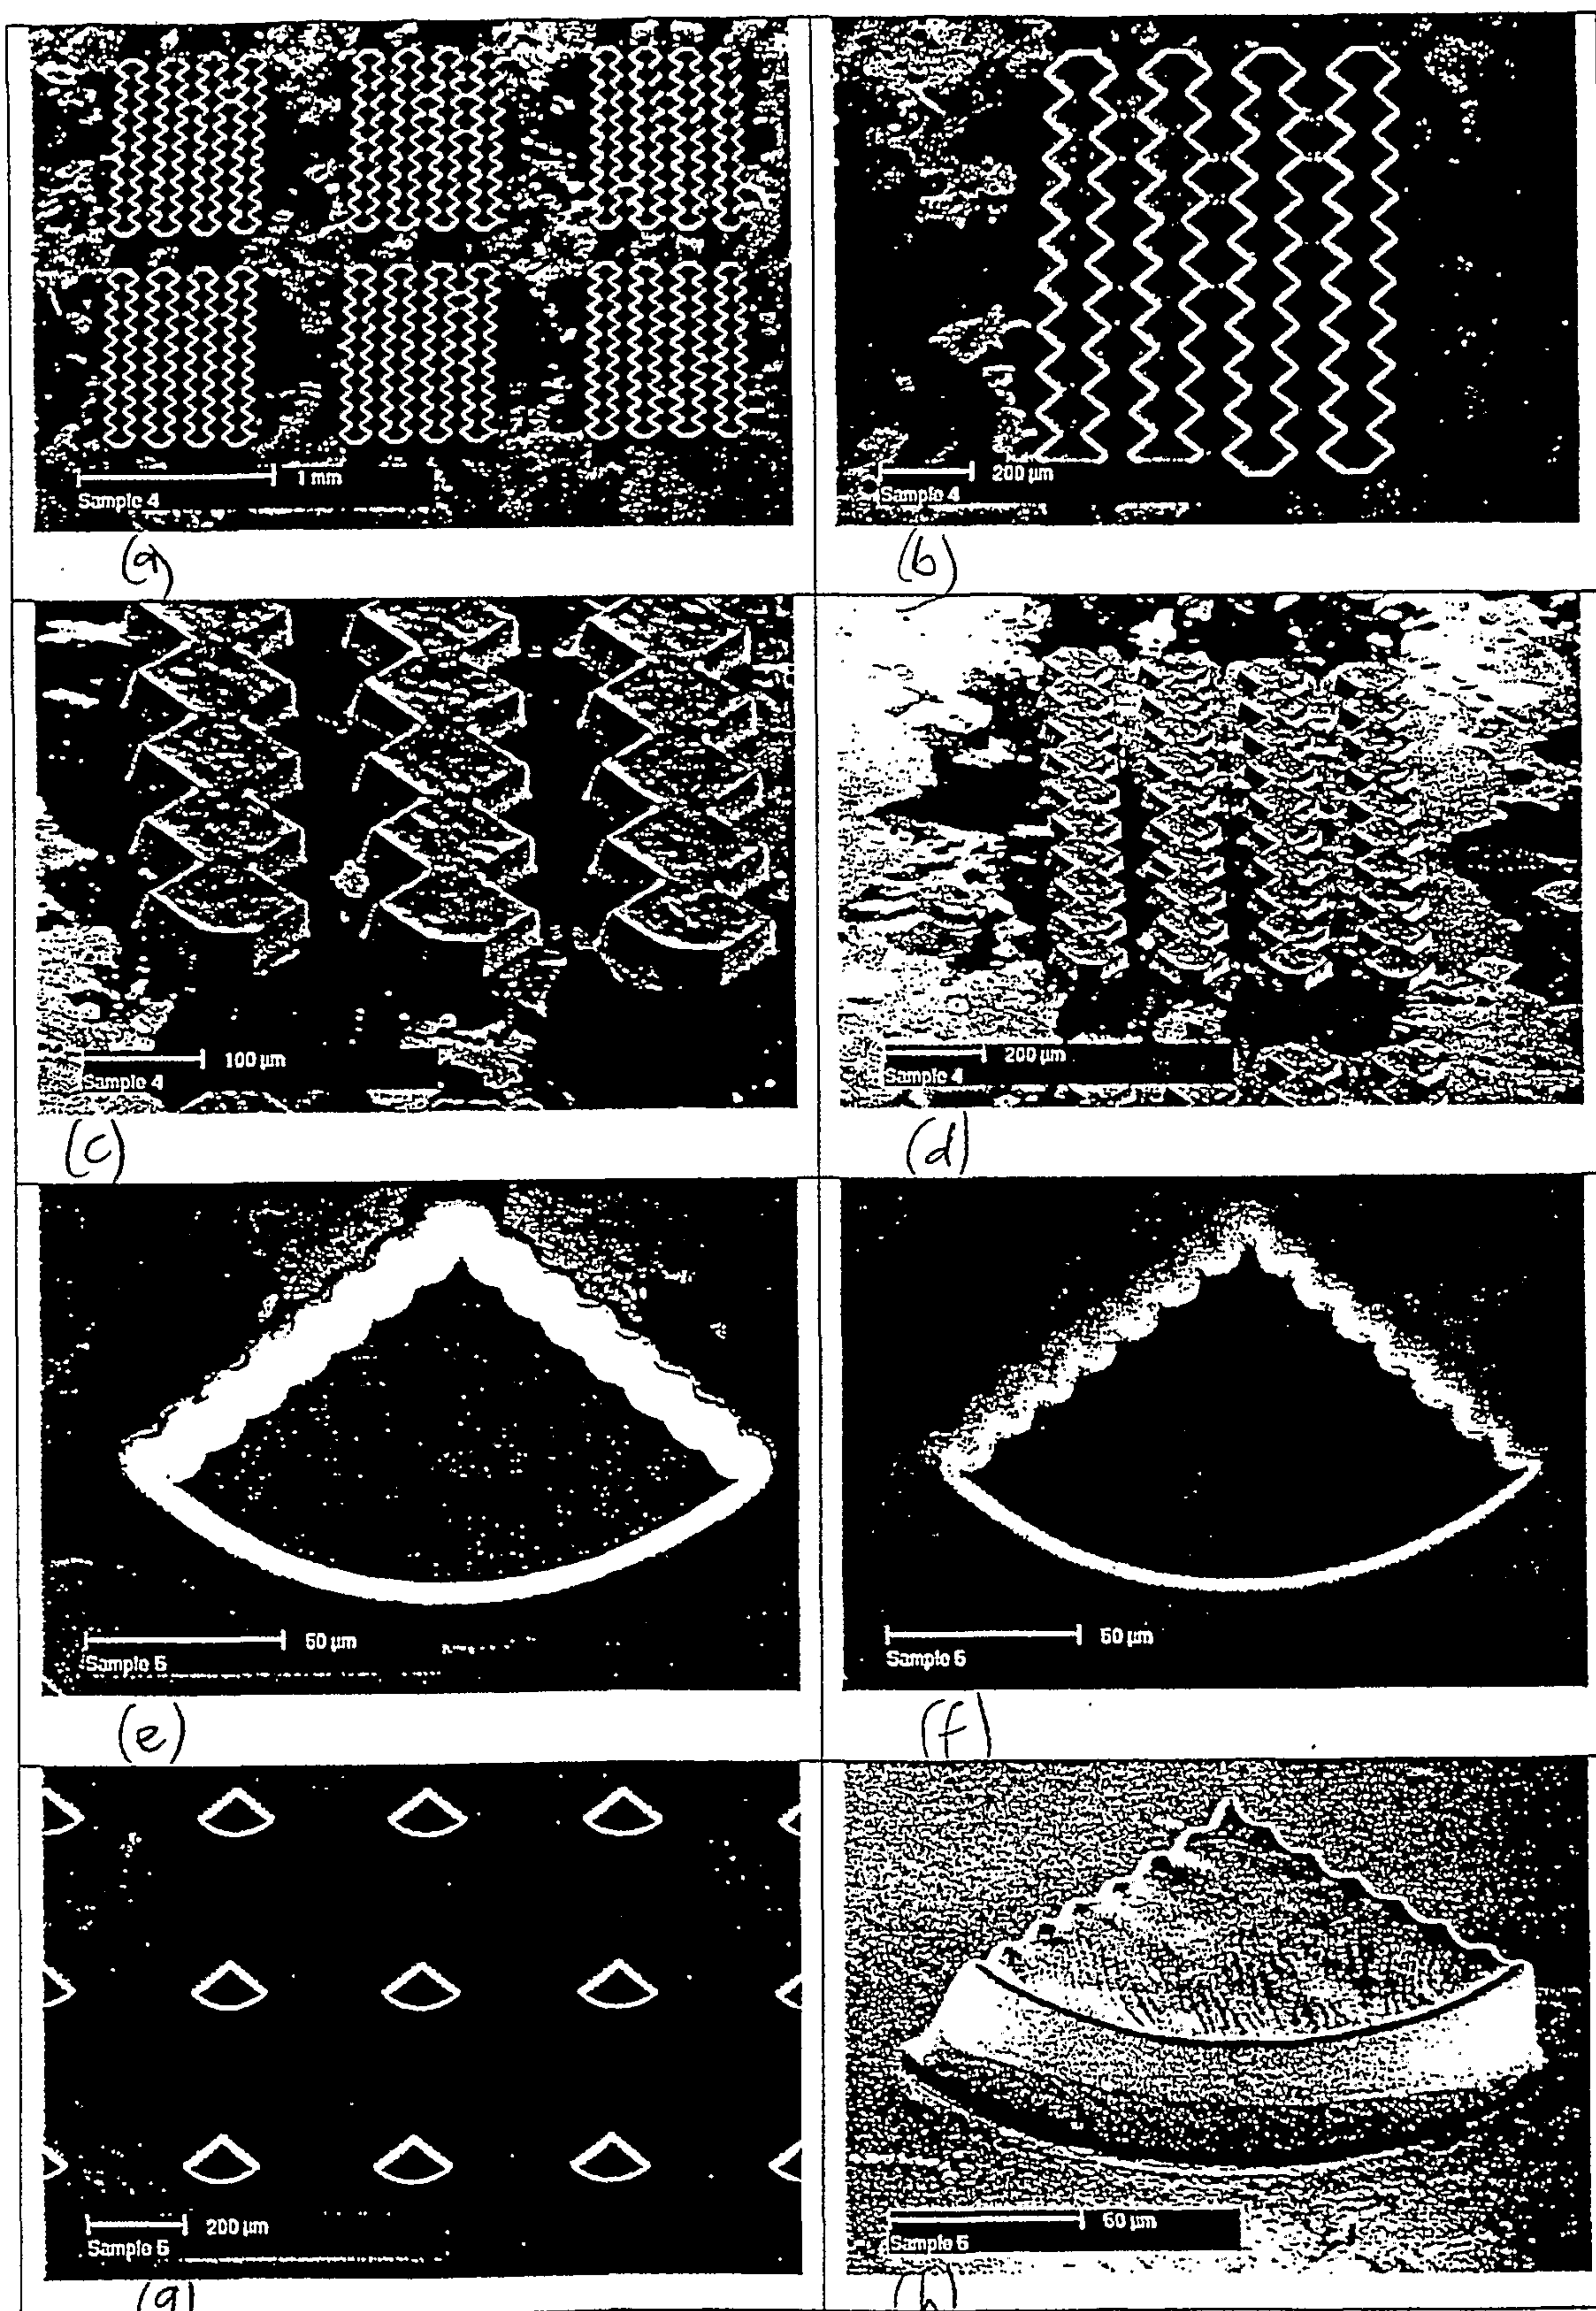


Figure 15

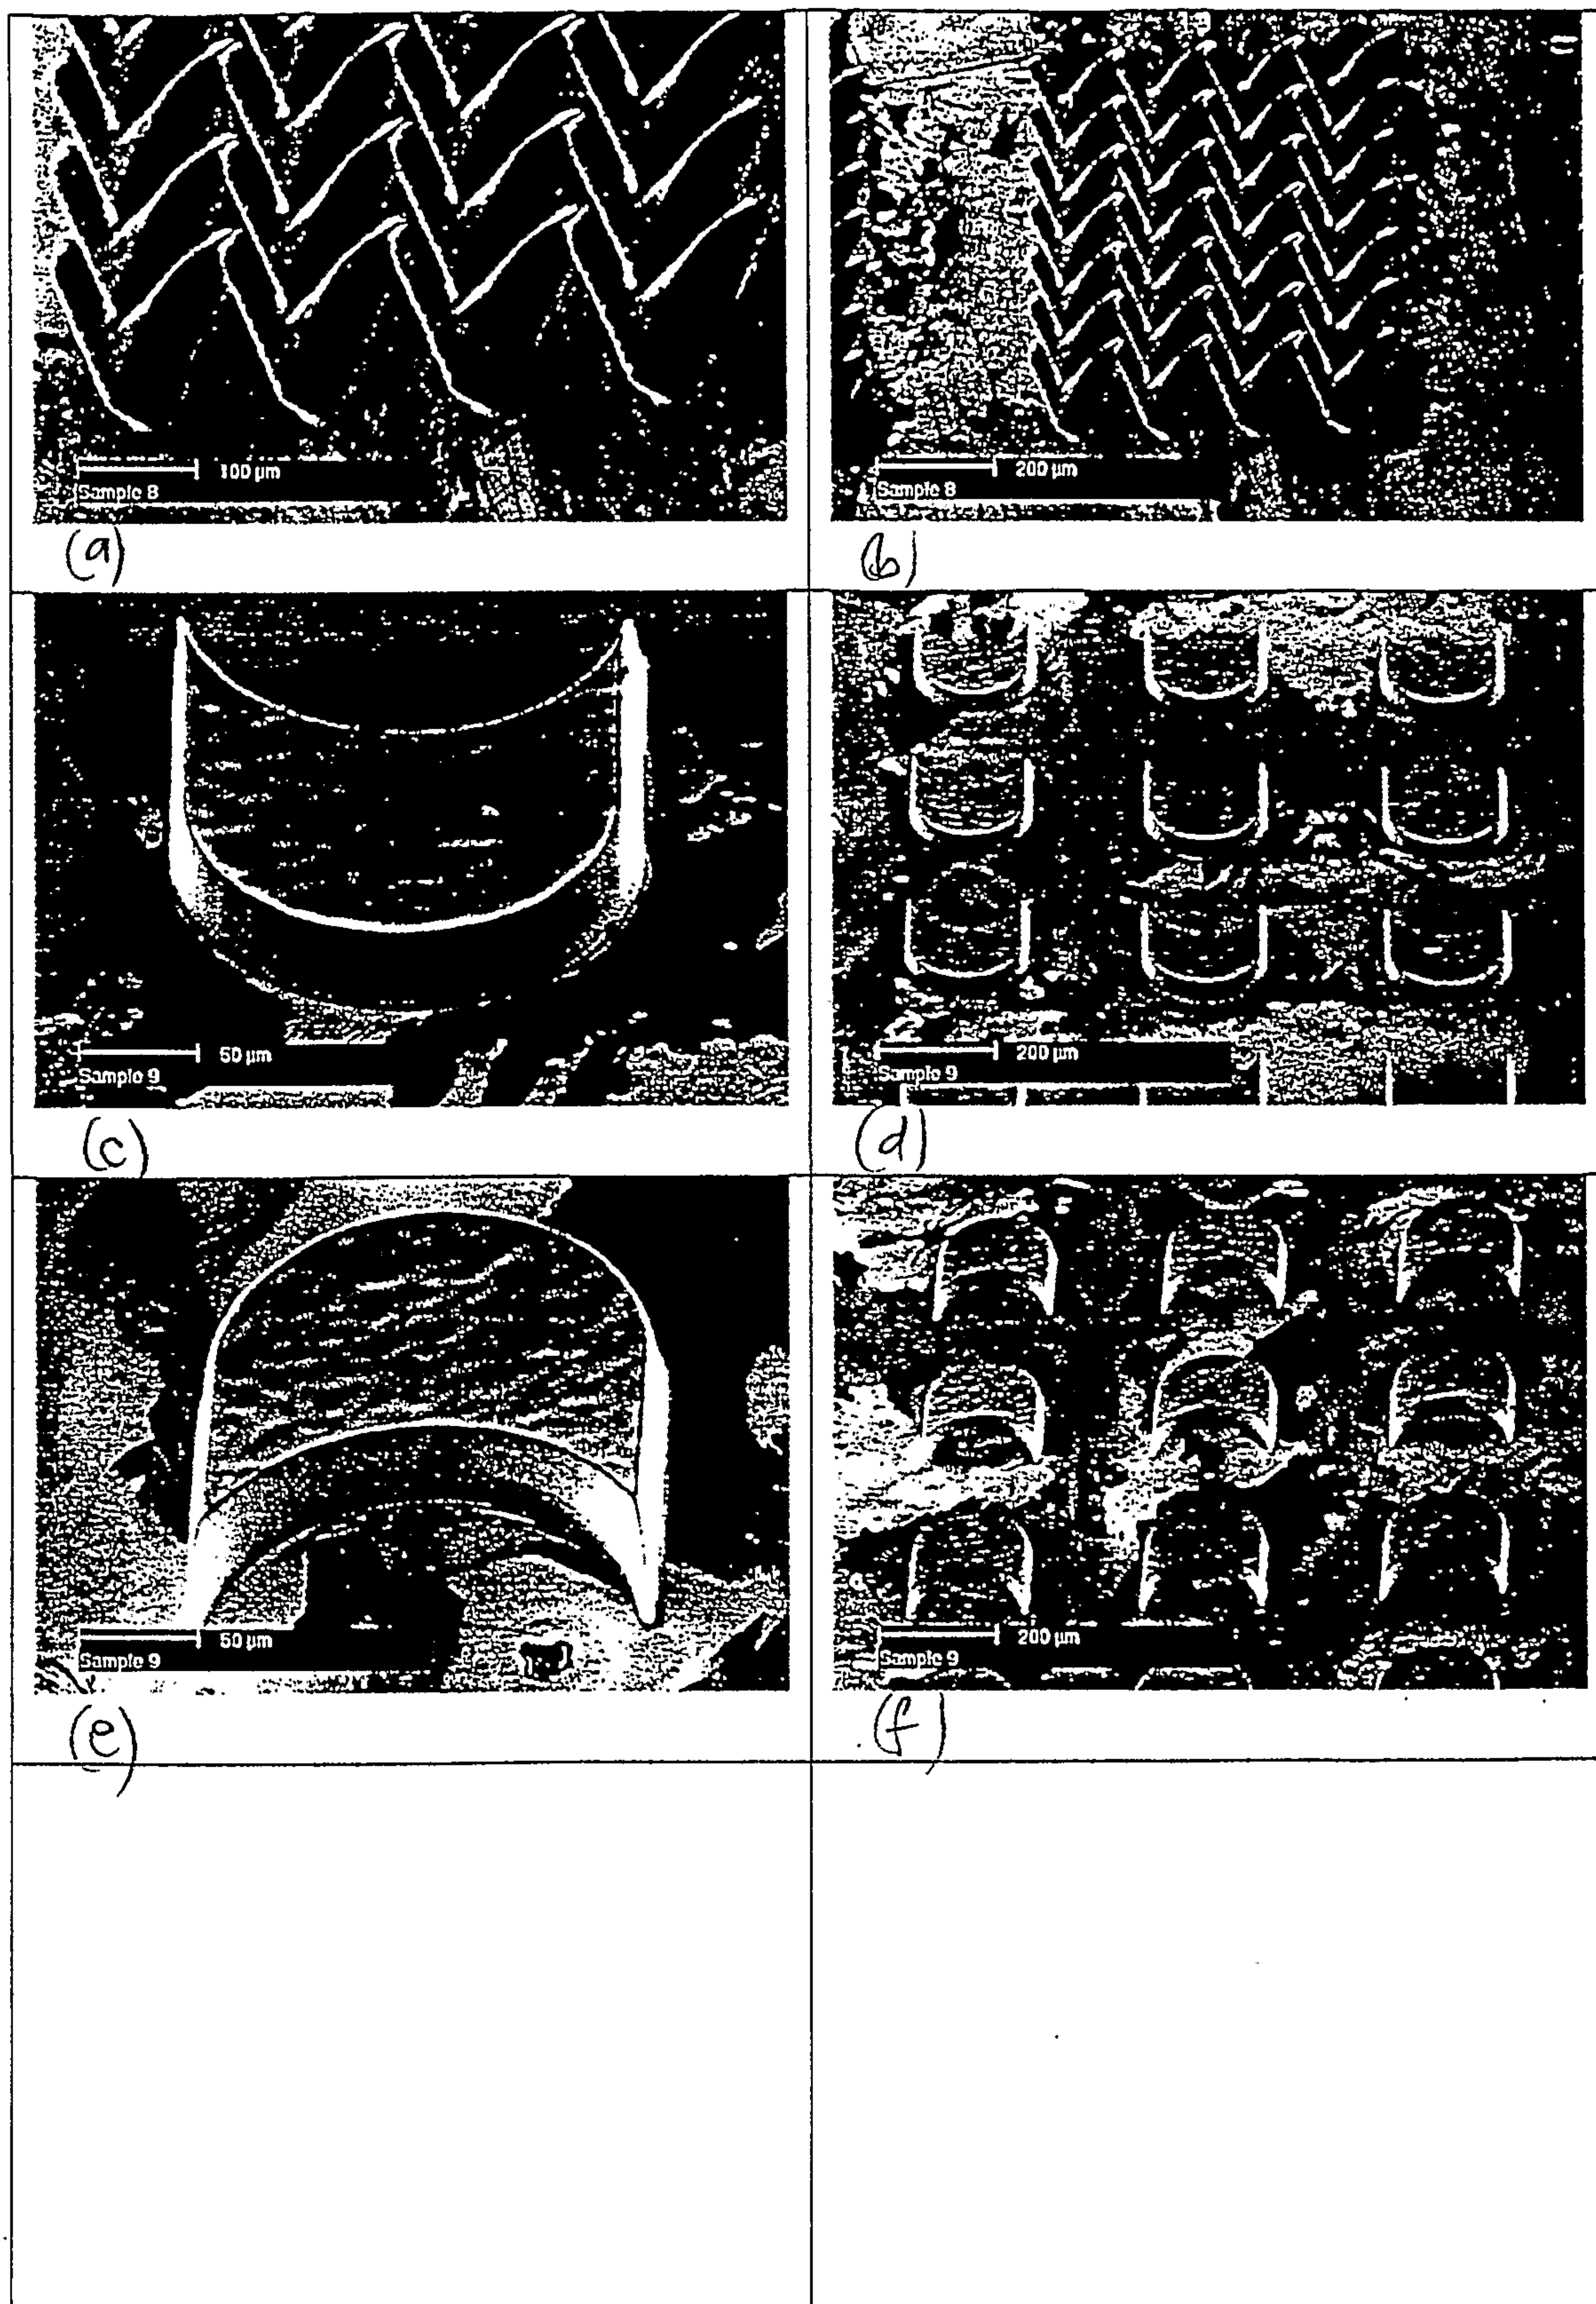


Figure 1b

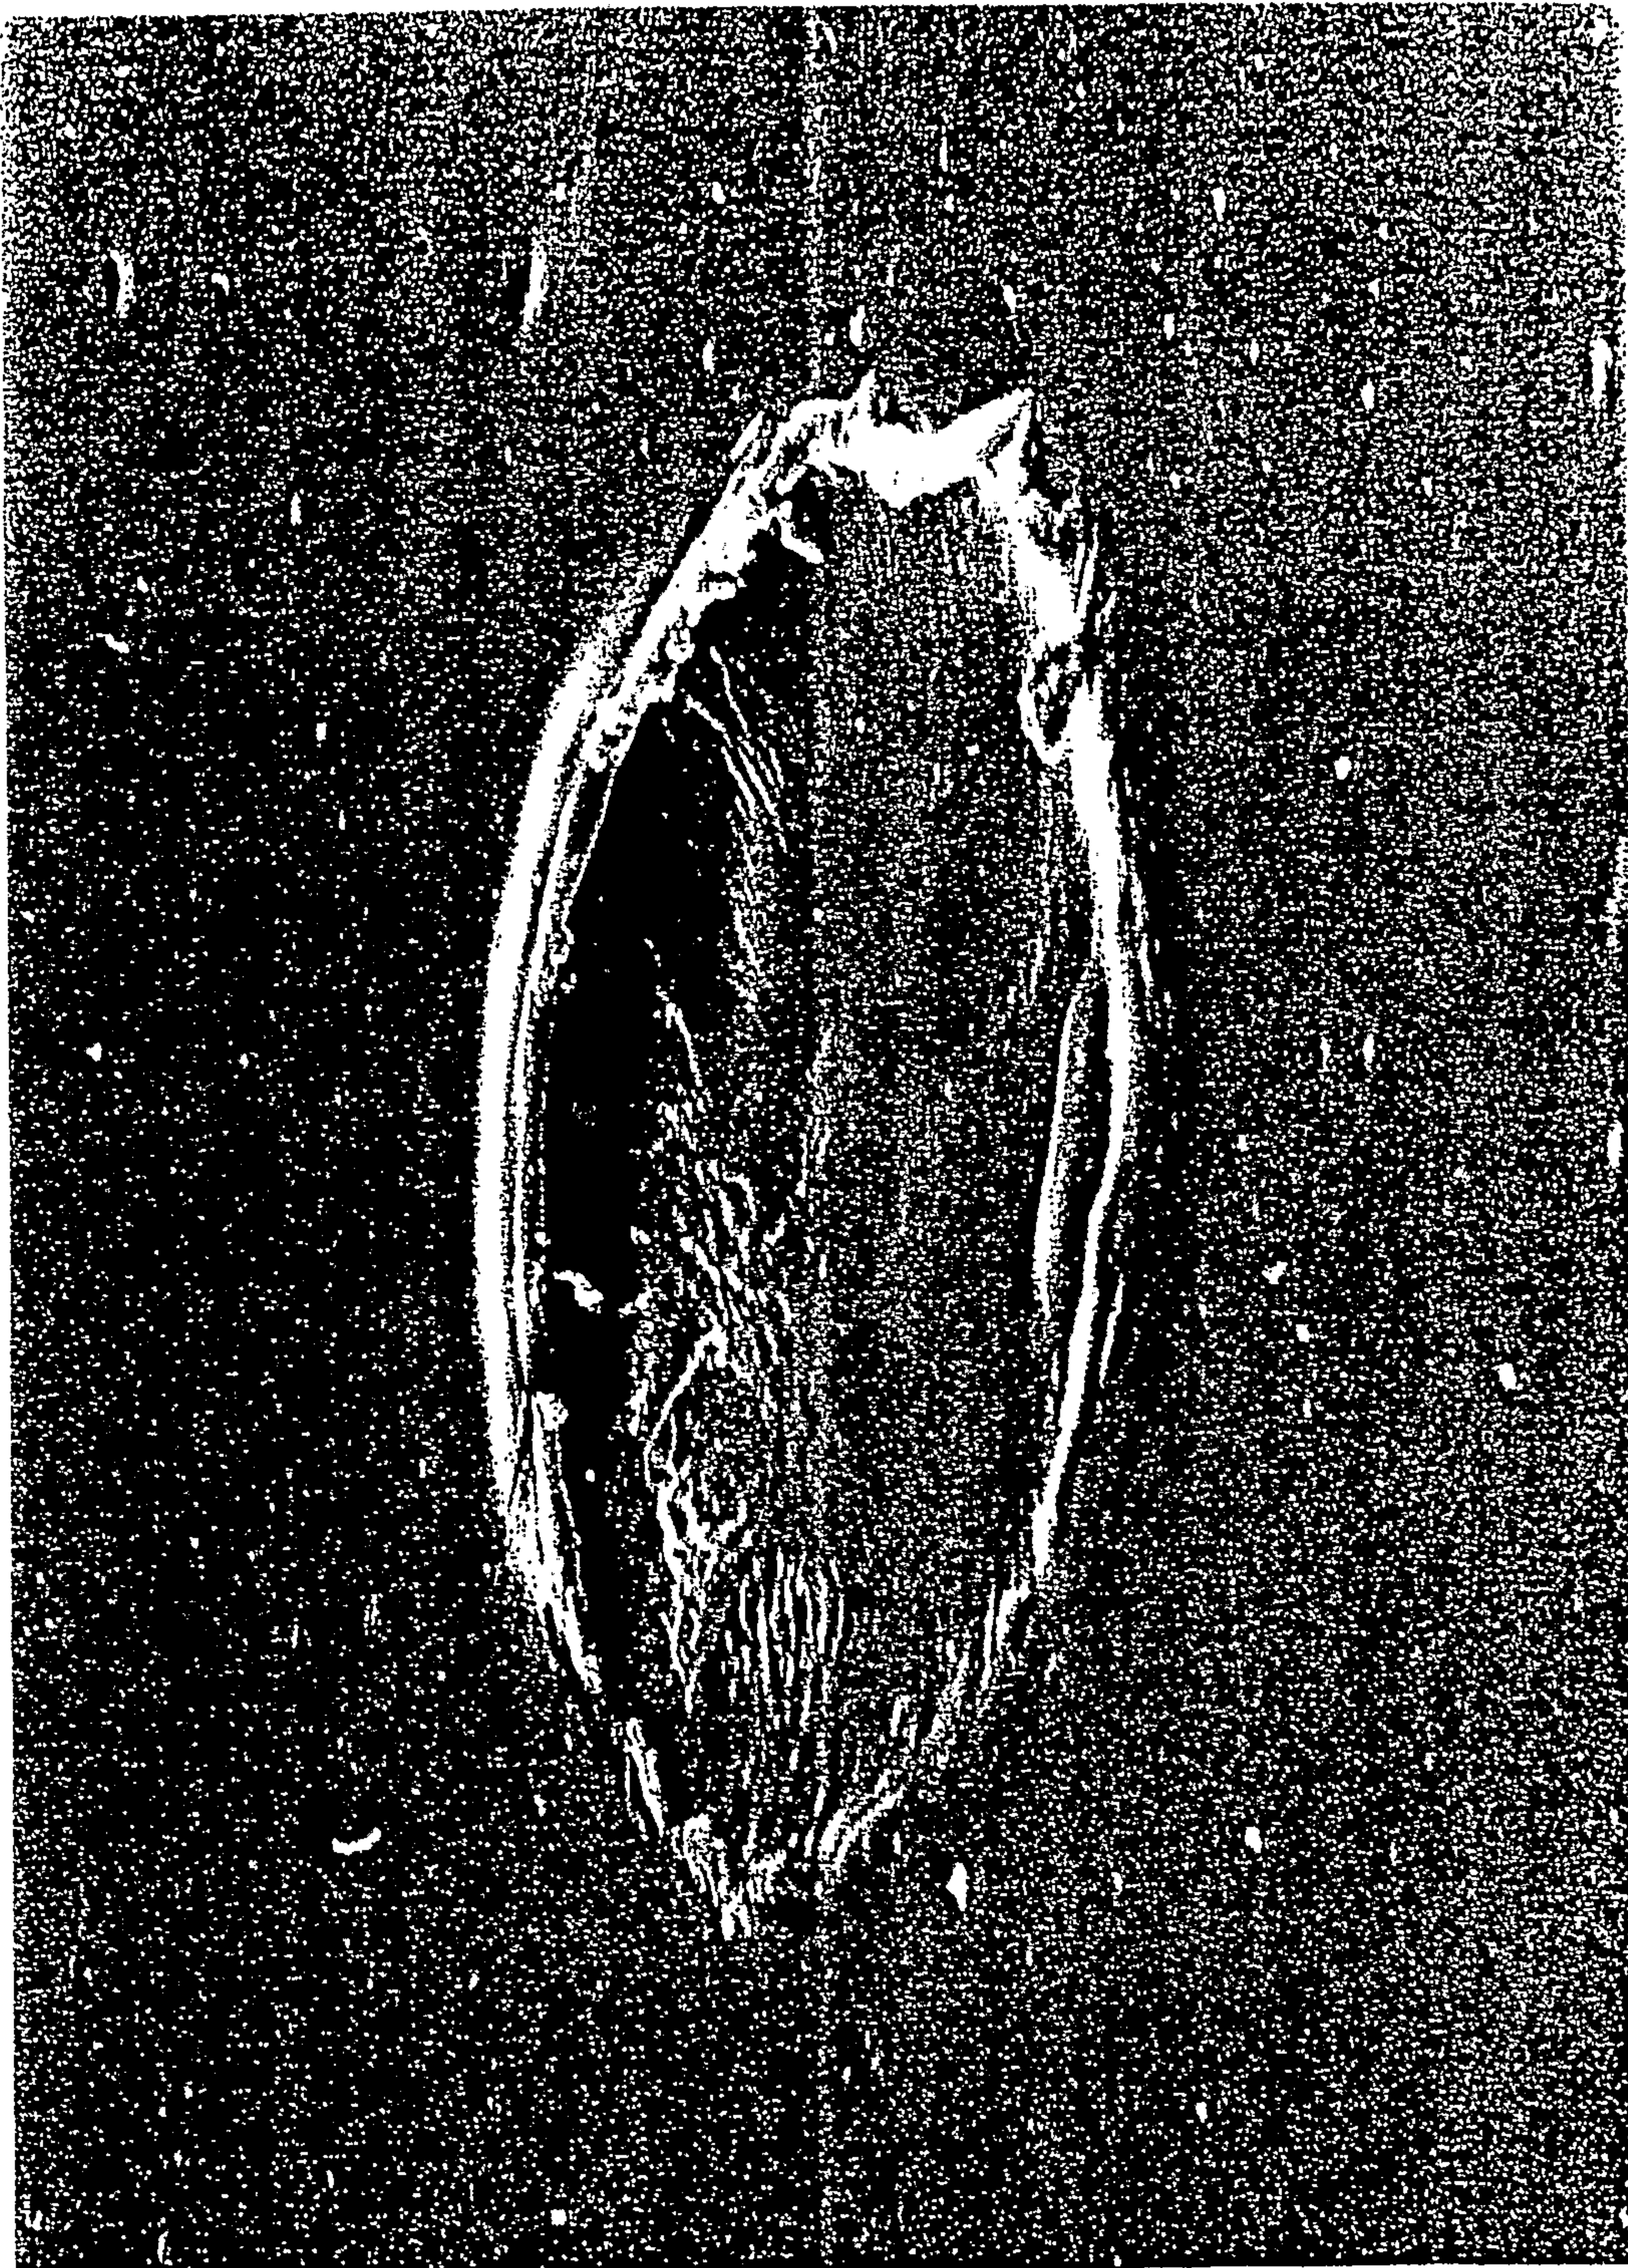


Figure 17



SE surface image, 62 degree tilt. (image021.jpg)

Figure 18



Figure 19

L6/17

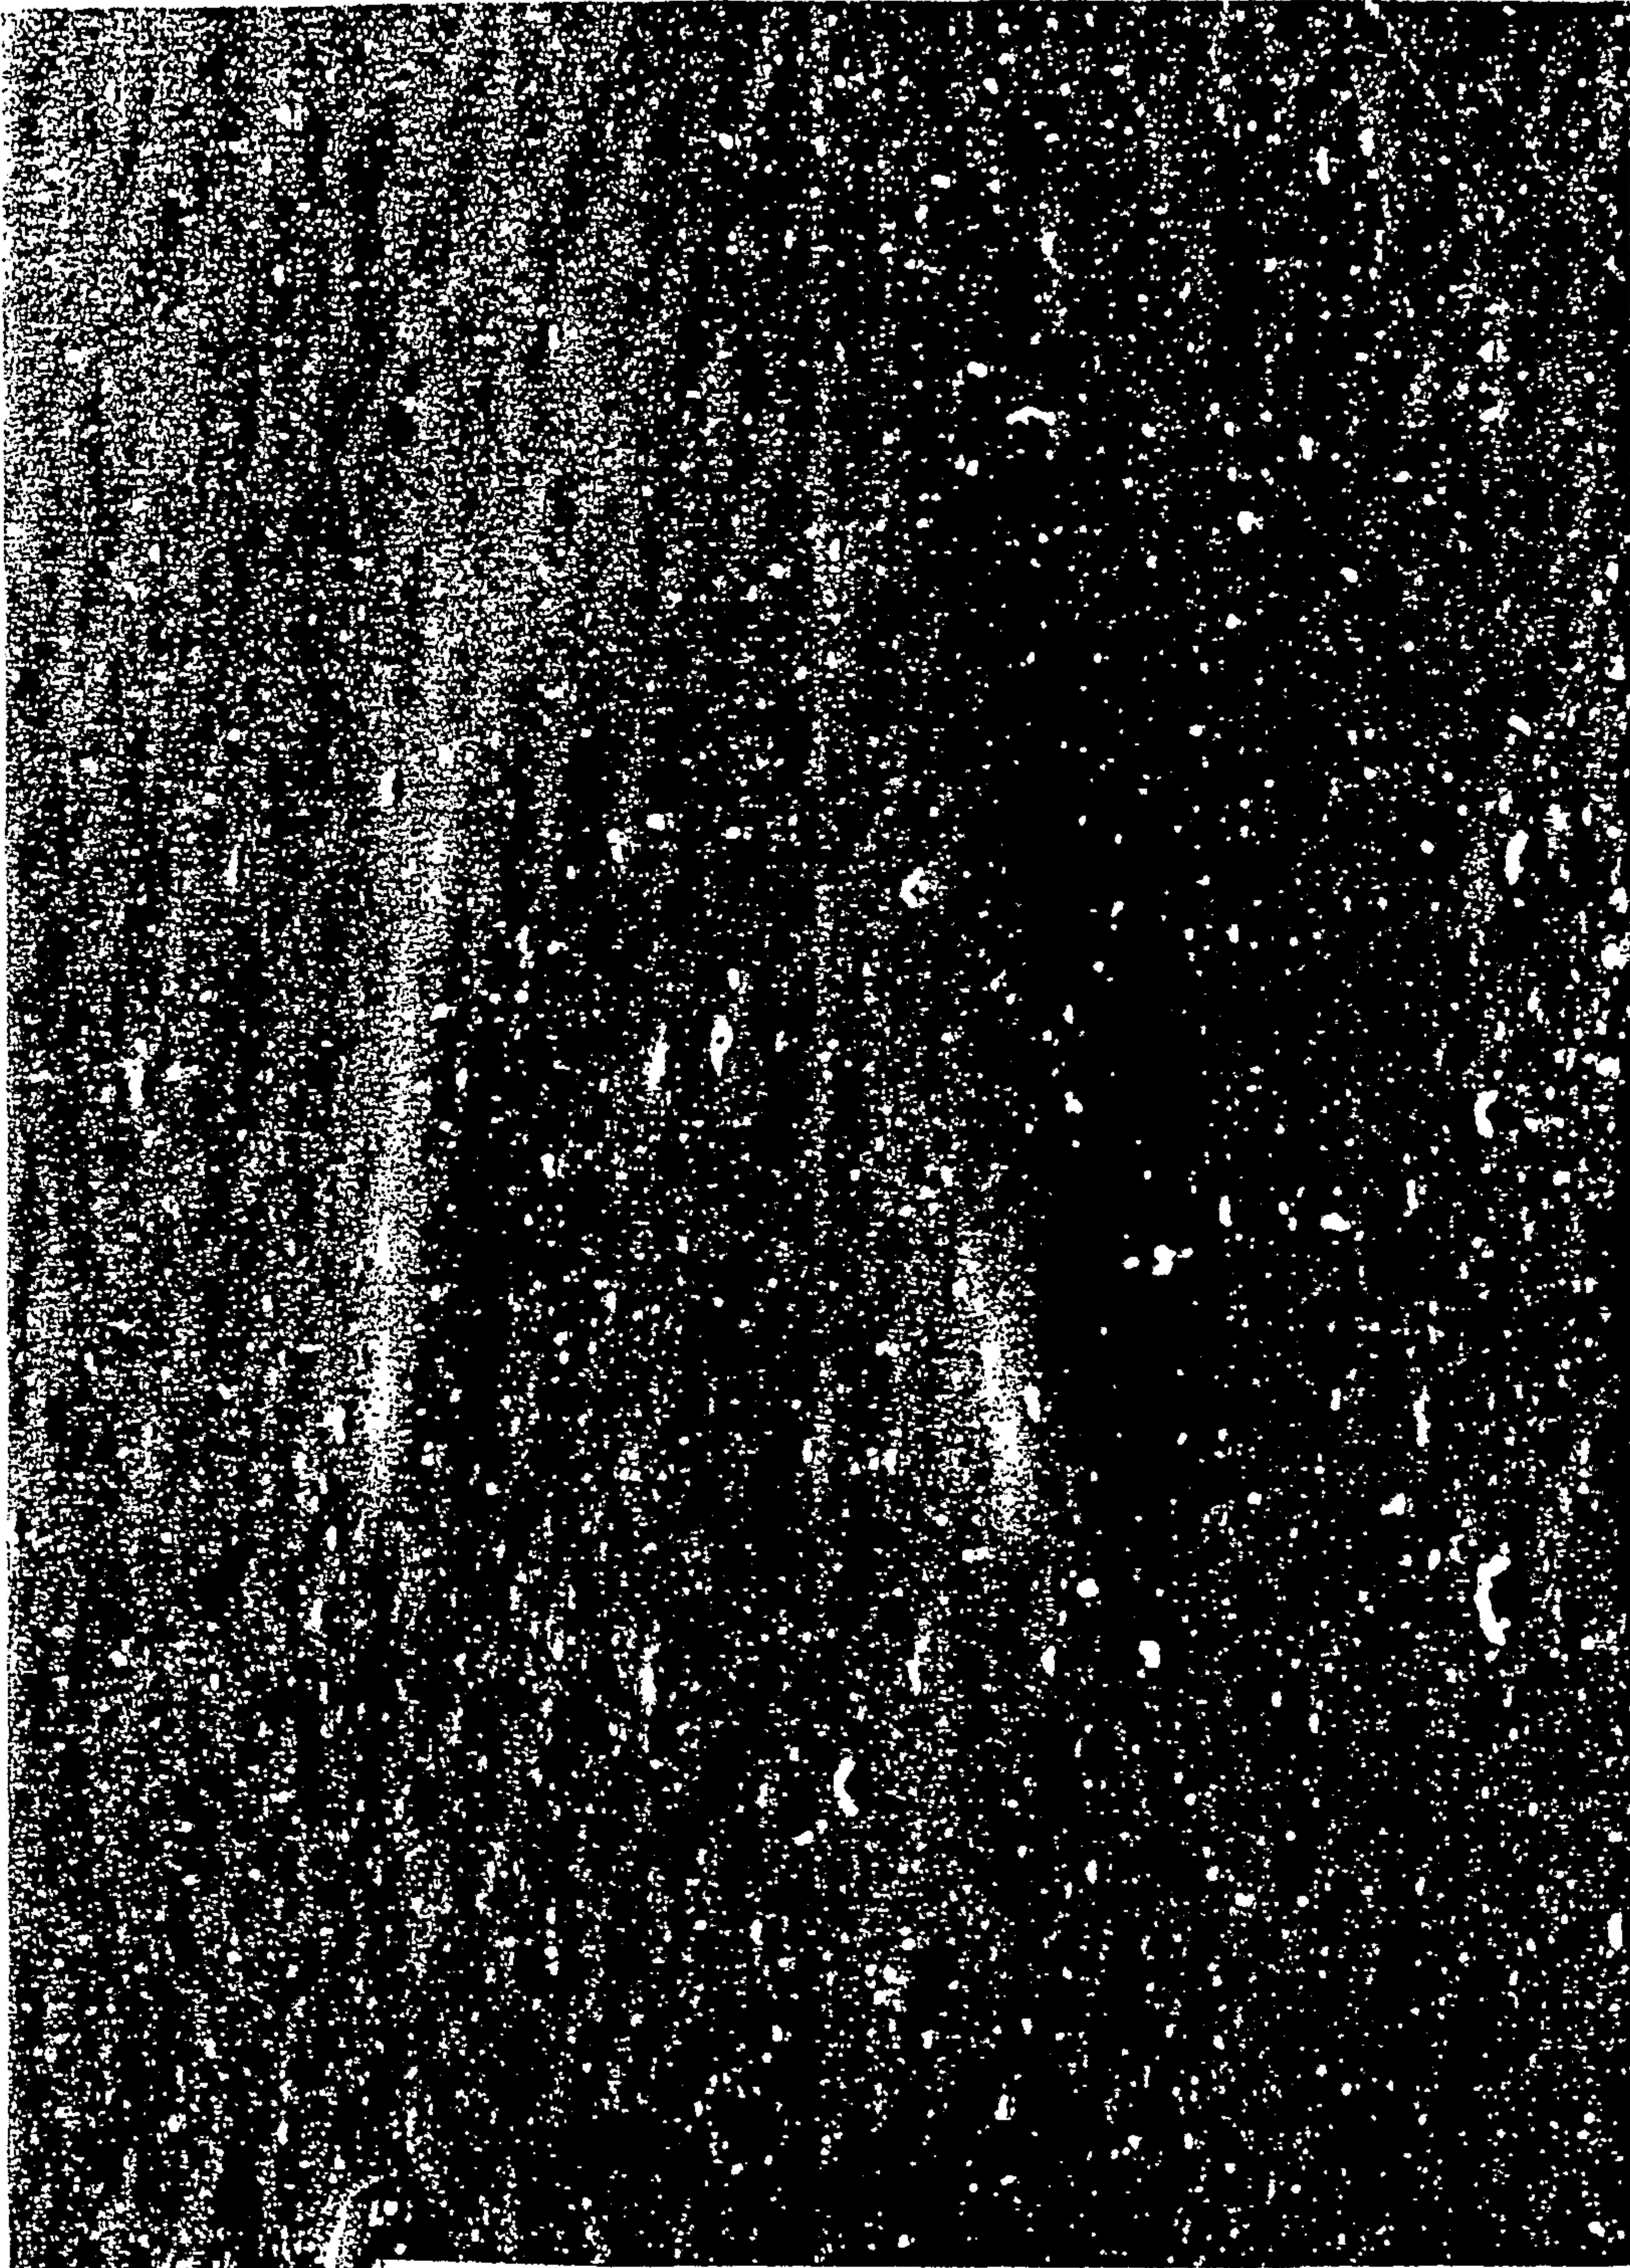


Figure 20.

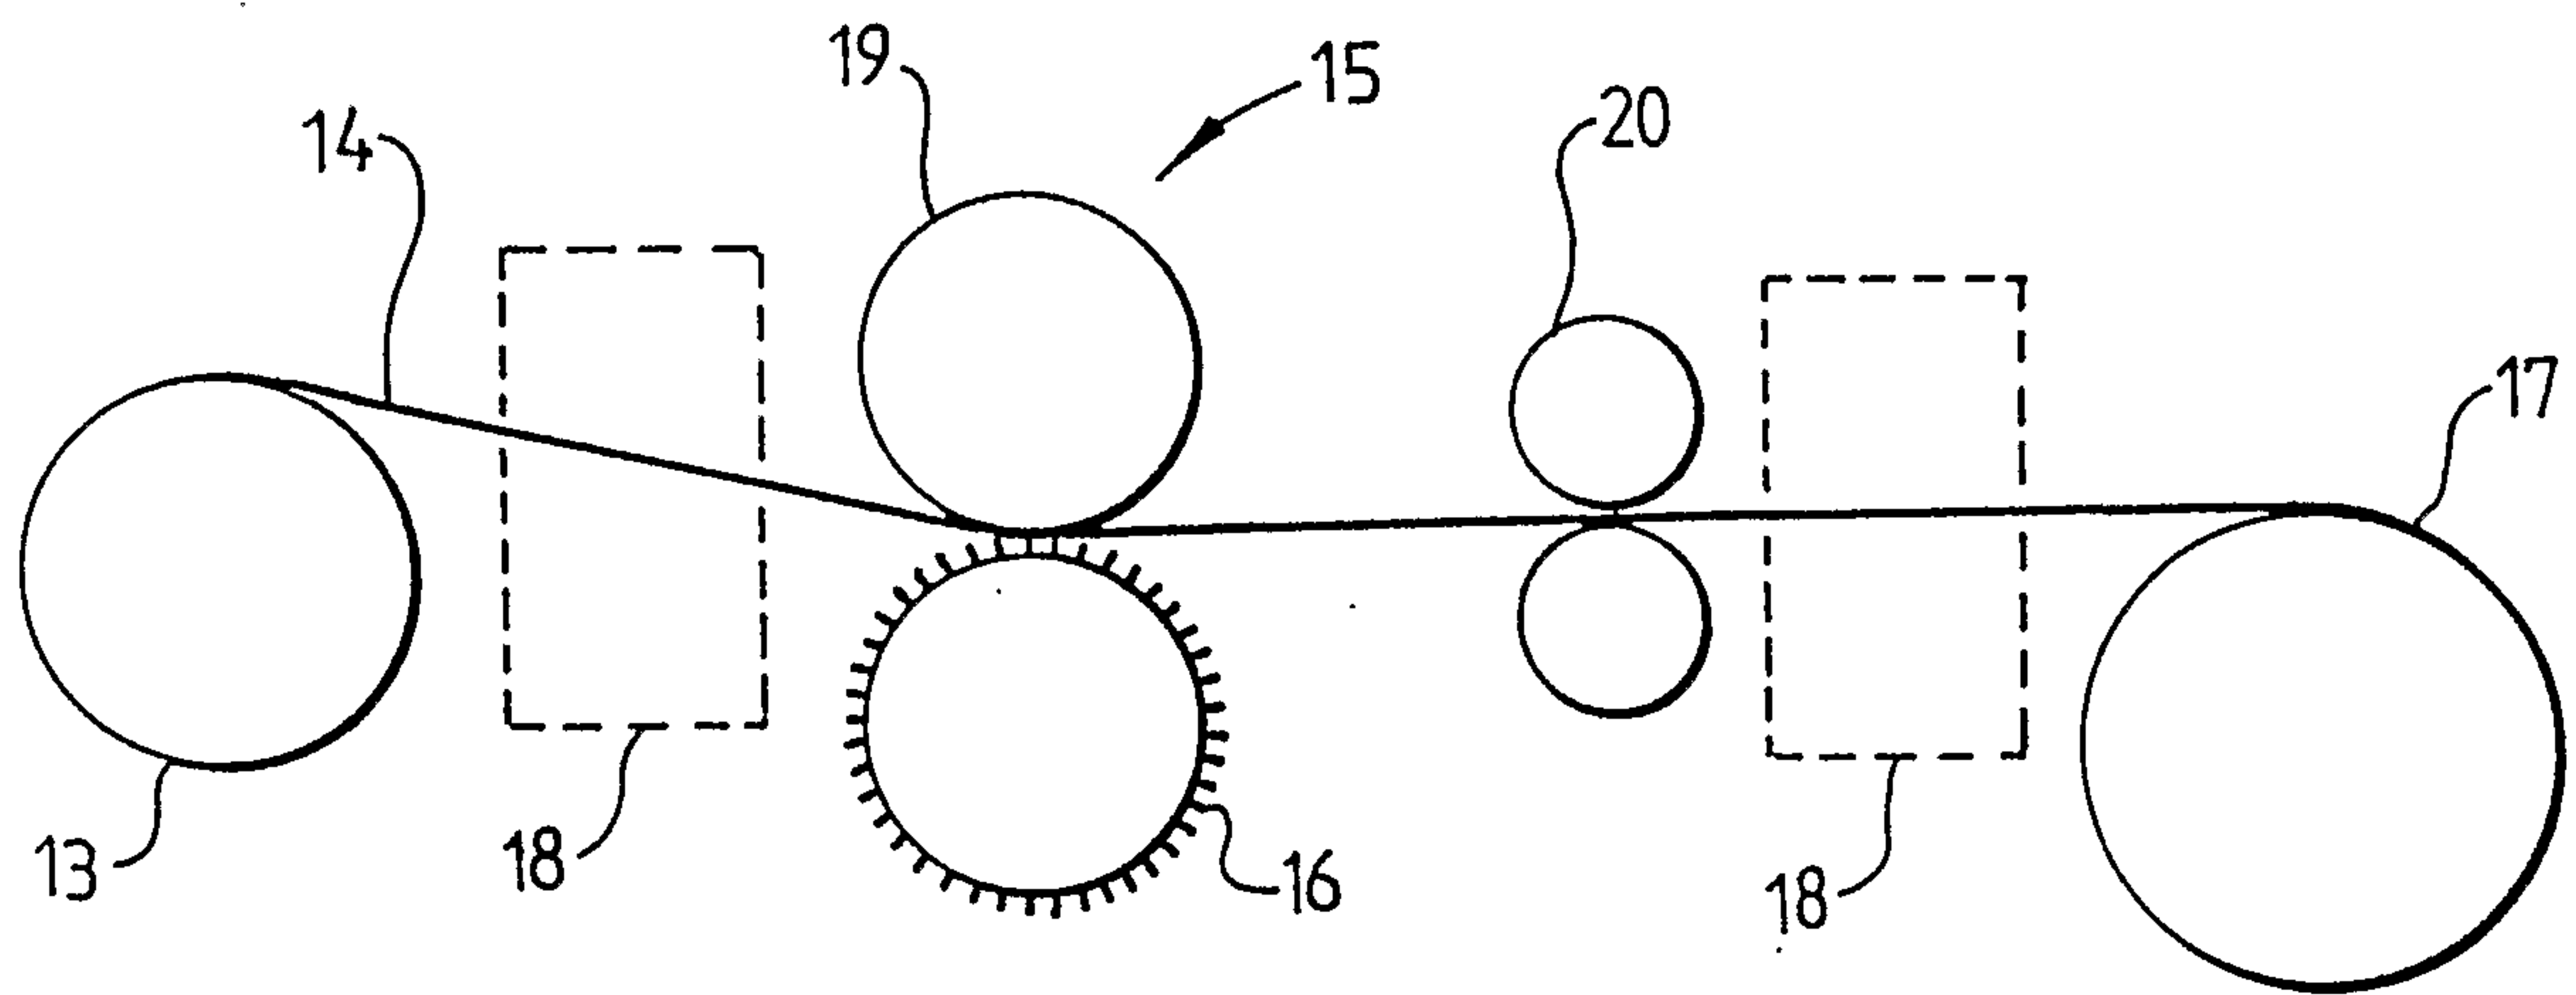


FIG. 21.

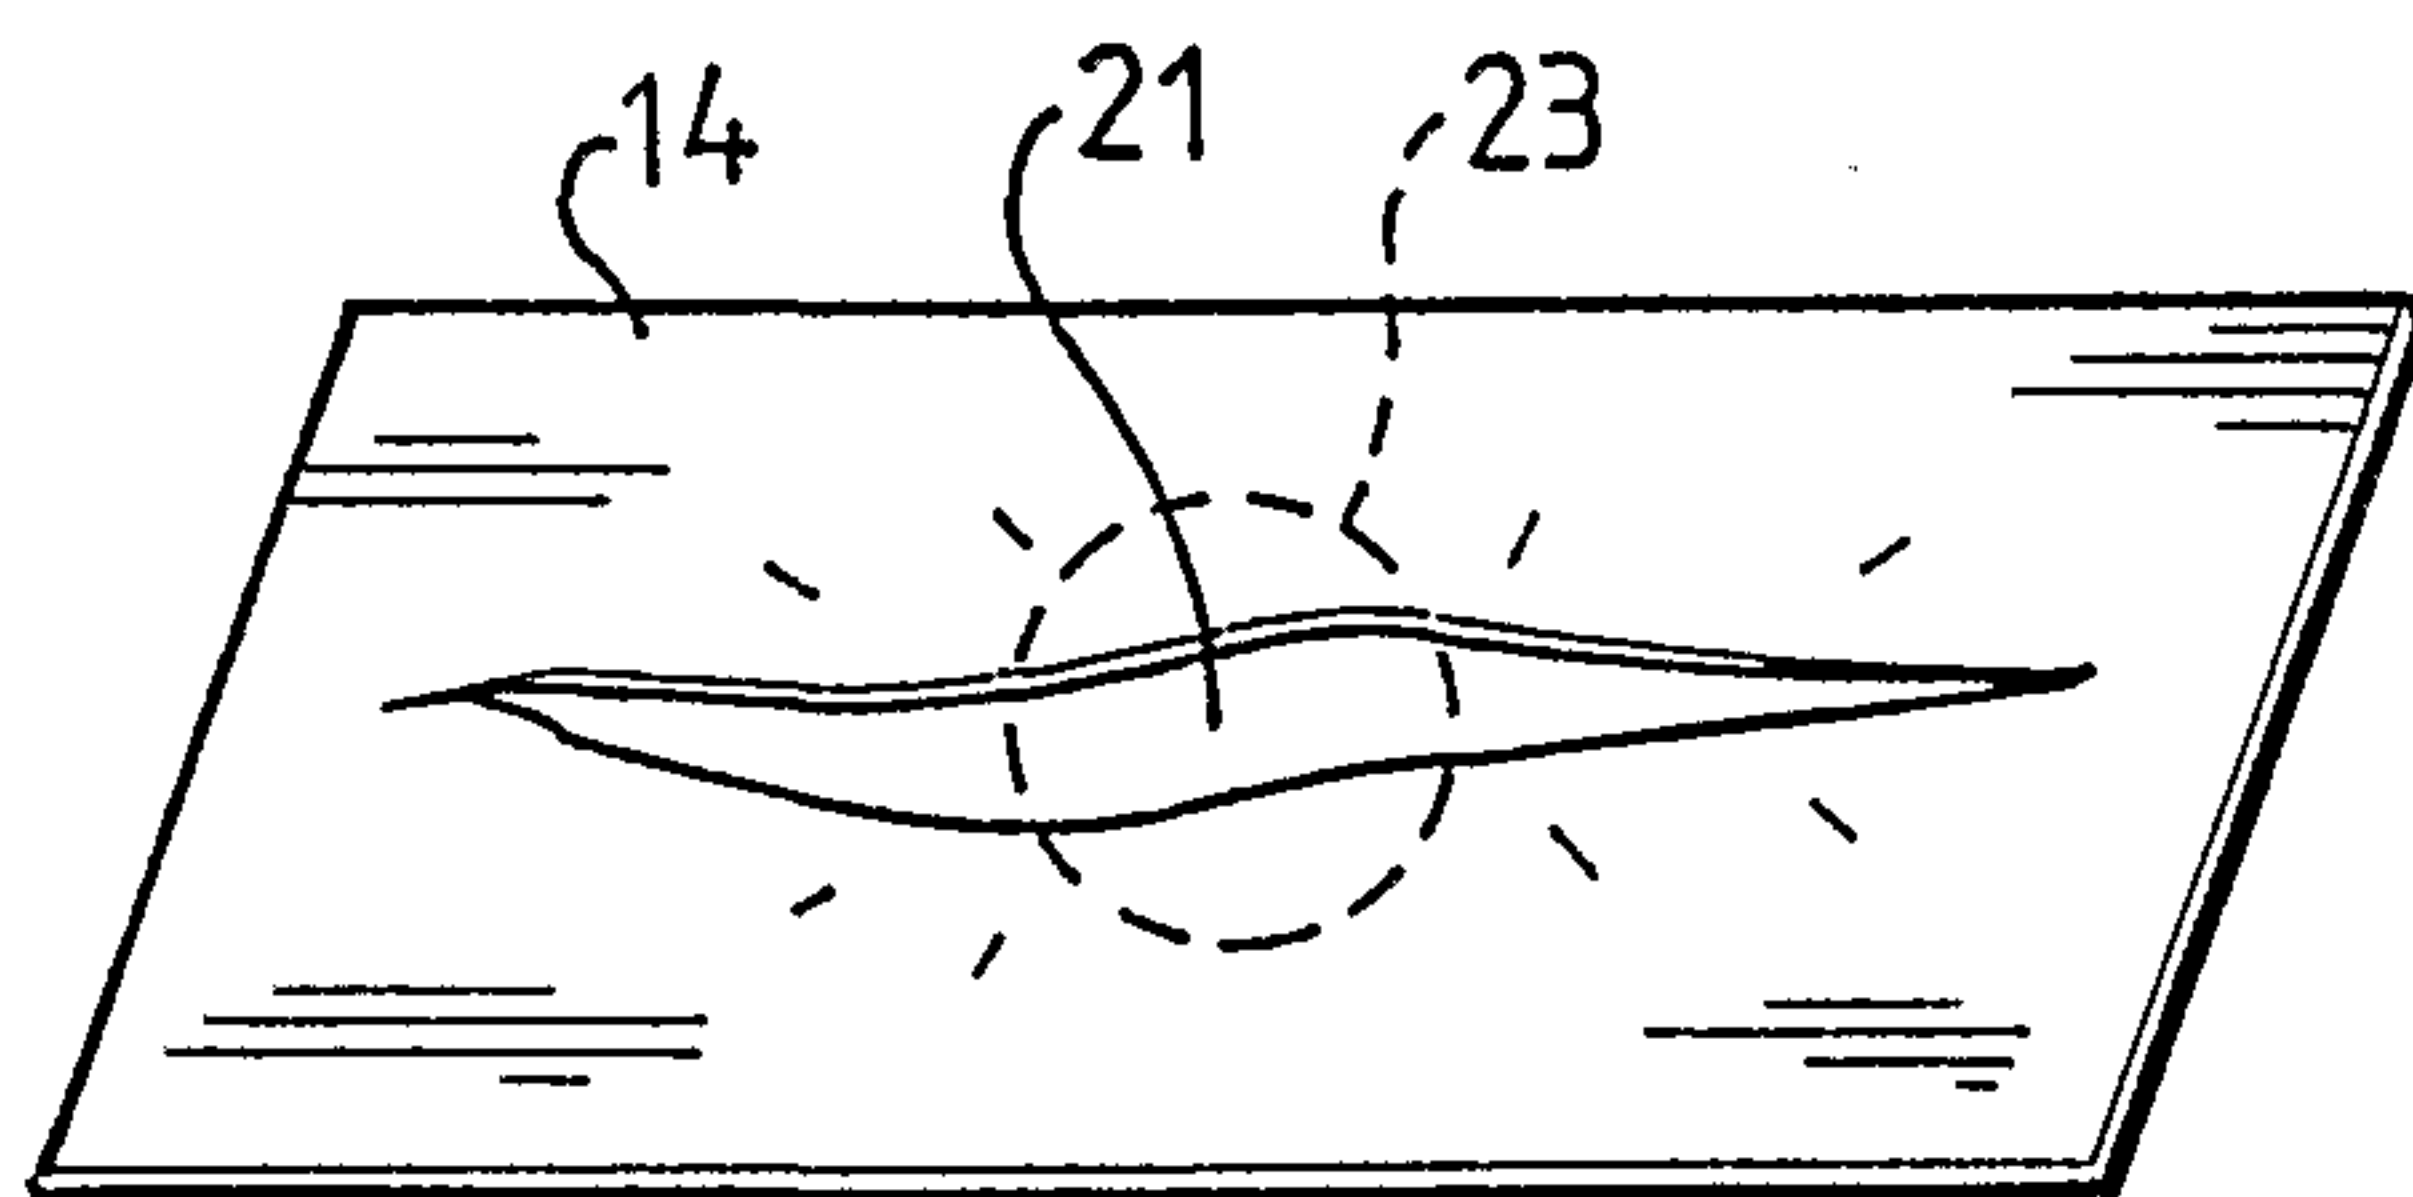


FIG. 22.

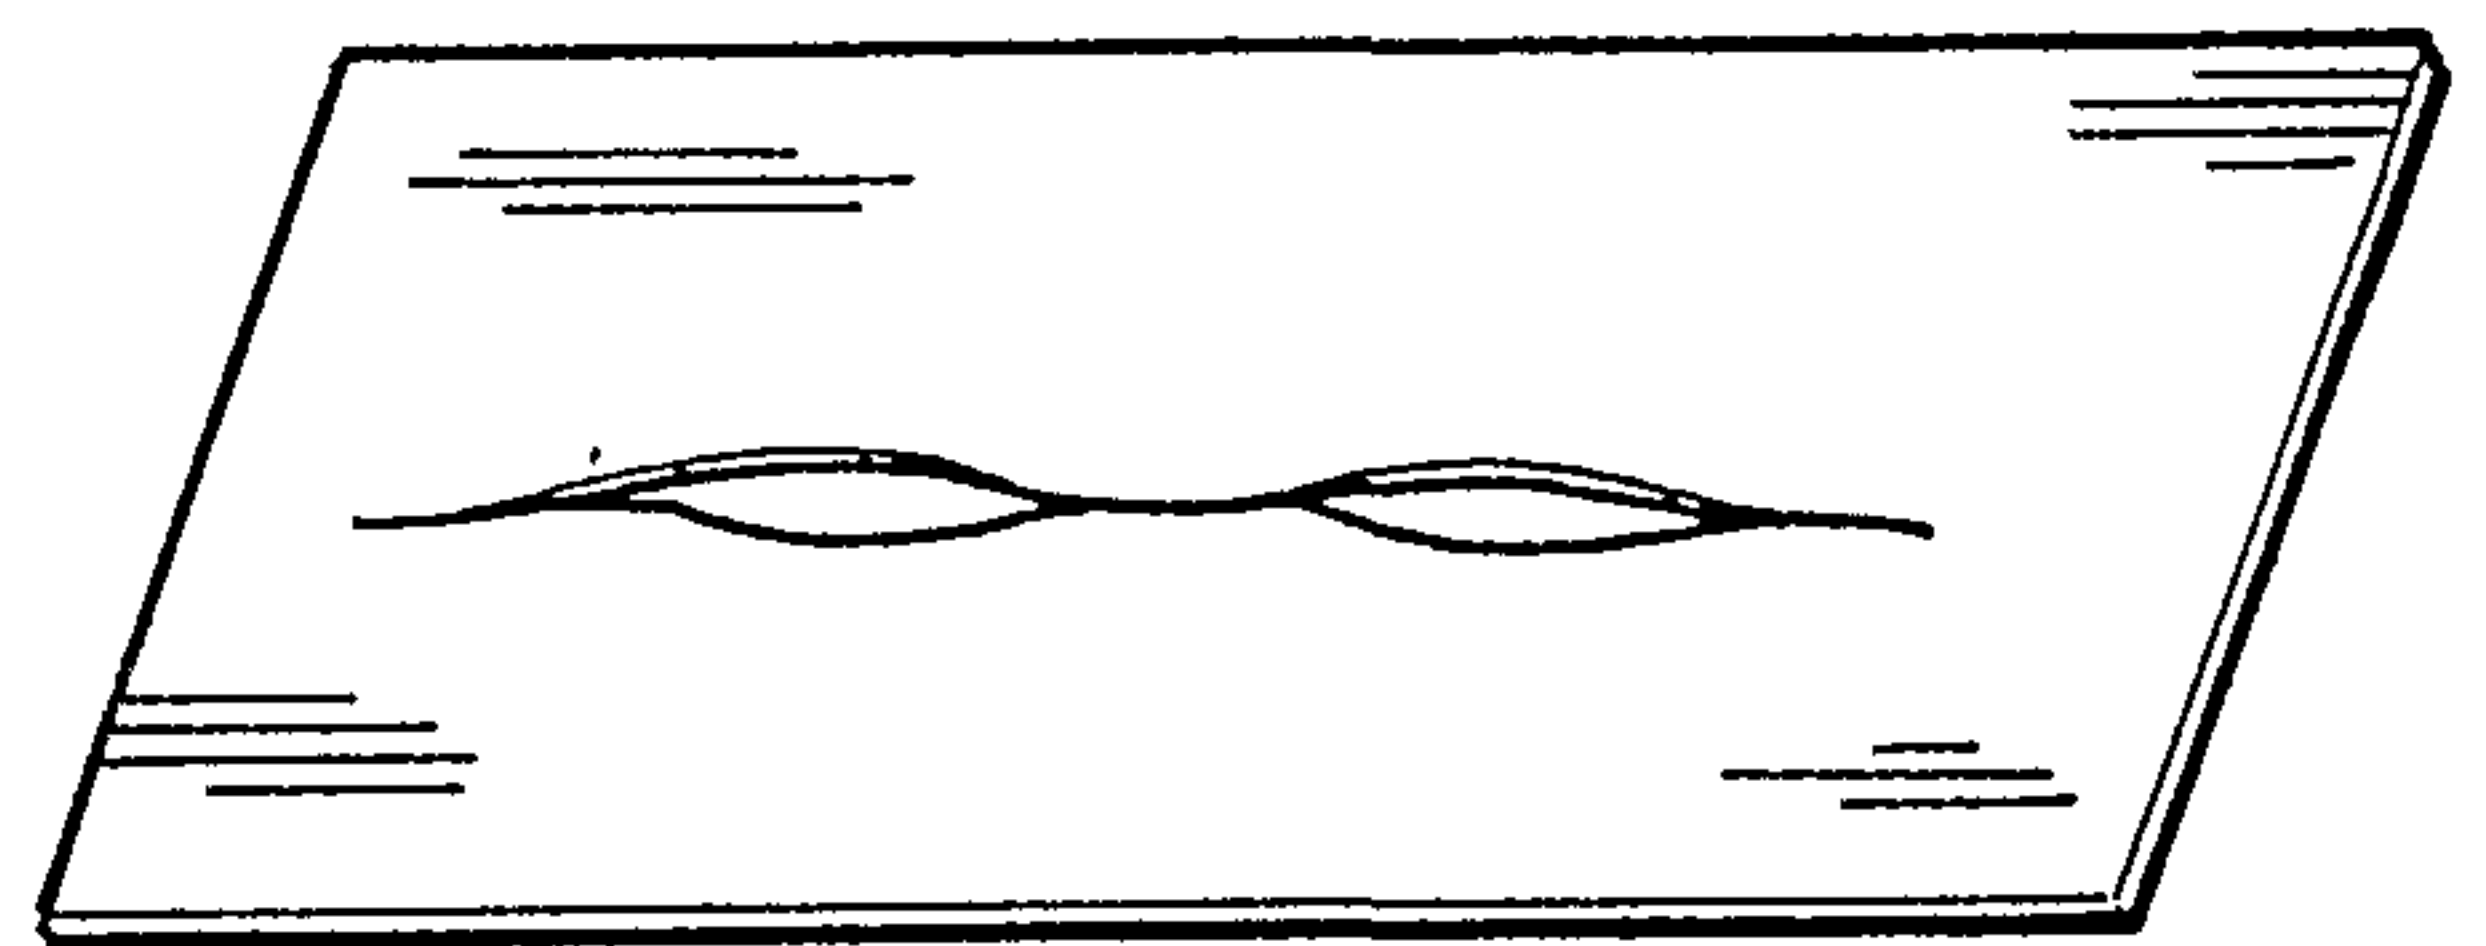


FIG. 23.

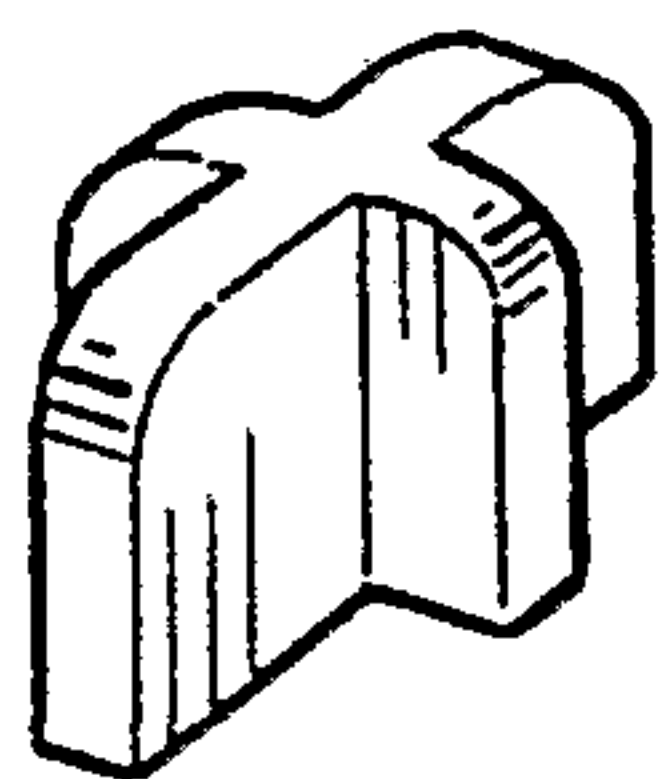


FIG. 24.






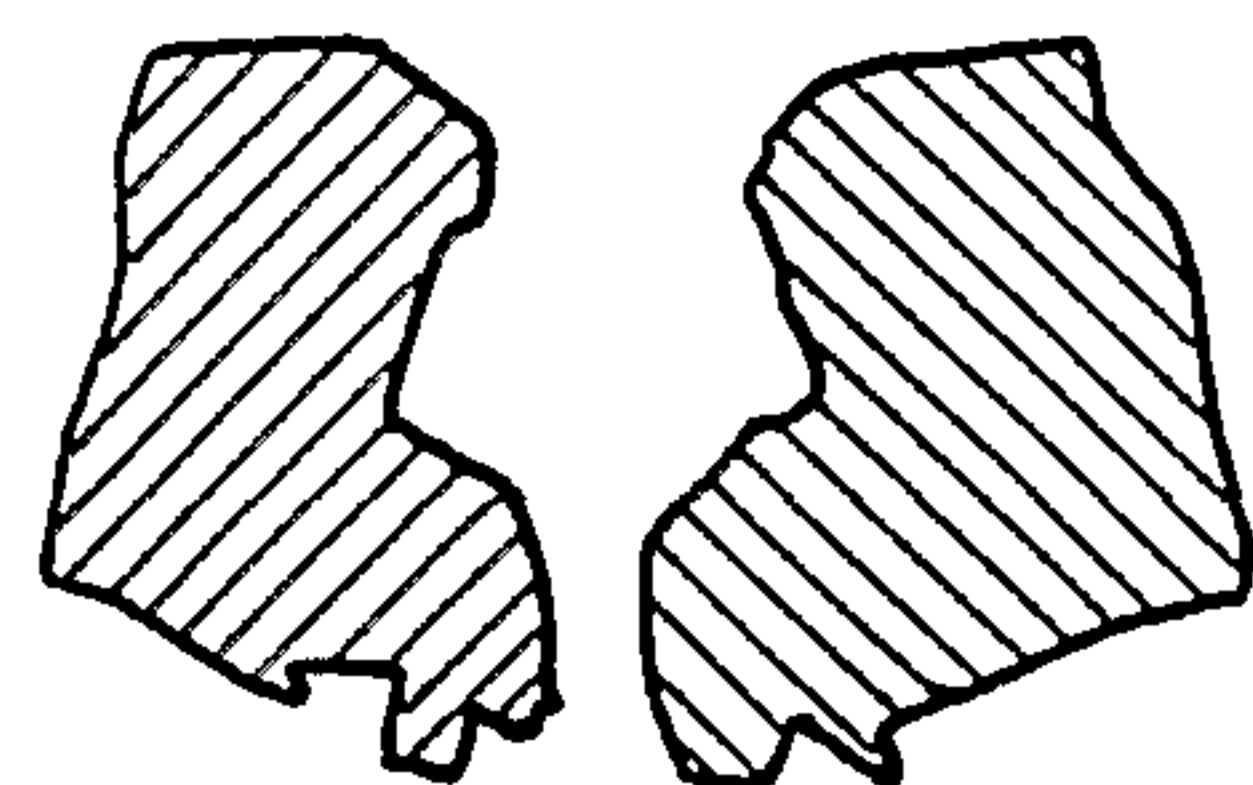


FIG. 25.

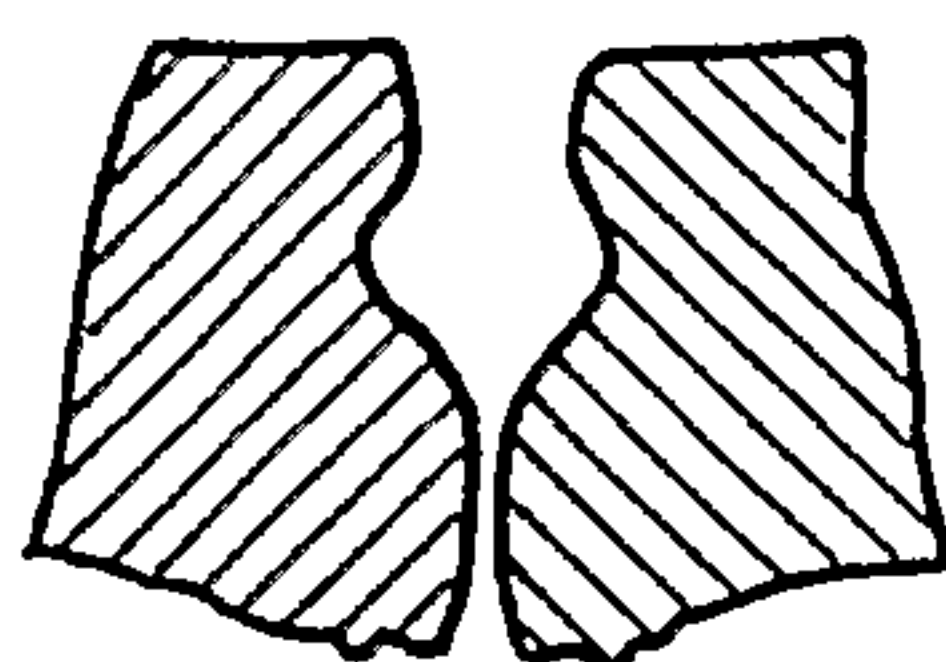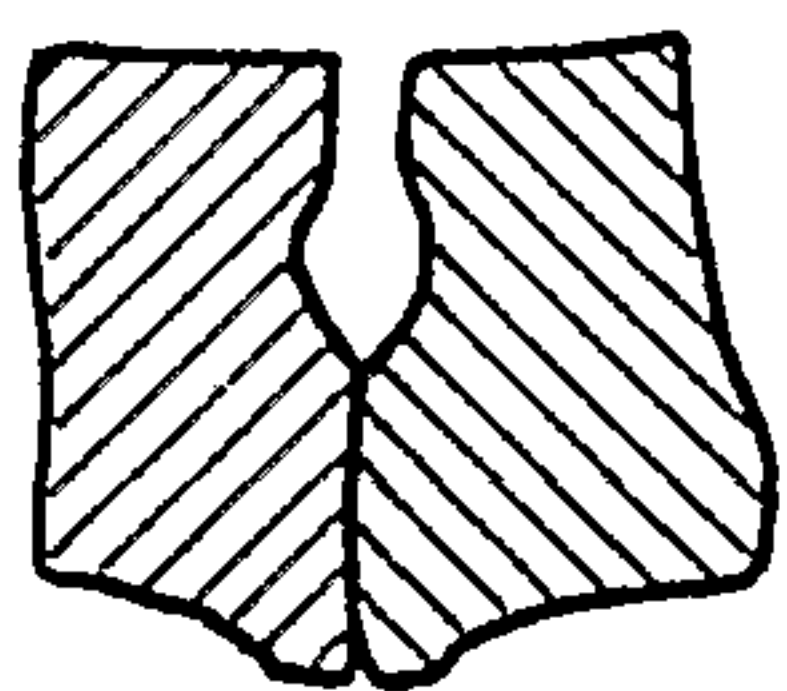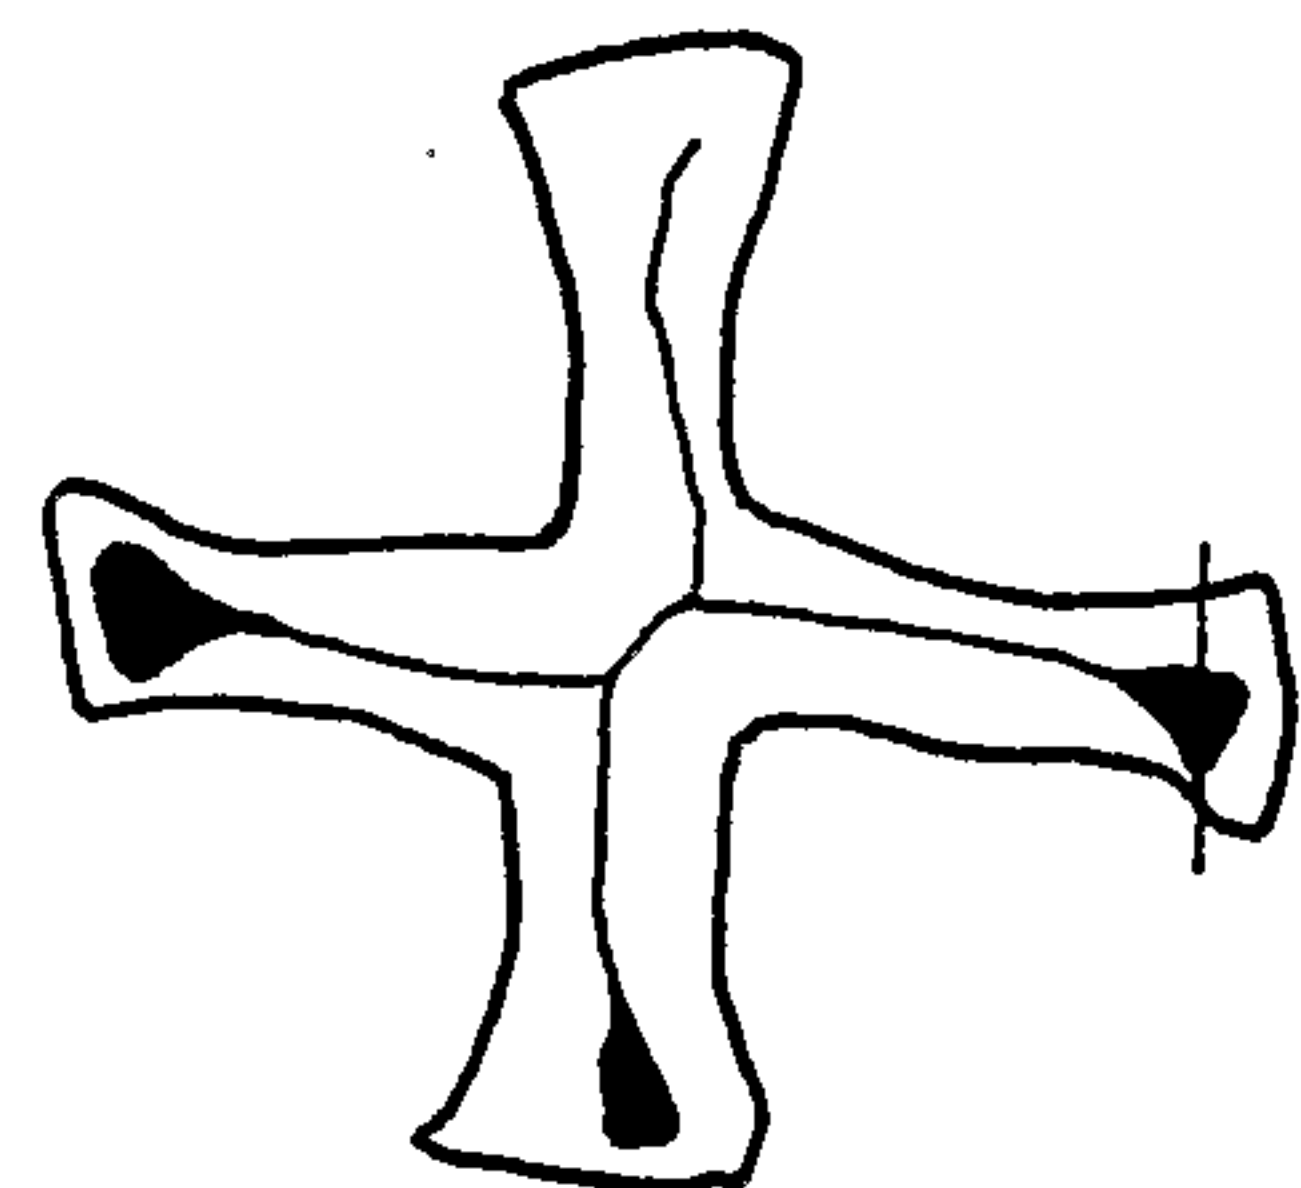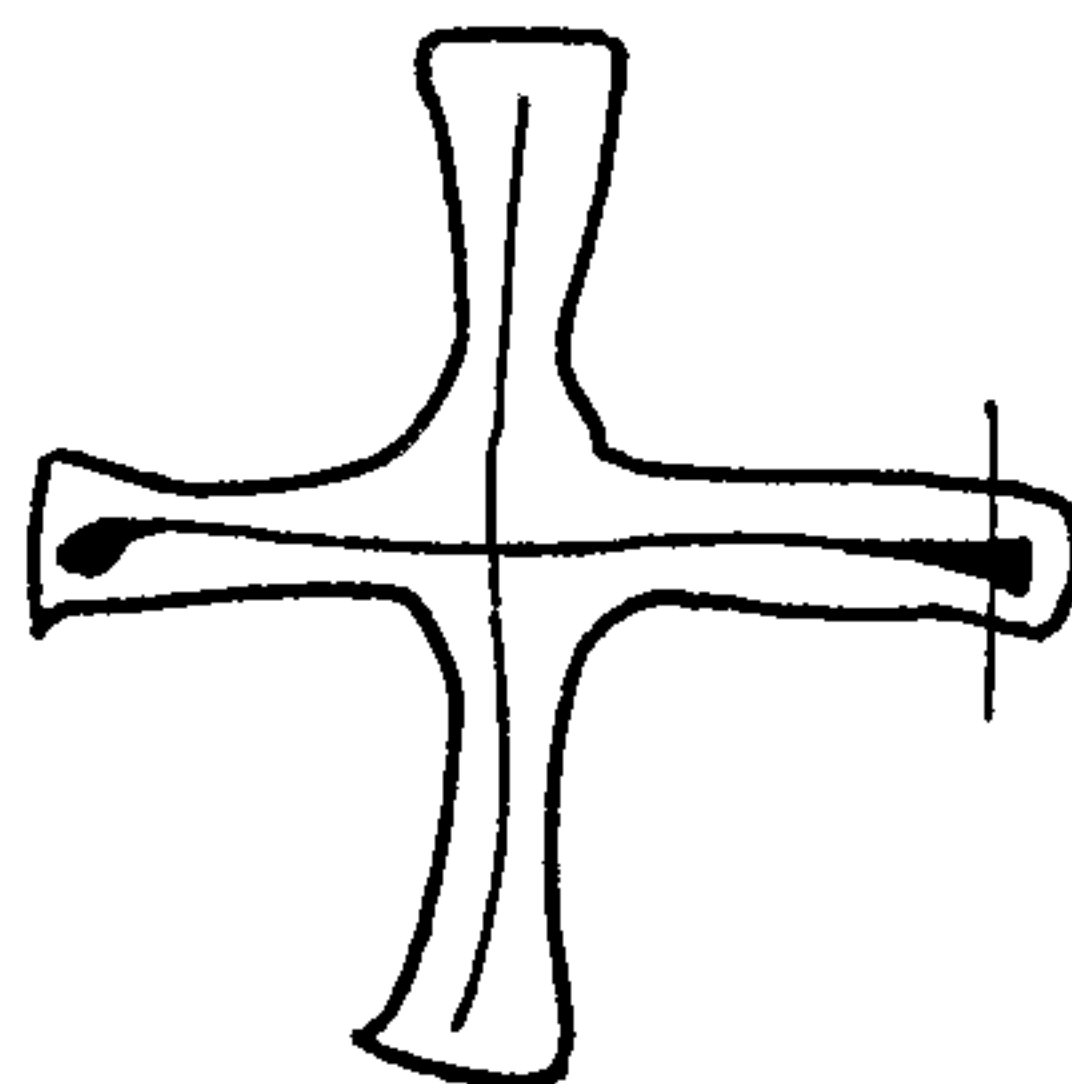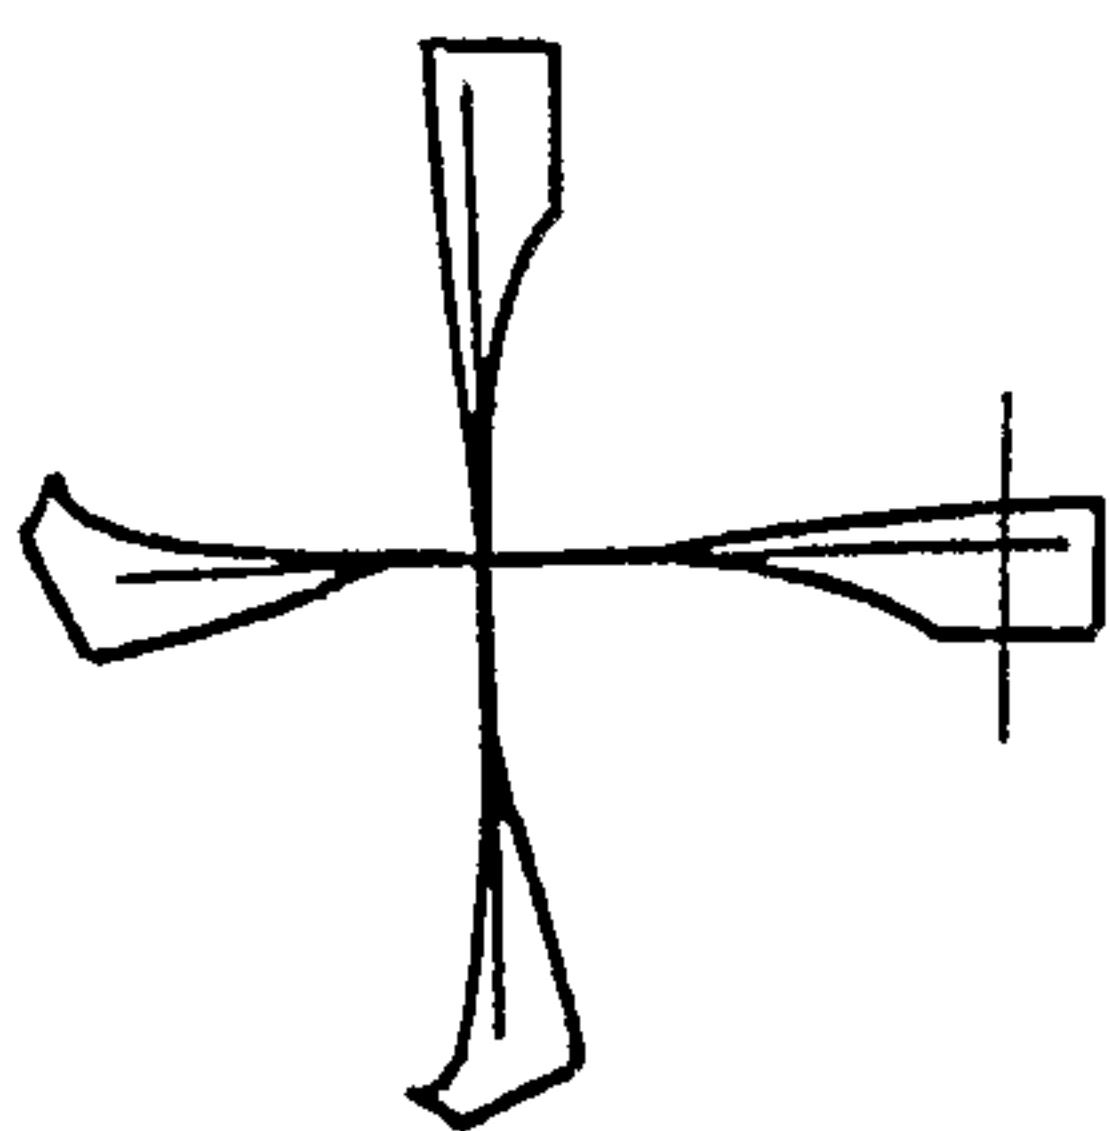