

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/050161 A1

(51) International Patent Classification⁷: **A61M 25/01**

(21) International Application Number:
PCT/US2003/037410

(22) International Filing Date:
21 November 2003 (21.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/430,466 2 December 2002 (02.12.2002) US

(71) Applicants: **WILSON-COOK MEDICAL INC.**
[US/US]; 4900 Bethania Station Road, P.O. Box
27115-4191, Winston-Salem, NC 27105-4191 (US).
WILLIAM COOK EUROPE APS [DK/DK]; Sandet 6,
DK-4632 Bjaeverskov (DK).

(72) Inventors: **FOUSHEE, Jason, D.**; 136 Woodbriar Road,
Winston-Salem, NC 27106 (US). **AYALA, Juan, Carlos**;
Fitz Roy 1226, Santiago (CL). **HARDIN, David, M.**; 1173
Edgebrook Drive, Winston-Salem, NC 27105 (US).

(74) Agent: **BUCHANAN, J., Matthew**; Brinks Hofer Gilson
& Lione, P.O. Box 10087, Chicago, IL 60610 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO,
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RU, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOOP TIP WIRE GUIDE

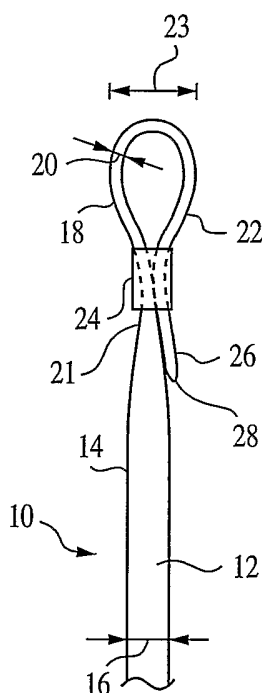

(57) Abstract: A wire guide has first and second portions with first and second diameters, respectively. A resilient loop positions a distal end of the wire guide adjacent another section of the wire guide. A closure member maintains the distal end in a fixed position relative to the remainder of the wire guide. A covering may be positioned around one or more parts of the wire guide.

WO 2004/050161 A1

LOOP TIP WIRE GUIDE

RELATED APPLICATIONS

[0001] This application claims the benefit of the filing date under 35 U.S.C. § 119(e) of Provisional U.S. Patent Application Serial No. 60/430,466, filed December 2, 2002, which is incorporated by reference in their entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to wire guides used in the placement of medical devices. More specifically, the present invention relates to a wire guide having a loop tip.

BACKGROUND OF THE INVENTION

[0003] Wire guides are elongate flexible members used to provide a path along which another medical device can be moved. The path provided by the wire guide can be used to navigate another medical device, such as a catheter, through a body vessel. The use of wire guides to define such a path is known in the art. Briefly, a wire guide is navigated through a body vessel toward a point of treatment. Once positioned within the vessel, a second medical device, frequently a cannula such as a catheter is placed over the wire guide and moved along its length toward the point of treatment. Thus, the wire guide provides an established path for placing other devices, eliminating the need for performing delicate navigation procedures for each device passed into the vessel.

[0004] During placement of a wire guide, an operator must navigate the wire guide through the vessel(s). Often, the vessel defines a torturous path due to the presence of natural bends and/or curves, or unnatural impediments, such as tumors, build-ups, and/or strictures. The presence of a torturous path may make navigation of a wire guide difficult. For example, the presence of an impediment may block the wire guide from navigating further into the vessel.

[0005] The prior art contains many examples of wire guides having straight flexible tips intended to aid in the navigation around such impediment. The presence of a straight flexible tip, however, may in fact make navigation more

-2-

difficult. For example, upon encountering an impediment, the straight flexible tip may bend toward one of the vessel walls, which may result in unintended contact between the tip and vessel wall. This situation may lead to undesirable effects in the vessel wall. Further, the straight tip may bend and turn back upon itself upon encountering the impediment. This formation of an unstable turn in the wire guide makes further navigation difficult.

BRIEF SUMMARY OF THE INVENTION

[0006] The present invention provides a wire guide having a loop in one end. In one embodiment, a wire guide according to the present invention comprises an elongate member having a first portion with a first diameter and a second portion with a second diameter. The second diameter is smaller than the first diameter. The elongate member defines a loop, and a closure member closes the loop.

[0007] In one embodiment, the elongate member further comprises an intermediate region defining a taper from the first diameter to the second diameter. Preferably, the loop places a distal end of the wire guide adjacent this intermediate portion. Alternatively, the loop can place the distal end adjacent the second portion.

[0008] The second portion can define a portion of the loop, or the entire loop. If present, the intermediate portion can define a portion of the loop.

[0009] The loop is resilient and is preferably fixed in overall size. The closure member preferably fixes the distal end relative to another portion of the elongate member. Also preferable, the loop defines a loop width that is greater than the first diameter of the first portion of the elongate member.

[0010] In one embodiment, a covering is positioned over at least the closure member. Particularly preferable, the covering is positioned over the closure member and at least the first portion of the elongate member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Figure 1 is a side view of a wire guide according to a first embodiment of the invention.

[0012] Figure 2 is a side view of a wire guide according to a second embodiment of the invention.

[0013] Figure 3 is a side view of a wire guide according to a third embodiment of the invention.

[0014] Figure 4 is an elongate cross-sectional view of a wire guide according to a fourth embodiment of the invention.

[0015] Figure 5 is a side view illustrating a wire guide according to the present invention encountering an impediment in a body vessel.

[0016] Figure 6 is a side view illustrating a wire guide according to the present invention encountering a torturous path within a body vessel.

[0017] Figure 7 is a side view of a wire guide according to a fifth embodiment of the invention.

[0018] Figure 8 is a side view of a wire guide according to sixth embodiment of the invention.

[0019] Figure 9 is a side view of a wire guide according to a seventh embodiment of the invention.

[0020] Figure 10 is a side view of a wire guide according to an eighth embodiment of the invention.

[0021] Figure 11 is a side view of a wire guide according to a ninth embodiment of the invention.

[0022] Figure 12 is a side view of a wire guide according to a tenth embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0023] Figure 1 illustrates a wire guide 10 according to a first embodiment of the present invention. The wire guide comprises an elongate member 12 having a first portion 14 with a first diameter 16 and a second portion 18 with a second diameter 20. The second diameter 20 is smaller than the first diameter 16. The elongate member 12 has an intermediate portion 21 that defines a taper from the first diameter 16 to the second diameter 20.

[0024] The elongate member 12 defines a loop 22. In the presently preferred embodiment, the loop 22 comprises a section of the elongate member 12 bent back upon itself. As illustrated in Figures 1 and 2, the second portion 18 preferably defines the entire loop 22. Alternatively, as illustrated in Figure 3, the second portion 18 can define only a portion of the loop 22. In this embodiment, the intermediate portion 21 preferably defines at least a portion of the loop 22.

[0025] Preferably, as illustrated in the figures, the loop 22 comprises a curvilinear loop forming a generally ovoid shape. Also preferable, the loop 22 has a loop width 23 that is greater than the first diameter 16 of the first portion 14 of the elongate member 12. The term 'loop width' refers to the distance between the two outer most surfaces of the elongate member 12 at the widest portion of the loop 22.

[0026] The elongate member 12 has a distal end 26 and a distal tip 28. Preferably, the distal tip 28 tapers from the second diameter 20 to a smaller diameter, and particularly preferably tapers to a point. As illustrated in Figures 1 and 7, the loop 22 is preferably formed in a manner that positions the distal end 26 adjacent the intermediate portion 21. Preferably, this placement also positions the distal tip 28 adjacent the intermediate portion 21. Such placements provide a low profile over the portion of the elongate member 12 that has a double width (i.e., two sections of the elongate member 12). Alternatively, as illustrated in Figure 2, the loop 22 can be formed such that the distal end 26 is positioned adjacent the second portion 18 of the elongate member 12.

[0027] Any method of forming loop 22 is contemplated. In one preferred embodiment, a closure member 24 closes the loop 22 such that no opening exists to the interior space of the loop 22. As illustrated in Figures 1-7, the closure member 24 preferably positions the distal end 26 adjacent another portion of the elongate member 12. Any suitable closure member can be used, including bonds, adhesives, and separate members. Examples of suitable closure members include sutures or other appropriate material tying the two sections together, adhesive bonds and other bonds (such as a solder bond, a welded bond, or a molded bond) and a connector (such as a rivet). As best illustrated in Figures 1-7, the closure

member 24 preferably is a cannula defining an interior lumen. Two sections of the elongate member are positioned within the cannula to form the loop 22. As shown in Figure 7, the cannula preferably extends over and covers the distal end 26 and distal tip 28. Preferably, the closure member 24 is tightened, such as by crimping, to fix the loop 22 in overall size.

[0028] In the alternate preferred embodiment shown in Figure 8, the closure member comprises a molded bond 25. The loop 22 of wire guide 10 is formed by molding two sections of the elongate member together. In another alternate preferred embodiment shown in Figure 9, the closure member comprises a solder or welded bond 27. Two sections of the elongate member are welded or soldered together to form loop 22. In the alternate preferred embodiments shown in Figures 10-12, the closure member comprises a coil 29. The loop 22 of wire guide 10 is formed from a coiled wire. More specifically, two sections of the elongate member are wound about each other. Preferably, the distal end 26 is wound such that a low profile is achieved. As shown in Figure 10, the coil 29 positions the distal end 26 adjacent the intermediate portion 21. Alternatively, the coil 29 may extend along the length of elongate member as shown in Figure 11. As shown in Figure 12, the diameter of the first portion may be approximately the same as the diameter of the second portion. In yet another alternate preferred embodiment, the loop 22 and elongate member 12 of wire guide 10 may be formed using laser cutting techniques as are known to those skilled in the art.

[0029] Any suitable material can be used for the elongate member 12, and a variety of suitable materials are known to those skilled in the art. The material chosen need only be biocompatible and able to be formed into the structures described herein. Examples of suitable materials include stainless steel and nitinol. The elongate member 12 may comprise a wire, a tubular member or a sheet of material. Further, the elongate member 12 can be formed of a series of layers, or as a coated core structure. For example, in one embodiment, the elongate member 12 comprises a nitinol core with a polytetrafluoroethylene covering.

[0030] The closure member 24 can be formed of any suitable material, and need only be biocompatible and capable of maintaining the loop 22 in a closed position. Preferably, the closure member 24 comprises a cannula formed of stainless steel or nitinol. Also preferable, the closure member 24 is able to maintain a tightened position on the elongate member 12 upon application of a suitable force, such as by applying a crimping workload to the closure member 24.

[0031] A variety of shapes and sizes of elongate members and loops can be used, and these can both be optimized based on particular applications. The dimensions of the elongate member 12 and loop 22 will depend upon various factors, including the intended use of the wire guide and the vessels into which the wire guide will be positioned. For a wire guide intended to cannulate the common bile duct, suitable dimensions include a first diameter 16 of between approximately .016 inches and approximately .038 inches, and preferably comprises a diameter of approximately .035 inches. The second diameter 20 of the wire guide preferably has a diameter of between approximately .003 inches and approximately .010 inches, and preferably comprises a diameter of approximately .006 inches. The intermediate portion of this wire guide defines a taper between the first diameter 16 and the second diameter 20. The taper may be smaller or approximately the same size as the second diameter 20. Preferably, the intermediate portion defines a taper from approximately .006 inches to approximately .016 inches. For this wire guide, the loop is preferably ovoid in shape with a length of between approximately 4 and approximately 5 millimeters, and a width of between approximately 2 and approximately 3 millimeters.

[0032] Figure 4 illustrates a wire guide 10 according to a fourth embodiment of the present invention. In this embodiment, a covering 30 is positioned over the closure member 24. The covering 30 can be polytetrafluoroethylene, or another suitable material. Examples of suitable coverings include fluoropolymers, polyurethanes, and other suitable coatings used in the medical device arts. Also, the covering 30 preferably is positioned over the closure member 24 and at least a section of the first portion 14. Particularly preferable, the covering is positioned over the first 32 and second 34 transition areas between the closure member 24

and the elongate member 12. This positioning of the covering 30 ensures a smooth surface at the transition areas 32, 34.

[0033] Alternatively, the covering 30 can comprise a coating on the elongate member 12. The coating is preferably applied to the entire elongate member 12, including the loop 22. Alternatively, the coating can be applied to only a portion of the elongate member. The coating may be applied by dipping, molding, or spraying a suitable coating material, such as polytetrafluoroethylene, urethane, and/or other polymeric coatings, directly to the elongate member 12.

[0034] A thin PTFE heat shrinkable material is a preferred coating. The heat shrinkable nature of these materials facilitate manufacturing while providing a lubricious coating, which facilitates navigation. In preferred embodiments, the thickness of the coating is between approximately 0.001 and 0.010 inches. In particularly preferred embodiments, the thickness of the coating is between approximately 0.001 and 0.005 inches. In still more preferred embodiments, the thickness of the coating is between approximately 0.001 and 0.002 inches. These preferred thicknesses provide suitable coatings while not adding significantly to the overall thickness of the device.

[0035] Also, the wire guide 10, with or without the covering 30, may be treated with a hydrophilic coating or hybrid polymer mixture, such as those based on polyvinyl puroladine and cellulose esters in organic solvent solutions. These solutions make the wire guide particularly lubricious when in contact with body fluids, which aids in navigation.

[0036] Radiopaque materials such as bismuth or gold can be added in the covering 30. Also, radiopaque markers known in the art can be placed on the elongate member 12, the loop 22, and/or the closure member 24. Several examples of suitable radiopaque materials and markers are known in the art, and any suitable material and/or marker can be utilized in the present invention.

[0037] As illustrated in the figures, the loop 22 is preferably formed by the elongate member 12. As an alternative, a separate member defining the loop can be affixed to a substantially straight elongate member to form the wire guide of the present invention. This may be advantageous when it is desirable to form the loop

and elongate member of different materials. For example, a nylon or silicon loop could be formed and attached, such as by a closure member, to an elongate member formed of nitinol. Such an assembly could be coated and or associated with a covering as described above.

[0038] Figure 5 illustrates a wire guide 10 according to the present invention encountering an impediment 42 within a body vessel 40. As illustrated in the figure, the loop 22 deforms in response to its encounter with the impediment 42. Due to the presence of the loop 22 and closure member 24, the distal end 26 does not move relative to the remainder of the elongate member 12. Also, the loop 22 deforms in response to the impediment, enabling the wire guide to continue navigating along the interior of the vessel 40. The resiliency of the loop 22 creates a force opposing the impediment 42 and forces the loop 22 away from the impediment 42, which defines a path for the remainder of the wire guide 10 to follow.

[0039] Figure 6 illustrates a wire guide 10 according to the present invention encountering a torturous path 44 within a body vessel 40. As illustrated in the figure, the loop 22 deforms slightly in response to the torturous path 44. Also, due to the presence of the loop 22 and closure member 24, the distal end 26 does not move relative to the remainder of the elongate member 12. This allows the wire guide 10 to continue navigating along the interior of the body vessel 40. The taper of the intermediate region 21 provides additional flexibility to the wire guide 10, facilitating navigation of the loop 22 through the torturous path 44.

[0040] The above Figures and disclosure are intended to be illustrative and not exhaustive. This description will suggest many variations and alternatives to one of ordinary skill in the art. All such variations and alternatives are intended to be encompassed within the scope of the attached claims. Those familiar with the art may recognize other equivalents to the specific embodiments described herein, which equivalents are also intended to be encompassed by the attached claims.

CLAIMS

1. A wire guide, comprising:
an elongate member having a first portion with a first diameter and a second portion with a second diameter smaller than the first diameter, the elongate member defining a loop; and
a closure member closing the loop.
2. The wire guide of claim 1, further comprising a covering positioned over at least part of the first portion and the closure member.
3. The wire guide of claim 1, wherein the second portion defines the loop.
4. The wire guide of claim 1, wherein the second portion defines only a portion of the loop.
5. The wire guide of claim 1, wherein the loop has a loop width that is greater than the first diameter.
6. The wire guide of claim 1, wherein the elongate member has an intermediate portion between the first portion and the second portion; and
wherein the intermediate portion defines a taper from the first diameter to the second diameter.
7. The wire guide of claim 6, wherein the elongate member has a distal end; and
wherein the loop places the distal end adjacent the intermediate portion.
8. The wire guide of claim 1, wherein the elongate member has a distal end; and
wherein the loop places the distal end adjacent the second portion.

-10-

9. The wire guide of claim 1, wherein the second portion defines a portion of the loop.
10. The wire guide of claim 1, wherein the closure member comprises a cannula.
11. The wire guide of claim 1, wherein the closure member comprises a bond.
12. The wire guide of claim 11, wherein the bond comprises a solder bond.
13. The wire guide of claim 11, wherein the bond comprises a welded bond.
14. The wire guide of claim 11, wherein the bond comprise a molded bond.
15. The wire guide of claim 11, wherein the bond comprises an adhesive bond.
16. The wire guide of claim 11, wherein the bond comprises a coil.
17. The wire guide of claim 11, wherein the bond is formed using laser cutting techniques.
18. The wire guide of claim 1, further comprising a covering on a portion of the elongate member.
19. The wire guide of claim 1, further comprising a radiopaque marker on the elongate member.
20. The wire guide of claim 1, further comprising a radiopaque marker on the closure member.

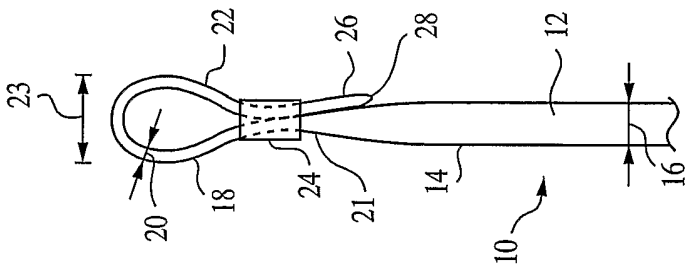


FIG. 1

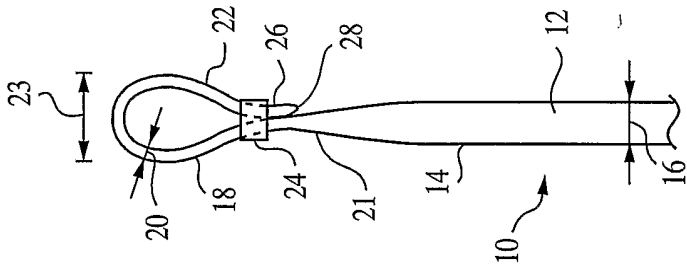


FIG. 2

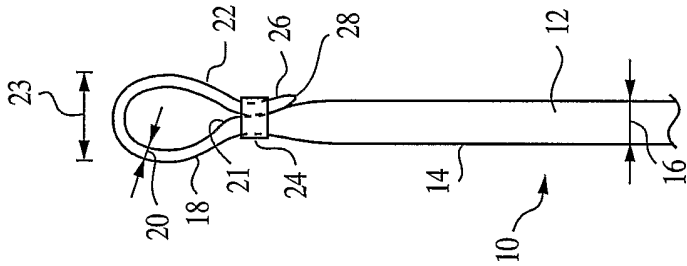


FIG. 3

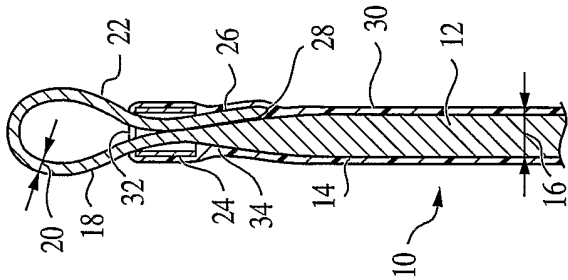


FIG. 4

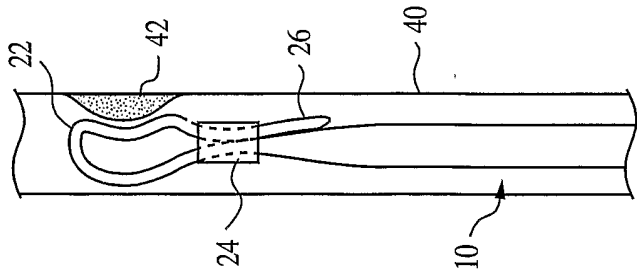


FIG. 5

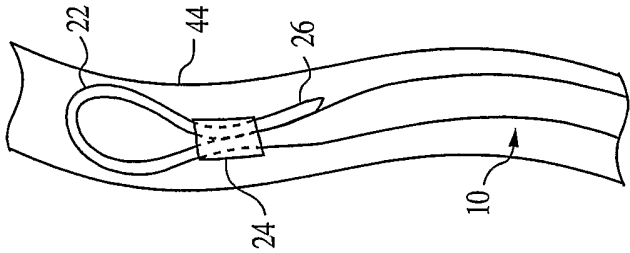


FIG. 6

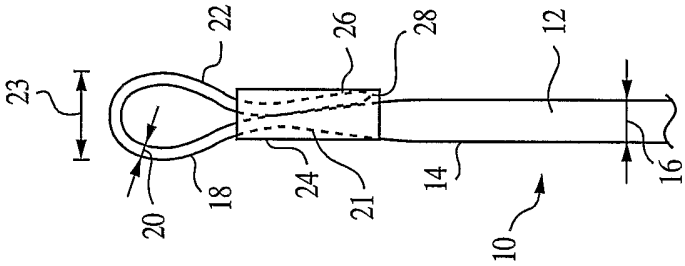


FIG. 7

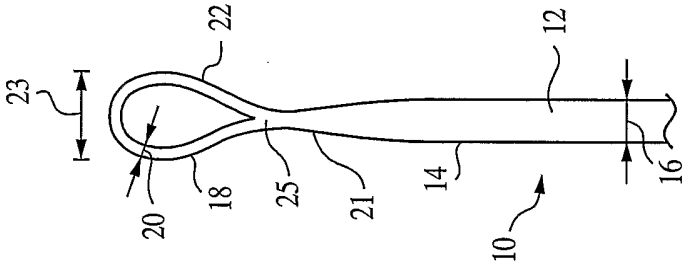


FIG. 8

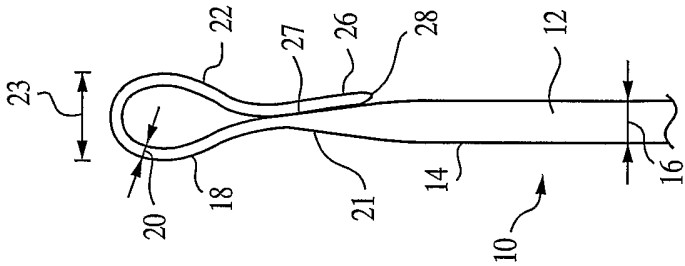


FIG. 9



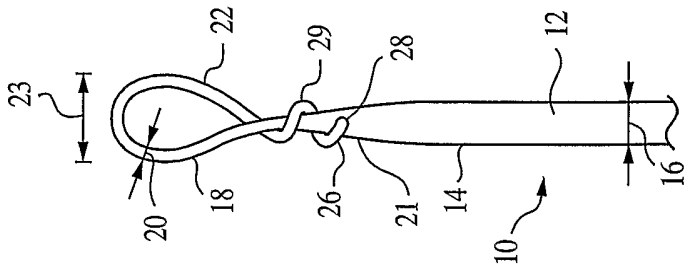


FIG. 10

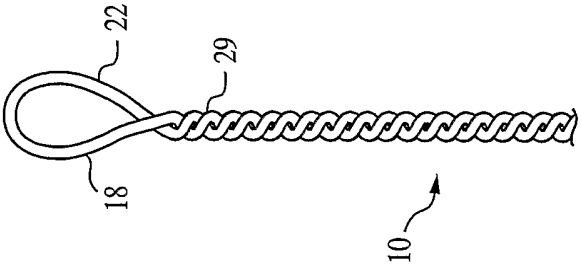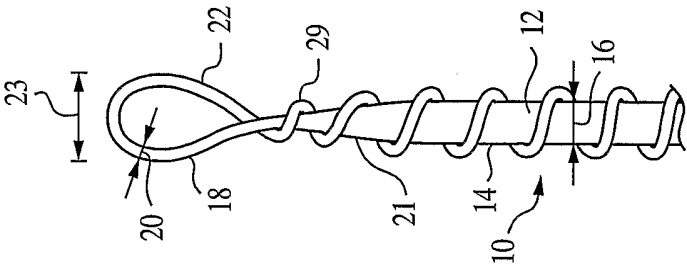

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37410

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M25/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/016604 A1 (LEE JEFFREY A ET AL) 7 February 2002 (2002-02-07) paragraphs '0028! - '0031!; figures -----	1, 3, 4, 6-11, 15, 18
X	US 2002/010426 A1 (VANDENBROEK FRANS ET AL) 24 January 2002 (2002-01-24) paragraph '0042!; figures -----	1-18
A	US 5 498 249 A (QUINN KATHRYN A) 12 March 1996 (1996-03-12) the whole document -----	1-5
A	US 5 728 122 A (FOLLMAN MARK ET AL) 17 March 1998 (1998-03-17) abstract; figures ----- -/--	1, 5

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

8 April 2004

Date of mailing of the international search report

19/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kousouretas, I

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37410

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 490 845 A (RACZ GABOR J) 13 February 1996 (1996-02-13) abstract; figures -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/37410

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002016604 A1	07-02-2002	US 6322572 B1 US 2002032455 A1	27-11-2001 14-03-2002
US 2002010426 A1	24-01-2002	WO 0065987 A1	09-11-2000
US 5498249 A	12-03-1996	WO 9525553 A1	28-09-1995
US 5728122 A	17-03-1998	AU 700914 B2 AU 6105096 A CA 2223048 A1 CA 2309844 A1 EP 0836424 A1 JP 11507263 T US 5871501 A WO 9639945 A1 US 5853421 A	14-01-1999 30-12-1996 19-12-1996 19-12-1996 22-04-1998 29-06-1999 16-02-1999 19-12-1996 29-12-1998
US 5490845 A	13-02-1996	AT 241402 T CA 2199024 A1 DE 69530931 D1 EP 0783336 A1 JP 11508455 T WO 9609084 A1	15-06-2003 28-03-1996 03-07-2003 16-07-1997 27-07-1999 28-03-1996