




(51) International Patent Classification ⁶ : B41F 13/22, 31/00		A1	(11) International Publication Number: WO 97/33750 (43) International Publication Date: 18 September 1997 (18.09.97)
(21) International Application Number: PCT/EP97/00907			(81) Designated States: AU, CA, CN, CZ, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 26 February 1997 (26.02.97)			
(30) Priority Data: 08/615,351 13 March 1996 (13.03.96) US			Published <i>With international search report.</i>
(71) Applicant: HEIDELBERGER DRUCKMASCHINEN AG [DE/DE]; Kurfürsten-Anlage 52-60, D-69115 Heidelberg (DE).			
(72) Inventor: PALMATIER, Roland, Thomas; 128 Madbury Road, Durham, NH 03824 (US).			
(74) Agent: HÖRSCHLER, Wolfram; Heidelberger Druckmaschinen AG, Kurfürsten-Anlage 52-60, D-69115 Heidelberg (DE).			

(54) Title: PRINTING UNIT FOR WATER-BASED INKS

(57) Abstract

A printing unit for rotary printing press includes an inking unit (55) and a print cylinder (3, 5) carrying a print form suitable for the reception of water-based inks. The printing unit also includes a blanket cylinder (4, 6) carrying a printing blanket and a cooling unit (7, 8, 15) for maintaining an ink carrying surface of one or more of the print form, the printing blanket, and the inking unit at a predetermined temperature which is suitable for printing with water-based inks.

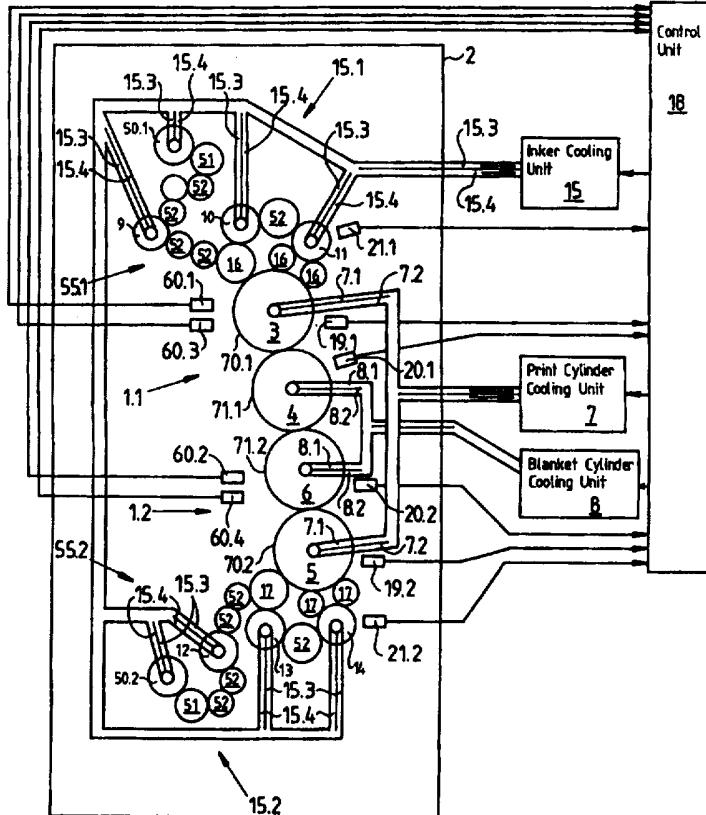

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Printing Unit for Water Based Inks

Field of the Invention

The present invention relates to a printing unit for using water based inks in high speed rotary printing presses.

5 Background of the Invention

U.S. Patent Nos. 5,309,838. and 5,375,518 each purport to disclose a system for keeping the printing plates of a printing press at a moderate temperature. A cooling air blower girder extends longitudinally over the printing plate surface and blows cold air onto the printing plate's surfaces in order to keep its temperature of a desired value.

10 The blast air girder contains at least one heat exchanger and at least one blower as well as at least one air return duct, which together forms a cooling air cycle, through which the air blown onto the printing plate surface is returned to the air inlet of the heat exchanger and optionally mixed with fresh air blown by the blower once again through the heat exchanger onto the printing plate surface. The blast air girder purportedly

15 presents an energy saving compact structural unit for keeping the printing plate surface at a moderate temperature.

U.S. Patent No. 5,452,657 purportedly relates to a temperature control system for printing press cylinders. It contains at least one compressed air line having at least one

blast air opening for blowing cold air against a cylinder which is to be cooled. At least one recirculation circuit which is separate from the cold air of the compressed air line and by which air which has been blown by the blast air opening onto the cylinder is drawn off by means of a blower contained in the circulation circuit and is blown parallel to the cold air again onto the cylinder. In this way, the temperature of the cold air can be active, without prior change of temperature on the cylinder. The cold air deflected by the cylinder is returned to the cylinder for additional cooling.

U.S. Patent No. 5,098,478 relates to water based ink compositions. The water based ink composition comprises water, a pigment, a non-ionic surfactant having a solubility in water of less than about 0.5 wt % and a solubilizing agent sufficient to solubilize substantially all of the none-ionic surfactant.

U.S. Patent No. 5,026,755 purports to disclose a water based printing ink prepared from polyamid/acrylic graft copolymers. It is prepared by reacting the polyamid with the acrylic monomer or monomers in an alcohol solution in the presence of a free radical peroxidic initiator. The graft copolymer purports to be particularly useful as the resin component of a water based printing ink.

Finally, German laid open patent application DE 41 19 348 A1 purports to disclose a method for offset printing and a printing unit for waterless offset printing. A conventional offset plate is used with a water based printing ink, containing a pigment, water, 5-50 % water soluble macromolecular binding agents, a hygroscopic organic fluid and preferably a multivalent alcohol.

Summary of the Invention

In accordance with the present invention, a printing unit is provided for printing with water-based inks. Such water-based inks provide many advantages over conventional inks, but have proven difficult to use in an offset printing unit. Preferably, the

present invention uses a water-based ink which is free of volatile organic components (VOCs). VOCs, such as hydrocarbons, are conventionally evaporated from inks in long driers. As a result, VOC-free water-based inks dry cleaner, with little or no air pollution. Moreover, since these water-based inks have no VOCs to evaporate, they 5 require less temperature to dry. This, in turn, allows a reduction in the length of the driers. Finally, with the use of water-based inks with no VOCs, alternative drying mechanisms such as infra red or micro-wave drying are possible in offset presses. However, it has been found that water-based inks are difficult to use in offset printing because the ink is highly sensitive to temperature and humidity variations, and tends to 10 dry prematurely.

In accordance with the present invention, a printing unit for printing with water based inks includes a blanket cylinder for supporting a printing blanket, a print cylinder for supporting a print form, and an inking unit for applying a water-based ink over the print form. The printing blanket, print form, and inking unit each have respective ink 15 carrying surfaces for transferring the water-based ink. A cooling unit is mounted within the printing unit for maintaining the outer ink carrying surface of one or more of the print form, printing blanket, and inking unit at a predetermined level. Since heating and cooling above the dew point will not result in condensation, the predetermined temperature level is preferably set above the dew point of the 20 atmosphere surrounding the ink carrying surfaces to prevent condensation of the water in the atmosphere onto the ink carrying surfaces. Moreover, in accordance with a preferred embodiment of the invention, the predetermined temperature level is set just slightly above the dew point so that evaporation of water from the ink is minimized while still preventing condensation.

25 In accordance with another embodiment of the present invention, the cooling unit includes a blanket cylinder cooling unit coupled to the blanket cylinder for circulating a first cooling agent through the blanket cylinder. In addition, a blanket temperature

sensor is mounted within the printing unit for monitoring the temperature at the outer ink carrying surface of the printing blanket, and a control unit is provided which has an input connected to the blanket temperature sensor, and an output connected to the blanket cylinder cooling unit. The control unit monitors the temperature at the outer ink carrying surface of the printing blanket via the blanket temperature sensors, and controls the temperature at the outer ink carrying surface of the printing blanket by controlling the temperature of the first cooling agent.

In accordance with another embodiment of the present invention, the cooling unit may include a print cylinder cooling unit alone or in combination with the blanket cylinder cooling unit described above. The print cylinder cooling unit is coupled to the print cylinder for circulating a second cooling agent through the print cylinder. A print form temperature sensor is mounted within the printing unit for monitoring the temperature at the outer ink carrying surface of the print form, and the control unit has an input connected to the print form temperature sensor, and an output connected to the print cylinder cooling unit. The control unit monitors the temperature at the outer ink carrying surface of the print form via the print form temperature sensor, and controls the temperature at the outer ink carrying surface of the print form by controlling the temperature of the second cooling agent.

In addition, the cooling unit may also include inker cooling unit alone or in combination with the print cylinder and blanket cylinder cooling units described above. The inker cooling unit is coupled to one or more of a plurality of rollers within the inking unit (e.g., vibrator rollers) and circulates a third cooling agent through these rollers. A inking unit temperature sensor is mounted within the printing unit for monitoring the temperature at the outer ink carrying surface of the rollers, and the control unit has an input connected to the inking unit temperature sensor, and an output connected to the inker cooling unit. The control unit monitors the temperature at the outer ink carrying surface of the rollers via the inking unit temperature sensor, and

controls the temperature at the outer ink carrying surface of the rollers by controlling the temperature of the third cooling agent.

In accordance with a further embodiment of the present invention, an air blower is mounted within the printing unit for circulating and conditioning the atmosphere 5 surrounding the blanket cylinder, print cylinder, and/or inking unit. While the air blower may be used independently from the cooling unit, in accordance with a preferred embodiment of the present invention, the air blower is used in combination with the cooling unit described above.

Brief Description of the Drawings

10 Fig. 1 shows a printing unit in accordance with an embodiment of the present invention.

Fig. 2(a-c) show illustrative flow charts for the control unit of Fig. 1

Fig. 3 shows a further embodiment of the printing unit of Fig. 1

Fig. 3(a) shows an illustrative flow chart for the control unit of Fig. 3

15 Fig. 4, 4(a) show devices for controlling a temperature of the side walls of a printing unit.

Fig. 5 shows the blanket cylinder of Fig. 1 in more detail.

Detailed Description of the Invention

Fig. 1 shows a printing unit 1 in accordance with the present invention. The printing 20 unit 1 includes side walls 2 supporting upper and lower inking units 55.1, 55.2, blanket cylinders 4,6 and print cylinders 3,5. The upper inking unit 55.1 includes a fountain

roller 50.1 and metering roller 51 which apply an ink film to distributor rollers 52, and to vibrator rollers 9, 10 and 11 for splitting the ink film and providing an even ink profile over the width of the printing unit. The vibrator rollers 10, 11 distribute the ink film to a group of upper form rollers 16. The upper form rollers 16, in turn, apply the 5 ink film to a print form 70.1 mounted on the upper print cylinder 3. Similarly, the vibrator rollers 13, 14 distribute the ink film to a group of lower form rollers 17, and the lower form rollers 17 apply the ink film to a print form 70.2 mounted on the lower print cylinder 5.

10 The print form 70 may be constructed as a flat plate mounted by its respective ends to the print cylinder, as a sleeve-shaped print form mounted axially over the print cylinder, or in any other known manner. In any case, the print form 70 is suitable for receiving and transferring an image using water based inks. For example, it has been found that "waterless" type printing plates, such as those manufactured by Toray Industries, are also suitable for printing with water based inks. As an example, a 15 Toray Industries printing plate having an aluminum oxide substrate with an image area coated with a photopolymer whose surface is hydrophilic in nature and a non-image area coated with a silicone polymer may be used.

20 An illustrative water-based ink for use with the present invention may include the components set forth below. The water phase of the ink is supplied by the water present in the acrylic resin latex, hydroxypropyl cellulose, hydroxyethyl ethylene urea, and the maleated rosin ester.

	<u>Component</u>	<u>Amount, wt. %</u>
25	Styrene/maleic anhydride resin	12
	Phthalocyanine Blue pigment	12
	Acrylic resin latex (50 % wt. % solids)	5
	Hydroxypropylcellulose (3% wt. % solids)	10
	Hydroxyethylethylene urea (70% wt % solids)	8
	Monoethanol amine	2
	Polyethylene Wax	2

Ethoxylated acetylenic diol surfactant	2
Maleated rosin ester (50 wt. % solids)	47
Total	100

The printing unit 1 is designed to maintain acceptable printing conditions for printing with water based inks through the use of one or more cooling units. Referring to Fig. 1, a print cylinder cooling unit 7 is assigned to the upper and lower print cylinders 3, 5. The print cylinder cooling unit 7 includes a print cylinder inlet pipe 7.1 and a print cylinder outlet pipe 7.2 for each of the print cylinders 3, 5. A lower print cylinder sensor 19.2 is arranged near the lower print cylinder 5, and an upper print cylinder sensor 19.1 is arranged near the upper print cylinder 3. A pair of relative humidity sensors 60.1, 60.2 are mounted within the printing unit 1 to measure the relative humidity of the atmosphere in the upper print unit section 1.1 and lower printing unit section 1.2, and a pair of temperature sensors 60.3, 60.4 are mounted within the printing unit 1 to measure the temperature of the atmosphere in the upper print unit section 1.1 and lower printing unit section 1.2. A control unit 18 has respective inputs connected to the print cylinder sensors 19.1, 19.2, the relative humidity and temperature sensors 60.1, 60.2, 60.3, 60.4 and an output connected to the cooling unit 7. The control unit 18 periodically monitors the temperature of the print cylinders 3, 5 via the sensors 19.1, 19.2, and of the atmosphere with the relative humidity sensors 60.1, 60.2 and temperature sensors 60.3, 60.4, and then controls the print cylinder cooling unit 7 as a function of the monitored temperature values.

The print cylinder sensors 19.1, 19.2 can be constructed, for example, as infra-red sensors mounted adjacent to the print cylinders 3, 5 to monitor the surface temperature of the print cylinders. The cooling unit 7 continuously circulates a cooling agent (e.g. water or air) through the print cylinders 3, 5 via the print cylinder inlet and outlet pipes 7.1, 7.2. By controlling the temperature of the cooling agent via the controlling device 18, the temperature of the cylinders 3, 5 can be maintained at a predetermined level

(e.g., at a setpoint or within a predetermined range). The predetermined level is preferably set slightly above the dew point of the atmosphere surrounding the ink carrying surfaces of the print cylinders in order to prevent condensation of water from the atmosphere onto the ink carrying surfaces, and to minimize evaporation of water 5 from the water-based inks into the atmosphere.

The predetermined level can be set as follows based upon the sensor readings. Relative humidity (RH) is a function of the amount of water per volume of air which is actually present in the atmosphere (VA) and the amount of water per volume of air which is necessary to saturate the air (VS): $VA/VS \times 100 = RH$. VS, in turn, is a function of 10 the temperature of the atmosphere: $VS = f(t)$. Since the temperature of the atmosphere is known from sensors 60.3, 60.4, and the relative humidity of the atmosphere is known from sensors 60.1, and 60.2, VA and VS for the temperature of the atmosphere surrounding the ink carrying surfaces are readily determined by the control unit 18. Therefore, in order to maintain the temperature of the ink carrying 15 surfaces above the dew point, the control unit can assume VA to remain constant, and choose a predetermined temperature level for the cylinders 3, 5 which has a corresponding VS which is slightly greater than VA.

The upper and lower blanket cylinders 4, 6 have printing blankets 71.1, 71.2 mounted thereon for transferring an inked image from the print forms 70.1, 70.2 to a web of 20 material 22 as shown in Fig. 3. The printing blanket 71 may be constructed as a flat blanket mounted by its respective ends to the blanket cylinder, as a gapless tubular printing blanket mounted axially over the blanket cylinder, or in any other known manner.

A blanket cylinder cooling unit 8 is assigned to the upper and lower blanket cylinders 25 4, 6. The blanket cylinder cooling unit 8 includes a blanket cylinder inlet 8.1 and a blanket cylinder outlet 8.2 for each blanket cylinder. A lower blanket cylinder sensor

20.2 is arranged near the lower blanket cylinder 6, and an upper blanket cylinder sensor 20.1 is arranged near the upper blanket cylinder 4. The control unit 18 has respective inputs connected to the blanket cylinder sensors 20.1, 20.2 and an output connected to the cooling unit 8. The control unit 18 periodically monitors the

5 temperature of the blanket cylinders 4,6 via the sensors 20.1, 20.2, and then controls the blanket cylinder cooling unit 8 as a function of the monitored temperature values as described above with regard to the print cylinders. The sensors 20 and cooling unit 8 can be constructed and controlled in the same manner as the sensors 19 and cooling unit 7.

10 An inker cooling unit 15 is assigned to the upper vibrator rollers 9, 10, 11, the lower vibrator rollers 12, 13 and 14, and the upper and lower fountain rollers 50.1, 50.2 respectively. The cooling unit 15 includes an upper section 15.1 assigned to the upper inker 55.1 and a lower section 15.2 assigned to the lower inker 55.2. An inker inlet pipe 15.3 and outlet pipe 15.4 is connected to each roller 9-14, 50.1, 50.2. A

15 respective inker sensor 21.1, 21.2 is assigned to each inking unit 55.1, 55.2. In the configuration of Fig. 1, sensor 21.1 senses the temperature at an outer ink carrying surface of roller 11, and sensor 21.2 senses the temperature at an outer ink carrying surface of roller 14. The control unit 18 has respective inputs connected to the inker sensors 21.1, 21.2 and an output connected to the inker cooling unit 15. The control

20 unit 18 periodically monitors the temperature of the vibrator rollers 11, 14 via the sensors 20.1, 20.2, and then controls the inker cooling unit 15 as a function of the monitored temperature values as described above with regard to the print cylinders. The sensors 21 and cooling unit 15 can be constructed and controlled in the same manner as the sensors 19 and cooling unit 7.

25 Figures 2(a-c) show an illustrative flow chart for the control unit 18. Referring to Fig. 2a, the control unit monitors the surface temperature of the upper blanket (T_{b_1}) and of the lower blanket (T_{b_2}) via the sensors 20.1, 20.2. If an average of these sensor

readings is above a set point, then the control unit 18 lowers the temperature of the cooling agent in the blanket cooling unit 8 by an amount X , waits a time period T , and then monitors the outputs of the sensors 20.1, 20.2 again. These steps are repeated until the average of the sensor readings is equal to the set point. Similarly, if the

5 average of these sensor readings is below the set point, then the control unit 18 raises the temperature of the cooling agent in the blanket cooling unit 8 by an amount X , waits a time period T , monitors the outputs of the sensors 20.1, 20.2 again, and repeats these steps until the average of the sensor readings is equal to the set point. As

10 illustrated in Figs. 2b and 2c, the control unit monitors and controls the temperature of the print cylinders 3, 5 and inker rollers 9-14, 50.1, 50.2 in the same manner. Preferably, the setpoint is set slightly above the dew point of the atmosphere surrounding the print cylinders, blanket cylinders, and inking unit. In this manner, the relative humidity of the atmosphere surrounding the ink carrying surfaces of the inking unit, blanket cylinders, and print cylinders will be high enough to prevent any

15 significant evaporation of water from the ink, but low enough to prevent condensation of water from the atmosphere onto the ink carrying surfaces. The set point can be obtained based upon the monitored values of the sensors 60.1 through 60.4 as described above.

It should be noted that since the temperature of the cylinders and rollers in the printing

20 unit 1 tend to rise naturally due to the heat generated from the operation of the press, it is possible to eliminate steps 130 and 135 in the flow charts of Figs. 2a through 2c, and to rely instead on the natural tendency of the temperature of the cylinders and rollers to rise over time. In such an embodiment, the cooling units 7, 8, and 15 need not include means for heating the cooling agent. Moreover, the above referenced flow charts are

25 merely illustrative, and could be replaced with any suitable algorithm known in the art for matching a measured value to a desired value.

In the embodiment shown in Figs. 1 and 2, separate sensors 19.1, 19.2 are provided

for the upper and lower print cylinders 3, 5, and the temperature of the cooling agent applied to both cylinders is a function of the average of the two sensor readings. However, it is also possible to control the temperature of the cooling agent as a function of the temperature measured at only one of the cylinders (3 or 5) by one 5 sensor (19.1 or 19.2). Similarly, a single temperature sensor (60.3 or 60.4) and humidity sensor (60.1 or 60.2) could be used. In such an embodiment, the temperature of the cooling agent circulated within both print cylinders will be a function of the temperature measured at the ink carrying surface of only one of the cylinders (3 or 5). The sensor pairs 20.1, 20.2 and 21.1, 21.2 could likewise be replaced with single 10 sensors measuring the temperature at one of the blanket cylinders (4 or 6) and at one of the inking units (55.1 or 55.2).

Moreover, it is also possible to provide separate cooling units for some or all of the cylinders 3, 4, 5, 6 and rollers 9, 10, 11, 12, 13, 14 50.1, 50.2 and to control the temperature of the cooling agent applied to these cylinders and rollers individually via 15 the control unit as a function of separate sensors.

In order to provide acceptable conditions for printing with water based inks, the temperature of the ink and of the surfaces the ink is applied to should be maintained at certain predetermined levels. For example, in a water based ink containing 2% ethanol amine or ammonia, if the temperature of the print cylinders is maintained between 93-95 20 degrees, and 75 -95 % humidity, high print quality can be maintained. Naturally, these levels are merely illustrative, and may vary in accordance with a number of factors including the particular construction of the printing unit, the particular composition of the water based ink, and the paper being used. In accordance with the present invention, the temperature of the cylinders 3-6 and rollers 9-14 are monitored by the control unit, and is 25 maintained within the desired temperature range (or at a desired set point) by selectively controlling the temperature of the cooling agent flowing through these cylinders and rollers.

For example, when a printing press is first started, the printing unit components 3-6, 9-14, 50.1, 50.2 will be relatively cold. Therefore, the control unit 18, by monitoring the temperature sensors 19-21, will determine that the temperature on the ink carrying surfaces of the blanket cylinders 4, 6, print cylinders 3,5, and vibrator rollers 11, 14 is

5 below the desired temperature level for the water based ink and paper being used. The control unit 18 will then advise the press operator to pre-heat the printing unit 1 prior to printing. Such a preheating could be accomplished by running the press while off impression until the temperature of the blanket cylinders 4, 6, print cylinders 3,5, and vibrator rollers 11, 14 has reached the desired level. Alternatively, the control unit 18

10 could raise the temperature of the cooling agent in the blanket cylinder cooling unit 8, the print cylinder cooling unit 7, and the inker cooling unit 15 until the temperature of the blanket cylinders 4, 6, print cylinders 3,5, and vibrator rollers 11, 14 has reached the desired level.

In contrast, after the printing press has been printing for a period of time, the temperature

15 on the ink carrying surfaces of one or more of the blankets, print forms or rollers (70, 71, 9-14, 50.1, 50.2) within the printing unit 1 may rise above the desired temperature level. The control unit 18, by monitoring the temperature sensors 19-21, will detect that the temperature on the ink carrying surfaces of the blankets, print forms, and/or vibrator rollers (71.1, 71.2, 70.1, 70.2, 11, and/or 14) is above the desired temperature level for

20 the water based ink and paper being used, and will then lower the temperature of the cooling agent in the respective cooling units (7,8, and/or 15) as necessary until the temperature of the blankets, print forms, and/or vibrator rollers has reached the desired level.

Fig. 3 shows a further embodiment of the printing unit of Fig. 1. The pipes 7.1, 7.2,

25 8.1, 8.2, 15.3, 15.4 and sensors 19-21 have been omitted for ease of illustration. In accordance with this embodiment, blowing sections 23.1, 23.2 are mounted within the printing unit 1, and connected to a blowing unit 23 via an air inlet pipe 24.1 and an air

exhaust pipe 24.2. The blowing unit 23 includes an air cooling mechanism and an air heating mechanism, and is coupled to and controlled by the control unit 18 to maintain the temperature of the water based ink carrying surfaces of the blanket cylinders 4, 6 at the set point. The blowing devices 23.1 and 23.2 each include outputs 80 to blow air

5 onto the surfaces of the blanket cylinder 4, 6 carrying the water based ink films. The blowing devices 23.1 and 23.2 also include suction inputs 81 for sucking the atmosphere surrounding the water based ink carrying surfaces out through the air exhaust pipe 24.2. In this manner, the water based ink carrying surfaces of the blanket are cooled or heated from the outside via the blowing unit 23, and from the inside via

10 the cooling units 8.

Referring to Fig. 3A, the control unit 18 monitors the surface temperature of the upper blanket cylinder (T_{b_1}) and of the lower blanket cylinder (T_{b_2}) via the sensors 20.1, 20.2. If an average of these sensor readings is above the set point, then the control unit 18 lowers the temperature of the air output from the air inlet 24.1 by an amount X ,

15 waits a time period T , and then monitors the outputs of the sensors 20.1, 20.2 again. These steps are repeated until the average of the sensor readings is equal to the set point. Similarly, if the average of these sensor readings is below the set point, then the control unit 18 raises the temperature of the air output from the air inlet 24.1 by an amount X , waits a time period T , monitors the outputs of the sensors 20.1, 20.2 again,

20 and repeats these steps until the average of the sensor readings is equal to the set point. The heating and/or cooling of the air by the blowing device 23 can be accomplished inside or outside the blowing devices 23.1, 23.2. Moreover, in accordance with a further embodiment of the present invention, the blowing devices 23.1, 23.2 could be arranged within the printing unit 1 to blow air on both the print cylinders 3,5 and the

25 blanket cylinders 4,6.

As discussed above with regard to Figs. 2(a-c), since the temperature of the cylinders and rollers in the printing unit 1 tends to rise naturally due to the heat generated from

the operation of the press. it is possible to eliminate steps 130 and 135 in the flow charts of Fig. 3a, and to rely instead on the natural tendency of the temperature of the cylinders and rollers to rise over time. In such an embodiment, the air heating mechanism can be omitted from the blowing device 23. In addition, the above 5 referenced flow chart is merely illustrative, and could be replaced with any suitable algorithm known in the art for matching a measured value to a desired value.

In accordance with another embodiment of the present invention, the blowing unit 23 includes a humidifier 255 which is controlled by the control unit 18 and supplied by water supply lines 250.1, 250.2. The humidifier 255 may be arranged within the 10 blowing unit 23, within the blowing devices 23.1, 23.2, in between the blowing unit 23 and blowing devices 23.1, 23.2, or in any other suitable location. If the control unit 18 determines that the monitored relative humidity is below a humidity set point, it will activate the humidifier until the monitored humidity is equal to the humidity set point. By maintaining the humidity of the atmosphere surrounding the ink carrying surfaces at 15 the humidity setpoint (e.g. between 75% and 95% relative humidity), evaporation of water from the water-based ink can be minimized while still preventing condensation of water into the ink. Moreover, by controlling the humidity within the atmosphere surrounding the print and/or blanket cylinders, the temperature set point can be set at a static value (e.g., 93-95 degrees Fahrenheit).

20 Fig. 4 shows a temperature controlling device in accordance with the present invention for maintaining an even temperature profile across the printing unit 1. The sidewalls 2 include a gear-side wall 2.1 and a work-side wall 2.2. During press operation, the gear-side wall 2.1, which houses the gears which drive the cylinders and/or rollers in the printing unit 1, tends to become significantly hotter than the work-side wall 2.2. 25 Consequently, it is advantageous to cool the gear-side wall 2.1 to provide an even temperature profile over the width of said printing unit 1.

In accordance with the present invention, a gear-side temperature sensor 26 is mounted on the gear-side wall 2.1 and a work-side temperature sensor 28 is mounted on the work-side wall 2.2. Each of the temperature sensors 26, 28 is connected to the control unit 18. A friction reducing fluid such as mineral oil or synthetic oil is conventionally provided within a gear box 32 of the gear-side wall 2.1 to lubricate the moving parts within the gear-side wall 2.1. A fluid distribution 82 is provided for circulating the friction reducing fluid to and from a heat exchanger 29. The heat exchanger 29 may be of conventional construction, and operates to cool the fluid in the fluid distribution 82 by, for example, inter-twining the fluid distribution 82 with a fluid pipe 62 containing a cooling fluid such as water. The control unit 18 monitors the temperature of the work-side and gear-side walls 2.2, 2.1 via the sensors and controls a fluid cooling unit 61 as a function of the monitored temperatures. The control unit 18, via the fluid cooling unit 61, adjusts the temperature of the cooling fluid within the fluid pipe 62 in order to maintain a temperature differential between the values measured at sensors 26 and 28 within a certain setpoint range (e.g. $|T_{26} - T_{28}| \leq 7$ degrees Fahrenheit).

In the above embodiment, it is anticipated that the design of the work-side frame components is such that the temperature of the work-side frame at 27 does remain within approximately 10 degrees Farenheit of the ambient temperature of the surrounding atmosphere. If, however, the work-side frame exceeds the ambient temperature by more than 10 degrees Farenheit, it may be necessary to provide a work-side cooling mechanism for the work side frame 2.2. Referring to Fig. 4(a), the cooling mechanism, could, for example, include a cooling unit 99 which circulates a cooling agent through pipes 98 which are mounted to the work-side frame 2.2. The cooling unit 99 could monitor the ambient temperature of the air surrounding the work-side frame 2.2 via a temperature sensor 27, monitor the temperature of the work-side frame 2.2 via the sensor 28, and lower the temperature of the cooling agent if the difference between the monitored values exceed 10 degrees Farenheit.

Fig. 5 shows a longitudinal section of one of the blanket cylinders 4,6. The blanket cylinder 4,6 includes the blanket cylinder inlet 8.1 and a blanket cylinder outlet 8.2 for circulating the cooling agent through the blanket cylinder. In addition, the blanket cylinder includes a compressed air inlet 36 which transmits compressed air across the

5 length of the cylinder and out a plurality of apertures 38 along the surface of the blanket cylinder in order to axially install and remove a printing blanket. In accordance with a preferred embodiment of the present invention, the air inlet 36 is isolated from the cooling agent circulating within the cylinder in the manner described in copending application serial number 08/265,178 filed June 24, 1994 entitled

10 Distortion Reduced Lithographic Printing Press, the specification of which is hereby incorporated by reference. The cooling agent can be circulated through the print cylinder 3, 5, and rollers 9-14 in a similar manner.

What is claimed is:

1. A printing unit for a rotary printing press including
 - a print cylinder for supporting a print form suitable for printing with water based inks, the print form having an outer ink carry surface;
 - an inking unit for applying water based ink to the print form, the inking unit having an outer ink carrying surface;
 - a blanket cylinder for supporting a printing blanket, the printing blanket having an outer ink carrying surface; and
 - a cooling unit for maintaining a temperature of the ink carrying surface of one or more of the print form, the inking unit, and the printing blanket at a predetermined level which is above a dew point of an atmosphere surrounding the outer ink carrying surfaces.
2. The printing unit according to claim 1, wherein the cooling unit includes a print cylinder cooling unit coupled to the print cylinder, the print cylinder cooling unit circulating a first cooling agent through the print cylinder to maintain the outer ink carrying surface of the print form at the predetermined level.
3. The printing unit according to claim 2, wherein the cooling unit includes a blanket cylinder cooling unit coupled to the blanket cylinder, the blanket cylinder cooling unit circulating a second cooling agent through the print cylinder to maintain the outer ink carrying surface of the printing blanket at the predetermined level.
4. The printing unit according to claim 2, wherein the inking unit further includes a vibrator roller having an outer ink carrying surface, and wherein the cooling unit includes a vibrator roller cooling unit coupled to the vibrator roller, the vibrator roller cooling unit circulating a second cooling agent through the vibrator roller to maintain the outer ink carrying surface of the vibrator roller at the predetermined level.

5. The printing unit according to claim 4, wherein the inking unit includes a plurality of vibrator rollers.
6. The printing unit according to claim 4, wherein the inking unit includes a fountain roller having an outer ink carrying surface, and wherein the vibrator roller cooling unit is coupled to the fountain roller, the vibrator roller cooling unit circulating a third cooling agent through the fountain roller to maintain the outer ink carrying surface of the fountain roller at the predetermined level.
7. The printing unit according to claim 1, further comprising a temperature sensor mounted within the printing unit; a control unit having an input coupled to the temperature sensor and an output connected to the cooling unit, the control unit controlling the cooling unit as a function of a temperature value received from the temperature sensor.
8. The printing unit according to claim 2, further comprising a print form temperature sensor mounted within the printing unit; a control unit having an input coupled to the print form temperature sensor and an output connected to the print cylinder cooling unit, the control unit controlling a temperature of the first cooling agent as a function of a print form temperature value received from the print form temperature sensor.
9. The printing unit according to claim 3, further comprising a blanket temperature sensor mounted within the printing unit; a control unit having an input coupled to the blanket temperature sensor and an output connected to the blanket cylinder cooling unit, the control unit controlling a temperature of the second cooling agent as a function of a blanket temperature value received from the blanket temperature sensor.

10. The printing unit according to claim 3, further comprising
 - a vibrator temperature sensor mounted within the printing unit;
 - a control unit having an input coupled to the vibrator temperature sensor and an output connected to the vibrator roller cooling unit, the control unit controlling a temperature of the second cooling agent as a function of a vibrator temperature value received from the vibrator temperature sensor.
11. The printing unit according to claim 1, further comprising
 - an air blower mounted within the printing unit, the air blower having an air intake for blowing air into an atmosphere around the blanket cylinder and an air exhaust for sucking air out of the atmosphere around the blanket cylinder.
12. The printing unit according to claim 11, further comprising
 - a blanket temperature sensor for monitoring a blanket temperature level of the printing blanket;
 - a control unit having an input connected to the blanket temperature sensor and having outputs connected to the air blower and the cooling unit, the control unit controlling the air blower and cooling unit as a function of the blanket temperature level received from the blanket temperature sensor.
13. The printing unit according to claim 12, wherein the air blower further includes an air cooling mechanism.
14. The printing unit according to claim 13, wherein the air blower further includes a humidifier.
15. The printing unit according to claim 12, wherein the air blower further includes a fan and an air heating mechanism.

16. The printing unit according to claim 1, wherein the cooling unit circulates an agent through one or more of the print cylinder, the blanket cylinder, and inking unit.

17. The printing unit according to claim 16, wherein the cooling unit further includes an agent cooling mechanism.

18. The printing unit according to claim 17, wherein the cooling unit further includes an agent heating mechanism.

19. The printing unit according to claim 1, further comprising

- a gear side wall including a gear box;
- a work-side wall, the blanket cylinder and print cylinder supported for rotation by the gear-side and work-side walls;
- a first sensor mounted to the gear-side wall for monitoring a gear-side temperature level;
- a second sensor mounted to the work-side wall for monitoring a work-side temperature level;
- a heat exchanger coupled to the gear box for controlling a temperature of a fluid within the gear box;
- a control unit having inputs connected to the first and second sensors and having an output connected to the heat exchanger, the control unit actuating the heat exchanger as a function of the work-side and gear-side temperature levels.

20. The printing unit according to claim 19, further comprising:

- a temperature sensor for monitoring an ambient temperature level of an atmosphere surrounding the work side wall;
- a work side cooling mechanism having inputs coupled to the temperature sensor and the second sensor, and an output coupled to the work-side wall, the cooling unit controlling the temperature of the work-side wall as a function of the monitored

work-side temperature level and ambient temperature level.

21. A printing unit for a rotary printing press including
 - a print cylinder for supporting a print form suitable for printing with water based inks, the print form having an outer ink carry surface;
 - an inking unit for applying water based ink to the print form, the inking unit having an outer ink carrying surface;
 - a blanket cylinder for supporting a printing blanket, the printing blanket having an outer ink carrying surface; and
 - a cooling unit for maintaining a temperature of the ink carrying surface of one or more of the print form, the inking unit, and the printing blanket at a predetermined level.

1/8

Fig.1

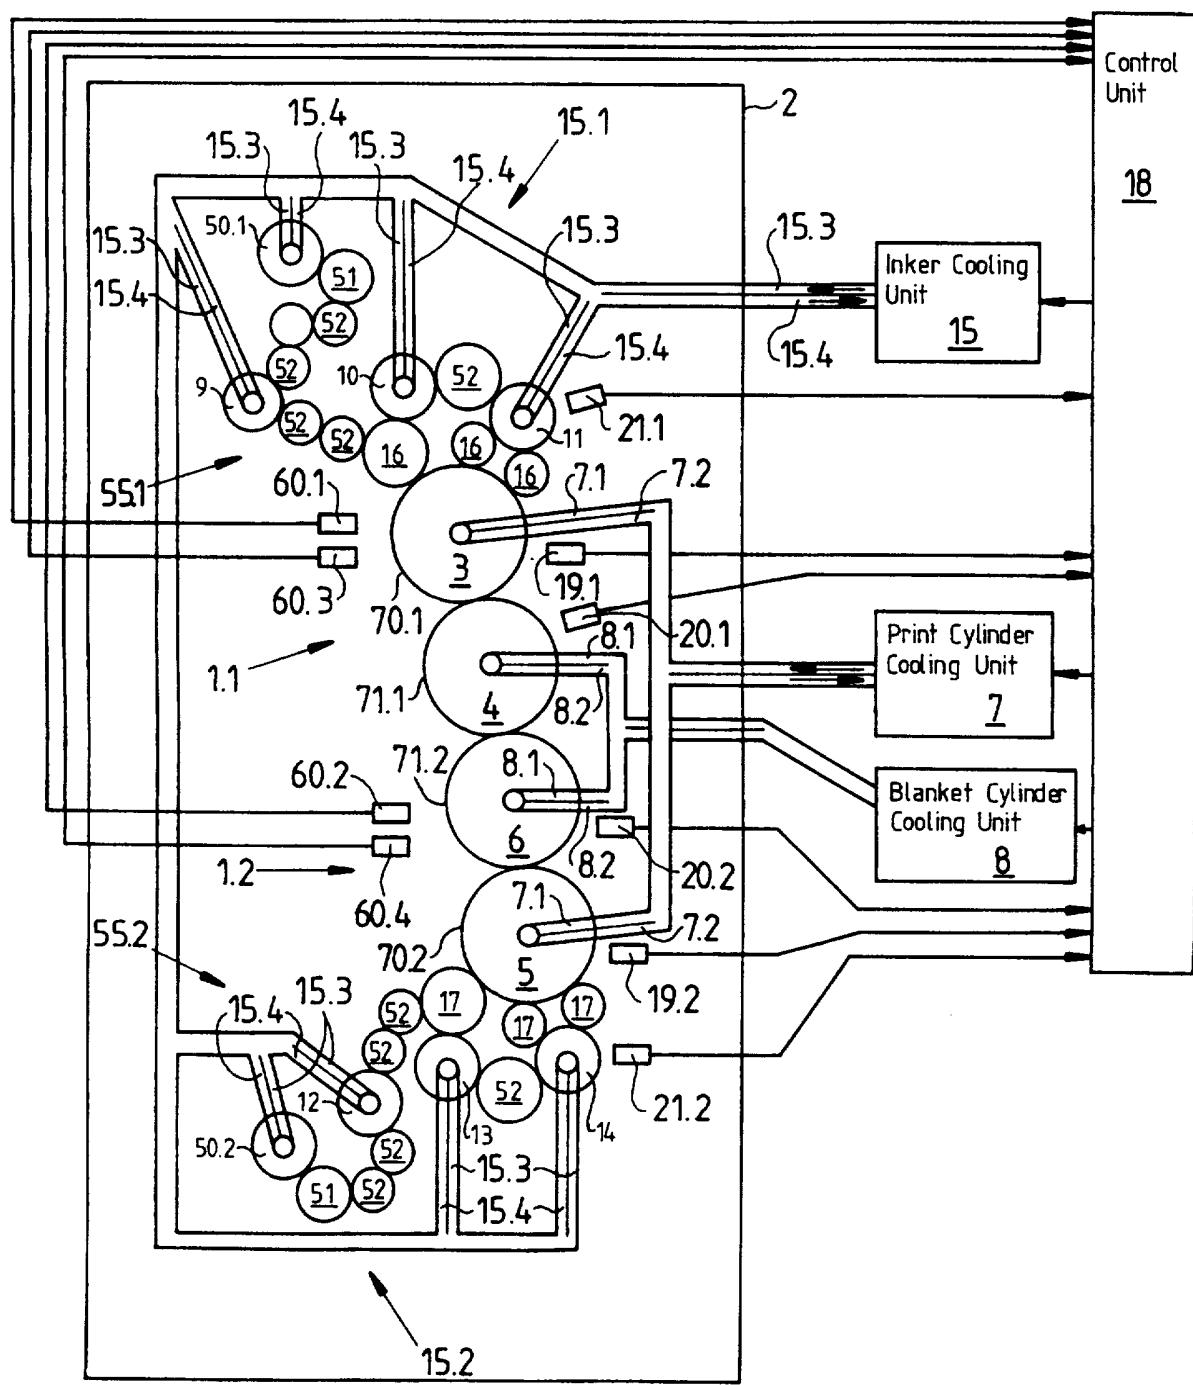


Fig.2a

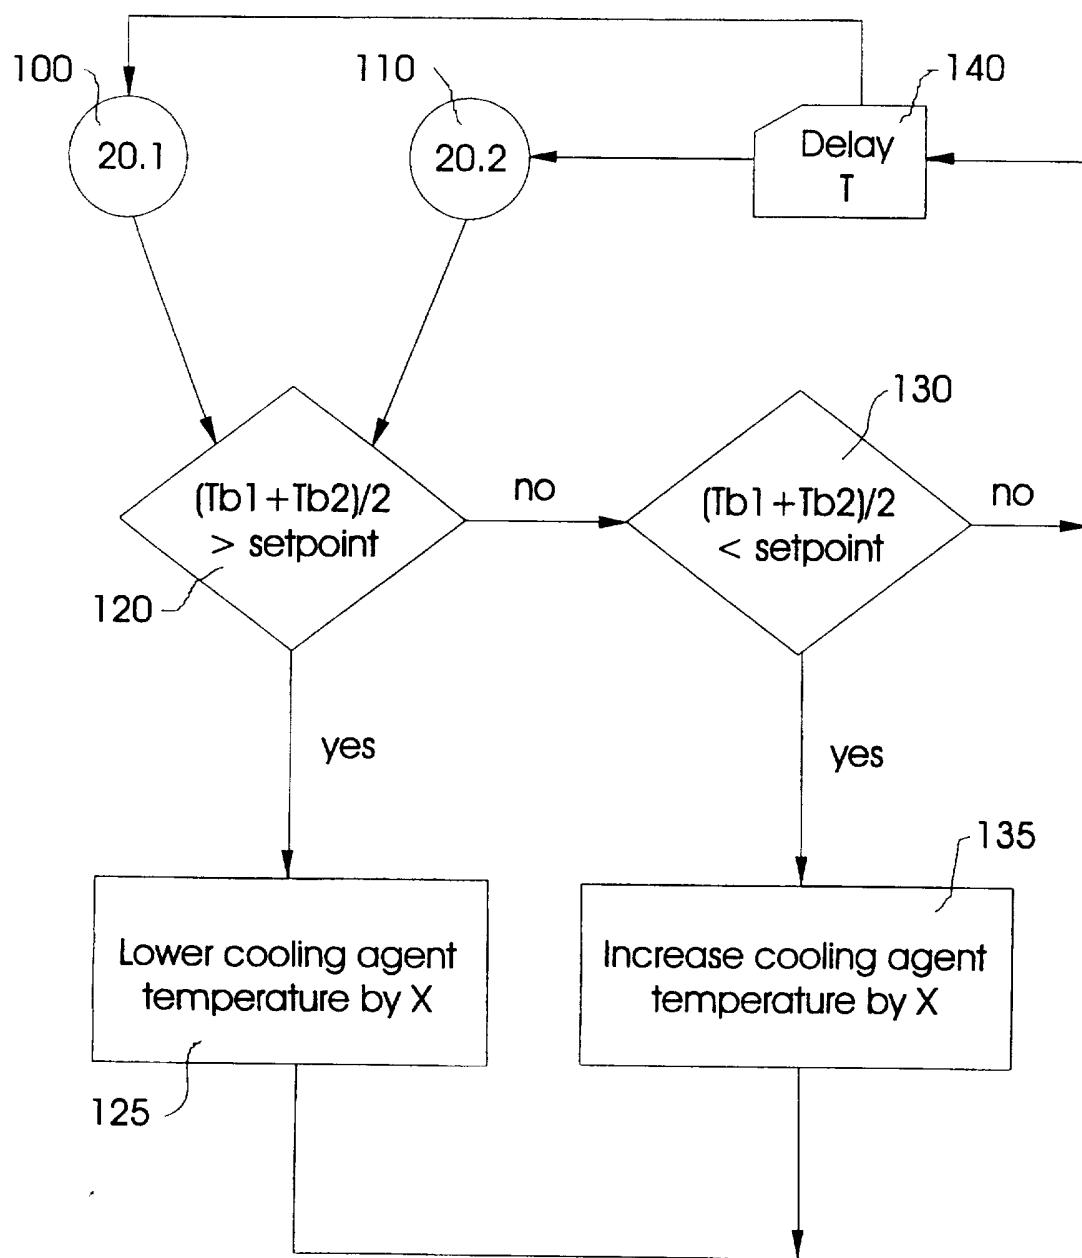


Fig.2b


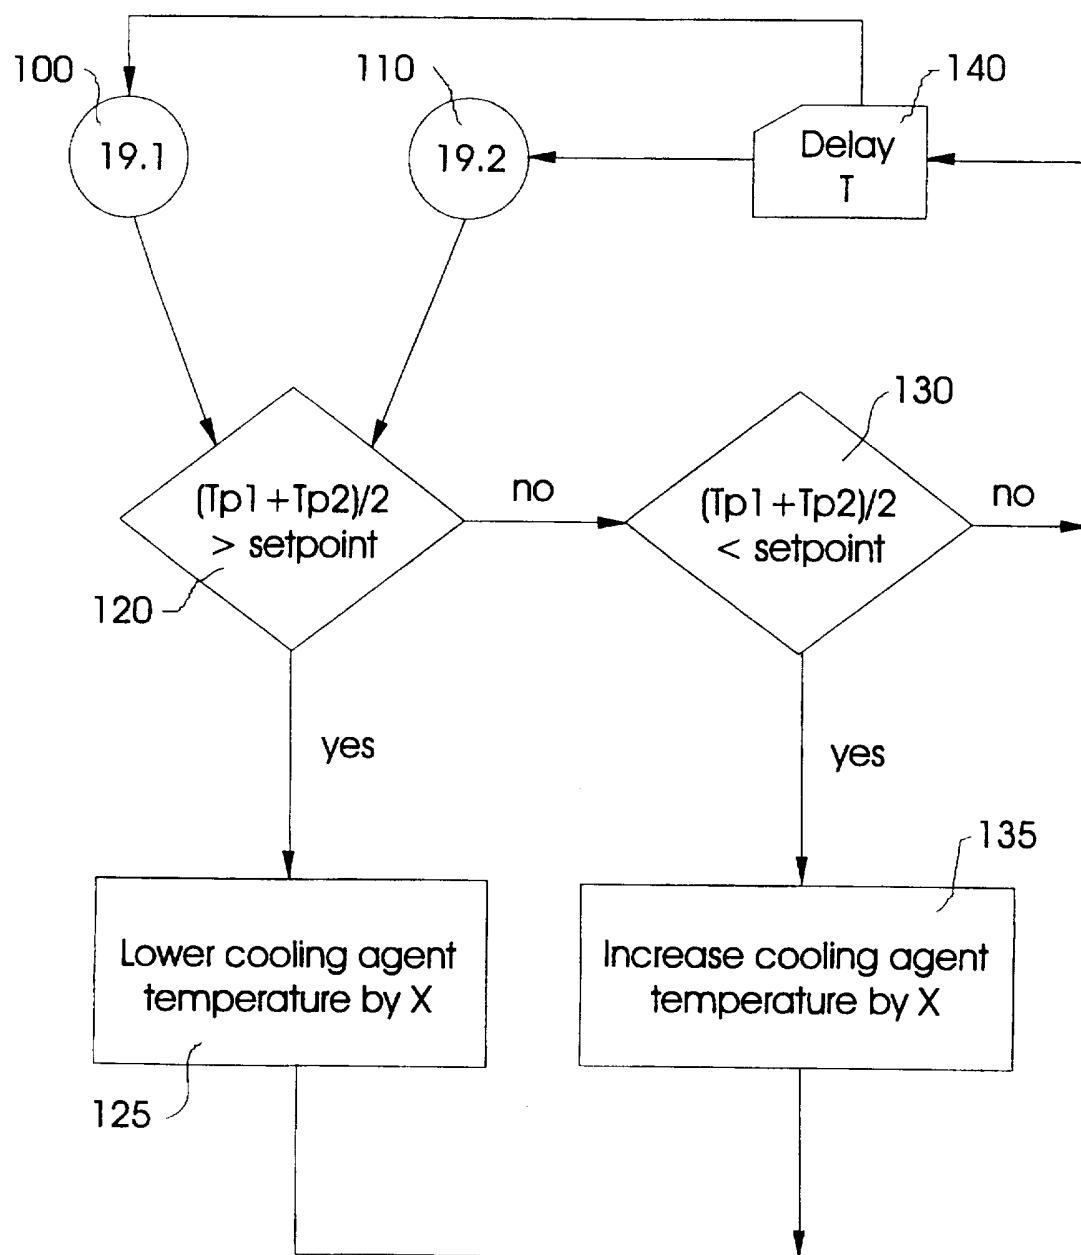


Fig.2c

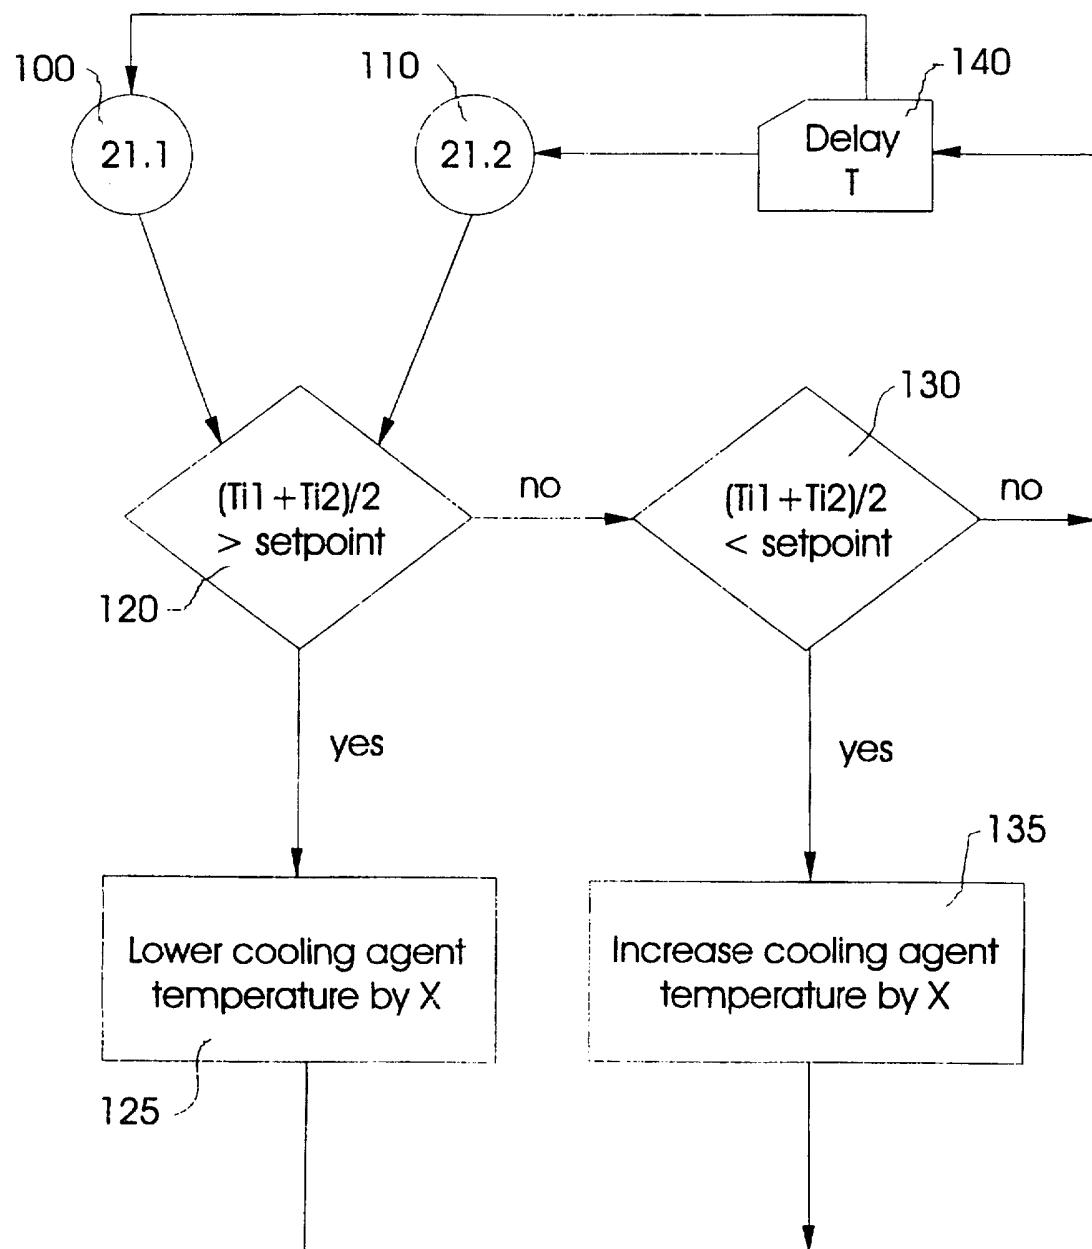

5/8

Fig.3


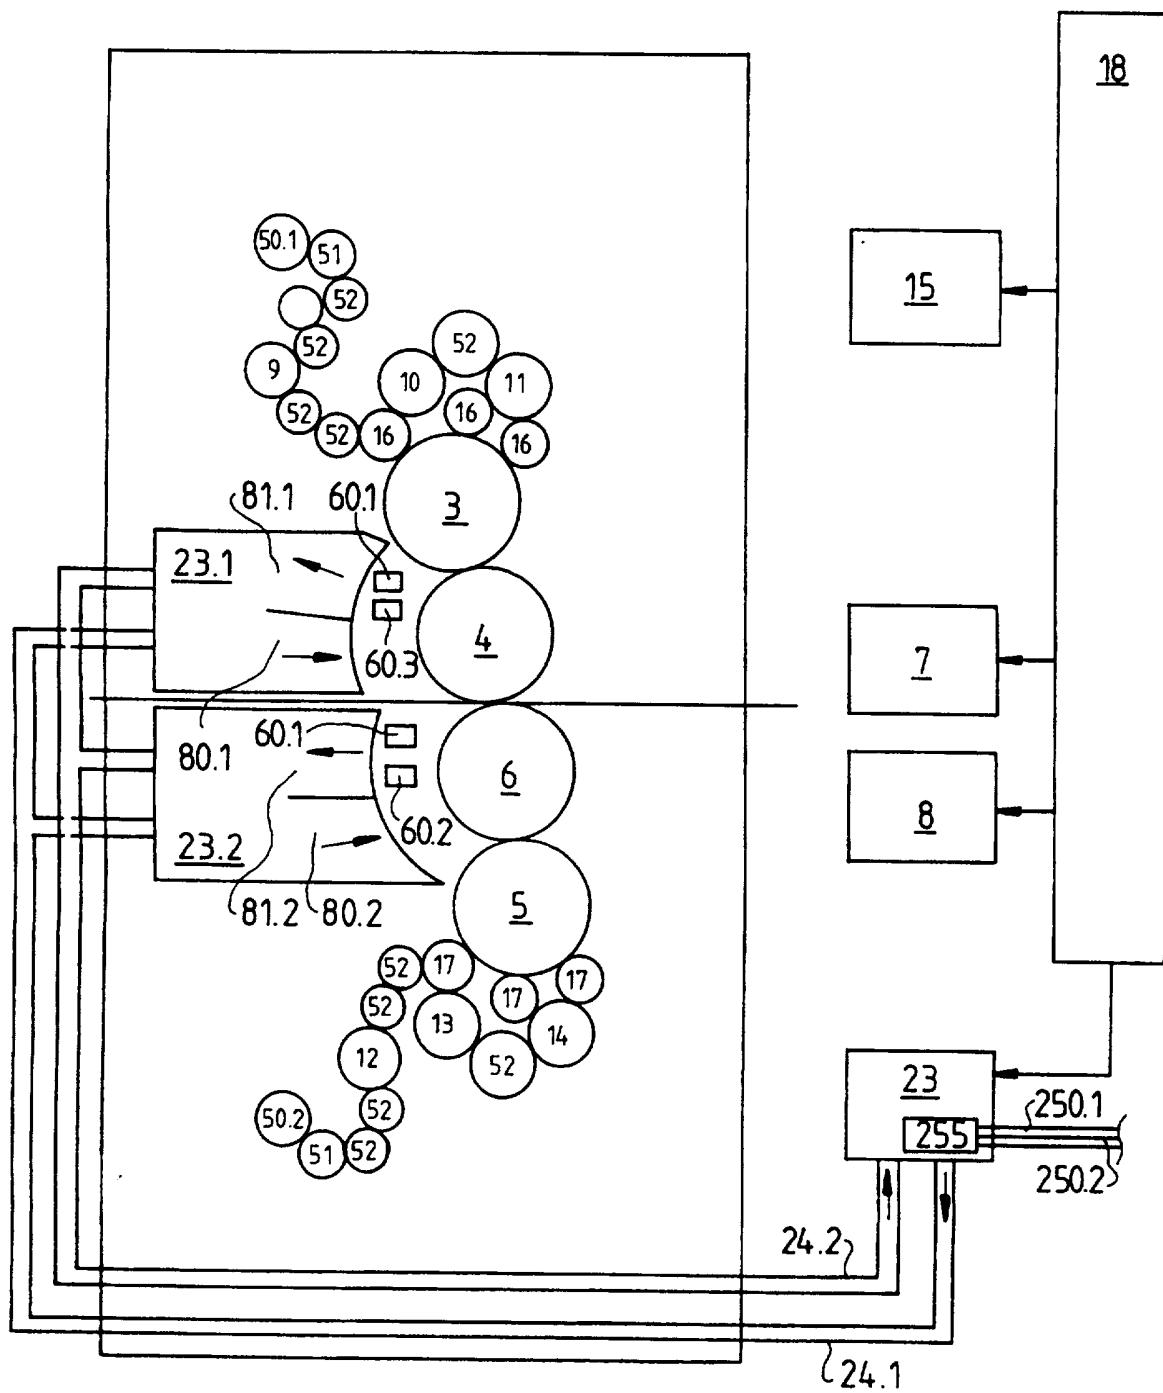


Fig.3a

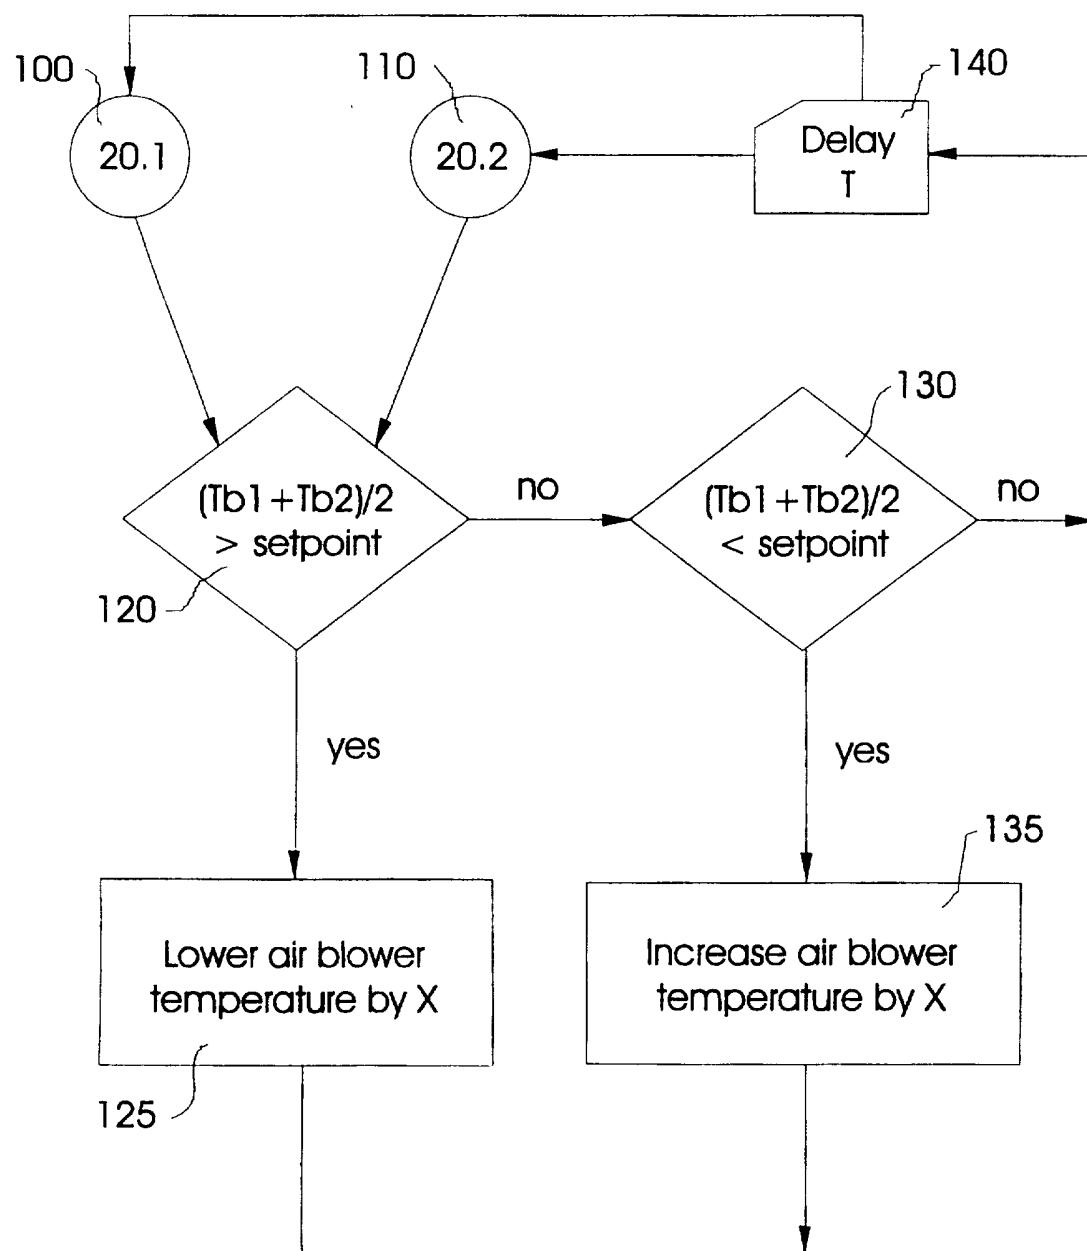

7/8

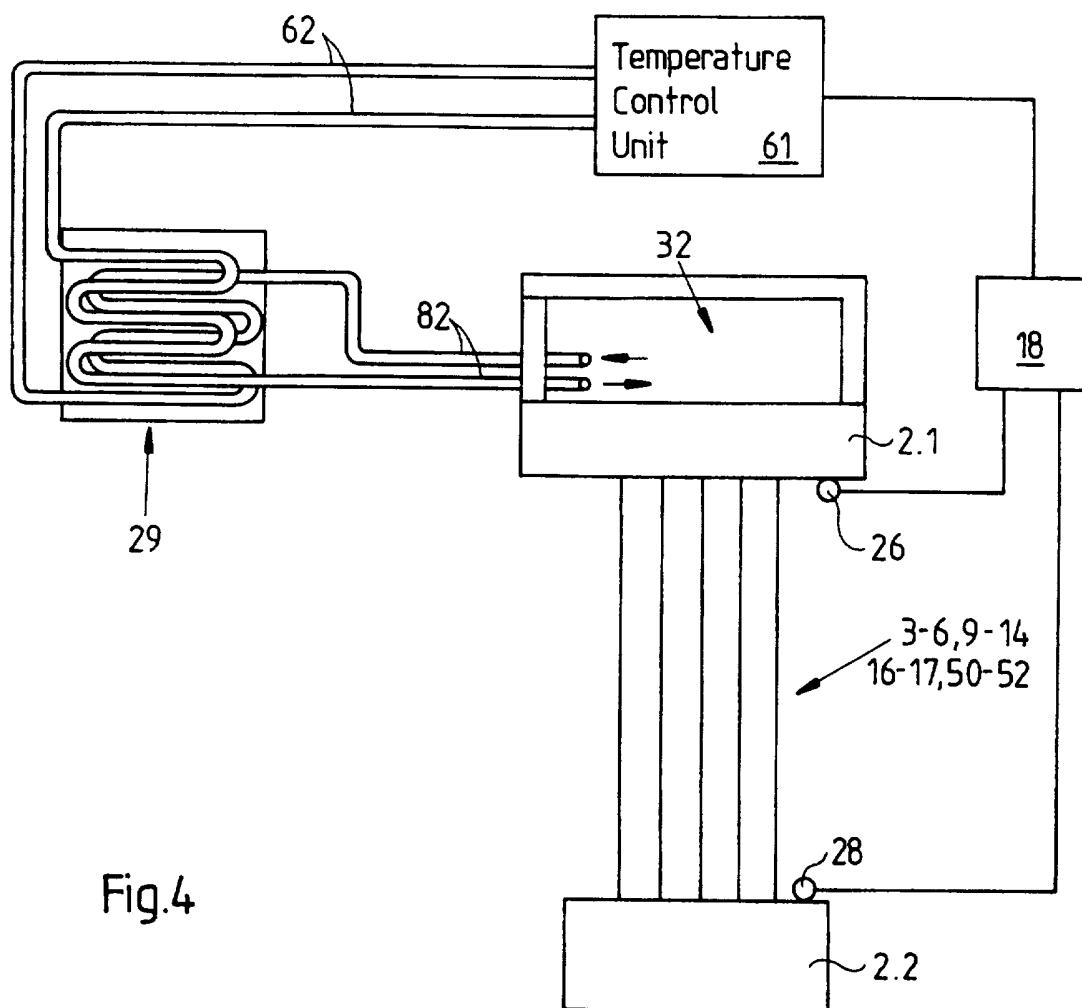


Fig.4


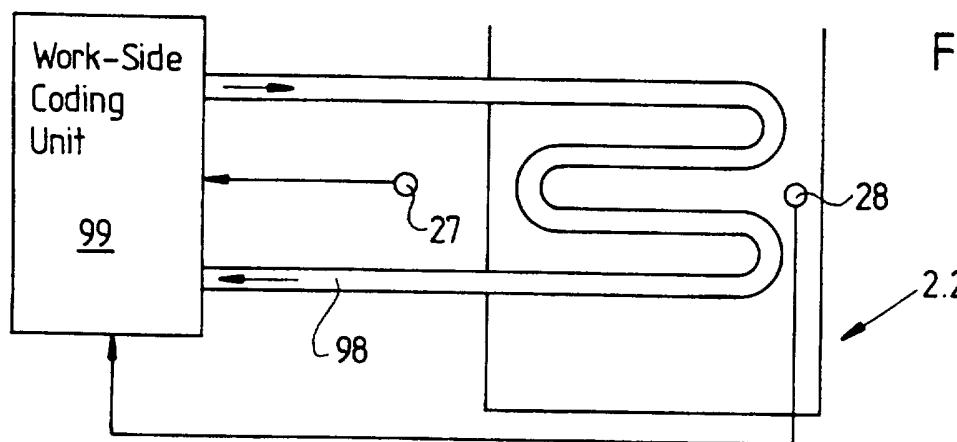


Fig.4a

8/8

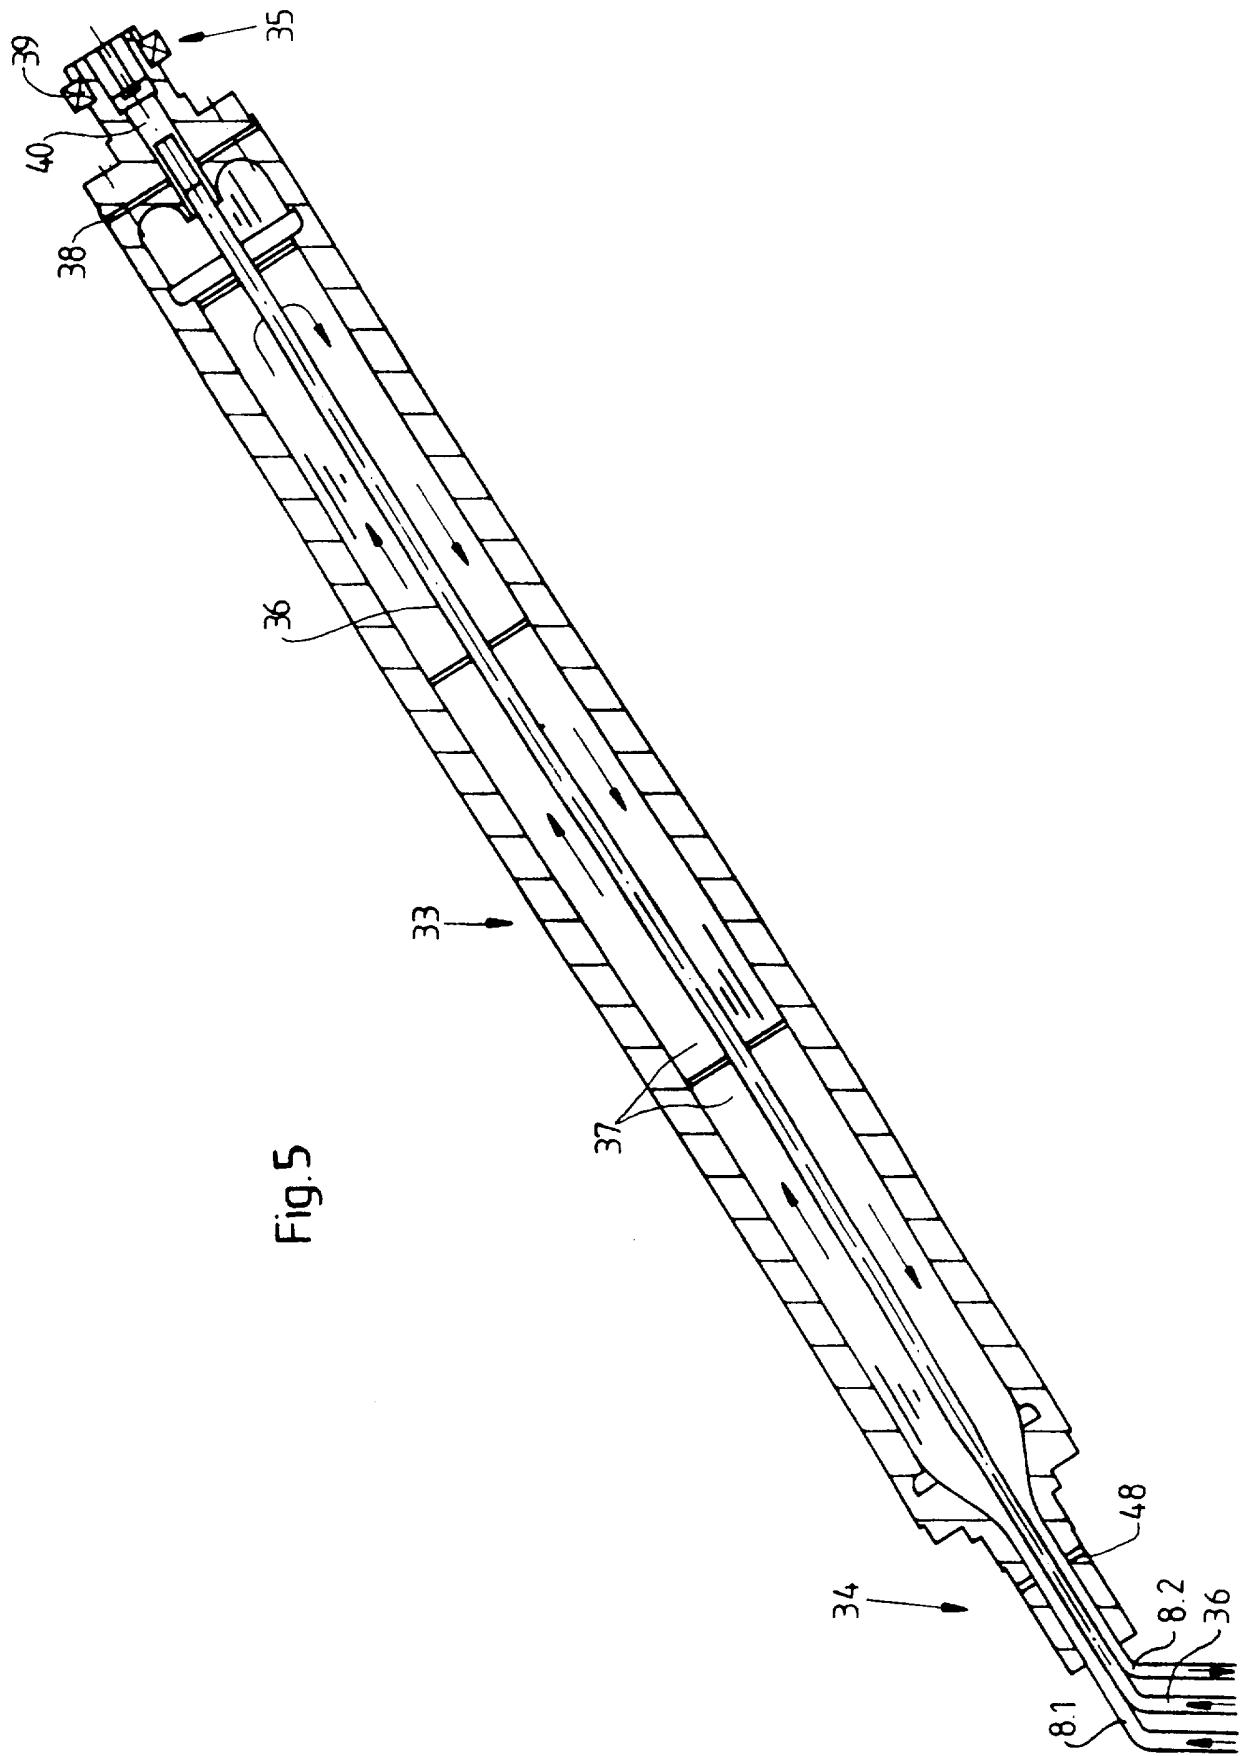

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 97/00907

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B41F13/22 B41F31/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B41F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 16 11 233 A (KELLER) 10 December 1970 see page 2, line 29 - page 3, line 3; claim 1 ---	1,21
A	US 5 010 817 A (GROSSHAUSER) 30 April 1991 see abstract; claims 1,2 ---	1,21
A	US 5 375 518 A (KURZ) 27 December 1994 cited in the application see the whole document -----	1-21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

1

Date of the actual completion of the international search

20 June 1997

Date of mailing of the international search report

02.07.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Helpiö, T.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 97/00907

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1611233 A	10-12-70	US 3741115 A	26-06-73
US 5010817 A	30-04-91	DE 3814049 A DE 58908162 D EP 0339409 A JP 1317789 A	09-11-89 15-09-94 02-11-89 22-12-89
US 5375518 A	27-12-94	DE 4202544 A AT 137446 T AT 137169 T DE 9218193 U DE 59206131 D DE 59206184 D EP 0553447 A EP 0602312 A JP 2572516 B JP 5261889 A US 5309838 A	05-08-93 15-05-96 15-05-96 19-08-93 30-05-96 05-06-96 04-08-93 22-06-94 16-01-97 12-10-93 10-05-94