

(19)



(11)

EP 1 054 225 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.06.2007 Bulletin 2007/24

(51) Int Cl.:
F28D 9/00 (2006.01) F28F 3/08 (2006.01)

(21) Application number: **99959689.3**

(86) International application number:
PCT/JP1999/006864

(22) Date of filing: **08.12.1999**

(87) International publication number:
WO 2000/034729 (15.06.2000 Gazette 2000/24)

(54) **PLATE TYPE HEAT EXCHANGER FOR THREE FLUIDS AND METHOD OF MANUFACTURING THE HEAT EXCHANGER**

PLATTENWÄRMETAUSCHER FÜR DREI FLUIDE UND VERFAHREN ZU DESSEN HERSTELLUNG
ECHANGEUR THERMIQUE DU TYPE A PLAQUES POUR TROIS FLUIDES ET PROCEDE DE
FABRICATION

(84) Designated Contracting States:
DE FR IT SE

(30) Priority: **08.12.1998 JP 34827798**

(43) Date of publication of application:
22.11.2000 Bulletin 2000/47

(73) Proprietor: **EBARA CORPORATION**
Ohta-ku,
Tokyo 144-8510 (JP)

(72) Inventors:
• **Furukawa, Yasunari**
Osaka-shi,
Osaka 541-0046 (JP)
• **Uedono, Norio**
Osaka-shi,
Osaka 541-0046 (JP)
• **Inoue, Naoyuki**
Tokyo 144-8510 (JP)

- **Suzuki, Akiyoshi**
Tokyo 144-8510 (JP)
- **Watanabe, Kaoru**
Isehara-shi,
Kanagawa 259-1126 (JP)
- **Hideshima, Hidemitsu**
Isehara-shi,
Kanagawa 259-1126 (JP)

(74) Representative: **Wagner, Karl H.**
Wagner & Geyer,
Patentanwälte,
Gewürzmühlstrasse 5
80538 München (DE)

(56) References cited:
EP-A- 0 819 907 DE-A- 19 712 599
DE-A- 19 712 637 JP-A- 1 244 290
JP-A- 2 254 290 JP-A- 10 019 482
JP-U- 4 010 265 US-A- 4 327 802
US-A- 5 462 113

EP 1 054 225 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a plate heat exchanger for three fluids, and more particularly to a plate heat exchanger for three fluids, which allows a first fluid to exchange heat with a second fluid, and then with a third fluid, and also to a method for producing the heat exchanger.

Background Art

[0002] Conventionally, with this type of heat exchanger, as shown in FIG. 6, a preceding-stage heat exchange section 13A having interplate first fluid paths f1 for passing a first fluid La between the plates 15 and interplate second fluid paths f2 for passing a second fluid Lc between the plates 15 is formed at one side in a plate longitudinal direction of a plate laminate composed of many plates 15 laminated one on another. The interplate first fluid paths f1 and the interplate second fluid paths f2 are positioned alternately in a plate laminating direction. A succeeding-stage heat exchange section 13B having interplate first fluid paths f1 continued from the interplate first fluid paths f1 in the preceding-stage heat exchange section 13A and adapted to pass the first fluid La between the plates 15 and interplate third fluid paths f3 for passing a third fluid Lb between the plates 15 is formed at the other side in the plate longitudinal direction of the plate laminate. The interplate first fluid paths f1 and the interplate third fluid paths f3 are positioned alternately in the plate laminating direction (see Japanese laid-open Patent Publication No. 9-60996).

[0003] Specifically, the heat exchanger has a structure in which the preceding-stage heat exchange section 13A for exchanging heat between the first fluid La and the second fluid Lc, and the succeeding-stage heat exchange section 13B for exchanging heat between the first fluid La and the third fluid Lb are located parallel in the longitudinal direction of the plates 15 and integrated together.

[0004] Such a conventional structure can make the entire heat exchanger considerably compact in comparison with the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B being composed of separate plate heat exchangers. However, the conventional heat exchanger still has room for improvement in view of the fact that further downsizing of the equipments and further energy saving have been demanded in recent years.

[0005] US-A-4,327,802 was used as a basis for the preamble of claim 1 and discloses a multiple fluid heat exchanger having a unitary construction and formed of a stack of dished plates to form at least two fluid passages within the heat exchange elements formed by the plates and passages for a third fluid formed between at least some of the elements. The stack of plates are adapted

to be simultaneously bonded together by a brazing or soldering operation, with the stack including at least one set of dished plates joined at their peripheries to form first and second fluid passages in a first set heat exchange elements, with the third fluid passages being formed in a second set of heat exchange elements. One set of heat exchange elements may have spaced fluid passages with corrugated heat exchange fins between the fluid passages to provide transverse passages for a cooling fluid, such as air. Additional arrangements of the sets of elements may be utilized for a fourth and/or fifth fluid.

[0006] Attention is further drawn to JP-A-10-19482.

Disclosure of Invention

[0007] The present invention has been made in view of the above drawbacks. It is therefore an object of the present invention mainly to ensure further compactness and achieve a further decrease in a heat loss, by adopting a rational structure in integrating the preceding-stage heat exchange section and the succeeding-stage heat exchange section.

(1) According to the present invention defined in claim 1, there is provided a plate heat exchanger for three fluids, which allows a first fluid to exchange heat with a second fluid, and then with a third fluid, characterized in that:

in a plate laminate comprising many plates laminated one on another,
a preceding-stage heat exchange section having interplate first fluid paths for passing the first fluid between the plates and interplate second fluid paths for passing the second fluid between the plates is formed at one side of the plate laminate in a plate laminating direction, the interplate first fluid paths and the interplate second fluid paths being positioned alternately in the plate laminating direction;
a succeeding-stage heat exchange section having interplate first fluid paths for passing the first fluid between the plates and interplate third fluid paths for passing the third fluid between the plates is formed at the other side of the plate laminate in a plate laminating direction, the interplate first fluid paths and the interplate third fluid paths being positioned alternately in the plate laminating direction;
a first fluid crossover path is provided for allowing the first fluid which has passed as parallel streams through a plurality of the interplate first fluid paths in the preceding-stage heat exchange section to flow as parallel streams into a plurality of the interplate first fluid paths in the succeeding-stage heat exchange section; and
plates located at a boundary between the pre-

ceding-stage heat exchange section and the succeeding-stage heat exchange section among the laminated plates form a heat insulating layer in which no fluid flows.

With the above arrangement, the heat insulating layer can prevent heat from transferring between the preceding-stage heat exchange section and the succeeding-stage heat exchange section having different temperature levels from each other, thus suppressing heat loss due to heat transfer between the two heat exchange sections (in short, a heat loss due to heat exchange between the second fluid and the third fluid that is not expected). Hence, heat exchange with the first fluid in a heat exchanger becomes better, and more advantageous heat exchanger in energy saving can be achieved.

Furthermore, the heat insulating layer is formed at the boundary between the preceding-stage heat exchange section and the succeeding-stage heat exchange section in such a state that the plate laminated structure in which many plates are laminated together is employed. Hence, it is easy to form the heat insulating layer itself and to produce the heat exchanger efficiently.

(2) According to the present invention defined in claim 2, each of the portions between three or more of the adjacent plates located at the boundary between the preceding-stage heat exchange section and the succeeding-stage heat exchange section among the laminated plates forms the heat insulating layer in which no fluid flows.

With the above arrangement, in the present invention defined in claim 1, each of the portions between three or more of the adjacent plates forms the heat insulating layer. Thus, the heat insulating effect can be increased, and a heat loss due to heat transfer between the preceding-stage heat exchange section and the succeeding-stage heat exchange section can be suppressed more effectively in such a state that its entire thickness of the multi-layered heat insulating layer is large.

Further, with the above arrangement, even when the plates with a corrugated cross-section are laminated together in such a state that the ridges of the corrugations of the plates are contacted with those of the facing plates (namely, when heat transfer is expected via bonding portions between the ridges of the corrugations), the multi-layered heat insulating layer produces an increased heat insulating effect, and a heat loss due to heat transfer between the preceding-stage heat exchange section and the succeeding-stage heat exchange section can be suppressed more effectively.

(3) According to the present invention defined in claim 3, the plates located at the boundary between the preceding-stage heat exchange section and the

succeeding-stage heat exchange section among the laminated plates form an airtight space under vacuum, and the heat insulating layer serves as a vacuum heat insulating layer.

With the above arrangement, in the present invention defined in claim 1 or 2, the heat insulating layer formed between the plates serves as a vacuum heat insulating layer. Thus, a high heat insulating effect based on a vacuum space can more effectively suppress a heat loss due to heat transfer between the preceding-stage heat exchange section and the succeeding-stage heat exchange section.

Further, with the above arrangement, since the heat exchanger needs no heat insulating material and the heat insulating layer is formed by utilizing the plate laminated structure, it is easier to form the heat insulating layer.

(4) According to the present invention defined in claim 4, the first fluid crossover path extends to a plurality of the interplate first fluid paths in the preceding-stage heat exchange section and a plurality of the interplate first fluid paths in the succeeding-stage heat exchange section in such a state that the first fluid crossover path pierces through the plates in the plate laminating direction inside the plate laminate.

Compared with a structure in which the first fluid crossover path for transferring the first fluid from the interplate first fluid paths of the preceding-stage heat exchange section to the interplate first fluid paths of the succeeding-stage heat exchange section is formed outside the plate laminate and connected to an external pipe, the above arrangement of the present invention enables the structure around the plate laminate to be simplified and hence the entire heat exchanger can be made more compact.

In addition to the above arrangement, each of inlet paths and outlet paths for the fluids (i.e., a first fluid inlet path for allowing the first fluid to flow as parallel streams into a plurality of the interplate first fluid paths in the preceding-stage heat exchange section, a second fluid inlet path for allowing the second fluid to flow as parallel streams into a plurality of the interplate second fluid paths in the preceding-stage heat exchange section, a second fluid outlet path for gathering and discharging the second fluid having passed through a plurality of the interplate second fluid paths in the preceding-stage heat exchange section, a third fluid inlet path for allowing the third fluid to flow as parallel streams into a plurality of the interplate third fluid paths in the succeeding-stage heat exchange section, a third fluid outlet path for gathering and discharging the third fluid having passed through a plurality of the interplate third fluid paths in the succeeding-stage heat exchange section, and a first fluid outlet path for gathering and discharging the first fluid having passed through a plurality of the interplate first fluid paths in the suc-

ceeding-stage heat exchange section) may extend to the corresponding interplate fluid paths while piercing through the plates in the plate laminating direction inside the plate laminate. This arrangement enables the structure around the plate laminate to be further simplified and hence the entire heat exchanger can be made more compact.

(5) According to the present invention defined in claim 5, there is provided a method for producing the plate heat exchanger for three fluids according to claim 3, wherein:

the respective interplate fluid paths are formed under vacuum, and simultaneously the plates located at the boundary between the preceding-stage heat exchange section and the succeeding-stage heat exchange section form the airtight space under vacuum as the vacuum heat insulating layer, by brazing the adjacent plates of many laminated plates.

[0008] With the above method, the adjacent plates are bonded, and the vacuum heat insulating layer is simultaneously formed, by so-called vacuum brazing. Thus, compared with an alternative method, for example, by which an airtight space is formed by other bonding method between the plates located at the boundary between the preceding-stage heat exchange section and the succeeding-stage heat exchange section, and then air is bled from the airtight space to form a vacuum heat insulating layer, it is very easy to form the heat insulating layer itself and to produce heat exchanger efficiently by the above method.

Brief Description of Drawings

[0009]

FIG. 1 is a schematic diagram showing a structure of an absorption refrigerating machine;
FIG. 2 is a vertical cross-sectional view showing a heat exchanger;
FIG. 3 is a sectional side elevation showing a part of the heat exchanger;
FIG. 4 is a perspective view schematically showing the heat exchanger;
FIG. 5 is a vertical cross-sectional view showing a heat exchanger of another embodiment; and
FIG. 6 is a schematic view showing a structure of a conventional heat exchanger.

Best Mode for Carrying Out the Invention

[0010] FIG. 1 shows a schematic structure of an absorption refrigerating machine, in which the reference numeral 1 denotes a high temperature regenerator, 2 a low temperature regenerator, 3 a condenser, 4 an evaporator, and 5 an absorber. In the high temperature regener-

ator 1, a low concentration absorption solution La (e.g., an aqueous solution of lithium bromide) which has absorbed a refrigerant R (e.g., water) is heated by a high temperature heater 6 to evaporate and separate the refrigerant R from the low concentration absorption solution La.

[0011] An intermediate concentration absorption solution Lb from which the refrigerant R has been separated in the high temperature regenerator 1 is sent to the low temperature regenerator 2 via a passage r1. A refrigerant vapor R' generated in the high temperature regenerator 1 is sent as a heat source to a low temperature heater 7 in the low temperature regenerator 2 via a passage r2. Thus, in the low temperature regenerator 2, the intermediate concentration absorption solution Lb is heated by the refrigerant vapor R' as a heat source which has been generated in the high temperature regenerator 1, for thereby further evaporating and separating the refrigerant R from the intermediate concentration absorption solution Lb.

[0012] The refrigerant vapor R' generated in the low temperature regenerator 2 and the refrigerant vapor R' which has been used as a heat source in the low temperature heater 7 are cooled by a cooler 8 in the condenser 3 to be condensed. The condensed refrigerant R (i.e., a liquid refrigerant) is sent to the evaporator 4 via a passage r3.

[0013] In the evaporator 4, the condensed refrigerant R sent from the condenser 3 is sprayed onto an interior heat exchanger 11 by a sprayer 10, while the refrigerant R is being circulated by a refrigerant pump 9A, for thereby cooling a fluid C to be cooled (e.g., water or brine) flowing in the interior heat exchanger 11 by evaporating the refrigerant R and utilizing the heat of vaporization thereof.

[0014] On the other hand, a high concentration absorption solution Lc from which the refrigerant R has been separated in the low temperature regenerator 2 is sent to the absorber 5 via a passage r4. In the absorber 5, the high concentration absorption solution Lc sent from the low temperature regenerator 2 is sprayed by a sprayer 12, and hence absorbs the refrigerant vapor R' generated in the evaporator 4, forming a low pressure atmosphere for evaporating the sprayed refrigerant R at a low temperature in the evaporator 4.

[0015] The low concentration absorption solution La which has absorbed the refrigerant vapor R' in the absorber 5 is returned to the high temperature regenerator 1 via a passage r5 by a solution pump 9B, and the step of separating the refrigerant R from the low concentration absorption solution La is conducted again.

[0016] The reference numeral 13 denotes a heat recovery type heat exchanger for allowing the low concentration absorption solution La having a low temperature which is to be returned to the high temperature regenerator 1 to exchange heat with the high concentration absorption solution Lc having an intermediate temperature which is to be sent from the low temperature regenerator 2 to the absorber 5, and then to exchange heat with the

intermediate concentration absorption solution Lb having a high temperature which is to be sent from the high temperature regenerator 1 to the low temperature regenerator 2, for thereby recovering the heat that the high concentration absorption solution Lc and the intermediate concentration absorption solution Lb hold. In FIG. 1, the heat recovery type heat exchanger 13 is shown only schematically to describe the order of heat exchange of the low concentration absorption solution La with the high concentration absorption solution Lc and the intermediate concentration absorption solution Lb, and does not correspond with its concrete structure to be described later on.

[0017] The reference numeral 14 denotes a cooler for removing the heat of absorption generated at the time when the sprayed absorption solution Lc in the absorber 5 absorbs the refrigerant. A cooling fluid W (e.g., cooling water circulated into a cooling tower) is supplied to the cooler 14 in the absorber 5 and the cooler 8 in the condenser 3.

[0018] The heat recovery type heat exchanger 13 for exchanging heat among three fluids, i.e., the low concentration absorption solution La, the high concentration absorption solution Lc, and the intermediate concentration absorption solution Lb (hereinafter respectively referred to as a first fluid, a second fluid, and a third fluid), is constructed in the following manner: As shown in FIGS. 2 through 4, a plate 15 has a corrugated cross-sectional shape, except its portions near both ends thereof, and has holes p1 to p4 for inlet and outlet path at corners thereof. As shown in FIG. 3, a plurality of the plates 15 are laminated in such a state that the ridges of the corrugations of the plates 15 are contacted with those of the facing plates. As shown in FIG. 2 and 5, a preceding-stage heat exchange section 13A for exchanging heat between the first fluid La and the second fluid Lc is formed at one side of the plate laminate in a plate laminating direction. A succeeding-stage heat exchange section 13B for exchanging heat between the first fluid La which has exchanged heat with the second fluid Lc in the preceding-stage heat exchange section 13A and the third fluid Lb is formed at the other side of the plate laminate in the plate laminating direction.

[0019] In the preceding-stage heat exchange section 13A, with the above-mentioned plate laminate structure, interplate first fluid paths f1 for passing the first fluid La between the adjacent plates 15 and interplate second fluid paths f2 for passing the second fluid Lc between the adjacent plates 15 are positioned alternately in the plate laminating direction. While these fluids are passing through these interplate fluid paths f1 and f2, heat is exchanged between the first fluid La and the second fluid Lc via the plates 15 serving as heat transfer walls.

[0020] Similarly, in the succeeding-stage heat exchange section 13B, with the plate laminated structure, interplate first fluid paths f1 for passing the first fluid La between the adjacent plates 15 and interplate third fluid paths f3 for passing the third fluid Lb between the adja-

cent plates 15 are positioned alternately in the plate laminating direction. While these fluids are passing through these interplate fluid paths f1 and f3, heat is exchanged between the first fluid La and the third fluid Lb via the plates 15 serving as heat transfer walls.

[0021] Since, as shown in FIG. 3, the ridges of the corrugations of the plates are contacted with those of the facing plates in the plate laminated structure, the interplate fluid paths f1 to f3 are finely divided into many segments in the plate width direction perpendicular to the fluid flowing direction. Thus, a larger area of heat transfer can be ensured, and high strength can be obtained.

[0022] Since portions of each plate 15 near both ends thereof are in the form of a flat plate without corrugations, headers for the passages finely divided in the plate width direction are formed at both end portions of the interplate fluid paths f1 to f3. On the other hand, the holes p1 among the holes p1 to p4 for inlet and outlet path formed at the four corners of the respective plates 15 constitute a first fluid crossover path m which extends between the headers beside one end of the interplate first fluid paths f1 in the preceding-stage heat exchange section 13A and the headers beside one end of the interplate first fluid paths f1 in the succeeding-stage heat exchange section 13B inside the plate laminate. In a portion of the first fluid crossover path m which pierces through the interplate second fluid paths f2 and the interplate third fluid paths f3, the neck d of the hole p1 of the plate 15 extends to the corresponding hole p1 of the next plate 15 in the lamination of the plates 15, and hence each of communications is blocked between the first fluid crossover path m and the interplate second fluid paths f2, and between the first fluid crossover path m and the interplate third fluid paths f3.

[0023] In order to show the first fluid crossover path m, and inlet and outlet paths i1, o1, i2, o2, i3 and o3 to be described later on, FIG. 2 represents a vertical cross-sectional view of the heat exchanger 13 with overlaps of these flow paths being developed.

[0024] Among the four holes p1 to p4 for inlet and outlet path, the hole p4 located at a diagonal position to the hole p1 forming the first fluid crossover path m constitutes a first fluid inlet path i1 which extends between the headers beside the other end of the interplate first fluid paths f1 in the preceding-stage heat exchange section 13A inside the plate laminate. The hole p4 further constitutes a first fluid outlet path o1 which extends between the headers beside the other end of the interplate first fluid paths f1 in the succeeding-stage heat exchange section 13B inside the plate laminate. In a portion of the first fluid inlet path i1 which pierces through the interplate second fluid paths f2, and in a portion of the first fluid outlet path O1 which pierces through the interplate third fluid paths f3, the neck d of the hole p4 extends to the corresponding hole p4 of the next plate 15 in the lamination of the plates 15, and hence each of communications is blocked between the first fluid inlet path i1 and the interplate second fluid paths f2, and between the first fluid outlet path o1

and the interplate third fluid paths f3.

[0025] Among the four holes p1 to p4 for inlet and outlet path, the hole p2 located adjacent, in the plate width direction, to the hole p1 forming the first fluid crossover path m constitutes a second fluid inlet path i2 which extends between the headers beside the one end of the interplate second fluid paths f2 in the preceding-stage heat exchange section 13A inside the plate laminate. The hole p2 further constitutes a third fluid outlet path o3 which extends between headers beside the one end of the interplate third fluid paths f3 in the succeeding-stage heat exchange section 13B inside the plate laminate. In a portion of the second fluid inlet path i2 which pierces through the interplate first fluid paths f1, and in a portion of the third fluid outlet path o3 which pierces through the interplate first fluid paths f1, the neck d of the hole p2 extends to the corresponding hole p2 of the next plate 15 in the lamination of the plates 15, and hence each of communications is blocked between the second fluid inlet path i2 and the interplate first fluid paths f1, and between the third fluid outlet path o3 and the interplate first fluid paths f1.

[0026] Among the four holes p1 to p4 for inlet and outlet path, the remaining hole p3 constitutes a second fluid outlet path o2 which extends between the headers beside the other end of the interplate second fluid paths f2 in the preceding-stage heat exchange section 13A inside the plate laminate, and constitutes a third fluid inlet path i3 which extends between the headers beside the other end of the interplate third fluid paths f3 in the succeeding-stage heat exchange section 13B inside the plate laminate. In a portion of the second fluid outlet path o2 which pierces through the interplate first fluid paths f1, and in a portion of the third fluid inlet path i3 which pierces through the interplate first fluid paths f1, the neck d of the hole p3 of the plate 15 extends to the corresponding hole p3 of the next plate 15 in the lamination of the plates 15, as in the case of the other inlet and outlet paths, and hence each of communications is blocked between the second fluid outlet path o2 and the interplate first fluid paths f1, and between the third fluid inlet path i3 and the interplate first fluid paths f1.

[0027] Specifically, with the above structure, the first fluid La flows as parallel streams from the first fluid inlet path i1 into a plurality of the interplate first fluid paths f1 in the preceding-stage heat exchange section 13A. Subsequently, the first fluid La having passed as parallel streams through a plurality of the interplate first fluid paths f1 in the preceding-stage heat exchange section 13A is gathered at the first fluid crossover path m, and then flows as parallel streams into a plurality of the interplate first fluid paths f1 in the succeeding-stage heat exchange section 13B. Then, the first fluid La having passed as parallel streams through a plurality of the interplate first fluid paths f1 in the succeeding-stage heat exchange section 13B is discharged in a gathered state from the first fluid outlet path o1.

[0028] In contrast with this flow of the first fluid La, the

second fluid Lc flows from the second fluid inlet path i2 into a plurality of the interplate second fluid paths f2 as parallel streams in the preceding-stage heat exchange section 13A. The second fluid Lc having passed through a plurality of the interplate second fluid paths f2 as parallel streams is discharged in a gathered state from the second fluid outlet path o2, and hence the first fluid La (low concentration absorption solution) exchanges heat with the second fluid Lc (high concentration absorption solution) as countercurrent flows at a plurality of the paths in the preceding-stage heat exchange section 13A.

[0029] In the succeeding-stage heat exchange section 13B, the third fluid Lb flows from the third fluid inlet path i3 into a plurality of the interplate third fluid paths f3 as parallel streams. The third fluid Lb having passed through a plurality of the interplate third fluid paths f3 as parallel streams is discharged in a gathered state from the third fluid outlet path o3, and hence the first fluid La (low concentration absorption solution) which has exchanged heat with the second fluid Lc (high concentration absorption solution) in the preceding-stage heat exchange section 13A exchanges heat with the third fluid Lb (intermediate concentration absorption solution) as countercurrent flows at a plurality of the paths in the succeeding-stage heat exchange section 13B.

[0030] The holes p1 constituting the first fluid crossover path m are blocked by the plates 15 located at both ends in the plate laminating direction of the plate laminate.

[0031] The plate laminate described above has a structure in which the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B are arranged parallel in the plate laminating direction, and integrated. On the other hand, the two adjacent plates 15 located at the boundary between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B block the holes p2 to p4 except the holes p1 constituting the first fluid crossover path m. The neck d of one of the holes p1 constituting the first fluid crossover path m in these two adjacent plates 15 extends to the other corresponding hole p1. The two adjacent plates 15 located at the boundary form an airtight space under vacuum state. Thus, this interplate airtight space under vacuum serves as a vacuum heat insulating layer 16, for thereby preventing a heat loss due to heat transfer between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B.

[0032] To produce the heat exchanger 13 of the above structure, the plates 15 are laminated in such a state that a brazing material is put between bonding-required portions, such as the portions between folded-back peripheral edges of the adjacent plates 15, the portions between the neck d of each of the holes p1 to p4 and each of the corresponding holes p1 to p4 to which the neck d extends, and the like. These laminated plates are set into a vacuum furnace and heated under vacuum in the vacuum furnace, and hence the bonding-required portions are

brazed. Further, this brazing under vacuum results in the bonding of the plates 15 and the formation of the above-mentioned airtight space under vacuum as the vacuum heat insulating layer 16 between the adjacent plates 15 located at the boundary between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B, at the same time.

[Another Embodiment]

[0033] Another embodiment will be described below.

[0034] The above embodiment shows an example in which the portion between the two adjacent plates 15 located at the boundary between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B serves as the vacuum heat insulating layer 16. However, as shown in FIG. 5, each of the portions between three or more of the adjacent plates 15 located at the boundary between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B may form the vacuum heat insulating layer 16.

[0035] In the above-mentioned embodiment, vacuum brazing was used for bonding the plates 15 and forming the vacuum heat insulating layer 16 at the same time. However, with respect to the present invention according to claim 4, as the case may be, an airtight space may be formed between the plates 15 located at the boundary between the two heat exchange sections 13A and 13B by bonding the plates 15, and then a vacuum heat insulating layer 16 may be formed by bleeding air from this airtight space.

[0036] The higher effect of insulating heat can be obtained, as the degree of vacuum in the vacuum heat insulating layer 16 is higher. However, the proper degree of vacuum in the vacuum heat insulating layer 16 may be concretely determined depending on various conditions. A high degree of vacuum is not always necessary for the vacuum heat insulating layer 16.

[0037] Further, with respect to the present invention according to claim 2, a heat insulating material or a gas (e.g., a non-corrosive gas) may be filled between the plates 15 located at the boundary between the preceding-stage heat exchange section 13A and the succeeding-stage heat exchange section 13B to form a heat insulating layer between the plates 15, instead of providing the vacuum heat insulating layer 16.

[0038] The number of the interplate fluid paths f1, f2 arranged parallel in the preceding-stage heat exchange section 13A, and the number of the interplate fluid paths f1, f3 arranged parallel in the succeeding-stage heat exchange section 13B may be determined by the required amount of heat exchange, respectively, and is not restricted to the number of them that was shown in the above embodiment.

[0039] In order to implement the present invention according to claim 6, various method can be applied as concrete methods for brazing the plates 15 in a vacuum

atmosphere. The degree of vacuum and a rarefied gas during brazing may also be determined depending on various conditions.

[0040] The plate heat exchanger for three fluids according to the present invention can be applied not only to exchange heat between absorption solutions in an absorption refrigerating machine, but also to exchange heat between various fluids.

10 Industrial Applicability

[0041] The present invention relates to a plate heat exchanger for three fluids, which flows two fluids alternately between plates in a laminate of plates, whereby a first fluid exchanges heat with a second fluid, and then the first fluid further exchanges heat with a third fluid. The present invention can be used for a refrigerator such as an absorption refrigerating machine.

20 Claims

1. A plate heat exchanger (13) for three fluids, which allows a first fluid (La) to exchange heat with a second fluid (Lc), and then with a third fluid (Lb), **characterized in that:**

in a plate laminate comprising many plates (15) laminated one on another,

a preceding-stage heat exchange section (13A) having interplate first fluid paths (f1) for passing the first fluid (La) between the plates and interplate second fluid paths (f2) for passing the second fluid (Lc) between the plates is formed at one side of the plate laminate in a plate laminating direction, said interplate first fluid paths (f1) and said interplate second fluid paths (f2) being positioned alternately in the plate laminating direction;

a succeeding-stage heat exchange section (13B) having interplate first fluid paths (f1) for passing the first fluid (La) between the plates and interplate third fluid paths (f3) for passing the third fluid (Lb) between the plates is formed at the other side of the plate laminate in a plate laminating direction, said interplate first fluid paths (f1) and said interplate third fluid paths (f3) being positioned alternately in the plate laminating direction; and

a first fluid crossover path (m) is provided for allowing the first fluid which has passed as parallel streams through a plurality of said interplate first fluid paths in said preceding-stage heat exchange section (13A) to flow as parallel streams into a plurality of said interplate first fluid paths in said succeeding-stage heat exchange section (13B),

characterized in that

plates (15) located at a boundary between said preceding-stage heat exchange section (13A) and said succeeding-stage heat exchange section (13B) among the laminated plates form a heat insulating layer (16) in which no fluid flows.

2. A plate heat exchanger for three fluids according to claim 1, wherein:

each of the portions between three or more of the adjacent plates (15) located at the boundary between said preceding-stage heat exchange section (13A) and said succeeding-stage heat exchange section (13B) among the laminated plates forms the heat insulating layer (16) in which no fluid flows.

3. A plate heat exchanger for three fluids according to claim 1 or 2, wherein:

the plates (15) located at the boundary between said preceding-stage heat exchange section (13A) and said succeeding-stage heat exchange section (13B) among the laminated plates form an airtight space under vacuum, and said heat insulating layer (16) serves as a vacuum heat insulating layer.

4. A plate heat exchanger for three fluids according to any one of claims 1 through 3, wherein:

said first fluid crossover path (m) extends to a plurality of said interplate first fluid paths in said preceding-stage heat exchange section (13A) and a plurality of said interplate first fluid paths in said succeeding-stage heat exchange section (13B) in such a state that said first fluid crossover path (m) pierces through the plates (15) in the plate laminating direction inside said plate laminate.

5. A method for producing the plate heat exchanger for three fluids according to claim 3, wherein:

said respective interplate fluid paths are formed under vacuum, and simultaneously the plates located at the boundary between said preceding-stage heat exchange section (13A) and said succeeding-stage heat exchange section (13B) from the airtight space under vacuum as said vacuum heat insulating layer (16), by brazing the adjacent plates (15) of many laminated plates.

Patentansprüche

1. Plattenwärmetauscher (13) für drei Fluide bzw. Strömungsmittel, wobei der Wärmetauscher gestattet, dass ein erstes Fluid (La) mit einem zweiten Fluid (Lc) und sodann mit einem dritten Fluid (Lb) in Wärmeaustausch steht, **dadurch gekennzeichnet, dass**

in einem mehrere Platten (15) miteinander laminiert aufweisenden Plattenlaminat ein Wärmetauschabschnitt (13A) der vorausgehenden Stufe gebildet ist, wobei dieser Wärmetauschabschnitt (13A) erste Zwischenplatten-Fluidpfade (f1) für den Durchgang des ersten Fluids (La) zwischen den Platten aufweist und ferner zweite Zwischenplatten-Fluidpfade (f2) für den Durchgang des zweiten Fluids (Lc) zwischen den Platten, wobei der Wärmetauschabschnitt (13A) an einer Seite des Plattenlaminats in einer Plattenlaminierungsrichtung gebildet ist, wobei ferner die ersten Zwischenplatten-Fluidpfade (f1) und die zweiten Zwischenplatten-Fluidpfade (f2) abwechselnd in der Plattenlaminierungsrichtung positioniert sind; ein Wärmetauschabschnitt (13B) einer darauffolgenden Stufe erste Zwischenplatten-Fluidpfade (f1) für den Durchgang des ersten Fluids (La) zwischen den Platten aufweist und ferner dritte Zwischenplatten-Fluidpfade (f3) für den Durchgang des dritten Fluids (Lb) zwischen den Platten, wobei der Wärmetauschabschnitt (13B) an der anderen Seite des Plattenlaminats in einer Plattenlaminierungsrichtung gebildet ist, wobei ferner die ersten Zwischenplatten-Fluidpfade (f1) und die dritten Zwischenplatten-Fluidpfade (f3) abwechselnd in der Plattenlaminierungsrichtung positioniert sind; und ein erster Fluidkreuzungspfad (m) vorgesehen ist, und zwar um zu gestatten, dass das erste Fluid, welches in parallelen Strömen durch eine Vielzahl von ersten Zwischenplatten-Fluidpfaden in dem Wärmetauschabschnitt (13A) der vorausgehenden Stufe gelaufen ist als parallele Ströme in eine Vielzahl der erwähnten ersten Zwischenplatten-Fluidpfade in dem Wärmetauschabschnitt (13B) der darauf folgenden Stufe strömt,

dadurch gekennzeichnet, dass

Platten (15), angeordnet an einer Grenze zwischen dem Wärmetauschabschnitt (13A) der vorhergehenden Stufe und dem Wärmetauschabschnitt (13B) der darauf folgenden Stufe unter den laminierten Platten, eine Wärmeisolierschicht (16), in der kein Fluid fließt, bilden.

2. Plattenwärmetauscher für drei Fluids nach Anspruch 1, wobei jeder der Teile zwischen den drei oder mehr der benachbarten Platten (15), angeordnet an der Grenze zwischen dem Wärmetauschabschnitt (13A) der vorhergehenden Stufe und dem Wärmetauschabschnitt (13B) der darauf folgenden Stufe, unter den laminierten Platten die Wärmeisolierschicht (16)

bildet, in der kein Fluid fließt.

3. Plattenwärmetauscher für drei Fluids nach Anspruch 1 oder 2, wobei die Platten (15), angeordnet an der Grenze zwischen dem erwähnten Wärmetauschabschnitt (13A) der vorhergehenden Stufe und dem Wärmetauschabschnitt (13B) der darauf folgenden Stufe unter den laminierten Platten einen luftdichten Raum unter Vakuum bilden, wobei die Wärmeisolierschicht (16) als eine Vakuumwärmeisolierschicht dient. 5 10
4. Plattenwärmetauscher für drei Fluids nach einem der Ansprüche 1 bis 3, wobei der erwähnte Fluidkreuzungspfad (m) sich zu einer Vielzahl der erwähnten ersten Zwischenplatten-Fluidpfade in dem Wärmetauschabschnitt (13A) der vorhergehenden Stufe und einer Vielzahl der erwähnten ersten Zwischenplatten-Fluidpfade in der darauffolgenden Stufe des Wärmetauschabschnitts (13B) in einem solchen Zustand erstreckt, dass der erste Kreuzungspfad (m) die Platten (15) in der Plattenlaminierrichtung innerhalb des erwähnten Plattenlaminats durchbohrt. 15 20 25
5. Verfahren zur Herstellung des Plattenwärmetauschers für drei Fluide gemäß Anspruch 3, wobei Folgendes vorgesehen ist: 30
 die entsprechenden Zwischenplatten-Fluidpfade werden unter Vakuum gebildet und gleichzeitig bilden die Platten, angeordnet an der Grenze zwischen dem Wärmetauschabschnitt (13A) der vorhergehenden Stufe und dem Wärmetauschabschnitt (13B) der darauffolgenden Stufe, den luftdichten Raum unter Vakuum als die erwähnte Vakuumwärmeisolierschicht (16), und zwar durch Hartlöten der benachbarten Platten (15) von zahlreichen laminierten Platten. 35

Revendications

1. Echangeur de chaleur (13) à plaques destiné à trois fluides, qui permet à un premier fluide (La) d'échangeur de la chaleur avec un deuxième fluide (Lc), puis avec un troisième fluide (Lb), **caractérisé en ce que** : 45
 dans un stratifié en plaques comprenant de nombreuses plaques (15) stratifiées les unes sur les autres, 50
 une section (13A) d'échange de chaleur d'étape précédente comportant des chemins inter plaques (f1) pour premier fluide permettant de faire passer le premier fluide (La) entre les plaques et des chemins inter plaques (f2) pour deuxième fluide permettant de faire passer le deuxième 55

fluide (Lc) entre les plaque est formée d'un côté du stratifié en plaques, dans une direction de stratification de plaque, lesdits chemins inter plaques (f1) pour premier fluide et lesdits chemins inter plaques (f2) pour deuxième fluide étant positionnés en alternance dans la direction de stratification de plaque ;
 une section (13B) d'échange de chaleur d'étape suivante comportant des chemins inter plaques (f1) pour premier fluide permettant de faire passer le premier fluide (La) entre les plaques et des chemins inter plaques (f3) pour troisième fluide permettant de faire passer le troisième fluide (Lb) entre les plaques est formée de l'autre côté du stratifié en plaques, dans une direction de stratification de plaque, lesdits chemins inter plaques (f1) pour premier fluide et lesdits chemins inter plaques (f3) pour troisième fluide étant positionnés en alternance dans la direction de stratification de plaque ;
 et un chemin (m) de traversée de premier fluide est prévu pour permettre au premier fluide qui est passé sous forme de flux parallèles à travers une pluralité desdits chemins inter plaques pour premier fluide dans ladite section (13A) d'échange de chaleur d'étape précédente de s'écouler sous forme de flux parallèles dans une pluralité desdits chemins inter plaques pour premier fluide dans ladite section (13B) d'échange de chaleur d'étape suivante,

caractérisé en ce que

des plaques (15) situées au niveau d'une limite entre ladite section (13A) d'échange de chaleur d'étape précédente et ladite section (13B) d'échange de chaleur d'étape suivante parmi les plaques stratifiées forment une couche d'isolation thermique (16) dans laquelle aucun fluide ne s'écoule.

2. Echangeur de chaleur à plaques destiné à trois fluides selon la revendication 1, dans lequel : 40
 chacune des portions entre au moins trois des plaques adjacentes (15) situées au niveau de la limite entre ladite section (13A) d'échange de chaleur d'étape précédente et ladite section (13B) d'échange de chaleur d'étape suivante parmi les plaques stratifiées forme la couche d'isolation thermique (16) dans laquelle aucun fluide ne s'écoule.
3. Echangeur de chaleur à plaques destiné à trois fluides selon la revendication 1 ou 2, dans lequel :
 les plaques (15) situées au niveau de la limite entre ladite section (13A) d'échange de chaleur d'étape précédente et ladite section (13B) d'échange de chaleur d'étape suivante parmi les

plaques stratifiées forment un espace étanche à l'air sous vide, et ladite couche d'isolation thermique (16) fait office de couche d'isolation thermique sous vide.

5

4. Echangeur de chaleur à plaques destiné à trois fluides selon l'une quelconque des revendications 1 à 3, dans lequel :

ledit chemin (m) de traversée de premier fluide s'étend vers une pluralité desdits chemins inter plaques pour premier fluide dans ladite section (13A) d'échange de chaleur d'étape précédente et vers une pluralité desdits chemins inter plaques pour premier fluide dans ladite section (13B) d'échange de chaleur d'étape suivante, dans un état tel que ledit chemin (m) de traversée de premier fluide perce à travers les plaques (15) dans la direction de stratification de plaque à l'intérieur dudit stratifié en plaques.

10

15

20

5. Procédé de production de l'échangeur de chaleur à plaques destiné à trois fluides selon la revendication 3, dans lequel :

25

lesdits chemins inter plaques pour fluides respectifs sont formés sous vide, et simultanément, les plaques situées au niveau de la limite entre ladite section (13A) d'échange de chaleur d'étape précédente et ladite section (13B) d'échange de chaleur d'étape suivante forment l'espace étanche à l'air sous vide sous forme de ladite couche d'isolation thermique (16) sous vide, par brasage des plaques adjacentes (15) de nombreuses plaques stratifiées.

30

35

40

45

50

55

FIG. 1

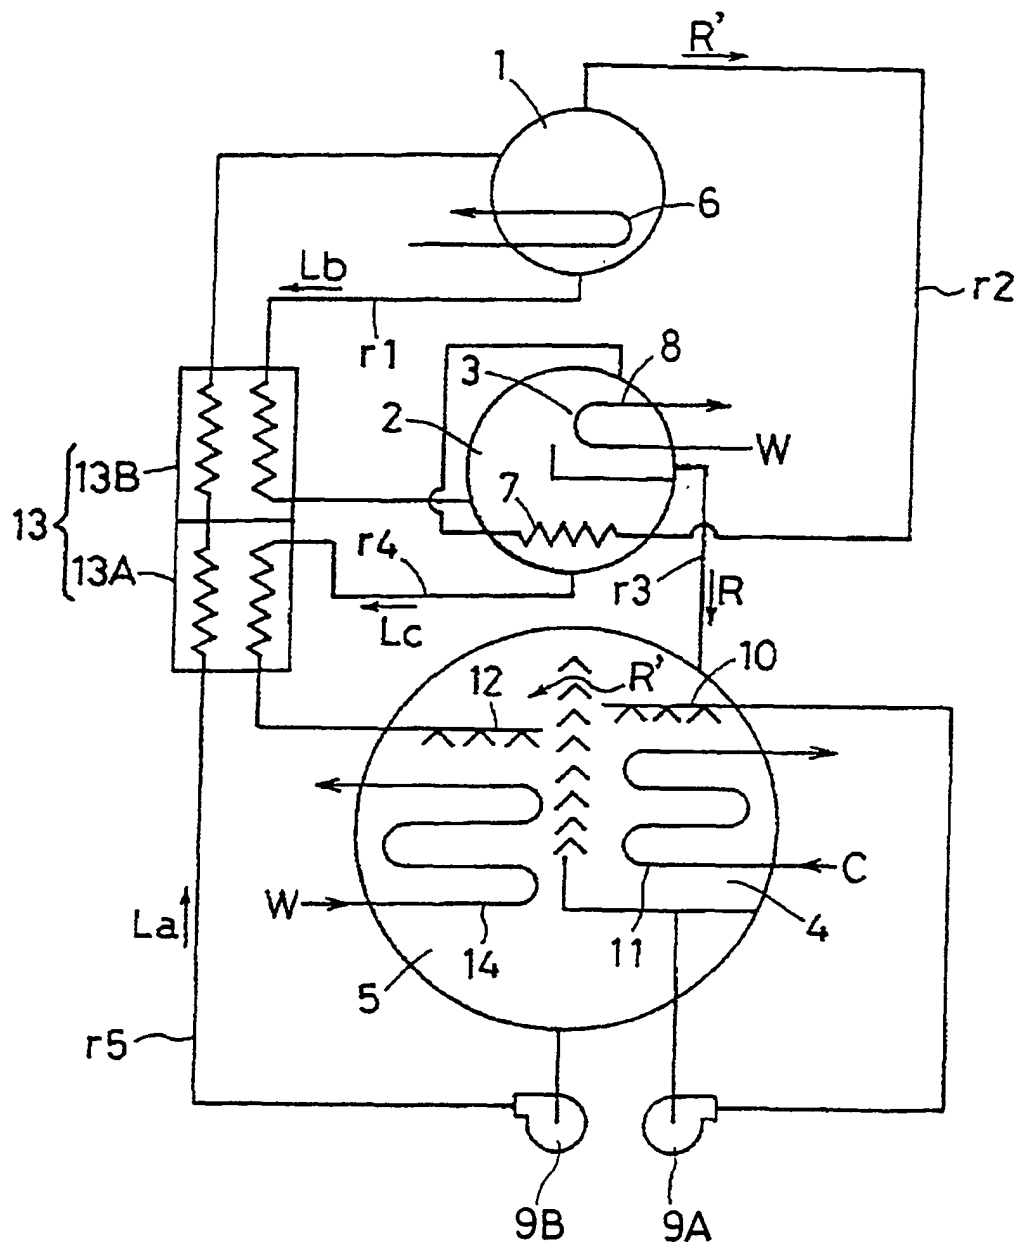


FIG. 2

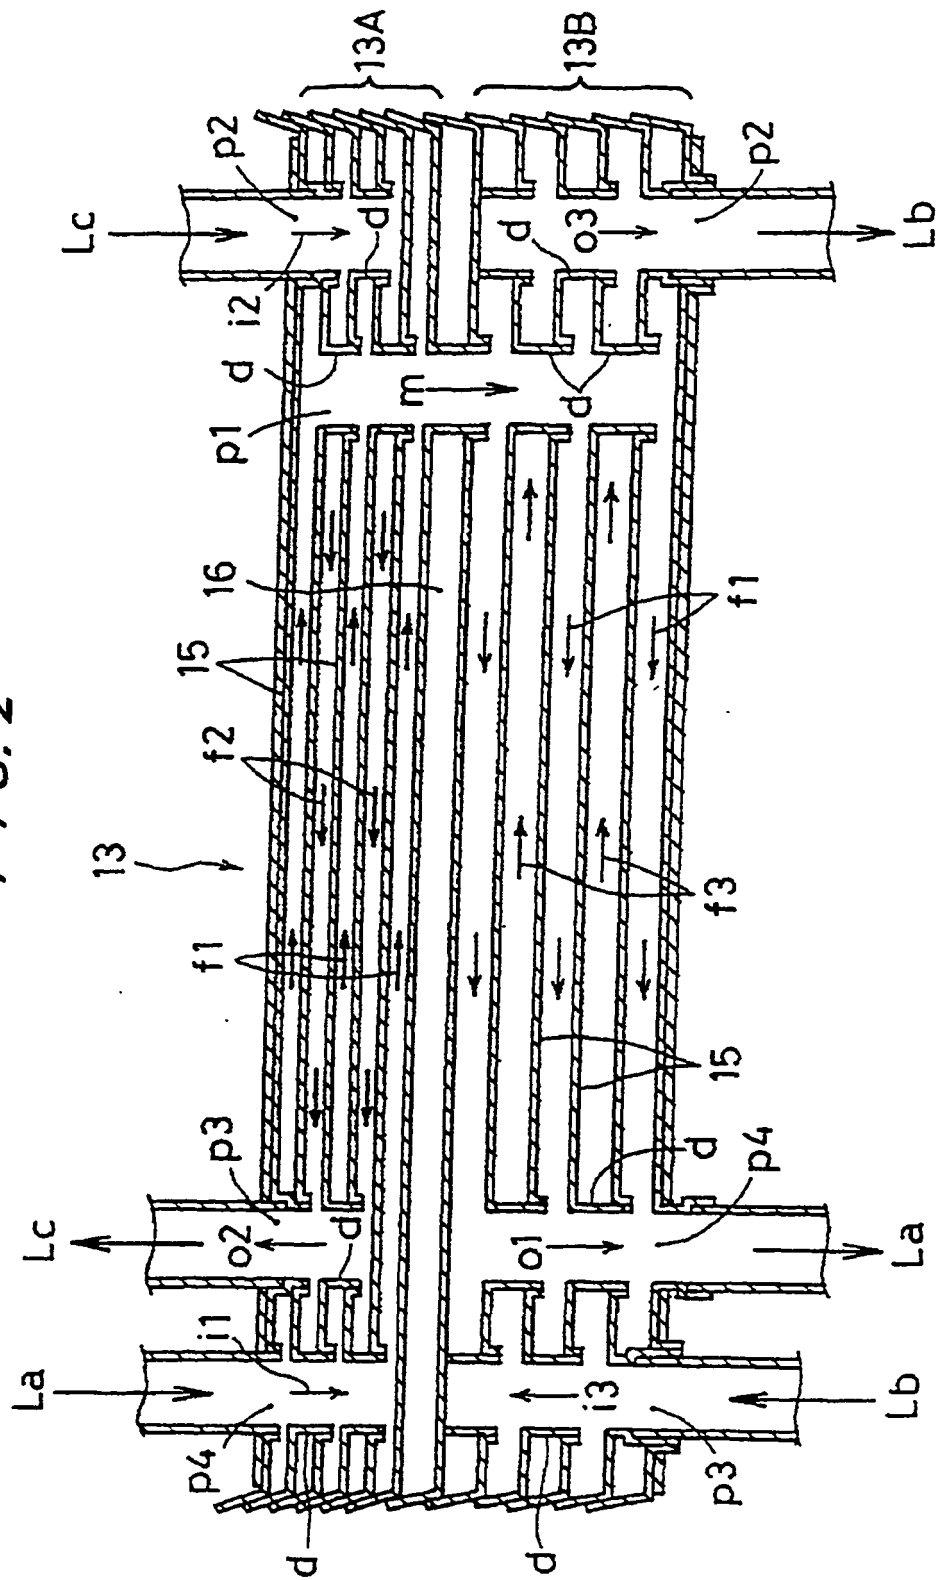


FIG. 3

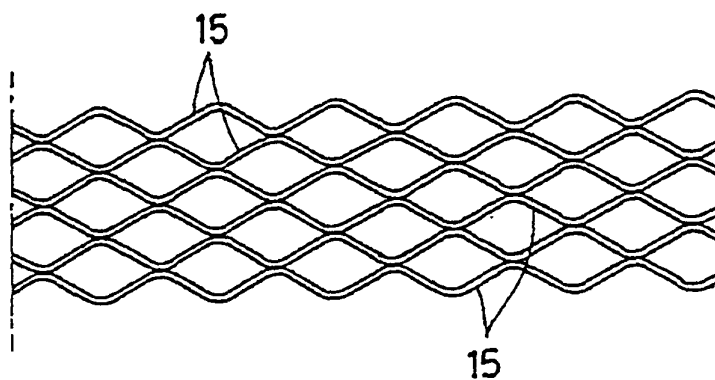
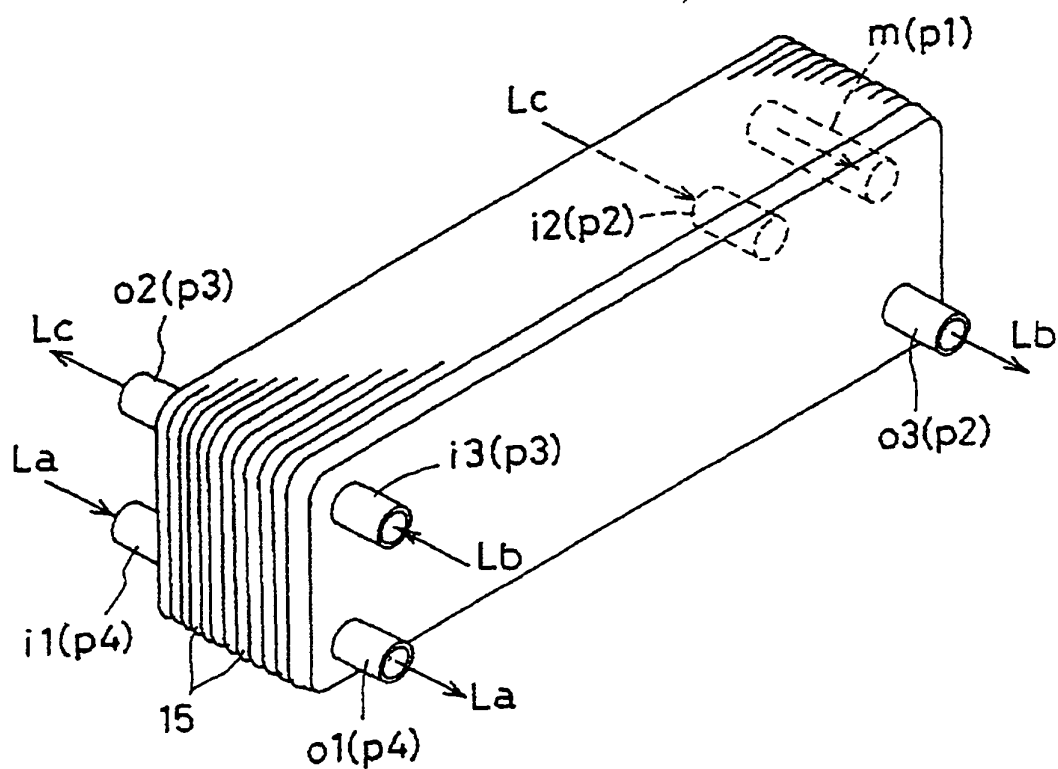


FIG. 4




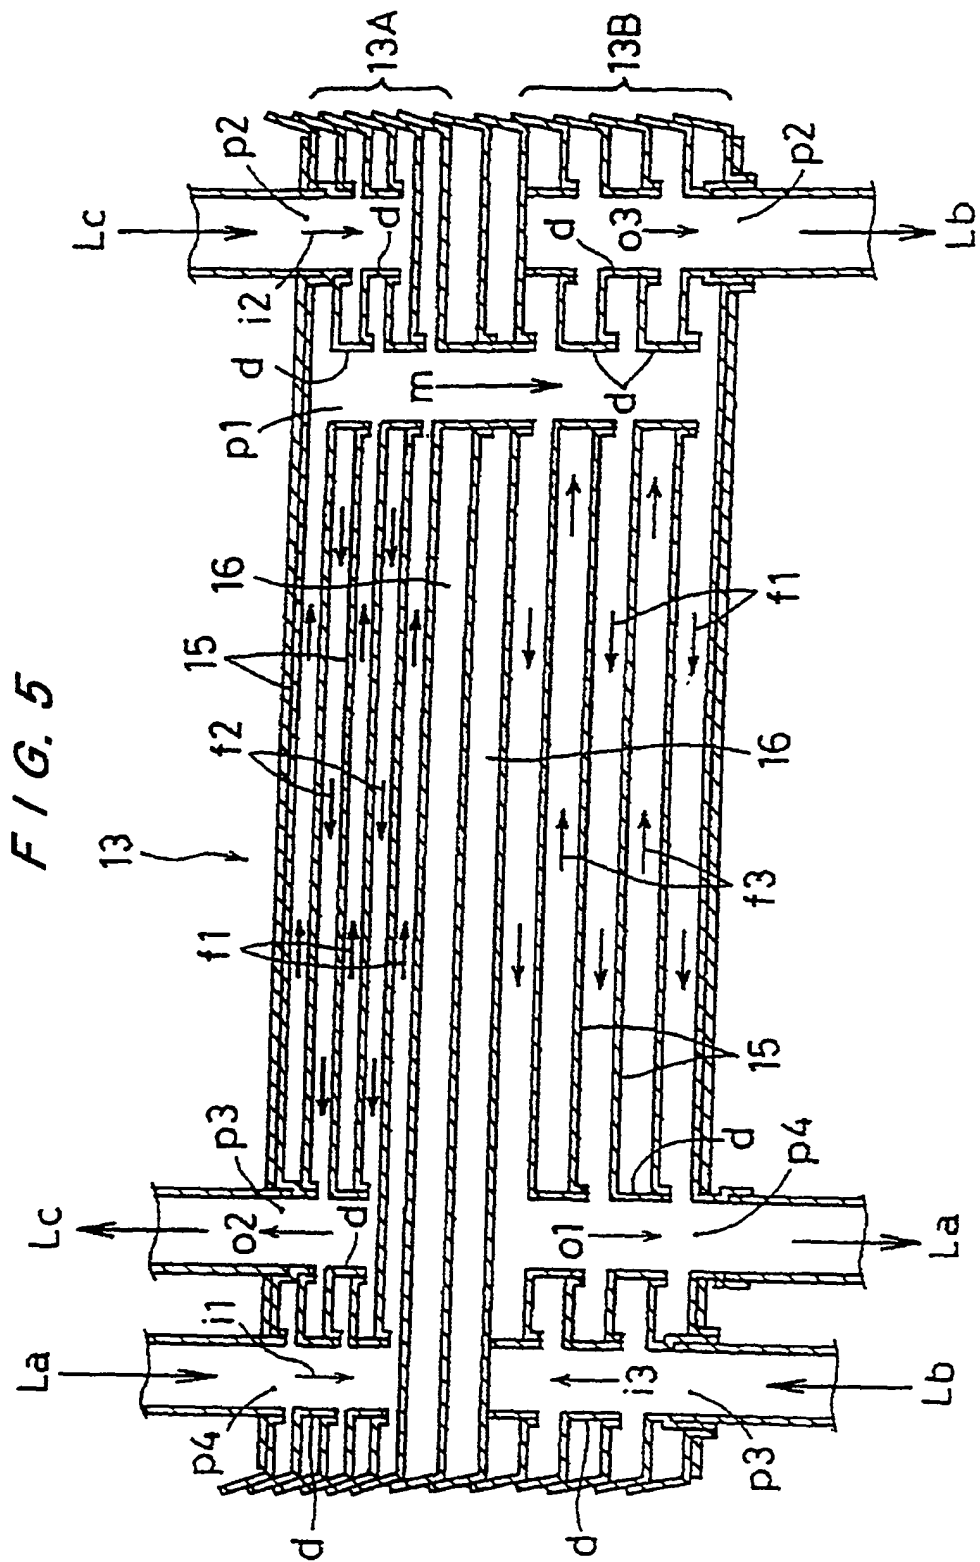


FIG. 6

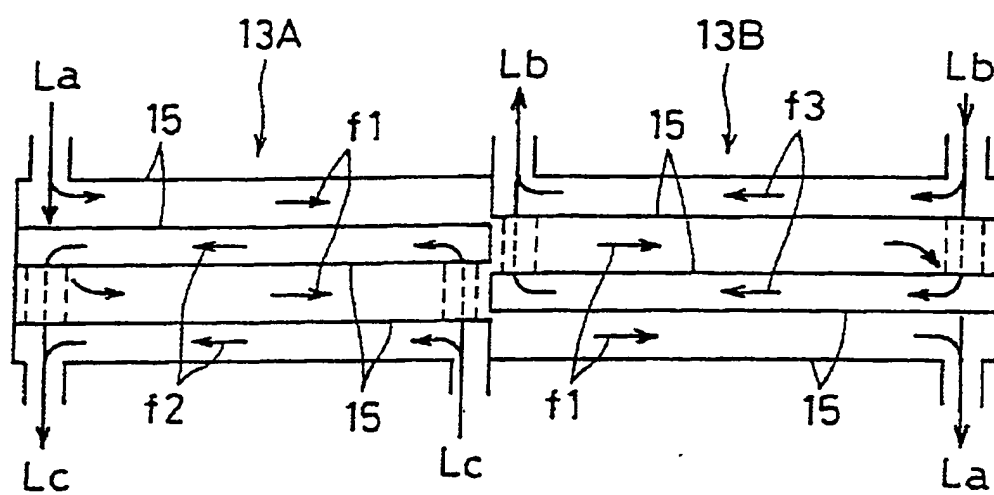

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 9060996 A [0002]
- US 4327802 A [0005]
- JP 10019482 A [0006]