



(51) International Patent Classification:

B32B 9/04 (2006.01) B32B 15/08 (2006.01)

B32B 15/04 (2006.01) B32B 15/20 (2006.01)

(21) International Application Number:

PCT/US2019/063772

(22) International Filing Date:

27 November 2019 (27.11.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/771,974 27 November 2018 (27.11.2018) US

(71) Applicant: **THE REGENTS OF THE UNIVERSITY OF CALIFORNIA** [US/US]; 1111 Franklin Street, Twelfth Floor, Oakland, CA 94607-5200 (US).

(72) Inventors: **GORODETSKY, Alon**; 15 Wheatley Court, Irvine, CA 92617 (US). **JIM, Steven, K.**; 16 Thompson Court, Irvine, CA 92617-4044 (US). **STIUBIANU, George**; 635 Baker Street, Costa Mesa, CA 92626 (US). **LEUNG, Erica**; 25 Alta Avenue, Piedmont, CA 94611 (US). **NAUGHTON, Kyle**; 456 Canyon Acres Drive, Laguna Beach, CA 92651 (US). **PATEL, Priyam**; 6 S. Santa Teresita, Irvine, CA 92606 (US). **FOLLADOR, Maurizio**; Via Dei Caduti 17, 10040 Givoletto, To (IT). **KARSHALEV, Emil**; 9730 Limar Way, San Diego, CA 92129 (US).

(74) Agent: **PECK, John, W.**; Kppb LLP, 2190 S. Towne Centre Place, Suite 300, Anaheim, CA 92806 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COMPOSITE MATERIALS WITH ADJUSTABLE SPECTRAL PROPERTIES

FIG. 1C



(57) Abstract: Composite materials with adjustable spectral properties comprised of IR-reflecting micro-domains overlaying an IR-transparent elastomeric matrix, and capable of dynamically controlling IR radiation transmission are described, as well as methods of fabrication thereof. Systems with capabilities to regulate IR radiation (including heat) transmission based thereon, and methods of regulating IR radiation transmission (including thermal regulation) using the same are also provided.



COMPOSITE MATERIALS WITH ADJUSTABLE SPECTRAL PROPERTIES

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0001] This invention was made with Government support under Grant No. DE-AR0000534 awarded by the US Department of Energy Advanced Research Projects Agency–Energy, Grant No. FA2386-14-1-3026 awarded by the Air Force Office of Scientific Research, and Cooperative Agreement No. D19AC00003 awarded by the Defense Advanced Research Projects Agency. The Government has certain rights in this invention.

FIELD OF THE INVENTION

[0002] The invention is generally directed to composite materials with adjustable spectral properties and methods of fabrication and use thereof, including use for thermal regulation.

BACKGROUND OF THE INVENTION

[0003] Effective management of heat transfer enables operation of many ubiquitous modern technologies, including electronic circuits (see, e.g., Moore, A. L., et al. Emerging challenges and materials for thermal management of electronics. *Mater. Today* 17, 163–174 (2014), the disclosure of which is incorporated herein by reference), aircraft and spacecraft components (see, e.g., Ahlers, M. F. *Aircraft Thermal Management*, John Wiley & Sons, 2011, the disclosure of which is incorporated herein by reference), medical devices (see, e.g., John, M., et al. Peri-operative warming devices: performance and clinical application. *Anaesthesia* 69, 623–638 (2014), the disclosure of which is incorporated herein by reference), power generation equipment (see, e.g., Kikuchi, Y., et al. Distributed cogeneration of power and heat within an energy management strategy for mitigating fossil fuel consumption. *J. Ind. Ecol.* 20, 289–303 (2016), the disclosure of which is incorporated herein by reference), shipping and storage containers (see, e.g., Singh, S. P., et al. Performance comparison of thermal insulated packaging boxes, bags and refrigerants for single-parcel shipments. *Packag. Technol. Sci.* 21, 25–35 (2008), the disclosure of which is incorporated herein by reference), specialty textiles (see, e.g., Stoppa, M., et al. Wearable electronics and smart textiles: a critical review. *Sensors*. 14, 11957–11992 (2014), the disclosure of which is incorporated herein by reference), and building environmental systems (see, e.g., Üрге-

Vorsatz, D., et al. Heating and cooling energy trends and drivers in buildings. *Renew. Sustain. Energy Rev.* 41, 85–98 (2015), the disclosure of which is incorporated herein by reference). Indeed, given that heating and cooling of buildings alone directly accounts for ~ 14 % of current energy consumption worldwide (see International Energy Agency, “Energy Technology Perspectives 2017” (2017), the disclosure of which is incorporated herein by reference), the development of novel thermoregulatory materials represents an important challenge and opportunity.

[0004] The great variety of modern approaches to thermal management (both indoors and in other settings) mainly fall in one of two categories, based on the underlying mode of operation: “passive” or “active”. More specifically, passive thermal management systems leverage the intrinsic properties of the constituent materials to control heat transfer via conduction, convection, and/or radiation (see U.S. Department of Energy Advanced Research Projects Agency, “DELTA Program Overview” (2014) and Kakaç, S., et al. *Microscale Heat Transfer - Fundamentals and Applications* (Springer, 2005), the disclosures of which are incorporated herein by reference). Accordingly, such systems are typically inexpensive, energy efficient, and simple to implement but are also static and unresponsive to changing conditions. Examples of passive heating technologies include various types of insulation, such as batting, loose fill insulation, aerogels, woven fabrics, and reflective films and coatings, which regulate temperature by blocking the flow of heat due to the materials’ low thermal conductivities and/or high infrared (IR) reflectances. On the other hand, active thermal management systems control heat transfer by converting one form of energy into another (see, e.g., Tong, X. C. *Advanced Materials for Thermal Management of Electronic Packaging* (Springer, New York, 2011); Gupta, N., et al. Review of passive heating/cooling systems of buildings. *Energy Sci. Eng.* 4, 305–333 (2016); and Wang, Y., et al. A state of art review on methodologies for heat transfer and energy flow characteristics of the active building envelopes. *Renew. Sustain. Energy Rev.* 78, 1102–1116 (2017), the disclosures of which are incorporated herein by reference). As such, these systems are dynamic and precisely controllable by users, but are relatively expensive, energy inefficient, and complex to install. Examples of active heating technologies include electrocaloric devices, thermoelectric modules, electrothermal fabrics, heat pumps, and integrated heating/ventilation/air conditioning platforms,

which regulate temperature by driving the flow of heat through the external input of electrical and/or mechanical energy.

SUMMARY OF THE INVENTION

[0005] Various embodiments are directed to composite materials with adjustable spectral properties including:

- an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus;
- a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material;
- a plurality of spacings, separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material;
- a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix, the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness; and

wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix.

[0006] In various such embodiments, the elastomer thickness is less than 300 microns.

[0007] In still various such embodiments, the elastic modulus is $< 10^2$ MPa.

[0008] In yet various such embodiments, the IR-transparent, flexible, and stretchable material is selected from the group consisting of: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene or styrene-butylene-styrene, or any combination thereof. In some such embodiments, the IR-transparent, flexible, and stretchable material comprises a styrene-ethylene-butylene-styrene block co-polymer.

[0009] In still yet various such embodiments, the IR-reflecting material is selected from the group consisting of: a metal, a metal or non-metal oxide, a ceramic, alloys thereof, or any combination thereof. In some such embodiments, the IR-reflecting material is selected from the group consisting of: Cu, Al, TiO₂, SiO₂, or any combination thereof.

[0010] In various such embodiments, the micro-domain thickness is 2 to 100 nm. In many such embodiments, the micro-domain thickness is 20 nm.

[0011] In still yet many such embodiments, the nanostructure height is less than 1 micron. In some such embodiments the nanostructure height is approximately 90 nm.

[0012] Various embodiments are directed to a composite material with adjustable spectral properties including:

- an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus;

- a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material; and

- a plurality of spacings, separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material;

wherein the plurality of spacings, is dynamically adjustable via mechanical manipulation of the elastomeric matrix.

[0013] In many such embodiments, the plurality of micro-domains is anchored into the elastomeric matrix via a plurality of nanostructures characterized by a nanostructure height that is not included in the micro-domain thickness.

[0014] In still many such embodiments, the IR-transparent, flexible, and stretchable material is functionalized with chemical groups that bind the IR-reflecting material.

[0015] Various other embodiments are directed to a method of fabricating a composite material with adjustable spectral properties including:

- providing a support substrate;

- depositing an IR-reflecting material on the support substrate in two steps creating a first sub-layer and a second sub-layer; wherein

- the first sub-layer is immediately adjacent to the support substrate and comprises a continuous featureless planar layer capable of reflecting IR radiation and is characterized by a planar layer thickness, and

- the second sub-layer is immediately adjacent to the first sub-layer and comprises a plurality of nanostructures characterized by a nanostructure height;

depositing a layer characterized by an elastomer thickness of an IR-transparent elastomeric material characterized by an elastic modulus on top of the IR-reflecting material, such that the plurality of the nanostructures becomes buried in the IR-transparent elastomeric material, thus anchoring the first sub-layer into the IR-transparent elastomeric material, to form a composite comprising the IR-reflecting material securely embedded into an IR-transparent elastomeric matrix;

delaminating the composite from the support substrate with application of force, such that the first sub-layer breaks into a plurality of micro-domains comprising IR reflecting material surrounded by a plurality of spacings comprising the uncoated IR-transparent elastomeric matrix, to produce a free standing film of the composite material with adjustable spectral properties.

[0016] In many such embodiments, the IR-transparent elastomeric material is cured, or otherwise heat or time-treated prior to delamination.

[0017] In still various such embodiments, the IR-reflecting material is deposited onto the substrate support via physical or chemical vapor deposition technique. In many such embodiments, the IR-reflecting material is deposited onto the substrate support via electron-beam evaporation.

[0018] In yet still various such embodiments, the support substrate is selected from the group consisting of: silicon wafer, aluminum foil, polymer, or glass.

[0019] In still yet many such embodiments, the planar layer thickness is 2 – 100 nm. In some such embodiments, the planar layer thickness is 20 nm.

[0020] In various embodiments, the plurality of nanostructures comprises an array of nanostructures of a shape selected from the group consisting of: vertical or tilted columns, zig-zags, helices, blades, stacks of alternating thickness, or any combination thereof.

[0021] In yet many embodiments, the nanostructure height is less than 1 micron. In some such embodiments, the nanostructure height is approximately 90 nm.

[0022] In still many such embodiments, the IR-reflecting material is selected from the group consisting of: a metal, a metal or non-metal oxide, a ceramic, alloys thereof, or any combination thereof. In some such embodiments, the IR-reflecting material is selected from the group consisting of: Cu, Al, TiO₂, SiO₂, or any combination thereof.

[0023] In various such embodiments, the IR-transparent elastomeric matrix is deposited via a method selected from the group consisting of: spin coating, spray coating, slot-casting, offset printing, blade coating, melt blowing, printing, extrusion, gravure coating, laminating, or any combination thereof.

[0024] In still various such embodiments, the support substrate is aluminum foil and IR-transparent elastomeric matrix is deposited via spray coating.

[0025] In yet still various such embodiments, the elastomer thickness is less than 300 microns.

[0026] In various such embodiments, the elastic modulus is $< 10^2$ MPa.

[0027] In still many such embodiments, the IR-transparent elastomeric matrix comprises a material selected from the group consisting of: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene or styrene-butylene-styrene, or any combination thereof. In some such embodiments, the IR-transparent elastomeric matrix comprises a styrene-ethylene-butylene-styrene block co-polymer.

[0028] Various other embodiments are directed to a method of fabricating a composite material with adjustable spectral properties including:

- providing a support substrate;

- depositing a first sub-layer of an IR-reflecting material characterized by a planar layer thickness on top of the support substrate such that the first sub-layer of the IR-reflecting material is immediately adjacent to the support substrate and comprises the IR-reflecting material deposited into a continuous featureless layer capable of reflecting IR radiation;

- depositing a layer characterized by an elastomer thickness of an IR-transparent elastomeric material characterized by an elastic modulus on top of the deposited IR-reflecting material to form a composite comprising the IR-reflecting material and an IR-transparent elastomeric matrix;

- adhering the IR-reflecting material and the IR-transparent elastomeric matrix;

- delaminating the composite from the support substrate with application of force, such that the first sub-layer breaks into a plurality of micro-domains comprising IR-reflecting material surrounded by a plurality of spacings comprising the uncoated IR-transparent elastomeric matrix,

to produce a free standing film of the composite material with adjustable spectral properties.

[0029] In various such embodiments, the method further includes:

depositing a second sub-layer of the IR-reflecting material on top of and immediately adjacent to the first sub-layer and prior to depositing the layer of the IR-transparent elastomeric material, such that the second sub-layer comprises a plurality of nanostructures characterized by a nanostructure height, and such that depositing the layer of the IR-transparent elastomeric material buries the plurality of nanostructures into the IR-transparent elastomeric matrix, thus anchoring the first sub-layer into the IR-transparent elastomeric matrix to form the composite comprising the IR-reflecting material securely embedded into an IR-transparent elastomeric matrix.

[0030] Yet various other embodiments are directed to a method for controlling IR radiation emitted by an object or body including:

enveloping the object or body emitting IR radiation in a composite material with adjustable spectral properties comprising:

- an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus,
 - a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material,
 - a plurality of spacings separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material, and
 - a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix, the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness,
- wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix; and

mechanically manipulating the elastomeric matrix in a controlled manner to adjust the plurality of spacings between the plurality of micro-domains to release or contain IR radiation emitted by the object or body.

[0031] In various such embodiments, IR radiation is heat.

[0032] In still various such embodiments, the mechanical manipulation is achieved via a method selected from the group consisting of: application of strain, shearing, pressure, flexing, twisting, bending, or any combination thereof.

[0033] Additional embodiments and features are set forth in part in the description that follows, and in part will become apparent to those skilled in the art upon examination of the specification or may be learned by the practice of the disclosed subject matter. A further understanding of the nature and advantages of the present disclosure may be realized by reference to the remaining portions of the specification and the drawings, which form a part of this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] These and other features and advantages of the present invention will be better understood by reference to the following detailed description when considered in conjunction with the accompanying data and figures, wherein:

[0035] **FIG. 1A** provides a picture of an IR-reflecting “space blanket” material applied to a forearm (left) and a top/side-view schematic of its structure, comprising an aluminum film on top of a polyethylene terephthalate layer (right), according to prior art.

[0036] **FIG. 1B** provides an illustration of a squid and its chromatophore-containing skin, (left) and a top/side-view schematic further explaining how muscle contraction changes the size of the chromatophore organs and the reflection/transmission of light (right), according to prior art.

[0037] **FIG. 1C** provides a schematic of the composite material with adjustable spectral properties applied to a forearm (left) and a top/side-view schematic of its structure, comprising IR-reflecting micro-domains embedded in an IR-transparent elastomeric matrix (right), in accordance with embodiments of the application.

[0038] **FIG. 2** provides a schematic of IR radiation-regulating mechanisms of operation for the composite material with adjustable spectral properties upon application of various levels of

mechanical actuation (0 %, 30 %, and 50 % strain), in accordance with embodiments of the application.

[0039] **FIGs. 3A and 3B** schematically illustrate the fabrication of the composite material with adjustable spectral properties, wherein **FIG. 3B** additionally illustrates fabrication on a large scale, in accordance with embodiments of the application.

[0040] **FIGs. 4A—4C** provide scanning electron microscopy (SEM) images of the columnar nanostructures of the IR-reflecting material (copper) taken at various viewing points for various IR-reflecting material deposition conditions, in accordance with various embodiments of the application.

[0041] **FIGs. 5A—5D** illustrate mechanical and optical properties of the composite materials in accordance with embodiments of the application; wherein: **FIG. 5A** illustrates the mechanical properties of the composite material with a plot of engineering stress versus engineering strain for the composite material, and the enlarged linear region of the plot (used for determination of the elastic modulus of the composite material); **FIG. 5B1** shows digital camera and SEM images of the composite material at various stages of actuation (at 0 %, 30 %, and 50 % strain); **FIGs. 5B2 and 5B3** further show SEM images taken at various stages of actuation (at 0 %, 30 %, and 50 % strain) for composite materials produced under various fabrication conditions; **FIGs. 5C1 and 5C2** shows the infrared reflectance and transmittance spectra for the composite materials comprising tiled and vertical column nanostructures, correspondingly, at various stages of actuation (at 0 %, 30 %, and 50 % strain), as well as corresponding plots of the average reflectance and average transmittance as a function of the applied strain for the same materials; **FIGs 5C3 and 5C4** compile the average reflectance and average transmittance data for the composite materials fabricated under varying deposition conditions; and **FIG. 5D** illustrates the stability of the composite materials towards repeated mechanical actuation.

[0042] **FIGs. 6A—6D** illustrate the versatility of the composite materials for wearable thermal regulation applications, in accordance with embodiments of the application, wherein: **FIG. 6A** compares the calculated thermoregulating performance of the composite material at various stages of mechanical actuation to that of common materials and textiles used in clothing; **FIG. 6B** schematically illustrates the model used to compare the thermoregulating performance of the

materials from **FIG. 6A**, and **FIGs. 6C** and **6D** compare the calculated setpoint temperatures of the composite materials fabricated under varying deposition conditions.

[0043] **FIGs. 7A–7C** illustrate experimental setup (**FIG. 7A**), experimental schematic (**FIG. 7B**), and spectral and optical data (**FIG. 7C**) corresponding to the evaluation of the thermoregulatory functionality of the composite materials at various stages of actuation, in accordance with embodiments of the application.

[0044] **FIGs. 8A–8C** demonstrate operation and thermoregulatory effect of an adjustable composite material-based sleeve applied to a human body, in accordance with embodiments of the application, wherein **FIG. 8A** illustrates the experimental setup and **FIGs. 8B** and **8C** provide representative infrared camera images and experimental data.

[0045] **FIG. 9** illustrates the design and fabrication of a thermoregulatory sleeve based on the composite material with adjustable spectral properties, in accordance with embodiments of the application.

DETAILED DISCLOSURE

[0046] Turning now to the schemes, images, and data, composite materials with adjustable spectral properties and capable of dynamically controlling IR radiation transmission are described, as well as methods of fabrication thereof, systems with capabilities to regulate IR radiation transmission based thereon, and methods of regulating IR radiation transmission using the same. It will be understood that the embodiments of the invention described herein are not intended to be exhaustive or to limit the invention to precise forms disclosed. Rather, the embodiments selected for description have been chosen to enable one skilled in the art to practice the invention.

[0047] Heat transfer management critically underpins the performance of many entrenched technologies, including building insulation (I. Hernández-Pérez et al., Thermal performance of reflective materials applied to exterior building components—A review. *Energy Build.* 80, 81–105 (2014), the disclosure of which is incorporated herein by reference), energy-conserving windows (U.S. Department of Energy, Energy-Efficient Windows, <https://energy.gov/energysaver/energy-efficient-windows>, the disclosure of which is incorporated herein by reference), spacecraft components (NASA, A Shining Example of Space Benefits (2007), https://www.nasa.gov/vision/earth/technologies/silver_insulation.html, the disclosure of which is

incorporated herein by reference), electronics shielding (S. Geetha, et al., EMI shielding: Methods and materials-A review. *J. Appl. Polym. Sci.* 112, 2073–2086 (2009), the disclosure of which is incorporated herein by reference), container packaging (S. P. Singh, et al., Performance comparison of thermal insulated packaging boxes, bags and refrigerants for single-parcel shipments. *Packag. Technol. Sci.* 21, 25–35 (2008), the disclosure of which is incorporated herein by reference), and even protective clothing (J. F. Sacadura, Radiative heat transfer in fire safety science. *J. Quant. Spectrosc. Radiat. Transf.* 93, 5–24 (2005), the disclosure of which is incorporated herein by reference). However, all of the currently available heat management technologies require some kind of a trade-off between the cost and ease of implementation of passive systems and the dynamic control capabilities of active systems. Accordingly, an “ideal” thermal management platform that would merge the advantageous characteristics of both types of systems, i.e., minimal cost, straightforward implementation, and little-to-no energy consumption with user control capabilities, remains elusive, yet highly desirable.

[0048] Among the passive systems, the “space blanket,” developed by NASA in the 1960’s to mitigate the effects of temperature fluctuations in outer space, represents one of the most recognized and impactful thermal management technologies to date (**FIG. 1A**) (see NASA, Reflecting on space benefits: a shining example. *Spinoff* 2006, 56-61 (2006), the disclosure of which is incorporated herein by reference). In its standard incarnation, the space blanket consists of a transparent plastic sheet overlaid with a thin coating of metal (**FIG. 1A**, inset and right side) – an architecture highly effective at reflecting infrared (IR) radiation, including heat. Moreover, due to a favorable combination of properties, such as low weight, compactness, and manufacturability, various adaptations of the space blanket have found applications in food packaging, emergency portable shelters, medical warming devices, protective clothing, building insulation, and solar concentrators. As such, this thermoregulatory platform has facilitated space exploration, saved lives within a variety of settings, helped improve food storage, and reduced global energy consumption (see Meyer, R. X. *Elements of Space Technology* (Elsevier, 1999); Skrabec, Q. R. *Aluminum in America: A History* (McFarland & Company, Inc., 2017); and Watkins, S. M., et al. *Functional Clothing Design: From Sportswear to Spacesuits* (Fairchild Books, New York, 2015), the disclosures of which are incorporated herein by reference). However, the space blanket is a static “on/off”-type technology that cannot be reconfigured on

demand or dynamically adjusted in any way (**FIG. 1A**, right). Surprisingly, despite its ubiquity, the space blanket has remained fundamentally unchanged as a passive thermal management technology and still functions in much the same way it did over fifty years ago.

[0049] Among the active systems for thermal management applications, recent efforts have focused on the development of devices with adaptive switching capabilities. These devices consist of stimuli-responsive materials, i.e. metal oxide layers, low pressure gases, or conducting polymer films, which are placed within a gap or junction and mediate the transport of heat via conduction, convection, or radiation (see Li, N. et al. Phononics: manipulating heat flow with electronic analogs and beyond. *Rev. Mod. Phys.* 84, 1045-1066 (2012); Wehmeyer, G., et al. Thermal diodes, regulators, and switches: physical mechanisms and potential applications. *Appl. Phys. Rev.* 4, 041304 (2017); and DiPirro, M. J., et al. Heat switches for ADRs. *Cryogenics* 62, 172-176 (2014); the disclosure of which is incorporated herein by reference). In such configurations, the transfer of heat is dynamically modulated (switched) with an external non-thermal input, i.e. a mechanical pressure, an applied voltage, or a magnetic field. The thermal switches have shown promise in applications related to refrigeration, waste heat scavenging, thermal control for electronic circuits, energy storage/conversion, and temperature regulation in an aircraft. However, to gain widespread application, the switches must satisfy numerous demanding criteria, including manufacturability over large areas, a straightforward actuation method, reversibility and tunability without hysteresis, stability to repeated cycling, a soft and flexible form factor, rapid response time, high on/off ratios, and a low operating temperature. To date, no single thermal switching technology has been shown to simultaneously possess all of these characteristics.

[0050] In contrast, nature has mastered developed highly effective strategies for adaptively and dynamically controlling materials properties. For example, the color-changing abilities of coleoid cephalopods can serve as a judicious source of inspiration for adaptive thermal management systems (**FIG. 1B**) (see Mäthger, L. M., et al. Mechanisms and behavioural functions of structural coloration in cephalopods. *J. R. Soc. Interface* 6, S149-S163 (2009); Kreit, E. et al. Biological versus electronic adaptive coloration: how can one inform the other? *J. R. Soc. Interface* 10, 1-13 (2012); and Phan, L. et al. Dynamic materials inspired by cephalopods. *Chem. Mater.* 28, 6804-6816 (2016); the disclosure of which is incorporated herein by reference). In particular, the skin of squid contains a transparent dermal layer that features embedded chromatophore organs

arranged in a dense, arrayed pattern, with each individual organ comprised of a red, yellow, or brown central pigment cell surrounded by anchored innervated muscle cells (**FIG. 1B, inset**) (see Messenger, J. B. Cephalopod chromatophores: neurobiology and natural history. *Biol. Rev. Camb. Philos. Soc.* 76, 473-528 (2001); Kirkwood, K. M., et al. Mechanics of the cephalopod chromatophore layer: structural characterization of cephalopod chromatophores. In *ASME 2011 Summer Bioengineering Conference 2011*, 427-428 (2011); Suzuki, M., et al. Chromatophore activity during natural pattern expression by the squid *Sepioteuthis lessoniana*: contributions of miniature oscillation. *PLoS One* 6, e18244 (2011); and Bell, G. R. R. et al. Chromatophore radial muscle fibers anchor in flexible squid skin. *Invertebr. Biol.* 132, 120-132 (2013); the disclosure of which is incorporated herein by reference). In this highly-evolved natural architecture, the muscle cells dynamically switch the pigment cells between shrunk point-like and expanded plate-like states (either independently or in tandem), thereby simultaneously modulating the local coloration and changing the transmission of light through the skin (**FIG. 1B, right**). This unique capability of the squid skin has inspired various artificial color- and appearance-changing systems, including biomimetic soft active surfaces (see Rossiter, J., et al. Biomimetic chromatophores for camouflage and soft active surfaces. *Bioinspir. Biomim.* 7, 036009 (2012), the disclosure of which is incorporated herein by reference), optoelectronic camouflage displays (see Yu, C. et al. Adaptive optoelectronic camouflage systems with designs inspired by cephalopod skins. *Proc. Natl. Acad. Sci. U.S.A.* 111, 12998-13003 (2014), the disclosure of which is incorporated herein by reference), electromechanochemically responsive elastomers (see Wang, Q., et al. Cephalopod-inspired design of electro-mechano-chemically responsive elastomers for on-demand fluorescent patterning. *Nat. Commun.* 5, 4899 (2014), the disclosure of which is incorporated herein by reference), stretchable electroluminescent materials (see Larson, C. et al. Highly stretchable electroluminescent skin for optical signaling and tactile sensing. *Science* 351, 1071-1074 (2016), the disclosure of which is incorporated herein by reference), and adaptive infrared-reflecting systems (see Xu, C., et al. Adaptive infrared-reflecting systems inspired by cephalopods. *Science* 359, 1495-1500 (2018), the disclosure of which is incorporated herein by reference). Moreover, natural squid skin and its constituent components exhibit nearly all of the capabilities required for wearable thermal switch applications discussed above, making them promising models for novel thermoregulatory platforms.

[0051] This application is directed to embodiments of fully artificial, composite materials with adjustable spectral properties for management of IR radiation, including heat, and methods of manufacture and use thereof. In many embodiments, the composite material of the application (**FIG. 1C**) draws inspiration from both the simple, static, IR radiation-reflecting space blanket technology (**FIG. 1A**) and the sophisticated, dynamic, color-changing squid skin (**FIG. 1B**). Accordingly, in many embodiments, the composite material possesses the performance metrics of both the space blanket, including straightforward manufacturability and minimal energy input requirement, and squid skin, including on-demand user control of properties. In many embodiments, the composite material with adjustable spectral properties is used as a component in thermal management systems to regulate transmission of heat. In some such embodiments, the thermal management systems incorporating the composite material are wearable systems. In many embodiments, the thermal management systems incorporating the composite material are articles of clothing or clothing components, such as sleeves or panels.

[0052] In many embodiments, the composite material with adjustable spectral properties comprises a stretchable IR-transparent matrix overlaid with micro-domains of an IR-reflecting material. In many such embodiments, the IR-reflecting micro-domains can be moved apart from one another such that they are separated by spacings, i.e. uncovered areas, comprising bare matrix regions. More specifically, in many embodiments, mechanical manipulation of the stretchable matrix, such as stretching and releasing, allows for the dynamic adjustment of the width/size of the areas surrounding the IR-reflecting micro-domains (**FIG. 1C**, right), thus allowing for the transmission of IR radiation by the composite material when the micro-domains are far apart from one another (i.e. “open”) or trapping the IR radiation with the composite material when the micro-domains are clustered together (i.e. “shut”). In many embodiments, precaution is taken to ensure excellent adhesion between the elastomeric matrix and the overlaying IR-reflecting micro-domains, in order to preserve the robustness of the composite through all manipulations of the matrix (e.g., stretching, twisting, etc.), such that only the relative arrangement and distance between the micro-domains is affected (e.g., without any damage or delamination of the micro-domains). Therefore, in many embodiments, each micro-domain is anchored into the matrix via nanostructures. In many embodiments, the anchoring nanostructures comprise designer columnar nanostructures. In some embodiments, the anchoring nanostructures comprise interface surface

roughness. However, in some embodiments the judicious choice of materials allows for sufficient adhesion without help from nanostructure anchoring. For example, in some embodiments, the proper adhesion between the IR-reflecting micro-domains and the elastomeric matrix is achieved by using a specific combination of metal or inorganic material and an elastomer functionalized with chemical groups that specifically bind the said metal or inorganic material. For example, copper metal may be used with a catechol-functionalized matrix. In many embodiments, a combination of physical (i.e., nanostructures) and chemical bonding is used to ensure robust attachment of IR-reflecting micro-domains to the IR-transparent elastomeric matrix.

[0053] In many embodiments the elastomeric matrix comprises a soft and flexible IR-transparent polymer. In many embodiments, the matrix comprises any IR-transparent elastomer with low elastic modulus. In many embodiments the elastic modulus of the matrix elastomer is $< 10^2$ MPa. In some such embodiments, the elastic modulus is 2 MPa. In many such embodiments, the IR-transparent matrix comprises a stretchable, IR-transparent material chosen from the list: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene (SIS), styrene-butylene-styrene (SBS), or styrene-ethylene-butylene-styrene (SEBS) block co-polymer, any combination thereof. In many embodiments the thickness of the elastomer matrix is chosen so as to ensure the overall robustness of the composite material, while maintaining sufficient IR-transparency of the matrix. In many embodiments, the thickness of the elastomer matrix is less than 300 microns. In many embodiments, including wherein the matrix comprises a SEBS block co-polymer, the matrix thickness is approximately 30 microns.

[0054] In many embodiments, the IR-reflecting component of the composite material of the application comprises a material selected from the list comprising: a metal, a metal or non-metal oxide, a ceramic, or any combination thereof, including alloys of thereof. In some such embodiments, the IR-reflecting material is selected from the list comprising: Cu, Al, TiO₂, SiO₂, or any combination or alloy thereof. In many embodiments, the IR-reflecting material layer of the composite material is not continuous, but is broken into micro-domains, wherein each micro-domain is surrounded by cracks, which, in turn, become widths of the bare elastomeric matrix (to which the micro-domain is adhered to) upon stretching of the same. In some embodiments, wherein the adhesion of the IR-reflecting material to the elastomeric matrix is achieved via

nanostructure anchoring, each micro-domain comprises two immediately adjacent sub-layers: a continuous IR-reflecting, outfacing sub-layer and a nanostructured anchoring sub-layer that interfaces with the elastomeric matrix. In many embodiments, the thickness of the continuous IR-reflecting sub-layer is 2 – 100 nm, which ensures the overall robustness and optimal performance of the composite material. In many embodiments, the thickness of the continuous IR-reflecting sub-layer is 20 nm. In many embodiments, the thickness of the anchoring sub-layer, when present, is less than 1 micron. In some embodiments, the absence of the nanostructured anchoring sub-layer greatly facilitate the manufacturing of composite materials, but potentially at the expense of composite material stability when in use.

[0055] In many embodiments, the spectral properties of the composite material are adjusted via application and removal of mechanical actuation (**FIG. 2**). In many embodiments, the mechanical actuation comprises one of: application of strain, shearing, pressure, flexing, twisting, bending, or any combination thereof. In many embodiments, the composite material of the application in its relaxed state (i.e., 0% applied strain) comprises, for example, a plurality of irregularly shaped IR-reflecting micro-domains densely packed on top of the IR-transparent matrix, into which they are anchored via interfacial nanostructures (**FIG. 2**, left). In this configuration, the composite material of the embodiments reflects nearly all incident IR radiation. In turn, upon mechanical actuation, the matrix-anchored IR-reflecting micro-domains of many embodiments are spread apart due to stretching of the underlying elastomeric matrix (**FIG. 2**, center and right). In this “stretched” configuration, the IR-transparent matrix is exposed between the IR-reflecting micro-domains and the composite material of the embodiments as a whole transmits a significant fraction of the incident IR radiation. Accordingly, in many embodiments, the overall operating mechanism of the composite material with adjustable spectral properties comprises an on-demand controllable mechanical actuation or relaxation, wherein the spacings, i.e. uncovered areas, between the IR-reflecting micro-domains of the composite material are altered by stretching and relaxing the underlying soft, elastic, IR-transparent matrix. Notably, the operating mechanism according to such embodiments differs from that of natural squid skin, wherein the area of the light-reflecting components (chromatophore organs) themselves is altered upon actuation. In some embodiments, the IR radiation manipulated by the composite material is heat.

[0056] In many embodiments, the composite material with adjustable spectral properties is fabricated according to the schemes outlined in **FIGs. 3A** and **3B**. In many such embodiments, first, an IR-reflecting material is deposited onto a support substrate via a physical or chemical deposition technique. In many embodiments, the IR-reflecting material is deposited via electron-beam evaporation. In many embodiments, the IR-reflecting material is deposited in one or two sub-layers of different architecture, as desired, *in situ*, wherein the first sub-layer is a smooth featureless layer of the IR-reflecting material and the second optional layer comprises the same material deposited into nanoarchitectures (**FIG. 3A**, second from left). In many such embodiments, a continuous smooth (or “planar”) sub-layer of the IR-reflecting material is first deposited onto the support substrate oriented perpendicularly to the vapor flux. In many embodiments, the thickness of this continuous sub-layer is 2 – 100 nm. It has been found that the continuous sub-layer deposited with a thickness of less than 2 nm or more than 100 nm may not delaminate (peel off) from the support substrate properly and likely does not afford the continuity and stability required for the proper fabrication and subsequent operation of the composite material of the application. In addition, depositing an IR-reflective sub-layer with a thickness of more than 100 nm also negatively affects the resulting composite material, wherein the thicker continuous sub-layer results in the formation of IR-reflecting micro-domains with sub-optimal sizes during the delamination step of the fabrication process, and, consequently, in sub-optimal performance of the composite material. In many embodiments, the thickness of the continuous IR-reflecting sub-layer is 20 nm.

[0057] In many embodiments, next, an optional nanostructured sub-layer is deposited on top of the continuous/planar sub-layer of the IR-reflective material to allow for anchoring into the elastomeric matrix (**FIG. 3A**). In many embodiments, the nanostructures are an array of vertical or tilted columns of various thicknesses (**FIG. 4A**). For examples, in some embodiments, an array of tilted columns is deposited on top of continuous sub-layer by tilting the support substrate to form an angle of 89° with the normal to the vapor flux to create a nanostructured sub-layer comprised of arrayed tilted nanoscale columns via oblique angle deposition (see Barranco, A., et al. Perspectives on oblique angle deposition of thin films: from fundamentals to devices. Prog. Mater. Sci. 76, 59-153 (2016), the disclosure of which is incorporated herein by reference) (**FIG. 4B**). In some embodiments, the angle of column deposition (α) is less than 89° , such as $\alpha = 81^\circ$,

83°, 85°, or 87° (**FIG. 4C**). In some embodiment, α is chosen to accommodate a deposition of an IR-reflecting material of choice. For example, in some embodiments, wherein the IR-reflective material of choice is copper, the preferred α is more than 75°. Notably, it has been observed that the angle of deposition might affect the porosity of the nanostructured sub-layer, wherein having the nanostructures that are too dense or too porous negatively affects the fabrication of the composite materials (at the delamination step) and, potentially, the composite material's overall robustness in use.

[0058] In some embodiments, the nanostructures may also comprise an array of vertical or angled zig-zags, helices, blades, stacks of alternating thickness, or any combination thereof. In many embodiments, the height of the nanostructures (i.e., the thickness of the nanostructured sub-layer), or the width of the individual nanostructure units, or both, are adjusted or varied to ensure the most robust anchoring of the micro-domains of the IR-reflecting material into the matrix. It should be noted that, in this application, the terms “height of the nanostructures” or “nanostructure height” are used to signify the average thickness of the overall nanostructured sub-layer, rather than the height/length of any individual column, such that the height of the nanostructured sub-layer comprising slanted (i.e., deposited at an angle) or any other types of columns may be different from the height/length of any individual column, or from the height of a sub-layer consisting of the same columns in an upright orientation. In many such embodiments, the height/thickness of the nanostructured anchoring sub-layer is less than 1 micron. In some such embodiments, the height (thickness) of the nanostructured sub-layer is approximately 90 nm. In many embodiments the IR-reflecting material of the deposition is one of: a metal, a metal or non-metal oxide, a ceramic, or any combination thereof, including alloys of thereof. In some such embodiments, the IR-reflecting material is one of: Cu, Al, TiO₂, SiO₂, or any combination thereof. In many embodiments, the support substrate for the deposition is one of: silicon wafer, aluminum foil, polymer, or glass.

[0059] In many embodiments, the fabrication of the composite material with adjustable spectral properties proceeds via deposition of an IR-transparent elastomer directly onto the overall IR-reflecting material layer, such that the nanoarchitectures of the nanostructured sub-layer become embedded (anchored) within the elastomer (**FIG 3A**, middle) (see Drobny, J. G. Handbook of Thermoplastic Elastomers (Elsevier Oxford, ed. 2, 2014), Mark, J. E. Polymer Data

Handbook (Oxford University Press, ed. 2, 2009), the disclosure of which is incorporated herein by reference). In many embodiments, the IR-transparent elastomer is deposited onto the IR-reflective material layer via one of the methods chosen from the list: spin coating, spray coating, slot-casting, offset printing, doctor blade coating, melt blowing, printing, extrusion, gravure coating, laminating, or any combination thereof. Here, it should be noted that, although any of the aforementioned deposition methods can be used equally effectively to deposit an elastomer during small scale production of the composite materials of the application, for the large scale or industrial setting manufacturing, the spray coating deposition of the elastomer layer may be the most practical, especially when used in conjunction with aluminum foil as the support substrate (**FIG. 3B**).

[0060] In many embodiments, the elastomer is both IR-transparent and has a low elastic modulus of less than 10^2 MPa. In some embodiments, the elastic modulus is 2 MPa. In many embodiments, the elastomer comprises one of: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene (SIS) or styrene-butylene-styrene (SBS), or any combination thereof. In many embodiments, the elastomer is a styrene-ethylene-butylene-styrene (SEBS) block co-polymer. In many embodiments the elastomer is deposited in a layer of less than 300 microns thick. In many embodiments, including wherein the matrix comprises a SEBS block co-polymer, the matrix is approximately 30 microns thick. In such embodiments, a sub-micron layer of elastomer is too fragile for proper operation of the composite material of the application. On the other hand, significantly increasing the thickness of the elastomer layer reduces its IR transparency, which also negatively affects the performance of the composite material of embodiments. In some embodiments, the IR-transparent elastomer is heat-treated following its application to the IR-reflective layer to ensure robust adhesion to the IR-reflecting material.

[0061] In many embodiments, the fabrication of the composite material with adjustable spectral properties is finalized by slow delamination (removal) of the IR-reflecting material-elastomer construct from the support substrate to obtain a free-standing composite film (**FIG. 3A**, right). In many embodiments, the delamination and handling process fractures the continuous IR-reflecting material sub-layer into IR-reflecting micro-domains separated by uncoated/bare IR-transparent elastomer, wherein the IR-reflecting micro-domains remain anchored into (or

otherwise adhered to) the elastomer they immediately coat. In many embodiments, the overall fabrication process is robust and straightforwardly scalable, producing uniform, small or large-area composite materials with adjustable spectral properties in high yield. In some embodiments the composite material can be produced according to the laboratory scale methods of the instant disclosure as free standing films with area as large as 180 cm², or 900 cm², or even larger. However, in other embodiments, conventional industrial-scale manufacturing methods can be used to produce the composite materials with adjustable spectral properties on any commercially-relevant scale. In such embodiments, it is most practical to use aluminum foil as the support substrate and spray coating techniques for elastomer deposition. In addition, in many embodiments, employing adhesion methods that eliminate the need for nanostructure anchoring of the IR-reflecting material into the elastomeric matrix, such as, for example, chemical bonding, or interface surface roughening, may also facilitate large scale/industrial manufacturing.

Properties of the Composite Materials With Adjustable Spectral Properties

[0062] FIGs. 5A through 5D illustrate mechanical, optical, and spectral properties and characteristics of example composite materials prepared according to the embodiments from copper and SEBS elastomer. More specifically, these figures illustrate the tensile properties of the composite material and the effect of the applied strain (i.e. mechanical actuation) on its microstructure and IR-transparency. First, the engineering stress versus engineering strain curves shown in **FIG. 5A** indicate that the composite materials of the embodiments behave like soft and strong elastomers, with the Cu-SEBS composite material example demonstrating an average elastic modulus of ~ 2 MPa and an elongation at break of at least ~ 700 %. Furthermore, in many embodiments, the composite materials in their relaxed state are visibly opaque and highly reflective to the naked eye/digital camera imaging (**FIG. 5B1**, top left), while their surfaces comprise a dense arrangement of abutting, irregularly-shaped domains of IR-reflecting material completely covering the underlying elastomeric matrix, as indicated by SEM (**FIG. 5B1**, middle left and bottom left, **FIG. 5B2**, top row, and **FIG. 5B3**, top row). However, upon application of slight strain (e.g., 30 % strain as depicted in **FIGs. 5B1**, **5B2**, and **5B3**), the composite materials of embodiments become partially transparent and less reflective to the naked eye/digital camera (**FIG. 5B1**, top center), and their surface architecture changes to a sparser arrangement of IR-

reflecting micro-domains, wherein the micro-domains are proximal to but not in direct contact with each another, revealing the underlying strained elastomer matrix, as confirmed by SEM (**FIG. 5B1**, middle center and bottom center, **FIG. 5B2**, middle row, and **FIG. 5B3**, middle row). Under further increased strain (e.g., to 50 % as depicted in **FIGs. 5B1**, **5B2**, and **5B3**), the composite materials of the embodiments become even more transparent and less reflective to the eye/digital camera (**FIG. 5B1**, top right), while the arrangement of the IR-reflecting micro-domains becomes even more spread out, revealing more of the underlying IR-transparent matrix, as confirmed by SEM (**FIG. 5B1**, middle right and bottom right, **FIG. 5B2**, bottom row, and **FIG. 5B3**, bottom row). Importantly, the mechanical actuation experiments confirm that the composite materials of the embodiments can be loaded/unloaded in less than 1 s, and produce fully reversible changes in both their visible appearance and surface microstructure (**FIGs. 5B1**, **5B2**, **5B3**). In addition, the experiments confirm that the composite materials of embodiments withstand repeated mechanical cycling without any noticeable deterioration. Furthermore, the Cu-SEBS composite materials of embodiments demonstrate figures of merit comparable to those of the natural squid skin – i.e., analogous elastic modulus (~ 2 MPa (**FIG. 5A**) compared to ~ 0.5 to ~ 3 MPa of the chromatophore organ-containing dermal layer of squid skin), similarly rapid response time (less than 1 s for both), and capacity for extreme elongation (~ 700 % (**FIG. 5A**) compared to > 14 -fold diameter expansion for chromatophore pigment cells. Accordingly, the composite materials of the embodiments exhibit several squid skin-like advantageous characteristics also desirable for thermal switching applications, including a rapid response time, a soft and flexible form factor, and a straightforward actuation mechanism.

[0063] **FIGs. 5C1** through **5C4** provide data demonstrating how the composite material's IR reflectance and transmittance are dynamically modulated by means of an applied mechanical stimulus (here, a uniaxial strain) according to embodiments. Accordingly, in good correlation with the structural changes observed for the mechanically actuated and relaxed composite materials of embodiments (as described above), in their relaxed state, representative composite materials prepared according to the embodiments from copper and SEBS elastomer feature a high average total reflectance of ~ 100 % (**FIGs. 5C1** and **5C2**, top left graph, top line, and **FIGs. 5C1** and **5C2**, bottom left graph) and a low average total transmittance of ~ 1 % (**FIGs. 5C1** and **5C2**, top right graph, bottom line, and **FIGs. 5C1** and **5C2**, bottom right graph). In turn, under a strain of just

30 %, the average total reflectance of the same composite materials drops to 77 % (**FIGs. 5C1** and **5C2**, top left graph, middle line, and **FIGs. 5C1** and **5C2**, bottom graph), while the average total transmittance increases to 17 % (**FIGs. 5C1** and **5C2**, top right graph, middle line, and **FIGs. 5C1** and **5C2**, bottom right graph). In addition, the IR transmittance spectra of the stretched composite materials feature peaks corresponding to atomic and functional group vibrations within the now exposed elastomeric matrix material (**FIGs. 5C1** and **5C2**, top right graph). For example, the stretched composite material of embodiments comprising SEBS matrix produces signals at $\sim 6.3 \mu\text{m}$ ($\sim 1600 \text{ cm}^{-1}$), $\sim 6.9 \mu\text{m}$ ($\sim 1450 \text{ cm}^{-1}$), $\sim 12.6 \mu\text{m}$ (797 cm^{-1}), and $\sim 14.5 \mu\text{m}$ (692 cm^{-1}), which correspond to stretching vibrations of the carbons in the aromatic rings of SEBS, deformation vibrations of the CH_2 groups in ethylene-butylene functionality of SEBS, deformation vibrations of the CH groups in the aromatic rings of SEBS, and out-of-plane bending of the CH groups in the SEBS aromatic rings, wherein all five hydrogen carbons oscillate in phase (**FIGs. 5C1** and **5C2**, top right graph) (see Munteanu, S. B., et al. Spectral and thermal characterization of styrene-butadiene co-polymers with different architectures. *J. Optoelectron. Adv. Mater.* 7, 3135-3148 (2005); and Allen, N. S. et al. Degradation and stabilisation of styrene-ethylene-butadiene-styrene (SEBS) block co-polymer. *Polym. Degrad. Stab.* 71, 113-122 (2001); the disclosure of which is incorporated herein by reference). Furthermore, increasing the strain to 50 %, further drops the average total reflectance of the composite materials to an even smaller value of 67 % (**FIGs. 5C1** and **5C2**, top left graph, middle line, and **FIGs. 5C1** and **5C2**, bottom left graph), increases the average total transmittance to 27 % (**FIGs. 5C1** and **5C2**, top right graph, middle line, and **FIGs. 5C1** and **5C2**, bottom right graph), and also increases the intensity of the elastomer-associated spectroscopic signals (**FIGs. 5C1** and **5C2**, top right graph). Overall, the mechanical actuation experiments with the composite materials of embodiments indicate, that both the IR-reflectance and transmittance properties of the composite materials of embodiments possess a non-linear dependence on the strain. For example, in some embodiments, wherein the composite material comprises copper and SEBS, the IR-reflectance decreases by $\sim 25 \pm 1 \%$, $\sim 34 \pm 1 \%$, and $\sim 46 \pm 2 \%$ at strains of 30 %, 50 %, and 100 %, respectively (relative to the initial unstrained state), and the IR-transmittance increases by $\sim 16 \pm 1 \%$, $\sim 25 \pm 1 \%$, and $\sim 40 \pm 2 \%$ at strains of 30 %, 50 %, and 100 %, respectively (also relative to the initial unstrained state) (**FIGs. 5C1** and **5C2**, bottom left graph and bottom right graph). In addition, **FIGs 5C3** and **5C4** provide plots of average

reflectance and average transmittance versus strain for composite materials fabricated under varying deposition conditions.

[0064] Finally, the composite materials of embodiments display fully reversible changes in their IR-reflectance and IR-transmittance upon mechanical actuation, as well as excellent global stability, with little-to-no degradation in capabilities after as many as 10^4 actuation and relaxation cycles (**FIG. 5D**). Moreover, based on their transmittance at different strains, the mechanically-actuated composite materials of embodiments possess maximum on/off ratios of > 30 , which exceeds the best reported values for radiative thermal switches by an order of magnitude. Therefore, the composite materials of embodiments, again, demonstrate several key characteristics desired for thermal switching applications, including reversibility, stability, and high on/off ratios.

[0065] In many embodiments, the composite materials possess multi-modal switching capabilities, wherein their infrared properties can be modulated to mimic a variety of common materials and textiles. For example, **FIG. 6A** illustrates the operational temperature range of the Cu-SEBS composite materials of embodiments in the context of wearable applications, determined based on their measured IR-modulation abilities (as described above) and the heat transfer model depicted in **FIG. 6B**. In addition, **FIG. 6A** compares the modeled performance of the composite materials to similarly modeled performance of materials/fabrics commonly used in clothing (i.e. “static” wearable heat management systems). More specifically, **FIG. 6B** illustrates a rudimentary model for the transfer of heat (here, the heat naturally generated by human body) from skin, through a material (including through the composite materials of embodiments or another fabric), and to the surrounding cooler (than the skin) environment (**FIG. 6B**) (see Cai, L. et al. Warming up human body by nanoporous metallized polyethylene textile. *Nat. Commun.* 8, 496 (2017); and Tong, J. K. et al. Infrared-transparent visible-opaque fabrics for wearable personal thermal management. *ACS Photonics* 2, 769-778 (2015); the disclosures of which are incorporated herein by reference). For the composite material of embodiments, scenarios with and without mechanical actuation are considered. In this model, the environmental setpoint temperature (plotted on the y-axis of the graph in **FIG. 6A**) is defined as a temperature for which an individual wearing a material of choice remains thermally comfortable, i.e. maintains a constant skin temperature and unchanged outgoing heat flux regardless of the “outside” or “environmental” temperature.

[0066] Accordingly, based on this model and the experimental IR-modulation data collected for the composite materials of embodiments, in their fully relaxed state, the composite materials of embodiments comprised of Cu-SEBS components, have a setpoint temperature of ~ 14.5 °C (**FIG. 6A**, triangular data points), which is similar to the value of ~ 14.3 °C determined by the same method for the space blanket, i.e. the presumably lowest possible value for a near-perfect reflector (**FIG. 6A**, diamond data points). In other words, to remain thermally comfortable in a ~ 14.5 °C environment, an individual can don an article of clothing/outer layer based on either the space blanket-type material or the composite material of embodiments brought to a fully relaxed state. In turn, under a strain of 30 %, the representative Cu-SEBS-based composite materials of embodiments have a setpoint temperature of ~ 19.6 °C (**FIG. 6A**, triangular data points), which is similar to the value of ~ 18.9 °C found for an Omniheat fleece lining (**FIG. 6A**, diamond data points). Following on the example provided above, an individual wishing to remain thermally comfortable through the environment temperature increase from ~ 14.5 to 18.9 °C, will now have to either swap the space blanket outer layer for Omniheat fleece or simply adjust the strain within the composite material of embodiments without taking it off, depending on the original choice of thermoregulation. Further, under an increased strain of 50 %, the representative Cu-SEBS-based composite materials of embodiments have a setpoint temperature of ~ 21.0 °C (**FIG. 6A**, triangular data points), which is similar to the value of ~ 20.5 °C determined for wool (**FIG. 6A**, diamond data points). Under an even greater strain of 100 %, the representative Cu-SEBS-based composite materials of embodiments have a setpoint temperature of ~ 22.7 °C (**FIG. 6A**, triangular data points), which is similar to the value of ~ 22.8 °C found for cotton (**FIG. 6A**, diamond data points). Therefore, **FIG. 6A** clearly shows that, in many embodiments, the composite materials of the application can be instantaneously adjusted by mechanical means to maintain a wearer's thermal comfort across an environmental setpoint temperature window of as large as ~ 8.2 °C (and potentially larger with a more IR-transparent matrix or higher strains), and, as such, represents a practical multi-functional replacement for a wide range of thermoregulatory materials and textiles. In addition, **FIGs 6C** and **6D** directly compare the calculated setpoint temperatures for the composite materials fabricated under varying deposition conditions.

[0067] Furthermore, in many embodiments, the composite materials of the application can manage the transfer of heat from skin in an adaptive and efficient manner. For example, **FIGs.**

7A through 7C illustrate heat transfer experiments conducted with the Cu-SEBS-based composite materials of embodiments applied to a surface designed to approximate the thermal properties of human skin. More specifically, the composite materials were mounted in a custom-designed holder (**FIGs. 7A**) that allowed for application of strain over a sweating guarded hot plate and their thermoregulatory capability was tested under controlled conditions without and with mechanical actuation (**FIG. 7B**). Per these experiments, it appears that in the relaxed state, the representative Cu-SEBS-based composite materials of embodiments maintain the heat flux from the hot plate at an average value of $\sim 248 \text{ W/m}^2$ (**FIG. 7C**, bottom plot line). In turn, under a strain of 30 %, the representative Cu-SEBS-based composite material maintains the heat flux from the hot plate at a higher average value of $\sim 291 \text{ W/m}^2$ (**FIG. 7C**, middle plot line), which rises to an even higher average value of $\sim 307 \text{ W/m}^2$ under an increased strain of 50 % (**FIG. 7C**, top plot line).

[0068] Overall, in many embodiments, the representative Cu-SEBS-based composite materials of the application are able to stably modulate the heat flux by $\sim 36 \pm 8 \text{ W/m}^2$ and $\sim 51 \pm 8 \text{ W/m}^2$ upon actuation with applied strains of 30 % and 50 %, respectively. Therefore, in many embodiments, the composite materials of embodiments are capable of adaptively managing at least one quarter of the metabolic heat expected to be generated by the skin of a resting sedentary individual, which is estimated to be $\sim 73 \text{ W/m}^2$. In many embodiments, even better performance is achievable at higher strains and/or higher transmittance matrix. Furthermore, in many embodiments, the composite materials only need an input of $\sim 3 \text{ W/m}^2$ for a single moderate strain mechanical switching event and do not consume power continuously. Consequently, in many embodiments, the energy requirement for operating the composite material with adjustable spectral properties is very low, and is substantially lower than that of any currently available active thermal management platforms. Accordingly, in many embodiments, the composite materials demonstrate key advantages of both passive and active thermoregulating systems by exhibiting excellent energy efficiency and ease of operation, while simultaneously allowing for robust user control.

[0069] In many embodiments, the composite materials with adjustable spectral properties function as dynamic switchable components in wearable systems and directly manage the local body temperature of human subjects. In many such embodiments, the composite materials are used in heat regulating clothing or clothing components. For example, **FIGs. 8A** through **8C** illustrate operation and adjustable heat-regulating capabilities of a sleeve prepared from the Cu-

SEBS-based composite material of embodiments (**FIG. 9**) and compare it to an analogous sleeve made from space blanket material. First, a sleeve comprising the composite material was designed to allow for the application of strain via a straightforward fastener mechanism according to some embodiments (**FIG. 9**). Next, the designer “adjustable” sleeve was fabricated from both the composite materials of embodiments and, for comparison, from the space blanket material, and fitted onto one of the forearms of a human subject for testing of heat regulating properties (**FIGs. 8A and 9**). Finally, the outgoing heat flux and the change in temperature for the subject’s sleeve covered forearm were visualized and measured throughout the actuation stages of the sleeve and compared to the analogous data for the bare forearm serving as an internal standard (**FIGs. 8A—8C**).

[0070] According to these experiments, the collected data for some of which is provided in **FIGs. 8B and 8C**, a completely static sleeve made from the space blanket material traps (i.e. primarily reflects back) most of the heat emitted by the forearm it covers (**FIG. 8B**, left arm) and, thus, raises the temperature of the covered forearm’s by $\sim 1.0 \pm 0.1$ °C, as compared to the bare forearm (**FIG. 8C**). Similarly, in many embodiments, the composite material-based sleeve in its fully relaxed state also traps the heat emitted by the skin it covers (**FIG. 8B**, left arm) and, as such, raises the covered forearm’s temperature by $\sim 0.9 \pm 0.1$ °C, as compared to the bare forearm (**FIG. 8C**), similarly to the space blanket-based sleeve. However, in many embodiments, when a strain of 30 % is applied to the composite material-based adjustable sleeve, it traps only some of the heat emitted by the forearm it covers (**FIG. 8B**, left arm) and raises the covered forearm’s temperature only by $\sim 0.3 \pm 0.1$ °C, as compared to the bare forearm (**FIG. 8C**), which constitutes a > 2 -fold reduction in temperature change with respect to that for the space blanket. Furthermore, in many embodiments, application of 50 % strain leads the composite material-based sleeve trapping substantially less heat emitted by the covered forearm (**FIG. 8B**, left arm) and raises the covered forearm’s temperature by only $\sim 0.1 \pm 0.1$ °C, as compared to the bare forearm (**FIG. 8C**), which constitutes a ~ 10 -fold reduction in temperature change with respect to that for the space blanket.

[0071] Accordingly, in many embodiments, the composite material-based sleeve or another wearable component or article of clothing can be mechanically adjusted with good control in real time to locally manage the heat flux from a wearer to the surrounding environment. In many such embodiments, the relative temperature change in response to the mechanical modulations is nearly

an order of magnitude (**FIG. 8C**). Moreover, in many embodiments, the mechanically affected temperature changes are ~ 2 - to ~ 5 -fold greater than the temperature difference perception thresholds (i.e., < 0.1 °C) found in studies of human subjects (see Stevens, J. C., et al. Temperature sensitivity of the body surface over the life span. Somatosens. Mot. Res. 15, 13-28 (1998), the disclosure of which is incorporated herein by reference). Therefore, in many embodiments, the heat regulation range that can be achieved by the composite materials of the application as they proceed through various states of actuation is readily perceivable by users. In many embodiments, the composite materials of the application are incorporated in garments that adaptively and selectively regulate the thermal envelope across a wearer's entire body.

EXAMPLARY EMBODIMENTS

[0072] The following examples are put forth so as to provide those of ordinary skill in the art with a complete disclosure and description of how to make and use the present invention, and are not intended to limit the scope of what the inventors regard as their invention nor are they intended to represent that the experiments below are all or the only experiments performed. Efforts have been made to ensure accuracy with respect to numbers used (e.g. amounts, temperature, etc.) but some experimental errors and deviations should be accounted for. Unless indicated otherwise, parts are parts by weight, molecular weight is weight average molecular weight, temperature is in degrees Celsius, and pressure is at or near atmospheric. Standard abbreviations may be used, e.g., s or sec, second(s); min, minute(s); h or hr, hour(s); and the like.

Example 1 – Fabrication of the Composite Material

[0073] The composite materials are prepared according to standard microfabrication protocols. First, to prepare the IR-reflecting layer, a ~ 20 nm planar copper (Kurt J. Lesker) film and a ~ 90 nm array of tilted columns are sequentially electron beam evaporated onto a 6-inch diameter silicon wafer (University Wafer) by using an Angstrom Engineering EvoVac system. Next, to embed the nanostructured layer within an IR-transparent elastomer, a ~ 30 μm thick film from a commercially-available styrene-ethylene-butylene-styrene block co-polymer (G1645 SEBS, Kraton Polymers LLC) is spincoated directly onto the nanostructure-modified substrate. Last, the composite is cured on a hot plate at 60 °C for 10 minutes and then delaminated from the substrate

by means of a Mylar frame and pressure-sensitive tape. The resulting composite materials obtained via this procedure are used for physical, mechanical, optical, and infrared characterization experiments as needed.

Example 2 – Fabrication of Composite Materials with Large Areas

[0074] The composite materials with large areas are prepared according to standard microfabrication protocols. First, to prepare the IR-reflecting layer, a ~ 20 nm planar copper (Kurt J. Lesker) film and a ~ 90 nm array of tilted columns is sequentially electron beam evaporated onto a 12-inch diameter substrate covered in aluminum foil by using an Angstrom Engineering EvoVac system. Next, to embed the nanostructured layer within an IR-transparent elastomer, a ~ 20-30 μm thick film from a commercially-available styrene-ethylene-butylene-styrene block co-polymer (G1645 SEBS, Kraton Polymers LLC) in toluene is spray coated in layers directly onto the nanostructure-modified substrate. Last, the composite is either cured on a hot plate at 60 °C for 10 minutes or allowed to sit at room temperature until the solvent has evaporated, then delaminated from the substrate by means of a Mylar frame and pressure-sensitive tape. The resulting composite materials obtained via this procedure are used for physical, mechanical, optical, and infrared characterization experiments as needed.

Example 3 – Fabrication of Wearable Sleeves from the Composite Materials

[0075] The wearable adaptive thermal management sleeves, which comprise a composite material component and a fabric-based actuation component, are designed and manufactured via protocols developed in-house (**FIG. 9A & 9B**). To prepare the composite material component, four circular samples of the composite material with a ~ 6 inch diameter are first segmented into rectangular pieces with a ~ 5.5 inch length and a ~ 2.5 inch width. The four rectangular pieces are then joined together with adhesive tape to form a larger section with a ~ 10 inch length and a ~ 5.5 inch width. The larger section is, in turn, modified with hook fasteners (from a commercial hook-and-loop fastener set) along its periphery, in order to enable integration with the fabric-based component and allow for the application of different strains. To prepare the fabric-based actuation component, a square sample of a stretch woven fabric is first cut into a sleeve-like pattern. The resulting fabric swatch is then modified with loop fasteners (from the same commercial hook-and-

loop fastener set) at predetermined positions, which are selected to correspond to the application of strains of 0 %, 10 %, 30 %, and 50 % to the composite-based component. The fabric swatch is, in turn, modified with bands, which encircled the forearm to provide structural support and simultaneously function as rail guides to prevent the composite material component from directly contacting the skin. To complete the wearable adaptive thermal management sleeve, the fabric-based actuation component is mounted on the forearm of a human subject, and the composite material component is then attached to its fabric-based counterpart via the complementary hook-and-loop fastener assembly.

Example 4 – Characterizations of the Composite Materials

[0076] *Scanning electron microscopy of the composite materials after the fabrication steps.*

The morphology of the composite materials is characterized via scanning electron microscopy (SEM) by using a Magellan 400 XHR SEM (FEI). For imaging of the nanostructured sub-layer, the pristine samples are not modified. For cross-sectional imaging of the interior of the composite material, a portion of the elastomer is removed with a Hitachi IM4000 Plus Ion Milling System. For imaging of the IR-reflecting micro-domains at various strains, the samples are subjected to the appropriate strain fixed with an epoxy resin (Ted Pella), and sputter coated with a ~ 2 nm film of platinum/palladium on a Leica ACE200 Vacuum Coater. Such characterization ensures quality control and standardization during the fabrication and testing steps.

[0077] *Elemental mapping of the composite materials.* The chemical composition of the composite materials' surfaces is characterized via energy dispersive spectroscopy by using a Magellan 400 XHR SEM outfitted with an Oxford Instruments X-Max Silicon Drift Detector. For these measurements, the samples are subjected to various strains, fixed with an epoxy resin, and sputter coated with a ~ 2 nm film of platinum/palladium. The resulting elemental maps of IR-reflective material are analyzed by using the ImageJ (NIH) software package and are consistent with expectations from the SEM experiments. Such characterization further confirms the chemical identity of the IR-reflective micro-domains covering the surface of the elastomer.

[0078] *Infrared spectroscopy of the composite materials and fabrics/textiles.* The infrared properties of the composite materials and various fabrics/textiles are characterized via infrared spectroscopy by using a PerkinElmer Fourier Transform Infrared (FTIR) Spectrometer outfitted

with a Pike Technologies Mid-infrared Integrating Sphere. The measurements furnish the total (sum of diffuse and specular) reflectance and transmittance (see Hanssen, L. M., et al. *Infrared Optical Properties of Materials*. NIST Spec. Publ. 250, (2015), the disclosure of which is incorporated herein by reference) and are referenced to a Pike Technologies Diffuse Gold Standard, when appropriate. During the experiments, all samples are mounted on home-built size-adjustable stages, which allows for mechanical actuation, i.e. the application of different uniaxial strains, as necessary. The samples tested include rayon, cotton, linen, silk, polyester, cotton flannel, acrylic, wool felt, the Columbia Omniheat fleece, the space blanket, and the composite material of embodiments. The tested areas are large enough to completely cover the ~ 2.1 cm diameter instrument port before and after mechanical actuation. The total transmittance spectra are collected at a normal illumination angle, and the total reflectance spectra are collected at an illumination angle of 12° . The collected spectra are analyzed with the Spectrum (PerkinElmer) and Igor Pro (Wavemetrics) software packages, and all average values are calculated over the wavelength range of 4.5 to 16.5 μm . The experiments are performed for more than ten different samples.

[0079] *Thermal evaluation of the composite materials.* The thermal properties of the composite materials are characterized according to standard protocols (see ASTM Standard F1868: Standard Test Method for Thermal and Evaporative Resistance of Clothing Materials Using a Sweating Hot Plate. ASTM Int. (2017), the disclosure of which is incorporated herein by reference) by using a Thermetrics SGHP-8.2 Sweating Guarded Hot Plate located within a temperature- and humidity-controlled chamber. During the experiments, all samples are mounted on custom-designed holders, which allows for them to be maintained under different applied uniaxial strains on the hot plate. The measurements furnish the thermal flux from the hot plate necessary to maintain its temperature at a constant value, as well as the thermal resistance of the sample being tested. For the measurements, the hot plate is covered with skin tape (Trimaco) and kept at a representative human skin-like temperature of 35°C ; the surrounding chamber is maintained at a representative environmental temperature of 19.5°C and a representative relative humidity of 50 %; and the sample is maintained under a laminar air flow of 1 m/s. The average values of the thermal flux are calculated from multiple independent measurements performed over a period of 30 minutes for both strained and unstrained samples. The collected data is analyzed with Igor Pro

(Wavemetrics) software package. The experiments are performed for more than three different samples.

[0080] *Tensile testing of the composite materials.* The tensile properties of the composite materials are characterized according to standard protocols (see ASTM Standard D882: Standard Test Method for Tensile Properties of Thin Plastic Sheeting. ASTM Int. (2012), the disclosure of which is incorporated herein by reference) by using an Instron 3365 Universal Testing System. During the experiments, samples with a 3 inch length, 0.5 inch width, and 30 μm thickness are mounted on the grips of the instrument at an initial separation of 1 inch. The measurements furnish the load versus the elongation, enabling calculation of the engineering stress as a function of the engineering strain. The engineering stress (σ) is calculated according to the equation:

$$\sigma = F/A$$

where F is the applied load and A is the area of the sample. The engineering strain (ε) is calculated according to the equation:

$$\varepsilon = \Delta L/L$$

where ΔL is the change in length of the sample and L is the initial length of the sample. The Young's modulus (E) is calculated from the linear region of the engineering stress versus the engineering strain (at low strain) by using the following equation:

$$E = \sigma/\varepsilon$$

where E is the slope of the elastic (linear) region (**FIG. 5A**). The experiments are performed for more than ten different samples.

[0081] *Stability testing of the composite materials.* The mechanical stability of the composite materials is characterized by using a MARK-10 ESM303 Tension/Compression Test Stand, in conjunction with a PerkinElmer FTIR Spectrometer outfitted with a Pike Technologies Mid-infrared Integrating Sphere. First, the samples' total IR reflectance and transmittance are measured at uniaxial strains of 0 %, 30 %, and 50 %, as described above. Next, the samples are cycled one thousand times between applied strains of 0 % and 50 %. In turn, the samples' total IR reflectance and transmittance are again measured at uniaxial strains of 0 %, 30 %, and 50 %, as described above. Subsequently, the samples are cycled another nine thousand times between applied strains of 0 % and 50 %. Last, the samples' total IR reflectance and transmittance are once again re-

measured at uniaxial strains of 0 %, 30 %, and 50 %. The experiments are performed for more than five different samples.

[0082] *Analysis of heat transfer through the composite materials or cloth.* The thermal properties of the composite materials are computationally evaluated according to procedures adapted from the literature. For this purpose, the steady state, one-dimensional heat transfer (via conduction, convection, and radiation) between a planar heat source that emulates human skin, the composite material or cloth, and the surrounding environment are modeled for the general configuration shown in **Fig. 6B** by using the set of equations described below. The absorptance (α) is calculated according to the equation:

$$\alpha = 1 - \tau - \rho$$

where τ is the transmittance and ρ is the reflectance. The emittance (ϵ) is calculated by using Kirchhoff's Law of Thermal Radiation according to the equation:

$$\epsilon = \alpha = 1 - \tau - \rho$$

where α is the absorptance, τ is the transmittance, and ρ is the reflectance. The heat transferred from the skin via radiation ($q_{rad,s}$) is calculated by using the Stefan-Boltzmann Law according to the equation:

$$q_{rad,s} = \epsilon_s \sigma T_s^4$$

where σ is the Stefan-Boltzmann constant, ϵ_s is the emittance of the skin, and T_s is the temperature of the skin.

$$q_{rad,e} = \epsilon_e \sigma T_e^4$$

ϵ_e is the emittance of the environment, T_e is the temperature of the environment,

$$q_{rad,i} = \epsilon_i \sigma T_i^4$$

ϵ_i is the emittance of the inner side of the cloth, T_i is the temperature of the inner side of the cloth,

$$q_{rad,o} = \epsilon_o \sigma T_o^4$$

ϵ_o is the emittance of the outer side of the cloth, and T_o is the temperature of the outer side of the cloth. The heat transferred across the air gap by conduction ($q_{cond,a}$) is calculated by using Fourier's Law according to the equation:

$$q_{cond,a} = \frac{k \Delta T}{\Delta x} = \frac{k_a}{t_a} (T_s - T_i)$$

where k_a is the thermal conductivity of the air gap, t_a is the thickness of the air gap, T_s is the temperature of the skin, and T_i is the temperature of the inner side of the cloth. The heat transferred from the outer surface of the composite (or cloth) to the surroundings q_{conv} is assumed to obey Newton's Law of Cooling and was given by the equation:

$$q_{conv} = h\Delta T = h(T_o - T_e)$$

where h is the convective heat transfer coefficient, T_o is the temperature of the outer side of the cloth, and T_e is the temperature of the environment. The energy balance across the skin is given by the equation:

$$q_{gen} - (1 - \rho_i)q_{rad,out,s} + q_{rad,i} + \tau_c q_{rad,e} - q_{cond,a}$$

where q_{gen} is the heat flux generated from the human body, $q_{rad,out,s}$ is the total radiation from the skin, ρ_i is the reflectance on the inner side of the cloth, $q_{rad,i}$ is the radiation from the inner side of the cloth, τ_c is the transmittance of the cloth, $q_{rad,e}$ is the radiation from the environment, and $q_{cond,a}$ is the conduction across the air gap. The energy balance across the textile is given by the equation:

$$(1 - \rho_i - \tau_c)q_{rad,s} + (1 - \rho_o - \tau_c)q_{rad,e} - q_{rad,o} - q_{rad,i} + q_{cond,a} - q_{conv}$$

where ρ_i is the reflectance on the inner side of the cloth, τ_c is the transmittance of the cloth, $q_{rad,s}$ is the radiation from the skin, ρ_o is the reflectance on the outer side of the cloth, $q_{rad,e}$ is the radiation from the environment, $q_{rad,o}$ is the radiation from the outer side of the cloth, $q_{rad,i}$ is the radiation from the inner side of the cloth, $q_{cond,a}$ is the conduction across the air gap, and q_{conv} is the convection into the environment. The temperature profile across the cloth ($T(x)$) is given by the equation:

$$T(x) = \frac{1}{2k_c t_c} (q_{rad,i} + q_{rad,o} - \epsilon_i q_{rad,out,s} - \epsilon_o q_{rad,e}) x^2 - \frac{k_a}{k_c} \left(\frac{T_s - T_i}{t_a} \right) x$$

where k_c is the thermal conductivity of the cloth, t_c is the thickness of the cloth, $q_{rad,i}$ is the radiation from the inner side of the cloth, $q_{rad,o}$ is the radiation from the outer side of the cloth, ϵ_i is the emittance from the inner side of the cloth, $q_{rad,out,s}$ is the total radiation from the skin, ϵ_o is the emittance from the outer side of the cloth, $q_{rad,e}$ is the radiation from the environment, k_a is the thermal conductivity of air, T_s is the temperature of the skin, and T_i is the temperature of the inner

side of the cloth. The temperature on the outer side of the cloth ($T_o = T(t_a)$) is given by the equation:

$$T_o = \frac{t_c}{2k_c} (q_{rad,i} + q_{rad,o} - \epsilon_i q_{rad,out,s} - \epsilon_o q_{rad,e}) - \frac{k_a t_c}{k_c t_a} (T_s - T_i)$$

where t_c is the thickness of the cloth, k_c is the thermal conductivity of the cloth, $q_{rad,i}$ is the radiation from the inner side of the cloth, $q_{rad,o}$ is the radiation from the outer side of the cloth, ϵ_i is the emittance from the inner side of the cloth, $q_{rad,out,s}$ is the total radiation from the skin, ϵ_o is the emittance from the outer side of the cloth, $q_{rad,e}$ is the radiation from the environment, k_a is the thermal conductivity of air, t_a is the thickness of the air gap, T_s is the temperature of the skin, and T_i is the temperature of the inner side of the cloth. The heat radiated from the skin ($q_{rad,out,s}$) is given by the equation:

$$q_{rad,out,s} = q_{rad,s} + (1 - \epsilon_s) \left(\frac{q_{rad,i} + \rho_i q_{rad,s} + \tau_c q_{rad,e}}{1 - \rho_i (1 - \epsilon_s)} \right)$$

where $q_{rad,s}$ is the radiation from the skin, ϵ_s is the emittance of the skin, $q_{rad,i}$ is the radiation from the inner side of the cloth, ρ_i is the reflectance from the inner side of the cloth, τ_c is the transmittance of the cloth, and $q_{rad,e}$ is the radiation from the environment.

[0083] From the three equations illustrating the overall heat transfer of the system (i.e. the energy balance across the skin (Equation 1), the energy balance across the textile (Equation 2), and the temperature on the outer side of the cloth (Equation 3)) and the definitions described above, the setpoint temperature (T_e) is calculated. For the purpose of the calculations, the use case is considered a human wearing a loose-fitting garment where the air gap thickness (t_a) is 5 mm. The convective heat transfer coefficient (h) is calculated as 7.3 W/m^2 . In this calculations, the environment is approximated as a black body with an emissivity of $\epsilon = 1$, and the skin is approximated as a gray body with an emissivity of $\epsilon = 0.98$. Moreover, thermal comfort is defined as the conditions under which the total heat generation rate and total heat dissipation rate are equal, and the setpoint temperature is defined as the environmental temperature at which a sedentary individual remains comfortable (i.e. maintains a constant skin temperature of 35°C and a steady state heat generation of 73 W/m^2). Due to its high reflectance, the space blanket is used as the

internal reference for normalization of the total reflectance and total transmittance values measured for the composite materials and fabrics/textiles (in place of the Pike Technologies Diffuse Gold Standard). Therefore, from the above equations, the setpoint temperature of the environment (T_e) is calculated for the composite materials from their average measured reflectance and transmittance values at strains of 0 %, 10 %, 30 %, 40 %, 50 %, 70 %, and 100 %. In addition, the setpoint temperature is calculated for rayon (average transmittance of 7.4% and average reflectance of 11.7%), cotton (average transmittance of 7.8% and average reflectance of 13.1%), linen, (average transmittance of 4.3% and average reflectance of 13.0%), silk (average transmittance of 4.8% and average reflectance of 13.8%), polyester (average transmittance of 2.8% and average reflectance of 16.9%), flannel (average transmittance of 1.2% and average reflectance of 14.4%), acrylic (average transmittance of 4.3% and average reflectance of 13.0%), wool (average transmittance of 1.2% and average reflectance of 9.8%), the Omniheat fleece (average transmittance of 0.7%, average reflectance of 41.3% on the inner side, and average reflectance of 20.9% on the outer side), and the space blanket (average transmittance of 0.6 %, average reflectance of 99.4% on the inner side, and average reflectance of 52.5% on the outer side). The calculations yield setpoint temperatures of 14.5 °C, 16.4 °C, 19.6 °C, 20.2 °C, 21.0 °C, 21.8 °C, and 22.7 °C for composite materials of embodiments under strains of 0 %, 10 %, 30 %, 40 %, 50 %, 70 %, and 100 %, respectively, as well as setpoint temperatures of 23.0 °C, 22.8 °C, 22.6 °C, 22.6 °C, 22.0 °C, 21.9 °C, 20.7 °C, 20.5 °C, 18.9 °C, and 14.3 °C for rayon, cotton, linen, silk, polyester, flannel, acrylic, wool, the Omniheat fleece, and the space blanket, respectively.

[0084] *Analysis of the power consumed during composite actuation.* The power consumption associated with actuation of the composite materials is estimated according to standard procedures. First, the energy density (U) for the composites is calculated from the stress versus strain curve according to the equation:

$$U = \int_{\varepsilon_i}^{\varepsilon_f} \sigma d\varepsilon$$

where σ is the stress, ε_i is the initial strain, and ε_f is the strain corresponding to an elongation of 30%. Next, the power consumption (P) is calculated from the equation:

$$P = \frac{U}{t}$$

where t is the time required for actuation.

[0085] *Human subject testing of the composite material- and space blanket-based sleeves.* The thermoregulatory properties of the composite material-based sleeves are evaluated for human subjects by using a FLIR C2 Infrared Camera. First, the bare forearms of a human subject are allowed to equilibrate in a controlled environment, and both forearms are imaged to record their average initial temperature. Next, the composite material-based sleeve is mounted on one of the forearms, with the composite material-based component attached at a loop fastener position corresponding to the absence of strain, and both the bare and sleeve-covered forearms are allowed to equilibrate for a period of ten minutes. In turn, the composite material-based sleeve is removed from the previously-covered forearm, and both forearms are imaged again to record their final average temperature. Last, the same sequence of measurements is repeated with the composite material-based component attached at a loop fastener position corresponding to different applied strains of $\sim 10\%$, $\sim 30\%$, and $\sim 50\%$. From these measurements, the relative change in temperature (ΔT) for the human subject's sleeve-covered forearm with respect to their bare forearm, which serves as a de facto internal standard, is calculated according to the equation:

$$\Delta T = \Delta T_{\text{covered}} - \Delta T_{\text{bare}} = (T_{\text{covered,final}} - T_{\text{covered,initial}}) - (T_{\text{bare,final}} - T_{\text{bare,initial}}),$$

where $\Delta T_{\text{covered}}$ is the average temperature change for the covered forearm, ΔT_{bare} is the average temperature change for the bare forearm, $T_{\text{covered,final}}$ is the average final temperature for the covered forearm, $T_{\text{covered,initial}}$ is the average initial temperature for the covered forearm, $T_{\text{bare,final}}$ is the average final temperature for the bare forearm, and $T_{\text{bare,initial}}$ is the average initial temperature for the bare forearm. For the presented measurements, the human subject is a 24-year old male, and the surrounding room is maintained at a temperature of ~ 17.5 to ~ 18.5 °C. The collected data and average forearm temperatures are calculated directly from the obtained videos and images by using the FLIR Tools+ (FLIR) and ImageJ (NIH) software packages. The thermoregulatory properties of the space blanket-based sleeves are evaluated by following nearly identical protocols to those described above. All variants of the experiments are performed for more than seven different sleeves.

[0086] In summary, the analysis of the properties of the composite materials with adjustable spectral properties fabricated according to embodiments confirms that these materials represent a

viable platform for IR-regulation, including for applications in thermoregulating wearables and clothing. In many embodiments, the composite materials can be mechanically adjusted to reversibly modulate their reflectance and transmittance within the infrared region of the electromagnetic spectrum. In many such embodiments, the composite materials can be made to reversibly alter their thermoregulatory properties to resemble those of various common wearable materials, such as the space blanket, Omniheat lining, acrylic textile, and cotton. In many embodiments, the composite materials behave like mechanically-actuated radiative thermal switches and possess a highly-desirable and unprecedented combination of metrics, including manufacturability over large areas, a straightforward actuation method, reversibility and tunability without hysteresis, stability to repeated cycling, a soft and flexible form factor, rapid response time, high on/off ratios, and a low operating temperature. In many embodiments, the composite materials can manage the trapping and release of over one quarter of the thermal flux expected for an average human body at rest (and potentially more at higher strains), while requiring a small instantaneous energy input for switching of their thermoregulatory properties. In many embodiments, the composite materials possess a large dynamic environmental temperature setpoint range and allow users to precisely control their local thermal envelope when used in wearable applications. In many embodiments, the composite materials with adjustable spectral properties are manufactured from low-cost commercial building blocks via facile and scalable processes.

[0087] Of course, it should be understood that many types of platforms using IR-radiation can benefit from incorporating the composite materials with adjustable spectral properties discussed here, not just the thermoregulating clothing or clothing components. For example, in many embodiments, the composite materials can be used in applications related to night-vision camouflage, aircraft/spacecraft components, medical devices, and shipping/storage containers, flexible/stretchable devices, conformable electronic skin, and untethered soft robots, among others. More generally, it should be understood, that the composite materials of embodiments can be implemented in any applications where it is desirable to have adjustable IR-reflecting properties in accordance with embodiments of the invention and that the disclosure is not limited to implementing thermoregulatory wearables. In general, as can be inferred from the above discussion, the above-mentioned concepts can be implemented in a variety of arrangements in

accordance with embodiments of the invention. Accordingly, although the present invention has been described in certain specific aspects, many additional modifications and variations, including different choices of materials used in fabrication of the composite materials of embodiments would be apparent to those skilled in the art. It is therefore to be understood that the present invention may be practiced otherwise than specifically described. Thus, embodiments of the present invention should be considered in all respects as illustrative and not restrictive.

DOCTRINE OF EQUIVALENTS

[0088] This description of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form described, and many modifications and variations are possible in light of the teaching above. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications. This description will enable others skilled in the art to best utilize and practice the invention in various embodiments and with various modifications as are suited to a particular use. The scope of the invention is defined by the following claims.

CLAIMS:

1. A composite material with adjustable spectral properties comprising:
an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus;
a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material;
a plurality of spacings, separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material;
a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix, the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness; and
wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix.
2. The composite material of claim 1, wherein the elastomer thickness is less than 300 microns.
3. The composite material of claim 1, wherein the elastic modulus is $< 10^2$ MPa.
4. The composite material of claim 1, wherein the IR-transparent, flexible, and stretchable material is selected from the group consisting of: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene or styrene-butylene-styrene, or any combination thereof.
5. The composite material of claim 1, wherein the IR-transparent, flexible, and stretchable material comprises a styrene-ethylene-butylene-styrene block co-polymer.

6. The composite material of claim 1, wherein the IR-reflecting material is selected from the group consisting of: a metal, a metal or non-metal oxide, a ceramic, alloys thereof, or any combination thereof.
7. The composite material of claim 6, wherein the IR-reflecting material is selected from the group consisting of: Cu, Al, TiO₂, SiO₂, or any combination thereof.
8. The composite material of claim 1, wherein the micro-domain thickness is 2 to 100 nm.
9. The composite material of claim 1, wherein the micro-domain thickness is 20 nm.
10. The composite material of claim 1, wherein the nanostructure height is less than 1 micron.
11. The composite material of claim 10, wherein the nanostructure height is approximately 90 nm.
12. A composite material with adjustable spectral properties comprising:
 - an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus;
 - a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material; and
 - a plurality of spacings, separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material;wherein the plurality of spacings, is dynamically adjustable via mechanical manipulation of the elastomeric matrix.
13. The composite material of claim 12, wherein the plurality of micro-domains is anchored into the elastomeric matrix via a plurality of nanostructures characterized by a nanostructure height that is not included in the micro-domain thickness.

14. The composite material of claim 12, wherein the IR-transparent, flexible, and stretchable material is functionalized with chemical groups that bind the IR-reflecting material.
15. A method of fabricating a composite material with adjustable spectral properties comprising:
 - providing a support substrate;
 - depositing an IR-reflecting material on the support substrate in two steps creating a first sub-layer and a second sub-layer; wherein
 - the first sub-layer is immediately adjacent to the support substrate and comprises a continuous featureless planar layer capable of reflecting IR radiation and is characterized by a planar layer thickness, and
 - the second sub-layer is immediately adjacent to the first sub-layer and comprises a plurality of nanostructures characterized by a nanostructure height;
 - depositing a layer characterized by an elastomer thickness of an IR-transparent elastomeric material characterized by an elastic modulus on top of the IR-reflecting material, such that the plurality of the nanostructures becomes buried in the IR-transparent elastomeric material, thus anchoring the first sub-layer into the IR-transparent elastomeric material, to form a composite comprising the IR-reflecting material securely embedded into an IR-transparent elastomeric matrix;
 - delaminating the composite from the support substrate with application of force, such that the first sub-layer breaks into a plurality of micro-domains comprising IR reflecting material surrounded by a plurality of spacings comprising the uncoated IR-transparent elastomeric matrix, to produce a free standing film of the composite material with adjustable spectral properties.
16. The method of claim 15, wherein the IR-transparent elastomeric material is cured, or otherwise heat or time-treated prior to delamination.

17. The method of claim 15, wherein the IR-reflecting material is deposited onto the substrate support via physical or chemical vapor deposition technique.
18. The method of claim 17, wherein the IR-reflecting material is deposited onto the substrate support via electron-beam evaporation.
19. The method of claim 15, wherein the support substrate is selected from the group consisting of: silicon wafer, aluminum foil, polymer, or glass.
20. The method of claim 15, wherein the planar layer thickness is 2 – 100 nm.
21. The method of claim 20, wherein the planar layer thickness is 20 nm.
22. The method of claim 15, wherein the plurality of nanostructures comprises an array of nanostructures of a shape selected from the group consisting of: vertical or tilted columns, zig-zags, helices, blades, stacks of alternating thickness, or any combination thereof.
23. The method of claim 15, wherein the nanostructure height is less than 1 micron.
24. The method of claim 23, wherein the nanostructure height is approximately 90 nm.
25. The method of claim 15, wherein the IR-reflecting material is selected from the group consisting of: a metal, a metal or non-metal oxide, a ceramic, alloys thereof, or any combination thereof.
26. The method of claim 25, wherein the IR-reflecting material is selected from the group consisting of: Cu, Al, TiO₂, SiO₂, or any combination thereof.
27. The method of claim 15, wherein the IR-transparent elastomeric matrix is deposited via a method selected from the group consisting of: spin coating, spray coating, slot-casting,

offset printing, blade coating, melt blowing, printing, extrusion, gravure coating, laminating, or any combination thereof.

28. The method of claim 15, wherein the support substrate is aluminum foil and IR-transparent elastomeric matrix is deposited via spray coating.
29. The method of claim 15, wherein the elastomer thickness is less than 300 microns.
30. The method of claim 15, wherein the elastic modulus is $< 10^2$ MPa.
31. The method of claim 15, wherein the IR-transparent elastomeric matrix comprises a material selected from the group consisting of: polyethylene, polyurethane, polypropylene, polycarbonate, any block co-polymer with polystyrene, such as styrene-isoprene-styrene or styrene-butylene-styrene, or any combination thereof.
32. The method of claim 31, wherein the IR-transparent elastomeric matrix comprises a styrene-ethylene-butylene-styrene block co-polymer.
33. A method of fabricating a composite material with adjustable spectral properties comprising:
providing a support substrate;
depositing a first sub-layer of an IR-reflecting material characterized by a planar layer thickness on top of the support substrate such that the first sub-layer of the IR-reflecting material is immediately adjacent to the support substrate and comprises the IR-reflecting material deposited into a continuous featureless layer capable of reflecting IR radiation;
depositing a layer characterized by an elastomer thickness of an IR-transparent elastomeric material characterized by an elastic modulus on top of the deposited IR-reflecting material to form a composite comprising the IR-reflecting material and an IR-transparent elastomeric matrix;

adhering the IR-reflecting material and the IR-transparent elastomeric matrix;
delaminating the composite from the support substrate with application of force, such that the first sub-layer breaks into a plurality of micro-domains comprising IR-reflecting material surrounded by a plurality of spacings comprising the uncoated IR-transparent elastomeric matrix,
to produce a free standing film of the composite material with adjustable spectral properties.

34. The method of claim 33, further comprising:
depositing a second sub-layer of the IR-reflecting material on top of and immediately adjacent to the first sub-layer and prior to depositing the layer of the IR-transparent elastomeric material, such that the second sub-layer comprises a plurality of nanostructures characterized by a nanostructure height, and such that depositing the layer of the IR-transparent elastomeric material buries the plurality of nanostructures into the IR-transparent elastomeric matrix, thus anchoring the first sub-layer into the IR-transparent elastomeric matrix to form the composite comprising the IR-reflecting material securely embedded into an IR-transparent elastomeric matrix.
35. A method for controlling IR radiation emitted by an object or body comprising:
enveloping the object or body emitting IR radiation in a composite material with adjustable spectral properties comprising:
an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus,
a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material,
a plurality of spacings separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material, and

a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix, the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness, wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix; and mechanically manipulating the elastomeric matrix in a controlled manner to adjust the plurality of spacings between the plurality of micro-domains to release or contain IR radiation emitted by the object or body.

36. The method of claim 35, wherein IR radiation is heat.
37. The method of claim 35, wherein the mechanical manipulation is achieved via a method selected from the group consisting of: application of strain, shearing, pressure, flexing, twisting, bending, or any combination thereof.

FIG. 1A

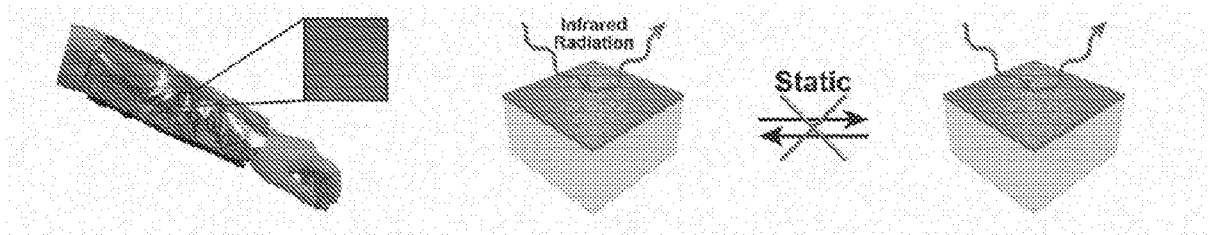


FIG. 1B

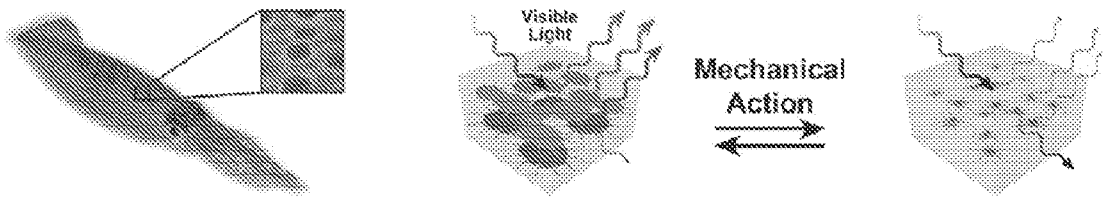


FIG. 1C

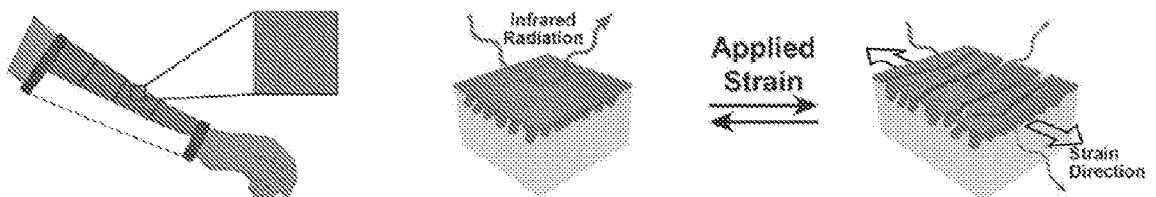


FIG. 2

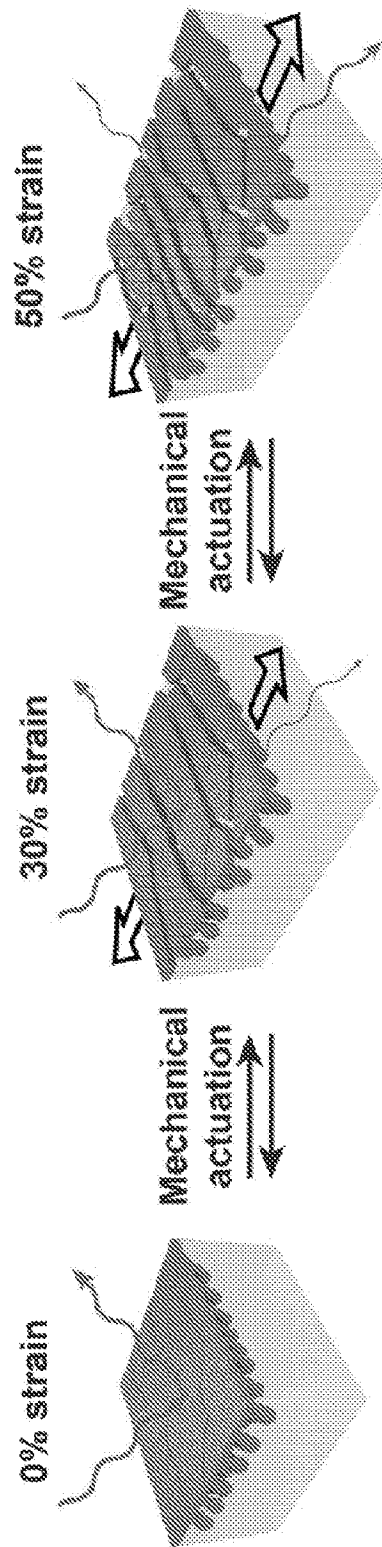


FIG. 3A

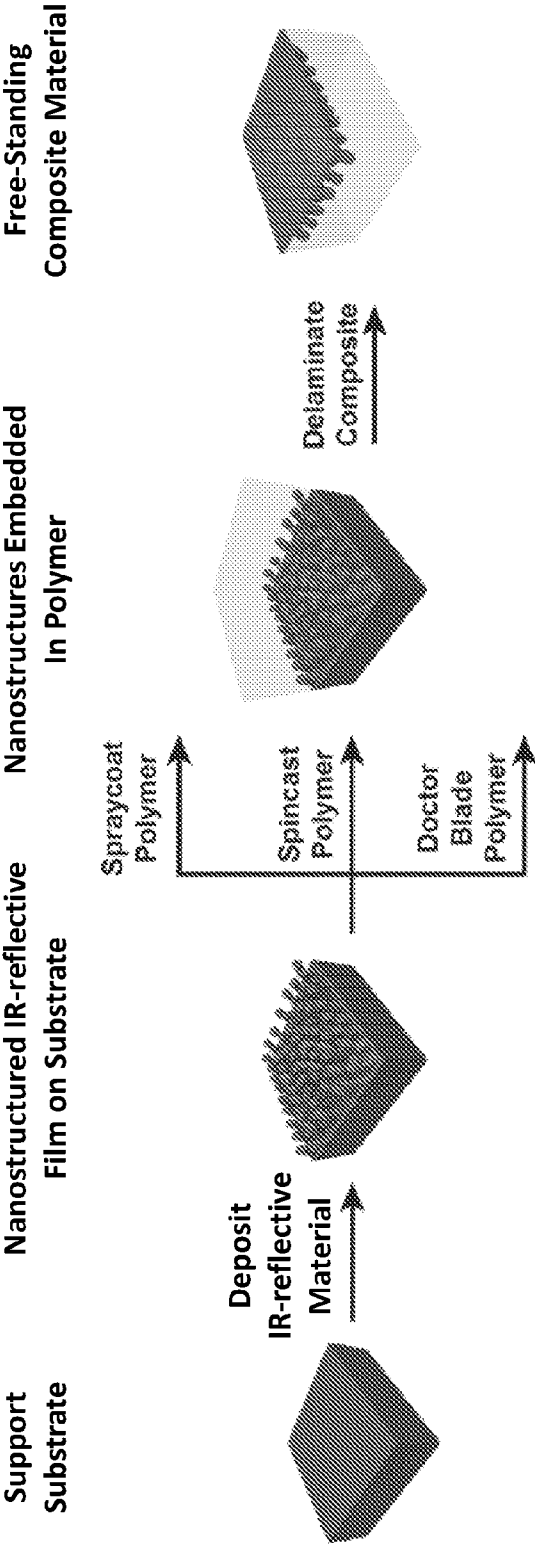


FIG. 3B

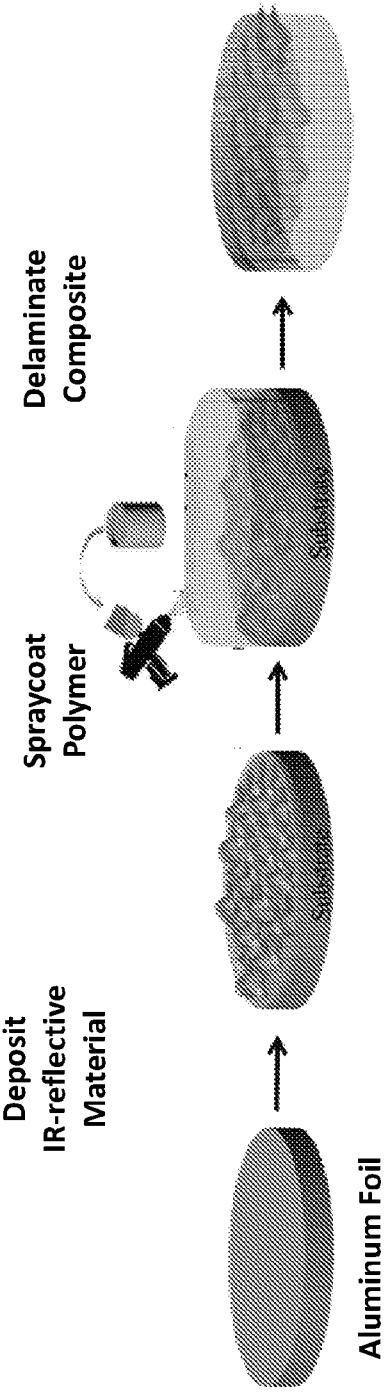
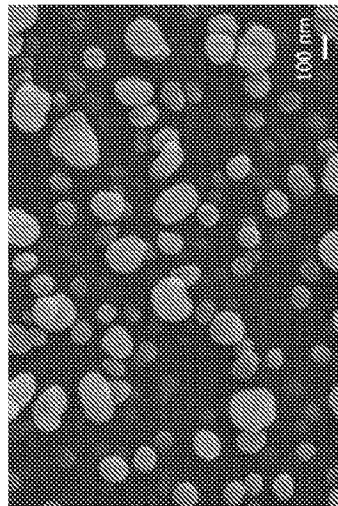
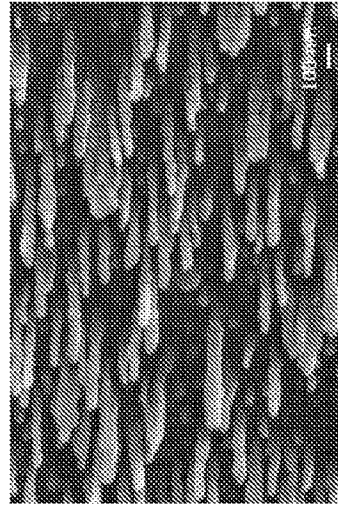


FIG. 4A**Vertical Columns****Tilted Columns**

Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm
 $\alpha = 89^\circ$

FIG. 4B

Planar Layer

Thickness: 5 nm

100 nm

50 nm

20 nm

10 nm

3

Top View
Side View
SUBSTITUTE SHEET (RULE 26)

Side View

Nanostructure Height = 90 nm
 $\alpha = 89^\circ$


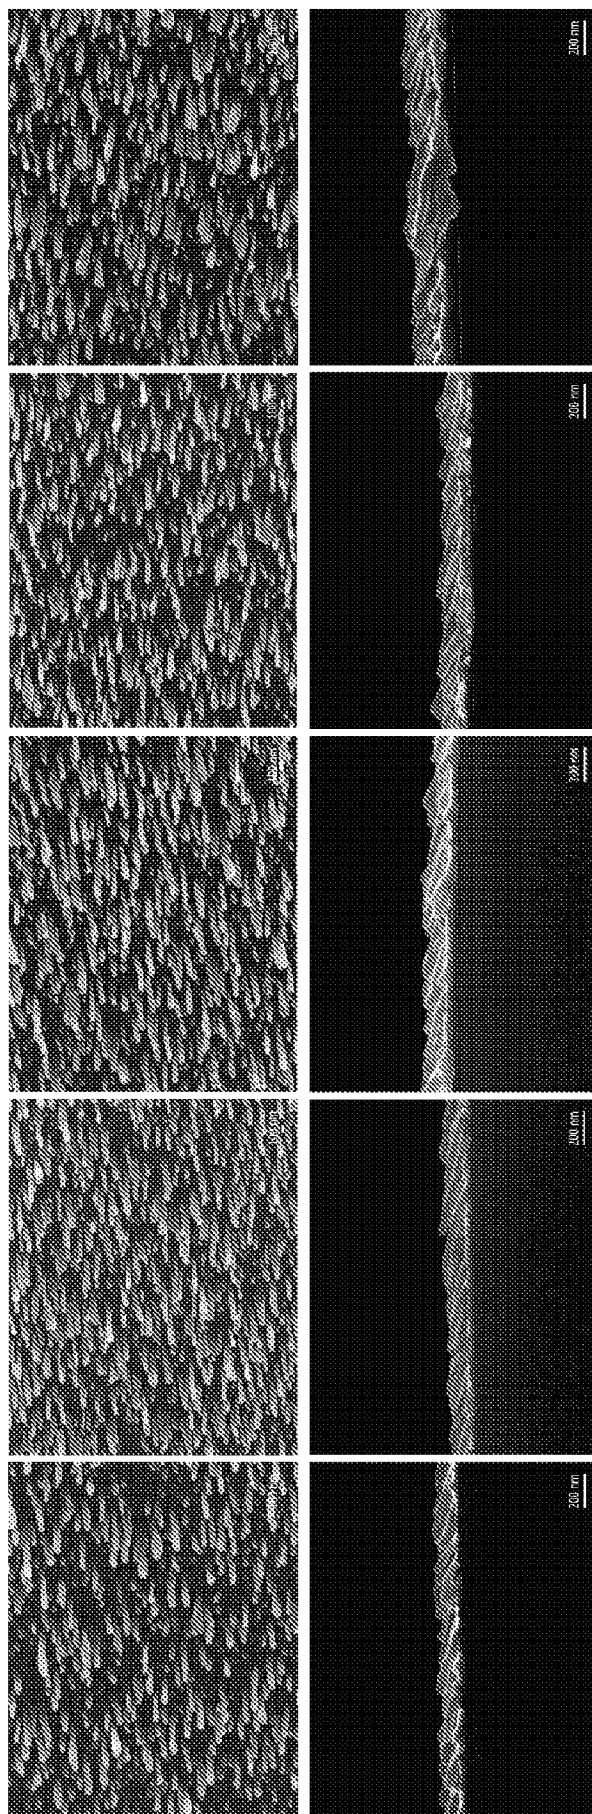
 $\alpha = 89^\circ$ 

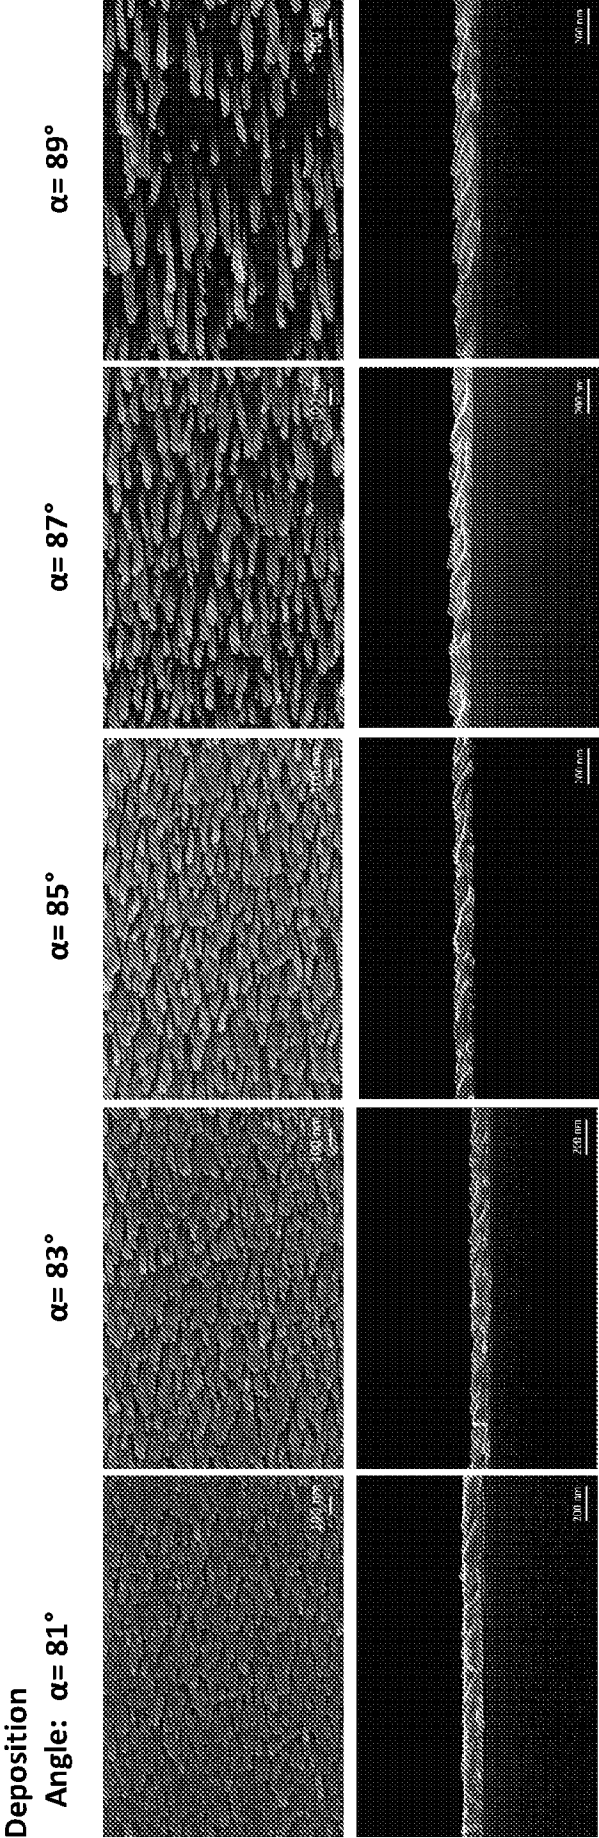FIG. 4C



Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm

FIG. 5A


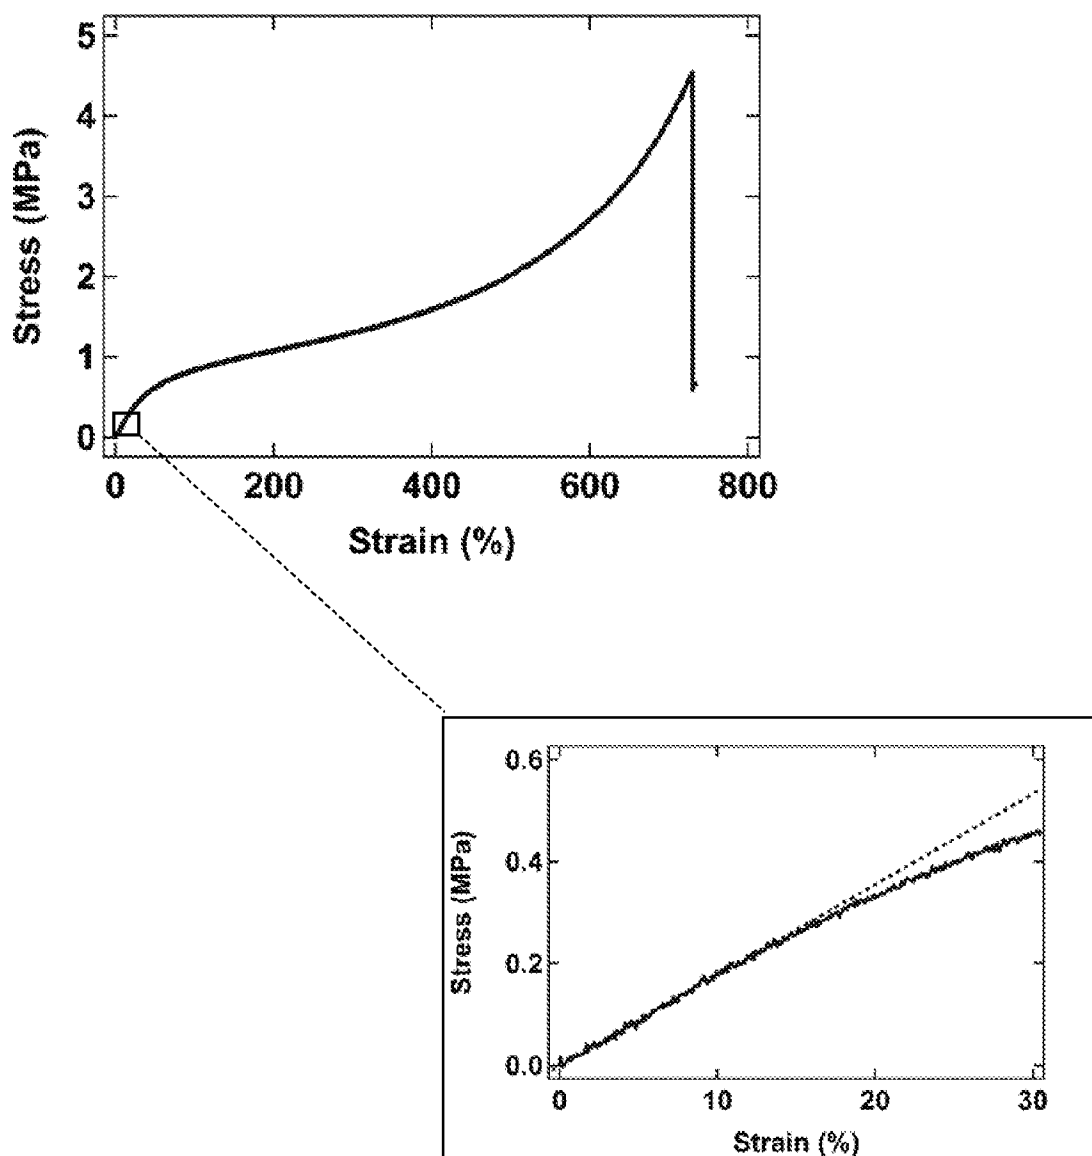


FIG. 5B1

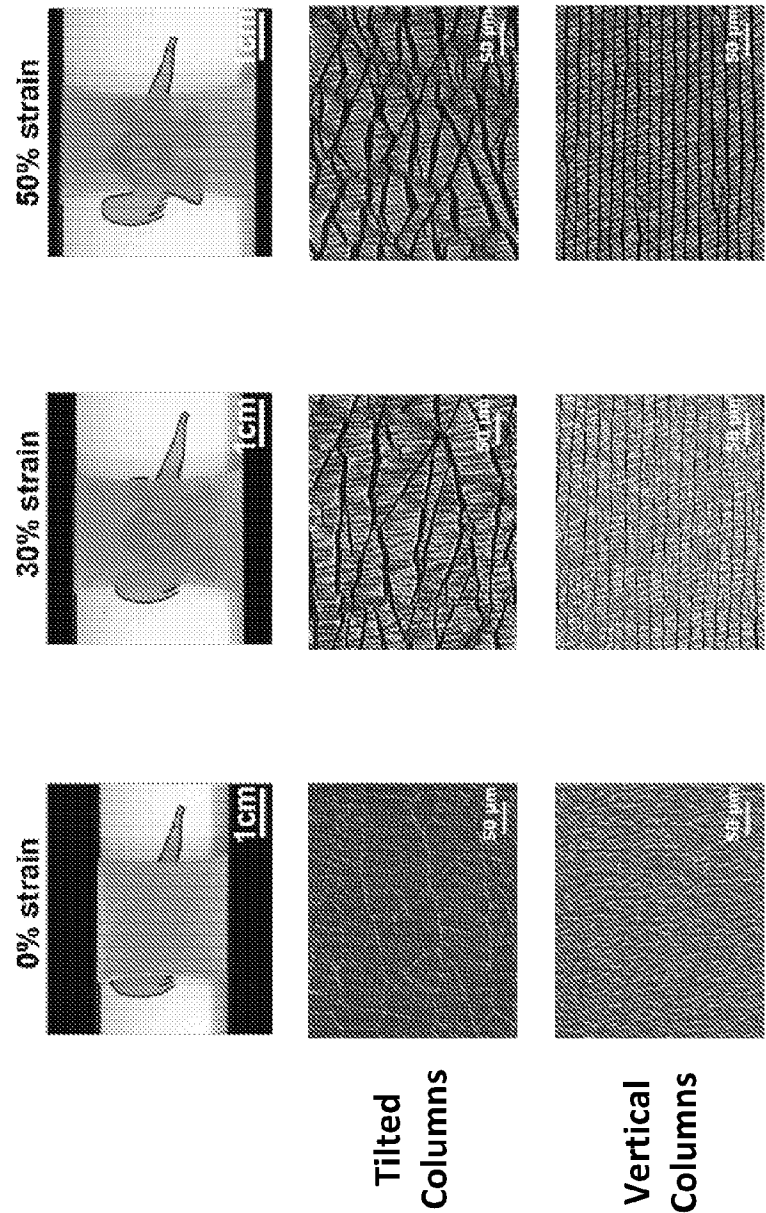

Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm
 $\alpha = 89^\circ$

FIG. 5B2



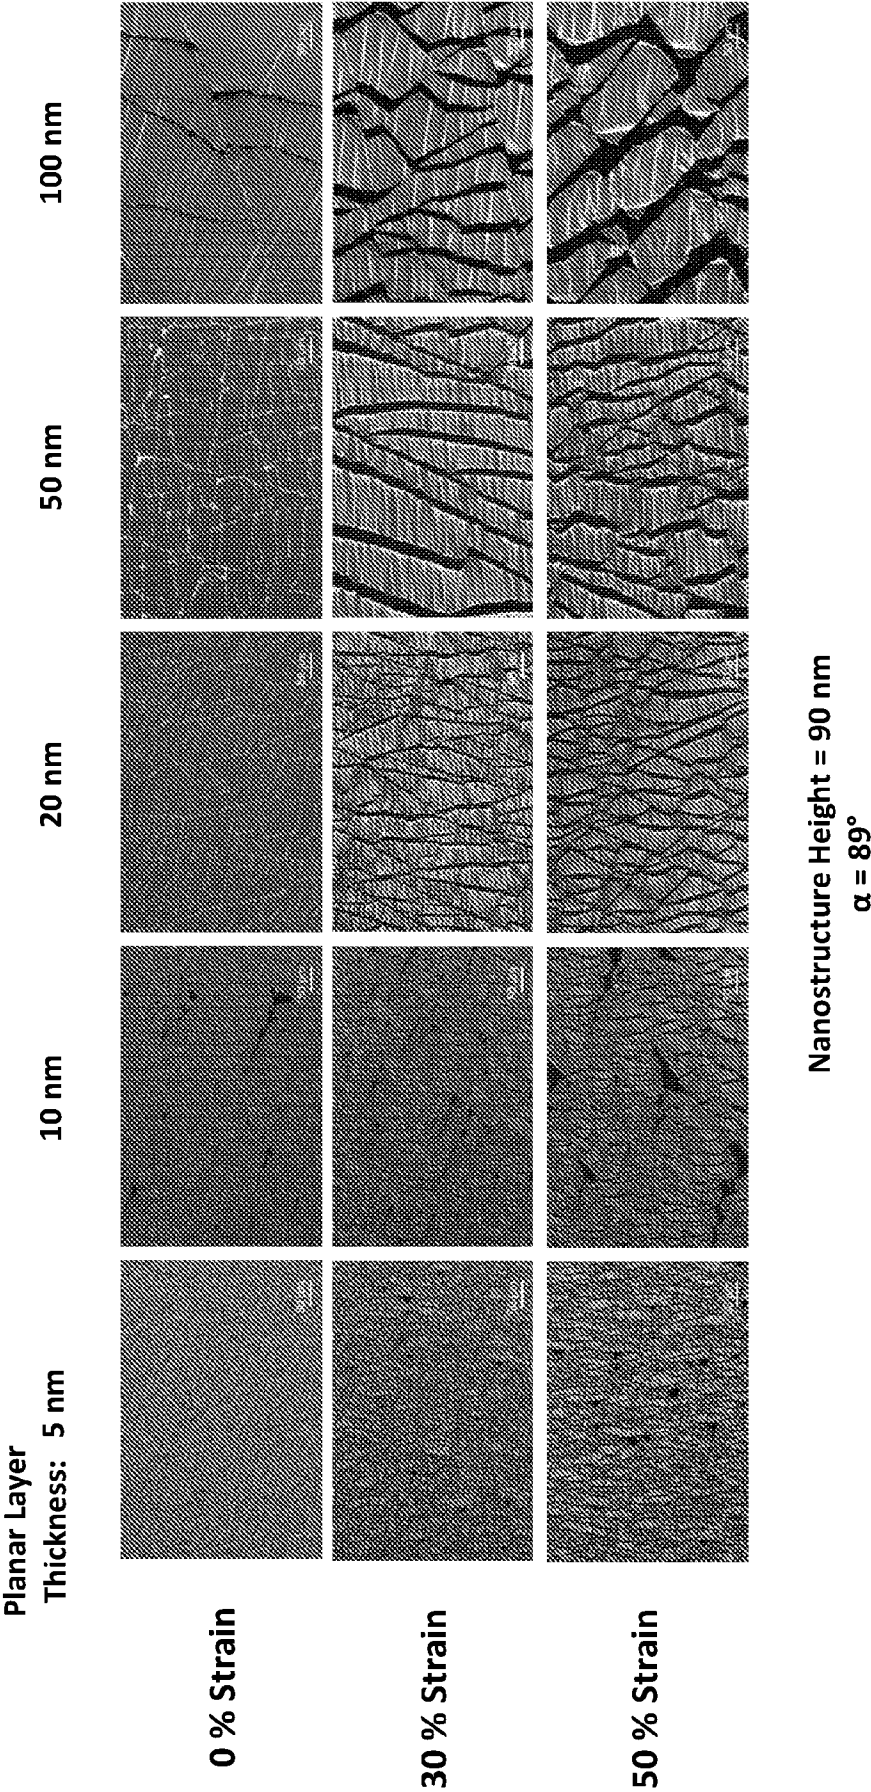


FIG. 5B3

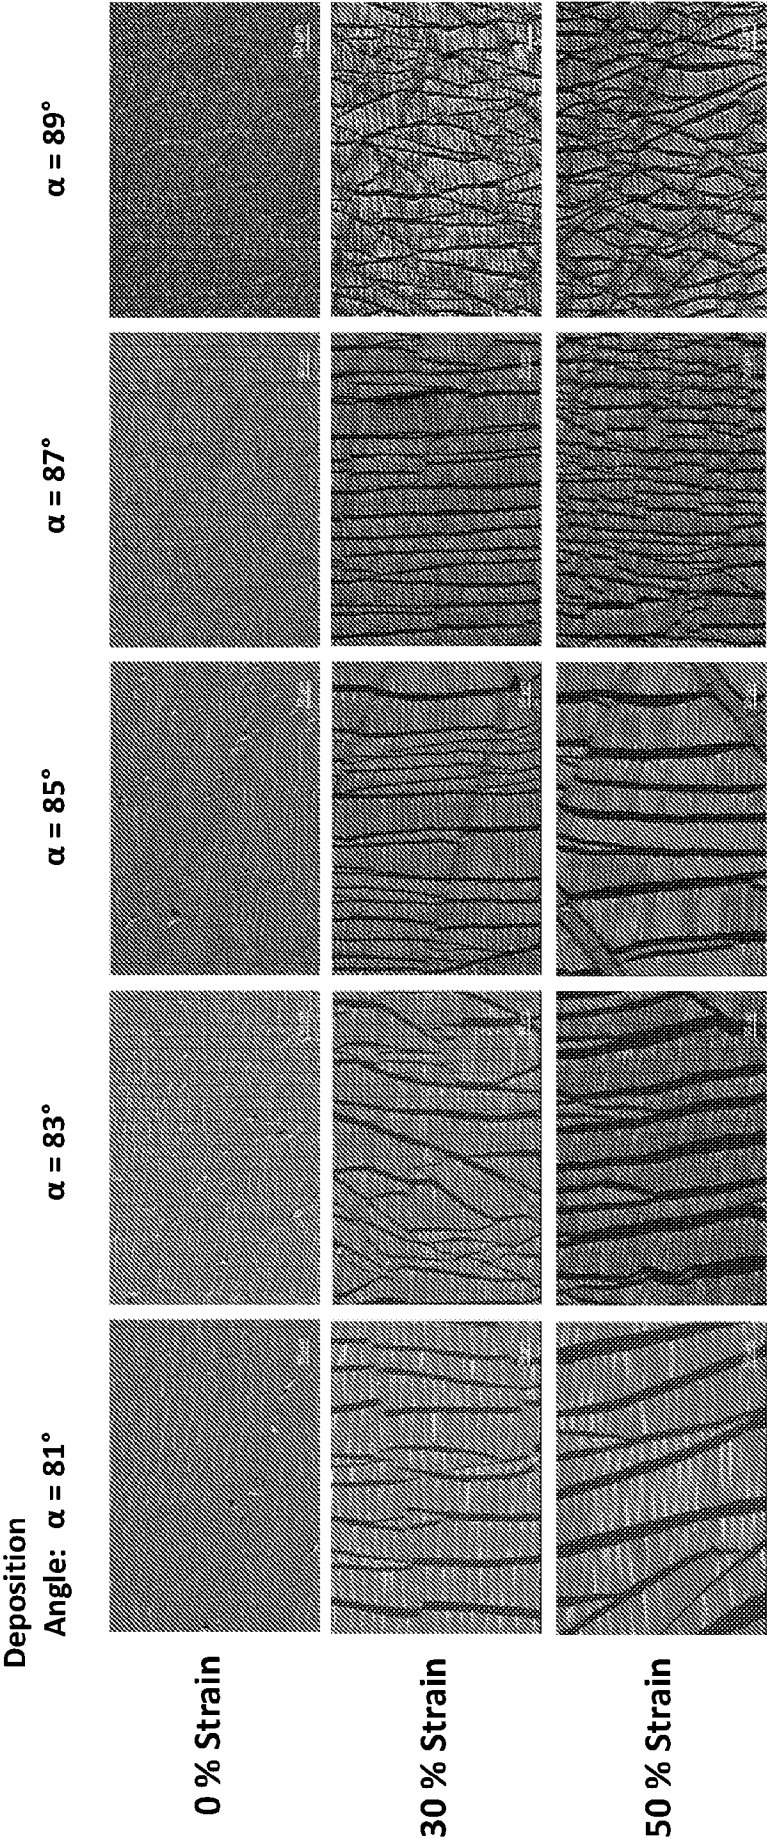


Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm

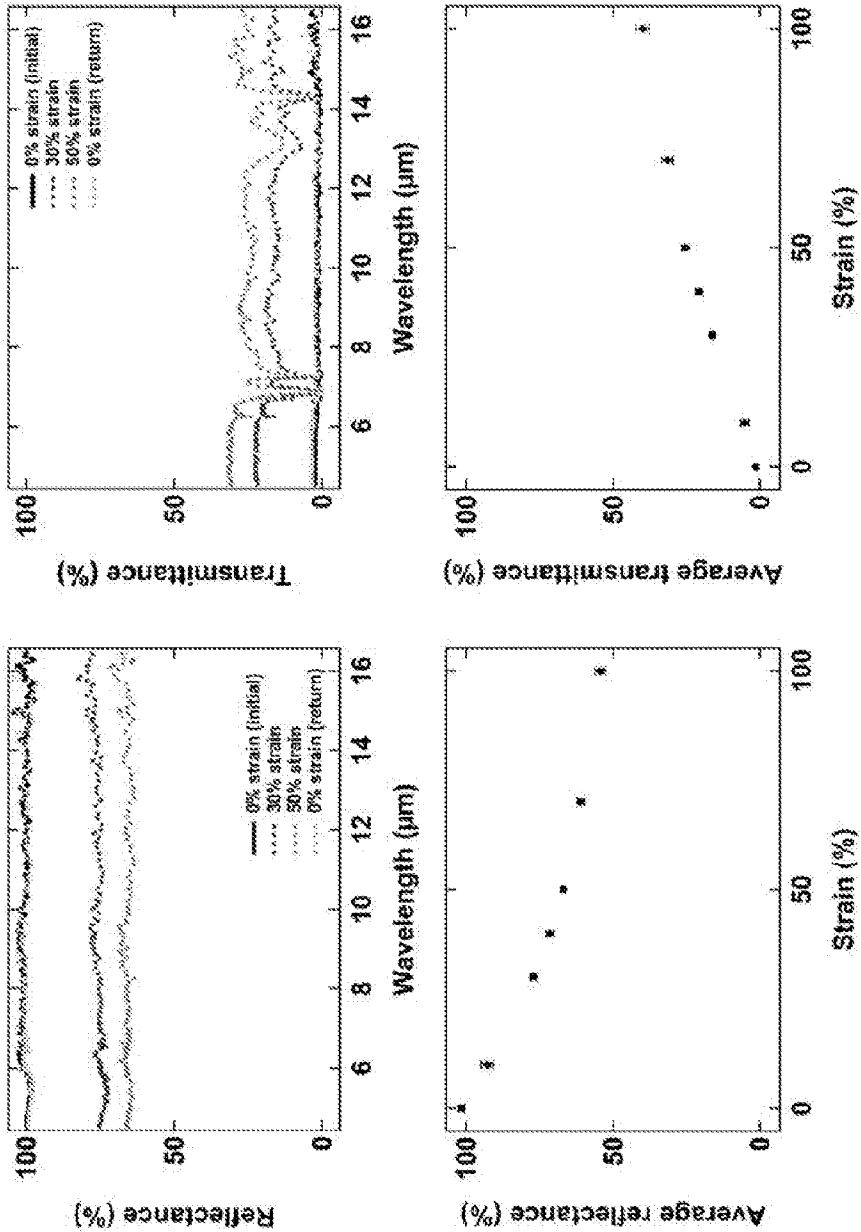FIG. 5C1




Tilted Columns
Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm
 $\alpha = 89^\circ$

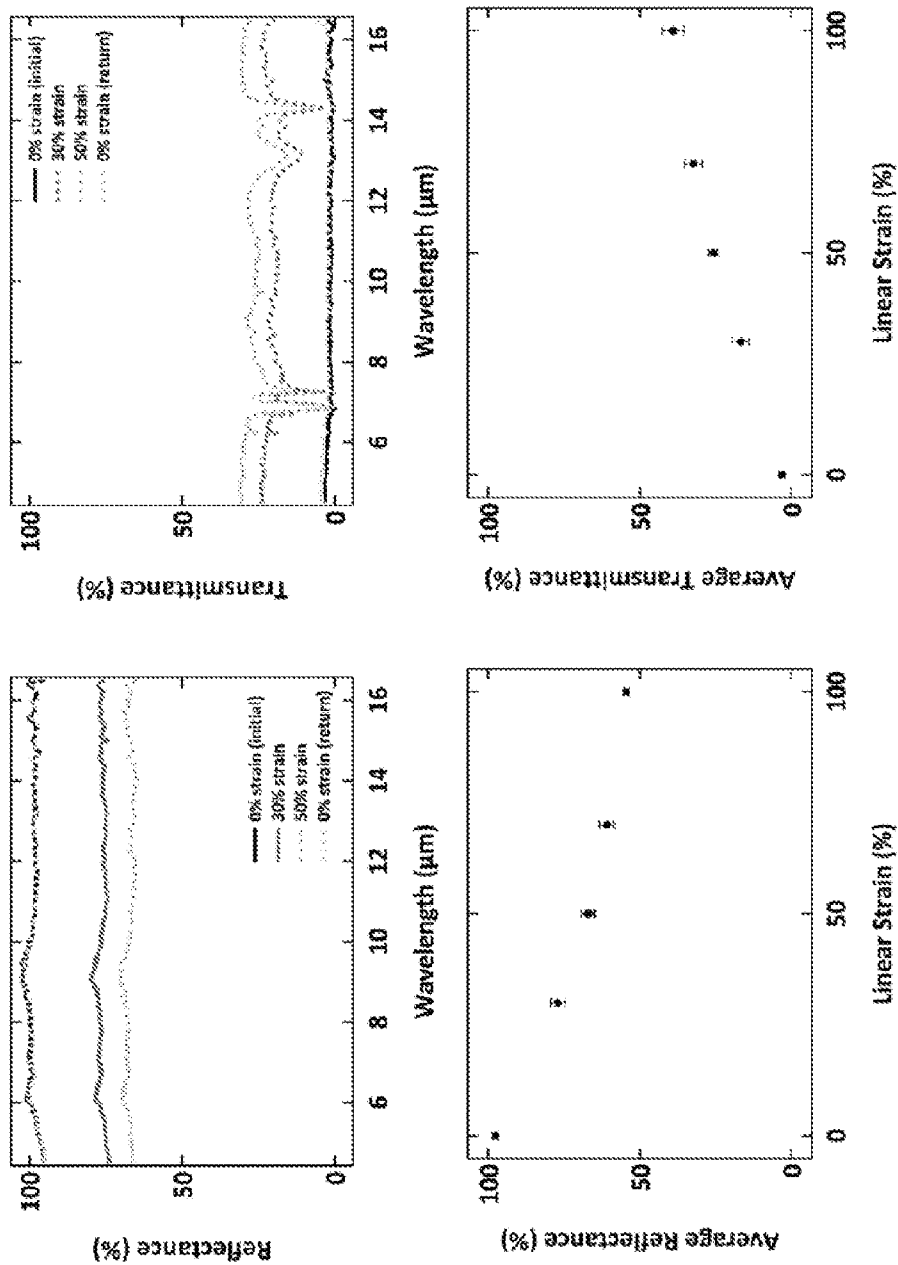FIG. 5C2




Vertical Columns
Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm
 $\alpha = 89^\circ$

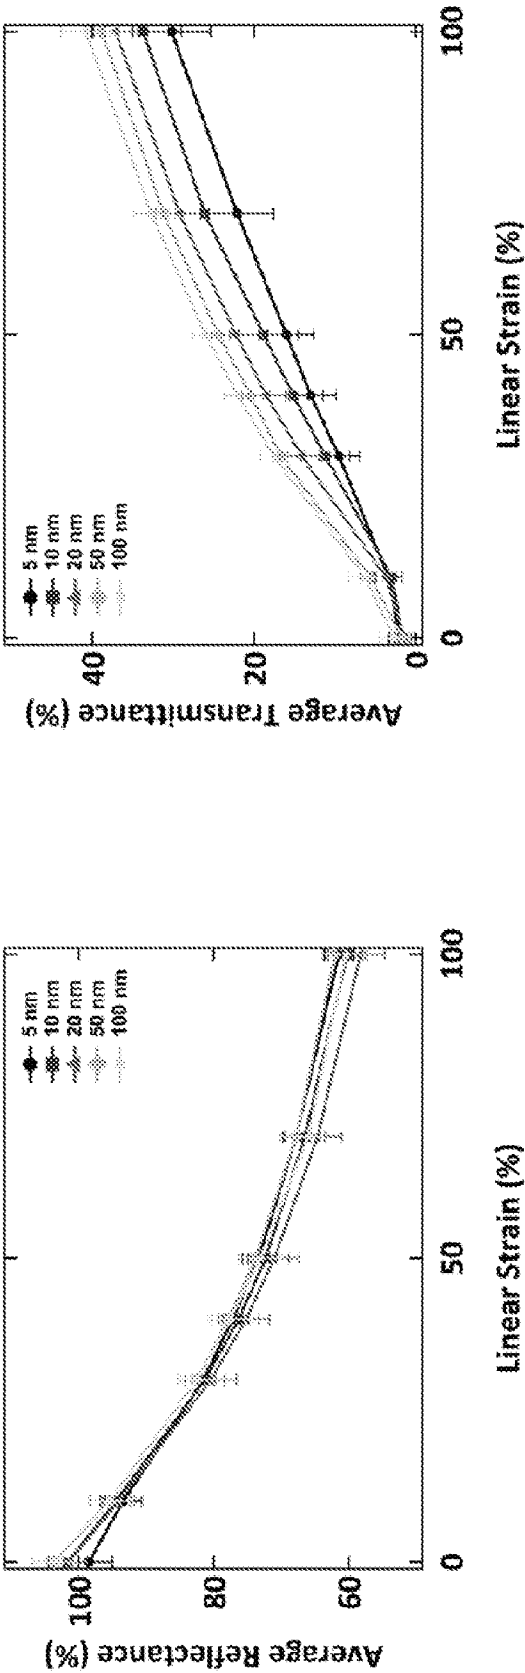FIG. 5C3



Tilted Columns
Planar Layer Thickness = 5-100 nm
Nanostructure Height = 90 nm
 $\alpha = 89^\circ$

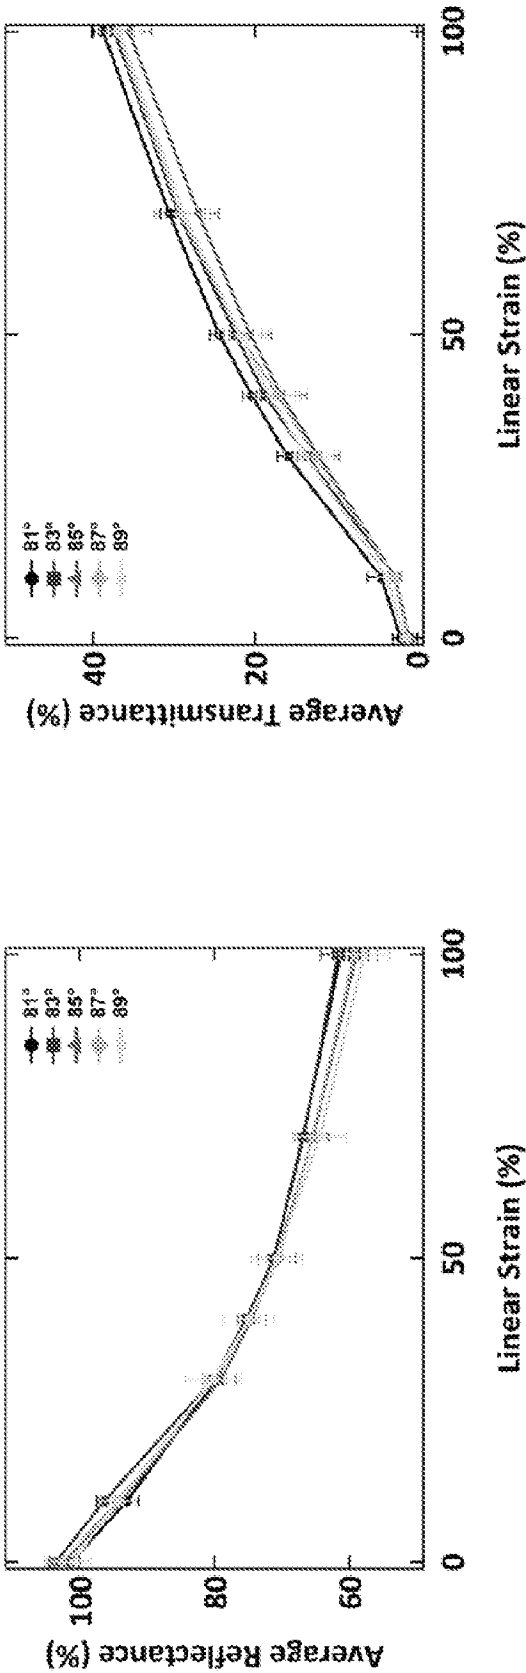FIG. 5C4



Tilted Columns
Planar Layer Thickness = 20 nm
Nanostructure Height = 90 nm
 $\alpha = 81-89^\circ$

FIG. 5D

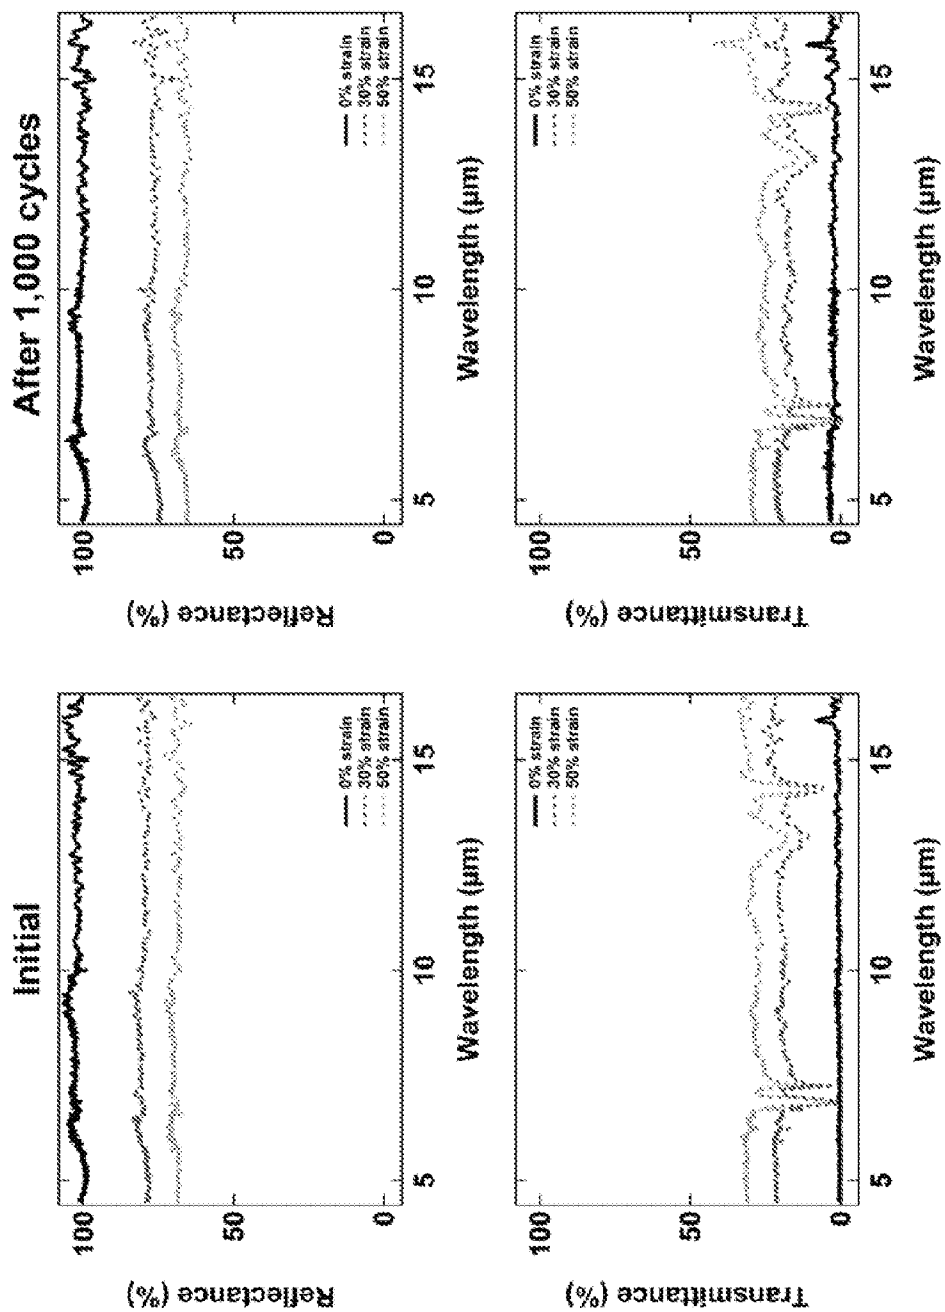


FIG. 6A

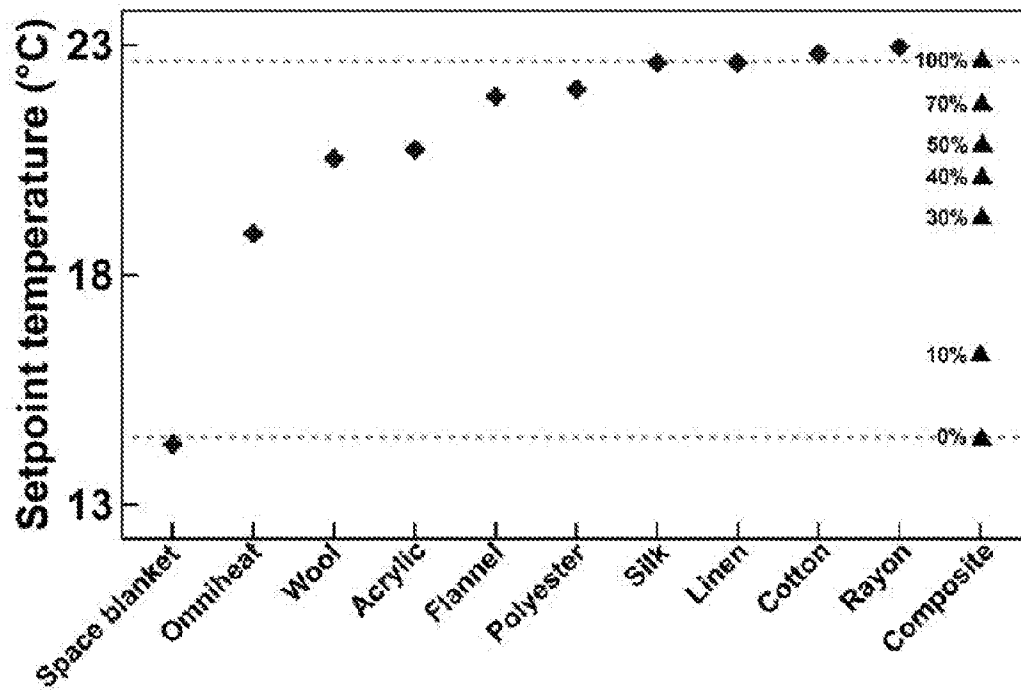


FIG. 6B

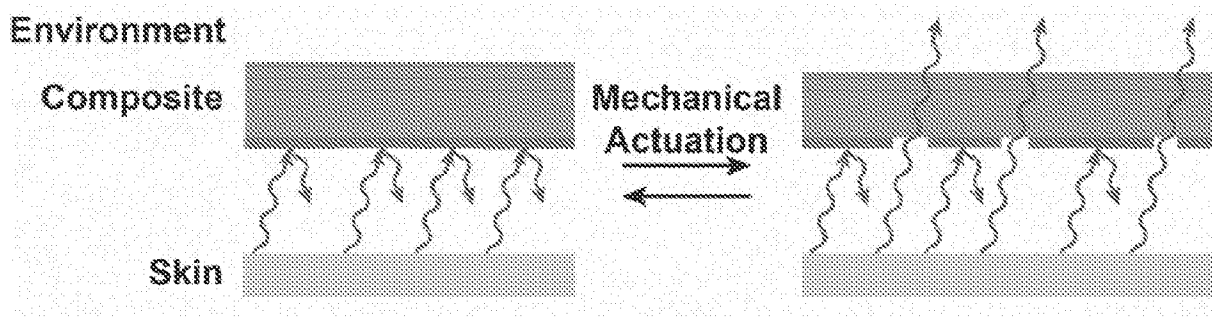


FIG. 6C


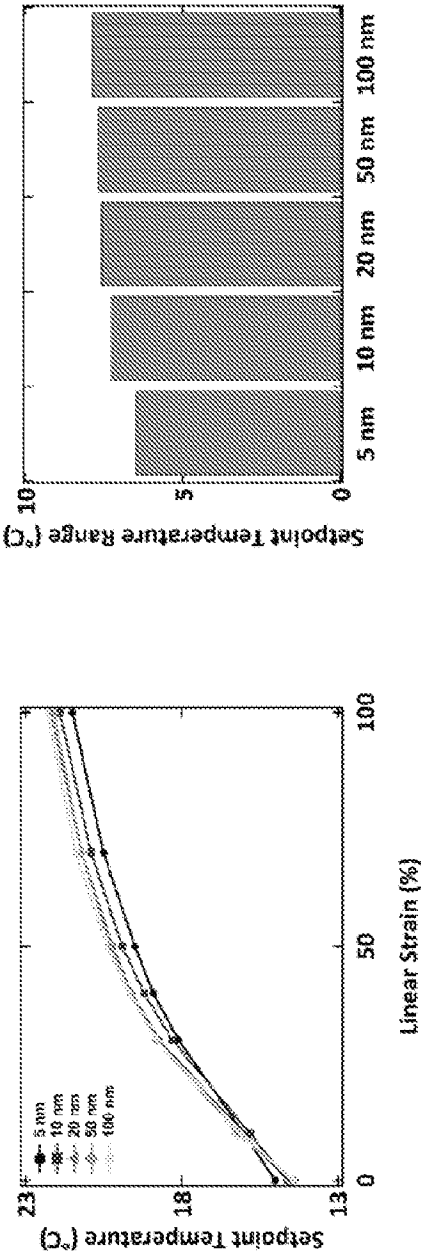


FIG. 6D

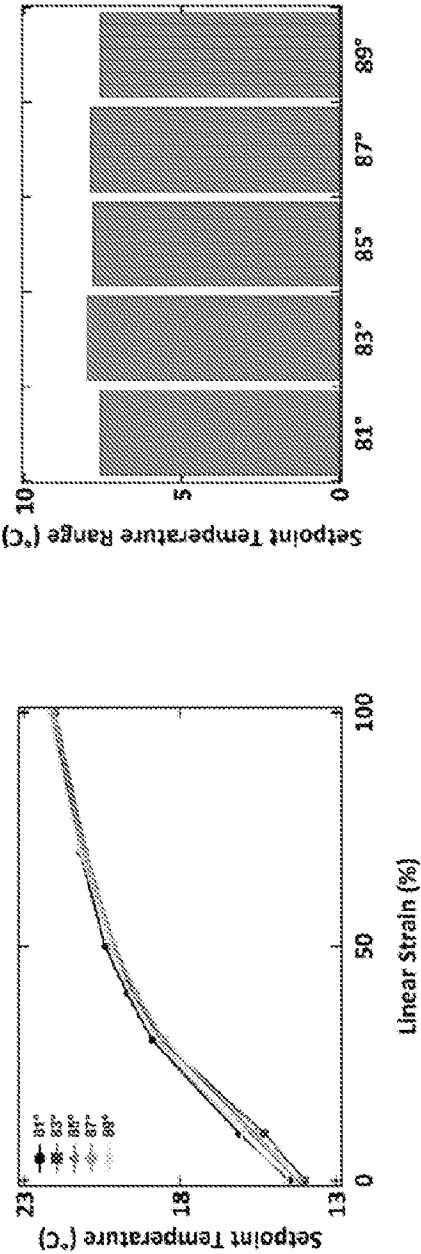

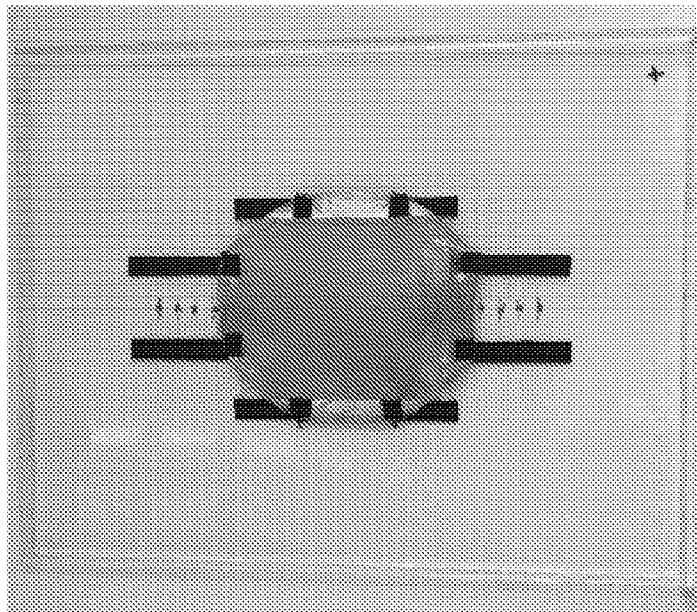
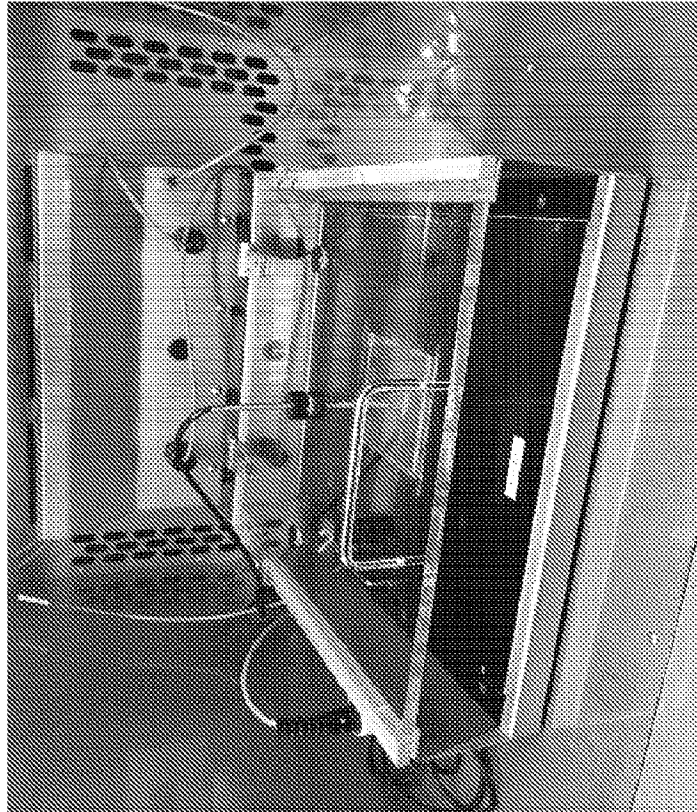


FIG. 7A

FIG. 7B

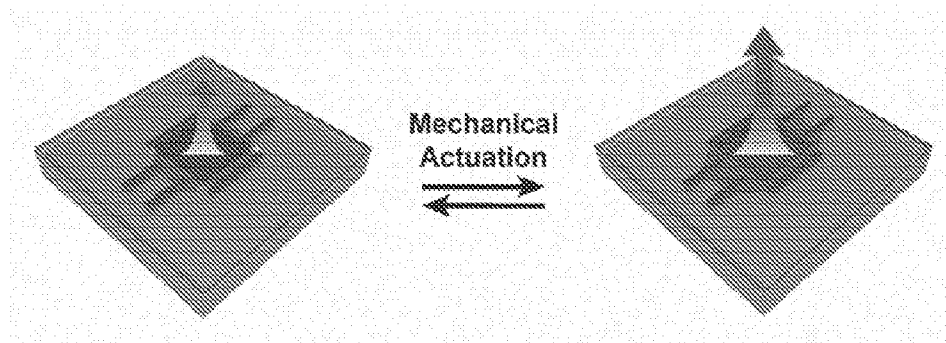


FIG. 7C

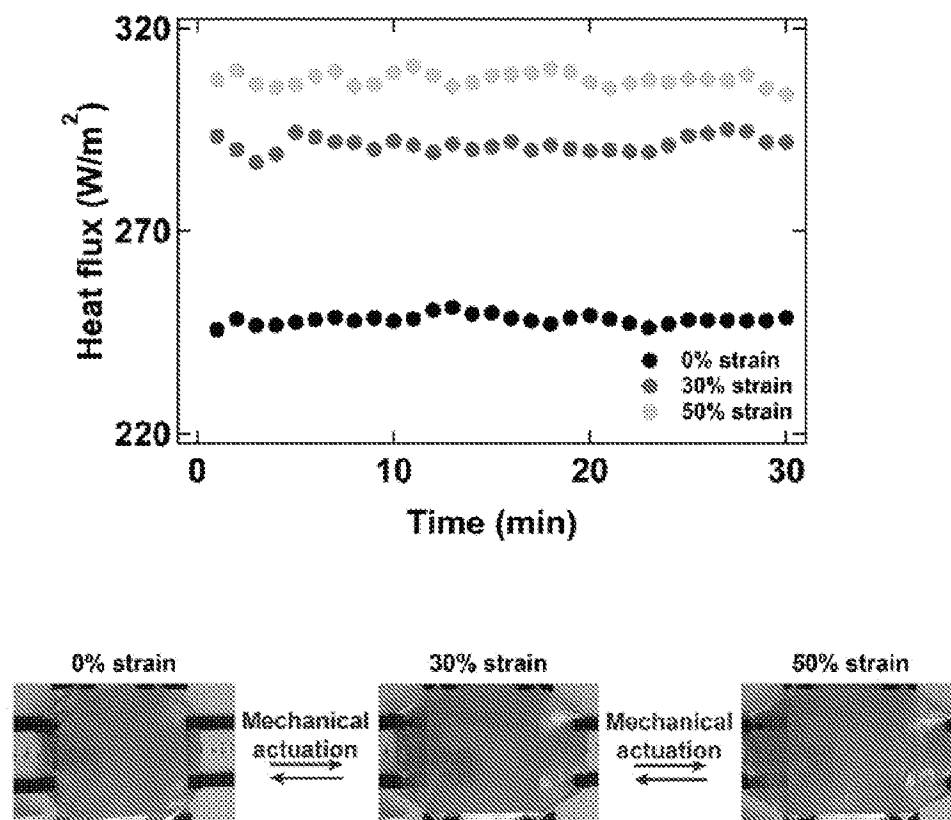


FIG. 8A

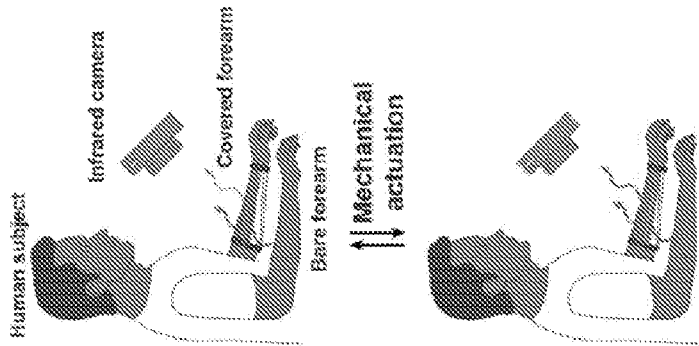


FIG. 8B

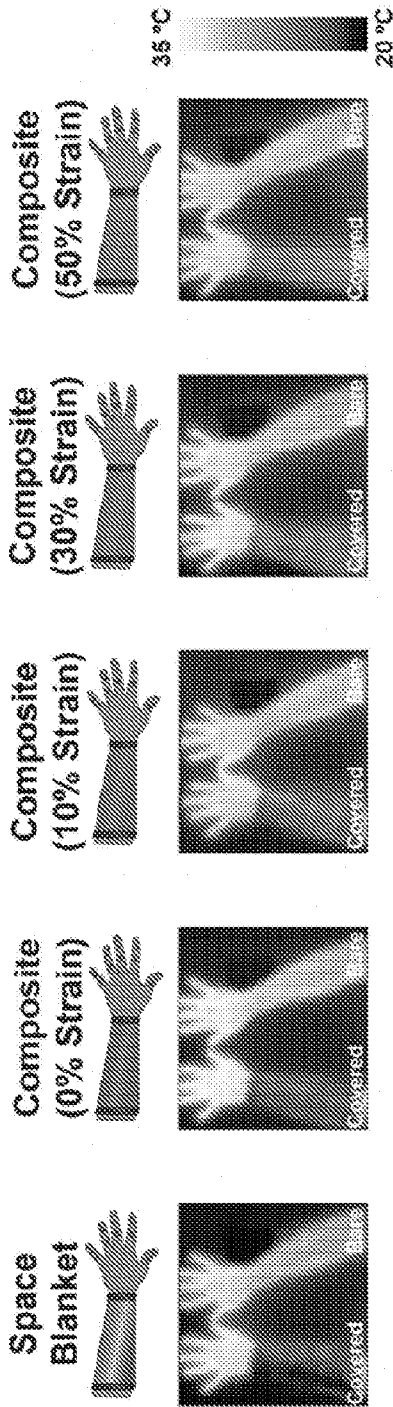


FIG. 8C


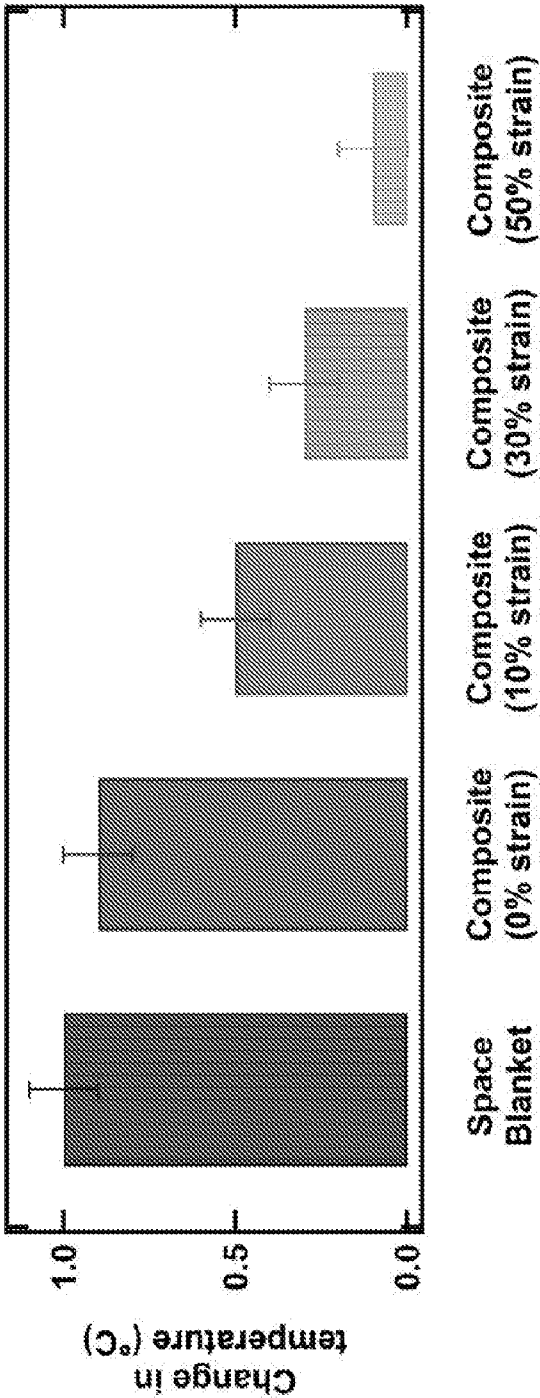


FIG. 9

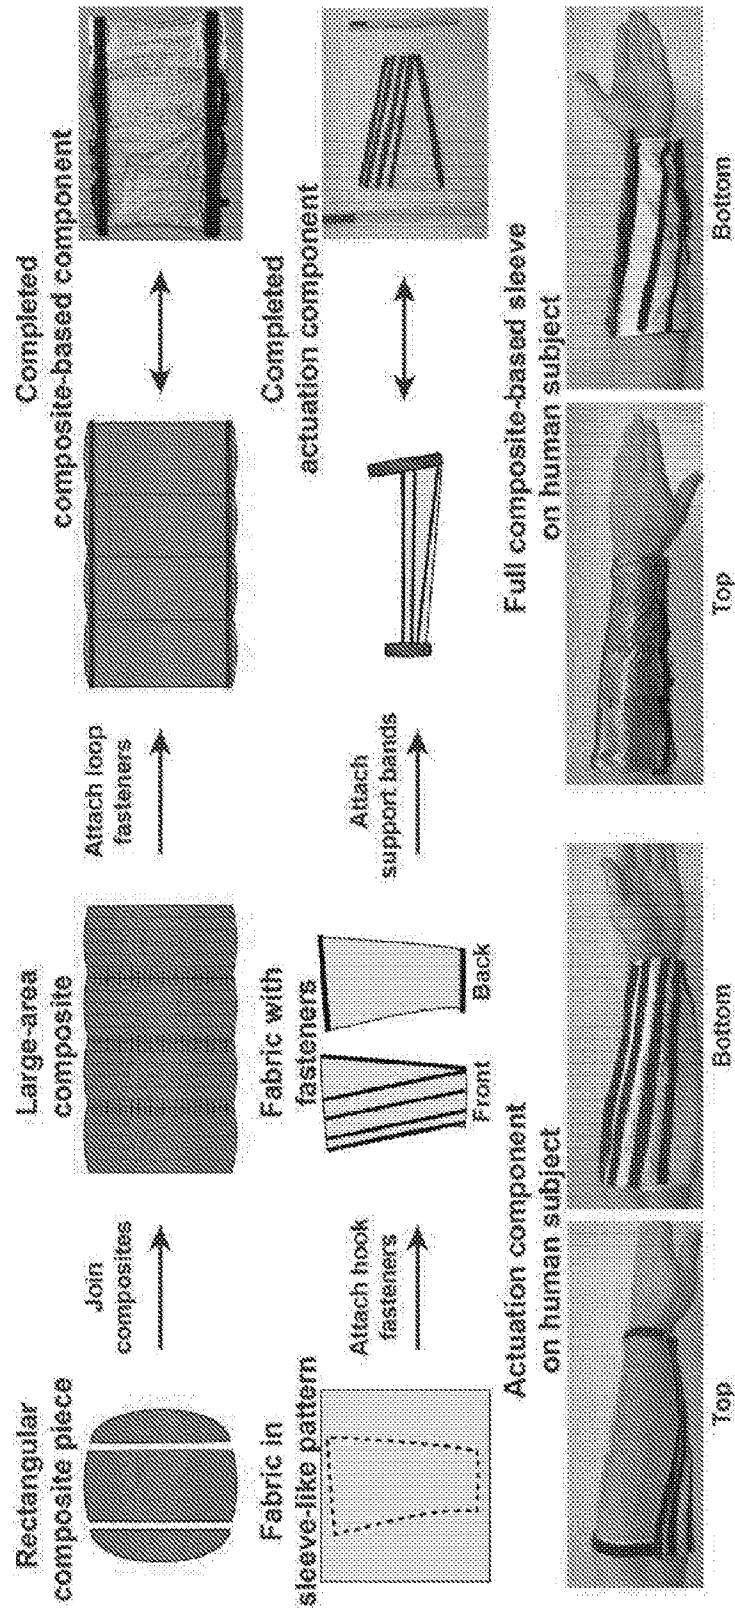

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2019/063772

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B32B 9/04; B32B 15/04; B32B 15/08; B32B 15/20 (2020.01)

CPC - B32B 9/045; B32B 15/04; B32B 15/08; B32B 15/20 (2020.02)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 428/323; 428/328; 428/337; 428/339; 428/411.1 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 10,018,831 B2 (WISE SRL et al) 10 July 2018 (10.07.2018) entire document	1-4, 6-14
---		-----
Y		5
Y	WO 2018/016524 A1 (HITACHI CHEMICAL COMPANY LTD) 25 January 2018 (25.01.2018) see machine translation	5
A	US 6,004,494 A (DEBE) 21 December 1999 (21.12.1999) entire document	1-34
A	WO 2018/031847 A1 (KIMBERLY-CLARK WORLDWIDE INC) 15 February 2018 (15.02.2018) entire document	1-34
A	US 2006/0197953 A1 (PEREZ et al) 07 September 2006 (07.09.2006) entire document	1-34



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

28 February 2020

Date of mailing of the international search report

12 MAR 2020

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2019/063772

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet(s).

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-34

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Continued from Box No. III Observations where unity of invention is lacking

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees need to be paid.

Group I: Claims 1-34 are drawn to composite materials with adjustable spectral properties and methods of manufacture.

Group II: Claims 35-37 are drawn to methods for controlling IR radiation.

The inventions listed in Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1, because under PCT Rule 13.2 they lack the same or corresponding special technical features for the following reasons:

The special technical features of Group I, composite materials with adjustable spectral properties and methods of manufacture, are not present in Group II; the special technical features of Group II, methods for controlling IR radiation, are not present in Group I.

Groups I-II share the technical features of composite material with adjustable spectral properties comprising: an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus, a plurality of micro-domains overlaying the elastomeric matrix, the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material, a plurality of spacings separating the plurality of micro-domains, the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material, and a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix, the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness, wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix. However, these features do not represent a contribution over the prior art.

Specifically, US 10,018,831 B2 to Wise S.R.L. et al. teaches a composite material (production of a fully or partially reflective stretchable and deformable optical element, comprising the implantation in at least one surface of an elastomeric support of neutral nanoclusters of a material, Abstract) with adjustable spectral properties (stretchable and deformable reflective grating that can withstand stretching up to at least 25 %, and that change consequently the pitch distance of the same amount preserving the capability of diffracting the incident light, Col. 6, Lns. 19-22) comprising: an elastomeric matrix characterized by an elastomer thickness and comprising an IR-transparent, flexible, and stretchable material characterized by an elastic modulus (elastomeric polymer support with a thickness that can range from few micrometers to some millimeters, Col. 6, Lns. 27-29; preferred elastomeric polymer is polydimethylsiloxane (PDMS), Col. 6, Lns. 36-37; transparent polymers, for instance PDMS, Col. 6, Ln. 41; the elastomeric polymer support material inherently possesses stretchable, flexible, and elastic modulus properties), a plurality of micro-domains overlaying the elastomeric matrix (grating 407 at Fig. 4, plurality of nanocluster "islands" deposited on elastomeric polymer support), the plurality of micro-domains being characterized by a micro-domain thickness and comprising an IR-reflecting material (illustrative examples of materials that can be used in the present invention for the nanoclusters of the beam include, but are not limited to: metals, Col. 9, Lns. 64-66; The preferred materials for use in the present invention are Au, Pt, Al and Ag. Au is a noble metal, has a high reflectivity and is preferred for all those application in which IR radiation is involved, Col. 10, Lns. 6-9; Example 2, Col. 16, Lns. 52-53, an equivalent thickness of 89 ± 2 nm of silver nanoclusters is measured), a plurality of spacings separating the plurality of micro-domains (see grating 407 at Fig. 4, plurality of spacings separating the plurality of nanocluster "islands" deposited on elastomeric polymer support), the plurality of spacings comprising the elastomeric matrix having no overlaid IR-reflecting material (see grating 407 at Fig. 4, exposed surfaces of the elastomeric polymer support due to the plurality of island spacings), and a plurality of nanostructures anchoring the plurality of micro-domains into the elastomeric matrix (polymeric matrix in which the nanoclusters are embedded, Col. 11, Ln. 28), the plurality of nanostructures being characterized by a nanostructure height that is not included in the micro-domain thickness (the nanoclusters of the beam have mean diameter below 50 nm and more preferably between 1 nm and 20 nm, Col. 10, Lns. 12-14), wherein the plurality of spacings is dynamically adjustable via mechanical manipulations of the elastomeric matrix (stretchable and deformable reflective grating that can withstand stretching up to at least 25 %, and that change consequently the pitch distance; pitch distance is defined as the distance between two peaks of the periodic structure that composes the grating, Col. 3, Lns. 18-20).

The inventions listed in Groups I-II therefore lack unity under Rule 13 because they do not share a same or corresponding special technical feature.