

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 March 2009 (19.03.2009)

PCT

(10) International Publication Number
WO 2009/035400 A1

- (51) **International Patent Classification:**
H04W 4/10 (2009.01) *H04W 4/06* (2009.01)
- (21) **International Application Number:**
PCT/SE2008/050930
- (22) **International Filing Date:** 19 August 2008 (19.08.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
0702026-6 10 September 2007 (10.09.2007) SE
- (71) **Applicant (for all designated States except US):** TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** HANNU, Hans [SE/SE]; Batterivagen 12, S-976 31 Lulea (SE). DE BRUIN, Peter [SE/SE]; Persvagen 14, S-954 31 Gammelstad (SE).
- (74) **Agent:** NILSSON, Charlotte; Ericsson AB, Patent Unit 3G, S-164 80 Stockholm (SE).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(U))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(Ui))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report

[Continued on next page]

(54) **Title:** SIMPLIFIED RADIO MULTICAST FOR GROUP COMMUNICATION

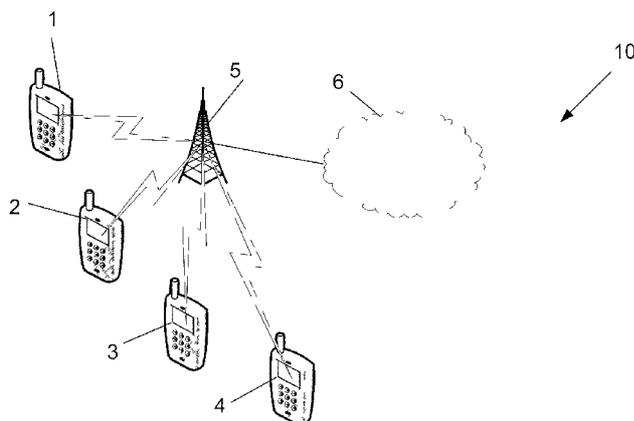


Fig. 1

(57) **Abstract:** The present invention relates to a group communication solution in a wireless communication network comprising at least one base station (5) and a plurality of terminals (1, 2, 3, 4) communicating wirelessly with the base station and where the terminals has at least partly identical identity references in order to be part of a multicast protocol push to talk group.

WO 2009/035400 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

SIMPLIFIED RADIO MULTICAST FOR GROUP COMMUNICATION

TECHNICAL FIELD

The present invention relates to group communication in a wireless communication
5 network and in particular to group communication in a push to talk configuration.

BACKGROUND OF THE INVENTION

The ability to communicate with each other is a fundamental part of our lives and work
environment. Since the advent of wireless communication devices we have grown
10 accustomed to being able to communicate whenever and wherever we are. This of course
has huge benefits but as the number of people communicating in this manner grows
quickly this sets a tough demand on the communication infrastructure to follow suite.
People using these wireless communication possibilities require a certain degree of
quality and safety with their communication sessions.

15

Public safety groups, such as police, rescue personnel, and similar task forces also have
a desire to communicate with each other with good quality and preferably on secure links
on wireless communication channels, for instance at a location where a situation is under
way where the task forces are operating.

20

So called Push-to-talk services over cellular access is seen as a solution to Public Safety
group communication. There are a number of issues to overcome, which of one is the
very high requirements on capacity, in particular the requirement on a very large number
of users in one single cell.

25

A solution may be to transmit the voice information via radio multicast, similar to existing
solutions for legacy Public Safety systems. Multimedia Broadcast Multicast Service
(MBMS) is a solution, standardized in 3GPP for cellular systems.

30 This is a short summary of basic MBMS GERAN (GSM EDGE Radio Access Network)
functionality.

- The downlink common data stream of an MBMS session originates from a server
called BM-SC (Broadcast Multicast Service Center).

- One data stream per involved GGSN, SGSN and BSC (Base Station Controller).
- An MBMS service context is set up per BSC initiated by the message MBMS SESSION START REQUEST received from SGSN. The BSC shall extract the following information contained in the message: Temporary Mobile Group Identity (TMGI), MBMS Session Identity (optional), MBMS service Area Identity List, Estimated Session Duration and Guaranteed Bit Rate.
- MBMS sessions are notified to capable mobiles by a special PAGING REQUEST message containing among others TMGI and MBMS Session ID (Identity).
- MBMS bearers (Packet Data Channels) are uniquely established per session and cell by a BSS MBMS assignment procedure invoked by MBMS service requests from mobiles belonging to the right TMGI.

There are some problems with the current standardized solution of MBMS.

- Uplink Packed Data Channels reserved for an MBMS session can only be used for the signaling needed to maintain the downlink data stream, e.g. ACK/NACK messages etc.
- A mobile may not be in packet transfer mode when receiving an MBMS session according to the 3GPP standard of today.
- The new standard for PS (packet Switched) handover (3GPP Rel 7) is not planned to be used for MBMS.

SUMMARY OF THE INVENTION

The object of the present invention is to remedy at least some of these problems and provide a solution for push to talk applications which may handle large numbers of users in each cell.

This is provided in a number of aspects of the present invention in which a first is a method for enabling efficient utilization of radio access network resources for a plurality of terminals participating in a group communication in a communication system comprising at least one radio coverage cell and at least one base station system, comprising the steps of:

- providing each terminal within the group communication with an at least partly identical identification reference;
- identifying the participating terminals towards the infrastructure network at least partly as one and the same identity; and

- sending from the infrastructure device communication data using a multicast protocol for transport of communication data to each terminal part of the group communication using the at least partly identical identification reference.
- 5 The identity may be at least one an International Mobile Subscriber Identity, i.e. IMSI, of the terminal's Subscriber Identity Module, i.e. SIM, card or a stored IMSI in a memory of the terminal. The terminals may have identical International Mobile Equipment Identities, i.e. IMEI.
- 10 The terminals may further have identifiable International Mobile Subscriber Identity, i.e. IMSI, or International Mobile Equipment Identity, i.e. IMEI, to be able to access the network so as to be provided with normal functions provided to terminals with unique IMSI or IMEI.
- 15 The method may further comprise a step of encrypting communication data between terminals part of the group communication.

The communication may be a push to talk session.

- 20 Another aspect of the present invention is provided, a terminal for wireless communication in a communication network, comprising:
- a processing unit;
 - a memory unit;
 - a communication interface;
- 25 wherein the processing unit is arranged to run software stored in the memory for participating in group communication using an identification reference used by a plurality of terminals within the same group communication.

An infrastructure device (5) in a wireless communication network, comprising:

- 30 a processing unit (401);
a memory unit (402);
an access communication interface (404) for communicating with terminals (1, 2, 3, 4);
a network communication interface (405) for communicating with an infrastructure network (6);

wherein the processing unit is arranged to send communication data to a plurality of terminals using a multicast protocol and arranged to handle other functions suitable for group communication where terminals communicating with the infrastructure device have at least partly identical identification references.

5 The infrastructure device according to claim 12, wherein said functions being a paging function/method, location, and routing area updating function.

10 Yet another aspect of the present invention is provided, a communication network for wireless group communication, comprising:

- at least one infrastructure device;
 - at least one radio coverage cell;
 - at least two terminals arranged to communicate wirelessly with the infrastructure device in the radio coverage cell, each terminal has an identification reference;
- 15 wherein the terminals use at least partly identical identification references and the infrastructure device send communication data using a multicast protocol with the at least partly identical identification reference.

20 The basic concept of this solution is to make several terminals (e.g. mobile phones or other mobile equipment with communication interface), User Equipments (UE), to be seen as one entity towards the network, or i.e. several UEs are identified as only one and the same UE by the network, but at possible different geographical locations.

25 The simplified RAN multicast is achieved by; all UEs participating in a group communication session having the same IMSI and possible also the same IMEI; and functions and methods in the network which are normally only valid for one UE with one IMSI are altered to be valid for several UEs having the same IMSI.

30 This has the advantage of providing a solution capable of handling a large plurality of UEs in communication using an MBMS solution efficiently handling radio access network resources while at the same time being implemented at low cost and complexity.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following the invention will be described in a non-limiting way and in more detail with reference to exemplary embodiments illustrated in the enclosed drawings, in which:

5 Fig. 1 illustrates schematically a network according to the present invention;

Fig. 2 illustrates schematically in a block diagram a device according to the present invention;

10 Fig. 3 illustrates schematically in a block diagram a method according to the present invention; and

Fig. 4 illustrates schematically in a block diagram an infrastructure device according to the present invention.

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In Fig. 1 reference numeral 10 generally indicate a network according to the present invention with a central communication station 5, e.g. a base station optionally connected to a communication network 6. The base station has at least one radio transmitter
20 covering a radio coverage cell (not shown). One or several user terminals 1, 2, 3, 4 (UE, User Equipment) within radio coverage of the base station may connect to the base station 5 using a wireless communication protocol. The UEs may communicate with each other using a push to talk protocol and optionally may be arranged to use other communication protocols as well, for instance but not limited to GPRS or UMTS, e.g. 2G
25 (e.g. GSM), 2.5G, and 3G (e.g. WCDMA or LTE). The UEs are arranged with an identification reference (such as an IMSI, International Mobile Subscriber Identity) which may be connected to a physical media (such as a SIM card, Subscriber Identity Module) or to a virtual entity (such as a virtual SIM).

30

The present invention is not limited to a single radio coverage cell but may extend to several cells in communication with each other via an infrastructure network 6.

A UE (or user) is identified by the IMSI within the SIM card. By having multiple duplicated SIM cards or multiple SIM cards with the same IMSI in several different UEs, these UEs would be seen as one and the same UE (or user). The IMSI is used at the LLC (Link Layer Control) layer to assign a TLLI, which is further used to route data between the
5 SGSN and UE. Hence, several UEs possibly at different geographical locations may be identified as one UE, and thus when data is to be sent to this "multi-location UE" using a multicast protocol, e.g. MBMS, several users at different locations but in the same cell would listen to the same communication channel, such as the TBF and time slots in GSM/(E)GPRS. If there are several groups of users (or individual users) in different cells,
10 they would still be listening to the same information, i.e. the network would see all UEs as one UE, and RAN multicast is achieved.

One user could have several IMSIs in one UE/SIM. One could be a private IMSI and other IMSIs for each large group that would require multicast. Hence, larger groups, e.g. with
15 two or more users, may be pre-configured and assigned an IMSI to use in a multicast session solution.

The present invention may be realized in the UE which is then arranged to handle this type of solution. Fig. 2 illustrates a UE 200 with a processing unit 201, at least one
20 memory unit 202, and a user interface 203. Furthermore, the UE 200 has a communication interface 204 for wireless communication with a network and optionally an interface 205 to identification reference hardware, e.g. a card, such as a SIM card slot.

The processing unit is arranged to run program code for receiving the identification
25 reference that is common for the group within the push to talk group. The memory unit may comprise any suitable type of memory: volatile or non-volatile such as but not limited to RAM, ROM, EEPROM, Flash, hard disk, and so on as understood by the skilled person. The UE may for instance be a mobile phone, PDA, laptop, PC, smart phone, or some other hardware unit arranged with a communication interface for communicating
30 wirelessly with an infrastructure device (e.g. base station). The communication interface may for example be at least one of GSM, GPRS, UMTS, CDMA, WCDMA, LTE, and so on; however, the infrastructure need to be able to handle Push to talk functionality and preferably the communication uses a packet based communication protocol. The program code may be provided at production of the UE or downloaded using the wireless

communication network or downloaded using a PC or similar connectivity device in connection with a network.

The identification reference may be received using the SIM card interface or a virtual
5 solution where the reference may be downloaded into the UE using the wireless communication interface or a communication interface to a computer or similar product dispatching identification references to members of the group communication.

Depending on communication functionality, the infrastructure may have different types of
10 functionality implemented, e.g. in the base station or in devices further up in the infrastructure network (e.g. GGSN or SGSN for a 3GPP network). An infrastructure device may have a processing unit and memory and at least two communication interfaces (one downlink and one uplink); however, it should be understood that these communication interfaces may be the same physical interface but separated logically. Further parts of the
15 infrastructure devices for maintaining communication channels and operating sessions may differ depending on exact type and setup of communication solution but this is not within the scope of the present invention and should be understood by the skilled person.

The infrastructure side of the communication network may be arranged to handle
20 functions and methods, normally valid for only one specific identity, in a similar manner for a plurality of UEs with the same identity, for instance paging, positioning, location, and routing functionality.

In order to handle legal issues there may be functionality built into the infrastructure for
25 handling billing, security, and other normal operational matters. Identification of each user in the group may be done in the application layer, e.g. as of today's PoC, as the users in these groups would be at the Radio Access Network (RAN) seen as the same user/UE.

The network and user application may also potentially utilize P-Headers in SIP/IMS to
30 keep track of where their parties are within the network. This may then further be used for avoiding several paging responses, RA, and cell updates. Hence, one UE assigned by e.g. priority out of several UEs would respond.

The IMSI and/or IMEI or other corresponding identifier such as the TLLI may also be used by the network in order to decide whether this UE shall be treated in a different way compared to what is normally done.

5 Fig. 3 illustrates a method for setting up and maintaining a group session according to the present invention:

301 . Receiving an identical identification reference in a plurality of UEs; The UEs may receive this from the identification hardware, it may be stored in the UE, or it may be
10 transmitted using a suitable communication channel from an infrastructure device or one of the participating UEs;

302. Registering this identification in at least one infrastructure network device in such a manner as to make the infrastructure device aware of using this identification for communication of a certain session;

15 303. Sending communication data relating to this session from the UE to the infrastructure device;

304. Sending communication data using identical identification reference from the infrastructure device to each of the UEs part of the group.

305. Receiving the communication data in the plurality of UEs.

20

With the solution according to the present invention:

- multicast transmission over the RAN may be achieved, without implementing MBMS support;
- the radio access network may be efficiently utilized; and
- 25 - it is possible upgrade existing UEs to being able to participate in a group communication session according to the present invention without hardware changes or with only minor changes (e.g. changing the SIM card to one with several identification references).

30 In one embodiment of the present invention, the identification reference is not identical in all UEs but the identification reference may be partly identical, e.g. a specified length of the reference may be identical and a remaining length part of the reference may be unique for each UE. This has an advantage of allowing the other UEs and/or infrastructure to identify a communicating UE participating in the group session. For instance, the
35 infrastructure may in such a case be able to log the individual user's behavior and provide

individual services to the users or UEs since the infrastructure may identify each UE individually even though they participate in the group communication.

The present invention may also in part be realized in the infrastructure device (e.g. a base station) which is then arranged to handle this type of solution. Fig. 4 illustrates a base station 5 with a processing unit 401, at least one memory unit 402, and optionally other units 403 for operating the infrastructure device 5 (e.g. power unit, co-processors), and so on as understood by the skilled person). Furthermore, the base station 5 has a communication interface 404 for wireless communication with terminals and a communication interface 405 for communication with an infrastructure network.

It should be noted that the word "comprising" does not exclude the presence of other elements or steps than those listed and the words "a" or "an" preceding an element do not exclude the presence of a plurality of such elements. It should further be noted that any reference signs do not limit the scope of the claims, and that several "means", "units" or "devices" may be represented by the same item of hardware.

The above mentioned and described embodiments are only given as examples and should not be limiting to the present invention. Other solutions, uses, objectives, and functions within the scope of the invention as claimed in the below described patent claims should be apparent for the person skilled in the art.

BSC	Base station controller
BSS	Base Station System
25 DL	Downlink
GERAN	GSM EDGE Radio Access Network
GGSN	Gateway GPRS Support Node
GSM	Global System for Mobile communication
IMEI	International Mobile Equipment Identity
30 IMSI	International mobile subscriber identity
LLC	Link layer control
LTE	Long Term Evolution
MBMS	Multimedia Broadcast Multicast Service
PTT	Push-To-Talk
35 RA	Routing Area

	RLC AM	radio link control acknowledged mode
	SGSN	Serving GPRS Support Node
	SIM	Subscriber Identity Module
	SIP/IMS	Session Initiation Protocol/ IP multimedia subsystem
5	TBF	Temporary Block Flows
	TLLI	Temporary Link Layer identifier
	TMGI	Temporary mobile group identifier
	TS	Time Slot
	UE	User Equipment
10	UL	Uplink
	WCDMA	Wideband Code division multiple access

CLAIMS

1. A method for enabling efficient utilization of radio access network resources for a plurality of terminals (1, 2, 3, 4) participating in a group communication in a communication system (10) comprising at least one radio coverage cell and at least one base station system (5), comprising the steps of:
- providing each terminal within the group communication with an at least partly identical identification reference;
 - identifying the participating terminals towards the infrastructure network at least partly as one and the same identity;
 - sending from the infrastructure device communication data using a multicast protocol for transport of communication data to each terminal part of the group communication using the at least partly identical identification reference.
2. The method according to claim 1, characterized by said identity being at least one an International Mobile Subscriber Identity, i.e. IMSI, of the terminal's Subscriber Identity Module, i.e. SIM, card or a stored IMSI in a memory of the terminal.
3. The method according to claim 1, wherein the terminals have identical International Mobile Equipment Identities, i.e. IMEI.
4. The method according to claim 1, wherein the terminals have identifiable International Mobile Subscriber Identity, i.e. IMSI, or International Mobile Equipment Identity, i.e. IMEI, to be able to access the network so as to be provided with normal functions provided to terminals with unique IMSI or IMEI.
5. The method according to claim 1, further comprising a step of encrypting communication data between terminals part of the group communication.
6. The method according to claim 1, wherein the communication is a push to talk session.
7. A terminal (1, 2, 3, 4, 200) for wireless communication in a communication network (10), comprising:
- a processing unit (201);

- a memory unit (202);
- a communication interface (204);

wherein the processing unit is arranged to run software for participating in group communication using an identification reference used by a plurality of terminals within the same group communication.

5

8. The terminal according to claim 7, having multiple identity references, e.g. International Mobile Subscriber Identity, i.e. IMSI.

10

9. The terminal according to claim 8, wherein one of the identities is unique compared to any other identity of a different terminal, i.e. one "private IMSI" is also residing in the terminal.

15

10. The terminal according to claim 7, wherein the terminal is a mobile terminal or user equipment in at least one of a GSM, WCDMA, and LTE system.

11. The terminal according to claim 7, wherein the identification reference is at least partly identical for all terminals participating in the group communication.

20

12. An infrastructure device (5) in a wireless communication network, comprising:

- a processing unit (401);
- a memory unit (402);
- an access communication interface (404) for communicating with terminals (1, 2, 3, 4);

25

- a network communication interface (405) for communicating with an infrastructure network (6);

wherein the processing unit is arranged to send communication data to a plurality of terminals using a multicast protocol and arranged to handle other functions suitable for group communication where terminals communicating with the infrastructure device have at least partly identical identification references.

30

13. The infrastructure device according to claim 12, wherein said functions being a paging function/method, location, and routing area updating function.

35

14. An infrastructure network (10) for wireless group communication, comprising:
- at least one infrastructure device (5);
 - at least one radio coverage cell;
 - at least two terminals (1, 2, 3, 4) arranged to communicate wirelessly with the infrastructure device in the radio coverage cell, each terminal has an identification reference;
- 5
- wherein the terminals use at least partly identical identification references and the infrastructure device send communication data using a multicast protocol with the at least partly identical identification reference.

1/4

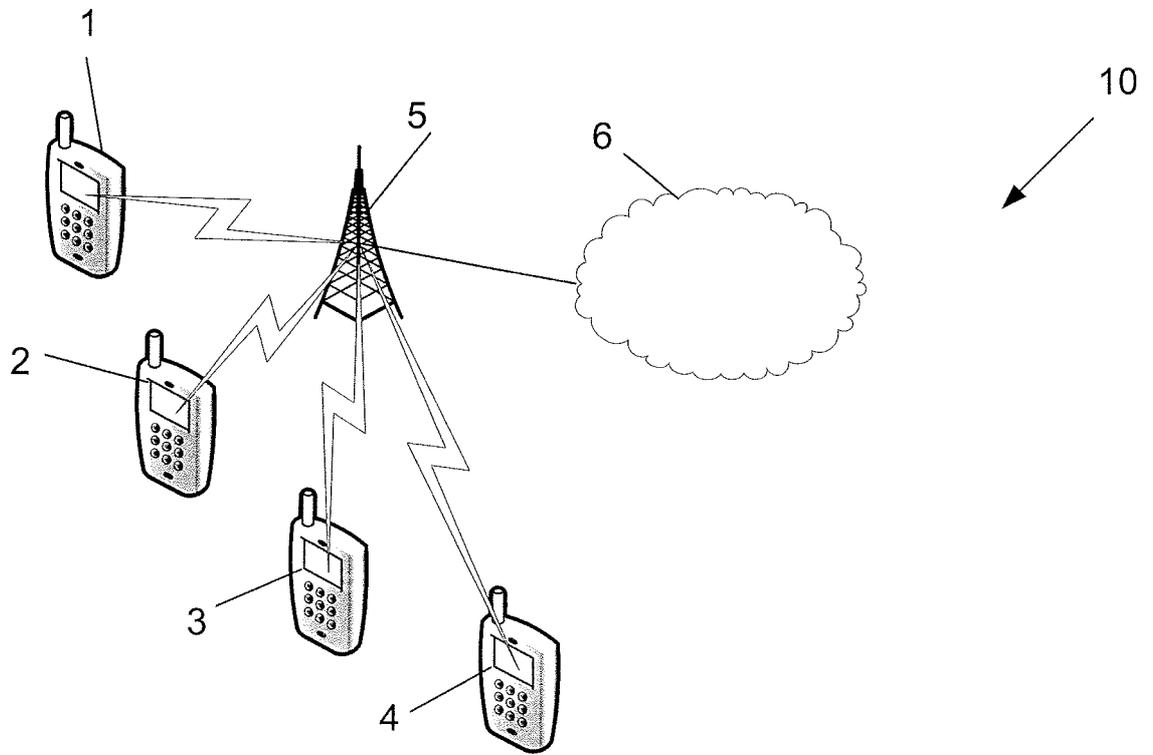


Fig. 1

2/4

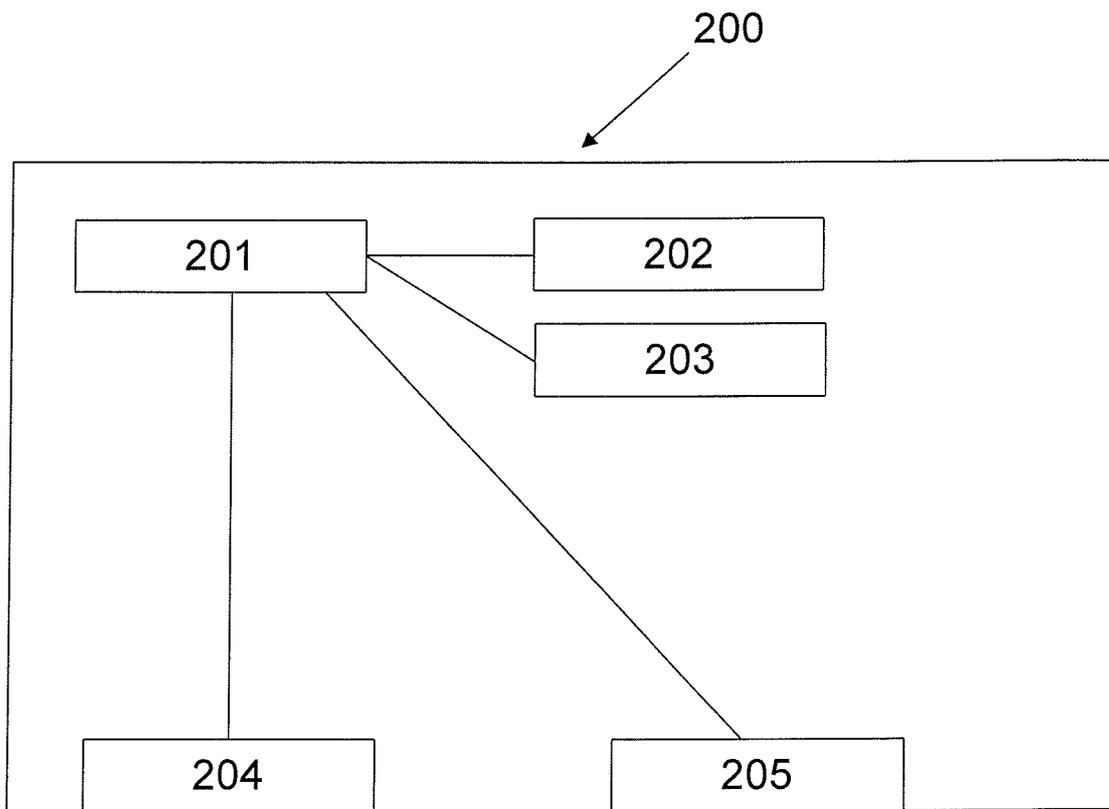


Fig. 2

3/4

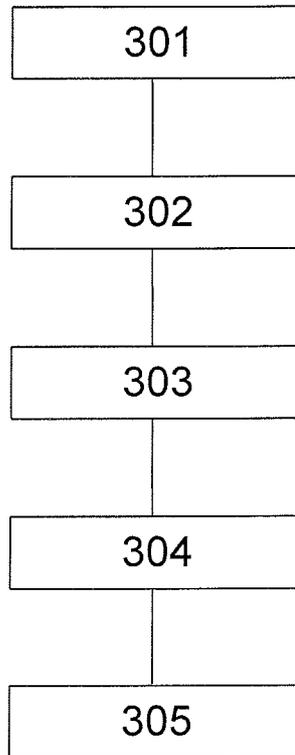


Fig. 3

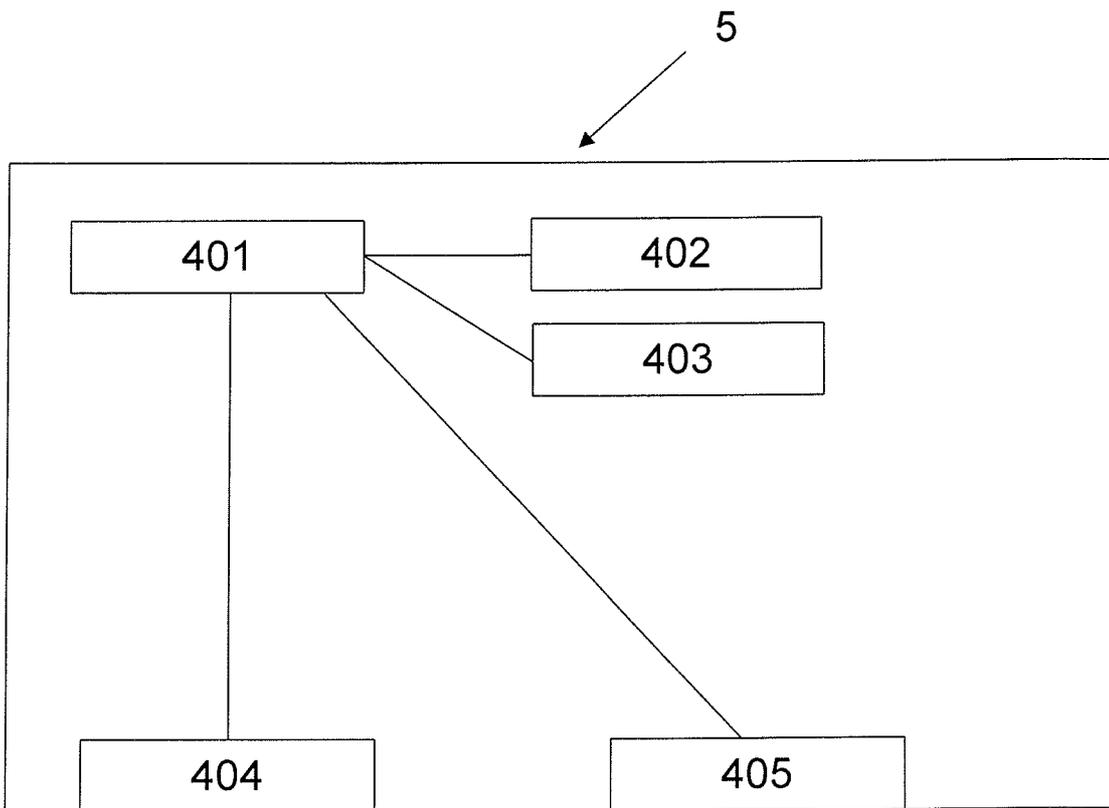


Fig. 4

A. CLASSIFICATION OF SUBJECT MATTER		
IPC: see extra sheet According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: H04W, H04Q, H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE, DK, FI, NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO-INTERNAL, WPI DATA, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2006096013 A1 (SAMSUNG ELECTRONICS CO, LTD), 14 Sept 2006 (14.09.2006), claims 1-28, abstract, paragraphs [0058]-[0065] --	1-14
A	US 20050144485 A1 (MOUSSEAU), 30 June 2005 (30.06.2005), figure 5, claims 1-29, abstract, paragraphs [0006]-[0012], [0032]-[0038] --	1-14
A	WO 2005104594 A1 (NOKIA CORP), 3 November 2005 (03.11.2005), page 2, line 34 - page 3, line 17; page 8, line 15 - page 9, line 35, figures 2,5,7, claims 1-18, abstract --	1-14
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents A document defining the general state of the art which is not considered to be of particular relevance E earlier application or patent but published on or after the international filing date V document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) O document referring to an oral disclosure, use, exhibition or other means P document published prior to the international filing date but later than the priority date claimed T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents such combination being obvious to a person skilled in the art & document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
22 January 2009		27 -ov 2009
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Elisabet Aselius /LR Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2008/050930

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007042079 A1 (TELEFONAKTI EBOLAGET LM ERICSSON (PUBL)), 19 April 2007 (19.04.2007), claims 1-10, abstract, paragraphs [0015]-[0021] --	1-14
A	MO 2006057923 A2 (MOTOROLA, INC), 1 June 2006 (01.06.2005), abstract, paragraphs [0020]-[0024] --	1-14
P,A	WO 2008087532 A2 (NOKIA INC), 24 July 2008 (24.07.2008), figures 1-4, claims 21-32, abstract, paragraphs [0042]-[0045] -- -----	1-14

International patent classification (IPC)**HO4W 4/10** (2009.01)**HO4W 4/06** (2009.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjanster/anf rda dokument (service in Swedish).

Use the application number as username.

The password is **KKNHVEU JQI** .

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85) .

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/11/2008

International application No.

PCT/SE2008/050930

MO	2006096013	A1	14/09/2006	CN	101138201	A	05/03/2008
				EP	1856847	A	21/11/2007
				JP	2008532455	T	14/08/2008
				KR	20060098889	A	19/09/2006
				US	20060205430	A	14/09/2006

US	20050144485	A1	30/06/2005	CA	2546786	A	02/06/2005
				CA	2546790	A	02/06/2005
				CN	101077017	A	21/11/2007
				CN	101147406	A	19/03/2008
				EP	1692888	A	23/08/2006
				EP	1692889	A	23/08/2006
				US	7466825	B	16/12/2008
				US	20050128997	A	16/06/2005
				US	20070254605	A	01/11/2007
				US	20070280479	A	06/12/2007
				US	20080313705	A	18/12/2008
				WO	2005051007	A ,B	02/06/2005
				WO	2005051008	A ,B	02/06/2005

WO	2005104594	A1	03/11/2005	AU	2005236965	A	03/11/2005
				CN	1965604	A	16/05/2007
				EP	1757136	A	28/02/2007
				JP	2007534247	T	22/11/2007
				KR	20070004103	A	05/01/2007
				US	20070208809	A	06/09/2007

WO	2007042079	A1	19/04/2007	CN	101283541	A	08/10/2008
				EP	1935134	A	25/06/2008
				US	20080229390	A	18/09/2008

WO	2006057923	A2	01/06/2006	KR	20070067729	A	28/06/2007
				US	20060168275	A	27/07/2006
				US	7254405	B	07/08/2007
				US	20060121913	A	08/06/2006

WO	2008087532	A2	24/07/2008	US	20080171567	A	17/07/2008
