



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2374068 C 2009/08/25

(11)(21) **2 374 068**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/05/08
(87) Date publication PCT/PCT Publication Date: 2000/12/07
(45) Date de délivrance/Issue Date: 2009/08/25
(85) Entrée phase nationale/National Entry: 2001/11/08
(86) N° demande PCT/PCT Application No.: NL 2000/000293
(87) N° publication PCT/PCT Publication No.: 2000/073375
(30) Priorité/Priority: 1999/05/28 (NL1012176)

(51) Cl.Int./Int.Cl. *C08L 33/06* (2006.01),
C08K 5/3492 (2006.01), *C08K 5/49* (2006.01),
C08L 61/28 (2006.01), *C08L 67/02* (2006.01),
C08L 77/00 (2006.01), *C09K 21/12* (2006.01),
C09K 21/14 (2006.01)

(72) Inventeurs/Inventors:
VAN DER SPEK, PIETER ARIE, NL;
BOS, MARTINUS LOUIS MARIA, NL;
ROOVERS, WILLIAM ADRIANUS CORNELIS, NL;
VAN GURP, MARNIX, NL;
MENTING, HENRICA NORBERTA ALBERTA MARIA,
NL

(73) Propriétaire/Owner:

(54) Titre : COMPOSITION IGNIFUGE EXEMPTÉE D'HALOGENE
(54) Title: HALOGEN-FREE FLAME-RETARDANT COMPOSITION

(57) Abrégé/Abstract:

The invention relates to a halogenfree, flame-retardant composition that comprises at least (A) an organic phosphorus compound and (B) melamine or a compound derived from melamine, or a melamine-phosphorus compound (AB) and a polymer compound comprising an olefine having 2-12 carbon atoms and 0.1-30 weight % (relative to the weight of the polymer compound) of a compound containing acid, acid anhydride or epoxy groups. The invention also relates to a polycondensate composition that contains the flame-retardant composition according to the invention. The flame-retardant composition according to the invention presents the advantage that the burning time of the polycondensate composition in which the composition according to the invention is used is substantially shortened. Preferably the flame-retardant composition is used in polyesters or polyamides.

(73) Propriétaires(suite)/Owners(continued):DSM IP ASSETS B.V., NL

(74) Agent: FETHERSTONHAUGH & CO.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 December 2000 (07.12.2000)

PCT

(10) International Publication Number
WO 00/73375 A3

(51) International Patent Classification⁷: C08K 5/00, C08L 67/02, 77/00

(21) International Application Number: PCT/NL00/00293

(22) International Filing Date: 8 May 2000 (08.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 1012176 28 May 1999 (28.05.1999) NL

(71) Applicant (for all designated States except US): DSM N.V. [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VAN DER SPEK, Pieter, Arie [NL/NL]; Mezenhof 11, NL-6181 KG Elsloo (NL). BOS, Martinus, Louis, Maria [NL/NL]; Koningstraat 93, NL-6121 HS Born (NL). ROOVERS, William, Adrianus, Cornelis [NL/NL]; Geilenkirchenstraat 9, NL-6132 HD Sittard (NL). VAN GURP, Marnix [NL/NL]; Vlaanderenstraat 9, NL-6137 LM Sittard (NL). MENTING, Henrica, Norberta, Alberta, Maria [NL/NL]; Lintjeshaag 54, NL-6141 MB Sittard (NL).

(74) Agent: VAN BORM, Werner, August, Hendrik, Maria: DSM Patents & Trademarks, P.O. Box 9, NL-6160 MA Geleen (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(88) Date of publication of the international search report: 24 January 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 00/73375 A3

(54) Title: HALOGEN-FREE FLAME-RETARDANT COMPOSITION

(57) **Abstract:** The invention relates to a halogenfree, flame-retardant composition that comprises at least (A) an organic phosphorus compound and (B) melamine or a compound derived from melamine, or a melamine-phosphorus compound (AB) and a polymer compound comprising an olefine having 2-12 carbon atoms and 0.1-30 weight % (relative to the weight of the polymer compound) of a compound containing acid, acid anhydride or epoxy groups. The invention also relates to a polycondensate composition that contains the flame-retardant composition according to the invention. The flame-retardant composition according to the invention presents the advantage that the burning time of the polycondensate composition in which the composition according to the invention is used is substantially shortened. Preferably the flame-retardant composition is used in polyesters or polyamides.

5

HALOGEN-FREE FLAME-RETARDANT COMPOSITION

The invention relates to a halogen-free, flame-retardant composition comprising at least an organic phosphorus compound (A) and 10 melamine or a compound derived from melamine (B), or a melamine-phosphorus compound (AB).

Such a composition is known from WO 99/02606, which describes polybutylene terephthalate (PBT) compositions that contain a 15 halogen-free, flame-retardant composition consisting of resorcinol-bis-(diphenylphosphate) (RDP) or a trimethylolpropanol ester of methylphosphonic acid and melamine cyanurate or melam. Said publication also describes 20 a polyamide-6 composition that contains a halogen-free, flame-retardant composition consisting of the trimethylolpropanol ester of methylphosphonic acid and melamine cyanurate or melam.

The drawback of the composition 25 according to the state of the art is that the polycondensate compositions in which the flame-retardant composition can be used, in particular polyamide and polyester compositions containing glass fibres, have flame-retardant properties that 30 do not yet meet the highest requirements. In particular the after-burning time is generally too long, in many cases even longer than 30 seconds, as a result of which no V-O classification according to the UL-94 test of the Underwriter Laboratories 35 can be obtained. It is hence desirable to shorten

the after-burning time, i.e. the time for which a composition burns after the removal of the flame. The polycondensate compositions in which the flame-retardant composition according to the invention is 5 used can consequently for example obtain a better UL-94 classification, or a polycondensate composition with flame-retardant properties, similar to the ones disclosed in WO 99/02606, can be obtained using a smaller amount of flame- 10 retardant composition.


The inventors have now surprisingly found that the after-burning time of a polycondensate composition that contains the flame-retardant components (A)+(B) or (AB) according to 15 the state of the art can be shortened if the flame-retardant composition also contains a polymer compound (C) comprising at least one type of olefine having 2-12 carbon atoms and 0.1-30 wt.% (relative to the weight of the polymer compound) of 20 at least one compound containing acid, acid anhydride or epoxy groups.

Another part of the invention is a polycondensate composition containing the flame-retardant composition according to the invention. 25 An additional advantage of the polycondensate composition according to the invention is that the mechanical properties of the polycondensate composition according to the invention are not or not significantly lower than those of the 30 polycondensate compositions according to the state of the art that do not contain component (C).

As component (C), the flame-retardant composition according to the invention contains a polymer compound comprising at least one olefine 35 having 2-12 carbon atoms and 0.1-30 wt.% (relative

to the weight of the polymer compound) of at least one compound containing acid, acid hydride or epoxy groups. Suitable compounds are for example ethylene, propylene or ethylene-propylene 5 copolymers containing 0.1-30 wt.% (relative to the weight of the copolymer compound) of a comonomer containing acid, acid anhydride or epoxy groups. Said polymers may also contain comonomers that do not contain the aforementioned groups, for example 10 acrylic esters or vinyl acetate. Preferably the polymer compound contains 0.5-12 wt.% (relative to the weight of the polymer compound) of a compound containing acid, acid anhydride or epoxy groups. Examples of such compounds are acrylic acid, 15 methacrylic acid, maleic anhydride, glycidyl acrylate and glycidyl methacrylate.

In a preferred embodiment the polymer compound is a compound having a general chemical composition based on E, X and Y, with E standing 20 for an ethylene radical, X standing for a radical formed from the compound

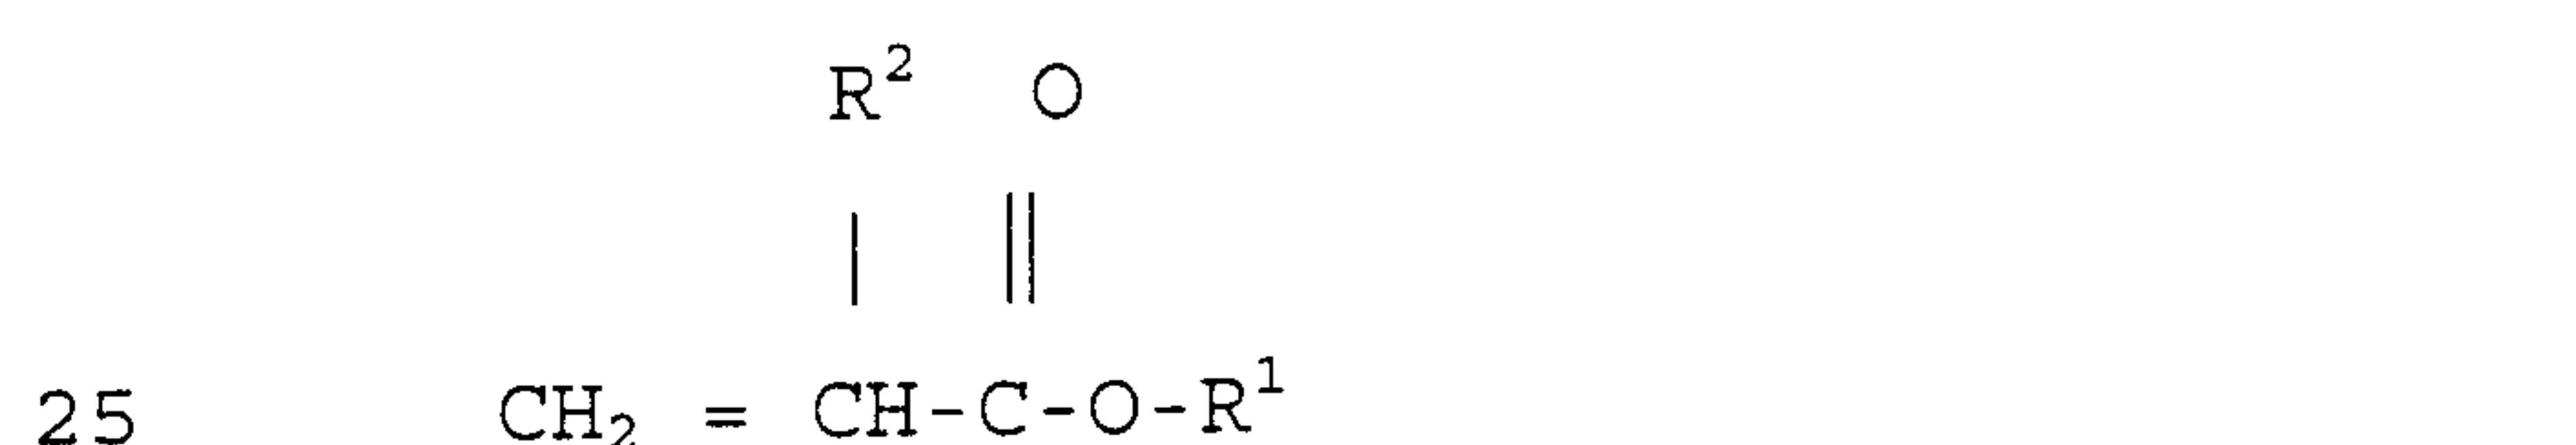

where

R¹ = alkyl radical having 1-8 carbon atoms

R² = H, CH₃ or C₂H₅

30 and Y a radical formed from glycidyl (alkyl)acrylate; for example glycidyl (meth)acrylate.

Preferably the polymer compound based on E, X and Y contains 40-90 wt.% E, 1-40 wt.% X and 0.5-20 wt.% Y, the sum of the amounts being equal to 100 wt.%.

The use of polymer compounds having a
5 chemical composition based on E, X and Y in
concentrations of 1 - 20 wt.% in halogen-containing
flame-retardant polyester compositions is known
from EP-B1-174,343 (DuPont) for increasing the
ductility of said polyester compositions,
10 especially at low temperatures.

The polymer component (C) is
commercially available, for example as an
ethylene/acrylic ester/glycidyl methacrylate
terpolymer (Lotader[®] AX, Elf Atochem),
15 ethylene/glycidyl methacrylate (Bondfast[®], E with a
mol. weight $M_n = 120,000$, Sumitomo),
ethylene/methacrylic acid (Nucrel[®], Dupont),
propylene/maleic anhydride (Himont),
propylene/acrylic acid (Polybond[®], BP Chemical) and
20 ethylene/alpha-olefine copolymer modified with
maleic anhydride (Tafmer[®], Mitsui). Preferably, an
ethylene/acrylic ester/glycidyl methacrylate
terpolymer is chosen, more preferably an
ethylene/methylmethacrylic ester/glycidyl
25 methacrylate terpolymer (Lotader[®] AX 8900, Elf
Atochem, with a molar weight (M_n) of approximately
90,000).

In polyester compositions good results
were obtained with an ethylene/methylmethacrylic
30 ester/glycidyl methacrylate terpolymer (Lotader[®] AX
8900). In polyamide compositions good results were
obtained with an ethylene-propylene copolymer,

modified with 0.5 wt.% maleic anhydride (Tafmer[®], Mitsui).

Suitable organic phosphorus compounds (component A) are for example organic phosphates, 5 phosphites, phosphonates, phosphinates and phosphine oxides. Preferably, phosphates, phosphonates or phosphinates are chosen. Examples of such phosphorus compounds are described in for example the "Encyclopedia of Chemical Technology", 10 Vol. 10, p. 396 ff. (1980). Many are commercially available, for example resorcinol-bis(diphenylphosphate) oligomer, under the trade name Fyrolflex[®] RDP from AKZO-Nobel, NL; cresyl-diphenylphosphate (CDP) under the trade name 15 Kronitex[®] CDP from FMC, UK; trimethylolpropanol ester of methylphosphonic acid, under the trade name Antiblaze[®] 1045 from Albright & Wilson, USA; polypentaerythritol phosphonate under the trade name Cyagard[®] RF 1041 from American Cyanamid, USA; 20 Hostaflam[®] OP 910, a mixture of cyclic di- and triphosphonates from Clariant, Germany.

Preferably, a phosphorus compound with a low volatility is chosen as component (A).

Suitable for use as the compound 25 derived from melamine (component B) are for example melamine derivatives, melamine condensation products or mixtures thereof. In the context of this application a "melamine derivative" is understood to be melamine with one or more amine 30 groups having been substituted with one or more alkyl, aryl, aralkyl or cycloalkyl groups, for example to be chosen from the group comprising methyl, ethyl, ethenyl, phenyl or toluyl. Examples of such melamine derivatives are N,N',N''-

triphenylmelamine. Another example of a melamine derivative is melamine cyanurate. In the context of this application a "melamine condensation product" is understood to be a compound in which two or more 5 melamine compounds are connected to one another, for example melam, melem, melon and higher oligomers and menthone, which can for example be obtained using the process described in WO 96/16948.

10 Preferably, melamine, melamine cyanurate, melamine phosphate, melam, melem or mixtures thereof are chosen as component (B).

Suitable for use as the melamine-phosphorus compound (AB) are compounds like 15 melamine phosphates, for example melamine pyrophosphate and melamine polyphosphate.

The flame-retardant composition according to the invention is used in polycondensate compositions in concentrations 20 between 1 and 50% (relative to the total weight of the polycondensate composition), preferably between 10 and 40%. The concentration can in principle be determined experimentally by a person skilled in the art. The ratio of components (A), (B), (AB) and 25 (C) may also vary within a wide range. The concentration of organic phosphorus compound (component A) may vary within a wide range, for example between 0.5 and 20 wt.-% (relative to the total weight of the polycondensate composition), 30 preferably between 1 and 15 wt.-%. The concentration of melamine or compound derived therefrom (component B) may vary within a wide range, for example between 2 and 25 wt.-% (relative to the total weight of the polycondensate composition), 35 preferably between 3 and 20 wt.-%, most preferably

between 4 and 16 wt.%. The concentration of the polymer compound (component C) may vary within a wide range, preferably between 1 and 20 wt.%, more preferably between 1 and 10 wt.% (relative to the 5 total weight of the polycondensate composition). A person skilled in the art will be able to determine the optimum composition in his case through systematic research.

The composition according to the 10 invention can be used as a flame-retardant system in all polycondensate compositions known to a person skilled in the art. Preferably, the composition is used in polyester and polyamide compositions.

15 Examples of suitable polyesters are polyalkylene terephthalates or copolyesters thereof with isophthalic acid, for example polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polyalkylene naphthalates, for example 20 polyethylene naphthalate (PEN), polypropylene naphthalate (PPN), polyphenylene terphthalate (PPT) and polybutylene naphthalate (PBN), polyalkylene dibenzoates, for example polyethylene dibenzoate and copolymers of the aforementioned polyesters.

25 Preferably, PET, PBT, PEN, PPT or PBN is chosen. Also suitable are block copolymers which, in addition to hard polyester segments chosen from the aforementioned group, also contain soft polyester segments derived from at least a polyether or an 30 aliphatic polyester. Examples of such block copolymers with elastomeric properties are for example described in the "Encyclopedia of Polymer Science and Engineering", Vol. 12, p. 75 ff. (1988), John Wiley & Sons, and in "Thermoplastic

Elastomers", 2nd Ed., Chapter 8 (1996), Hanser Verlag, the relevant contents of which is regarded as mentioned here. Furthermore, also polyester blends are suitable, such as PET/PBT,
5 PBT/polycarbonate or PBT/rubber blends.

Examples of suitable polyamides are the aliphatic polyamides PA-6, PA-6,6, PA-9, PA-11, PA-4,6 and copolyamides thereof and semi-aromatic polyamides based on for example PA-6 or PA-6,6 and
10 aromatic dicarboxylic acids and aliphatic diamines, for example isophthalic acid and terephthalic acid and hexanediamine, for example PA-6/6.T, PA-6,6/6,T, PA-6,6/6/6,T and PA-6,6/6,I/6,T.
Preferably PA-6, PA-6,6 and PA-4,6 are chosen.
15 Furthermore, also polyamide blends are suitable.

The composition according to the invention can also be used in polycondensate compositions that contain other additives known to a person skilled in the art that are usually used
20 in polycondensate compositions, without them essentially detracting anything from the invention, in particular pigments, processing aids, for example mould release agents, crystallisation accelerators, nucleating agents, softeners, UV and
25 heat stabilisers, antioxidants and the like. Other substances that promote the flame-retardancy can optionally be added, too, for example carbon-forming substances such as polyphenylene ether and polycarbonate and substances that affect the
30 dripping behaviour, for example fluoropolymers such as polytetrafluoroethylene.

In particular the polycondensate composition contains an inorganic filler or reinforcing agent. Suitable inorganic fillers or
35 reinforcing agents are all the fillers known to a

person skilled in the art, for example glass fibres, metal fibres, graphite fibres, aramide fibres, glass beads, aluminium silicates, asbestos, mica, clay, calcined clay and talc. Preferably, 5 glass fibres are chosen.

The polycondensate composition according to the invention can be obtained in a simple manner for example by means of melt-mixing. Preferably use is then made of an extruder fitted 10 with means for dosing all the desired components to the extruder, either in the extruder's throat, or to the melt.

The invention will be further elucidated with reference to the following examples 15 and comparative examples.

Examples

Examples I and II and Comparative Examples

20 A and B

A number of polyester compositions were prepared using the following components in varying concentrations:

Polycondensate: polybutylene terephthalate (PBT) :

25 Arnite[®] PBT from DSM Engineering Plastics, the Netherlands.

Component A: Antiblaze[®] 1045 from Albright & Wilson, USA.

30 Component B: melamine cyanurate: Melapur[®] MC50 from DSM Melapur, the Netherlands.

35 Component C: Lotader[®] AX8900 from Elf Atochem, France. This component is a terpolymer of ethylene, methylmethylene acrylate (MMA, 24 weight%) and glycidyl methacrylate (GMA, 8 weight%) with a molecular weight $M_n = 90,000$.

Other additives:

- glass fibre: length 4-4.5 mm and diameter 10-14 μm
- release agent.

5 The compositions were prepared using a ZSK 30 twin-screw extruder.

The compositions were used to injection-mould specimens. They were subjected to the following

10 tests:

- flame retardancy according to UL94 at 1.6 mm after 48 hours at 23°C/50 % relative humidity (RH);
- determination of modulus of elasticity according to ISO 527-1;
- determination of tensile stress at break according to ISO 527-1.

15 The results are summarised in Table 1.

Table 1: Halogen-free polyester compositions. All the amounts are percents by weight, relative to the composition's total weight.

Example		A	I	B	II
Polyester	%	54.75	51.75	45	42
Component A	%	10	10	10	10
Component B	%	15	15	15	15
Component C	%	-	3	-	3
Other additives					
- glass fibre	%	20	20	30	30
- release agent	%	0.25	0.25	-	-
Flame retardancy					
UL94 at 1.6 mm					
after 48 hours at 23 °C/50 % RH		NC	V-0	V-1	V-0
1st application of flame					
- average after-burning time	sec	17.6	2.4	2.4	1.4
- average time to dripping	sec	0	0	0	0
2nd application of flame					
- average after-burning time	sec	19	2.2	11.6	1.0
- average time to dripping	sec	26	0	0	0
Modulus of elasticity	MPa	6621	6466	9386	9123
Tensile stress at break	%	87	86	75	74

NC = no classification

5 V-0, V-1 and V-2 classifications according to UL-94

"average time to dripping" = the time from the application of the flame to the falling of the first drop.

From Table 1 it can be inferred that:

- the addition of component (C) to the composition according to the state of the art leads to a drastic shortening of the after-burning time, 5 such that a V-O classification is obtained.
- the modulus of elasticity and the tensile stress at break are not essentially affected by the addition of component (C).

10 The flame retardancy of compositions I and A was also determined after 168 hours' conditioning at 70°C. The results are summarised in Table 2. A drastic shortening of the after-burning time was obtained under these conditions, too.

15

Table 2: Halogen-free polyester compositions

Example	Unit	A	I
Flame retardancy UL94 at 1.6 mm after 168 hours at 70°C		NC	V-1
1st application of flame			
- average after-burning time	sec	30.8	4.4
- average time to dripping	sec	40	0
2nd application of flame			
- average after-burning time	sec	28	12.0
- average time to dripping	sec	9.0	0

20 Examples III-VI and Comparative Examples C-F

A number of polyester compositions were prepared using the following components in varying concentrations:

Polycondensate: polybutylene terephthalate (PBT) :

25 Arnite® PBT from DSM Engineering Plastics, the Netherlands.

Component A:

AB : Antiblaze® 1045 from Albright & Wilson, USA.

NH : NH-1197 from Great Lakes, USA (cyclic ester of

30 pentaerythritol and phosphoric acid.

Component B: a mixture of melamine (2.5 weight%), melam (0.4 weight%), melem (79.1 weight%) and higher melamine homologues (18 weight%), obtained from DSM Melapur, the Netherlands.

5 Component C: Lotader[®] AX8900 from Elf Atochem, France. This component is a terpolymer of ethylene, methylmethacrylate (MMA, 24 weight%) and glycidyl methacrylate (GMA, 8 weight%) with a molecular weight $M_n = 90,000$.

10 Other additives:

- glass fibre: length 4-4.5 mm and diameter 10-14 μm .

The compositions were prepared using a ZSK 30 twin-screw extruder.

15 The compositions were used to injection-mould specimens. They were subjected to the following tests:

- flame retardancy according to UL94 at 1.6 mm after 48 hours at 23°C/50 % relative humidity
20 (RH);

The results are summarised in Table 3. From these results it is apparent that the compositions comprising Component C have a shorter after-burning time than the compositions without Component C. Also, the amount of Component B can be lowered in the presence of Component C without imparting the after-burning time of the composition.

Table 3: Halogen-free polyester compositions. All the amounts are percents by weight, relative to the composition's total weight.

Example	C	III	D	IV	E	V	F	VI
Polyester	45	42	48	45	45.6	43.6	45	42
Component A	8	10	10	7	7	6.4	6.4	AB:4 NH:4
Component B	8	15	15	15	15	18	18	17
Component C	8	-	3	-	3	-	2	-
Other additives								
- glass fibre	30	30	30	30	30	30	30	30
1st application of flame								
- av. after-burning time	Sec 1	1	10.6	2.0	10.6	3.0	1.0	2.0
2nd application of flame								
- av. after-burning time	Sec 1	1	6.8	1.0	2.8	1.0	3.0	2.0

Example VII and Comparative Example G

Polyamide compositions were prepared using the following components in varying concentrations:

5 Polycondensate: polyamide-6: Akulon[®] PA-6 from DSM Engineering Plastics, the Netherlands;

Component A: P compound: Antiblaze[®] 1045 from Albright & Wilson, USA;

Component B: melamine cyanurate: Melapur[®] MC50 from 10 DSM Melapur, the Netherlands;

Component C: Tafmer[®] MP0610 from Mitsui, Japan

Other additives:

- glass fibre: length 4-4.5 mm, diameter 10-14 µm.

The compositions were prepared using a

15 ZSK 30 twin-screw extruder.

Table 3: Halogen-free polyamide compositions

Example	Unit	G	VII
Polyamide-6	%	45.00	43
Component A	%	10	10
Component B	%	15	15
Component C	%	-	2
Other additives			
- glass fibre	%	30	30
Flame retardancy			
UL94 at 1.6 mm		V-2	V-0
after 48 h at 23°C/50 % RH			
1st application of flame			
- after-burning time	sec	1.0	1.0
- time to dripping	sec	0	0
2nd application of flame			
- after-burning time	sec	13.0	4.6
- time to dripping	sec	21.8	0
modulus of elasticity	MPa	10359	10079
tensile stress at break	%	154.7	141.9

22772-1443

- 16 -


CLAIMS:

1. A halogen-free, flame-retardant composition consisting of either (1) or (1') below:

(1) an organic phosphorus compound (A), and
 5 melamine or a melamine condensation product (B), or
 (1') a melamine-phosphorus compound (AB), and
 (2) a polymer (C) comprising at least one type of olefine having 2-12 carbon atoms and 0.1-30 weight % relative to the weight of the polymer (C) of at least one
 10 comonomer containing epoxy groups.

2. Composition according to claim 1, wherein the component (C) is a polymer obtained by copolymerizing E, X and Y compounds, wherein E is ethylene, X is a compound having the formula:

15

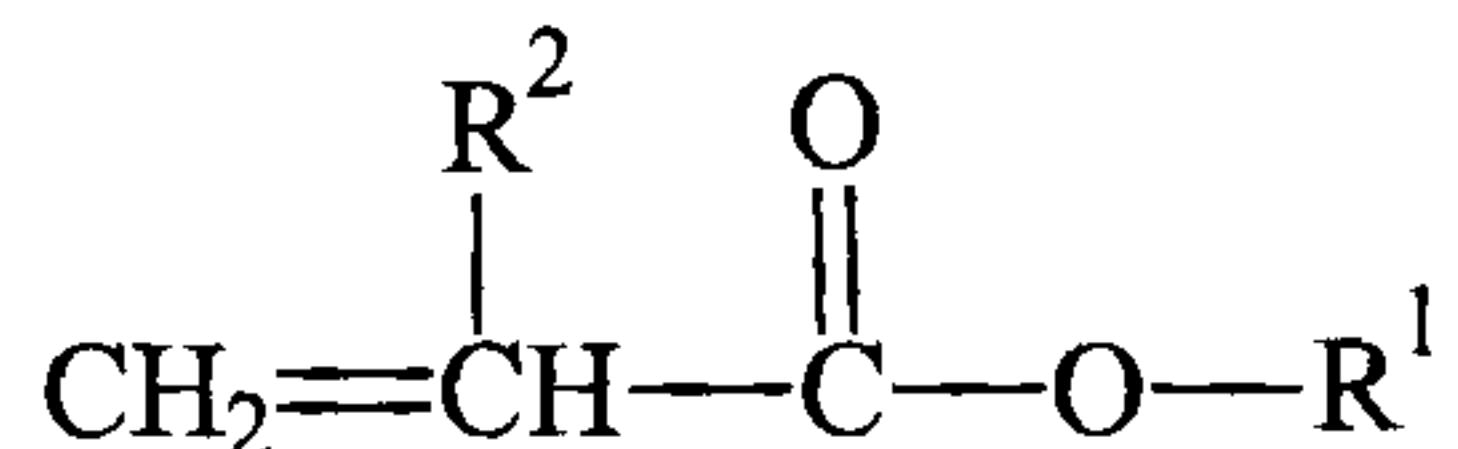

where R^1 =alkyl radical having 1-8 carbon atoms $\text{R}^2=\text{H}$, CH_3 or C_2H_5 and Y is glycidyl (alkyl)acrylate.

3. Composition according to claim 1, wherein the component (C) is an ethylene/acrylic ester/glycidyl methacrylate terpolymer.

4. Composition according to claim 3, wherein the component (C) is an ethylene/methylacrylate ester/glycidyl methacrylate terpolymer.

25 5. Composition according to any one of claims 1 to 4, wherein the organic phosphorus component (A) or the

22772-1443

- 17 -

melamine-phosphorus compound (AB) is a phosphate, a phosphinate or a phosphonate.

6. Polyester or polyamide flame retardant composition free of halogen comprising either (1) or (1'), below:

5 (1) an organic phosphorous compound (A) and melamine or a melamine condensation product (B);

(1') a melamine-phosphorous compound (AB); and further comprising

10 (2) a polymer (C) comprising at least one type of olefin monomer having 2-12 carbon atoms and 0.1-30 weight % relative to the weight of the polymer (C) of at least one comonomer containing epoxy groups;

(3) a polyester or polyamide; and

(4) glass fiber.

15 7. Flame retardant composition according to claim 6, wherein (3) is a polyester selected from the group consisting of polyethylene terephthalate, polybutylene terephthalate, polyethylene naphthalate, polyphenylene terephthalate, and polybutylene naphthalate.

20 8. Flame retardant composition according to claim 6, wherein (3) is a polyester selected from the group consisting of polyamide-6, polyamide-6,6 and polyamide-4,6.

FETHERSTONHAUGH & CO.
OTTAWA, CANADA

PATENT AGENTS