



(86) Date de dépôt PCT/PCT Filing Date: 2013/06/17
(87) Date publication PCT/PCT Publication Date: 2014/01/03
(45) Date de délivrance/Issue Date: 2018/09/11
(85) Entrée phase nationale/National Entry: 2014/12/22
(86) N° demande PCT/PCT Application No.: JP 2013/003764
(87) N° publication PCT/PCT Publication No.: 2014/002423
(30) Priorité/Priority: 2012/06/28 (JP2012-145098)


(51) Cl.Int./Int.Cl. *C22C 38/14* (2006.01),
B21C 37/08 (2006.01), *C21D 8/10* (2006.01),
C22C 38/02 (2006.01), *C22C 38/04* (2006.01),
C22C 38/06 (2006.01), *C22C 38/12* (2006.01)

(72) Inventeurs/Inventors:
TOYODA, SHUNSUKE, JP;
GOTO, SOTA, JP;
OKABE, TAKATOSHI, JP;
INOUE, TOMOHIRO, JP

(73) Propriétaire/Owner:
JFE STEEL CORPORATION, JP

(74) Agent: MOFFAT & CO.

(54) Titre : TUYAU EN ACIER SOUDE PAR RESISTANCE ELECTRIQUE A RESISTANCE ELEVEE D'EXCELLENTE RESISTANCE AU RAMOLLISSEMENT A LONG TERME DANS DES PLAGES DE TEMPERATURE INTERMEDIAIRES ET SON PROCEDE DE FABRICATION
(54) Title: HIGH-STRENGTH ELECTRIC-RESISTANCE-WELDED STEEL PIPE OF EXCELLENT LONG-TERM SOFTENING RESISTANCE IN INTERMEDIATE TEMPERATURE RANGES, AND METHOD FOR PRODUCING SAME

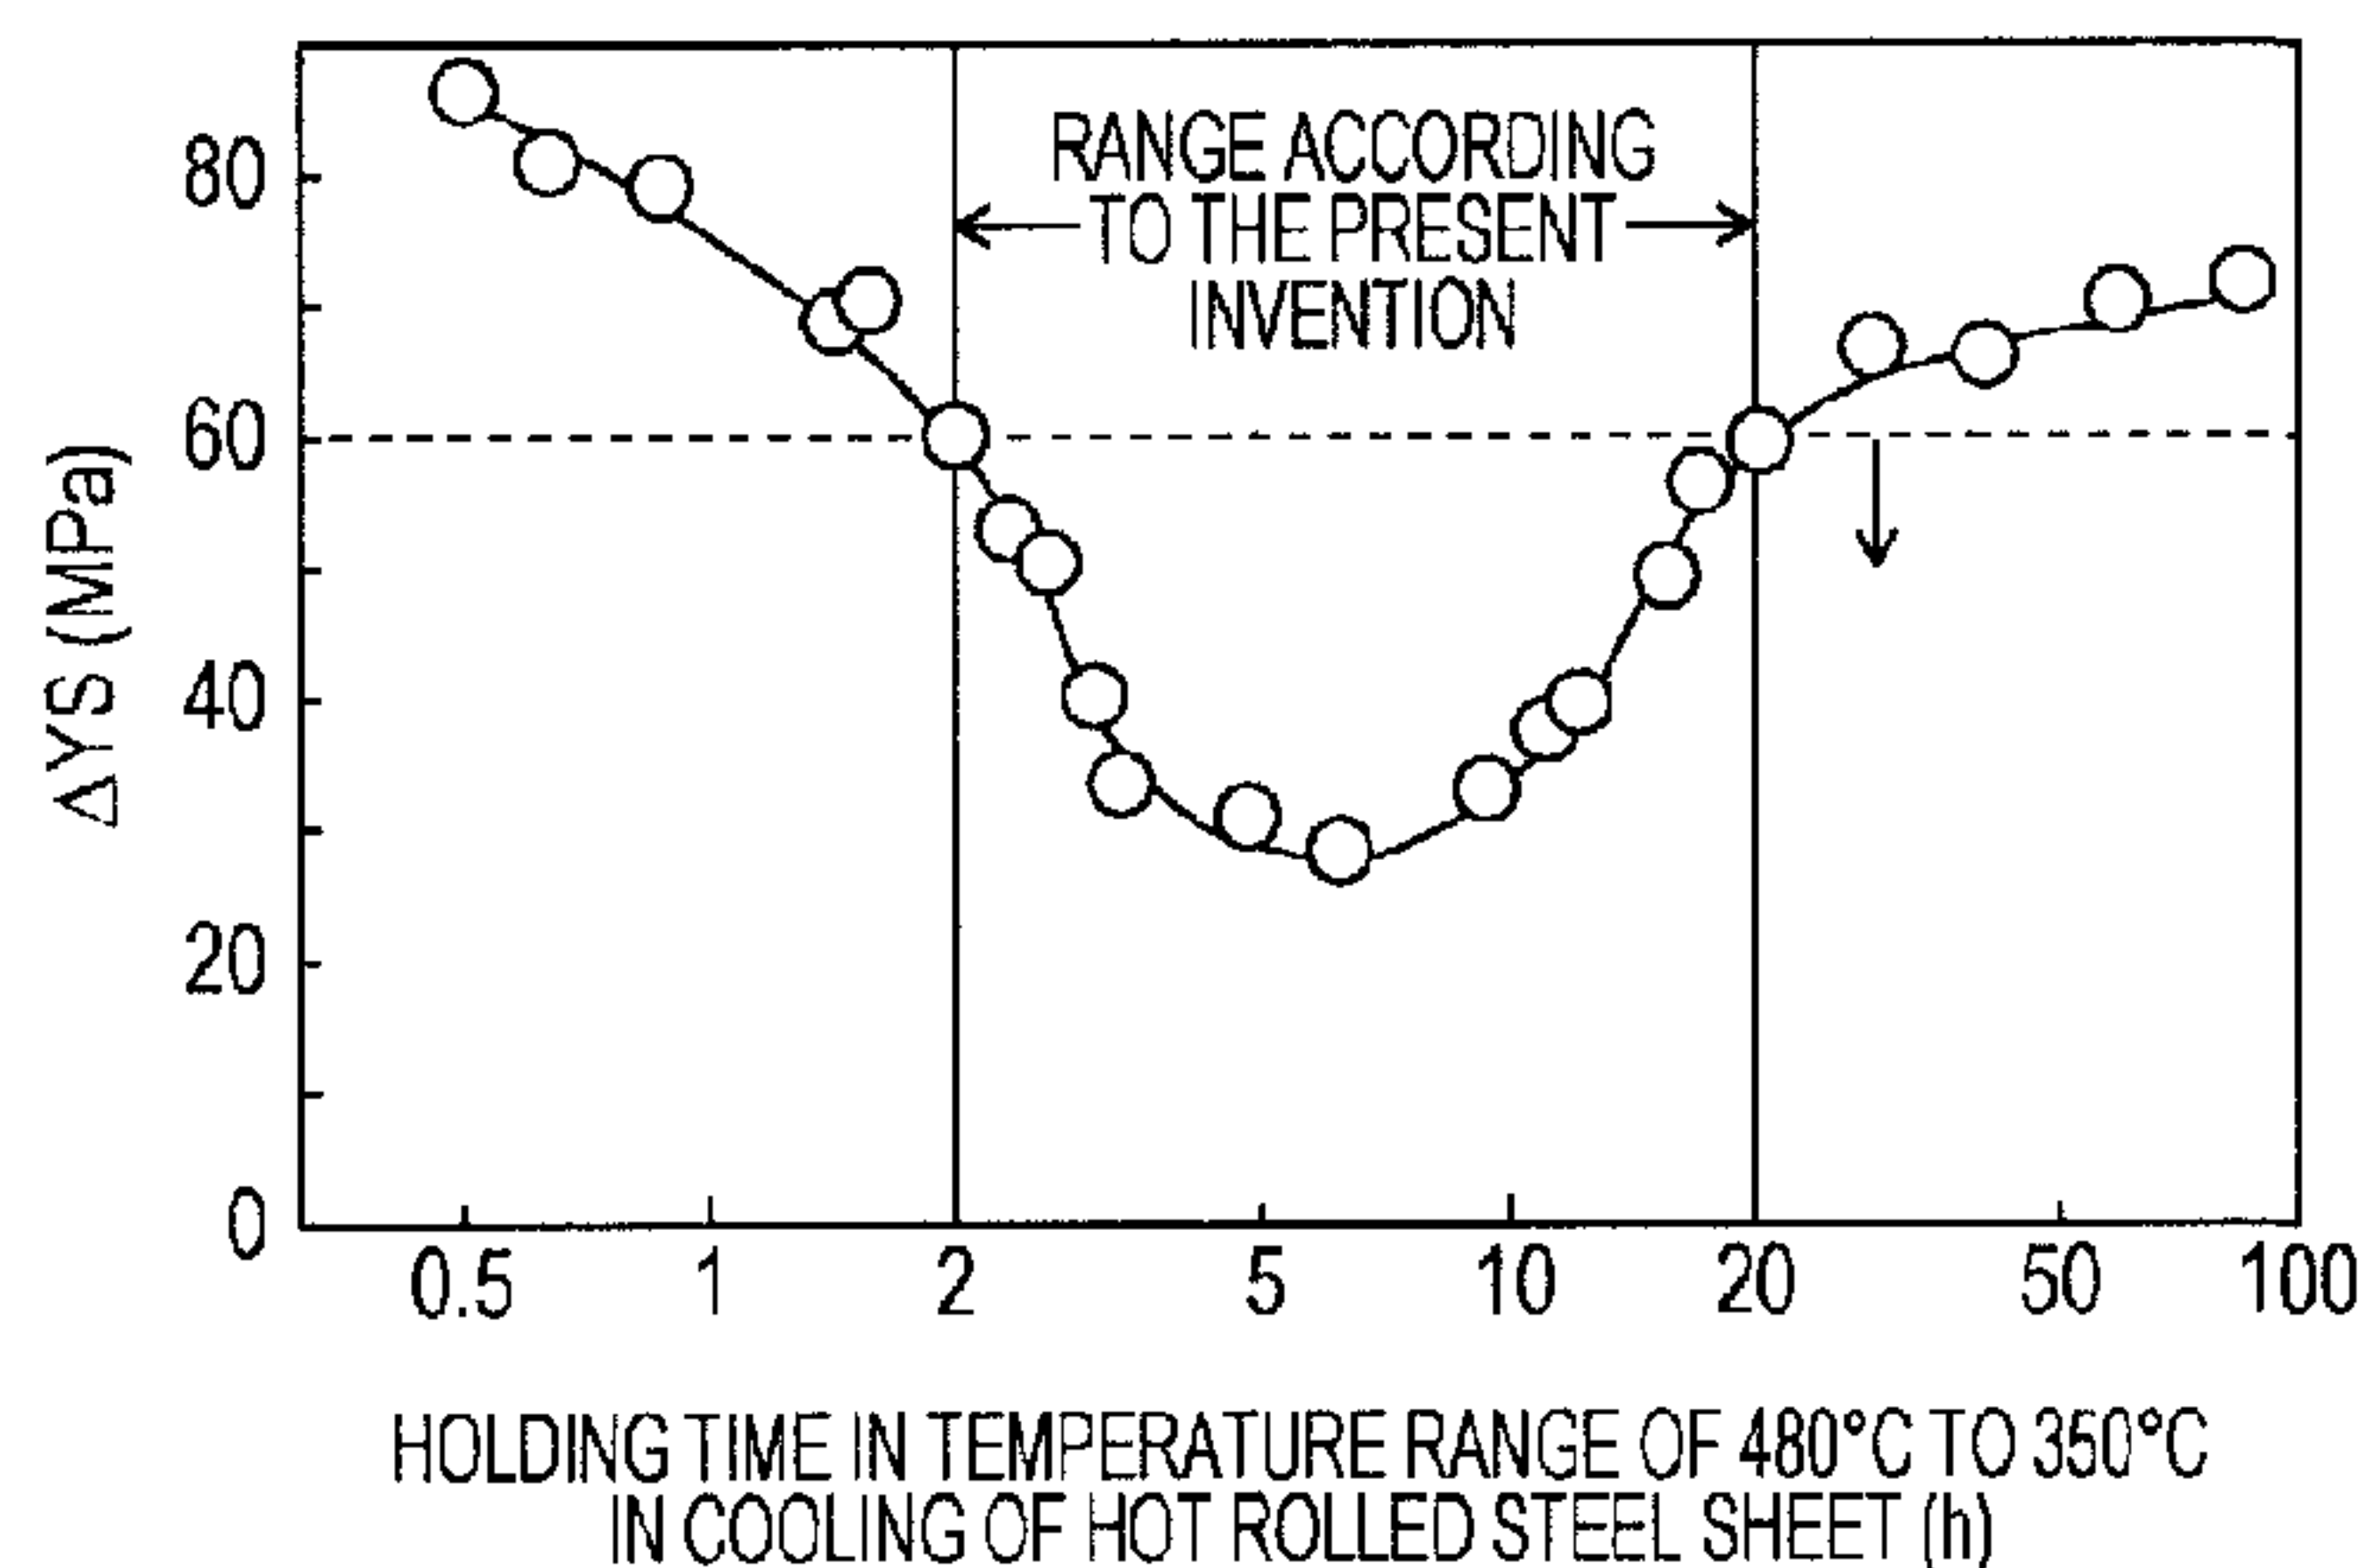

(57) **Abrégé/Abstract:**

Provided are a high-strength electric-resistance-welded steel pipe of yield strength 450 MPa or higher and excellent long-term softening resistance in intermediate temperature ranges, and a method for producing the same. More specifically, an electric-

(57) Abrégé(suite)/Abstract(continued):

resistance-welded steel pipe is made by a regular method for forming an electric-resistance-welded pipe where the material is a hot-rolled steel strip obtained by subjecting a steel material of a composition comprising, by mass, C: 0.026-0.084%, Si: 0.10-0.30%, Mn: 0.70-1.90%, Al: 0.01-0.10%, Nb: 0.001-0.070%, V: 0.001-0.065%, Ti: 0.001-0.033%, and Ca: 0.0001-0.0035%, and having a Pcm satisfying 0.20 or less, to the following steps: heat-soaking for 90 min or longer at a temperature ranging from greater than 1200°C to 1280°C; hot rolling at a rolling rate 20% or higher in an un-recrystallized temperature range; cooling, after conclusion of the rolling, at a mean cooling rate of 7-299°C/s at a temperature of 780-620°C in the thickness-wise middle part of the plate; and subsequently adjusting the cumulative residence time in the temperature range 480-350°C to 2-20 h. The entire thickness of the material of the plate near an electric resistance weld section is heated inline to a temperature in the range of 800-1150°C, the plate is cooled so that the mean cooling rate at 780-620°C in the thickness middle part temperature is in the range of 7-299°C is carried out, and the cumulative residence time at 500-360°C is adjusted to 2-200 s.

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2014 年 1 月 3 日(03.01.2014)(10) 国際公開番号
WO 2014/002423 A1

(51) 国際特許分類:

C22C 38/00 (2006.01) C21D 9/50 (2006.01)
B21C 37/08 (2006.01) C22C 38/14 (2006.01)
C21D 8/10 (2006.01) C22C 38/58 (2006.01)
C21D 9/08 (2006.01)

(21) 国際出願番号: PCT/JP2013/003764

(22) 国際出願日: 2013 年 6 月 17 日(17.06.2013)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:

特願 2012-145098 2012 年 6 月 28 日(28.06.2012) JP

(71) 出願人: J F E スチール株式会社(JFE STEEL CORPORATION) [JP/JP]; 〒1000011 東京都千代田区内幸町二丁目 2 番 3 号 Tokyo (JP).

(72) 発明者: 豊田 俊介(TOYODA, Shunsuke); 〒1000011 東京都千代田区内幸町二丁目 2 番 3 号 J F E スチール株式会社知的財産部内 Tokyo (JP). 後藤 聡太(GOTO, Sota); 〒1000011 東京都千代田区内幸町二丁目 2 番 3 号 J F E スチール株式会社知的財産部内 Tokyo (JP). 岡部 能知(OKABE, Takatoshi); 〒1000011 東京都千代田区内

幸町二丁目 2 番 3 号 J F E スチール株式会社知的財産部内 Tokyo (JP). 井上 智弘(INOUE, Tomohiro); 〒1000011 東京都千代田区内幸町二丁目 2 番 3 号 J F E スチール株式会社知的財産部内 Tokyo (JP).

(74) 代理人: 熊坂 晃, 外(KUMASAKA, Akira et al.); 〒1000004 東京都千代田区大手町二丁目 7 番 1 号 J F E 商事ビル 6 階 J F E テクノリサーチ株式会社知的財産事業部内 Tokyo (JP).

(81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシ

[続葉有]

(54) Title: HIGH-STRENGTH ELECTRIC-RESISTANCE-WELDED STEEL PIPE OF EXCELLENT LONG-TERM SOFTENING RESISTANCE IN INTERMEDIATE TEMPERATURE RANGES, AND METHOD FOR PRODUCING SAME

(54) 発明の名称: 中温域の長期の耐軟化性に優れた高強度電縫鋼管およびその製造方法

図 1

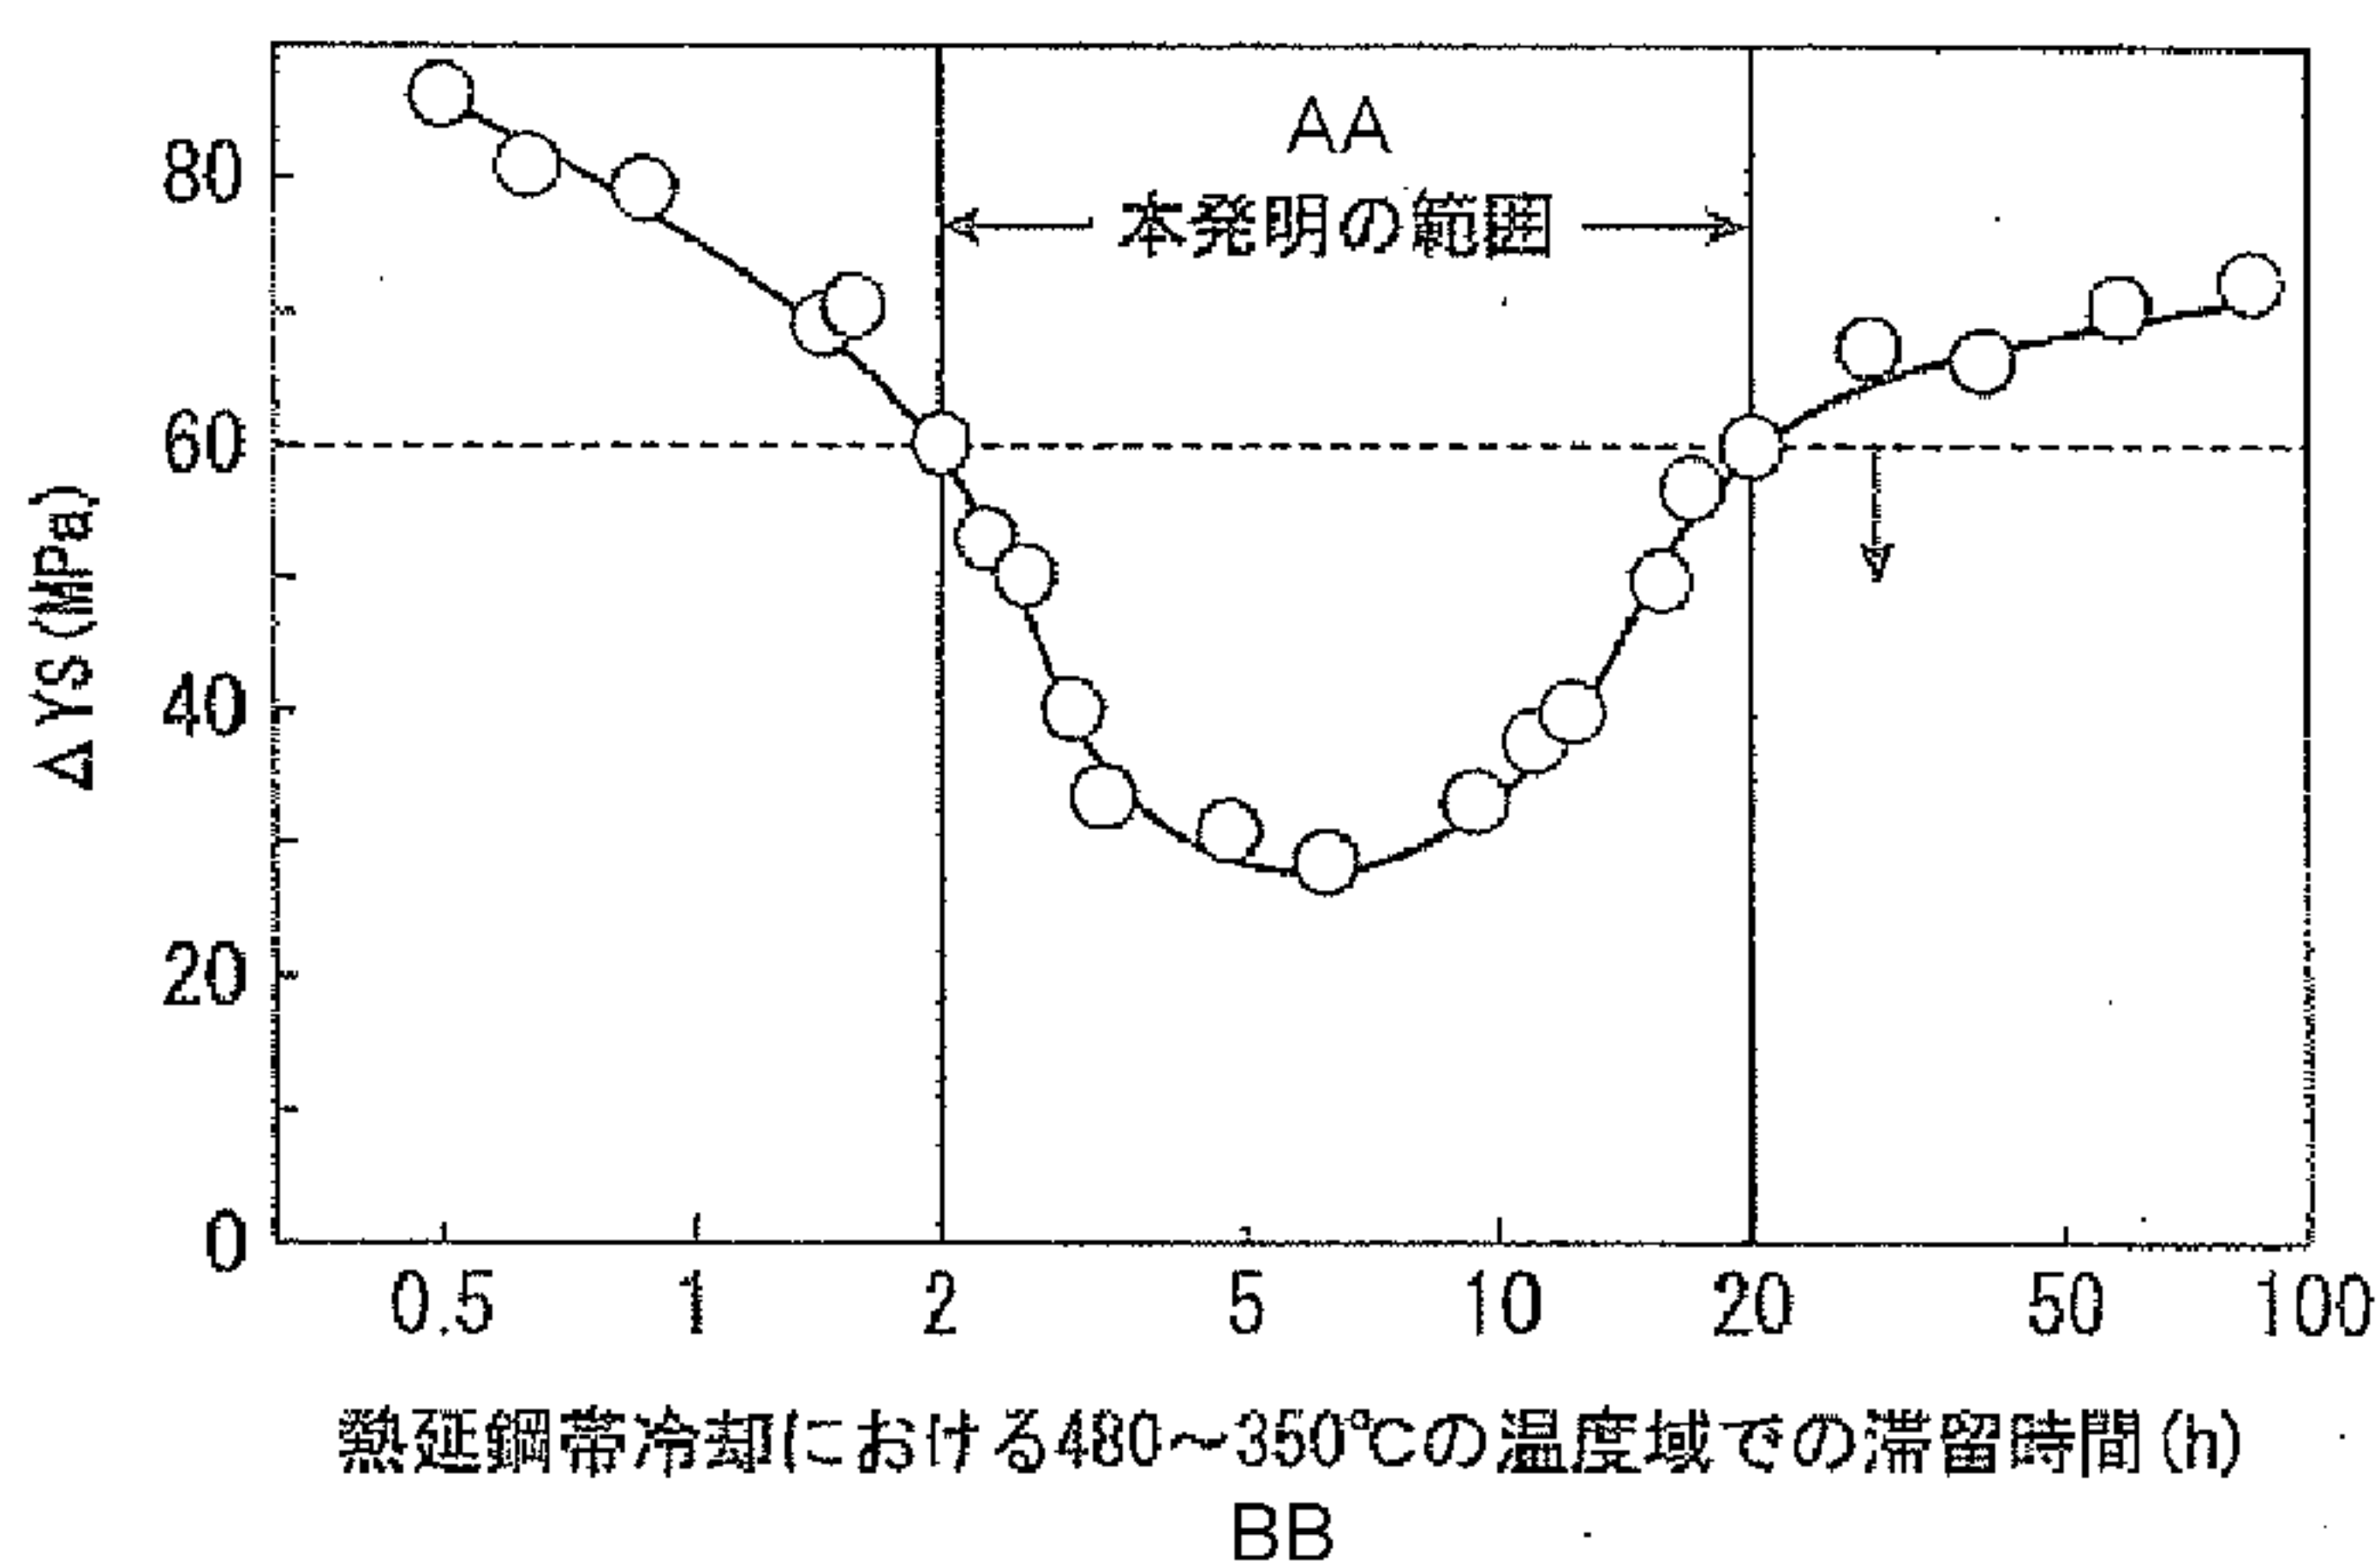

AA Range of the present invention
BB Residence time (h) at temperature range 480 to 350°C in hot-rolled steel strip cooling

cooling rate at 780-620°C in the thickness middle part temperature is in the range of 7-299°C/s is carried out, and the cumulative residence time at 500-360°C is adjusted to 2-200 s.

(57) 要約:

[続葉有]

WO 2014/002423 A1



ア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

添付公開書類:
— 国際調査報告 (条約第 21 条(3))

降伏強さ 450MPa 以上で、中温域での長期耐軟化性に優れる高強度電縫鋼管およびその製造方法を提供する。具体的には、質量％で、C : 0.026 ~ 0.084 %、Si : 0.10 ~ 0.30 %、Mn : 0.70 ~ 1.90 %、Al : 0.01 ~ 0.10 %、Nb : 0.001 ~ 0.070 %、V : 0.001 ~ 0.065 %、Ti : 0.001 ~ 0.033 %、Ca : 0.0001 ~ 0.0035 %を含み、かつ P_{cm} が 0.20 以下を満足する組成の鋼素材に、1200℃超 1280℃以下で 90min 以上加熱均熱し、未再結晶温度域での圧延率 : 20%以上とする熱間圧延を施し、圧延終了後、板厚中央部温度で 780 ~ 620℃での平均冷却速度が 7 ~ 299℃/s となる冷却を施し、ついで、480 ~ 350℃の温度域における累積滞留時間が 2 ~ 20 h に調整してなる熱延鋼帯を素材とし、通常の電縫造管により電縫鋼管とする。そして、オンラインで、電縫溶接部近傍の肉厚の全厚を 800 ~ 1150℃の範囲内の温度に加熱したのち、肉厚の中央部温度で 780℃ ~ 620℃での平均冷却速度が 7 ~ 299℃/s の範囲となる冷却を施し、さらに 500 ~ 360℃での累積滞留時間が 2 ~ 200 s となるように調整した処理を施す。

- 1 -

[Name of Document] Specification

[Title of Invention]

HIGH-STRENGTH ELECTRIC-RESISTANCE-WELDED STEEL PIPE OF
EXCELLENT LONG-TERM SOFTENING RESISTANCE IN INTERMEDIATE
TEMPERATURE RANGES, AND METHOD FOR PRODUCING SAME

[Technical Field]

[0001]

The present invention relates to a high strength electric resistance welded steel pipe or tube (hereinafter, a steel pipe or a steel tube is collectively called a steel pipe) which can be suitably used as a steel pipe for a steam line, in particular, to a high strength electric resistance welded steel pipe with excellent resistance to softening for a long period which undergoes only a small amount of decrease in strength (yield strength) after a long period of use in an intermediate temperature range. Here, "high strength" refers to a case where yield strength YS is 450 MPa or more. In addition, "an intermediate temperature range" refers to a temperature range of 300°C to 400°C.

[Background Art]

[0002]

Nowadays, extra-heavy crude oil called oil sand is receiving a lot of attention due to the development of oil extractive technologies. High-viscosity crude oil such as heavy oil called "bitumen" which is contained in oil sand

- 2 -

cannot be recovered from an oil well using an ordinary method. Therefore, an extractive technology called an in-situ recovery method, in which crude oil is recovered by injecting high-temperature vapor having a temperature higher than 300°C into an oil sand-bearing stratum in order to decrease the viscosity of the crude oil and by pumping up the dissolved heavy oil component called "bitumen", is being developed. Examples of a method for injecting high-temperature vapor into an oil sand-bearing stratum include a steam injection method. In this method, vapor which is heated up to a high temperature is transferred through a steam line and injected through an injection pipe.

[0003]

For a steam line through which vapor is transferred to a vapor injection well, seamless steel pipes or UOE steel pipes, which are manufactured by performing welding using a weld metal, have been used from the viewpoint of the reliability of pipes. Since the electric resistance weld zone of an electric resistance welded pipe is poor in terms of reliability, electric resistance welded pipes have not been used for use applications in which a high-temperature strength property is required. Electric resistance welded pipes have been used only for the parts which are used in near room temperature and for which a high-temperature strength property is not required.

- 3 -

[0004]

In order to solve such a problem, for example, Patent Literature 1 describes a method for manufacturing a high strength steel pipe for a steam line having excellent toughness in a welded heat-affected zone. The technique described in Patent Literature 1 is a technique in which a welded steel pipe is manufactured by heating a steel slab, having a chemical composition containing, by mass%, C: 0.05% to 0.09%, Si: 0.05% to 0.20%, Mn: 1.5% to 2.0%, P: 0.020% or less, S: 0.002% or less, Mo: 0.05% to 0.3%, Nb: 0.005% to 0.05%, Ti: 0.005% to 0.02%, Al: 0.01% to 0.04% and N: 0.004% to 0.006% in which the condition that Ti/N is 2.0 to 4.0 is satisfied, up to a temperature of 1000°C to 1200°C, by hot-rolling the heated steel slab under conditions such that the cumulative rolling reduction in a temperature range of 900°C or lower is 50% or more and the rolling finishing temperature is 850°C or lower, by cooling the hot rolled steel sheet down to a temperature of 400°C to 550°C by performing accelerated cooling at a cooling rate of 5°C/sec. or more, by forming the obtained steel plate into a pipe shape by performing cold forming and by welding the butt portions of the formed steel plate. According to the technique described in Patent Literature 1, it is possible to obtain a high strength welded steel pipe for a steam line having high yield strength and high toughness in a welded

- 4 -

heat-affected zone at a temperature of 350°C.

[0005]

In addition, Patent Literature 2, that is, Japanese Patent No. 4741528 (Japanese Unexamined Patent Application Publication No. 2008-195991), describes a method for manufacturing a steel pipe for a steam transporting line with excellent high-temperature properties. The technique described in Patent Literature 2 is a method for manufacturing a high strength steel pipe for a steam transporting line with excellent high-temperature properties, the method including heating a steel slab, having a chemical composition containing, by mass%, C: 0.02% to 0.10%, Si: 0.01% to 0.50%, Mn: 0.5% to 2.0%, Nb: 0.005% to 0.050%, Ti: 0.005% to 0.050%, N: 0.001% to 0.010% and B: 0.0001% to 0.0050%, or, further containing Mo, Cr, V, Ca, REM and so forth, in which the contents of P, S and Al are limited respectively to P: 0.020% or less, S: 0.005% or less and Al: 0.04% or less, and in which the condition that Ti/N is 2.0 to 4.0 is satisfied, up to a temperature of 1000°C to 1250°C, hot-rolling the heated slab under conditions such that the cumulative rolling reduction in a temperature range of 900°C or lower is 50% or more and the rolling finishing temperature is 850°C or lower, cooling the hot rolled steel sheet down to a temperature of 400°C to 550°C by performing accelerated cooling at a cooling rate of 5°C/sec. or more,

- 5 -

forming the obtained high strength steel plate into a pipe shape and welding the butted portions. According to the technique described in Patent Literature 2, it is possible to manufacture a high strength steel pipe having a large diameter for a steam transportation line with excellent high-temperature properties and longtime creep properties.

[Citation List]

[Patent Literature]

[0006]

[PTL 1] Japanese Unexamined Patent Application
Publication No. 2006-183133

[PTL 2] Japanese Patent No. 4741528 (Japanese
Unexamined Patent Application Publication No. 2008-195991)

[Summary of Invention]

[Technical Problem]

[0007]

However, in the case of techniques described by Patent Literatures 1 and 2, there is an inevitable welded heat-affected zone having a large grain diameter in steel pipes as a result of being heated up to a temperature just below the melting point. Since the high-temperature strength of a welded heat-affected zone decreases due to the presence of such a welded heat-affected zone, it causes concern that there may be a **decrease** in strength after a long period of use in an intermediate temperature range (300°C to 400°C).

- 6 -

Therefore, in the case where such steel pipes are used as steel pipes for steam line, it is necessary that a large strength safety ratio be applied, which results in a problem that a vapor temperature and inner pressure may be limited.

[0008]

An object of the present invention is, by solving the problems of related art described above, to provide a high strength electric resistance welded steel pipe having a high strength of 450 MPa or more in terms of yield strength YS and excellent resistance to softening for a long period in an intermediate temperature range (300°C to 400°C) which can be suitably used for a steam transportation line which enables more efficient and economic extraction of heavy oil component called "bitumen" which is dissolved by injecting high-temperature vapor into an oil sand-bearing stratum without limiting a vapor temperature or inner pressure and to provide a method for manufacturing the steel pipe.

[0009]

Here, "excellent resistance to softening for a long period in an intermediate temperature range" refers to a case where, when a high-temperature tensile test is performed at a temperature of 350°C before and after a heat treatment at a temperature of 400°C and for a duration of 2340 hours, the amount Δ YS of change (decrease) in yield strength between before and after the heat treatment is 60

- 7 -

MPa or less. The heat treatment at a temperature of 400°C and for a duration of 2340 hours corresponds to a heat treatment at a temperature of 350°C and for a duration of 20 years as converted using a Larson-Miller parameter (refer to F.R. Larson and J. Miller: Trans. ASME, vol. 74 (1952), 99, pp 765 to 775) which is used to assemble creep rupture data collected by performing creep tests at different temperatures. A Larson-Miller parameter is defined by the following equation:

Larson-Miller parameter = $(T+273) \times (C+\log(t))$,

(where T: temperature (°C), t: time (hour) and C: constant = 20).

[Solution to Problem]

[0010]

The present inventors, in order to achieve the object described above, diligently conducted investigations regarding various factors having influences on high-temperature strength and resistance to softening for a long period in an intermediate temperature range in the welded heat-affected zone of an electric resistance weld zone. As a result, the present inventors found that, in order to increase high-temperature strength and resistance to softening for a long period in an intermediate temperature range, it is important that a microstructure in a base metal portion and an electric resistance weld zone include a

- 8 -

quasi-polygonal ferrite phase as a main phase and have a small grain diameter and that the microstructure be stabilized as a result of the stabilization of precipitates. [0011]

In addition, the present inventors found that, in order to stabilize precipitates, a holding time in a temperature range of 350°C to 450°C in a manufacturing process of a raw material for a steel pipe (hot rolled steel sheet) is important. Moreover, it was found that, in order to stabilize precipitates and a microstructure in an electric resistance weld zone, an online heat treatment is necessary and a thermal history in the treatment is important.

In addition, the present inventors found that, in order to increase resistance to softening for a long period in an intermediate temperature range, it is effective to decrease the number of inclusions having a large grain diameter of 5 μm or more in an electric resistance weld zone and that, in order to realize this effect, it is effective to form a particular groove shape when electric resistance welding is performed.

[0012]

First, experimental results which became the basis of the present invention will be described.

A hot rolled steel sheet having a thickness of 19.1 mm was manufactured by heating and soaking a steel material

- 9 -

(continuous casting slab having a thickness of 250 mm) having a chemical composition containing, by mass%, 0.05%C, 0.2%Si, 1.7%Mn, 0.03%Al, 0.05%Nb, 0.05%V, 0.02%Ti, 0.0015%Ca, and 0.20%Cr at a temperature of 1250°C for 120 minutes and by performing hot rolling including rough rolling and finish rolling under conditions such that the hot rolling reduction in an un-recrystallization temperature range (also called a temperature range lower than the recrystallization temperature) was 50% and a finish rolling completing temperature was 810°C. Immediately after finish rolling had been performed, the hot rolled steel sheet was cooled on a run out table of hot rolling, in terms of the temperature of the central portion in the thickness direction, down to a cooling stop temperature of 500°C at an average cooling rate of 28°C/sec. in a temperature range of 780°C to 620°C, and coiled into a coil shape at a coiling temperature of 500°C. The coiled hot rolled steel sheet was subjected to a thermal history in which a holding time in a temperature range of 350°C to 480°C was 0.5 hour to 90 hours.

[0013]

Using the obtained hot rolled steel sheet as a raw material for a steel pipe, an electric resistance welded pipe (having an outer diameter of 508 mm ϕ) was manufactured by slitting the hot rolled steel sheet into a specified width, by continuously forming the slit hot rolled steel

- 10 -

sheet into an open pipe having an approximately circular cross section using a roll forming method and by performing electric resistance welding in which the vicinity of the butt portions of the open pipe were heated up to a temperature equal to or higher than the melting point and welded with pressure using a squeeze roll.

A test material was cut out of the obtained electric resistance welded pipe and subjected to a heat treatment at a temperature of 400°C and for a duration of 2340 hours. ASTM E8 round bar type specimens (having a parallel portion of 6.35 mm ϕ and a GL (gauge length) of 25.4 mm) were cut out of the base metal portions of the test material which had been subjected to the heat treatment and the test material which had not been subjected to the heat treatment so that the tensile direction was the circumferential direction of the pipe. The base metal portion was defined as a portion at a position located 180° from the electric resistance weld zone. Here, flattening of a steel pipe was not performed when the specimen was cut out of the pipe.

[0014]

A tensile test was performed in order to determine yield strength YS in a manner such that the test temperature was set to be 350°C and the specimen was held at the test temperature for 15 minutes before tensile test was performed and that the speed of testing rate of stressing was 0.5%/min

- 11 -

when the stress was equal to or less than the YS and 5 mm/min when the stress was more than the YS.

Using the determined values of yield strength YS, the amount Δ YS of decrease in YS between before and after the heat treatment was calculated. The obtained results are illustrated in Fig. 1 in the form of the relationship between Δ YS and a holding time in a temperature range of 350°C to 480°C.

Fig. 1 indicates that Δ YS becomes less than 60 MPa by controlling a holding time in a temperature range of 350°C to 480°C to be 2 hours to 20 hours, which means that there is an increase in resistance to softening for a long period. [0015]

Subsequently, the present inventors found that, in order to increase the resistance to softening for a long period of an electric resistance weld zone, it is particularly effective to decrease the number of inclusions having a large grain diameter in an electric resistance weld zone. Test materials which were cut out of electric resistance welded pipes which were manufactured using various conditions of electric resistance welding and groove shapes and which were subjected to an online heat treatment were subjected to a heat treatment at a temperature of 400°C and for a duration of 2340 hours. ASTM E8 round bar type specimens (having a parallel portion of 6.35 mm ϕ and a GL of

- 12 -

25.4 mm) were cut out of the electric resistance weld zone of the test material which had been subjected to the heat treatment and the test material which had not been subjected to the heat treatment so that the tensile direction was the circumferential direction of the pipe. The round bar type specimen was cut out of the electric resistance weld zone so that the seam of the electric resistance weld zone was located at the center of the parallel portion of the specimen. Here, flattening of a steel pipe was not performed when the specimen was cut out of the pipe. A tensile test was performed in order to determine yield strength YS in a manner such that the test temperature was set to be 350°C and the specimen was held at the test temperature for 15 minutes before tensile test was performed and that the speed of testing rate of stressing was 0.5%/min when the stress was equal to or less than the YS and 5 mm/min when the stress was more than the YS. Using the determined values of yield strength YS, the amount ΔYS of decrease in YS between before and after the heat treatment was calculated.

[0016]

Moreover, a plate type specimen having a width of 2 mm (having a width of 2 mm, thickness equal to the whole thickness and a length equal to the whole thickness) and having the center of the electric resistance weld zone

- 13 -

positioned at the center of the specimen was cut out of the electric resistance weld zone of the obtained electric resistance welded pipe. By performing electrolytic extraction on this plate type specimen in an electrolytic solution (10% AA-based electrolytic solution: 10% acetylacetone, 1% tetramethylammonium chloride, and methanol), by collecting obtained extraction residue using a filter mesh (having a hole diameter of 5 μm), by determining the respective contents (mass ppm) of Si, Mn, Al, Ca and Cr in the extraction residue using inductively coupled plasma atomic emission spectroscopy, and by calculating the total value of the contents, the total value was defined as the number of inclusions having a large equivalent circle diameter of 5 μm or more in the electric resistance weld zone. Here, "equivalent circle diameter" means the diameter of a circle having the same area as the area of an inclusion. [0017]

The obtained results are illustrated in Fig. 2 in the form of the relationship between ΔYS and the total value of the contents (mass ppm) of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more in an electric resistance weld zone.

Fig. 2 indicates that ΔYS becomes less than 60 MPa in the case where the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter

- 14 -

of 5 μm or more is 49 mass ppm or less, which means that there is an increase in resistance to softening for a long period. In addition, it was also found that there is a decrease in the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more by forming a taper type groove in the cross sections of the butt portion of an open pipe.

[0018]

The present invention has been completed on the basis of the knowledge and further investigations. That is to say, the subject matter of the present invention is as follows.

(1) A high strength electric resistance welded pipe having a chemical composition containing, by mass%, C: 0.025% or more and 0.084% or less, Si: 0.10% or more and 0.30% or less, Mn: 0.70% or more and 1.90% or less, P: 0.018% or less, S: 0.0029% or less, Al: 0.01% or more and 0.10% or less, Nb: 0.001% or more and 0.070% or less, V: 0.001% or more and 0.065% or less, Ti: 0.001% or more and 0.033% or less, Ca: 0.0001% or more and 0.0035% or less, N: 0.0050% or less, O: 0.0030% or less and the balance being Fe and inevitable impurities, in which the condition that P_{cm} which is defined by equation (1) below is 0.20 or less is satisfied, having a microstructure in a base metal portion including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase and the balance being hard phases other than the quasi-polygonal ferrite phase, in which the quasi-polygonal ferrite phase has an average

grain diameter of 10 μm or less, having a microstructure in an electric resistance weld zone including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase and the balance being hard phases other than the quasi-polygonal ferrite phase, in which the quasi-polygonal ferrite phase has an average grain diameter of 10 μm or less, and having a yield strength YS of 450 MPa or more and a change in yield strength ΔYS of less than 60 MPa between before and after a heat treatment at a temperature of 400°C for a duration of 2340 hours:

$$\text{Pcm} = \text{C} + \text{Si}/30 + \text{Mn}/20 + \text{Cu}/20 + \text{Ni}/60 + \text{Cr}/20 + \text{Mo}/15 + \text{V}/10 + 5\text{B} \quad \dots (1)$$

where C, Si, Mn, Cu, Ni, Cr, Mo, V and B represent the contents, mass% of chemical elements respectively represented by the corresponding atomic symbols.

(2) The high strength electric resistance welded pipe according to item (1), wherein the pipe has the chemical composition further containing, by mass%, one or more selected from among Cu: 0.001% or more and 0.350% or less, Ni: 0.001% or more and 0.350% or less, Mo: 0.001% or more and 0.350% or less and Cr: 0.001% or more and 0.350% or less.

(3) The high strength electric resistance welded pipe according to item (1) or (2), wherein the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in the electric resistance weld zone is 49 mass ppm or less.

- 16 -

(4) A method for manufacturing a high strength electric resistance welded pipe having a yield strength YS of 450 MPa or more, in which an electric resistance welded pipe is manufactured by continuously forming a hot rolled steel sheet into an open pipe having an approximately circular cross section using a roll forming method, by performing electric resistance welding in which a vicinity of butt portions of the open pipe are heated up to a temperature equal to or higher than the melting point and welded with pressure using a squeeze roll to make an electric resistance welded pipe having an electric resistance weld zone and by subsequently performing an online heat treatment on the electric resistance welded pipe, the method comprising heating and soaking a steel material having a chemical composition containing, by mass%, C: 0.025% or more and 0.084% or less, Si: 0.10% or more and 0.30% or less, Mn: 0.70% or more and 1.90% or less, P: 0.018% or less, S: 0.0029% or less, Al: 0.01% or more and 0.10% or less, Nb: 0.001% or more and 0.070% or less, V: 0.001% or more and 0.065% or less, Ti: 0.001% or more and 0.033% or less, Ca: 0.0001% or more and 0.0035% or less, N: 0.0050% or less, O: 0.0030% or less and the balance being Fe and inevitable impurities, wherein the condition that P_{cm} which is defined by equation (1) below is 0.20 or less is satisfied, at a temperature of higher than 1200°C and 1280°C or lower for 90 minutes or more, performing hot rolling under conditions such that the hot rolling reduction in an un-recrystallization temperature range is 20% or more and

- 17 -

finish rolling completing temperature is 750°C or higher, cooling the hot rolled steel sheet, in terms of the temperature of the central portion in the thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and 299°C/sec. or less in a temperature range of 780°C to 620°C, coiling the hot rolled steel sheet at a coiling temperature of 595°C or lower and 475°C or higher, subsequently performing a heat treatment under conditions such that the coiled hot rolled steel sheet is subjected to a cumulative holding time in a temperature range of 480°C to 350°C for 2 hours or more and 20 hours or less, performing the online heat treatment under conditions such that the whole of the wall thickness in the vicinity of the electric resistance weld zone is heated up to a temperature of 800°C or higher and 1150°C or lower and then cooled, in terms of the temperature of a central portion in the wall thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and 299°C/sec. or less in a temperature range of 780°C to 620°C, and further subjected to a cumulative holding time in a temperature range of 500°C to 360°C for 2 seconds or more and

200 seconds or less:

$$P_{cm} = C + Si/30 + Mn/20 + Cu/20 + Ni/60 + Cr/20 + Mo/15 + V/10 + 5B \quad \dots (1),$$

- 18 -

where C, Si, Mn, Cu, Ni, Cr, Mo, V and B represent the contents, mass% of chemical elements respectively represented by the corresponding atomic symbols.

(5) The method for manufacturing a high strength electric resistance welded pipe according to item (4), wherein the steel material has the chemical composition further containing, by mass%, one or more selected from among Cu: 0.001% or more and 0.350% or less, Ni: 0.001% or more and 0.350% or less, Mo: 0.001% or more and 0.350% or less and Cr: 0.001% or more and 0.350% or less.

(6) The method for manufacturing a high strength electric resistance welded pipe according to item (4) or (5), wherein the method includes forming a taper type groove in both end faces in the width direction of the hot rolled steel sheet when finpass forming is performed in the roll forming such that the distance in the thickness direction of the hot rolled steel sheet between the starting position of the taper and the surface of the steel sheet which is to become the outer or inner surface of a steel pipe is 2% to 80% of the thickness of the hot rolled steel sheet.

(7) The method for manufacturing a high strength electric resistance welded pipe according to any one of items (4) to (6), wherein the electric resistance welding is performed in an atmosphere in which an oxygen concentration is less than in atmospheric air.

- 19 -

(8) The method for manufacturing a high strength electric resistance welded pipe according to any one of items (4) to (7), wherein the total content of Si, Mn, Al and Ca contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in the electric resistance weld zone is 49 mass ppm or less.

[Advantageous Effects of Invention]

[0019]

According to the present invention, a high strength electric resistance welded pipe having a base metal portion and an electric resistance weld zone which have a high strength of 450 MPa or more in terms of yield strength YS and excellent resistance to softening in a long period in an intermediate temperature range (300°C to 400°C) can be stably manufactured and used as a steel pipe for a stream line, which results in a significant industrial effect.

- 20 -

[Brief Description of Drawings]

[0020]

[Fig. 1]

Fig. 1 is a graph illustrating the relationship between ΔYS and a holding time in a temperature range of 480°C to 350°C in cooling of hot rolled steel sheets.

[Fig. 2]

Fig. 2 is a graph illustrating the relationship between ΔYS and the total content of Si, Mn, Al and Ca contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in an electric resistance weld zone.

[Description of Embodiments]

[0021]

First, reasons for the limitations on the chemical composition of the high strength electric resistance welded steel pipe according to the present invention will be described. Hereinafter, mass% used when describing a chemical composition is simply represented by %.

C: 0.025% or more and 0.084% or less

C is effective for increasing the strength of a steel pipe as a result of contributing to the formation of hard phases such as a pearlite phase, a quasi-pearlite phase, a cementite phase, a bainite phase and a martensite phase. In order to realize this effect and achieve the desired yield strength YS of 400 MPa or more, it is necessary that the C

- 21 -

content be 0.025% or more. On the other hand, in the case where the C content is more than 0.084%, since there is an increase in the amount of hard phases in a base metal portion and an electric resistance weld zone, there is a deterioration in resistance to softening in a long period. Therefore, the C content is set to be 0.025% or more and 0.084% or less, preferably 0.030% or more and 0.060% or less. In addition to the effect described above, C has an influence on the formation of oxides in an electric resistance weld zone through a decrease in the solidification point, a CO forming reaction with O₂ and so forth when electric resistance welding is performed.

[0022]

Si: 0.10% or more and 0.30% or less

Si contributes to an increase in the strength of a steel pipe through solute strengthening. In addition, since Si has a larger affinity for O than Fe has, Si forms eutectic oxides having a high viscosity together with Mn oxides when electric resistance welding is performed. In the case where the Si content is less than 0.10%, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Mn concentration in the eutectic oxides, Mn is likely to be retained in an electric resistance weld zone in the form of oxides when electric resistance welding is performed. Therefore, since

- 22 -

there is an increase in Mn content in inclusions having an equivalent circle diameter of 5 μm or more which are present in an electric resistance weld zone, the total content of Si, Mn, Al, Ca and Cr becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. On the other hand, in the case where the Si content is more than 0.30%, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Si content in the eutectic oxides when electric resistance welding is performed, there is an increase in the absolute amount of oxides and Si is likely to be retained in an electric resistance weld zone in the form of oxides. Therefore, since there is an increase in Si and Mn content in inclusions having an equivalent circle diameter of 5 μm or more which are present in an electric resistance weld zone, the total content of Si, Mn, Al, Ca and Cr becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. Therefore, the Si content is set to be 0.10% or more and 0.30% or less, preferably 0.15% or more and 0.25% or less.

[0023]

Mn: 0.70% or more and 1.90% or less

Mn contributes to an increase in the strength of a

- 23 -

steel pipe through solute strengthening and transformation structure strength. In addition, since Mn has a larger affinity for O than Fe has, Mn forms eutectic oxides having a high viscosity together with Si oxides when electric resistance welding is performed. In the case where the Mn content is less than 0.70%, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Si concentration in the eutectic oxides when electric resistance welding is performed, Si is likely to be retained in an electric resistance weld zone in the form of oxides. Therefore, since there is an increase in Si content in inclusions having an equivalent circle diameter of 5 μm or more which are present in an electric resistance weld zone, the total content of Si, Mn, Al, Ca and Cr becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. On the other hand, in the case where the Mn content is more than 1.90%, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Mn content in the eutectic oxides when electric resistance welding is performed, there is an increase in the absolute amount of oxides and Mn is likely to be retained in an electric resistance weld zone in the form of oxides. Therefore, the total content of Si, Mn, Al, Ca and Cr contained in

- 24 -

inclusions having an equivalent circle diameter of 5 μm or more becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. In addition, in the case where the Mn content is more than 1.90%, since there is an increase in the amount of hard phases in a base metal portion and an electric resistance weld zone, there is a deterioration in resistance to softening for a long period.

[0024]

Therefore, the Mn content is set to be 0.70% or more and 1.90% or less, preferably 0.85% or more and 1.85% or less.

P: 0.018% or less

Since P deteriorates the resistance to softening for a long period of a base metal portion and an electric resistance weld zone as a result of co-segregation with Mn, it is preferable that the P content be as small as possible, but it is allowable if the P content is 0.018% or less. Therefore, the P content is set to be 0.018% or less. An excessive decrease in P content causes an increase in refining cost. It is preferable that the P content be 0.001% or more from the viewpoint of the economic efficiency of a steelmaking process.

[0025]

S: 0.0029% or less

- 25 -

Since S deteriorates ductility and toughness as a result of combining with Mn to form MnS and being present in steel in the form of inclusions, it is preferable that the S content be as small as possible. In particular, in the case where the S content is more than 0.0029%, there is a deterioration in resistance to softening for a long period. Therefore, the S content is set to be 0.0029% or less. In addition, an excessive decrease in S content causes an increase in refining cost. It is preferable that the S content be 0.0001% or more from the viewpoint of the economic efficiency of a steelmaking process.

[0026]

Al: 0.01% or more and 0.10% or less

Al functions as a deoxidation agent in a steelmaking process. In addition, Since Al suppresses an increase in γ grain diameter as a result of combining with N to form AlN and precipitating, Al contributes to an improvement in the low-temperature toughness of steel. In order to realize this effect, it is necessary that the Al content be 0.01% or more. In the case where the Al content is less than 0.01%, since there is a deterioration in the cleanness of steel due to a sufficient deoxidation effect not being achieved in a steelmaking process, there is an increase in the amount of oxides in an electric resistance weld zone, which results in the total content of Si, Mn, Al, Ca and Cr contained in

- 26 -

inclusions having an equivalent circle diameter of 5 μm or more becoming more than 49 ppm. As a result, there is a deterioration in resistance to softening for a long period. In addition, since Al has a much larger affinity for O than Si and Mn have, Al forms oxides in the form of solid solutions in Mn-Si eutectic oxides such as $2\text{MnO} \cdot \text{SiO}_2$ (Tephroite). On the other hand, in the case where the Al content is more than 0.10%, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Al concentration in the eutectic oxides when electric resistance welding is performed, Al is likely to be retained in an electric resistance weld zone in the form of oxides. Therefore, since there is an increase in the contents of Si, Mn and Al in inclusions which are present in an electric resistance weld zone, the total content of Si, Mn, Al, Ca and Cr in inclusions having an equivalent circle diameter of 5 μm or more becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period. Therefore, the Al content is set to be 0.01% or more and 0.10% or less, preferably 0.02% or more and 0.08% or less.

[0027]

Nb: 0.001% or more and 0.070% or less

Nb is effective for increasing the strength of a steel pipe through precipitation strengthening as a result of

- 27 -

precipitating mainly in the form of carbides. In order to realize this effect, it is necessary that the Nb content be 0.001% or more. On the other hand, in the case where the Nb content is more than 0.070%, non-solid solution Nb carbonitrides having a large grain diameter are retained, which results in a deterioration in resistance to softening for a long period. Therefore, the Nb content is set to be 0.001% or more and 0.070% or less, preferably 0.051% or more and 0.065% or less.

[0028]

V: 0.001% or more and 0.065% or less

V is, like Nb, effective for increasing the strength of a steel pipe through precipitation strengthening as a result of precipitating mainly in the form of carbides. In order to realize this effect, it is necessary that the V content be 0.001% or more. On the other hand, in the case where the V content is more than 0.065%, non-solid solution V carbonitrides having a large grain diameter are retained, which results in a deterioration in resistance to softening for a long period. Therefore, the V content is set to be 0.001% or more and 0.065% or less, preferably 0.005% or more and 0.050% or less.

[0029]

Ti: 0.001% or more and 0.033% or less

Ti is, like Nb and V, effective for increasing the

- 28 -

strength of a steel pipe through precipitation strengthening as a result of precipitating mainly in the form of carbides. In order to realize this effect, it is necessary that the Ti content be 0.001% or more. On the other hand, in the case where the Ti content is more than 0.033%, non-solid solution Ti carbonitrides having a large grain diameter are retained, which results in a deterioration in resistance to softening for a long period. Therefore, the Ti content is set to be 0.001% or more and 0.033% or less, preferably 0.005% or more and 0.020% or less.

[0030]

Ca: 0.0001% or more and 0.0035% or less

Since Ca is effective for morphological control for spheroidizing sulfides in steel, Ca is effective for improving toughness and HIC resistance (Hydrogen Induced Cracking resistance) in the vicinity of the electric resistance weld zone of a steel pipe. In order to realize this effect, it is necessary that the Ca content be 0.0001% or more. On the other hand, in the case where the Ca content is more than 0.0035% excessively, since the melting point of the oxides becomes higher than a liquid steel temperature due to an increase in Ca content in the oxides, there is an increase in the amount of oxides and Ca is likely to be retained in an electric resistance weld zone in the form of oxides when electric resistance welding is

- 29 -

performed. Therefore, since there is an increase in the Ca content in inclusions which are present in an electric resistance weld zone, the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in an electric resistance weld zone becomes more than 49 mass ppm. As a result, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. Therefore, the Ca content is set to be 0.0001% or more and 0.0035% or less, preferably 0.0002% or more and 0.0028% or less.

[0031]

N: 0.0050% or less

N precipitates in the form of $\text{Ti}(\text{N},\text{C})$ as a result of combining with Ti which is a carbonitride forming element, or N is retained in the form of solute N. In the case where the N content is more than 0.0050%, since there is an increase in the amounts of $\text{Ti}(\text{N},\text{C})$ and solute N, there is a deterioration in resistance to softening in a long period. Therefore, the N content is set to be 0.0050% or less, preferably 0.0040% or less.

[0032]

O: 0.0030% or less

O deteriorates ductility and toughness as a result of being present in steel mainly in the form of oxide-based

- 30 -

inclusions. In the case where the O content is more than 0.0030%, since the amount of inclusions becomes excessively large, there is, in particular, a significant deterioration in resistance to softening in a long period. Therefore, the O content is set to be 0.0030% or less.

Although the chemical components described above are the basic components, in addition to the basic chemical composition described above, one or more selected from among Cu: 0.001% or more and 0.350% or less, Ni: 0.001% or more and 0.350% or less, Mo: 0.001% or more and 0.350% or less and Cr: 0.001% or more and 0.350% or less may be added.

[0033]

Since Cu, Ni, Mo and Cr are all chemical elements which contribute to an increase in hardenability, one or more of these chemical elements may be added as needed in order to achieve the desired high strength.

Cu: 0.001% or more and 0.350% or less

Since Cu is a chemical element which increases hardenability, it is preferable that Cu be added in order to increase the strength of, in particular, thick-walled sheets. In order to realize this effect, it is preferable that the Cu content be 0.001% or more. On the other hand, in the case where the Cu content is more than 0.350%, since the effect becomes saturated, an effect corresponding to the content cannot be expected. Therefore, in the case where Cu

- 31 -

is added, it is preferable that the Cu content be 0.001% or more and 0.350% or less, more preferably 0.05% or more and 0.290% or less.

[0034]

Ni: 0.001% or more and 0.350% or less

Since Ni is, like Cu, a chemical element which increases hardenability, it is preferable that Cu be added in order to increase the strength of, in particular, thick-walled sheets. In order to realize this effect, it is preferable that the Ni content be 0.001% or more. On the other hand, in the case where the Ni content is more than 0.350%, since the effect becomes saturated, an effect corresponding to the content cannot be expected. Therefore, in the case where Ni is added, it is preferable that the Ni content be 0.001% or more and 0.350% or less, more preferably 0.05% or more and 0.290% or less.

[0035]

Mo: 0.001% or more and 0.350% or less

Since Mo is, like Ni and Cu, a chemical element which increases hardenability, it is preferable that Cu be added in order to increase the strength of, in particular, thick-walled sheets. In order to realize this effect, it is preferable that the Mo content be 0.001% or more. On the other hand, in the case where the Mo content is more than 0.350%, since the effect becomes saturated, an effect

- 32 -

corresponding to the content cannot be expected. Therefore, in the case where Mo is added, it is preferable that the Mo content be 0.001% or more and 0.350% or less, more preferably 0.05% or more and 0.290% or less.

[0036]

Cr: 0.001% or more and 0.700% or less

Since Cr is a chemical element which increases hardenability, it is preferable that Cr be added in order to increase the strength of, in particular, thick-walled sheets. In addition, Cr is, like Mn, effective for achieving the desired high strength and microstructure for a steel pipe through transformation toughening. In order to realize these effects, it is preferable that the Cr content be 0.001% or more. In addition, since Cr has a larger affinity for O than Fe has, there is an increase in Cr concentration in oxides when electric resistance welding is performed in the case where the Cr content is more than 0.700%, which results in the melting point of the oxides becoming higher than the liquid steel temperature. Therefore, there is an increase in the amount of oxides and Cr is likely to be retained in an electric resistance weld zone in the form of oxides. Therefore, since there is an increase in the amount of inclusions which are present in an electric resistance weld zone the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter

- 33 -

of 5 μm or more in an electric resistance weld zone becomes more than 49 mass ppm. Therefore, in the case where Cr is added, it is preferable that the Cr content be 0.001% or more and 0.700% or less, more preferably 0.02% or more and 0.290% or less.

[0037]

Moreover, the high strength electric resistance welded steel pipe according to the present invention has a chemical composition containing the chemical components described above in the ranges described above, and the chemical composition is controlled so that the condition that Pcm which is defined by equation (1) below is 0.20 or less is satisfied:

$$\text{Pcm} = \text{C} + \text{Si}/30 + \text{Mn}/20 + \text{Cu}/20 + \text{Ni}/60 + \text{Cr}/20 + \text{Mo}/15 + \text{V}/10 + 5\text{B} \quad \cdots (1),$$

(where C, Si, Mn, Cu, Ni, Cr, Mo, V and B: the contents (mass%) of chemical elements respectively represented by the corresponding atomic symbols).

[0038]

Pcm is an index having an influence on the formation of a microstructure in an electric resistance weld zone when rapid cooling is performed, and Pcm is set to be 0.20 or less in the present invention, preferably 0.17 or less.

In the case where Pcm is more than 0.20, it is difficult to form a microstructure mainly including a quasi-

- 34 -

polygonal ferrite phase as a main phase in an electric resistance weld zone. Therefore, there is a deterioration in the resistance to softening for a long period of an electric resistance weld zone. In addition, although there is no particular limitation on the lower limit of Pcm, it is preferable that Pcm be controlled to be 0.07 or more in order to stably achieve a YS of 450 MPa or more.

[0039]

Subsequently, reasons for the limitations on the microstructure of the high strength electric resistance welded steel pipe according to the present invention will be described.

Both of the base metal portion and electric resistance weld zone of the high strength electric resistance welded steel pipe according to the present invention have a microstructure including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase and the balance being hard phases other than a quasi-polygonal ferrite phase, in which the average grain diameter of the main phases such as a quasi-polygonal ferrite phase is 10 μm or less. Second phases other than the main phase constitute, in terms of volume percentage, 10% or less of the microstructure and are hard phases such as a pearlite phase, a quasi-pearlite phase, a cementite phase, a bainite phase and a martensite phase. In the case where the hard

- 35 -

phases which are the second phases constitute more than 10% of the microstructure, since there is an excessive increase in strength, there is a deterioration in resistance to softening for a long period.

[0040]

Here, "quasi-polygonal ferrite phase" means a microstructure which has a nondimensional shape, which is formed in a temperature range of lower than about 600°C and 400°C or higher, which is a lower range in which a polygonal ferrite phase is formed, by growing across prior-austenite boundaries and in which most of transformation strain is recovered. This microstructure is the same as "Quasi-polygonal Ferrite α q" which is described in "Atlas for Bainitic Microstructures Vol.-1" (edited by Bainite Research Committee, Society on Basic Research, The Iron and Steel Institute of Japan, and published by The Iron and Steel Institute of Japan (1992.6.29); see p. 4).

[0041]

By forming a microstructure including a quasi-polygonal ferrite phase having an average grain diameter of 10 μ m or less as main phase in an amount of 90% or more in terms of volume percentage, it is possible to manufacture an electric resistance welded steel pipe having a high strength of 450 MPa or more in terms of yield strength YS, excellent resistance to softening in a long period and an excellent

- 36 -

creep rupture property. In the case where there is a decrease in the fraction of a quasi-polygonal ferrite phase and a phase other than a quasi-polygonal ferrite phase such as a bainite phase becomes a main phase, since there is an excessive increase in strength, there is a deterioration in resistance to softening for a long period. In addition, in the case where a polygonal ferrite phase becomes a main phase, since there is a decrease in strength, the desired high strength cannot be achieved and there is a deterioration in resistance to softening in a long period. In addition, in the case where the average grain diameter is more than 10 μm , there is a decrease in strength in an intermediate temperature range.

[0042]

Subsequently, a method for manufacturing the electric resistance welded pipe according to the present invention will be described.

An electric resistance welded pipe is manufactured by continuously forming a hot rolled steel sheet into an open pipe having an approximately circular cross section using a roll forming method and by performing common electric resistance welding in which the vicinity of the butt portions of the open pipe are heated up to a temperature equal to or higher than the melting point and welded with pressure using a squeeze roll.

- 37 -

The hot rolled steel sheet which becomes the raw material for a steel pipe is manufactured using the steel material having the chemical composition described above as a starting material. Although there is no particular limitation on what method is used for manufacturing the steel material, it is preferable that the steel material be smelted using, for example, a common converter and be cast into, for example, a slab using a common continuous casting process.

[0043]

A raw material for a steel pipe is manufactured by heating and soaking a steel material having the chemical composition, by performing hot rolling on the heated steel material and by coiling the hot rolled steel material into a coil shape in order to manufacture a hot rolled steel sheet.

Heating temperature: higher than 1200°C and 1280°C or lower and holding time: 90 minutes or more

A heating temperature has an influence on the strength and resistance to softening for a long period of a base metal portion. In the case where the heating temperature is 1200°C or lower, since precipitation strengthening elements such as Nb, V and Ti do not reform solid solutions and are retained in the form of precipitates having a large grain diameter, it is difficult to achieve the desired high strength of 450 MPa or more in terms of YS. In addition, in

- 38 -

the case where precipitates having a large grain diameter is retained without forming solid solutions, there is a deterioration in the resistance to softening for a long period of a base metal portion. On the other hand, in the case where the heating temperature is higher than 1280°C, there is a deterioration in resistance to softening for a long period due to an increase in grain diameter in a microstructure.

[0044]

In addition, in the case where the holding time is less than 90 minutes, precipitation strengthening elements such as Nb, V and Ti do not reform solid solutions and are retained in the form of precipitates having a large grain diameter, in particular, in the central portion in the thickness direction. Precipitates having a large grain diameter deterioration the resistance to softening for a long period. Therefore, the heating temperature is set to be higher than 1200°C and 1280°C or lower, and the holding time is set to be 90 minutes or more.

The heated and soaked steel material is made into a hot rolled steel sheet by performing hot rolling including rough rolling and finish rolling.

[0045]

There is no limitation on rough rolling conditions as long as a sheet bar having specified size and shape can be

- 39 -

manufactured. After rough rolling has been performed, finish rolling is performed. Finishing rolling is performed under conditions such that the hot rolling reduction in an un-recrystallization temperature range is 20% or more and the finish rolling completing temperature is 750°C or higher.

Hot rolling reduction in an un-crystallization temperature range: 20% or more

In the case where the hot rolling reduction in an un-crystallization temperature range is less than 20%, since an average grain diameter in the microstructure of the obtained hot rolled steel sheet becomes more than 10 μm , there is a deterioration in the resistance to softening for a long period of a base metal portion. Although there is no particular limitation on the upper limit of the hot rolling reduction, it is preferable that the upper limit be 95% or less from the viewpoint of a load on a rolling mill.

[0046]

Finish rolling completing temperature: 750°C or higher

In the case where the finish rolling completing temperature is lower than 750°C, since rolling strain is retained, there is a deterioration in resistance to softening for a long period even after subsequent cooling has been performed. Therefore, the finish rolling completing temperature is set to be 750°C or higher.

The hot rolled steel sheet which has been subjected to

- 40 -

finish rolling is cooled on a run out table of hot rolling. Cooling after rolling is performed, in terms of the temperature of a central portion in the thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and 299°C/sec. or less in a temperature range of 780°C to 620°C.

[0047]

Average cooling rate in a temperature range of 780°C to 620°C in terms of the temperature of the central portion in the thickness direction: 7°C/sec. or more and 299°C/sec. or less

In the case where the average cooling rate in a temperature range of 780°C to 620°C is less than 7°C/sec, since a polygonal ferrite having a large grain diameter of more than 10 μm is formed, the desired microstructure in a base metal portion cannot be achieved. Therefore, the desired high strength of 450 MPa or more in terms of YS cannot be achieved, and there is a deterioration in resistance to softening in a long period. On the other hand, in the case where the average cooling rate is more than 299°C/sec., since the fraction of a quasi-polygonal ferrite phase becomes less than 90%, there is a deterioration in resistance to softening for a long period due to an increase in strength. Therefore, cooling after rolling should be performed at an average cooling rate of 7°C/sec. or more and

- 41 -

299°C/sec. or less in a temperature range of 780°C to 620°C in terms of the temperature of the central portion in the thickness direction.

[0048]

In addition, in the case of cooling after rolling, it is preferable that difference between the cooling rates of the central part in the thickness direction and any other portion in the thickness direction other than the outermost portions within 0.2 mm from the surfaces be within 5°C/sec. when latter is smaller than the former and within 20°C/sec. when the latter is larger than the former.

Cooling stop temperature after rolling has been performed: 620°C or lower

Cooling after rolling has been performed is performed at a cooling rate described above down to a cooling stop temperature of 620°C or lower. In the case where the cooling stop temperature is higher than 620°C, the desired microstructure including a quasi-polygonal ferrite phase as a main phase cannot be achieved due to an excessively high cooling stop temperature. Therefore, the cooling stop temperature after rolling is set to be 620°C or lower, preferably 595°C or lower and 475°C or higher.

[0049]

After cooling after rolling has been stopped, the hot rolled steel sheet is coiled at a coiling temperature of

- 42 -

595°C or lower and 475°C or higher.

Coiling temperature: 595°C and lower and 475°C or higher

In the case where the coiling temperature is lower than 475°C, since the coiling temperature is excessively low, there is a deterioration in resistance to softening in a long period due to the formation of a microstructure including a bainite phase as a main phase. Therefore, the coiling temperature is set to be 475°C or higher. In addition, in the case where the coiling temperature is higher than 595°C, since the coiling temperature is excessively high, the desired microstructure cannot be achieved. Therefore, the coiling temperature is set to be 595°C or lower and 475°C or higher.

[0050]

The coiled hot rolled steel sheet is subsequently subjected to a thermal history in which a holding time in a temperature range of 480°C to 350°C is 2 hours or more and 20 hours or less.

Cumulative holding time in a temperature range of 480°C to 350°C: 2 hours or more and 20 hours or less

The control of a thermal history in a temperature range of 480°C to 350°C is an important factor in order to achieve the desired properties, in particular, excellent resistance to softening for a long period in an intermediate

- 43 -

temperature range for a base metal. By holding the temperature of the central portion in the thickness direction in a temperature range of 480°C to 350°C for a specified time, since precipitates, a dislocation substructure, a microstructure and the like are stabilized, there is a decrease in the degree of changes in these factors even in the case where the steel sheet is held in an intermediate temperature range for a long time afterward. In the case where the cumulative holding time in a temperature range of 480°C to 350°C is less than 2 hours, since the stabilization of a microstructure is insufficient, there is a decrease in high-temperature strength and there is a deterioration in resistance to softening for a long period due to changes in precipitates, a dislocation substructure, a microstructure and the like in the case where the steel sheet is held in an intermediate temperature range for a long time. On the other hand, in the case where the cumulative holding time in a temperature range of 480°C to 350°C is more than 20 hours, there is a decrease in high-temperature strength of a base metal. Therefore, the cumulative holding time in a temperature range of 480°C to 350°C is set to be 2 hours or more and 20 hours or less, preferably 3 hours or more and 12 hours or less. It is preferable that the cumulative holding time in a temperature range of 480°C to 350°C be controlled through the control of

- 44 -

a coiling temperature and the cooling conditions of a coil. After a thermal history in a temperature range of 480°C to 350°C has been controlled, the steel sheet stands to be cooled.

[0051]

Subsequently, using the obtained hot rolled steel sheet as a raw material for a steel pipe, an electric resistance welded pipe is manufactured by continuously forming the hot rolled steel sheet into an open pipe having an approximately circular cross section using a roll forming method and by performing electric resistance welding in which the vicinity of the butt portions of the open pipe are heated up to a temperature equal to or higher than the melting point and welded with pressure using a squeeze roll.

It is preferable that a taper type groove be formed in both end faces in the width direction of the hot rolled steel sheet (end faces of the butt portions of the open pipe) when finpass forming is performed in the continuous roll forming. It is preferable that the taper type groove be formed so that the distance in the thickness direction of the steel sheet between the starting position of the taper and the surface of the steel sheet which is to become the outer or inner surface of a steel pipe is 2% to 80% of the thickness of the steel sheet. With this method, since the discharge of inclusions in an electric resistance weld zone

- 45 -

is promoted and there is a decrease in the amount of inclusions, the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in the electric resistance weld zone is decreased by about 10 ppm. It is more preferable that the distance between the starting position of the taper and the surface of the steel sheet be 5% to 40%, further more preferably 10% to 35%. In addition, taper shape is not limited to a straight line, and curves may be used as desired.

[0052]

In addition, electric resistance welding may be performed using any of known electric resistance welding methods. In addition, although electric resistance welding is usually performed in atmospheric air, electric resistance welding may be performed in an atmosphere in which oxygen concentration is decreased by performing atmospheric control. In the case where atmospheric control is performed, it is preferable that the oxygen concentration be 0.5 mass% or less, more preferably 0.1 mass% or less.

Examples of methods of atmospheric control include one in which an area in which electric resistance welding is performed is sealed in a box type structure and a non-oxidizing gas is fed into the structure. There is a case where there is conversely an increase in oxygen

- 46 -

concentration due to the surrounding atmosphere (atmospheric air) being taken into the structure when a non-oxidizing gas is blown into the structure. Therefore, it is preferable that a non-oxidizing gas be blown into the structure using a gas atomization nozzle having a multilayer structure such as a three-layered structure.

[0053]

The electric resistance weld zone of the obtained electric resistance welded steel pipe is subjected to a heat treatment in which heating and cooling are performed online.

It is preferable that this heat treatment be performed using high-frequency dielectric heating equipment which is equipped on line and with which only the vicinity of an electric resistance weld zone can be heated. In addition, it is preferable that cooling be performed using a cooling apparatus which is placed above an electric resistance weld zone to be cooled and which has plural cooling heads having plural nozzles in order to control a cooling rate. This heat treatment is performed by heating the whole of the wall thickness in the vicinity of an electric resistance weld zone up to a temperature in the range of 800°C or higher and 1150°C or lower, by performing cooling, in terms of the temperature of the central portion in the thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and

- 47 -

299°C/sec. or less in a temperature range of 780°C to 620°C, and by further performing a heat treatment under conditions such that the central portion in the thickness direction is subjected to a thermal history in which a cumulative holding time in a temperature range of 500°C to 360°C is 2 seconds or more and 200 seconds or less. In addition, in order to control the cumulative holding time in the temperature range of 500°C to 360°C to be in the range described above, it is preferable that slow cooling be performed in this temperature range or that a treatment (tempering treatment) in which heating is performed up to a temperature range of 500°C to 360°C be performed.

[0054]

By performing the heat treatment described above, an electric resistance weld zone has a microstructure including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase having a small average grain diameter of 10 μm or less and the balance being hard phases such as a pearlite phase, a high strength of 450 MPa in terms of yield strength YS, excellent resistance to softening for a long period and an excellent creep rupture property. In particular, the resistance to softening for a long period of an electric resistance weld zone is strongly influenced by oxides and a microstructure in an electric resistance weld zone.

- 48 -

[0055]

In the case where the heating temperature is lower than 800°C, since hard phases are retained in the state as formed by performing electric resistance welding, the desired toughness cannot be achieved. On the other hand, in the case where the heating temperature is higher than 1150°C, since there is an increase in grain diameter, the desired toughness cannot be achieved.

In the cooling process after heating has been performed, in the case where the average cooling rate in a temperature range of 780°C to 620°C in terms of the temperature of the central portion in the thickness direction is less than 7°C/sec., since an electric resistance weld zone has a microstructure mainly including a polygonal ferrite phase having a large grain diameter due to an increase in the grain diameter of a microstructure in an electric resistance weld zone, a high strength of 450 MPa or more in terms of yield strength YS cannot be achieved and there is a deterioration in resistance to softening for a long period. On the other hand, in the case where the average cooling rate is more than 229°C/sec., since the fraction of a quasi-polygonal ferrite phase becomes less than 90%, there is an increase in strength and there is a deterioration in resistance to softening in a long period.

[0056]

- 49 -

In addition, the cooling stop temperature is set to be 620°C or lower. In the case where the cooling stop temperature is higher than 620°C, a microstructure mainly includes a polygonal ferrite.

In addition, regarding resistance to softening for a long period of an electric resistance weld zone in an intermediate temperature range, by controlling a thermal history in a temperature range of 500°C to 360°C in the online heat treatment after electric resistance welding has been performed, excellent property can be realized, because precipitates, dislocation density, a microstructure and so forth are stabilized. In the case where the cumulative holding time in a temperature range of 500°C to 360°C is less than 2 seconds, since precipitates, dislocation substructure, a microstructure and so forth are changed in the case where the steel pipe is held in an intermediate temperature range for a long time, there is a decrease in high-temperature strength and there is a deterioration in resistance to softening for a long period. On the other hand, in the case where the cumulative holding time is more than 200 seconds, there is a decrease in the high-temperature strength of an electric resistance weld zone. Therefore, the cumulative holding time in a temperature range of 500°C to 360°C is set to be 2 seconds or more and 200 seconds or less, preferably 3 seconds or more and 120

- 50 -

seconds or less.

[0057]

The present invention will be further described on the basis of examples hereafter.

[EXAMPLES]

[0058]

[Example 1]

By heating steel materials (slabs having a thickness of 250 mm) having chemical compositions given in Table 1 at a temperature of 1230°C given in Table 2 for 110 minutes and by subsequently performing hot rolling including rough rolling and finish rolling in which hot rolling reduction in a non-recrystallization temperature range (temperature range lower than a recrystallization temperature) and a finish rolling completing temperature were controlled under the conditions given in Table 2, hot rolled steel sheets having a thickness of 19.1 mm were manufactured. In addition, as the steel materials, slabs which were prepared by smelting molten steels having the chemical compositions given in Table 1 using a converter and by casting the molten steels into slabs having a thickness of 250 mm using a continuous casting method were used.

[0059]

Immediately after finish rolling had been performed, the hot rolled steel sheets were subjected to cooling under

- 51 -

the conditions given in Table 2 on a run out table of hot rolling and then coiled. The coiled hot rolled steel sheets were further subjected to a thermal history in which a holding time in a temperature range of 350°C to 480°C was controlled under the conditions given in Table 2.

Using the obtained hot rolled steel sheets as raw materials for steel pipes, by slitting the materials into a specified width, by continuously forming the slit hot rolled steel sheets into open pipes having an approximately circular cross section by performing roll forming, and by performing electric resistance welding in which the vicinity of the butted portions of the open pipes were heated up to a temperature higher than the melting point and welded by pressure using a squeeze roll, electric resistance steel pipes (having an outer diameter of 609.6 mm ϕ) were manufactured.

[0060]

Subsequently, the electric resistance weld zones of the obtained electric resistance welded steel pipes were subjected to an online heat treatment in which heating and subsequent cooling were performed under the conditions given in Table 2. Heating was performed using a high-frequency dielectric heating apparatus having a structure for heating only the vicinity of an electric resistance weld zone. Cooling was performed using a cooling apparatus which was

- 52 -

placed above an electric resistance weld zone to be cooled and which has cooling heads having nozzles capable of jetting rodlike cooling water at a water flow rate of $0.9 \text{ m}^3/\text{m}^2\text{min}$ so that rodlike jets of cooling water can be jetted from the nozzles at a speed of 0.9 m/sec . In addition, the cooling heads had structures with which on-off control of cooling water injection from the individual nozzles could be separately performed.

[0061]

The electric resistance weld zones were cooled down to a temperature of 300°C by determining the temperature of the electric resistance on the downstream side in the transportation direction of the steel pipe and by performing on-off control of water injection from individual headers on the basis of the determined steel pipe temperature so that the electric resistance weld zones were cooled at a cooling rate given in Table 2. Subsequently, product steel pipes were completed by performing a tempering treatment in which the electric resistance weld zones of the electric resistance welded steel pipes were subjected to an online heat treatment and heated up to a temperature of 450°C so that a cumulative holding time in a temperature range of 360°C to 500°C was controlled under the conditions given in Table 2.

[0062]

- 53 -

Using test pieces cut out of the obtained product steel pipes, microstructure observation, analysis of inclusions in an electric resistance weld zone, a tensile test, a high-temperature tensile test and a creep test were performed. The testing methods will be described hereafter.

(1) Microstructure observation

Using a test piece for microstructure observation cut out of the base metal portion of the obtained electric resistance welded steel pipe, by polishing and etching a cross section in the circumferential direction (C cross section) of the sample, by observing a microstructure using an electron scanning microscope (at a magnification of 1000 times), and by taking a photograph, microstructures were identified, and, further, by performing image analysis, the volume percentages of the microstructures and average grain diameters were determined. An average grain diameter was determined by determining the areas of individual grains, by calculating equivalent circle diameters for the areas and by calculating the arithmetic average of the equivalent circle diameters. Here, in the case of a bainite phase, the size of an area in the same orientation (packet size) was determined as a grain diameter.

(2) Analysis of inclusions in an electric resistance weld zone

A plate specimen having a width of 2 mm (having a width

- 54 -

of 2 mm: a thickness equal to the whole thickness and a length equal to the whole thickness) and having the center of the electric resistance weld zone positioned at the center of the specimen was cut out of the electric resistance weld zone of the obtained electric resistance welded steel pipe. By performing electrolytic extraction on this plate type specimen in an electrolytic solution (10% AA solution), by collecting obtained extraction residue using a filter mesh (having a hole diameter of 5 μm), by determining the respective contents (mass ppm) of Si, Mn, Al and Ca in the extraction residue using inductively coupled plasma atomic emission spectroscopy, and by calculating the total value of the contents, the total value was defined as the total content (mass ppm) of Si, Mn, Al and Ca contained in inclusions having an equivalent circle diameter of 5 μm or more.

(3) Tensile test

ASTM E8 round bar type specimens (having a parallel portion of 6.35 mm ϕ and a GL of 25.4 mm) were respectively cut out of the base metal portions and the electric resistance weld zone of the obtained electric resistance welded steel pipe so that the tensile direction was the circumferential direction of the pipe. The base metal portion was defined as a portion at a position located 180° from the electric resistance weld zone. The round bar type

- 55 -

specimen was cut out of the electric resistance weld zone so that the seam of the electric resistance weld zone was located at the center of the parallel portion of the specimen. Here, flattening of a steel pipe was not performed when the specimen was cut out of the pipe.

[0063]

A tensile test was performed at room temperature in a manner such that the speed of testing rate of stressing was 0.5%/min when the stress was equal to or less than the YS and 5 mm/min when the stress was more than the YS in order to determine tensile properties (yield strength YS and tensile strength TS).

(4) High-temperature tensile test

A test material was cut out of the obtained electric resistance welded pipe and subjected to a heat treatment at a temperature of 400°C and for a duration of 2340 hours. ASTM E8 round bar type specimens (having a parallel portion of 6.35 mm ϕ and a GL of 25.4 mm) were respectively cut out of the base metal portions and the electric resistance weld zones of the test material which had been subjected to the heat treatment and the test material which had not been subjected to the heat treatment so that the tensile direction was the circumferential direction of the pipe. The base metal portion was defined as a portion at a position located 180° from the electric resistance weld zone.

- 56 -

The round bar type specimen was cut out of the electric resistance weld zone so that the seam of the electric resistance weld zone was located at the center of the parallel portion of the specimen. Here, flattening of a steel pipe was not performed when the specimen was cut out of the pipe.

[0064]

A tensile test was performed in order to determine yield strength YS in a manner such that the test temperature was set to be 350°C and the specimen was held at the test temperature for 15 minutes before tensile test was performed and that the speed of testing rate of stressing was 0.5%/min when the stress was equal to or less than the YS and 5 mm/min when the stress was more than the YS.

Using the determined values of yield strength YS, the amount ΔYS of decrease in YS between before and after the heat treatment was calculated respectively for the base metal portion and the electric resistance weld zone in order to evaluate resistance to softening for a long period. A case where ΔYS was less than 60 MPa was evaluated as "excellent in terms of resistance to softening for a long period".

(5) Creep test

Specimens with slits prolongs (having a parallel portion of 6 mm ϕ and a GL of 30 mm) were cut out of the base

- 57 -

metal portion and the electric resistance weld zone of the obtained electric resistance welded steel pipe so that the longitudinal direction of the specimen was the circumferential direction of the pipe. The base metal portion was defined as a portion at a position located 180° from the electric resistance weld zone. In addition, the specimen with slits prolongs was cut out of the electric resistance weld zone so that the seam of the electric resistance weld zone was located at the center of the parallel portion of the specimen.

[0065]

A creep test was performed at a test temperature of 390°C in order to determine creep rupture strength. By calculating an estimated creep rupture strength σ_{creep} corresponding to that for a heat treatment at a temperature of 360°C and for a duration of 20 years as converted using a Larson-Miller parameter from the obtained creep rupture strength, and by calculating $\sigma_{\text{creep}}/YS_{\text{RT}}$ which is the ratio of the estimated creep rupture strength to room temperature yield stress YS_{RT} , a case where $\sigma_{\text{creep}}/YS_{\text{RT}}$ was 0.8 or more was evaluated as "excellent in terms of creep rupture property".

The obtained results are given in Tables 3-1 and 3-2.

[0066]

[Table 1]

Table 1

Steel No.	Chemical Composition (mass%)														Note	
	C	Si	Mn	P	S	Al	Nb	V	Ti	N	O	Ca	Cu, Ni, Mo, Cr	Pcm		
A	0.042	0.11	0.92	0.005	0.0004	0.036	0.047	0.045	0.010	0.0035	0.0009	0.0020	-	0.10	Example	
B	0.041	0.19	1.12	0.004	0.0006	0.030	0.051	0.052	0.012	0.0027	0.0012	0.0019	Cu:0.17, Ni:0.14, Mo:0.15	0.13	Example	
C	0.052	0.20	1.35	0.012	0.0005	0.032	0.057	0.062	0.015	0.0036	0.0011	0.0025	Cu:0.14, Ni:0.21	0.14	Example	
D	0.047	0.18	1.70	0.012	0.0018	0.035	0.063	0.023	0.014	0.0033	0.0014	0.0018	Cu:0.23, Ni:0.18, Mo: 0.17	0.17	Example	
E	0.066	0.23	1.82	0.010	0.0016	0.037	0.060	0.024	0.016	0.0037	0.0011	0.0021	Cr:0.002	0.17	Example	
F	0.024	0.27	1.44	0.014	0.0012	0.063	0.023	0.032	0.021	0.0014	0.0018	0.0002	-	0.11	Comparative Example	
G	0.095	0.16	1.74	0.011	0.0008	0.026	0.014	0.012	0.016	0.0031	0.0012	0.0004	-	0.19	Comparative Example	
H	0.055	0.05	1.52	0.016	0.0021	0.074	0.054	0.042	0.008	0.0030	0.0012	0.0007	-	0.14	Comparative Example	
I	0.042	0.36	1.58	0.005	0.0015	0.038	0.052	0.054	0.016	0.0036	0.0044	0.0016	-	0.14	Comparative Example	
J	0.037	0.19	0.64	0.017	0.0020	0.049	0.061	0.055	0.012	0.0018	0.0007	0.0021	-	0.08	Comparative Example	
K	0.036	0.23	1.95	0.012	0.0008	0.021	0.025	0.014	0.017	0.0033	0.0015	0.0019	-	0.14	Comparative Example	
L	0.042	0.27	1.23	0.021	0.0022	0.038	0.045	0.064	0.016	0.0008	0.0015	0.0026	-	0.12	Comparative Example	
M	0.055	0.21	1.05	0.014	0.0032	0.035	0.003	0.015	0.014	0.0026	0.0016	0.0024	-	0.12	Comparative Example	
N	0.071	0.19	1.28	0.018	0.0021	0.003	0.024	0.025	0.010	0.0032	0.0011	0.0011	-	0.14	Comparative Example	
O	0.028	0.20	1.44	0.012	0.0025	0.123	0.024	0.043	0.008	0.0039	0.0022	0.0009	-	0.11	Comparative Example	
P	0.036	0.20	1.36	0.006	0.0021	0.046	-	0.042	0.002	0.0042	0.0021	0.0016	-	0.11	Comparative Example	
Q	0.061	0.24	1.48	0.011	0.0008	0.051	0.085	0.042	0.016	0.0036	0.0025	0.0032	-	0.15	Comparative Example	
R	0.051	0.19	1.25	0.010	0.0004	0.026	0.014	-	0.022	0.0039	0.0008	0.0022	-	0.12	Comparative Example	
S	0.071	0.21	0.87	0.012	0.0006	0.031	0.014	0.072	0.025	0.0025	0.0016	0.0034	-	0.13	Comparative Example	
T	0.061	0.23	0.97	0.008	0.0007	0.041	0.054	0.012	-	0.0014	0.0016	0.0015	-	0.12	Comparative Example	
U	0.064	0.20	0.95	0.009	0.0005	0.045	0.064	0.002	0.039	0.0026	0.0018	0.0008	-	0.12	Comparative Example	
V	0.043	0.22	1.35	0.018	0.0009	0.024	0.047	0.005	0.023	0.0019	0.0006	-	-	0.12	Comparative Example	
W	0.029	0.20	1.53	0.009	0.0021	0.042	0.042	0.018	0.031	0.0039	0.0024	0.0039	-	0.11	Comparative Example	
X	0.034	0.18	1.35	0.004	0.0018	0.064	0.056	0.045	0.024	0.0056	0.0016	0.0021	-	0.11	Comparative Example	
Y	0.036	0.19	1.20	0.008	0.0010	0.042	0.052	0.022	0.011	0.0025	0.0034	0.0046	-	0.10	Comparative Example	
Z	0.072	0.23	1.75	0.008	0.0005	0.044	0.062	0.059	0.016	0.0047	0.0024	0.0015	Cu:0.25, Ni:0.25, Mo:0.25, Cr:0.15	0.21	Comparative Example	

[0067]

[Table 2]

Table 2

Steel Pipe No.	Steel No.	Manufacturing Condition of Hot Rolled Steel Sheet						Electric Resistance Welding Condition		
		Heating		Rolling Reduction *(%)	Finish Rolling Completing Temperature **(°C)	Cooling after Rolling		Coiling Temperature **(°C)	Holding Time in Temperature Range of 480°C to 350°C (hour)	End Face Groove
		Temperature (°C)	Holding Time (min)			Average Cooling Rate *** (°C/sec.)	Cooling Stop Temperature **(°C)			
1-27	A-Z	1230	110	55	810	28	520	500	4	-
Atmosphere for Electric Resistance Welding										
										Oxygen Concentration
										Number of Nozzle Layer
										-

*)Hot rolling reduction in non-recrystallization temperature range

**)Surface temperature of steel sheet

***)Average cooling rate (°C/s) in temperature range of 780°C to 620°C in terms of temperature of central portion in thickness direction

Steel Pipe No.	Steel No.	Heat Treatment Condition of Electric Resistance Weld				Steel Pipe Size		Note
		Heating Temperature (°C)	Cooling Rate **(°C)	Cooling Stop Temperature (°C)	Holding Time in Temperature Range of 500°C to 360°C (sec)	Thickness (mm)	Outer Diameter (mmφ)	
1-27	A-Z	1000	28	300	20	19.1	609.8	Example

[0068]

[Table 3-1]

Table 3-1

Steel Pipe No.	Steel No.	Base Metal Property							Note
		Microstructure			Tensile Property		Resistance to Softening for Long Period	Creep Property	
		Kind*	Average Grain Diameter of Main Phase (μm)	Fraction (area %)	YS (MPa)	TS (MPa)	ΔYS (MPa)	σ _{creep} /YS _{RT}	
1	A	QPF+B	6.8	QPF:96	482	536	35	0.80	Example
2	B	QPF+B	5.9	QPF:94	497	555	36	0.81	Example
3	C	QPF+B	5.7	QPF:94	510	562	37	0.82	Example
4	D	QPF+B	3.6	QPF:93	613	672	36	0.88	Example
5	E	QPF+B	3.1	QPF:93	622	678	35	0.89	Example
6	F	PF+B	11.5	PF:95	390	405	59	0.74	Comparative Example
7	G	QPF+B	4.5	QPF:76	659	717	68	0.78	Comparative Example
8	H	QPF+B	5.2	QPF:86	479	510	58	0.79	Comparative Example
9	I	QPF+B	4.6	QPF:91	512	560	57	0.78	Comparative Example
10	J	PF+B	12.7	PF:94	365	388	58	0.73	Comparative Example
11	K	B+M	3.8	B:78	669	716	69	0.76	Comparative Example
12	L	QPF+B	4.4	QPF:90	489	531	58	0.79	Comparative Example
13	M	QPF+B	4.1	QPF:93	467	509	57	0.74	Comparative Example
14	N	QPF+B	5.4	QPF:91	501	544	58	0.77	Comparative Example
15	O	QPF+B	4.1	QPF:92	436	476	56	0.78	Comparative Example
16	P	PF+B	10.5	PF:96	370	408	58	0.74	Comparative Example
17	Q	QPF+B	3.7	QPF:86	518	564	63	0.77	Comparative Example
18	R	PF+B	10.2	PF:95	380	418	59	0.72	Comparative Example
19	S	QPF+B	5.2	QPF:88	520	562	64	0.75	Comparative Example
20	T	PF+B	12.0	PF:93	390	450	58	0.72	Comparative Example
21	U	QPF+B	4.7	QPF:93	516	560	68	0.77	Comparative Example
22	V	QPF+B	5.3	QPF:96	490	533	61	0.77	Comparative Example
23	W	QPF+B	4.3	QPF:95	469	519	57	0.78	Comparative Example
24	X	QPF+B	4.6	QPF:92	490	546	63	0.74	Comparative Example
25	Y	QPF+B	4.4	QPF:93	497	546	58	0.81	Comparative Example
26	Z	B+M	3.5	B:75	658	728	61	0.75	Comparative Example

*) QPF: quasi-polygonal ferrite phase, PF: polygonal ferrite phase, B: bainite phase,
M: martensite phase, P: Pearlite phase, DP: quasi-pearlite phase, C: cementite phase

[0069]

[Table 3-2]

Table 3-2

Steel Pipe No.	Steel No.	Electric Resistance Weld Property							Note
		Microstructure		Tensile Property		Cleaness	Resistance to Softening for Long Period	Creep Property	
		Kind*	Average Grain Diameter of Main Phase (μm)	Fraction (area %)	YS (MPa)	TS (MPa)	Total Alloy Content in Inclusion Having Equivalent Circle Diameter of 5 μm or More ** (mass ppm)	ΔYS (MPa)	
1	A	QPF+B	8.5	QPF:95	492	562	22	41	Example
2	B	QPF+B	6.8	QPF:93	503	573	18	40	Example
3	C	QPF+B	6.5	QPF:94	514	590	24	43	Example
4	D	QPF+B	4.2	QPF:93	609	689	25	48	Example
5	E	QPF+B	4.4	QPF:93	610	692	27	46	Example
6	F	PF+B	12.3	PF:96	367	417	46	66	Comparative Example
7	G	QPF+B	4.9	QPF:76	623	708	29	72	Comparative Example
8	H	QPF+B	5.4	QPF:87	444	505	67	66	Comparative Example
9	I	QPF+B	4.9	QPF:93	480	545	90	63	Comparative Example
10	J	PF+B	13.2	PF:95	342	390	58	63	Comparative Example
11	K	B+M	4.2	B:77	629	715	57	73	Comparative Example
12	L	QPF+B	4.7	QPF:90	456	518	52	62	Comparative Example
13	M	QPF+B	4.5	QPF:93	444	505	50	63	Comparative Example
14	N	QPF+B	5.2	QPF:92	480	545	67	64	Comparative Example
15	O	QPF+B	4.2	QPF:93	410	466	76	63	Comparative Example
16	P	PF+B	11.0	PF:96	450	524	48	62	Comparative Example
17	Q	QPF+B	4.3	QPF:86	480	545	48	69	Comparative Example
18	R	PF+B	10.4	PF:95	360	432	45	63	Comparative Example
19	S	QPF+B	5.8	QPF:86	490	557	46	69	Comparative Example
20	T	PF+B	12.7	PF:92	371	431	46	64	Comparative Example
21	U	QPF+B	5.4	QPF:93	487	553	55	70	Comparative Example
22	V	QPF+B	5.8	QPF:96	462	525	53	67	Comparative Example
23	W	QPF+B	4.4	QPF:97	450	511	75	62	Comparative Example
24	X	QPF+B	5.0	QPF:92	462	525	57	69	Comparative Example
25	Y	QPF+B	4.3	QPF:93	469	533	74	62	Comparative Example
26	Z	QPF+B	4.1	QPF:75	618	702	45	61	Comparative Example

**) total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more

- 62 -

[0070]

Any of the examples of the present invention was an electric resistance welded steel pipe having a fine microstructure including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase in both the base metal portion and the electrical resistance weld zone, in which an average grain diameter was 10 μm or less, a high strength of 450 MPa in terms of yield strength, excellent resistance to softening in a long period as indicated by a ΔYS of less than 60 MPa and an excellent creep rupture strength as indicated by a $\sigma_{\text{creep}}/\text{YS}_{\text{RT}}$, which is the ratio of creep rupture strength σ_{creep} to room temperature yield strength YS_{RT} , of 0.80 or more.

[0071]

On the other hand, in the case of the comparative examples having chemical compositions out of the range according to the present invention, since the desired microstructure was not achieved in at least one of a base metal portion and an electric resistance weld zone, it was found that a desired high strength of 450 MPa or more in terms of yield strength was not achieved, that there was a deterioration in resistance to softening in a long period as indicated by a ΔYS of less than 60 MPa or that there was a deterioration in creep rupture property.

On the other hand, in the case of the comparative

- 63 -

examples (steel pipe No. 6, No. 10, No. 16, No. 18 and No. 20) where the content of C, Mn, Nb, V or Ti was less than the range according to the present invention, since a microstructure mainly including a softer polygonal ferrite phase was formed in both the base metal portion and the electric resistance weld zone, YS was less than 450 MPa, which means that the desired strength was not achieved. In addition, in the case of the comparative examples (steel pipe No. 7, No. 11, No. 17, No. 19 and No. 21) where the content of C, Mn, Nb, V or Ti was more than the range according to the present invention, both the base metal portion and the electric resistance weld zone had deteriorated resistance to softening in a long period as indicated by a ΔYS of 60 MPa or more and deteriorated creep rupture property as indicated by a σ_{creep}/YS_{RT} of less than 0.80.

[0072]

In addition, in the case of the comparative examples (steel pipe No. 8, No. 9, No. 14, No. 15, No. 23 and No. 25) where the content of Si, Al, Ca or O was out of the range according to the present invention, since the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more in an electric resistance weld zone was more than 49 mass ppm, the electric resistance weld zone had a ΔYS of 60 MPa or more,

- 64 -

deteriorated resistance to softening in a long period and a reduced creep rupture property as indicated by a $\sigma_{\text{creep}}/YS_{\text{RT}}$ of less than 0.80.

[0073]

In addition, in the case of the comparative examples (steel pipe No. 12, No. 13, No. 22, No. 24 and No. 26) where the content of P, S, Ca or N or the value of Pcm was out of the range according to the present invention, since the electric resistance weld zone had a ΔYS of 60 MPa or more, there was a deterioration in resistance to softening for a long period and there was a deterioration in creep rupture property as indicated by a $\sigma_{\text{creep}}/YS_{\text{RT}}$ of less than 0.80.

[Example 2]

By heating and soaking steel materials (slabs having a thickness of 250 mm) having chemical compositions of steel A through steel E given in Table 1 under the heating conditions given in Table 4-1, by subsequently performing rough rolling and finish rolling under the conditions given in Table 4-1, by subsequently performing cooling after rolling, under the conditions given in Table 4-1 and by coiling the cooled hot rolled steel sheet at a coiling temperature given in Table 4-1, hot rolled steel sheets were manufactured. The coiled hot rolled steel sheets were subjected to a thermal history in which a holding time in a temperature range of 350°C to 480°C was controlled under the

- 65 -

conditions given in Table 4-1 by adjusting a coiling temperature and the cooling conditions of the coiled steel sheet.

[0074]

Using the obtained hot rolled steel sheets as raw materials for steel pipes, by slitting the materials into a specified width, by continuously forming the slit hot rolled steel sheets into open pipes having an approximately circular cross section by performing roll forming, and by performing electric resistance welding in which the vicinity of the butted portions of the open pipes were heat up to a temperature higher than the melting point and welded by pressure using a squeeze roll, electric resistance steel pipes having the sizes given in Table 4-2 were manufactured.

In some cases, a taper type groove was formed in both end faces in the width direction of the hot rolled steel sheet when finpass forming was performed when roll forming was performed. The taper type groove was formed in both end faces in the width direction of the hot rolled steel sheet so that the distance in the thickness direction of the steel sheet between the starting position of the taper and the surface of the steel sheet which was to become the outer surface of the steel pipe was 20% and so that the distance in the thickness direction of the steel sheet between the starting position of the taper and the surface of the steel

- 66 -

sheet which was to become the inner surface of the steel pipe was 20%, which is represented by outside20%-inside20%.
[0075]

In addition, electric resistance welding was performed in atmospheric air (having an oxygen concentration of 21 vol% and 23 mass%). In addition, in some cases, electric resistance welding was performed in an atmosphere in which oxygen concentration was decreased to 45 ppm by jetting an inert gas (N₂ gas) using nozzles having a three-layered jet orifice.

Subsequently, the electric resistance weld zones of the obtained electric resistance welded steel pipes were subjected to online heat treatment and heated under the conditions given in Table 4-2 using the same high-frequency dielectric heating apparatus as used in Example 1, and the cooled under the conditions given in Table 4-2 using the same cooling apparatus as used in Example 1. Subsequently, product steel pipes were completed by performing a heat treatment in which a cooling rate in a temperature range of 500°C to 360°C and a cumulative holding time in a temperature range of 500°C to 360°C from a tempering treatment in which the steel pipe is heated up to a temperature range of 500°C to 360°C were controlled under the conditions given in Table 4-2.

[0076]

- 67 -

Using test pieces cut out of the obtained electric resistance welded steel pipes using the methods as used in Example 1, microstructure observation, analysis of inclusions in an electric resistance weld zone, a tensile test, a high-temperature tensile test and a creep test were performed. The testing methods were the same as used in Example 1.

The obtained results are given in Tables 5-1 and 5-2.

[0077]

[Table 4-1]

Steel Pipe No.	Steel No.	Manufacturing Condition of Hot Rolled Steel Sheet										Note
		Heating		Rolling Reduction *(%)	Finish Rolling Completing Temperature (°C)	Cooling after Rolling		Coiling Temperature **(°C)	Holding Time in Temperature Range of 480°C to 350°C (hour)			
		Temperature (°C)	Holding Time (min)			Average Cooling Rate ** (°C/sec.)	Cooling Stop Temperature (°C)					
27	A	1240	120	45	810	25	550	550	4	Example		
28	A	1290	120	45	810	25	550	550	4	Comparative Example		
29	A	1180	120	45	810	25	550	550	4	Comparative Example		
30	A	1240	70	45	810	25	550	550	4	Comparative Example		
31	A	1240	120	15	810	25	550	550	4	Comparative Example		
32	B	1250	100	60	810	57	550	540	3	Comparative Example		
33	B	1250	100	60	810	57	550	540	3	Comparative Example		
34	B	1250	100	60	810	57	550	540	3	Example		
35	B	1250	100	60	810	57	550	540	3	Example		
36	B	1250	100	60	810	57	550	540	3	Example		
37	C	1220	110	25	810	26	550	550	3	Comparative Example		
38	C	1220	110	25	810	26	550	550	3	Comparative Example		
39	C	1220	110	25	810	26	550	550	3	Example		
40	C	1220	110	25	810	26	550	550	3	Example		
41	C	1220	110	25	810	26	550	550	3	Example		
42	D	1270	105	50	810	6	590	550	3	Comparative Example		
43	D	1270	105	50	810	13	590	590	10	Comparative Example		
44	D	1270	105	50	810	26	590	590	10	Example		
45	D	1270	105	50	810	145	590	590	10	Example		
46	D	1270	105	50	810	350	590	590	10	Example		
47	D	1240	95	40	810	18	550	480	1	Comparative Example		
48	D	1240	95	40	810	18	550	480	5	Comparative Example		
49	D	1240	95	40	810	18	550	480	50	Example		
50	D	1240	95	40	810	18	550	480	50	Comparative Example		
51	D	1240	95	40	810	18	550	480	5	Comparative Example		
52	E	1250	110	60	810	29	550	540	5	Comparative Example		
53	E	1250	110	60	810	29	550	540	5	Comparative Example		
54	E	1250	110	60	810	29	550	540	5	Example		
55	E	1250	110	60	810	29	550	540	5	Example		
56	E	1250	110	60	810	29	550	540	5	Example		
										Comparative Example		

*)Hot rolling reduction in non-recrystallization temperature range

*) Hot rolling reduction in non-recrystallization temperature range

**) Average cooling rate (°C/sec.) in temperature range of 780°C to 620°C in terms of temperature of central portion in thickness direction

[0078]

[Table 4-2]

Table 4-2

Steel Pipe No.	Steel No.	Electric Resistance Welding Condition		Heat Treatment Condition of Electric Resistance Weld				Steel Pipe Size		Note
		End Face Groove ***	Atmosphere for Electric Resistance Welding	Heating Temperature (°C)	Average Cooling Rate ** (°C)	Cooling Stop Temperature (°C)	Holding Time in Temperature Range of 500°C to 360°C (sec.)	Thickness (mm)	Outer Diameter (mmφ)	
27	A	-	Atmospheric Air (23 mass%)	910~1060	25	450	30	19.1	660.4	Example
28	A	-	Atmospheric Air (23 mass%)	910~1060	25	450	30	19.1	660.4	Comparative Example
29	A	-	Atmospheric Air (23 mass%)	910~1060	25	450	30	19.1	660.4	Comparative Example
30	A	-	Atmospheric Air (23 mass%)	910~1060	25	450	30	19.1	660.4	Comparative Example
31	A	-	Atmospheric Air (23 mass%)	910~1060	25	450	30	19.1	660.4	Comparative Example
32	B	-	Atmospheric Air (23 mass%)	920~1050	6	400	20	16.0	660.4	Comparative Example
33	B	-	Atmospheric Air (23 mass%)	920~1050	14	400	20	16.0	660.4	Example
34	B	-	Atmospheric Air (23 mass%)	920~1050	25	400	20	16.0	660.4	Example
35	B	-	Atmospheric Air (23 mass%)	920~1050	55	400	20	16.0	660.4	Example
36	B	-	Atmospheric Air (23 mass%)	920~1050	350	400	20	16.0	660.4	Comparative Example
37	C	-	Atmospheric Air (23 mass%)	760~1050	28	200	10	32.0	508.0	Comparative Example
38	C	-	Atmospheric Air (23 mass%)	900~1120	28	200	10	32.0	508.0	Example
39	C	-	45 mass ppm	900~1120	28	200	10	32.0	508.0	Example
40	C	Inside20+ Outside20	Atmospheric Air (23 mass%)	900~1120	28	200	10	32.0	508.0	Example
41	C	-	Atmospheric Air (23 mass%)	950~1160	28	200	10	32.0	508.0	Comparative Example
42	D	-	Atmospheric Air (23 mass%)	890~1030	49	100	4	10.5	609.6	Comparative Example
43	D	-	Atmospheric Air (23 mass%)	890~1030	49	100	4	10.5	609.6	Example
44	D	-	Atmospheric Air (23 mass%)	890~1030	49	100	4	10.5	609.6	Example
45	D	-	Atmospheric Air (23 mass%)	890~1030	49	100	4	10.5	609.6	Example
46	D	-	Atmospheric Air (23 mass%)	890~1030	49	100	4	10.5	609.6	Comparative Example
47	D	-	Atmospheric Air (23 mass%)	910~1080	33	450	30	25.4	457.2	Comparative Example
48	D	-	Atmospheric Air (23 mass%)	910~1080	33	450	30	25.4	457.2	Example
49	D	-	Atmospheric Air (23 mass%)	910~1080	33	450	30	25.4	457.2	Comparative Example
50	D	-	Atmospheric Air (23 mass%)	910~1080	33	20	1	25.4	457.2	Comparative Example
51	D	-	Atmospheric Air (23 mass%)	910~1080	33	200	360****	25.4	457.2	Comparative Example
52	E	-	Atmospheric Air (23 mass%)	900~1090	6	200	120****	20.5	660.4	Comparative Example
53	E	-	Atmospheric Air (23 mass%)	900~1090	27	200	120****	20.5	660.4	Example
54	E	-	Atmospheric Air (23 mass%)	900~1090	35	200	120****	20.5	660.4	Example
55	E	-	Atmospheric Air (23 mass%)	900~1090	64	200	120****	20.5	660.4	Example
56	E	-	Atmospheric Air (23 mass%)	900~1090	320	200	120****	20.5	660.4	Comparative Example

***Outsidexx: (distance between starting position of taper and surface of steel sheet which is to become outer surface of steel pipe)/(pipe thickness)×100(%)

Insidexx: (distance between starting position of taper and surface of steel sheet which is to become inner surface of steel pipe)/(pipe thickness)×100(%)

****)Tempering treatment at was 400°C was performed

[0079]

[Table 5-1]

Steel Pipe No.		Steel No.	Base Metal Property							Creep Property	Note
			Microstructure			Tensile Property		Resistance to Softening for Long Period			
			Kind*	Average Grain Diameter of Main Phase (μm)	Fraction (area %)	YS (MPa)	TS (MPa)				
27	A		QPF+B	6.5	QPF:95	490	533	35	0.80	Example	
28	A		QPF+B	10.8	QPF:93	483	538	62	0.75	Comparative Example	
29	A		QPF+B	7.8	QPF:93	387	437	61	0.75	Comparative Example	
30	A		QPF+B	6.8	QPF:93	427	489	62	0.74	Comparative Example	
31	A		QPF+B	12.4	QPF:92	436	492	64	0.73	Comparative Example	
32	B		QPF+B	5.4	QPF:94	501	550	36	0.81	Comparative Example	
33	B		QPF+B	5.4	QPF:94	501	550	36	0.81	Example	
34	B		QPF+B	5.4	QPF:94	501	550	36	0.81	Example	
35	B		QPF+B	5.4	QPF:94	501	550	36	0.81	Example	
36	B		QPF+B	5.4	QPF:94	501	550	36	0.81	Comparative Example	
37	C		QPF+B	5.4	QPF:93	489	533	35	0.81	Comparative Example	
38	C		QPF+B	5.4	QPF:93	489	533	35	0.81	Example	
39	C		QPF+B	5.4	QPF:93	489	533	35	0.81	Example	
40	C		QPF+B	5.4	QPF:93	489	533	35	0.81	Example	
41	C		QPF+B	5.4	QPF:93	489	533	35	0.81	Comparative Example	
42	D		PF+B	10.6	PF:93	395	489	62	0.75	Comparative Example	
43	D		QPF+B	5.2	QPF:93	589	640	36	0.81	Example	
44	D		QPF+B	3.7	QPF:93	610	663	35	0.82	Example	
45	D		QPF+B	3.5	QPF:91	623	677	37	0.81	Example	
46	D		B+M	3.2	B:78	656	725	63	0.77	Comparative Example	
47	D		B+M	3.2	B:78	745	810	64	0.79	Comparative Example	
48	D		QPF+B	3.4	QPF:93	720	780	34	0.88	Example	
49	D		QPF+B	3.5	QPF:94	705	755	62	0.79	Comparative Example	
50	D		QPF+B	3.4	QPF:93	720	780	34	0.88	Comparative Example	
51	D		QPF+B	3.4	QPF:93	720	780	34	0.88	Comparative Example	
52	E		QPF+B	3.3	QPF:93	623	672	33	0.89	Comparative Example	
53	E		QPF+B	3.3	QPF:93	623	672	33	0.89	Example	
54	E		QPF+B	3.3	QPF:93	623	672	33	0.89	Example	
55	E		QPF+B	3.3	QPF:93	623	672	33	0.89	Example	
56	E		QPF+B	3.3	QPF:93	623	672	33	0.89	Comparative Example	

*) QPF: quasi-polygonal ferrite phase, PF: polygonal ferrite phase, B: bainite phase, M: martensite phase, P: Pearlite phase

[0080]

[Table 5-2]

Table 5-2

Steel Pipe No.	Steel No.	Electric Resistance Weld Property							Note
		Microstructure		Tensile Property		Cleanliness		Resistance to Softening for Long Period	Creep Property
		Kind*	Average Grain Diameter of Main Phase (μm)	Fraction (area %)	YS (MPa)	TS (MPa)	Total Alloy Content in Inclusion Having Equivalent Circle Diameter of 5 μm or More ** (mass ppm)		
27	A	QPF+B	8.3	QPF:95	486	552	26	39	0.80 Example
28	A	QPF+B	9.6	QPF:94	476	534	36	65	0.73 Comparative Example
29	A	QPF+B	9.2	QPF:94	389	438	38	61	0.71 Comparative Example
30	A	QPF+B	8.8	QPF:93	429	489	37	67	0.72 Comparative Example
31	A	QPF+B	9.8	QPF:93	435	479	36	69	0.70 Comparative Example
32	B	PF+B	12.4	PF:94	387	440	35	65	0.75 Comparative Example
33	B	QPF+B	7.8	QPF:94	488	555	28	30	0.80 Example
34	B	QPF+B	6.6	QPF:93	498	566	27	37	0.80 Example
35	B	QPF+B	6.3	QPF:93	512	582	26	38	0.80 Example
36	B	B+M	6.9	B:88	578	657	36	68	0.74 Comparative Example
37	C	PF+B	10.9	PF:94	393	442	35	64	0.78 Comparative Example
38	C	QPF+B	5.9	QPF:94	498	560	28	37	0.80 Example
39	C	QPF+B	6.4	QPF:93	505	576	17	25	0.82 Example
40	C	QPF+B	6.3	QPF:93	506	569	18	27	0.82 Example
41	C	QPF+B	12.3	QPF:67	561	630	35	62	0.77 Comparative Example
42	D	QPF+B	5.4	QPF:94	547	615	38	61	0.75 Comparative Example
43	D	QPF+B	4.9	QPF:93	565	635	28	39	0.80 Example
44	D	QPF+B	4.7	QPF:93	595	682	27	38	0.81 Example
45	D	QPF+B	4.5	QPF:93	594	667	28	39	0.80 Example
46	D	QPF+B	4.2	QPF:91	605	680	39	62	0.76 Comparative Example
47	D	QPF+B	6.4	QPF:95	695	781	35	63	0.78 Comparative Example
48	D	QPF+B	3.2	QPF:93	712	800	28	37	0.85 Example
49	D	QPF+B	3.7	QPF:93	706	806	37	61	0.77 Comparative Example
50	D	B+M	2.8	B:75	758	856	36	63	0.78 Comparative Example
51	D	QPF+B	6.8	QPF:93	695	781	35	65	0.76 Comparative Example
52	E	PF+B	10.3	PF:93	394	469	36	63	0.78 Comparative Example
53	E	QPF+B	4.6	QPF:93	594	669	29	39	0.87 Example
54	E	QPF+B	4.6	QPF:93	587	661	29	38	0.88 Example
55	E	QPF+B	4.3	QPF:91	605	680	29	39	0.87 Example
56	E	QPF+B	4.1	QPF:77	656	737	35	63	0.77 Comparative Example

**) total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more

- 72 -

[0081]

Any of the examples of the present invention was an electric resistance welded steel pipe having a fine microstructure including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase in both the base metal portion and the electrical resistance weld zone, in which an average grain diameter was 10 μm or less, a high strength of 450 MPa in terms of yield strength, excellent resistance to softening in a long period as indicated by a ΔYS of less than 60 MPa and an excellent creep rupture strength as indicated by a $\sigma_{\text{creep}}/\text{YS}_{\text{RT}}$, which is the ratio of creep rupture strength σ_{creep} to room temperature yield strength YS_{RT} , of 0.80 or more.

[0082]

On the other hand, in the case of the comparative examples having chemical composition out of the range according to the present invention, since the desired microstructure was not achieved in at least one of the base metal portion and the electric resistance weld zone, it was found that a desired high strength of 450 MPa or more in terms of yield strength was not achieved, that there was a deterioration in resistance to softening in a long period as indicated by a ΔYS of less than 60 MPa or that there was a deterioration in creep rupture property.

In addition, in the case of the comparative example

- 73 -

(steel pipe No. 28) where a slab heating temperature was higher than the preferable range according to the present invention, since the desired microstructure was not achieved as indicated by an average grain diameter of more than 10 μm in the base metal portion, there was a deterioration in resistance to softening for a long period as indicated by a ΔYS of 60 MPa or more, and there was a deterioration in creep rupture property as indicated by a $\sigma_{\text{creep}}/\text{YS}_{\text{RT}}$ of less than 0.80. In addition, in the case of the comparative example (steel pipe No. 29) where a slab heating temperature lower than the preferable range according to the present invention, the desired high strength was not achieved in the base metal portion and the electric resistance weld zone as indicated by a tensile strength TS of less than 450 MPa, and there was a deterioration in resistance to softening in a long period and creep rupture property. In addition, in the case of the comparative example (steel pipe No. 30) where the holding time in a slab heating process was less than the preferable range according to the present invention, since Nb precipitates having a large grain diameter were retained, there was a deterioration in the resistance to softening for a long period and creep rupture property of the base metal portion and the electric resistance weld zone. In addition, in the case of the comparative example (pipe No. 31) where hot rolling reduction in the non-recrystallization

- 74 -

temperature range was less than the preferable range according to the present invention, since the desired microstructure was not achieved as indicated by an average grain diameter in the base metal portion of more than 10 μm , there was a deterioration in resistance to softening in a long period as indicated by a ΔYS of 60 MPa or more, and there was a deterioration in creep rupture property as indicated by a $\sigma_{\text{creep}}/\text{YS}_{\text{RT}}$ of less than 0.80.

[0083]

In addition, in the case of the comparative example (steel pipe No. 32) where a cooling rate after heating had been performed in a heat treatment of an electric resistance weld zone was less than the preferable range, since the desired microstructure was not achieved due to an increase in the grain diameter of a microstructure in an electric resistance weld zone, a desired high strength of 450 MPa or more in terms of yield strength was not achieved, and there was a deterioration in resistance to softening for a long period and creep rupture property. In the case of the comparative example (steel pipe No. 36) where a cooling rate after heating had been performed in a heat treatment of an electric resistance weld zone was less than the preferable range, since the desired microstructure was not achieved due to the electric resistance weld zone having a microstructure mainly including a bainite phase, there was a deterioration

- 75 -

in resistance to softening for a long period and creep rupture property.

[0084]

In addition, in the case of the comparative example (steel pipe No. 42) where a cooling rate after hot rolling had been performed was less than the preferable range according to the present invention, since the desired microstructure was not achieved due to an increase in the grain diameter of a microstructure in the base metal portion, there was a deterioration in resistance to softening for a long period and creep rupture property. In addition, in the case of the comparative example (steel pipe No. 46) where a cooling rate after hot rolling had been performed was more than the preferable range according to the present invention, since the desired microstructure was not achieved due to a base metal portion having a microstructure mainly including a bainite phase, there was a deterioration in resistance to softening for a long period and creep rupture property.

[0085]

In addition, in the case of the comparative example (steel pipe No. 47) where a holding time in a temperature range of 480°C to 350°C after coiling had been performed was less than the preferable range according to the present invention, since the desired microstructure was not achieved due to a base metal portion having a microstructure mainly

- 76 -

including a bainite phase, there was a deterioration in resistance to softening for a long period and creep rupture property. In addition, in the case of the comparative example (steel pipe No. 49) where a holding time in a temperature range of 480°C to 350°C after coiling had been performed was more than the preferable range according to the present invention, there was a deterioration in the resistance to softening for a long period and creep rupture property of the base metal portion. In addition, in the case of the comparative example (steel pipe No. 52) where a cooling rate in a cooling process after the heating of an electric resistance weld zone had been performed was less than the preferable range according to the present invention, since the desired microstructure was not achieved due to an increase in the grain diameter of a microstructure in the electric resistance weld zone, there was a deterioration in resistance to softening for a long period and creep rupture property. In addition, in the case of comparative example (steel pipe No. 56) where a cooling rate in a cooling process after the heating of the electric resistance weld zone had been performed was less than the preferable range according to the present invention, since the desired microstructure was not achieved due to a decrease in the volume percentage of a quasi-polygonal ferrite phase, there was a deterioration in resistance to softening for a long

- 77 -

period and creep rupture property.

[0086]

In addition, in the case of the comparative example (steel pipe No. 50) where a holding time in a temperature range of 500°C to 360°C in a cooling process after the heating of the electric resistance weld zone had been performed was less than the preferable range according to the present invention, there was a deterioration in resistance to softening for a long period and creep rupture property. In addition, in the case of the comparative example (steel pipe No. 51) where a holding time in a temperature range of 500°C to 360°C in a cooling process after the heating of the electric resistance weld zone had been performed was more than the preferable range according to the present invention, there was a deterioration in resistance to softening for a long period and creep rupture property.

[0087]

In addition, in the case of the comparative example (steel pipe No. 37) where the lower limit of a heating temperature when the heating of an electric resistance weld zone was performed was lower than the preferable range according to the present invention, since the desired microstructure was not achieved due to the electric resistance weld zone having a microstructure mainly

- 78 -

including a polygonal ferrite phase having a large grain diameter, the desired high strength was not achieved as indicated by a tensile strength TS of the electric resistance weld zone of less than 450 MPa, and there was a deterioration in resistance to softening for a long period and creep rupture property. In addition, in the case of the comparative example (steel pipe No. 41) where the lower limit of a heating temperature when the heating of an electric resistance weld zone was performed was higher than the preferable range according to the present invention, since the desired microstructure for the electric resistance weld zone was not achieved due to the electric resistance weld zone having a microstructure including, in terms of volume percentage, less than 90% of a quasi-polygonal ferrite phase, there was a deterioration in resistance to softening for a long period and creep rupture property.

In addition, in both cases of steel pipe No. 40 (example of the present invention) where a taper type groove was formed in the end faces in the width direction of a hot rolled steel sheet (end faces of butt portions) when electric resistance welding was performed and steel pipe No. 39 (example of the present invention) where atmospheric control was performed when electric resistance welding was performed, since the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter

- 79 -

of 5 μm or more in an electric resistance weld zone was 20 mass ppm or less, which was less than that of the steel pipes which were manufactured without forming a taper type groove or performing atmospheric control, ΔYS became less than 30 MPa, which means that these steel pipes were particularly excellent in terms of resistance to softening for a long period.

CLAIMS

[Claim 1]

A high strength electric resistance welded pipe having a chemical composition containing, by mass%,
C: 0.025% or more and 0.084% or less, Si: 0.10% or more and 0.30% or less,
Mn: 0.70% or more and 1.90% or less, P: 0.018% or less,
S: 0.0029% or less, Al: 0.01% or more and 0.10% or less,
Nb: 0.001% or more and 0.070% or less, V: 0.001% or more and 0.065% or less,
Ti: 0.001% or more and 0.033% or less, Ca: 0.0001% or more and 0.0035% or less,
N: 0.0050% or less, O: 0.0030% or less
and the balance being Fe and inevitable impurities, in which the condition that P_{cm} which is defined by equation (1) below is 0.20 or less is satisfied, having a microstructure in a base metal portion including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase and the balance being hard phases other than the quasi-polygonal ferrite phase, in which the quasi-polygonal ferrite phase has an average grain diameter of 10 μm or less, having a microstructure in an electric resistance weld zone including, in terms of volume percentage, 90% or more of a quasi-polygonal ferrite phase as a main phase and the balance being hard phases other than the quasi-polygonal ferrite phase, in which the quasi-polygonal ferrite phase has an average grain diameter of 10 μm or less, and having a yield strength YS of 450 MPa or more and a change in yield strength ΔYS of less than 60 MPa between before and after a heat treatment at a temperature of 400°C for a duration of 2340 hours:

$$P_{cm} = C + Si/30 + Mn/20 + Cu/20 + Ni/60 + Cr/20 + Mo/15 + V/10 + 5B \quad \dots (1)$$

where C, Si, Mn, Cu, Ni, Cr, Mo, V and B represent the contents, mass% of chemical elements respectively represented by the corresponding atomic symbols.

[Claim 2]

The high strength electric resistance welded pipe according to Claim 1, wherein the pipe has the chemical composition further containing, by mass%, one or more selected from among Cu: 0.001% or more and 0.350% or less, Ni: 0.001% or more and 0.350% or less, Mo: 0.001% or more and 0.350% or less and Cr: 0.001% or more and 0.350% or less.

[Claim 3]

The high strength electric resistance welded pipe according to Claim 1 or 2, wherein the total content of Si, Mn, Al, Ca and Cr contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in the electric resistance weld zone is 49 mass ppm or less.

[Claim 4]

A method for manufacturing a high strength electric resistance welded pipe having a yield strength YS of 450 MPa or more, in which an electric resistance welded pipe is manufactured by continuously forming a hot rolled steel sheet into an open pipe having an approximately circular cross section using a roll forming method, by performing electric resistance welding in which a vicinity of butt portions of the open pipe are heated up

to a temperature equal to or higher than the melting point and welded with pressure using a squeeze roll to make an electric resistance welded pipe having an electric resistance weld zone and by subsequently performing an online heat treatment on the electric resistance welded pipe, the method comprising heating and soaking a steel material having a chemical composition containing, by mass%,

C: 0.025% or more and 0.084% or less, Si: 0.10% or more and 0.30% or less,

Mn: 0.70% or more and 1.90% or less, P: 0.018% or less, S: 0.0029% or less, Al: 0.01% or more and 0.10% or less, Nb: 0.001% or more and 0.070% or less, V: 0.001% or more and 0.065% or less, Ti: 0.001% or more and 0.033% or less, Ca: 0.0001% or more and 0.0035% or less,

N: 0.0050% or less, O: 0.0030% or less

and the balance being Fe and inevitable impurities, wherein the condition that P_{cm} which is defined by equation (1) below is 0.20 or less is satisfied, at a temperature of higher than 1200°C and 1280°C or lower for 90 minutes or more, performing hot rolling under conditions such that the hot rolling reduction in an unrecrystallization temperature range is 20% or more and finish rolling completing temperature is 750°C or higher, cooling the hot rolled steel sheet, in terms of the temperature of the central portion in the thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and 299°C/sec. or less in a temperature range of 780°C to 620°C, coiling the hot rolled steel sheet at a coiling temperature of 595°C or lower and 475°C or higher, subsequently performing a heat treatment under conditions such that the coiled

hot rolled steel sheet is subjected to a cumulative holding time in a temperature range of 480°C to 350°C for 2 hours or more and 20 hours or less, performing the online heat treatment under conditions such that the whole of the wall thickness in the vicinity of the electric resistance weld zone is heated up to a temperature of 800°C or higher and 1150°C or lower and then cooled, in terms of the temperature of a central portion in the wall thickness direction, down to a cooling stop temperature of 620°C or lower at an average cooling rate of 7°C/sec. or more and 299°C/sec. or less in a temperature range of 780°C to 620°C, and further subjected to a cumulative holding time in a temperature range of 500°C to 360°C for 2 seconds or more and 200 seconds or less:

$$P_{cm} = C + Si/30 + Mn/20 + Cu/20 + Ni/60 + Cr/20 + Mo/15 + V/10 + 5B \quad \dots (1),$$

where C, Si, Mn, Cu, Ni, Cr, Mo, V and B represent the contents, mass% of chemical elements respectively represented by the corresponding atomic symbols.

[Claim 5]

The method for manufacturing a high strength electric resistance welded pipe according to Claim 4, wherein the steel material has the chemical composition further containing, by mass%, one or more selected from among Cu: 0.001% or more and 0.350% or less, Ni: 0.001% or more and 0.350% or less, Mo: 0.001% or more and 0.350% or less and Cr: 0.001% or more and 0.350% or less.

[Claim 6]

The method for manufacturing a high strength electric resistance welded pipe according to Claim 4 or 5, wherein the method includes forming a taper type groove in both end faces in the width direction of the hot rolled steel sheet when finpass forming is performed in the roll forming such that the distance in the thickness direction of the hot rolled steel sheet between the starting position of the taper and the surface of the steel sheet which is to become the outer or inner surface of a steel pipe is 2% to 80% of the thickness of the hot rolled steel sheet.

[Claim 7]

The method for manufacturing a high strength electric resistance welded pipe according to any one of Claims 4 to 6, wherein the electric resistance welding is performed in an atmosphere in which an oxygen concentration is less than in atmospheric air.

[Claim 8]

The method for manufacturing a high strength electric resistance welded pipe according to any one of Claims 4 to 7, wherein the total content of Si, Mn, Al and Ca contained in inclusions having an equivalent circle diameter of 5 μm or more which are present in the electric resistance weld zone is 49 mass ppm or less.

1 / 1

FIG. 1

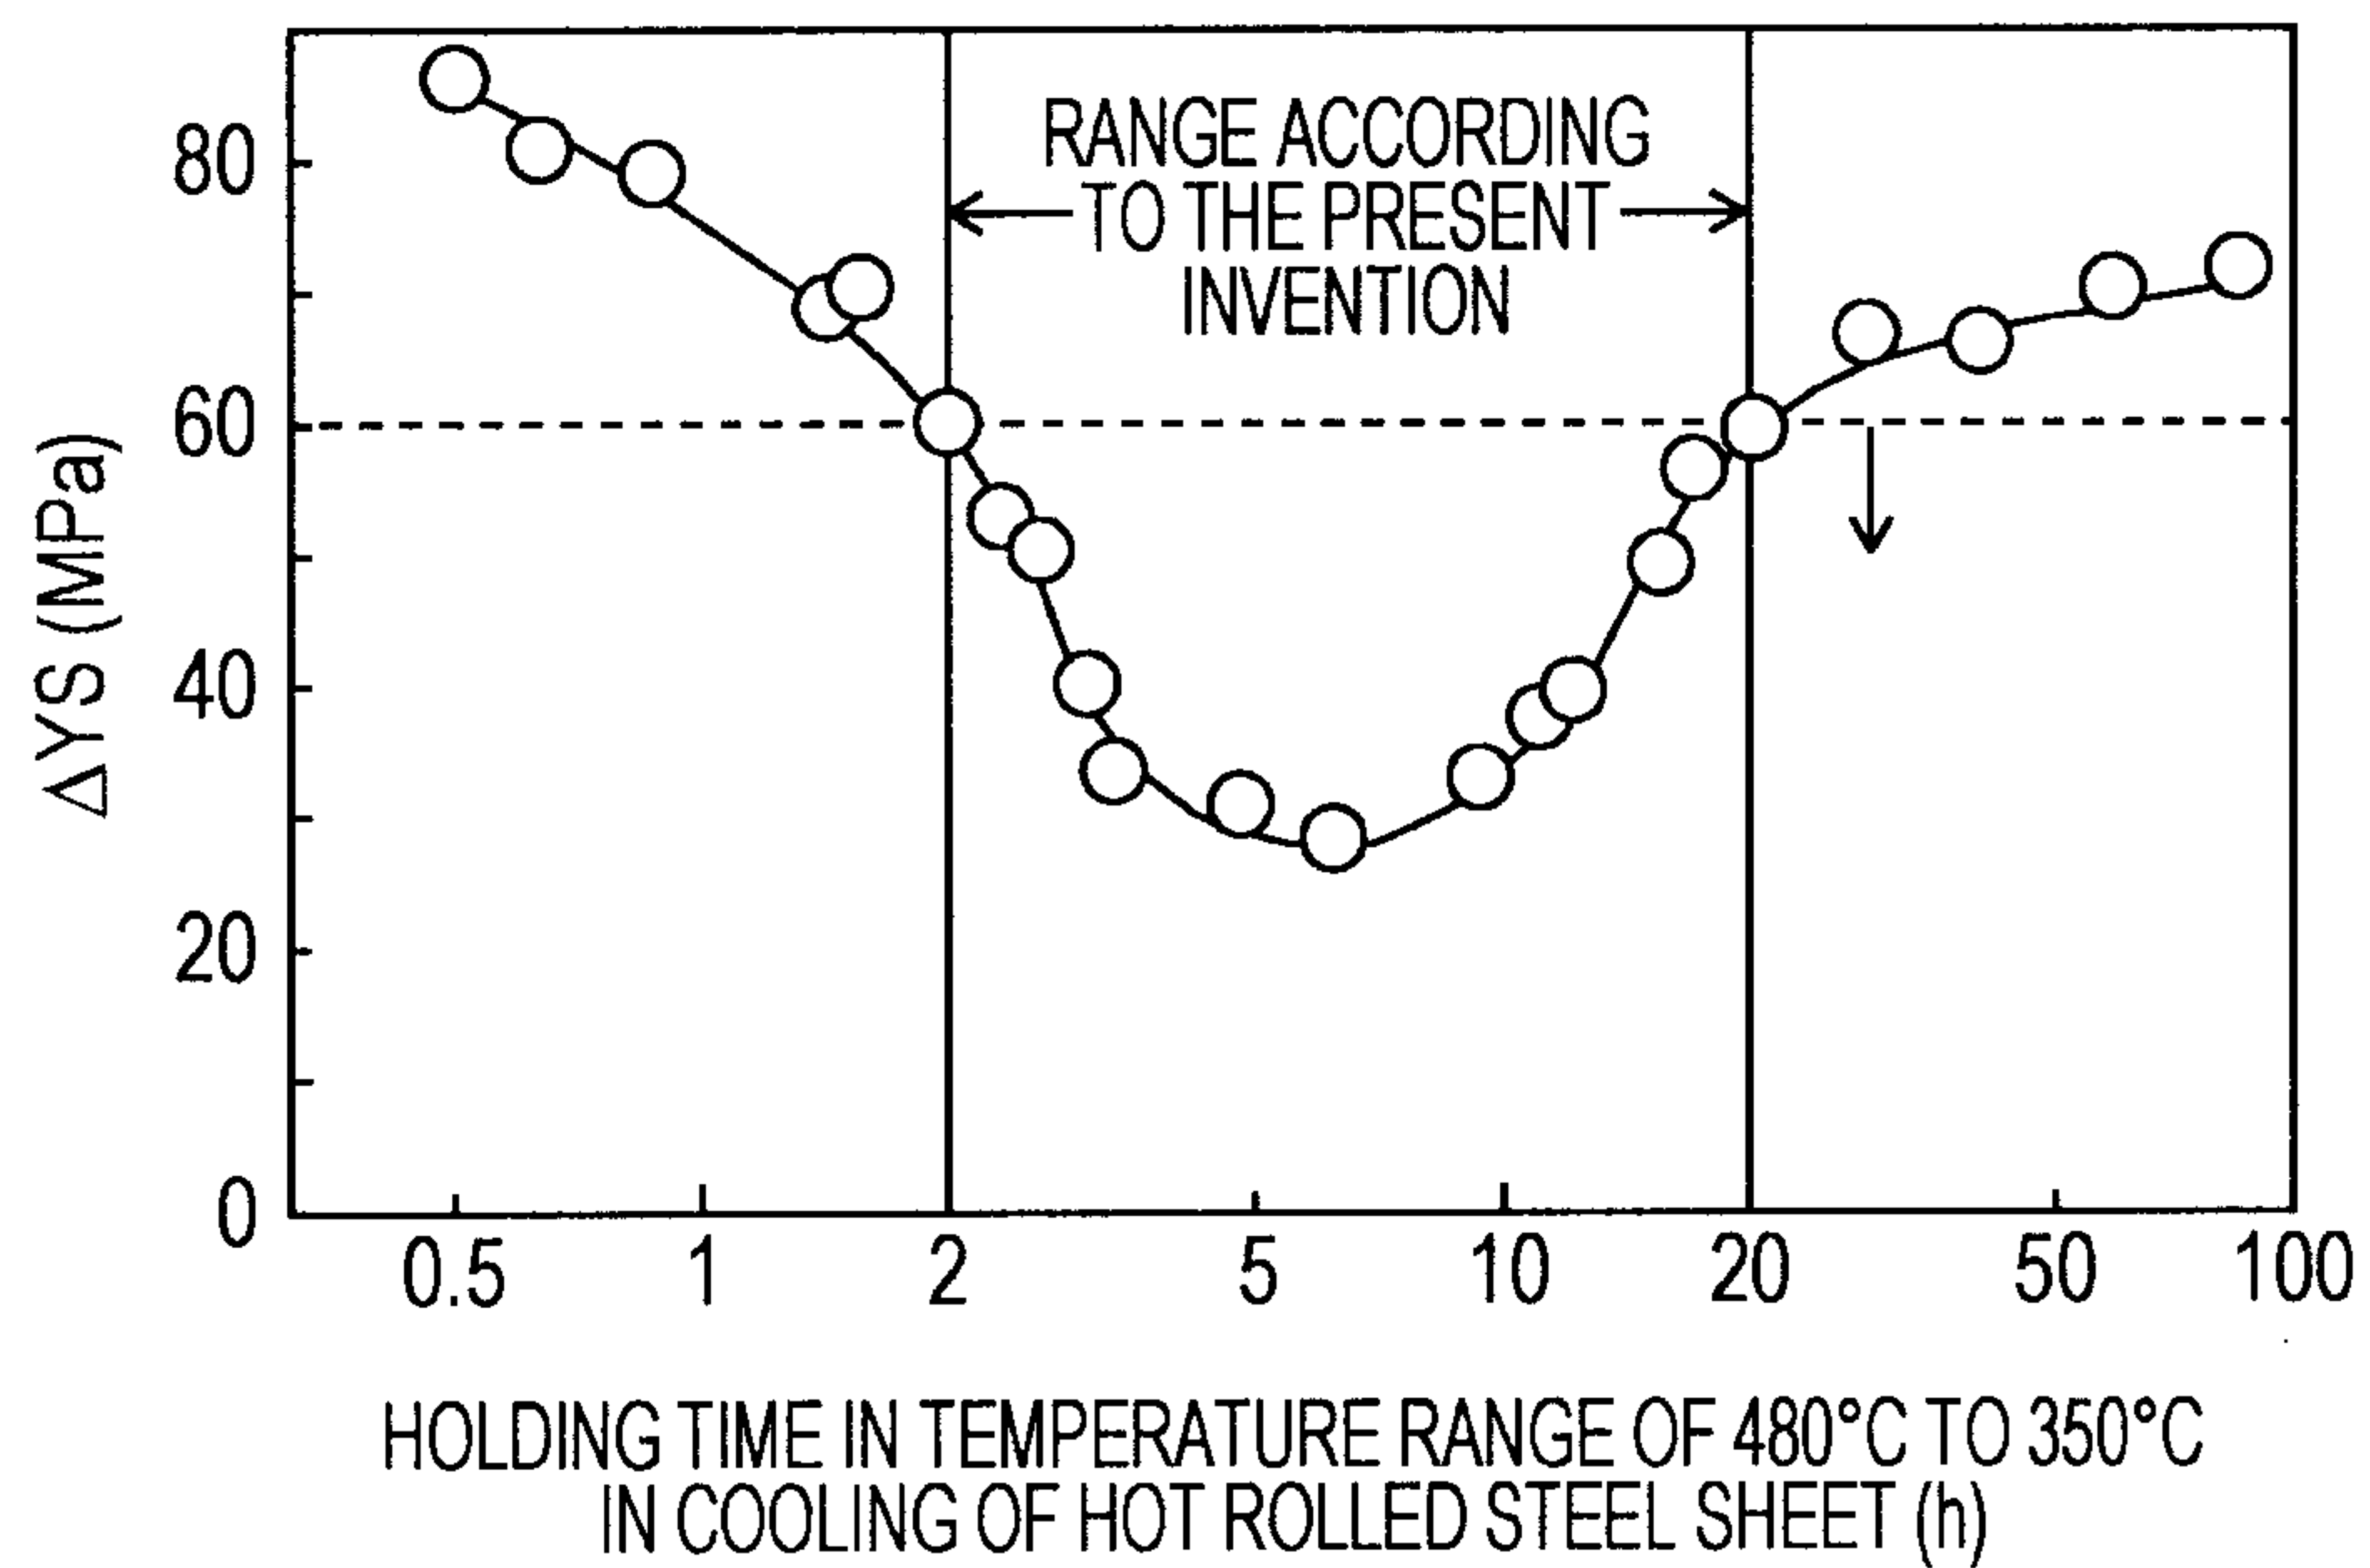


FIG. 2

