



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2393210 C 2008/01/08

(11)(21) **2 393 210**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/11/13
(87) Date publication PCT/PCT Publication Date: 2001/06/07
(45) Date de délivrance/Issue Date: 2008/01/08
(85) Entrée phase nationale/National Entry: 2002/05/31
(86) N° demande PCT/PCT Application No.: FI 2000/000986
(87) N° publication PCT/PCT Publication No.: 2001/040572
(30) Priorité/Priority: 1999/12/03 (FI19992603)

(51) Cl.Int./Int.Cl. *D21F 7/00* (2006.01),
D21F 1/00 (2006.01), *D21F 1/66* (2006.01),
D21F 3/02 (2006.01), *D21G 1/02* (2006.01)


(72) Inventeurs/Inventors:
HOLOPAINEN, KARI, FI;
KINNUNEN, JUHA, FI

(73) Propriétaire/Owner:
METSO PAPER, INC., FI

(74) Agent: SIM & MCBURNEY

(54) Titre : PROCEDE PERMETTANT D'UTILISER DES DISPOSITIFS HYDRAULIQUES A EAU DANS UNE MACHINE
DE FABRICATION DE PAPIER OU DE CARTON

(54) Title: METHOD FOR USING WATER HYDRAULICS IN A PAPER OR BOARD MACHINE

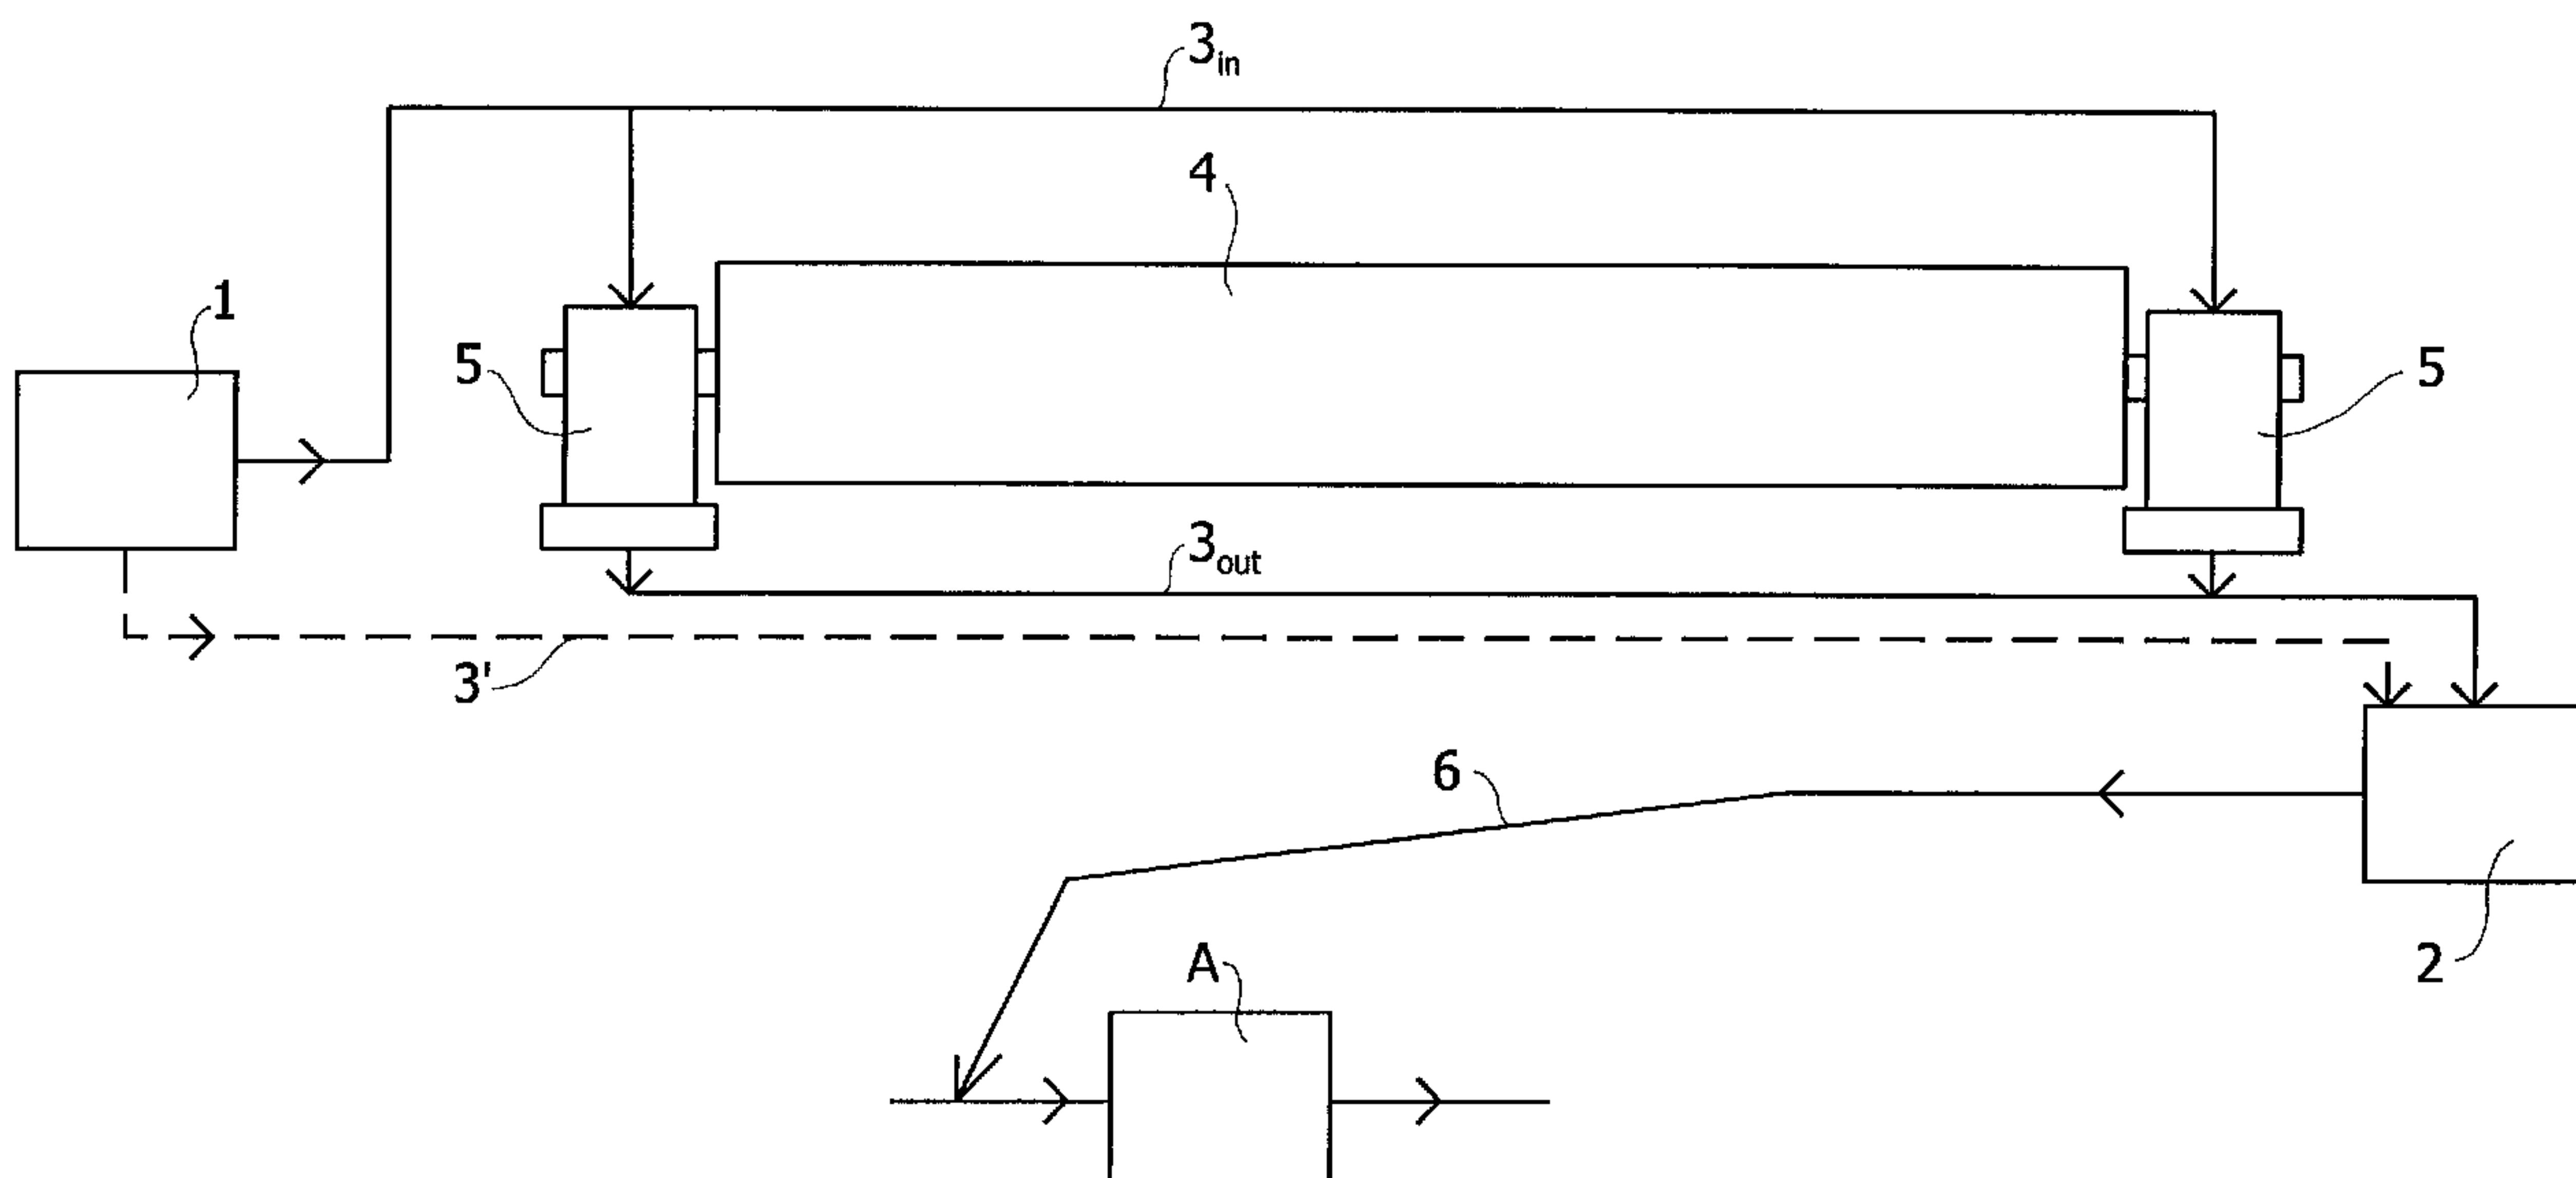

(57) Abrégé/Abstract:

The invention relates to a method for using water hydraulics in a paper or board machine, in particular in applications requiring lubrication and in the like in which an operating medium is subjected to pressure. According to the invention, some chemical used in the stock system (A) of the process is mixed with the water used in water hydraulics before the water is passed to a site of application (5) in order to raise the viscosity of the water and chemical mixture to a level required by the site of application (5). The water and chemical mixture is passed (3_{in}) after that to the site of application (5) and circulated through the same at least once, after which said water and chemical mixture is recovered (2) and passed to the stock system (A) of the process as diluted to a suitable concentration.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 June 2001 (07.06.2001)

PCT

(10) International Publication Number
WO 01/40572 A1(51) International Patent Classification⁷:

D21F 1/00

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(21) International Application Number:

PCT/FI00/00986

(22) International Filing Date:

13 November 2000 (13.11.2000)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19992603 3 December 1999 (03.12.1999) FI

(71) Applicant (for all designated States except US): METSO
PAPER, INC. [FI/FI]; Fabianinkatu 9 A, FIN-00130
Helsinki (FI).


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR USING WATER HYDRAULICS IN A PAPER OR BOARD MACHINE

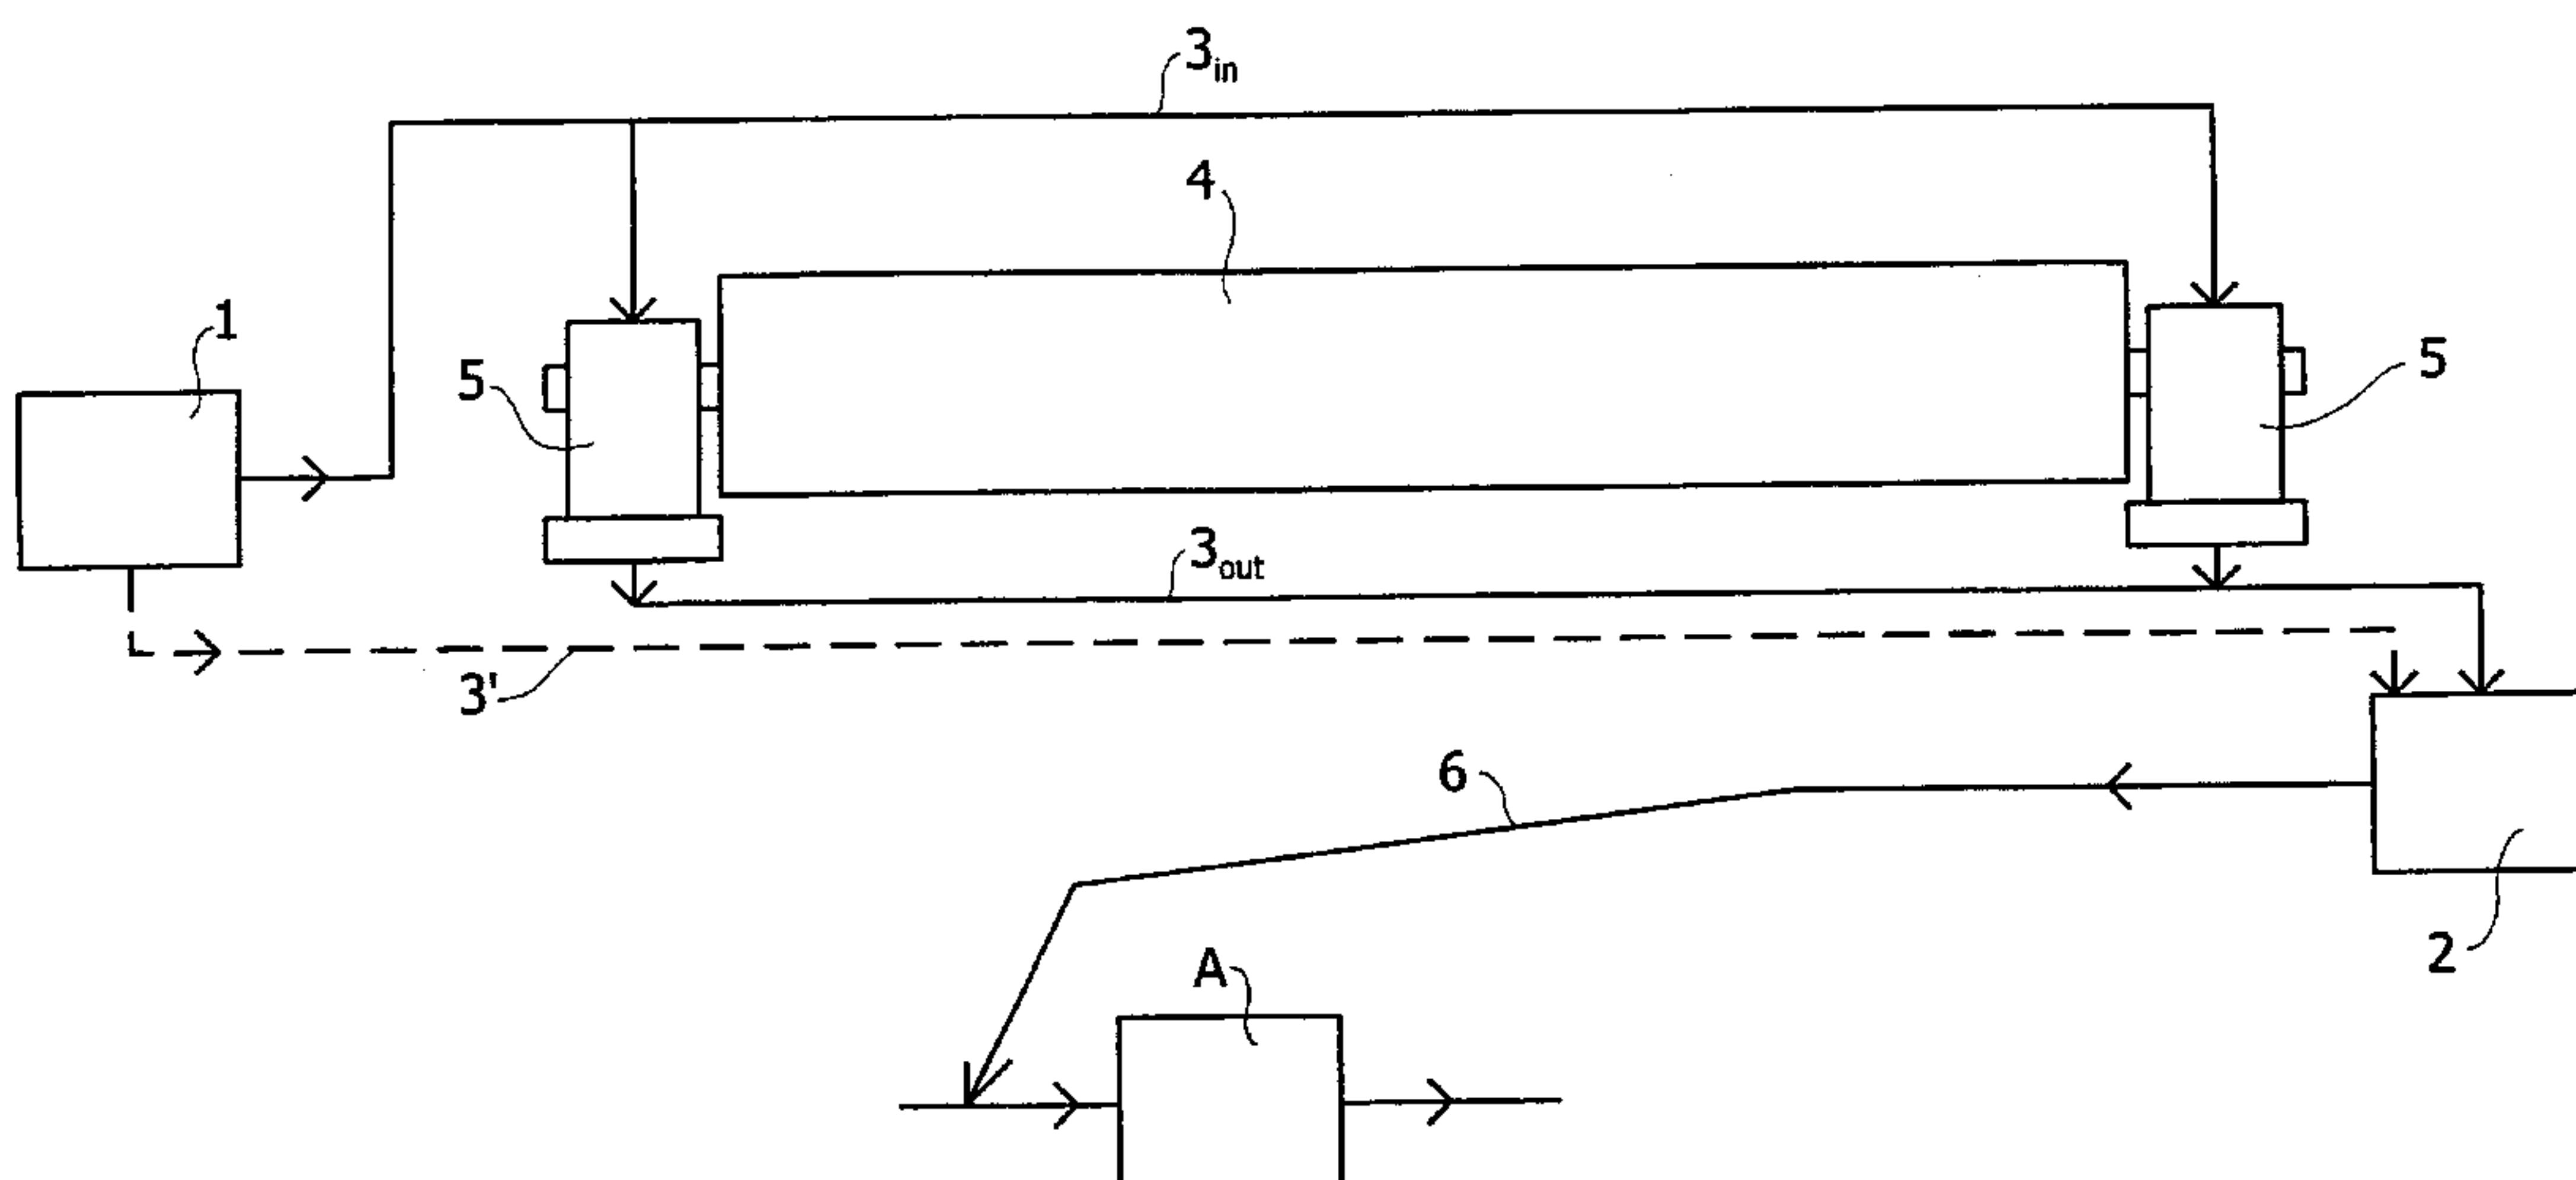

WO 01/40572 A1

(57) **Abstract:** The invention relates to a method for using water hydraulics in a paper or board machine, in particular in applications requiring lubrication and in the like in which an operating medium is subjected to pressure. According to the invention, some chemical used in the stock system (A) of the process is mixed with the water used in water hydraulics before the water is passed to a site of application (5) in order to raise the viscosity of the water and chemical mixture to a level required by the site of application (5). The water and chemical mixture is passed (3_{in}) after that to the site of application (5) and circulated through the same at least once, after which said water and chemical mixture is recovered (2) and passed to the stock system (A) of the process as diluted to a suitable concentration.

Method for using water hydraulics
in a paper or board machine

5 The invention relates to a method for using water hydraulics in a paper or board machine, in particular in applications requiring lubrication and in the like in which an operating medium is subjected to pressure.

Conventionally, in paper and board machines, oil is used in several applications as
10 an operating liquid, in cooling systems, in bearing arrangements, etc. The apparatus
must be tightly encased to prevent the drawbacks of oil leakages in order that
oil should not be allowed to damage the product which is being manufactured,
such as paper or board, or to contaminate the devices situated in the surroundings.
Moreover, when oil gets into the environment, for example, with waters dis-
charging from a mill, it is very harmful because of the pollution of the environ-
15 ment. Considerable amounts of heat are generated in different bearing applications
of rolls and it is therefore necessary to use in these bearing applications large
cooling systems, in which lubricating oil is most commonly cooled by means of
water. Possible oil leakages often get into the environment and, as already stated
20 above, the disposal of oil causes substantial loadings to the environment. Addi-
tionally, hot oil is a risk factor in terms of fire safety. When thinking, for example,
of the rolls which are used in paper machines and which are loaded with hydraulic
oil and journalled with slide bearings, the hydraulic medium demand per roll is
25 substantial. As an example, it may be mentioned that about 10 to 12 m³ of hy-
draulic oil is needed for one deflection-compensated roll loaded with hydraulic
oil. When one machine includes a considerable number of such rolls, the paper
mill has to keep a very large stock of hydraulic oil.

Electricity is used as driving power in several devices, in which connection it is
30 necessary to set special requirements for these electric motors because of the
humid surroundings. In addition, in some equipment in paper machines, air is used

as driving power, which again requires a separate pneumatic system of its own. When it is necessary to use simultaneously several different types of driving power and to build several different operating medium lines, to encase devices, to construct special arrangements because of fire safety, etc., these actions cause, of course, considerable costs, and further this kind of solutions require an abundance of space to place the equipment in machines. Today, attempts are being made to achieve durable arrangements which protect the environment, are economical and take little space, in which connection more and more attention is being paid to the use of environmentally friendly and economical water as driving power instead of other operating mediums.

With respect to the prior art relating to water hydraulic systems, reference is made, for example, to Finnish patent **76 409** which describes journal bearings which are suitable for rotating transfer rolls and spreader rolls and in which water is used as lubricant. The use of water is suitable for this kind of system because the operating medium is not subjected to high pressure in the system. The system described in this Finnish patent cannot be applied to a system under high pressure.

US patent **4 167 964** describes an apparatus intended for rolling of metal, which apparatus uses rolls loaded with a pressure medium. In the case described in this publication, water is used as the pressure medium. In addition to pressurization, water is used in the system for lubrication and for cooling. In spite of high working pressures, the use of water is feasible in the system because a very high flow rate of water is used in addition to pressurization. If the used flow of water were slight, it could not be used for pressurization because of the low viscosity of water.

Finnish patent application No. **942616** discloses a prepress for a paper web, in particular a shoe press, in which water is used as the operating liquid in a loading shoe. Water serves in the system simultaneously as a lubricating medium and as a medium producing a loading pressure. The use of water also in this arrangement is

possible because the loading pressures used are not very high and, in addition, the flow of the loading medium is high at the same time. In that connection, the low viscosity is not too detrimental from the point of view of the use of the arrangement.

5

The aim of the present invention is to provide a method which allows the use of water hydraulics in a paper and board machine also in applications in which the operating medium is subjected to a considerable pressure. With a view to achieving this aim, the invention is mainly characterized in that some chemical used in 10 the stock system of the process is mixed with the water used in water hydraulics before the water is passed to a site of application in order to raise the viscosity of the water and chemical mixture to a level required by the site of application, the water and chemical mixture is passed to the site of application and circulated 15 through the same at least once, after which said water and chemical mixture is recovered and passed to the stock system of the process as diluted to a suitable concentration.

As a special application of the invention it is proposed that the method is applied to roll hydraulics, in particular to the lubrication of rolls journaled with slide 20 bearings and/or to the pressurization and lubrication of the loading elements of hydraulically loaded rolls and the like.

Thus, in the method according to the invention, attempts are made to replace with water hydraulics in particular such oil hydraulics which is intended to produce 25 remarkably high pressure levels. Slide bearings of rolls, internally loaded deflection-compensated rolls, band rolls, such as long-nip rolls and the like may be mentioned as examples of these. The use of water hydraulics provides substantial benefits over previous arrangements, one of the most important benefits being the fact that it is environmentally friendly. In respect of the operating medium, the 30 system is very economical because the hydraulic oils conventionally used are relatively expensive. A significant advantage is also that the operating medium in

water hydraulics is incombustible. If there occur any leakages in the system, these leakages will not contaminate its surroundings. This means that even large leakages will not cause problems, but in most cases the leakage waters can be discharged directly into the drain or into a treatment system of the circulation water of the paper machine. Owing to the low viscosity of water, no large-diameter pipes are needed in the system. Relatively long pipe lines are also possible. When changing over from oil hydraulics to water hydraulics, substantial alterations need not necessarily be made in the pipe lines especially if the pipe lines of oil hydraulics have already been made of an acid-proof material. The use of a water hydraulic system does not involve the air separation problem similar to that of oil hydraulic systems. A water hydraulic system does not require large storage tanks of the kind needed in oil hydraulic systems. In some instances, in water hydraulic systems it would also be possible to use sea water as the medium.

Accordingly, in one aspect of the present invention, there is provided a method for using water hydraulics in a paper or board machine, for lubrication subjected to pressure, wherein a chemical used in a stock system of a process is mixed with water to be used in the water hydraulics before the water is passed to the water hydraulics in order to raise the viscosity of the water and chemical mixture to a level suitable for the water hydraulics, and the water and chemical mixture is passed to the water hydraulics and circulated through the water hydraulics at least once, after which the water and chemical mixture is recovered, diluted and passed as diluted to the stock system of the process.

The other advantages and characteristic features of the invention will come out from the following detailed description of the invention.

Figure 1 of the drawing is a fully schematic view of a system according to the invention.

Figure 2 shows the effect of chemicals used in a paper making process on the viscosity of water as a function of concentration.

Table 1 shows a typical production capacity of a paper machine line.

Table 2 shows a balance sheet calculation of a paper production line for some polymer-based retention aids.

Table 3 shows a calculation of amounts of consumption of chemicals required at different viscosities.

Table 4 shows properties of and demand for one surface size starch for the pro-

duction of Table 1.

It has already been stated earlier that the low viscosity of water constitutes a considerable problem for the use of water hydraulics in a paper machine. This
5 problem becomes very clear in the sites of application which require a high pressure, such as, for example, in slide bearings and in loading elements of deflection-controlled rolls. The amounts of pure water which need to be pumped to provide a sufficient lubricating film would be unreasonably high, which means that the treatment of large amounts of water in confined spaces will constitute a problem.
10 However, the viscosity of water can be raised with certain additives, in which connection by using this kind of additives the required water amounts can be brought to a level that can be controlled. Different polymer-based additives are relatively expensive, so that their use in view of mere water hydraulics becomes questionable in respect of costs.

15

However, in the papermaking process, different chemicals are used in different stages of the process, such as, fixatives and retention aids, which allow the viscosity of water to be raised. In the papermaking process, these substances are dosed to a given point in the process, to which they are passed as diluted to a
20 suitable concentration, for example, to make the properties of stock as desired. The present invention utilizes chemicals which are fed to the process in any case and by means of which the viscosity of water is raised to such an extent that water hydraulics can be used, for example, in slide bearing arrangements of rolls, in loading of the loading elements of deflection-controlled rolls, as well as in resili-
25 ent-shell rolls, in particular in long-nip rolls. This is sought to be illustrated by means of the figure in the accompanying fully schematic drawing.

30 In the schematic Fig. 1 of the drawing, a treatment system and mixing tank for a polymer is denoted with the reference numeral 1. In this, the polymer is mixed with water to a desired concentration and, as a result of this, water obtains a given viscosity. In a conventional process circulation water system, the mixture of

polymer and water has been passed along a feed line 3' into a polymer storage tank, which is denoted in the figure with the reference numeral 2. The polymer and water mixture is passed from said polymer storage tank 2, as suitably diluted, along a line 6 to a given process stage, which is schematically denoted with the 5 reference sign A in the figure. The process stage A may be, for example, supply of stock to a wire section, i.e. to a headbox. Thus, as shown in Fig. 1, the substance is fed as diluted to a suitable concentration before the headbox. Since the circulation water systems of the paper machine are known in themselves, said system is not depicted in more detail in this connection.

10

In the system according to the invention shown in Fig. 1, the polymer and water mixture is not passed from the polymer mixing tank 1 directly into the polymer storage tank 2, but in the case shown in the figure relating to the use of water hydraulics for lubrication of the bearings of a roll, the polymer and water mixture 15 is passed from the polymer mixing tank 1 along a feed line 3_{in} to bearings 5 of the roll 4. From the bearings 5 the polymer and water mixture is passed further along a line 3_{out} into the polymer storage tank 2. Thus, in the polymer mixing tank 1, the polymer is mixed with water in a concentration such as to provide a viscosity required by the lubrication of the bearings 5 at a given flow through the bearings 20 5. Hence, this concentration is naturally higher than the concentration needed in the process because final dilution is not carried out until after the polymer storage tank 2.

Regarding the polymers used in the process, it may generally be stated that long-chain polymers are relatively short-lived, which means that the viscosity of the 25 polymer and water mixture collapses after certain use. However, by modifying polymers, they can be made last longer. Thus, short-chain polymers are superior to long-chain polymers. In the use according to the invention, the polymers must be such that they will not lose their characteristics when they are used, for example, 30 in the manner shown in Fig. 1 for lubrication of bearings of a roll. If the properties changed substantially, for example, in the water hydraulic system shown in Fig. 1

while the polymer and water mixture flows through the bearings 5 and enters the storage tank 2, it would not necessarily be possible any more to use said polymers for their original purpose in the process.

5 Thus, the aim is that the polymer must be such that it can be used at least once without it losing its characteristics, for example, for lubrication of bearings, in which connection the polymer could also be utilized elsewhere in the process. Most commonly, it may be contemplated that the polymer is used 2 to 3 times, after which it must be renewed. Water is collected from suitable points of a paper 10 or board machine, circulated into a tank or equivalent, filtered and cleaned, and passed into the polymer treatment system 1. The polymer treatment system is additionally supplied with a required amount of fresh water and of a new polymer such as to achieve a suitable concentration and viscosity.

15 The polymer may be a synthetic polymer or a biopolymer. Fig. 2 of the drawing shows the effect of different chemicals used in the papermaking process on the viscosity of water as a function of concentration. The chemicals mentioned in Fig. 2 are polymer-based retention aids, fixatives. In order to further illustrate the invention, in the tables described in the following, the amounts of consumption of 20 several different chemicals (see Fig. 2) required in a bearing arrangement have been calculated at different viscosities and compared with the amount required by a paper machine line.

25 The retention aids shown in Fig. 2 as well as in Tables 2 and 3 are of the following type:

30 Substance 1: A cationic coagulant. A linear cationic polyelectrolyte having a low molecular weight, the active ingredient of which is a cross-linked epichlorohydrin dimethylamine (Epi-DMA) polymer.

Substance 2: A cationic coagulant. A linear cationic polyelectrolyte of low

molecular weight, the active ingredient of which is PolyDADMAC.

Substance 3: A cationic coagulant, the active ingredients of which are PolyDADMAC and acrylic acid.

5

Substance 4: A cationic coagulant. A cross-linked cationic polymer of moderate molecular weight. The active ingredient is a cross-linked epichlorohydrin dimethylamine (Epi-DMA) polymer.

10 Substance 5: A cationic coagulant. A linear cationic polyelectrolyte of low molecular weight, the active ingredient of which is PolyDADMAC (some differences in physical characteristics as compared with the substance 2).

15 Substance 6: A cationic coagulant. A linear cationic polyelectrolyte of low molecular weight, the active ingredient of which is a linear Epi-DMA polymer.

20 Substance 7: A cationic emulsion flocculant. A synthetic cationic polyacrylamide-copolymer-based flocculant of high molecular weight.

25 Substance 8: A cationic emulsion flocculant. A synthetic cationic polyacrylamide-copolymer-based flocculant having a low molecular weight and a high cationic charge.

Substance 9: A cationic flocculant. A liquid cationic polymer of medium molecular weight, the active ingredient of which is an acrylamide copolymer.

30 Table 1 shows a typical production capacity of a paper machine line. Table 2 in turn shows a balance sheet calculation of a paper production line for some poly-

mer-based retention aids. The substances shown in this table are the same as those in Fig. 2. Table 3 in turn shows a calculation of the amounts of consumption of said chemicals needed in a bearing arrangement of a roll at different viscosities.

5 In the following, the tables can be examined by means of an example. When looking, for example, at Table 2 and at the retention aid (Substance 1) appearing as the first in it, it can be seen that the demand for said retention aid with the production according to Table 1 is 3,969 kg/min at the maximum. Together with Tables 2 and 3 and taking account of what is shown in Fig. 2, it can be immediately noted that, firstly, in the slide bearing operation of a suction roll, the required viscosity is 20 cSt at a consumption of 146 l/min. By means of Fig. 2 it is seen, firstly, that the substance 1 provides the required viscosity at a concentration of 10 2 %. In a corresponding way, at this concentration and flow, the consumption of the chemical is 3.4 kg/min. This amount is smaller than the maximum chemical demand with the production shown in Table 1. In some cases, a lower viscosity is also sufficient, however, such that the value of 10 cSt can be regarded as the lower limit of the kinematic viscosity of the water and chemical mixture. Thus, said substance would be very suitable for use in raising the viscosity in the slide bearing operation of a suction roll because said chemical need not be introduced into the system for the actual slide bearing operation in a higher amount than that required by the production process itself.

25 For example, the starches used in surface sizes and coating slips of paper can be considered to be one noteworthy option of raising viscosity in the water hydraulic system. Table 4 shows properties of and demand for one surface size starch with the production of Table 1. As Table 4 shows, with the production according to Table 1, the consumption of the surface size starch is 35.28 kg/min when the coated amount is 2 g/m². A concentration of 10 % is used in coating, in which connection the total consumption of the surface size starch and water is 352,8 30 l/min. The viscosity of the solution at a temperature of 30 °C is 30 cSt. When the total amount as an aqueous solution is compared with the consumption required in

the slide bearing operation, it is immediately noted that the total amount of the surface size starch in an aqueous solution needed for surface sizing is much higher than the consumption of the aqueous solution needed for the slide bearing operation of a suction roll and a press roll. Thus, the aqueous solution of the surface size starch could be passed through the bearing arrangement before it is fed to the size press. As a possible drawback with the use of such a substance, clogging of components and pipes might be envisaged, in particular during shutdowns. This could, however, be avoided by the fact that during shutdowns, the system is always rinsed in order that no surface size starch shall remain in the pipes and components. The startup of the system is also problem-free because, for example, when starting presses, calenders and others, said devices are in an unloaded state. In that connection, a lower concentration of the loading medium is sufficient, wherefore there is no risk of clogging at the startup stage, either.

The use of water hydraulics is particularly advantageous in the bearing arrangements of wire and press section rolls, such as suction rolls, prepress rolls and the like, because the requirements set on sealing of the bearing arrangement are not anywhere near as high as when oil is used. In these cases, lubricating water can be passed, for example, through a suction box and a suction duct out of the roll. In that connection, it is also possible to construct a closed lubrication circulation for the bearing arrangement.

Above, the invention has been described by means of examples, to which the invention is, however, not intended to be exclusively confined. Accordingly, the different embodiments of the invention may vary within the inventive idea defined in the accompanying claims.

Table 1: Production capacity of a paper machine line (example)

Web width	9800 mm
Basis weight	45 g/m ²
Running speed	1800 m/min
Production	793.8 Kg/min
Annual production	396,360,216 tonnes

Table 2: Balance sheet calculation of a paper production line for some polymer-based retention aids (fixatives)

Substance	Dosage concentration		Concentration in slide bearing operation		Density		Dosage		Demand/production (with the production of Table 1)	Location
	min %	max %	min %	max %	kg/dm ³	kg/tome	min	max	kg/min	max kg/min
Substance 1	0.25	2			1.16	0.5	5	0.397	3.969	stock/broke line
Substance 2	0.25	9			1.18	0.5	5	0.397	3.969	stock/broke line
Substance 3	0.25	3			1.04	0.5	5	0.397	3.969	stock/broke line
Substance 4	0.25	9			1.18	0.5	5	0.397	3.969	stock/broke line
Substance 5	0.25	7			1.06	0.5	5	0.397	3.969	stock/broke line
Substance 6	0.25	-			1.18	0.5	5	0.397	3.969	stock/broke line
Substance 7	0.05	1.0	0.1	0.3	1.04	0.3	1	0.238	0.794	before headbox
Substance 8	0.1	0.5	0.2	2.5	1.01	0.5	2	0.397	1.588	before headbox
Substance 9	0.01	0.1	2	6	1.23	0.5	5	0.397	3.969	before headbox

Table 3: Amounts of consumption of water viscosity improving agents (Table 2) required for bearing systems of rolls at different viscosities

	Substance 1	Substance 2	Substance 3	Substance 4
	concentration %	concentration %	concentration %	concentration %
viscosity of water				
Suction roll journalled with slide bearings				
20 cSt	2.0	3.4	4.6	9.0
40 cSt	7.0	9.5	11.0	15.5
80 cSt				
Slide bearing arrangement in a press roll				
20 cSt	2.0	5.6	9.4	9.0
40 cSt	7.0	24.4	22.7	31.9
100 cSt				
150 cSt				
Shoe press	70 l/min/m			
150 cSt	150 l/min/m	119.4	137.6	
40 cSt	7.0			
	Substance 5	Substance 6	Substance 7	Substance 8
	concentration %	concentration %	concentration %	concentration %
viscosity of water				
Suction roll journalled with slide bearings				
20 cSt	7.0	10.8	0.2	0.2
20 cSt				
80 cSt				
Slide bearing arrangement in a press roll				
20 cSt	7.0	22.3	0.1	0.1
40 cSt				
100 cSt				
150 cSt				
Shoe press	70 l/min/m			
150 cSt	150 l/min/m			
40 cSt				
	Substance 9	Substance 10	Substance 11	Substance 12
	concentration %	concentration %	concentration %	concentration %
viscosity of water				
Suction roll journalled with slide bearings				
20 cSt	7.0	0.4	0.4	0.4
20 cSt				
80 cSt				
Slide bearing arrangement in a press roll				
20 cSt	7.0	22.3	0.2	0.2
40 cSt				
100 cSt				
150 cSt				
Shoe press	70 l/min/m			
150 cSt	150 l/min/m			
40 cSt				

Table 4:
Properties of and demand for one surface size starch
for the production of Table 1

Surface size starch	viscosity of water	consumption of water
density of starch	1 kg/dm ³	Suction roll journaled with slide bearings
coating amount	2 g/m ²	20 cSt 146 l/min
total amount	35.28 kg/min	40 cSt 117 l/min
concentration	10 %	80 cSt 82 l/min
total amount	352.8 l/min	Slide bearing arrangement in a press roll
as aqueous solution		20 cSt 300 l/min
viscosity [30 °C]	30 cSt 243 l/min	40 cSt 153 l/min
[50 °C]	15 cSt 114 l/min	100 cSt
		150 cSt
		Shoe press
		150 cSt 70 l/min/m
		40 cSt 150 l/min/m

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for using water hydraulics in a paper or board machine, for lubrication subjected to pressure, wherein a chemical used in a stock system of a process is mixed with water to be used in the water hydraulics before the water is passed to the water hydraulics in order to raise the viscosity of the water and chemical mixture to a level suitable for the water hydraulics, and the water and chemical mixture is passed to the water hydraulics and circulated through the water hydraulics at least once, after which said water and chemical mixture is recovered, diluted and passed as diluted to the stock system of the process.
2. A method according to claim 1, wherein the water and chemical mixture is applied to the water hydraulics selected from the group consisting of: roll hydraulics, lubrication of rolls journalled with slide bearings, pressurization and lubrication of loading elements of hydraulically loaded rolls.
3. A method according to claim 1 or 2, wherein the chemical is mixed with water in a concentration such that the kinematic viscosity of the water and chemical mixture is at a level of at least 10 cSt.
4. A method according to any one of claims 1 to 3, wherein the chemical used is a retention aid, fixative, starch or the like used in the stock system of the process.
5. A method according to any one of claims 1 to 4, wherein the selected chemical is such that at a given viscosity of the water and chemical mixture and at its resultant consumption of the mixture, the consumption of the chemical is lower than the demand for said chemical in the stock system of the process.
6. A method according to any one of claims 1 to 5, wherein the chemical used is surface size starch.


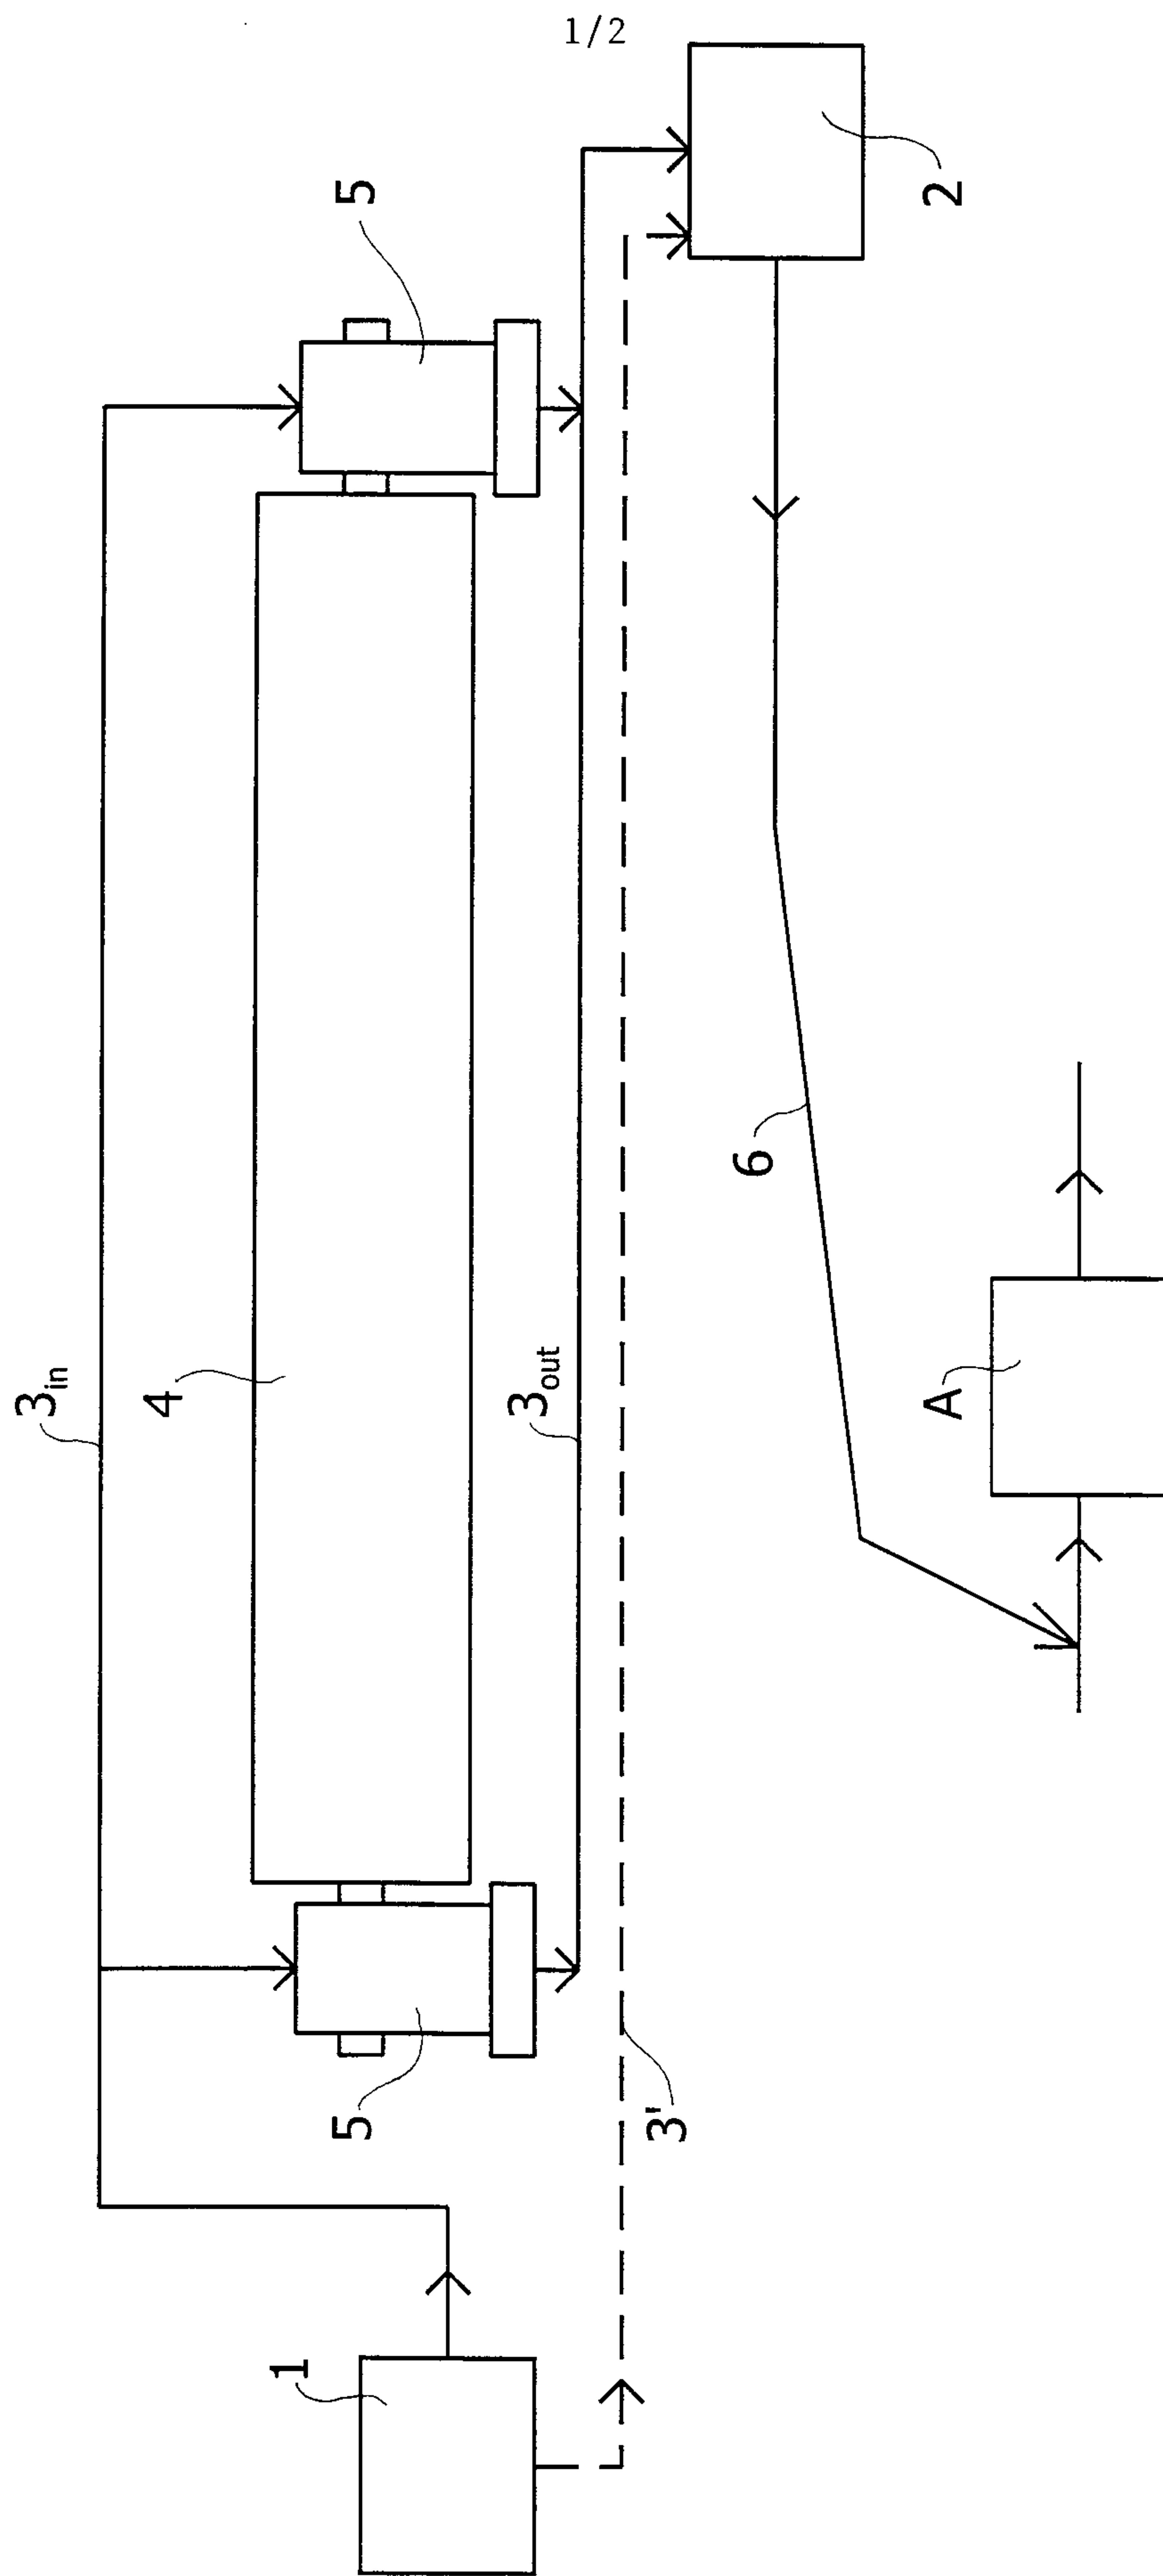


FIG. 1

2/2



2
FIG.

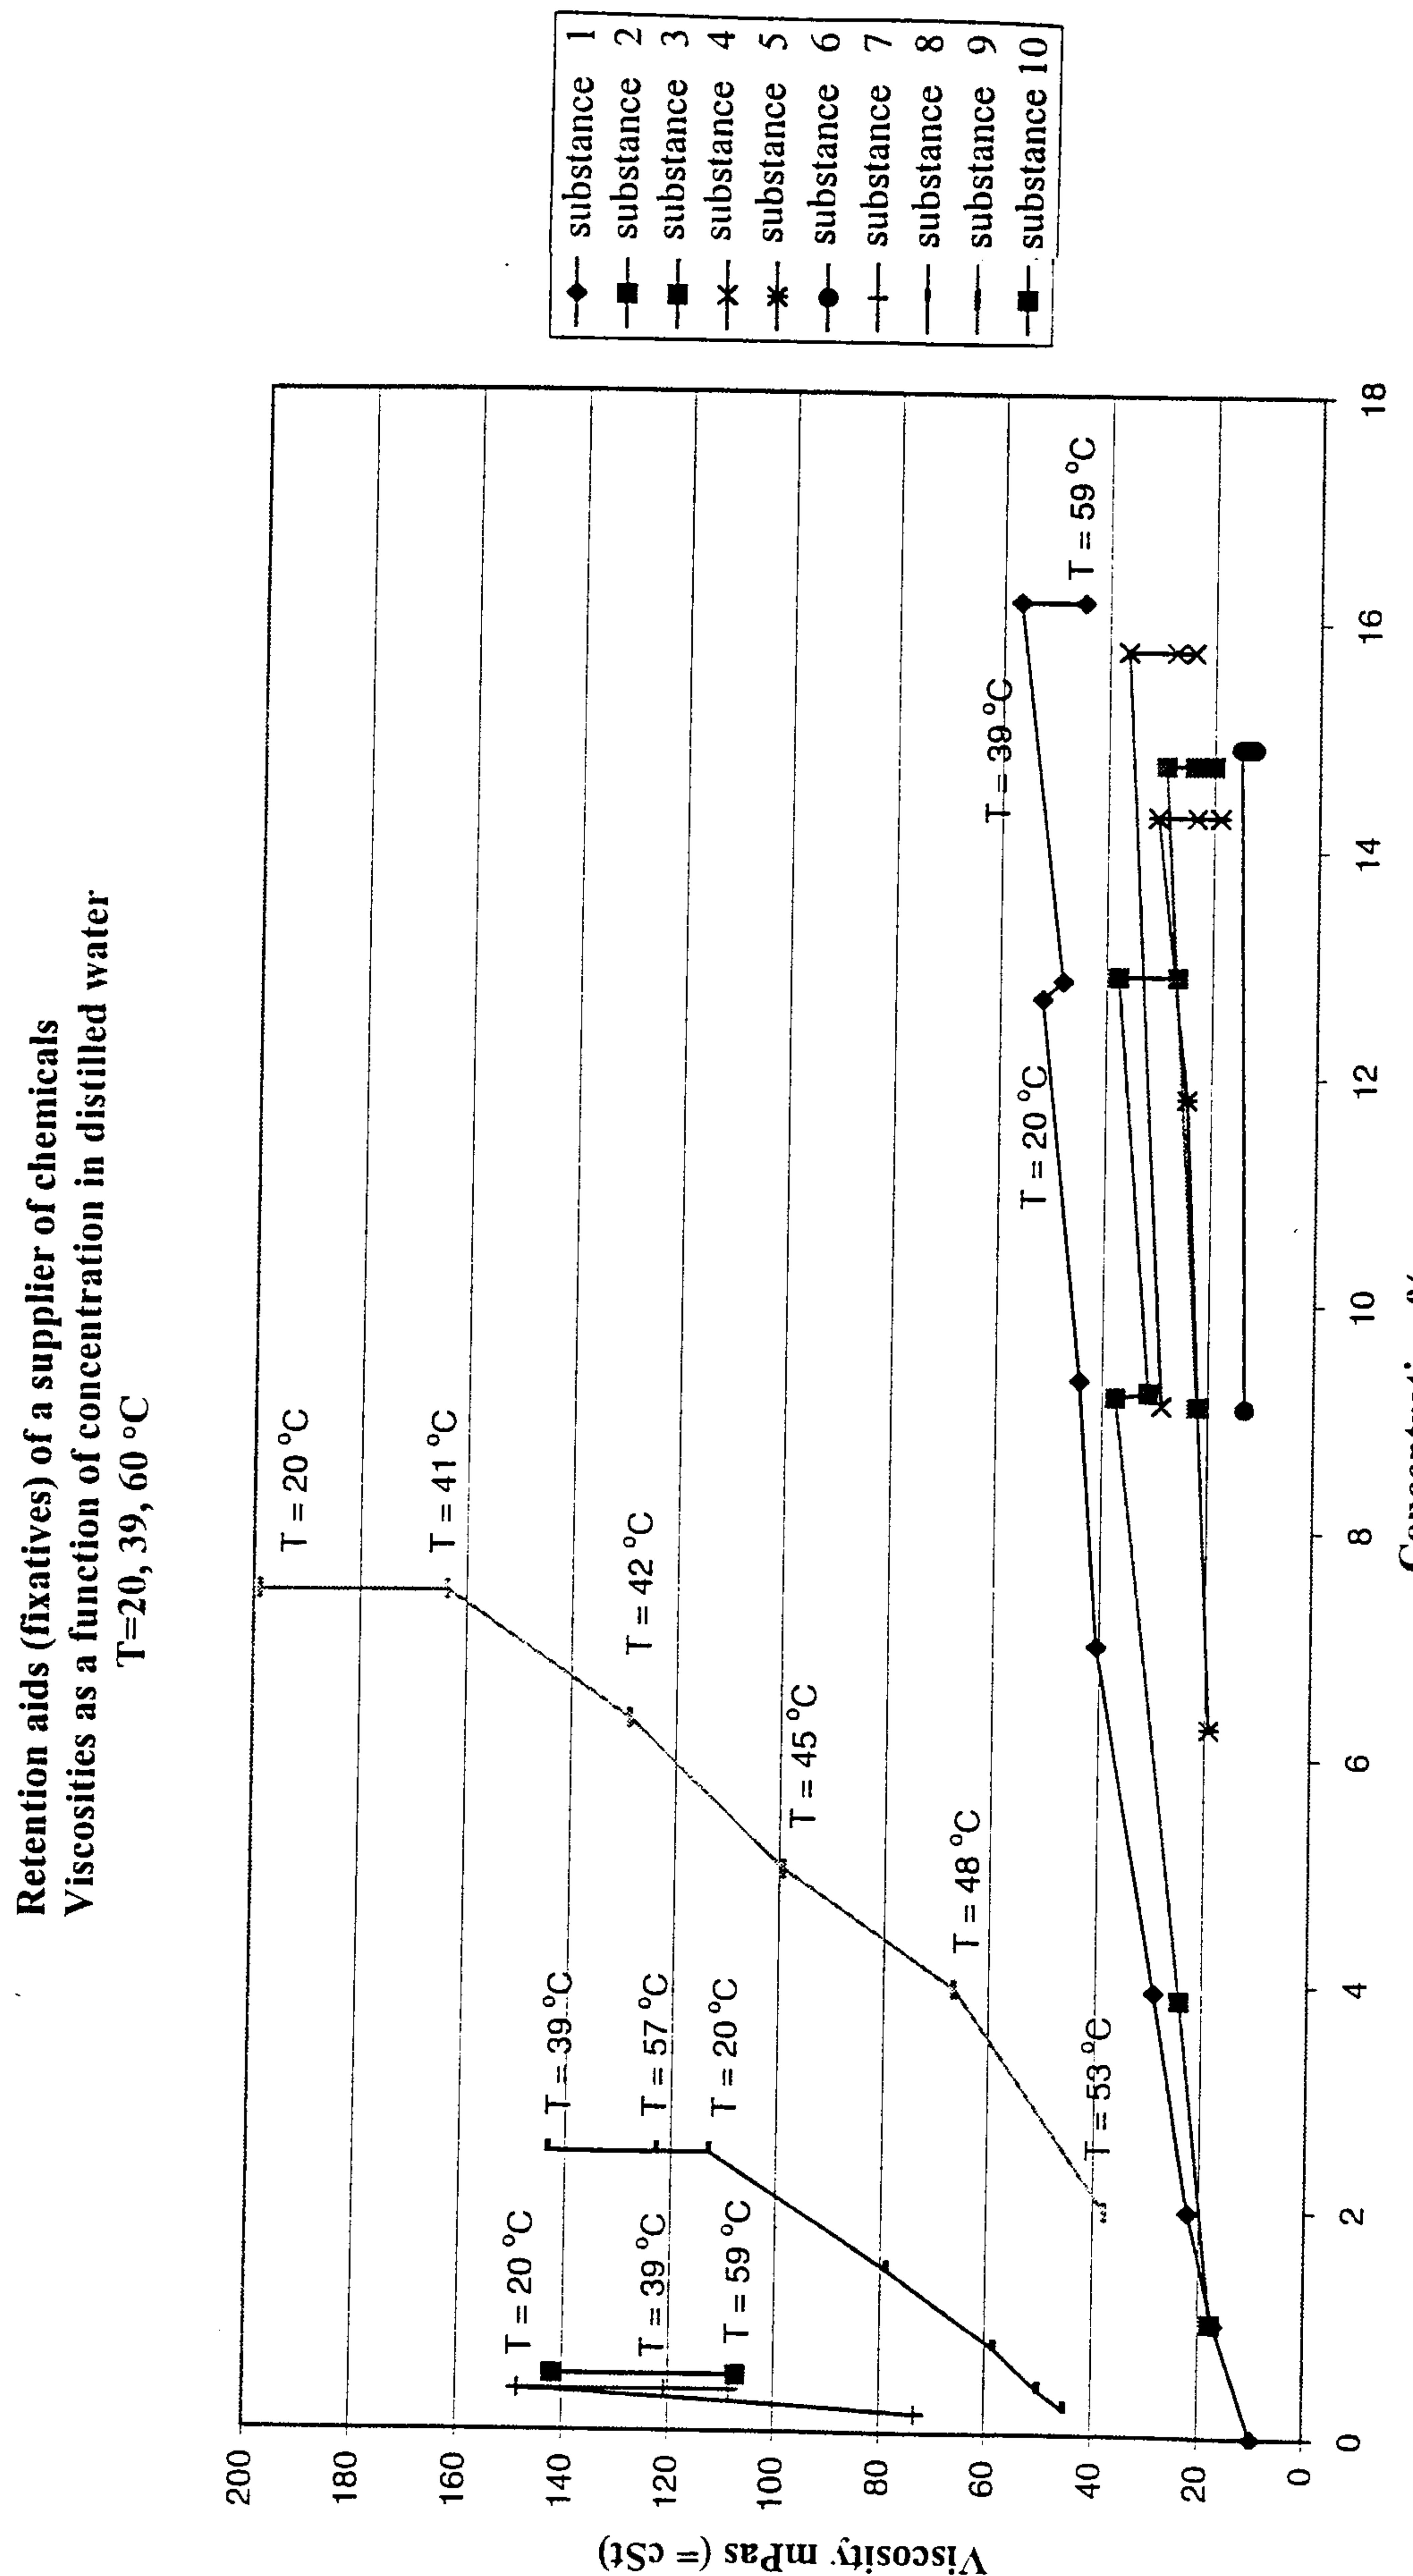