



(72) MAZZURCO, ANTHONY, US

(72) CROSSETT, JOSEPH A., III, US

(72) DARABPOUR, MANOUCHEHR, US

(71) ALCATEL USA SOURCING, L.P., US

(51) Int.Cl.⁷ H04Q 3/52

(30) 1999/12/27 (09/473,409) US

(54) **METHODE ET APPAREIL DE TRANSMISSION**

D'INFORMATION DE CONTROLE DANS UNE


CONFIGURATION BIDIRECTIONNELLE D'ANNEAU A

PROTECTION DE SECTION

(54) **METHOD AND APPARATUS FOR PASSING CONTROL**

INFORMATION IN A BIDIRECTIONAL LINE SWITCHED

RING CONFIGURATION

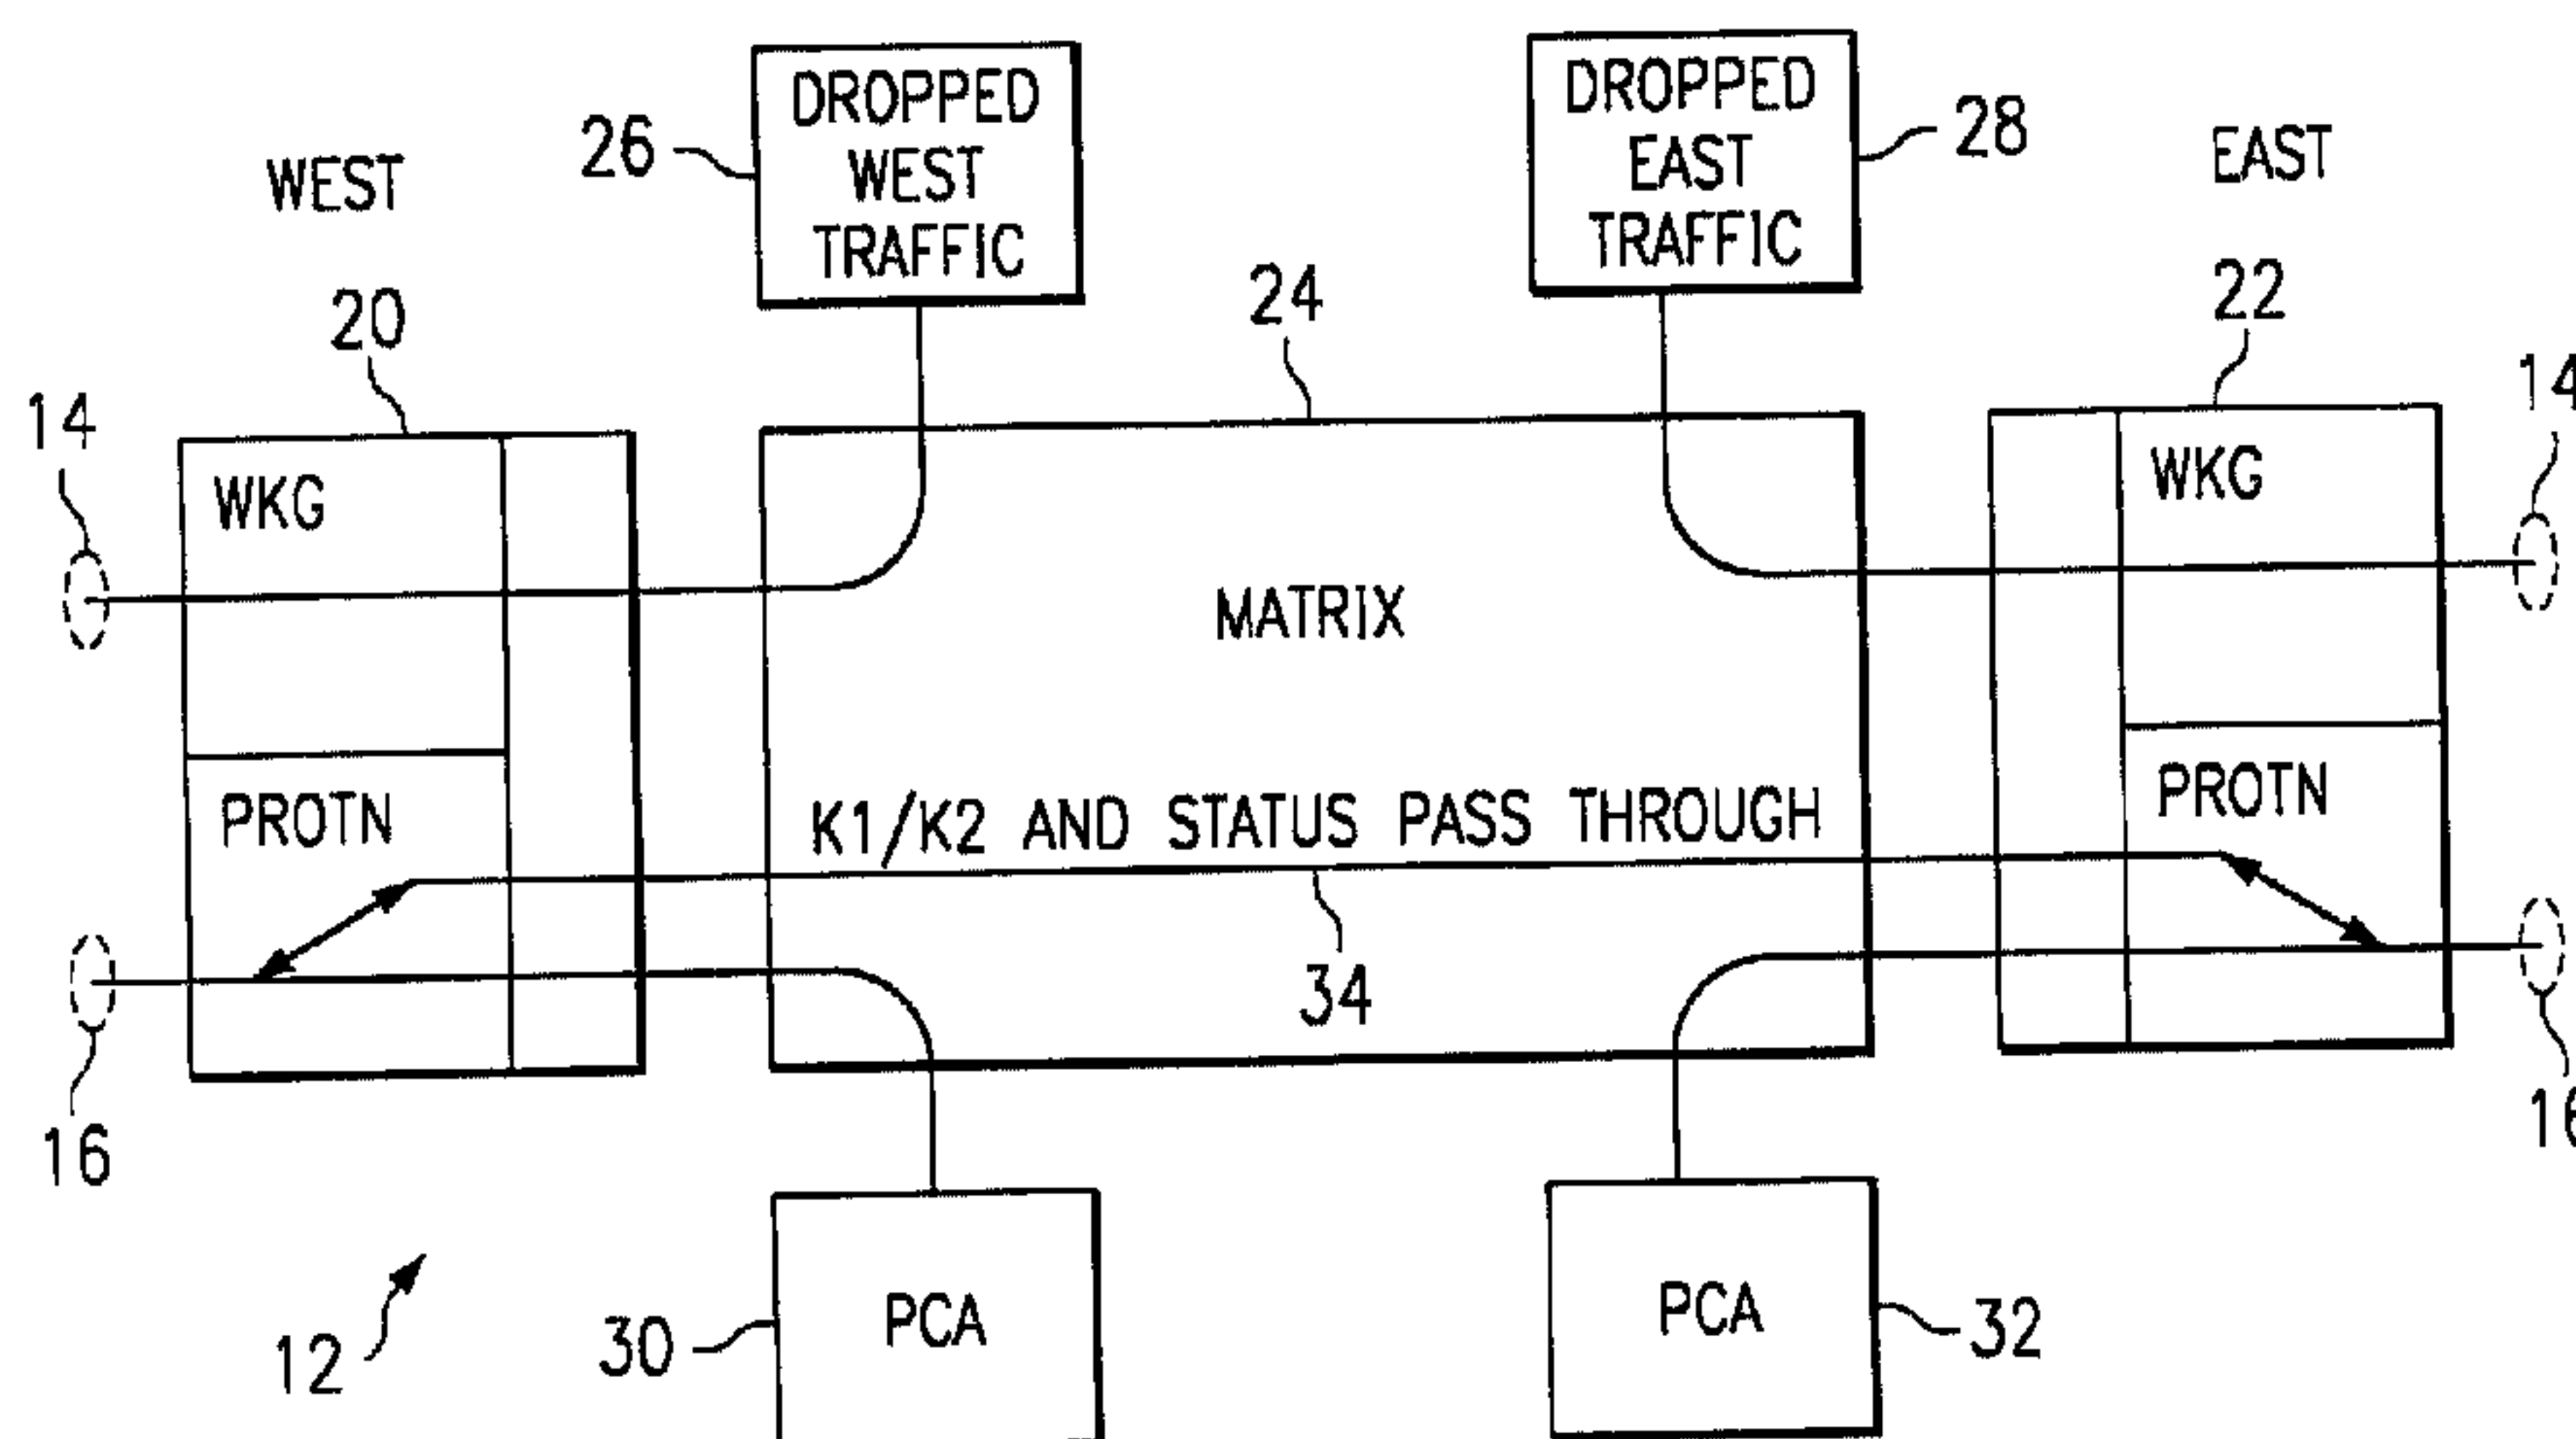

(57) A telecommunications network (10) includes a plurality of nodes (12) interconnected in a bidirectional line switched ring configuration (18). The bidirectional line switched ring configuration (18) includes a working communication link (14) and a protection communication link (16) between each of the plurality of nodes (12). A particular node (12) within the telecommunications network (10) includes a first ring port interface (20) and a second ring port interface (22) each coupled to the working communication link (14) and the protection communication link (16). The first ring port interface (20) and the second ring port interface (22) are coupled by a cross connect matrix (24). The particular node (12) may have a protection channel access unit (30) to terminate control information carried over a protection communication link (16) of the bidirectional line switched ring configuration (18). In order to maintain transfer of control information over the bidirectional line switched ring configuration (18), a dedicated matrix connection (34) in the cross connect matrix provides a path to pass control information between the first ring port interface (20) and the second ring port interface (22).

ABSTRACT OF THE DISCLOSURE

A telecommunications network (10) includes a plurality of nodes (12) interconnected in a bidirectional line switched ring configuration (18). The bidirectional line switched ring configuration (18) includes a working communication link (14) and a protection communication link (16) between each of the plurality of nodes (12). A particular node (12) within the telecommunications network (10) includes a first ring port interface (20) and a second ring port interface (22) each coupled to the working communication link (14) and the protection communication link (16). The first ring port interface (20) and the second ring port interface (22) are coupled by a cross connect matrix (24). The particular node (12) may have a protection channel access unit (30) to terminate control information carried over a protection communication link (16) of the bidirectional line switched ring configuration (18). In order to maintain transfer of control information over the bidirectional line switched ring configuration (18), a dedicated matrix connection (34) in the cross connect matrix provides a path to pass control information between the first ring port interface (20) and the second ring port interface (22).

METHOD AND APPARATUS FOR PASSING CONTROL INFORMATION IN A
BIDIRECTIONAL LINE SWITCHED RING CONFIGURATION

TECHNICAL FIELD OF THE INVENTION

5 The present invention relates in general to data transfer in a telecommunications network and more particularly to a method and apparatus for passing control information in a bidirectional line switched ring configuration.

10

BACKGROUND OF THE INVENTION

 In conventional telecommunications networks, service providers have deployed Bidirectional Line Switched Rings (BLSR) to provide a network restoration capability. In a
15 BLSR configuration, a node couples to other nodes in the system by a working communication link and a protection communication link set up in a dual ring topology. Traffic and other information travels around the working communication link and is extracted by a node in response
20 to the node being the desired destination. The protection communication link provides another path to transfer the traffic and other information in the event of a failure in the working communication link between any node in the system. The BLSR configuration provides
25 network survivability for single link failures and allows the network to function in a segmented mode when entire nodes have failed.

 One feature that digital cross connect systems bring to the BLSR configuration is that they can act as nodes
30 on the BLSR for passing traffic between east and west ring port interfaces as well as providing the restoration

switching function. By means of their cross connect matrices, the digital cross connect systems may provide protection channel access during normal ring operation and ring interconnections.

5 In order for a BLSR to properly function and monitor the status of all its nodes, two bytes of information, designated K1 and K2, must pass through the protection communication link. By its nature, a digital cross connect system at a node allows east and west ring port
10 interfaces to be connected by its cross connect matrix. However, in the event that protection channel access is desired at a node, there is no dedicated connectivity through the cross connect matrix between the east and west ring port interfaces to pass the K1/K2 bytes,
15 especially if 100% of the working traffic is dropped at the node. Therefore, it is desirable to be able to pass the K1/K2 and through a node while still providing protection channel access at the node.

20 SUMMARY OF THE INVENTION

From the foregoing, it may be appreciated by those skilled in the art that a need has arisen for a technique to pass control information in a bidirectional line switched ring configuration while still providing total
25 protection channel access. In accordance with the present invention, a method and apparatus for passing control information in a bidirectional line switched ring configuration are provided which substantially eliminate or reduce disadvantages and problems associated with
30 conventional bidirectional line switched ring topologies.

According to an embodiment of the present invention, there is provided a cross connect system in a telecommunications network that includes a first ring port interface operable to receive and provide traffic information from and to a working communication link and control information from and to a protection communication link of a fiber optic ring. The control information is associated with the traffic information. A first add/drop unit receives traffic information carried on the working communication link from the first ring port interface and destined for the cross connect system. A first protection channel access unit receives control information from and provides control information to the protection communication link through the first ring port interface. A second ring port interface receives and provides traffic information from and to a working communication link and control information from and to a protection communication link of a fiber optic ring. A cross connect matrix passes traffic information and control information between the first add/drop unit and the first ring port interface, between the first protection channel access unit and the first ring port interface, and between the first ring port interface and the second ring port interface. The cross connect matrix provides a dedicated communication path for the control information to pass from the first ring port interface to the second ring port interface.

The present invention provides various technical advantages over conventional bidirectional line switched ring topologies. For example, one technical advantage is to provide a capability to pass control signals when a

node has a protection channel access capability. Another technical advantage is to provide an efficient and inexpensive fixed connection for the protection channel through a cross connect matrix. Yet another technical advantage is to avoid creating and deleting connections based on ring activity. Other technical advantages may be readily apparent to those skilled in the art from the following figures, description, and claims.

10 BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, wherein like reference numerals represent like parts, in which:

FIGURE 1 illustrates a block diagram of a bidirectional line switched ring based telecommunications network;

FIGURE 2 illustrates a node in the telecommunications network.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 is a block diagram of a bidirectional line switched ring based telecommunications network 10. Telecommunications network 10 includes a plurality of nodes 12 interconnected by a working communication link 14 and a protection communication link 16 in a bidirectional line switched ring configuration 18. Information may travel in either direction along both working communication link 12 and protection communication link 14. Working communication link 12 and

protection communication link 14 are preferably individual and separate fiber optic rings that transfer information in one direction between nodes 12. For example, four fibers may be included in bidirectional line switched ring configuration 18 such that two fiber handle the respective upstream and downstream flow to and from a particular node 12 as working communication link 14 and the other two fibers handle the respective upstream and downstream information flow to and from the particular node 12 as protection communication link 16. Though the preferred embodiment has been described, working communication link 14 and protection communication link 16 may employ any conventional communication means, including a two fiber bidirectional line switched ring configuration.

The use of bidirectional line switched ring configuration 18 allows for redirecting of information in the event of a cable cut or failure. For example, if a unidirectional span failure occurs on the outbound working communication link 14 from node A to node B, node B detects the failure and initiates a request for protection. The request for protection is transmitted to node A along a short path and a long path. Since it takes longer for the request for protection to reach node A on the long path, protection for a unidirectional failure will most likely involve only the request for protection transmitted on the short path. When the request for protection is received, node A bridges the failed outbound working communication link 14 onto the outbound protection communication link 16 on the same span between nodes A and B. Node A transmits a reverse request for a

span switch on the short path and the long path to node B. Node B receives the reverse request for the span switch, performs the span switch, bridges the outbound working communication link 14 onto the outbound protection communication link 16, and transmits the bridged status and the switched status along the short and long paths. Node A receives the bridged and switched indications and completes the switch.

For a bidirectional span failure involving only the inbound and outbound working channel link 14 between nodes A and B, both nodes detect the failure and initiate requests. The result is identical to that of a unidirectional span failure except that both nodes are transmitting identical switch requests. The result is identical because a K1 and K2 byte protocol includes identifying the failure scenarios that can be protected against using only a span switch. The K1 and K2 bytes are part of the overhead and control information associated with traffic carried between nodes 12 and provide ring and span switch status and determine how switching is to be performed within bidirectional line switched ring configuration 18.

If a span switch cannot be completed or a unidirectional or bidirectional failure occurs that affects both working communication link 14 and protection communication link 16 in the same span between nodes, a ring switch is to be performed. Nodes A and B both detect the failure and initiate ring bridge requests. Intermediate nodes pass through the ring bridge requests. When the crossing K1 and K2 bytes are received, nodes A and B perform the bridge and the switch from working

communication link 14 to protection communication link 16. Intermediate nodes continue to terminate and insert traffic on working communication link 14. The bridging to protection communication link 16 and the selection from protection communication link 16 is performed by nodes adjacent to the failed span. Intermediate nodes do not terminate traffic from protection communication link 16 when operating in the pass through mode.

FIGURE 2 is a block diagram of a node 12 representing a cross connect system. Node 12 includes a first ring port interface 20 coupled to working communication link 14 and protection communication link 16. Node 12 also includes a second ring port interface 22 coupled to working communication link 14 and protection communication link 16. A cross connect matrix 24 having a plurality of inputs and outputs provides a communication path between first ring port interface 20 and second ring port interface 22. Node 12 includes a first add/drop unit 26 that receives and provides traffic information over working communication link 14 through cross connect matrix 24 and first ring port interface 20. A second add/drop unit 28 receives and provides traffic information over working communication link 14 through cross connect matrix 24 and second ring port interface 22. Node 12 includes a first protection channel access unit 30 that receives and provides interruptable control information over protection communication link 16 through cross connect matrix 24 and first ring port interface 20. A second protection channel access unit 32 receives and provides interruptable control information over

protection communication link 16 through cross connect matrix 24 and second ring port interface 22.

5 With protection channel access capability, node 12 has no connectivity through cross connect matrix 24 for control information, particularly K1/K2 bytes for ring and span switch determinations, on protection communication link 16 to be passed onto other nodes in telecommunications network 10. If 100% of the traffic information is dropped at first add/drop unit 26 and
10 second add/drop unit 28, there is no connectivity whatsoever between first ring port interface 20 and second ring port interface 22. In order to provide a control information pass through for protection communication link 16 within node 12, a dedicated matrix
15 connection 34 is established in cross connect matrix 24. Dedicated matrix connection 34 couples into protection communication link 16 at first ring port interface 20 and second ring port interface 22.

Dedicated matrix connection 34 provides fixed and
20 dedicated protection channel connections through cross connect matrix 24 in order that the K1/K2 bytes can pass from node to node regardless of how much traffic is dropped or if protection channel access is present. Connections within cross connect matrix 24 do not have to
25 be created or deleted based upon ring activity. All protection switching could now be handled exclusively in the ring port interfaces 20 and 22. The ring port interfaces 20 and 22 and cross connect matrix 24 can be placed in different physical line shelves and
30 geographically remote from one another to provide greater system development flexibility.

Thus, it is apparent that there has been provided, in accordance with the present invention, a method and apparatus for passing control information in a bidirectional line switched ring configuration that satisfies the advantages set forth above. Although the present invention has been described in detail, it should be understood that various changes, substitutions, and alterations may be readily ascertainable by those skilled in the art and may be made herein without departing from the spirit and scope of the present invention as defined by the following claims.

WHAT IS CLAIMED IS:

1. A cross connect matrix for a cross connect system, comprising:

5 a plurality of network inputs, the plurality of network inputs operable to receive traffic signals from a telecommunications network;

a plurality of network outputs operable to provide traffic signals to the telecommunications network;

10 a plurality of communication paths between the plurality of network inputs and the plurality of network outputs, wherein any of the plurality of network inputs may be connected to any of the plurality of network outputs by any of the plurality of communication paths;

15 a dedicated communication path from one of the plurality of network inputs to a corresponding one of the plurality of network outputs, the dedicated communication path operable to carry control information associated with the traffic signals.

20 2. The cross connect matrix of Claim 1, wherein the control information includes K1 and K2 bytes.

3. The cross connect matrix of Claim 1, further comprising:

5 a plurality of add/drop outputs, wherein any of the plurality of network inputs may be coupled to any of the plurality of add/drop outputs by any of the plurality of communication paths, wherein the control information is passed on the dedicated communication path regardless of whether traffic signals are passed from the plurality of network inputs to either the plurality of add/drop
10 outputs or the plurality of network outputs.

4. A cross connect system in a telecommunications network, comprising:

5 a first ring port interface operable to receive and provide traffic information from and to a working communication link and control information from and to a protection communication link of a fiber optic ring, the control information being associated with the traffic information;

10 a first add/drop unit operable to receive traffic information carried on the working communication link from the first ring port interface and destined for the cross connect system;

15 a first protection channel access unit operable to receive interruptable control information from and provide control information to the protection communication link through the first ring port interface;

20 a second ring port interface operable to receive and provide traffic information from and to a working communication link and control information from and to a protection communication link of a fiber optic ring, the control information being associated with the traffic information;

25 a cross connect matrix operable to pass traffic information and control information between the first add/drop unit and the first ring port interface, between the first protection channel access unit and the first ring port interface, and between the first ring port interface and the second ring port interface, the cross connect matrix providing a dedicated communication path
30 for the control information to pass from the first ring port interface to the second ring port interface.

5. The cross connect system of Claim 4, further comprising:

5 a second add/drop unit operable to receive traffic information carried on the working communication link from the second ring port interface and destined for the cross connect system;

10 a second protection channel access unit operable to receive control information from and provide control information to the protection communication link through the second ring port interface;

15 wherein the cross connect matrix is operable to provide a dedicated communication path for the control information to pass from the second ring port interface to the first ring port interface.

6. The cross connect system of Claim 4, wherein the second ring port interface is operable to place the control information received from the first ring port interface over the dedicated communication path onto the protection communication link.

7. The cross connect system of Claim 4, wherein the control information includes K1 and K2 bytes.

25 8. The cross connect system of Claim 4, wherein the control information is passed over the dedicated communication path regardless of whether all interruptable control information is passed to the first protection channel access.

9. A method of providing control information through a node of a telecommunications system, comprising:

5 receiving telecommunications traffic carried over one or more working channels;

receiving control information carried over one or more protection channels;

cross-connecting the work channels to any of a plurality of node elements;

10 cross-connecting the protection channels to any of a plurality of node elements;

passing the control information over a dedicated matrix connection; and

15 transferring the control information to another node.

10. The method of Claim 9, wherein the control information includes K1 and K2 bytes.

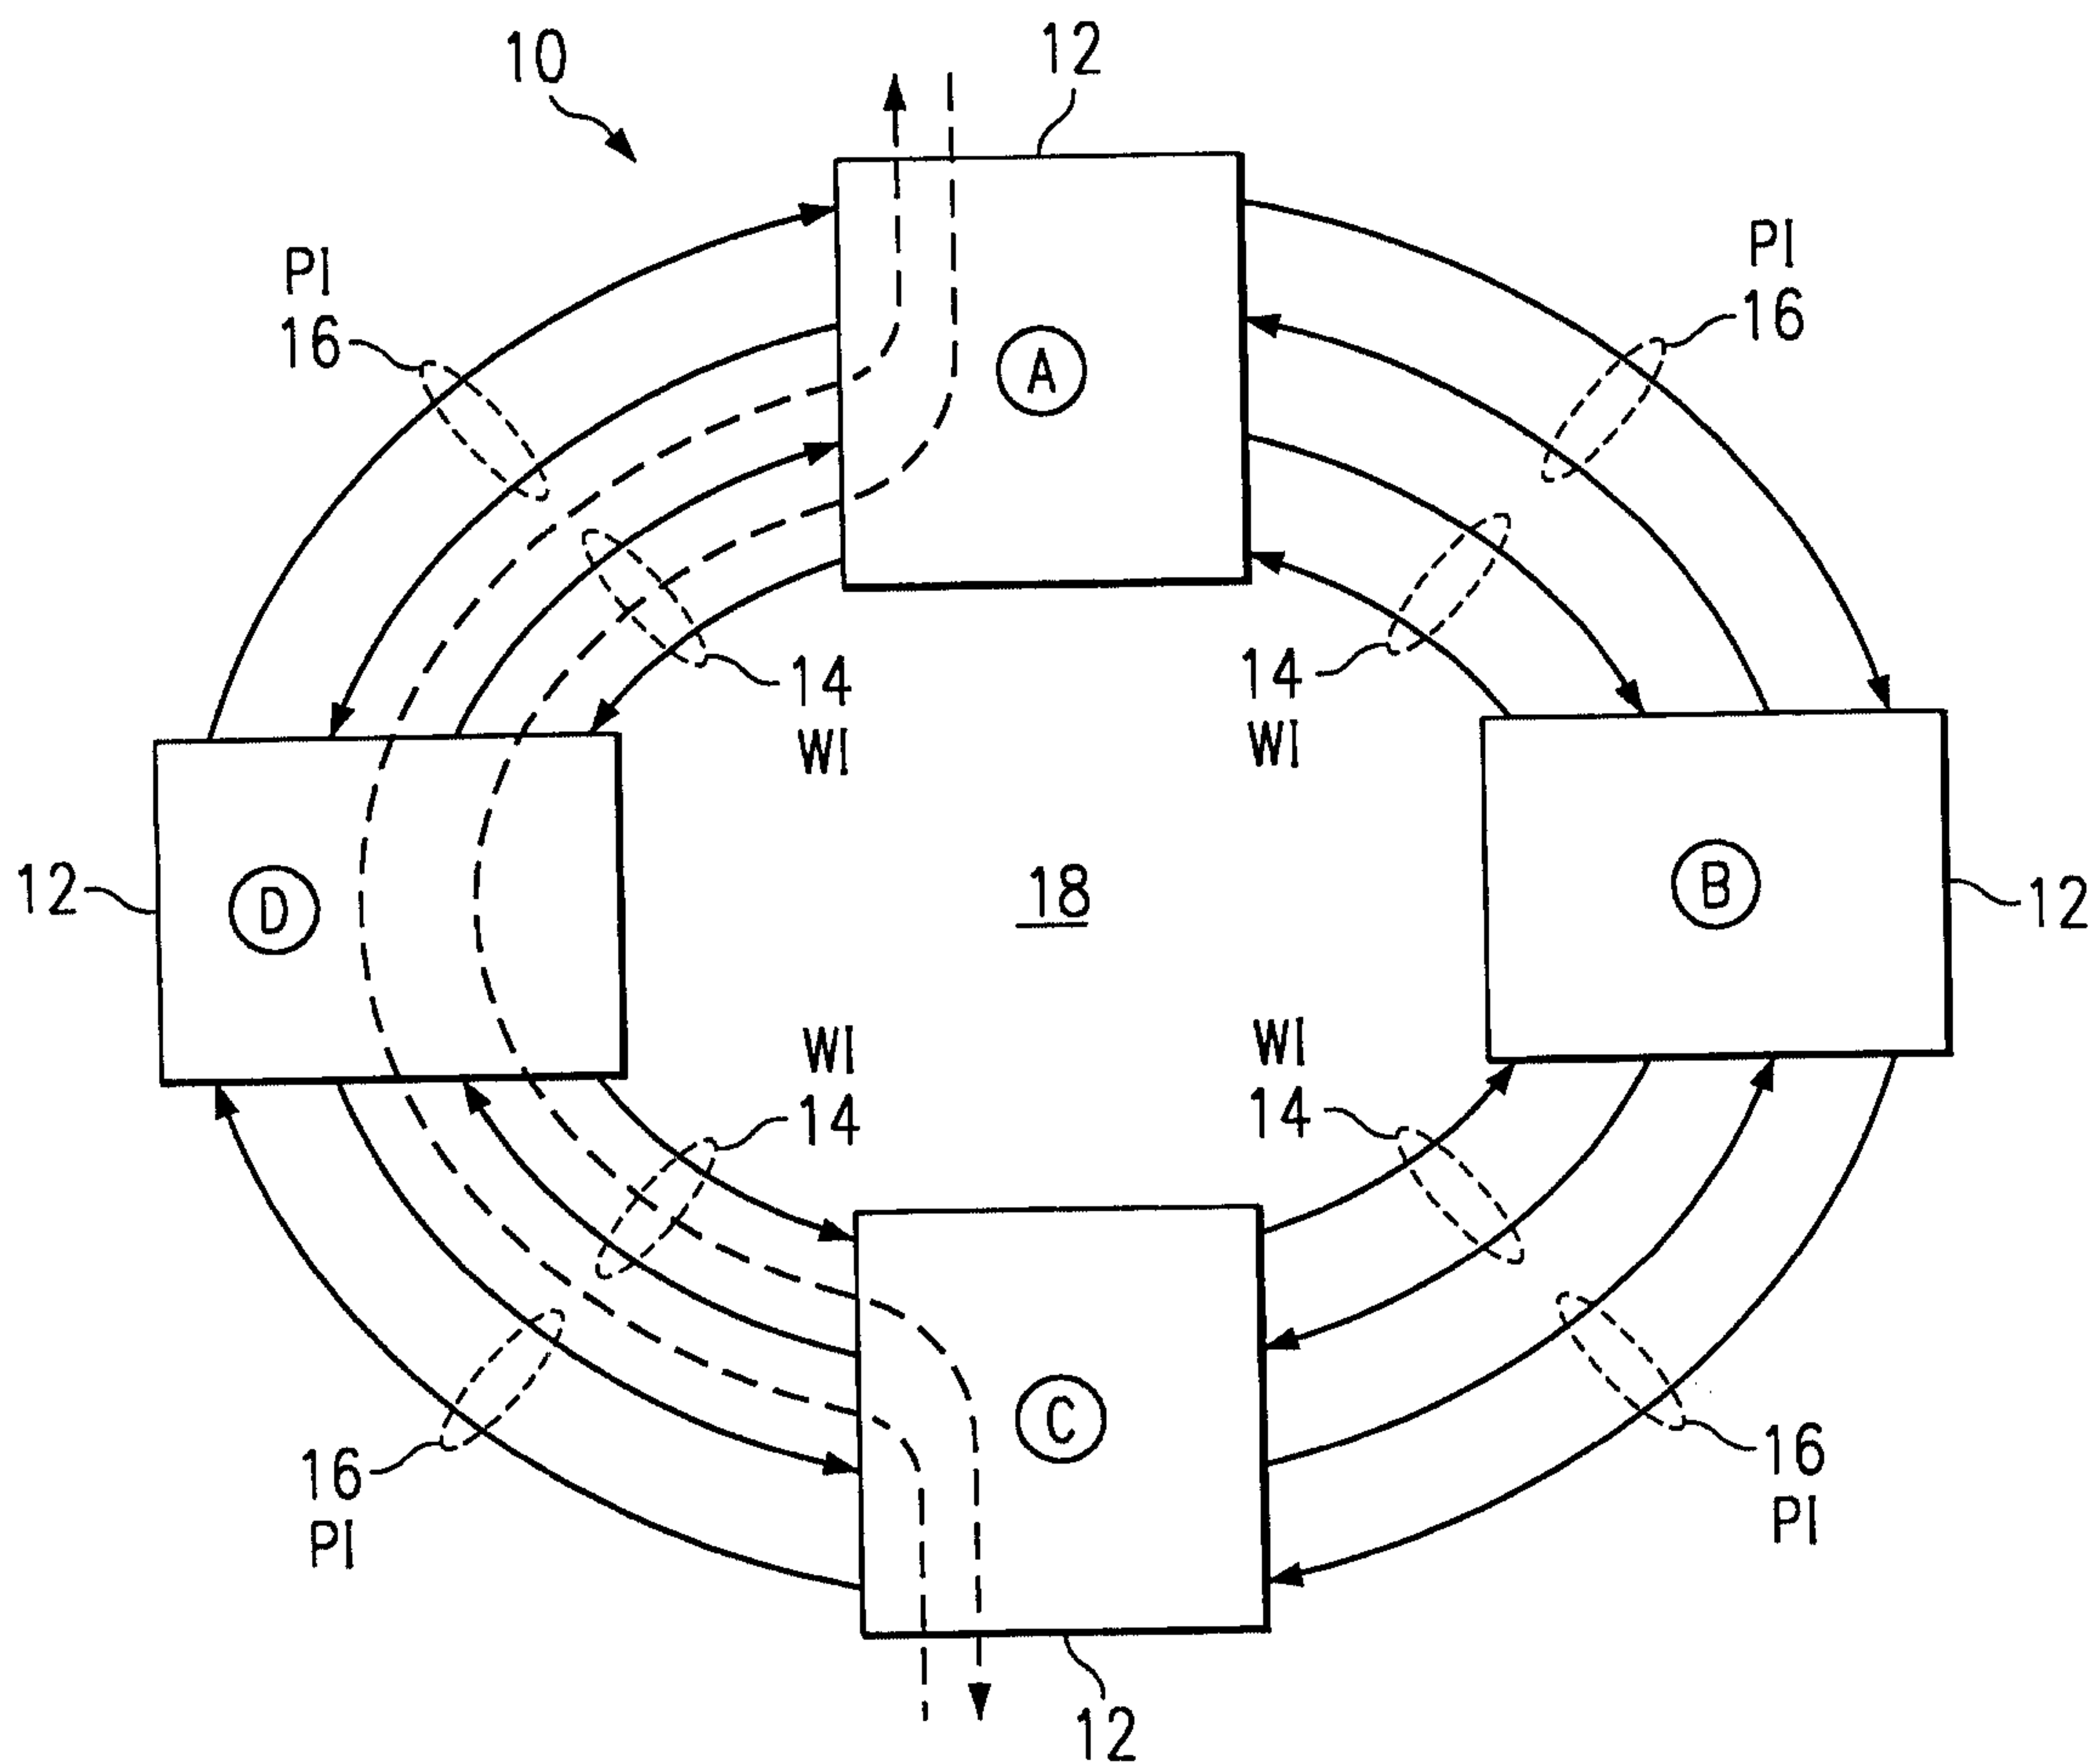


FIG. 1

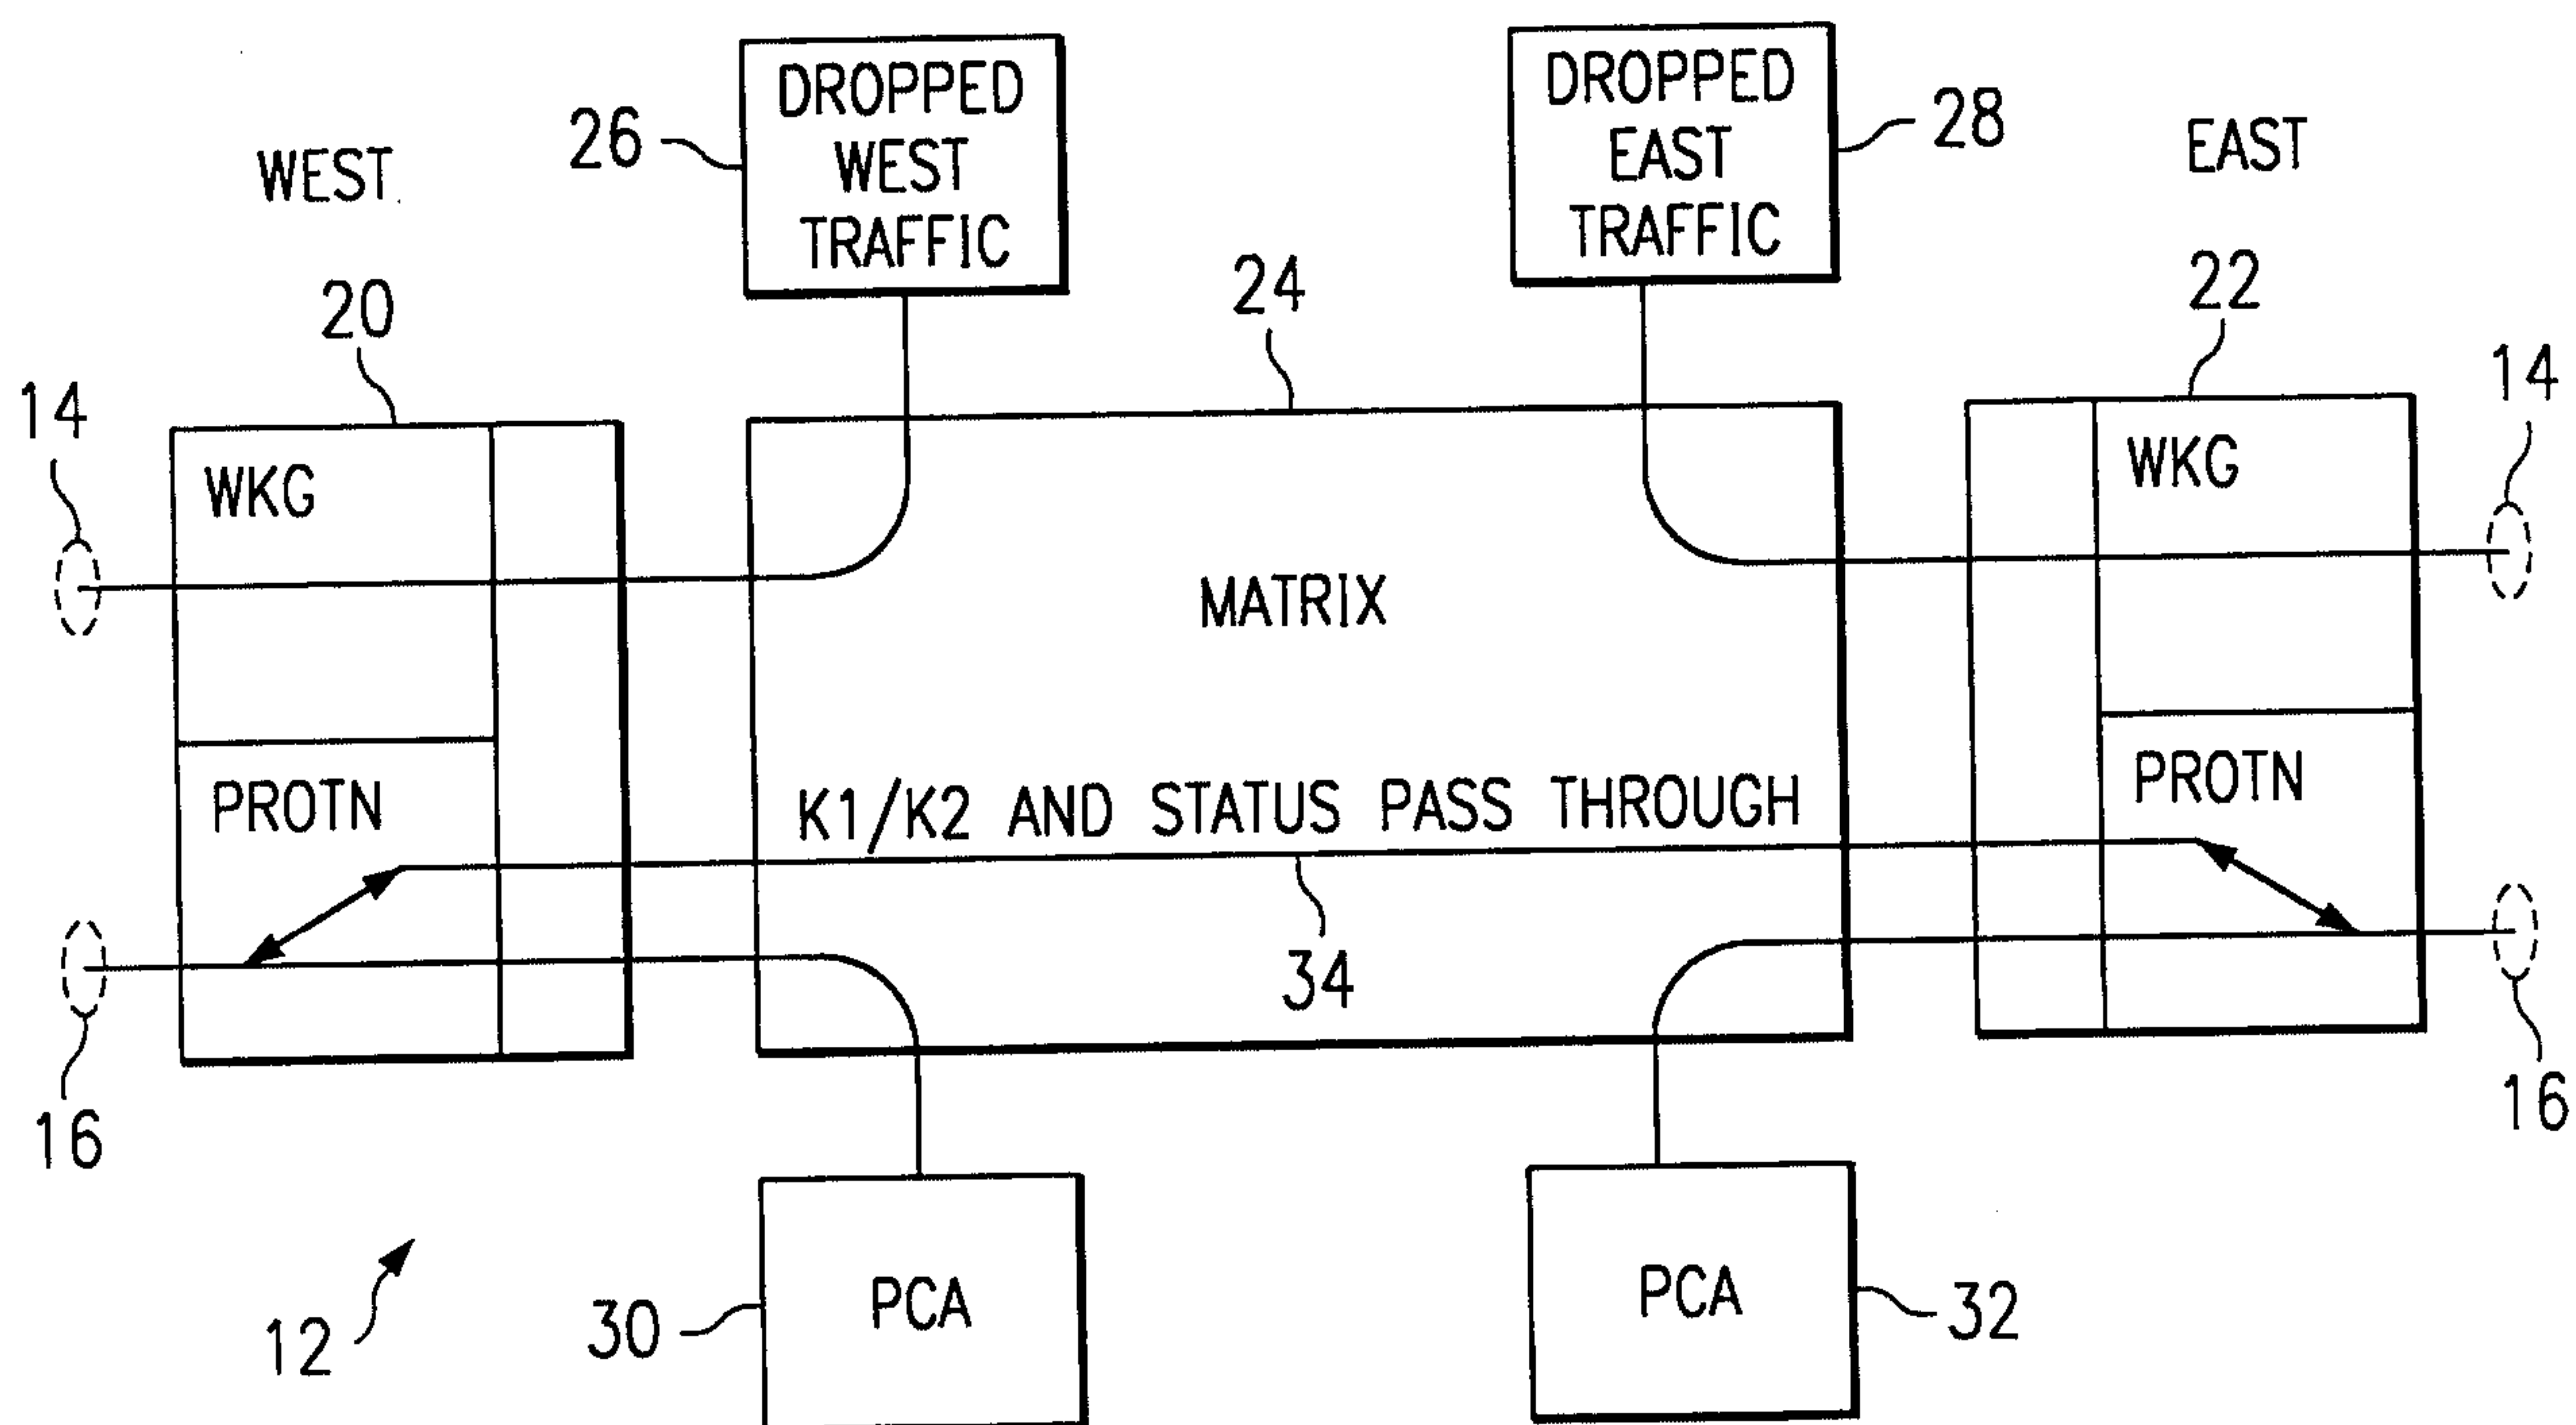


FIG. 2

