



(86) **Date de dépôt PCT/PCT Filing Date:** 2007/02/09
(87) **Date publication PCT/PCT Publication Date:** 2007/08/16
(45) **Date de délivrance/Issue Date:** 2015/12/08
(85) **Entrée phase nationale/National Entry:** 2008/08/07
(86) **N° demande PCT/PCT Application No.:** CA 2007/000176
(87) **N° publication PCT/PCT Publication No.:** 2007/090278
(30) **Priorité/Priority:** 2006/02/09 (US60/771,443)


(51) **Cl.Int./Int.Cl.** **C06B 31/22** (2006.01),
C06B 29/20 (2006.01), **F42B 5/00** (2006.01)

(72) **Inventeurs/Inventors:**
LEPAGE, DANIEL, CA;
RACETTE, MATHIEU, CA;
VIAU, STEPHANE, CA

(73) **Propriétaire/Owner:**
GENERAL DYNAMICS ORDNANCE AND TACTICAL
SYSTEMS - CANADA VALLEYFIELD INC., CA

(74) **Agent:** PIASETZKI NENNIGER KVAS LLP

(54) **Titre : SUBSTITUTS DE POUDRE NOIRE POUR ARMES A FEU DE PETIT CALIBRE**
(54) **Title: BLACK POWDER SUBSTITUTES FOR SMALL CALIBER FIREARMS**

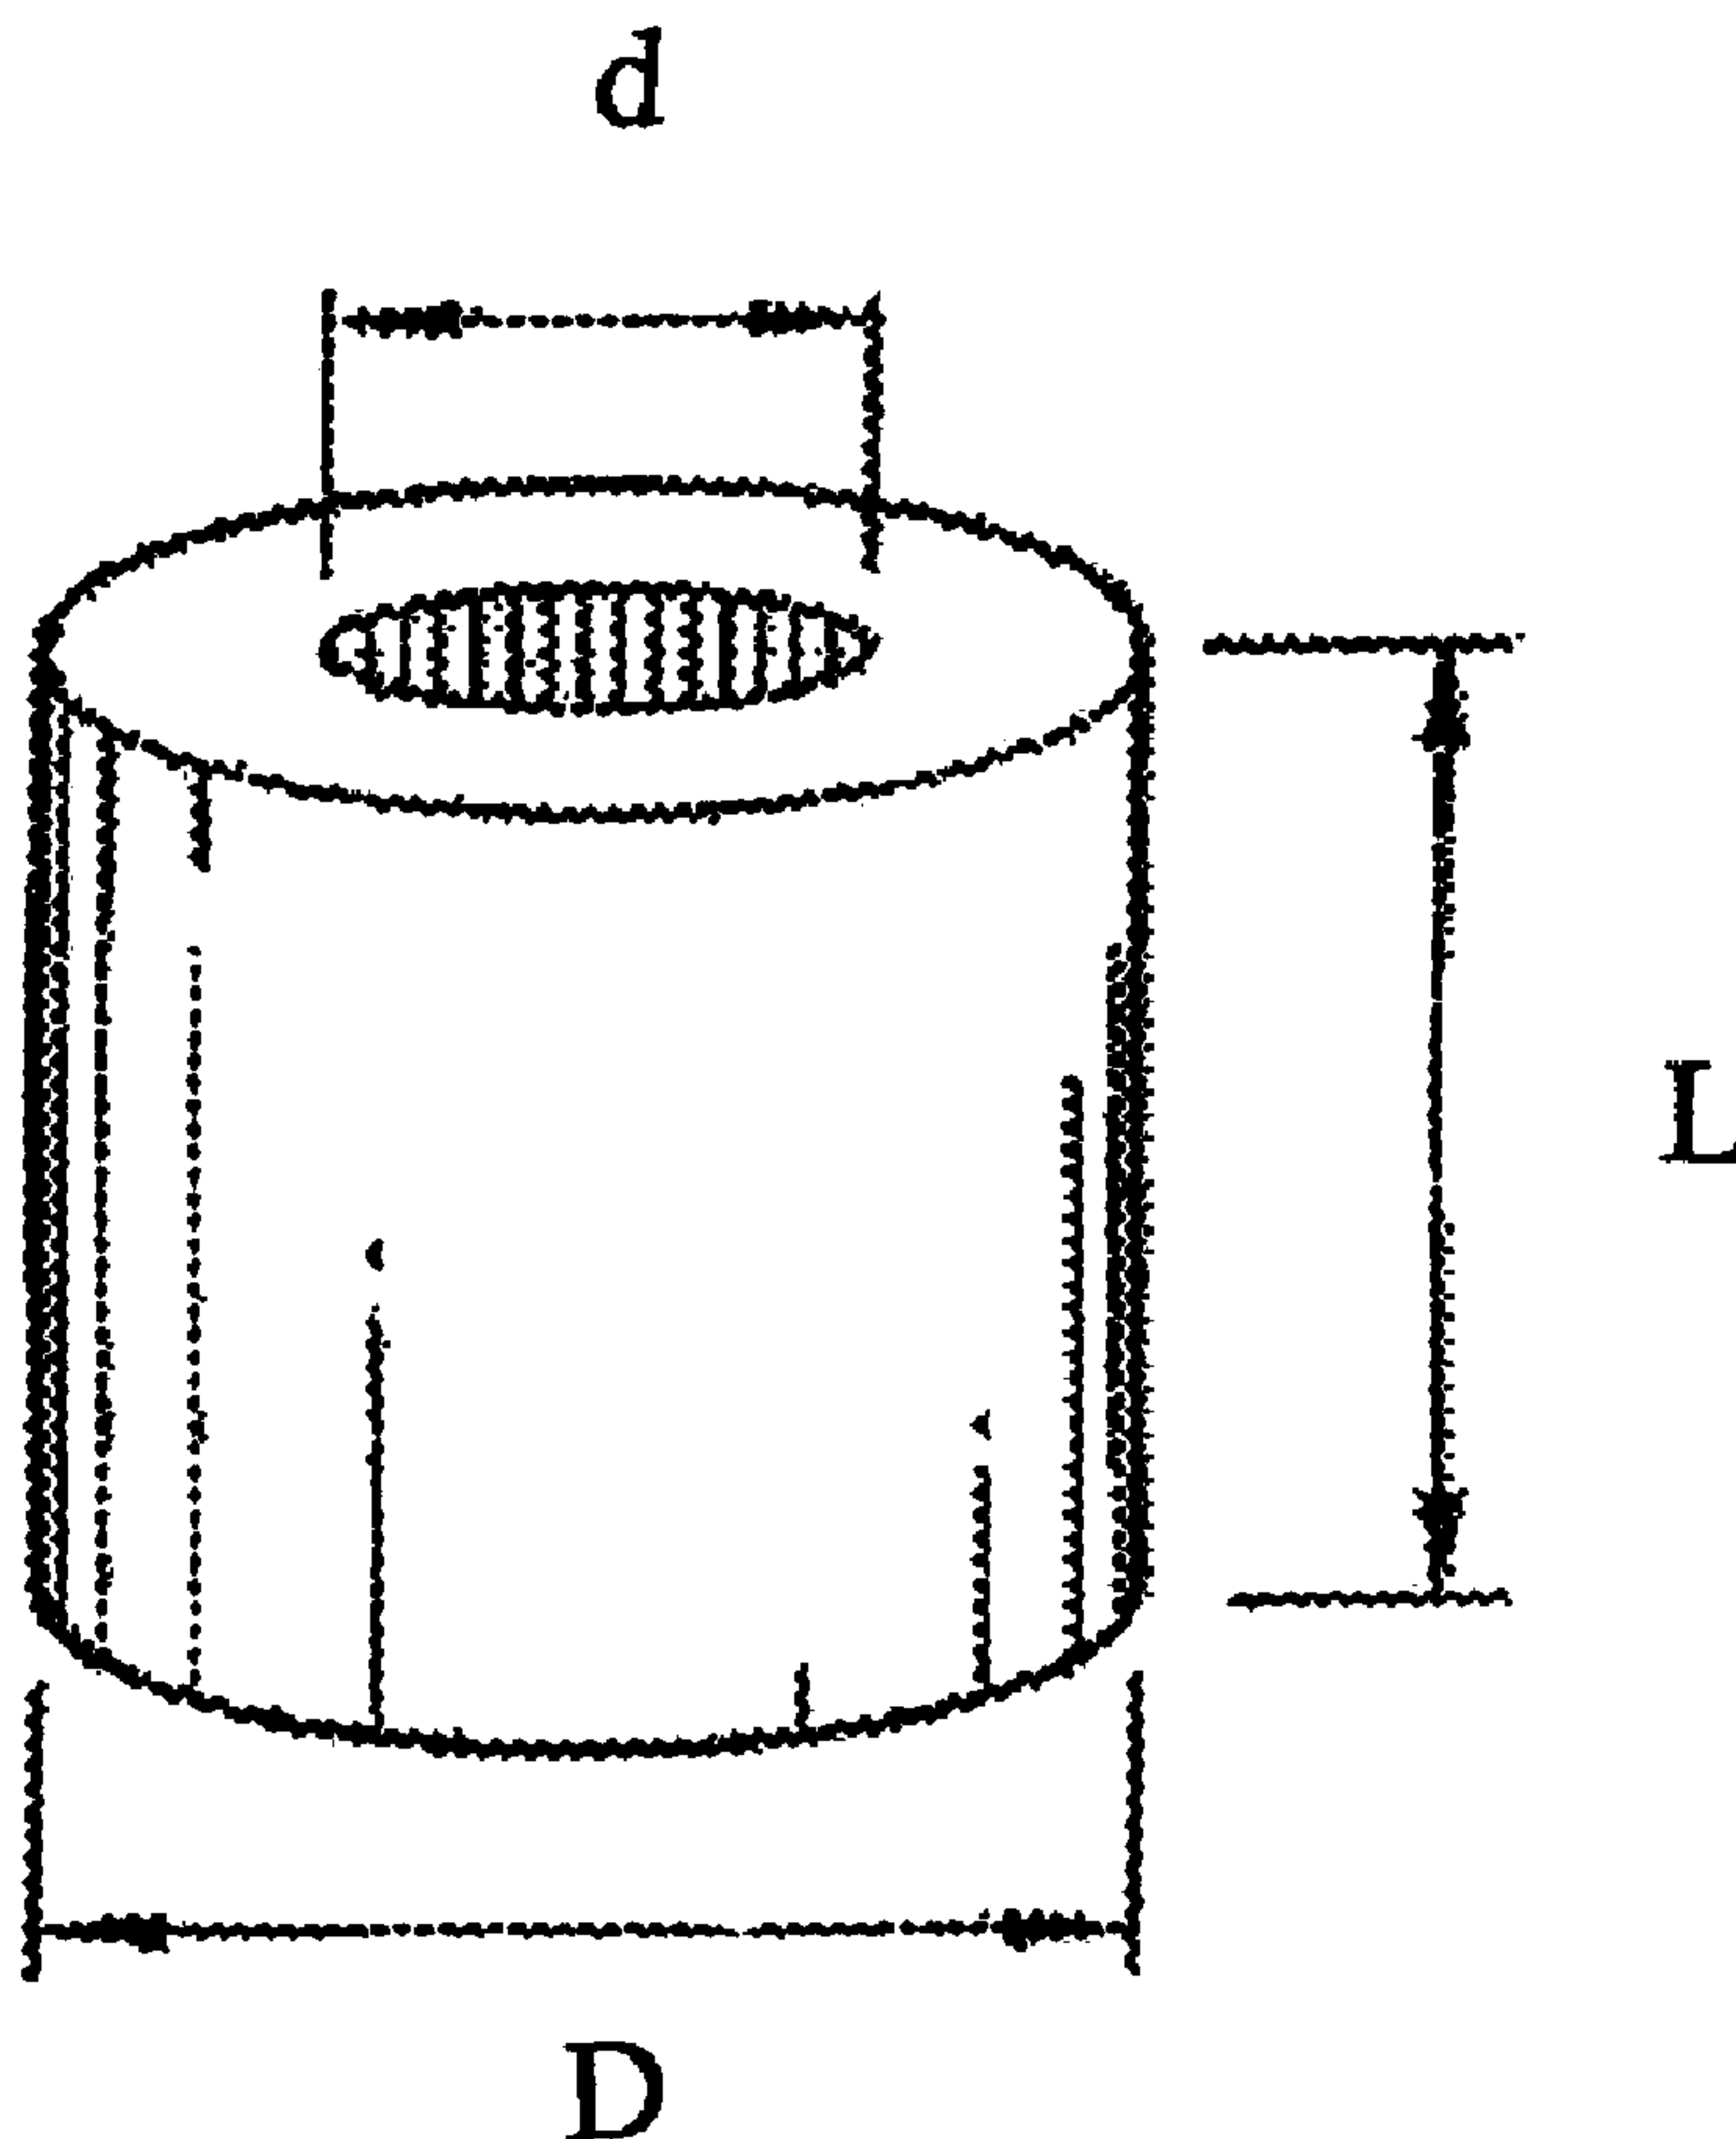

(57) **Abrégé/Abstract:**

Propellant compositions are provided herein for use in modern in-line muzzleloaders. Such propellant compositions include from about 70 to about 90 % by weight of a cellulose-based organic fuel, from about 5 to about 30 % by weight of a non-azide, nitrogen-



(57) Abrégé(suite)/Abstract(continued):

containing solid primary organic oxidizer and from about 0.5 to about 10.0 % by weight of a mineral-based secondary nitrate, perchlorate, chlorate or peroxide oxidizer. Preferably, such compositions are in the form of extruded shaped hollow cylindrical grains having a length in the range of 0.030 to 0.200 inch (0.0762 to 0.508 centimeters), a diameter in the range 0.040 to 0.070 inch, (0.1016 to 0.1778. centimeters), and having a coaxial opening there through having a wall grain thickness in the range 0.008 to 0.016 inch (0.02032 to 0.04064 centimeters). Ignition grains are also provided for use alone or in a mixture with the propellant compositions. When used in a muzzleloader, the temperature of combustion is at a level that ensures substantially complete combustion of the fuel during firing so that the products of combustion are mostly gaseous.

Abstract

Propellant compositions are provided herein for use in modern in-line muzzleloaders. Such propellant compositions include from about 70 to about 90 % by weight of a cellulose-based organic fuel, from about 5 to about 30 % by weight of a non-azide, nitrogen-containing solid primary organic oxidizer and from about 0.5 to about 10.0 % by weight of a mineral-based secondary nitrate, perchlorate, chlorate or peroxide oxidizer. Preferably, such compositions are in the form of extruded shaped hollow cylindrical grains having a length in the range of 0.030 to 0.200 inch (0.0762 to 0.508 centimeters), a diameter in the range 0.040 to 0.070 inch (0.1016 to 0.1778 centimeters), and having a coaxial opening there through having a wall grain thickness in the range 0.008 to 0.016 inch (0.02032 to 0.04064 centimeters). Ignition grains are also provided for use alone or in a mixture with the propellant compositions. When used in a muzzleloader, the temperature of combustion is at a level that ensures substantially complete combustion of the fuel during firing so that the products of combustion are mostly gaseous.

20

25

30

TITLE: BLACK POWDER SUBSTITUTES FOR SMALL CALIBER FIREARMS**FIELD OF INVENTION**

[001] This invention relates both to low-smoke, low-hygroscopic propellant compositions
5 and to a shaped mass thereof for use in small caliber firearms, including modern in-line
muzzleloaders, and to methods for the production of such shaped masses.

BACKGROUND OF THE INVENTION

[002] Black powder, typically a mixture of sulphur, potassium nitrate and charcoal, was the
10 gunpowder of choice for several hundred years dating from, at least, in the mid-14th century
until efforts to develop alternatives were begun in recent times. Black powder suffers from a
number of major drawbacks, including inefficient combustion that produces large amounts of
smoke upon firing, fouling of the weapon from particulate residues, and poor hygroscopic
characteristics. These deficiencies were largely eliminated for high chamber pressure
15 weapons by the invention by Paul Vieille in 1886 of smokeless gunpowder, made from
gelatinized nitrocellulose mixed with ether and alcohol. Subsequent improvements soon led
to cordite, containing 58% nitroglycerin, 37% guncotton and 5% petroleum jelly, all in
percentage by weight, patented by Abel and Dewar in 1889. Guns using these powders
produced substantially only gaseous combustion products; hence they emitted practically no
20 smoke when fired. In addition, smokeless gunpowder was much more powerful than black
powder, giving an accurate rifle range of up to 1000 yards (914.4 meters).

[003] It was not, and still is not, possible to use such high energy smokeless powders in
many types of sporting guns that are unable to withstand the high pressures developed.
Hence, black powder has continued to be utilized in "cowboy action" and muzzle loading
25 sporting firearms, amongst others, despite its drawbacks.

DESCRIPTION OF THE PRIOR ART

[004] US Patent No. 4,128,443 patented Dec 5, 1978, by D.E. Pawlak et al described a
powder that combined the low pressure characteristics of black powder and the safe handling
30 and storage properties of smokeless powder. This powder, now marketed under the
trademark "PYRODEX", is a homogeneous mixture of 30 to 82.5 parts by weight of a nitrate,
chlorate or perchlorate oxidizing agent (preferably potassium perchlorate), 14.5 to 45 parts by
weight of an oxidizable derivative of an organic carboxylic acid (preferably sodium
benzoate), and 1.0 to 25.0 parts by weight water. Compared to black powder, PYRODEXTM

produced less smoke while increasing the velocity of the bullets fired. The chamber pressure was at a low enough level to be utilized in muzzle loading and low-energy sporting weapons.

[005] Another advance in the state of the art was described in US Patent 4,997,496, patented Mar 5, 1991 by Hoffmann-La Roche Inc. That patent described an explosive and propellant composition which was obtained by admixing finely divided particles of ascorbic acid and a nitrate-containing oxidizing agent, such as potassium nitrate. Such dry powder was said to be used as such or in a compressed form in "various explosive or propellant applications", such as consumable cartridges. This patent led to the marketing in North America of the powder under the trademark "BLACK CANYON" for use in, for example, antique firearms or other weapons that cannot sustain high operating pressures. Recent improvements in ignition systems have made this powder more attractive for sporting firearms, particularly newer models that are designed to operate at higher pressures.

[006] As described above, both PYRODEXTM and BLACK CANYONTM powders, including a number of derivatives stemming from the latter, are of the same basic makeup as black powder in that they all contain oxidizers and/or fuels that are minerals. It is well known that mineral-based oxidizers and fuels used in powders suffer from certain disadvantages. They all tend to emit some smoke when fired, they all tend to foul the weapon when fired, and they all are hygroscopic. PYRODEXTM and BLACK CANYONTM (including its derivatives) have improved characteristics over black powder, but they still suffer from those disadvantages. These and other propellant compositions of the prior art require the user to clean the weapon after every or almost every shot fired, regardless of the weather conditions.

[007] Other patents which disclose improvements to propellant compositions still suffer from various drawbacks. Another industry using gas generating compositions that requires minimal post-combustion residue is in vehicle air bag systems. These systems comprise filters to minimize or eliminate residue. See for example the compositions described in US Patent Nos. 6,860,951; 6,846,373; 6,627,014; 6,533,878; 6,497,774; 5,985,060; 5,780,768; 5,501,152 and 5,125,684.

[008] US Patent No 6,860,951 describes an oxidizer-fuel mixture comprising a cellulose-based fuel and an oxidizer such as a mixture of ammonium perchlorate and sodium nitrate such that the combination is a solid solution. The mixture is described as producing up to 30% solids on combustion, which may be appropriate for use in a vehicle air bag passive restraint system.

[009] The gas-generating compositions disclosed in US Patent No 6,846,373 comprise ammonium nitrate, metal oxyacid salt, ammonium perchlorate and a combusting component such as charcoal. The combustion residue from these compositions is described as being either a neutral alkali metal chloride or an alkali earth metal chloride.

5 [0010] Other patents of the prior art which describe propellants for use in firearms, such as US Patent Nos. 6,045,638; 6,024,812; 3,909,322 and 3,031,347 are not suitable for use in small caliber firearms.

[0011] Given the problems of the prior art, it would be desirable to provide a propellant for use in firearms requiring low chamber pressures which can generate the proper pressure-time
10 profile upon ignition and while the projectile is still in the barrel. In particular, it would be desirable to provide relatively smokeless and residue-free substitutes for classic black powder or similar mineral-based powders. Such a propellant should be able to fire with consistency and have an acceptable shelf life for its purpose, which usually requires that it not be highly hygroscopic. Additionally, such a propellant should respect regulatory requirements for
15 transportation and be relatively safe for users who engage in self-loading for shooting purposes, both in terms of its capacity for unexpected ignition and its toxicity.

[0012] To meet these requirements it would be desirable, in summary, to provide a propellant that:

- 20 - is smokeless. For this objective, the propellant would purposefully exclude the presence of substantial quantities of mineral oxidizers and fuels such as those used in black powder, PYRODEXTM and BLACK CANYONTM and its derivatives;
- is a substantially organic formulation which would produce mostly gases as combustion products, as do smokeless gun powders, and which would operate at pressures low enough for use in small caliber firearms such as caliber 0.50 modern
25 in-line muzzleloaders and guns having "cowboy actions" (e.g., the 45-70 GVT);
- has a pressure-time curve similar to that for black powder under the same firing conditions;
- is relatively non-hygroscopic compared to black powder or similar mineral-based substitutes;
- 30 - has ballistic characteristics similar to those associated with black powder or similar mineral-based powders;
- is relatively temperature insensitive compared to black powder or similar mineral-based powders; and

- is controllable as to its bulk density and specific energy so that essentially the same volumetric charges as those for black powder or its substitutes yield similar ballistic properties.

[0013] The invention hereafter described is intended to address these desirable objectives.

- 5 [0014] The invention in its general form will first be described, and then its implementation in terms of specific embodiments will be detailed with reference to the drawings following hereafter. These embodiments are intended to demonstrate the principle of the invention, and the manner of its implementation. The invention in its broadest and more specific forms will then be further described, and defined, in each of the individual claims which conclude this
- 10 Specification.

SUMMARY OF THE INVENTION

- [0015] A broad aspect of one embodiment of the present invention provides a cellulose-based organic fuel in an amount from about 70 to 90% by weight, a non-azide, nitrogen-containing
- 15 primary organic oxidizer in an amount from about 5% to about 30% by weight, and a secondary nitrate, perchlorate, chlorate or peroxide oxidizer in an amount up to about 10% by weight, preferably from about 0.5% to about 10% by weight, wherein as a preferred objective, when used in a small caliber firearm or muzzleloader, the temperature of combustion is at a level that provides substantially complete combustion of the propellant
- 20 during firing, preferably before the projectile leaves the muzzle, so that the products of combustion are mostly gaseous.

- [0016] The cellulose-based organic fuel of the present invention is chosen from the group comprising nitrocellulose, cellulose, cellulose esters or cellulose ethers, and preferably is nitrocellulose. The non-azide, nitrogen-containing primary organic oxidizer is chosen from
- 25 the group comprising guanidine nitrate, nitroguanidine, triaminoguanidine, diaminoguanidine, monoaminoguanidine or nitroaminotetrazole salts, and preferably is guanidine nitrate. The secondary nitrate, perchlorate, chlorate or peroxide oxidizer comprises: potassium nitrate, sodium nitrate, ammonium nitrate, lithium nitrate or any other alkali metal oxidizer, or barium nitrate, magnesium nitrate, calcium nitrate or any other
- 30 alkaline earth metal oxidizer; potassium perchlorate, sodium perchlorate, ammonium perchlorate, lithium perchlorate or any other alkali metal oxidizer, or barium perchlorate, magnesium perchlorate, calcium perchlorate or any other alkaline earth metal oxidizer; potassium chlorate, sodium chlorate, ammonium chlorate, lithium chlorate or any other alkali metal oxidizer, or barium chlorate, magnesium chlorate, calcium chlorate or any other

alkaline earth metal oxidizer or any alkaline metal peroxide or any alkaline earth metal peroxide. The preferred secondary nitrate, perchlorate, chlorate or peroxide oxidizer is potassium perchlorate.

[0017] In one particular embodiment, nitrocellulose is present in an amount of about 76% to about 82 % by weight, guanidine nitrate is present in an amount of about 10 to about 20 % by weight, and potassium perchlorate is present in an amount of about 0.8 to about 2.0 % by weight. In another particular embodiment, the nitrocellulose is present in an amount of about 79.2% by weight, the guanidine nitrate is present in an amount of about 15% by weight and the potassium perchlorate is present in an amount of about 1.5% by weight.

[0018] A broad aspect of another embodiment of the present invention provides an extrudable propellant composition as described in combination with a suitable solvent and further containing from about 1.0% to about 4.0% by weight of a plasticizer, from about 1.0% to about 3.0% by weight of a stabilizer, and up to about 0.8% by weight of a lubricant, with the preferred objective that, when used in a small caliber firearm or muzzleloader, the temperature of combustion is at a level that provides substantially complete combustion of the propellant during firing, before the projectile leaves the muzzle, so that the products of combustion are mostly gaseous.

[0019] The solvent can be an acetone alcohol/mixture, an ether/alcohol mixture, an ethyl acetate/alcohol mixture or other suitable solvent. The plasticizer can be any substance capable of gelatinizing nitrocellulose or cellulose-based binders such as polyvinyl alcohol, triacetin, polyester adipate or sebacate or dinitrotoluene or acetyl triethyl citrate or any other citrate or dibutyl phthalate or any other phthalate. The stabilizer can be a NO_x scavenging substance such as diphenylamine, methyl diphenyl urea (i.e. AkarditeTM), 2-NO diphenylamine, N-methyl-p-nitroaniline, diethyl diphenyl urea (i.e., ethyl centralite) or their equivalent. The preferred stabilizer is ethyl centralite. The lubricant can be graphite or molybdenum disulfide.

[0020] In one particular embodiment, the solvent is an ether/alcohol mixture, the plasticizer is acetyl triethyl citrate, the stabilizer is ethyl centralite and the lubricant is graphite. In another particular embodiment, the solvent is an ether/alcohol mixture, the plasticizer is acetyl triethyl citrate in an amount of about 2.0% to about 3.0% by weight, the stabilizer is ethyl centralite in an amount of about 1.5% to about 2.5% by weight; and the lubricant is graphite in an amount of up to about 0.3% by weight. In yet another particular embodiment, the solvent is an ether/alcohol mixture, the plasticizer is acetyl triethyl citrate in an amount of

about 2.0% by weight, the stabilizer is ethyl centralite in an amount of about 2.0% by weight, and the lubricant is graphite in an amount of about 0.2% by weight.

[0021] In another particular embodiment, the shaped (e.g., extruded) form of the composition can be colour coded by the addition of up to about 0.1% by weight of a suitable pigment.

5 [0022] A broad aspect of another embodiment of the present invention provides a propellant composition as described mixed together with grains of an ignition material.

[0023] A broad aspect of another embodiment of the present invention provides a propellant composition comprising only the ignition grain material described.

10 [0024] In one particular embodiment, the propellant-ignition mixture is in a 1:1 ratio by volume.

[0025] In another particular embodiment, the ignition grain material comprises nitrocellulose in an amount from about 40 to 50% by weight, ethyl centralite in an amount from 0.2 to 0.8% by weight, potassium nitrate in an amount from about 36 to 46% by weight, sulphur in an amount from about 3.5 to 7.5% by weight, charcoal from about 5.5 to 10.5% by weight and
15 other moisture and volatiles in an amount up to 1.0% by weight.

[0026] A broad aspect of another embodiment of the present invention provides a method of producing free-flowing grains by shaping a propellant composition, preferably by extrusion, for use in small arms cartridges or modern in-line muzzleloaders, the propellant composition comprising: the cellulose-based organic fuel, primary organic oxidizer, secondary oxidizer,
20 plasticizer, stabilizer and lubricant as described. This method preferably includes extruding a plastic mass of the composition through a die that forms a hollow void in the extruded mass whereby, on severing segments of the extruded composition immediately after said extrusion step while the extruded composition is still in a plastic phase, extruded grains so formed have a hollow void in their interior.

25 [0027] In one particular embodiment, an extrusion die which will produce at least one through hole in the hollow cylindrical grains, is formed by one or more mandrels or needles.

[0028] A broad aspect of a further embodiment of the present invention provides shaped grains of the propellant composition as described in detail herein to provide a propellant charge having a bulk density in the range of 0.550 g/cc to 0.750 g/cc. The bulk density of the
30 grains may be controlled by the size of the hollow void formed in the interior.

[0029] A broad aspect of another embodiment of the present invention provides shaped grains of the propellant composition as described in detail herein to provide a propellant charge having an effective energy per unit volume in the range of 400 cal/cc to 700 cal/cc.

The effective energy per unit volume of the grains may be controlled by the size of a hollow void formed in the interior.

[0030] A broad aspect of yet another embodiment of the present invention provides shaped hollow grains of the propellant composition as described in detail herein having a length in the range of 0.030 inch (0.0762 centimeters) to 0.200 inch (0.508 centimeters), a diameter in the range 0.040 inch (0.1016 centimeter) to 0.070 inch (0.1778 centimeters), and having a coaxial opening there through having a diameter in the range 0.010 inch (0.0254 centimeters) to 0.040 inch (0.1016 centimeters).

[0031] A broad aspect of still another embodiment of the present invention provides a powder load containing the shaped grains as described in detail herein in conjunction with a projectile.

[0032] Thus, as described above, the principal ingredients of the propellant composition of the present invention, which are its fuel and its principal oxidizer, are organic in nature.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] Figure 1 is an isometric view of a grain of the propellant as shaped according to a preferred aspect of the invention.

[0034] Figure 2 is a graph of the ballistic performance of the invention compared with PYRODEXTM and smokeless propellant in terms of projectile velocity achieved as a function of the quantity of propellant charge or load employed.

[0035] Figure 3 is a graph of the ballistic performance of the invention compared with PYRODEXTM and smokeless propellant in terms of barrel pressure achieved as a function of the quantity of propellant charge or load employed.

[0036] Figure 4 is a graph of the ballistic performance of the propellant, ignition grains and a mixture thereof of the invention compared with TRIPLE 7TM in terms of projectile velocity achieved as a function of the quantity of charge or load employed.

[0037] Figure 5 is a graph of the ballistic performance of the propellant, ignition grains and a mixture thereof of the invention compared with TRIPLE 7TM in terms of barrel pressure achieved as a function of the quantity of charge or load employed.

[0038] Figure 6 is a graph of the ballistic performance of the propellant, ignition grains and a mixture thereof of the invention compared with TRIPLE 7TM in terms of the muzzle energy achieved as a function of the quantity of charge or load employed.

DETAILED DESCRIPTION

Terminology

[0039] A summary of certain terms used herein is provided to reduce some of the potential questions with regard to those terms, as they are used in the specification and claims. It is to be understood that this summary is provided to assist with understanding how the terms relate to each other, but the summary does not restrict the meaning of the terms. The figures and specification more fully establish the meaning for the terms.

[0040] "Effective energy per unit volume" means the "work done on the projectile" upon firing.

[0041] "Mineral" means substances which are not organic and which contain a metallic component such as calcium, manganese, magnesium, nickel, copper, silver, zinc, iron, cobalt, sodium, potassium, strontium, barium or aluminum.

[0042] "Smokeless" when referring to a gunpowder or gas generant means a propellant that emits little smoke upon firing and leaves only a minimum amount of solid, non-corrosive particulate residue in the weapon after firing.

[0043] Nitrocellulose is manufactured with various nitrogen contents. For the purposes of the broad aspects of this invention, any nitrocellulose composition having an operative nitrogen level that functions as a fuel in association with the provided oxidizer may be incorporated into the propellant composition. While commercially available nitrocellulose generally has a nitrogen content level of about 10% to about 14% by weight, it has been found, however, that a preferred nitrogen content level for the nitrocellulose is about 12.6% by weight.

[0044] The preferred organic oxidizer is guanidine nitrate, which has the added advantage of having salt-like physical characteristics in that it is granular and crystalline, which aid in processing of the propellant composition. Since guanidine nitrate is basically organic, it is an important contributor to approaching the desired goal of having substantially fully gaseous combustion products. It has been found, however, that the pressure-time profile produced from propellant formulations containing guanidine nitrate as the sole oxidizer are not equivalent to those produced by black powder or PYRODEXTM under similar firing conditions. The use of guanidine nitrate contributes to lowering the pressure exponent during the combustion cycle, thereby rendering the burning rate of the propellant less sensitive to chamber pressure. Less effective, although useful, substitutes for guanidine nitrate include

ammonium nitrate or nitroguanidine or triaminoguanidine or diaminoguanidine, monoaminoguanidine, nitroaminotetrazole salts or any suitable organic oxidizer.

[0045] To improve the pressure-time profile of the propellant of aspects of the present invention, a relatively small amount of a secondary oxidizer, one that is mineral-based and powerful, such as potassium perchlorate, is incorporated into the mixture. While potassium perchlorate is preferred, other suitable mineral-based oxidizers (e.g., ammonium or any alkali metal nitrate, perchlorate, chlorate, peroxide or any alkaline earth metal nitrate) may be used. The addition of a selected quantity of such metal-based oxidizers (e.g., potassium perchlorate) raises the chamber temperature to a level considerably above that which would otherwise occur in the early stages of the combustion cycle, thereby encouraging the primary organic oxidizer to release its oxygen in a timely manner. The amount of secondary oxidizer is kept as low as possible, however, so that the chamber pressure developed during the full firing process and reaction will not rise too high for the weapon to withstand and to minimize the presence of particulate residues after firing.

[0046] On this basis, the invention according to one aspect is the formulation of a substitute propellant for black powder that incorporates an organic, cellulose-based fuel with an organic, non-azide, nitrogen-containing oxidizer as the principal oxidizer, with the presence, as a secondary oxidizer, of an oxygen-rich mineral-based oxidizer, preferably up to the limit of 2% by weight of the total weight of the organic fuel and organic oxidizer, or up to 20% by weight of the organic oxidizer.

Table 1 – Chemical Composition for Organic Fuel, Principal Organic Oxidizer and Secondary Mineral Oxidizer

Ingredient	Embodiment 1 (% by weight)	Embodiment 2 (% by weight)	Embodiment 3 (% by weight)
Nitrocellulose (12.6% N ₂)	70-90	75-85	82.7
Guanidine Nitrate	5-30	10-20	15.7
Potassium Perchlorate	0.5-10	0.8-2.0	1.6

[0047] According to other aspects of the invention, the ratios of fuel to two exemplary principal oxidizers are shown in Table 1.

[0048] Another aspect of the invention is the manner in which the bulk density and/or effective energy per unit volume of the propellant is adjusted to match the work done on the

projectile by black powder in guns. While any method of forming grains from the composition of the present invention may be used (e.g., a pressed pellet, a shaped flaked-grain, or even rolled ball powder), it is preferred to use an extrusion machine to extrude the propellant composition of the present invention, preferably in tubular form and, more preferably, with a single longitudinal perforation or internal void. By so doing, design flexibility is achieved which, in part, includes a possible reduction of the effective energy per unit volume to match the work done on a projectile by black powder in guns. This design flexibility is obtained by varying the physical dimensions of the extruded hollow grains (length, diameter and wall thickness) in concert with the propellant formulation itself. The hollow tubular grains of preferred aspects of the present invention, in addition to their design flexibility, give more uniform ignitability.

[0049] As seen in Figure 1 the extruded grain of the present invention is a hollow cylinder 10, i.e., having an outside diameter 11 of 0.040 to 0.070 inch (0.1016 to 0.1778 centimeters), preferably 0.050 inch (0.127 centimeters), an interior diameter of the single perforation 12 of 0.008 to 0.054 inch (0.02032 to 0.13716 centimeters), preferably 0.026 inch (0.06604 centimeters), a length of 0.030 to 0.200 inch (0.0762 to 0.508 centimeters), preferably 0.058 inch (0.14732 centimeters), and with a preferred length/diameter of 1.16.

[0050] Preferred formulations for propellants according to aspects of the present invention are set forth in Table 2. In order to provide an extrudable composition, additional components provide desirable properties. The propellant includes, in small quantities, a plasticizer (e.g., acetyl triethyl citrate), a stabilizer (e.g., ethyl centralite), a lubricant (e.g., graphite), and one or more pigments to give a distinguishing colour for colour coding.

[0051] When the guanidine nitrate is used as the non-azide, nitrogen-containing oxidizer and the composition is shaped to a specific geometric configuration (e.g., the configuration of Figure 1), the effective energy content per unit volume of the composition is similar to that of black powder.

[0052] The desired bulk density of about 0.550 g/cc to about 0.750 g/cc is achieved by utilizing an extrusion method to manufacture the propellant grains. The resulting extruded grains are pourable like black powder, hence black powder volumetric measures can be used to set the powder load for both cartridges and muzzleloader applications. In addition, the extruded propellant grains exhibit low standard deviations associated with the metering of propellant charge weight, chamber pressure and projectile velocity.

Table 2 – Chemical Formulations

Ingredient	Embodiment 4 (% by weight)	Embodiment 5 (% by weight)	Embodiment 6 (% by weight)
Nitrocellulose (Grade A with 12.6% N ₂)	70 – 90	76 - 82	79.2
Guanidine nitrate	5 – 30	10 - 20	15.0
Potassium perchlorate	0.5 – 10	0.8 – 2.0	1.5
Acetyl triethyl citrate	1.0 – 4.0	2.0 – 3.0	2.0
Ethyl centralite	1.0 – 3.0	1.5 – 2.5	2.0
Graphite	0 – 0.8	0 – 0.3	0.2
Pigments	As desired	As desired	0.1

5 [0053] The graphite is a lubricant that aids the loading of cartridges and weapons, while the ethyl centralite is a stabilizer for the final product. Other NO_x scavenging substances (e.g., diphenylamine, Akardite™, 2-NO diphenylamine or methyl nitroaniline) can be used as stabilizers, but ethyl centralite is preferred.

10 [0054] Pigment is added to give the propellant a distinctive colour to distinguish it from other small caliber propellants or powders and to be useful for colour coding to identify different grades of propellant grains.

[0055] The graphite and pigments do not contribute significantly to the energy of the formulation. The ethyl centralite, which is mostly carbon, reacts with oxygen to provide further energy to the reaction.

15 [0056] In order to release all the energy available within the time of the combustion cycle, thereby emulating the performance of black powder, it is necessary to add a small amount of a powerful inorganic oxidizer (e.g., potassium perchlorate) to speed up the combustion process. The potassium perchlorate raises the chamber temperature to a level considerably above that for black powder or its mineral based substitutes in the early stages of the
20 combustion cycle. This results in a pressure-time curve similar to that obtained when firing black powder or its mineral-based substitutes under the same conditions but without the

smoke, degree of particulate residue and other disadvantages of black powder or its mineral-based substitutes.

[0057] In another embodiment of the present invention, the propellant is blended with certain ignition grains to overcome deficiencies with substandard or older weapon systems or in
5 marginal firing conditions (eg., cold or humid weather). The ignition grains can be chosen from benite or other suitable ignition grains which have a geometry similar to that as the propellant of the invention. The ignition grains contain a larger proportion of mineral-based oxidizers as compared to organic oxidizers. The amount of oxidizer in the ignition grains is adjusted to match the ballistics properties of the propellant of the invention. In one
10 embodiment, the same oxidizers as the secondary oxidizer of the propellant of the invention can be used in the ignition grains.

[0058] It has been found that the composition of the ignition grains which, initially, was designed, in combination with the propellant of the invention, to improve the propellant's ignition, such as with substandard or older weapon systems or in marginal firing conditions,
15 can also be used alone as the propellant in a weapon system, in various firing conditions.

[0059] Several factors were found to influence the ignition capabilities of the ignition grains. The proportion of nitrocellulose of from about 30-60% by weight works well. The higher limit resulted in ignition when tested in several modern in-line muzzleloaders, whereas the lower limit was the minimum required the grains to bind adequately. Two grades of
20 nitrocellulose (A and C1) were tested, the C1 grade providing in better ignition due to its lower solubility and higher porosity, resulting in a more fragile matrix. With respect to the sulphur component, a relatively higher proportion was found to aid ignition, although this must be tempered due to increased combustion residue. The solvent, which can be an ether/alcohol mixture or acetone alcohol/mixture, has little or no influence on the ignition
25 capability.

[0060] Given these observations, the ignition grains tested with the propellant of the present invention and alone comprised nitrocellulose in an amount from about 40 to 50% by weight, ethyl centralite in an amount from 0.2 to 0.8% by weight, potassium nitrate in an amount from about 36 to 46% by weight, sulphur in an amount from about 3.5 to 7.5% by weight,
30 charcoal from about 5.5 to 10.5% by weight and other moisture and volatiles in an amount up to 1.0% by weight.

Manufacturing Method

[0061] An extrusion manufacturing method was chosen to shape the composition of aspects of the present invention into suitable grains having the desired bulk density and energy content on a volumetric basis. The object was to produce a tubular propellant grain having one or more central gaps, voids or openings of controlled dimension within the grain.

5 Preferably, the propellant is extruded as strands in a tubular form with a hollow core (i.e., a longitudinal central perforation with a tubular shape), as shown in Figure 1 as a preferred embodiment, which are then directly severed into small segments to create free-flowing individual grains.

[0062] The first step in the preparation of the preferred formulations detailed in Table 2
10 consists of dry mixing for a suitable time (e.g., about 10 minutes) the dehydrated nitrocellulose (Grade A containing 12.6% nitrogen) with the guanidine nitrate, potassium chlorate and ethyl centralite. Ether and alcohol are then added as solvents along with the acetyl triethyl citrate. With 12.6% nitrogen content, the nitrocellulose is completely soluble in the ether/alcohol solvent solution. Wet mixing is then conducted for a suitable time (e.g., 30 minutes)
15 with the mix temperature being gradually raised to about 30°C. The mix, which is now in the form of dough, is allowed to cool for a suitable time (e.g., about 20 minutes) to below about 20°C as its rheology is adjusted for extrusion.

[0063] The second step in the manufacturing method is the extrusion of the dough form through dies of the desired shape (e.g., tubular with a single perforation) and dimensions.
20 The diameter and perforation of the strands are closely monitored for uniformity. A rotary cutting machine cuts the strands immediately as they come out of the extruder into grains of fixed length. The geometry of the preferred embodiment of each of the grains is detailed in Table 3.

25

Table 3 – Preferred Dimensions of Extruded Grain

Grain Dimension	Size range (inch)	Size (inch)
Length (L)	0.030 – 0.200	0.058
	0.0762 – 0.508	0.14732
Outer Diameter (D)	0.040 – 0.070	0.050
	0.1016 – 0.1778	0.127
L/D	0.8 – 2.8	1.16
Grain wall thickness	0.008 – 0.016	0.012
	0.02032 – 0.04064	0.03048
Perforation Diameter (d)	0.008 – 0.054	0.026
	0.02032 – 0.13716	0.06604

[0064] Next, the solvents are recovered by heating the cut propellant grains to between about 30°C and about 45°C for about 48 hours. The propellant grains are then coated with graphite using a glazing process before being dried (e.g., in tray driers) at about 55°C to reduce
5 volatile material below 1% by weight. Once dried, the grains are screened to remove clusters, undersized grains and dust. Following chemical analyses and ballistic evaluations, final blending completes production of the propellant.

Test Results

10 [0065] The test results from the propellant in one aspect of the present invention are compared to PYRODEX™ to demonstrate performance enhancement. Data for traditional smokeless propellants is also included to show the vastly different operating regimes between them and the propellant of aspects of the present invention. Thus, these test results are intended to show that the shaped propellant of an aspect of the present invention can replace
15 not only black powder but also its mineral-based substitutes, since the mineral-based substitutes are of the greatest interest due to their predominance in the marketplace.

[0066] The shaped propellant of aspects of the present invention is much less hygroscopic (< 2% using the MIL-STD-286 method) than black powder and its mineral-based substitutes (> 9% for PYRODEX™). It has been found that the shaped propellant of an aspect of the
20 present invention leaves a greatly reduced amount of solid, particulate residue (in certain cases almost none) in guns after shooting (< 1% of the total charge weight after 50 shots) compared to > 30% for most mineral-based substitutes of black powder after only a few shots. It has been found that the little residue that does remain (generally in the form of a thin layer of soot or very small and light organic flakes) is mostly organic.

25 [0067] The preferred bulk density of the propellant of the invention is 0.664 g/cc compared to 0.667 g/cc for PYRODEX™, thereby assuring virtually identical powder loads for a given firearm and loading procedure. Thus, for example, the standard volumetric powder measure traditionally used by hand loaders for determining the exact quantity of powder (powder load) prior to loading a gun with black powder or its mineral-based substitutes, is equally
30 applicable to the propellant grains of aspects of the present invention. Further, since the preferred propellant of aspects of the present invention is extruded, it has excellent loading properties which result in lower standard deviations related to ballistic performance.

[0068] Some test data are presented in the following Tables 4, 5 and 6 and in the graphs of Figures 2 and 3.

5

Table 4 – Cartridge Applications

Test Load	Powder Load (gr/mg)	PYRODEX™ RS Select		Propellant of Invention	
		Velocity (fps/mps)	Pressure (psi/kPa piezo)	Velocity (fps/mps)	Pressure (psi/kPa piezo)
45-70 GVT 300 gr HDY HP Win WLR primer	50	1,107	13,325	1,114	14,117
	3240	337.4	91,872	339.5	97,333
	70	1,347	16,480	1,476	18,638
	4536	410.6	113,626	449.9	128,504

Table 5 – Cartridges Fired at Temperature Extremes

Test Load	Temperature (°C)	PYRODEX™ RS Select		Propellant of Invention	
		Velocity (fps/mps)	Pressure (psi/kPa piezo)	Velocity (fps/mps)	Pressure (psi/kPa piezo)
45-70 GVT 300 gr HDY HP Win WLR primer 70 gr powder load	-45	1,356	17,369	1,484	19,644
		413.3	119,755	452.3	135,440
	21	1,392	19,712	1,509	20,415
		424.3	135,909	459.9	140,756
	45	1,377	17,442	1,516	19,087
		419.7	120,258	462.1	131,600

10

Table 6 – Modern in-line muzzleloader Applications

Test load	Powder Load (gr/mg)	PYRODEX™ RS		Propellant of Invention	
		Velocity (fps/mps)	Pressure (psi/kPa strain gauge)	Velocity (fps/mps)	Pressure (psi/kPa strain gauge)
.50 cal CVA Optima RB .490/177 gr Fed 209 primer	70	1,533	8,229	1,339	4,305
	4536	467.2	56,737	408.1	29,682
	100	1,766	6,962	1,674	5,811
	6480	538.3	48,001	510.2	40,065
	130	1,922	9,635	1,983	7,812
	8424	585.8	66,431	604.4	53,862

[0069] The graphs in Figures 2 and 3 show that the ballistic performance (velocity and pressure respectively) of the propellant of an aspect of the present invention has similar velocity and pressure progressions compared to those for PYRODEX™ for the same powder

15

load variation. In other words, the ballistic test results associated with the shaped propellant of an aspect of the present invention are similar to those for PYRODEX™ Select RS under identical firing conditions.

[0070] As can be seen in Tables 4 and 5, both the velocities and the pressures are higher for the propellant of the invention compared to PYRODEX™ Select RS. This can be attributed to the higher calorimetric value of the shaped propellant of the present invention (813 cal/g compared to approximately 700 cal/g for PYRODEX™ Select RS) and by its more uniform ignition and burning characteristics. Further, the standard deviations are very low for both velocity and pressure in the modern in-line muzzleloader and cartridge case weapons. The shaped propellant of aspects of the present invention is also less sensitive to velocity and pressure variations when the guns are fired at extreme temperatures.

[0071] As seen in Table 6, the data for modern in-line muzzleloader applications follows different trends because it has been compared to PYRODEX™ RS; a lower quality grade of PYRODEX™ that yields less grain uniformity and higher pressure in the gun than PYRODEX™ Select RS. In fact, the pressure slope of the shaped propellant of the present invention, in terms of pressure variation with charge weight, is lower than the compared propellant of the prior art, and the velocity progression is higher, in terms of muzzle velocity as a function of powder load. That means more safety for the user combined with higher ballistic performance. The shaped propellant of aspects of the present invention yields the same safety features as black powder or its mineral substitutes in the designated application. These features are related to the low sensitivity of its burning rate to the pressure.

[0072] Test firing results show that bullets propelled by the shaped propellant of an aspect of the present invention not only are precise, but also are consistent within a group fired from the same weapon without interruption for cleaning. Tests were conducted in good and poor weather conditions.

[0073] In one set of tests with Hornady XTP 50/44 300 gr bullets (19.4 grams) in conjunction with the shaped propellant of an aspect of the present invention, in a closed breech 209 primer ignition system and an iron (open) sight, the first three rounds had a 0.5-inch (1.27 centimeters) grouping at 30 yards (27.432 meters) and a 6 inch (15.24 centimeters) grouping at 150 yards (137.16 meters). A similar test with PYRODEX™ showed that the spread increased with the number of firings due to the rapid build-up of solid residue in the barrel compared to the clean firings of the propellant of the invention. In fact, after 42 uninterrupted firings with the shaped propellant of aspects of the present invention, only a thin film of soot with no build up of solid residue was observed in the barrel.

[0074] Further field tests were conducted in ambient conditions with an embodiment of the propellant of the present invention, an approximate 50-50 mixture of the propellant with ignition grains of the present invention (ie, in a 1:1 ratio), pure ignition grains of the present invention and TRIPLE 7 FFFG™, a known fast-burning propellant manufactured by Hodgdon, as detailed in Table 7 and Figures 4 to 6. The projectile weight (240 gr (15.55 grams) and 300 gr (19.44 grams)) is indicated for the tested propellants.

[0075] In comparison with TRIPLE 7 FFFG™, the propellant, ignition grains and 50-50 mixture of the present invention all showed similar velocity and pressure progressions for the same powder load variation. The data in Table 7 further compares the projectile energy from the .308 Winchester™, using a standard smokeless propellant for this calibre and projectile (IMR4895), with the tested powders.

[0076] The Powerpunch™ 600 gr (38.88 grams) is a known heavy projectile used for .50 cal muzzleloading. The pressure generated with this projectile using a fast-burning propellant (TRIPLE 7 FFFG™) was used as the maximum pressure criteria ($P + 3 \text{ SD}$) to establish the safety of the tested propellants.

[0077] As shown in Table 7 and Figures 4-6, the velocities are higher for each tested powder compared to TRIPLE 7 FFFG™. The velocity standard deviations for the same projectile (300 gr (19.44 grams)) are lower compared to that of TRIPLE 7 FFFG™. The muzzle energy and pressure progressions are comparable to TRIPLE 7 FFFG™. Furthermore, the muzzle energy measured from the tested propellants are comparable to that of the .308 Win. The pressure standard deviations for the same projectile (300 gr (19.44 grams)) are very much lower compared to that of TRIPLE 7 FFFG™. The maximum pressure threshold for each of the tested propellants did not exceed the pressure generated with the propellant of the prior art (23877 psi (164,626 kPa)), thereby establishing its safety.

[0078] Cold weather tests (at 9 °F (-12.8°C)) were also conducted and yielded consistent firing results in four different weapons, all with CCI 209 shotshell primer. The two powders tested were the propellant of the invention and an approximate 50-50 mixture of the propellant with the ignition grains of the present invention.

Table 7 – Ballistic Summary in Ambient Conditions

Powder	Charge	Projectile	Velocity (fps/mps)	Velocity SD (fps/mps)	Muzzle energy (ft x lb/J)	Pressure (psi/kPa)	PressureSD (psi/kPa)	P + 3 SD (psi/kPa)
IMR 4895	45 wt	308 Win / 180 gr (11.66 grams)	2500 762		<u>2497</u> 3385.5	52000 358527		
Triple 7 FFFG	120 vol	Powerpunch 600 gr (38.88 grams)	1486 452.9		2941 3987.5	<u>23877</u> 164626		
Triple 7 FFFG	100 vol	Hdy SST 300 gr (19.44 grams)	1819 554.4	31 9.4	2203 2986.9	18564 127994	4874 33605.0	33186 228809.4
	120 vol	Hdy SST 300 gr (19.44 grams)	1875 571.5	24 7.3	2341 3174.0	18320 126312	1660 11445.3	23300 160647.8
Propellant of Invention	100 vol	Hdy XTP 300 gr (19.44 grams)	1866 568.8	27 8.2	2319 3144.1	17900 123416	677 4667.8	19931 137419.4
	120 vol	Hdy XTP 300 gr (19.44 grams)	2035 620.3	19 5.8	2758 3739.3	19617 135254	580 3999.0	21357 147251.3
Ignition Grains	100 vol	Hdy XTP 300 gr (19.44 grams)	1843 561.7	18 5.5	2262 3066.9	16816 115942	514 3543.9	18358 126574.0
	120 vol	Hdy XTP 300 gr (19.44 grams)	2102 640.7	16 4.9	2942 3988.8	20837 143666	184 1268.6	21389 147472.0
Mix 50/50	100 vol	Hdy SST 300 gr (19.44 grams)	1912 582.8	21 6.4	2434 3300.1	18975 130828	822 5667.5	21441 147830.5
	120 vol	Hdy SST 300 gr (19.44 grams)	2120 646.2	9 2.7	2993 4058.0	21748 149947	540 3723.2	23368 161116.7
Propellant of Invention	100 vol	Hdy XTP 240 gr (15.55 grams)	1908 581.6	29 8.8	1939 2628.9	13794 95106	1127 7770.4	17175 118417.5
	120 vol	Hdy XTP 240 gr (15.55 grams)	2112 643.7	40 12.2	2376 3221.4	16133 111233	1323 9121.8	20102 138598.4
Ignition Grains	100 vol	Hdy XTP 240 gr (15.55 grams)	1967 599.5	15 4.6	2061 2794.3	15264 105242	385 2654.5	16419 113205.0
	120 vol	Hdy XTP 240 gr (15.55 grams)	2220 676.7	31 9.4	2626 3560.4	18613 128332	832 5736.4	21109 145541.4
Mix 50/50	100 vol	Hdy XTP 240 gr (15.55 grams)	1948 593.8	43 13.1	2022 2741.5	14844 102346	1075 7411.9	18069 124581.4
	120 vol	Hdy XTP 240 gr (15.55 grams)	2178 663.9	21 6.4	2527 3426.2	17988 124023	868 5984.6	20592 141976.8

[0079] The propellant was loaded in the CVA Kodiak™, TC Omega™, Knight Bighorn™ and Tradition Tracker™ firearms. The Kodiak™ and the Omega™ were scope equipped; shooting Hdy XTP 50/45 240 gr bullet/sabot (15.55 grams) with 90 grains (5.83 grams) of the propellant of the present invention at 100 yards (91.44 meters). On a 10 round string, every single shot ignited well and struck the target with a 5 inch (12.7 centimeters) grouping without any work on the load, which is good given the equipment temperature and shooter conditions. Very little residue was observed at the end of the session. The guns were cleaned with two patches and the breech plug was removed with little effort.

[0080] The Knight Bighorn™ and the Tradition Tracker™ were shot with open sight at 50 yards (45.72 meters) with White 320 grains bullet/sabot (20.74 grams) and 90 grains (5.83 grams) of the 50-50 mixed powder. On a 5 round string, every single shot ignited well and struck the target with a grouping between under 2 and 4 inches (5.08 to 10.16 centimeters).

5 While it was observed that the shots with the 50-50 mixture yielded slightly more smoke than pure propellant, the degree was much less than that of current black powder substitutes. At the end of the session, the guns were cleaned with 2-3 patches and the breech plug was removed without any effort.

10 [0081] Even in extreme hunting weather, the firearms using the propellant and propellant-ignitor grain mixture of the present invention did not foul. The residue that remained after all shots were fired was easily and quickly cleaned. Very little smoke was emitted during firing.

[0082] Further field ignition tests of various other mixtures of propellant and ignition grains were conducted. It was found that a mixture of a minimum of 35% of ignition grains with the propellant of the invention yields similar ignition results with various weapons, including
15 substandard or older weapon systems.

CONCLUSION

[0083] The foregoing has constituted a description of specific embodiments showing how the invention may be applied and put into use. These embodiments are only exemplary. The
20 invention in its broadest, and more specific aspects, is further described and defined in the claims which now follow.

CLAIMS

1. A propellant composition for use in modern in-line muzzleloaders comprising:
 - a) from about 70 to about 90% by weight of a cellulose-based organic fuel;
 - b) from about 5 to about 30% by weight of a non-azide, nitrogen-containing, solid primary organic oxidizer; and
 - c) from about 0.5% to about 10.0% by weight of a mineral-based secondary nitrate, perchlorate, chlorate or peroxide oxidizer,
 wherein, when used in said modern in-line muzzleloaders the products of combustion are substantially-completely gaseous, with the proviso that the propellant composition excludes nitroglycerin.
2. The propellant composition of claim 1, comprising:
 - a) from about 75 to about 85% by weight of a cellulose-based organic fuel;
 - b) from about 10 to about 20% by weight of a non-azide, nitrogen-containing, solid primary organic oxidizer; and
 - c) from about 0.8 to about 2.0% by weight of a mineral-based secondary nitrate, perchlorate, chlorate or peroxide oxidizer.
3. The propellant composition of claim 1 or 2, wherein said cellulose-based organic fuel comprises nitrocellulose or cellulose or cellulose esters or cellulose ethers.
4. The propellant composition of claim 1 or 2, wherein said non-azide, nitrogen-containing, solid primary organic oxidizer comprises guanidine nitrate, nitroguanidine, triaminoguanidine, diaminoguanidine, monoaminoguanidine or nitroaminotetrazole salts.
5. The propellant composition of claim 1 or 2, wherein said mineral-based secondary nitrate or perchlorate or chlorate or peroxide oxidizer comprises potassium nitrate or sodium nitrate or ammonium nitrate or lithium nitrate, or barium nitrate or magnesium nitrate or calcium nitrate; potassium perchlorate or sodium perchlorate or ammonium perchlorate or lithium perchlorate, or barium perchlorate or magnesium perchlorate or calcium perchlorate; potassium chlorate or

sodium chlorate or ammonium chlorate or lithium chlorate, or barium chlorate or magnesium chlorate or calcium chlorate.

6. The propellant composition of claim 1 or 2, wherein: said cellulose-based organic fuel comprises nitrocellulose; said non-azide, nitrogen-containing, solid primary organic oxidizer comprises guanidine nitrate; and said mineral-based secondary nitrate, Perchlorate, chlorate or peroxide oxidizer comprises potassium perchlorate.

7. The propellant composition of claim 6, wherein: said nitrocellulose is present in an amount of about 82.7% by weight; said guanidine nitrate is present in an amount of about 15.7% by weight; and said potassium perchlorate is present in an amount of about 1.6% by weight.

8. The propellant composition of claim 1, in shapeable form in a solvent and further including:
from about 1.0 to about 4.0% by weight of a plasticizer; from about 1.0 to about 3.0% by weight of a stabilizer; and from 0% to about 0.8% by weight of a lubricant.

9. The propellant composition of claim 1 or 2, in shapeable form in a solvent wherein said cellulose-based organic fuel is present in an amount from about 76 to about 82% by weight, and further including: from about 2.0 to about 3.0% by weight of a plasticizer; from about 1.5 to about 2.5% by weight of a stabilizer; and from about 0 to about 0.3% by weight of a lubricant.

10. The propellant composition of claim 9, wherein:
said cellulose-based organic fuel comprises nitrocellulose and is present in an amount of about 79.2% by weight;
said non-azide, nitrogen-containing, solid primary organic oxidizer is guanidine nitrate and is present in an amount of about 15.0% by weight; and
said mineral-based secondary nitrate, perchlorate, chlorate or peroxide oxidizer is potassium perchlorate and is present in an amount of about 1.5% by weight.

11. The shapeable propellant composition of claim 8, 9 or 10 in extrudable form, wherein said solvent is an acetone/alcohol or an ether/alcohol mixture or an ethyl acetate/alcohol mixture.
12. The shapeable propellant composition of claim 8, 9 or 10 in extrudable form, wherein said plasticizer is any substance capable of gelatinizing nitrocellulose or cellulose-based binders.
13. The shapeable propellant composition of claim 12 in extrudable form, wherein said plasticizer is polyvinyl alcohol or triacetin or polyester adipate or sebacate or dinitrotoluene or acetyl triethyl citrate or any other citrate or dibutyl phthalate or any other phthalate.
14. The shapeable propellant composition of claim 8, 9 or 10 in extrudable form, wherein said stabilizer is a NO_x scavenging substance.
15. The shapeable propellant composition of claim 14 in extrudable form, wherein said NO_x scavenging substance is diphenylamine or methyl diphenyl urea or 2-NO diphenylamine or N-methyl-p-nitroaniline or diethyl diphenyl urea.
16. The shapeable propellant composition of claim 8, 9 or 10 in extrudable form, wherein said lubricant is graphite or molybdenum disulfide.
17. The shapeable propellant composition of claim 8, 9 or 10 in extrudable form, wherein said solvent is an ether/alcohol mixture; wherein said plasticizer is acetyl triethyl citrate; wherein said stabilizer is ethyl centralite; and wherein said lubricant is graphite.
18. The shapeable propellant composition of claim 17, wherein said acetyl triethyl citrate is in an amount of about 2.0% by weight; wherein said ethyl centralite is in an amount of about 2.0% by weight; and wherein said graphite is in an amount of about 0.2% by weight.
19. The shapeable propellant composition of claim 17 or 18 which is colour coded by the addition of a suitable pigment.

20. The shapcable propellant composition of claim 19 wherein said pigment is in an amount of 0% to about 0.1% by weight.
21. Shaped propellant grains comprising the propellant composition as claimed in claim 1 in the form of a propellant charge having a bulk density in the range of 0.550 to 0.750 grams per cubic centimeter.
22. Shaped propellant grains comprising the propellant composition as claimed in claim 1 in the form of a propellant charge having energy per unit volume in the range of 400 to 700 calories per cubic centimeter.
23. Shaped hollow cylindrical propellant grains comprising the propellant composition as claimed in claim 1 having:
- a) a length in the range 0.030 to 0.200 inch (0.0762 to 0.805 centimeters);
 - b) a diameter in the range 0.040 to 0.070 inch (0.1016 to 0.1778 centimeters); and having
 - c) a coaxial opening there through having a wall grain thickness in the range 0.008 to 0.016 inch (0.02032 to 0.04064 centimeters).
24. The shaped hollow cylindrical propellant grains as claimed in claim 23 which are coated with graphite.
25. The shaped hollow cylindrical propellant grains as claimed in claim 23 having:
- a) a length of about 0.058 inch (0.14732 centimeters);
 - b) a diameter of about 0.050 inch (0.127 centimeters); and
 - c) a coaxial opening there through having a wall grain thickness of about 0.012 inch (0.03048 centimeters).
26. The shaped hollow cylindrical propellant grains as claimed in claim 25 which are coated with graphite.

27. The propellant composition of any one of claims 1 to 10 mixed together with ignition grains, said ignition grains comprising:


- a) from about 40 to about 50% by weight of nitrocellulose;
- b) from about 0.2 to about 0.8% by weight of ethyl centralite;
- c) from about 36 to about 46% by weight of potassium nitrate;
- d) from about 3.5 to about 7.5% by weight of sulphur;
- e) from about 5.5 to about 10.5% by weight of charcoal; and
- f) not more than 1.0% by weight of moisture and volatiles.

28. The mixture of claim 27, wherein said ignition grains is present in an amount of at least 35% by weight.

29. The mixture of claim 28, wherein said ignition grains is present in an amount of about 50% by weight.

1 / 4

Figure 1

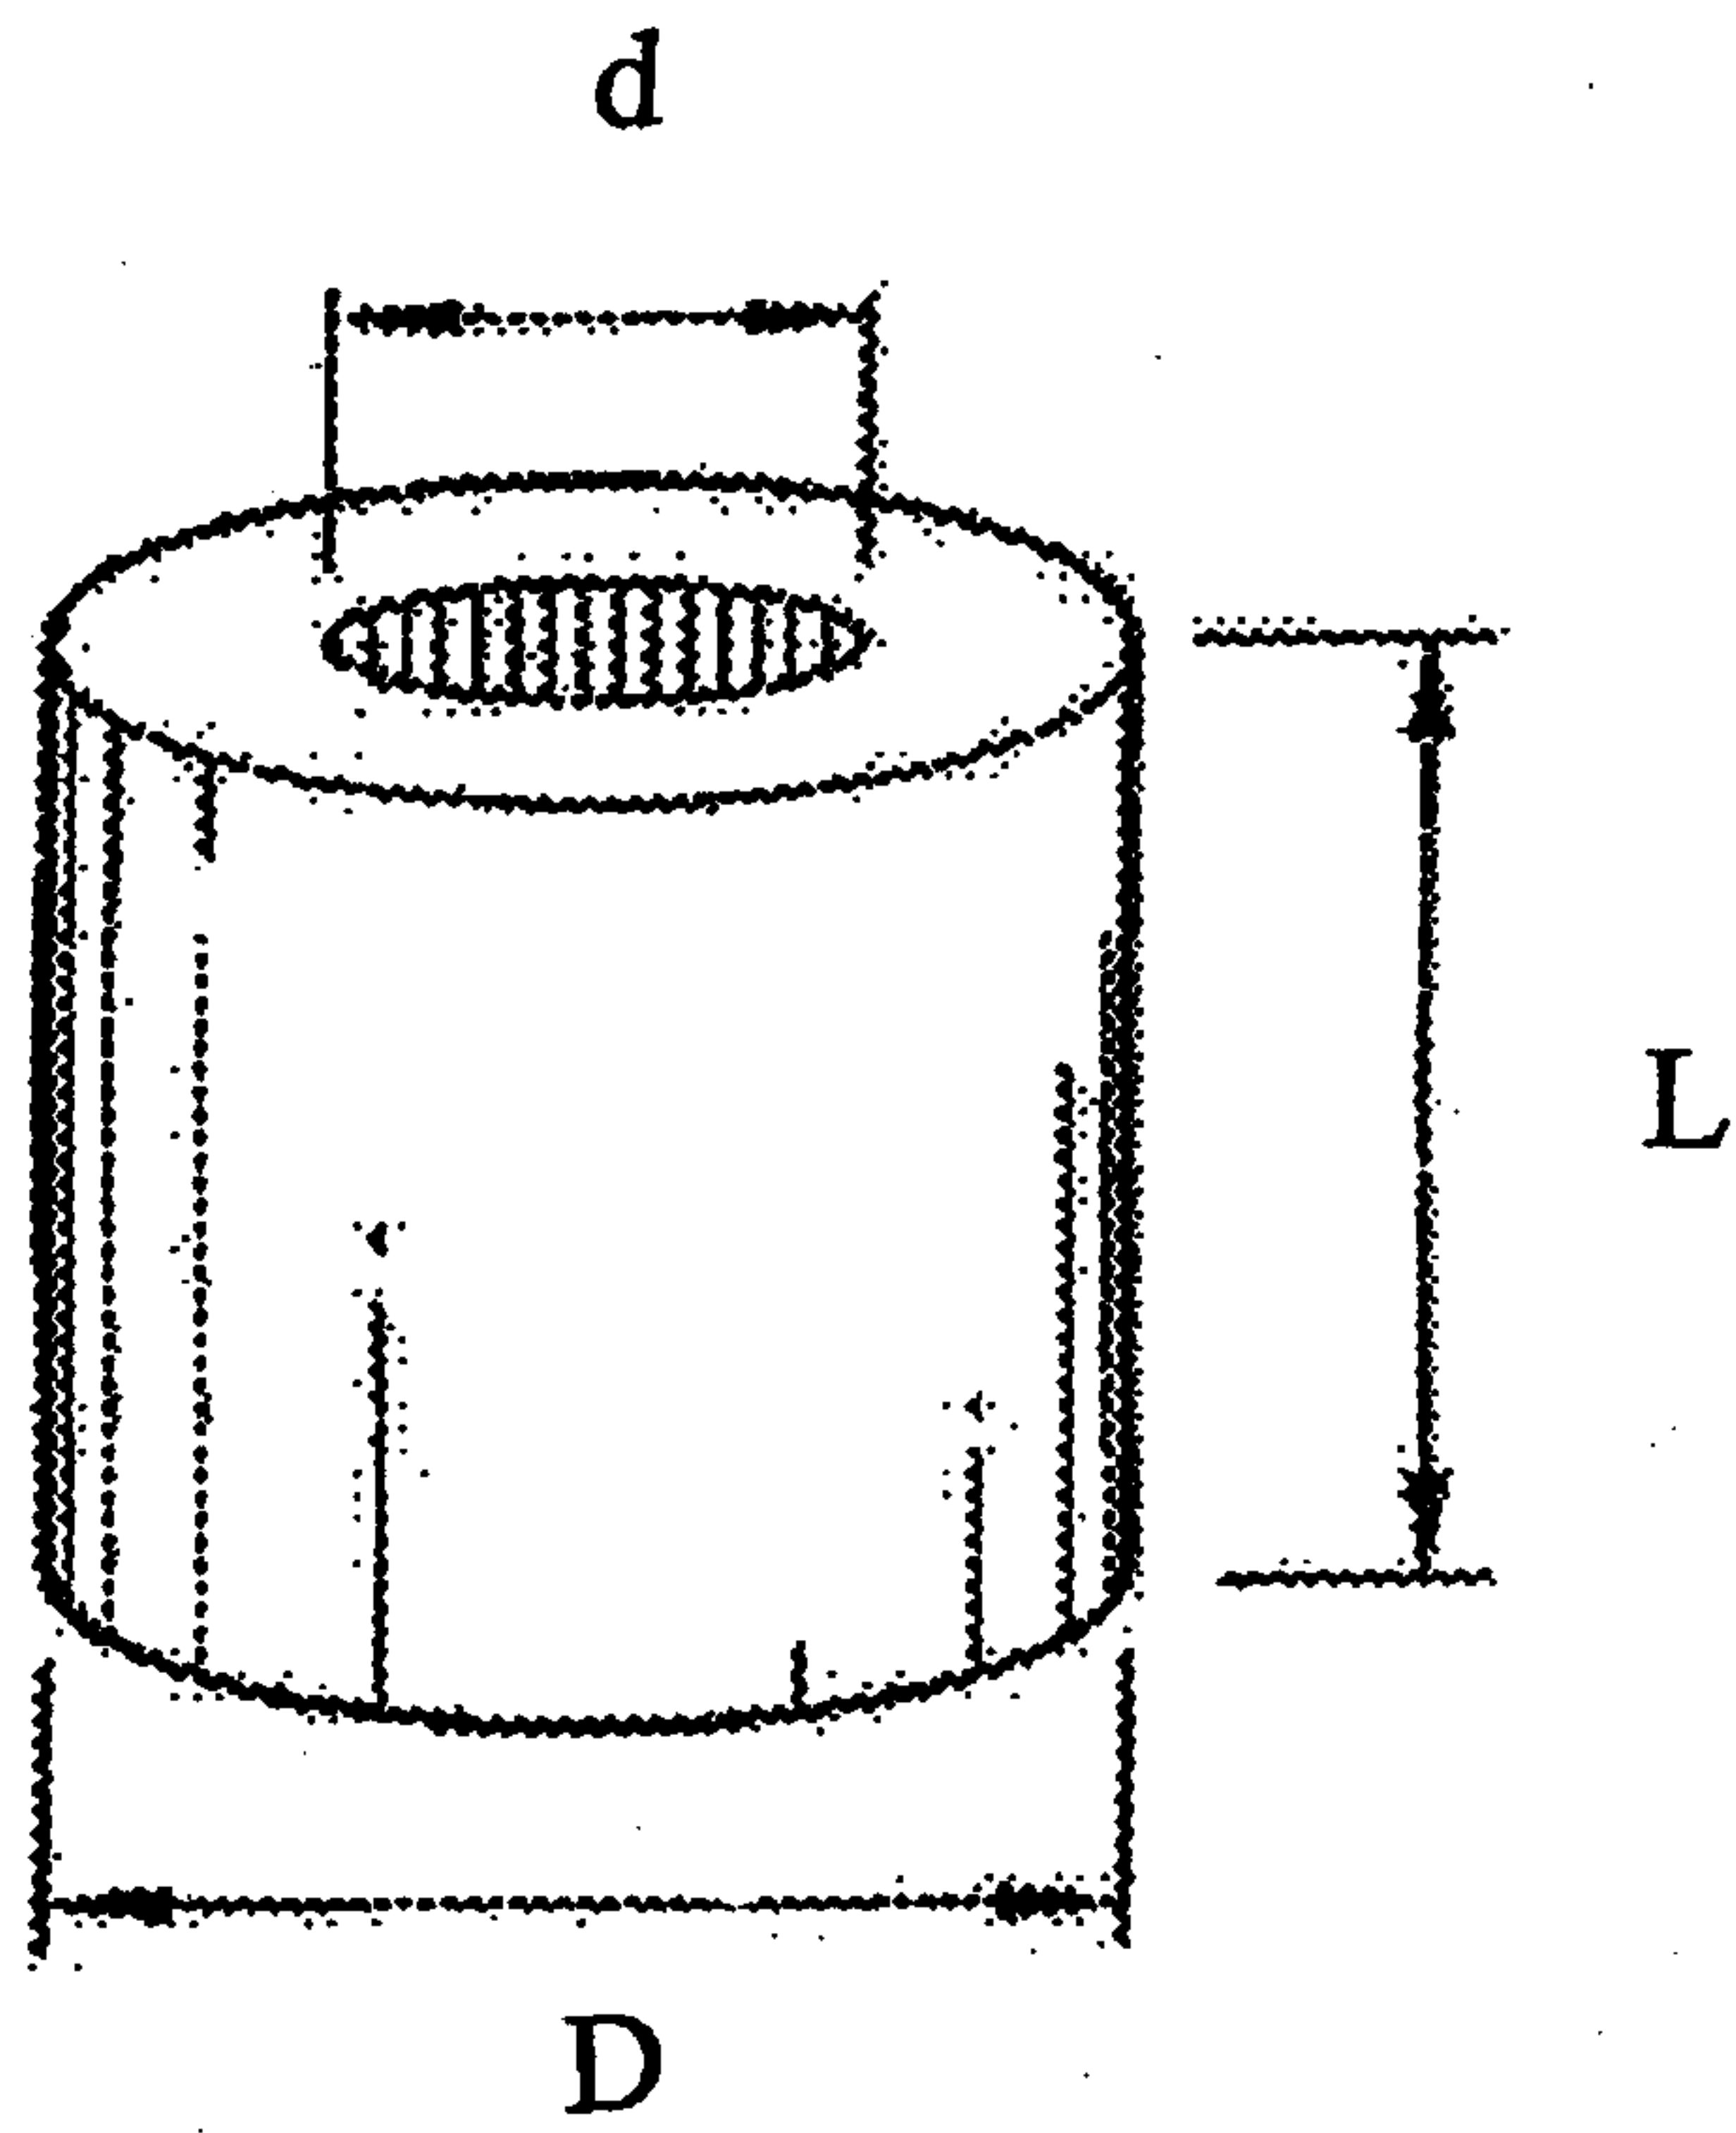

2 / 4

Figure 2


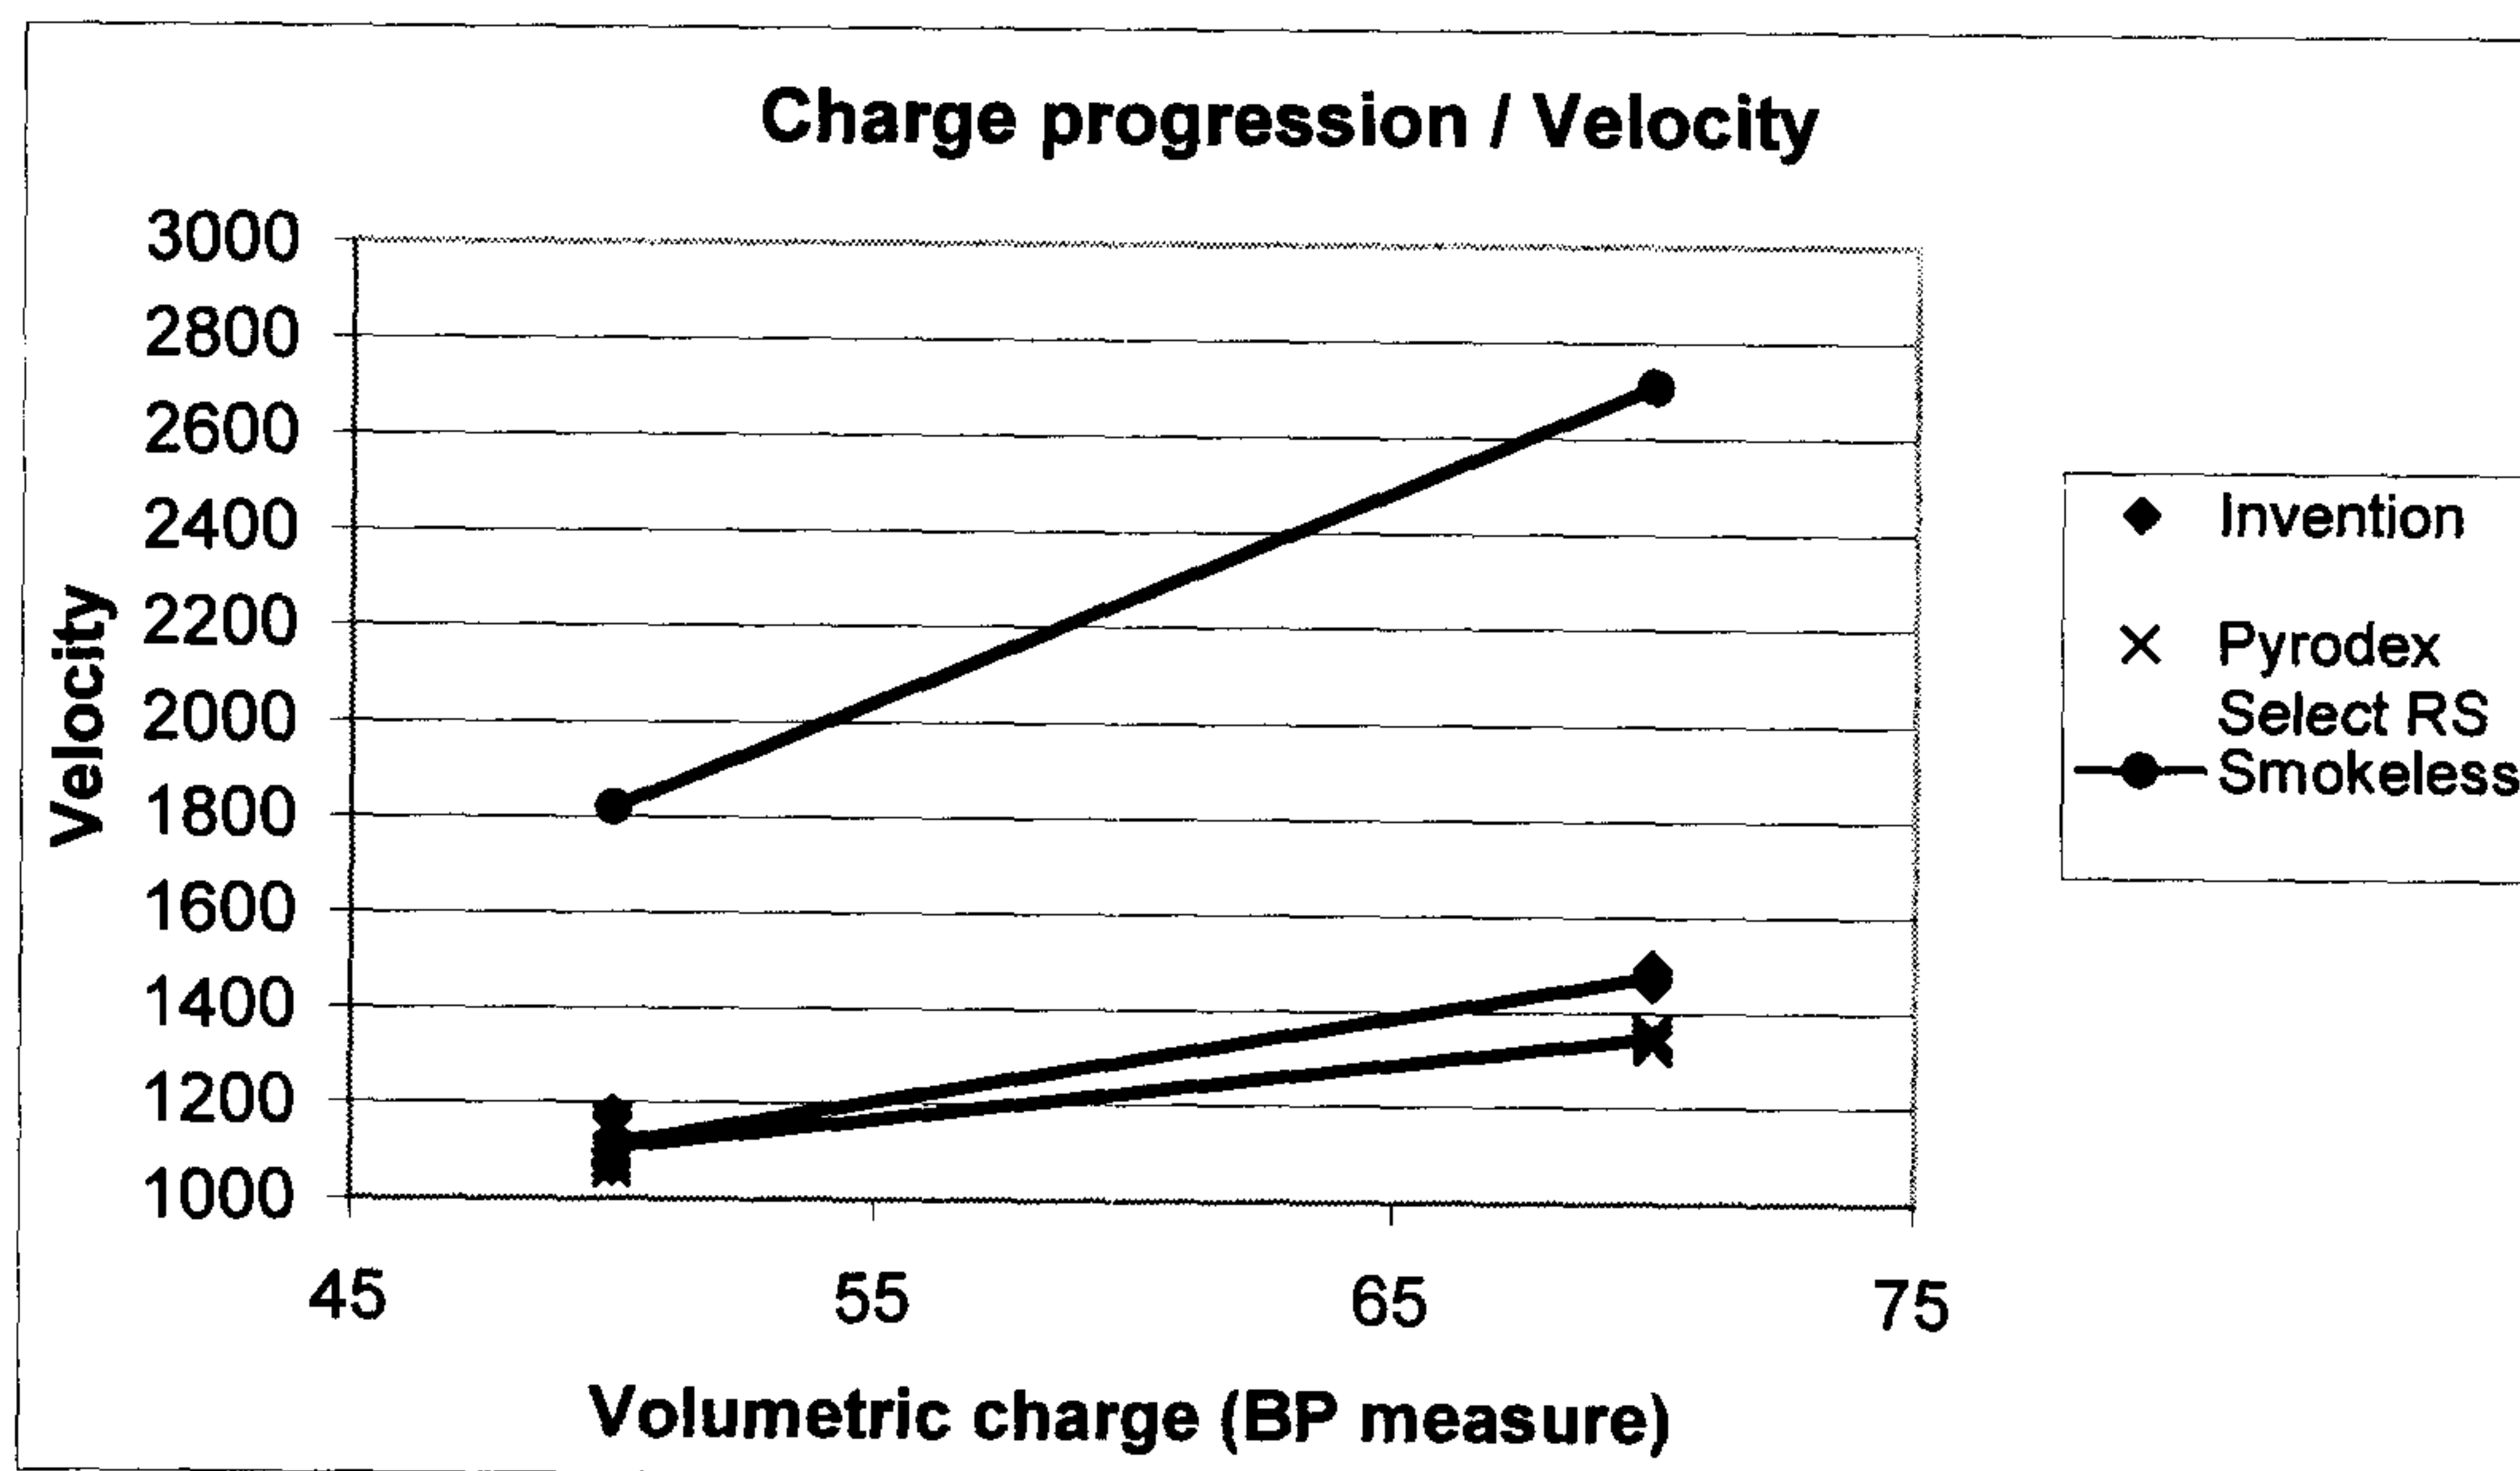


Figure 3

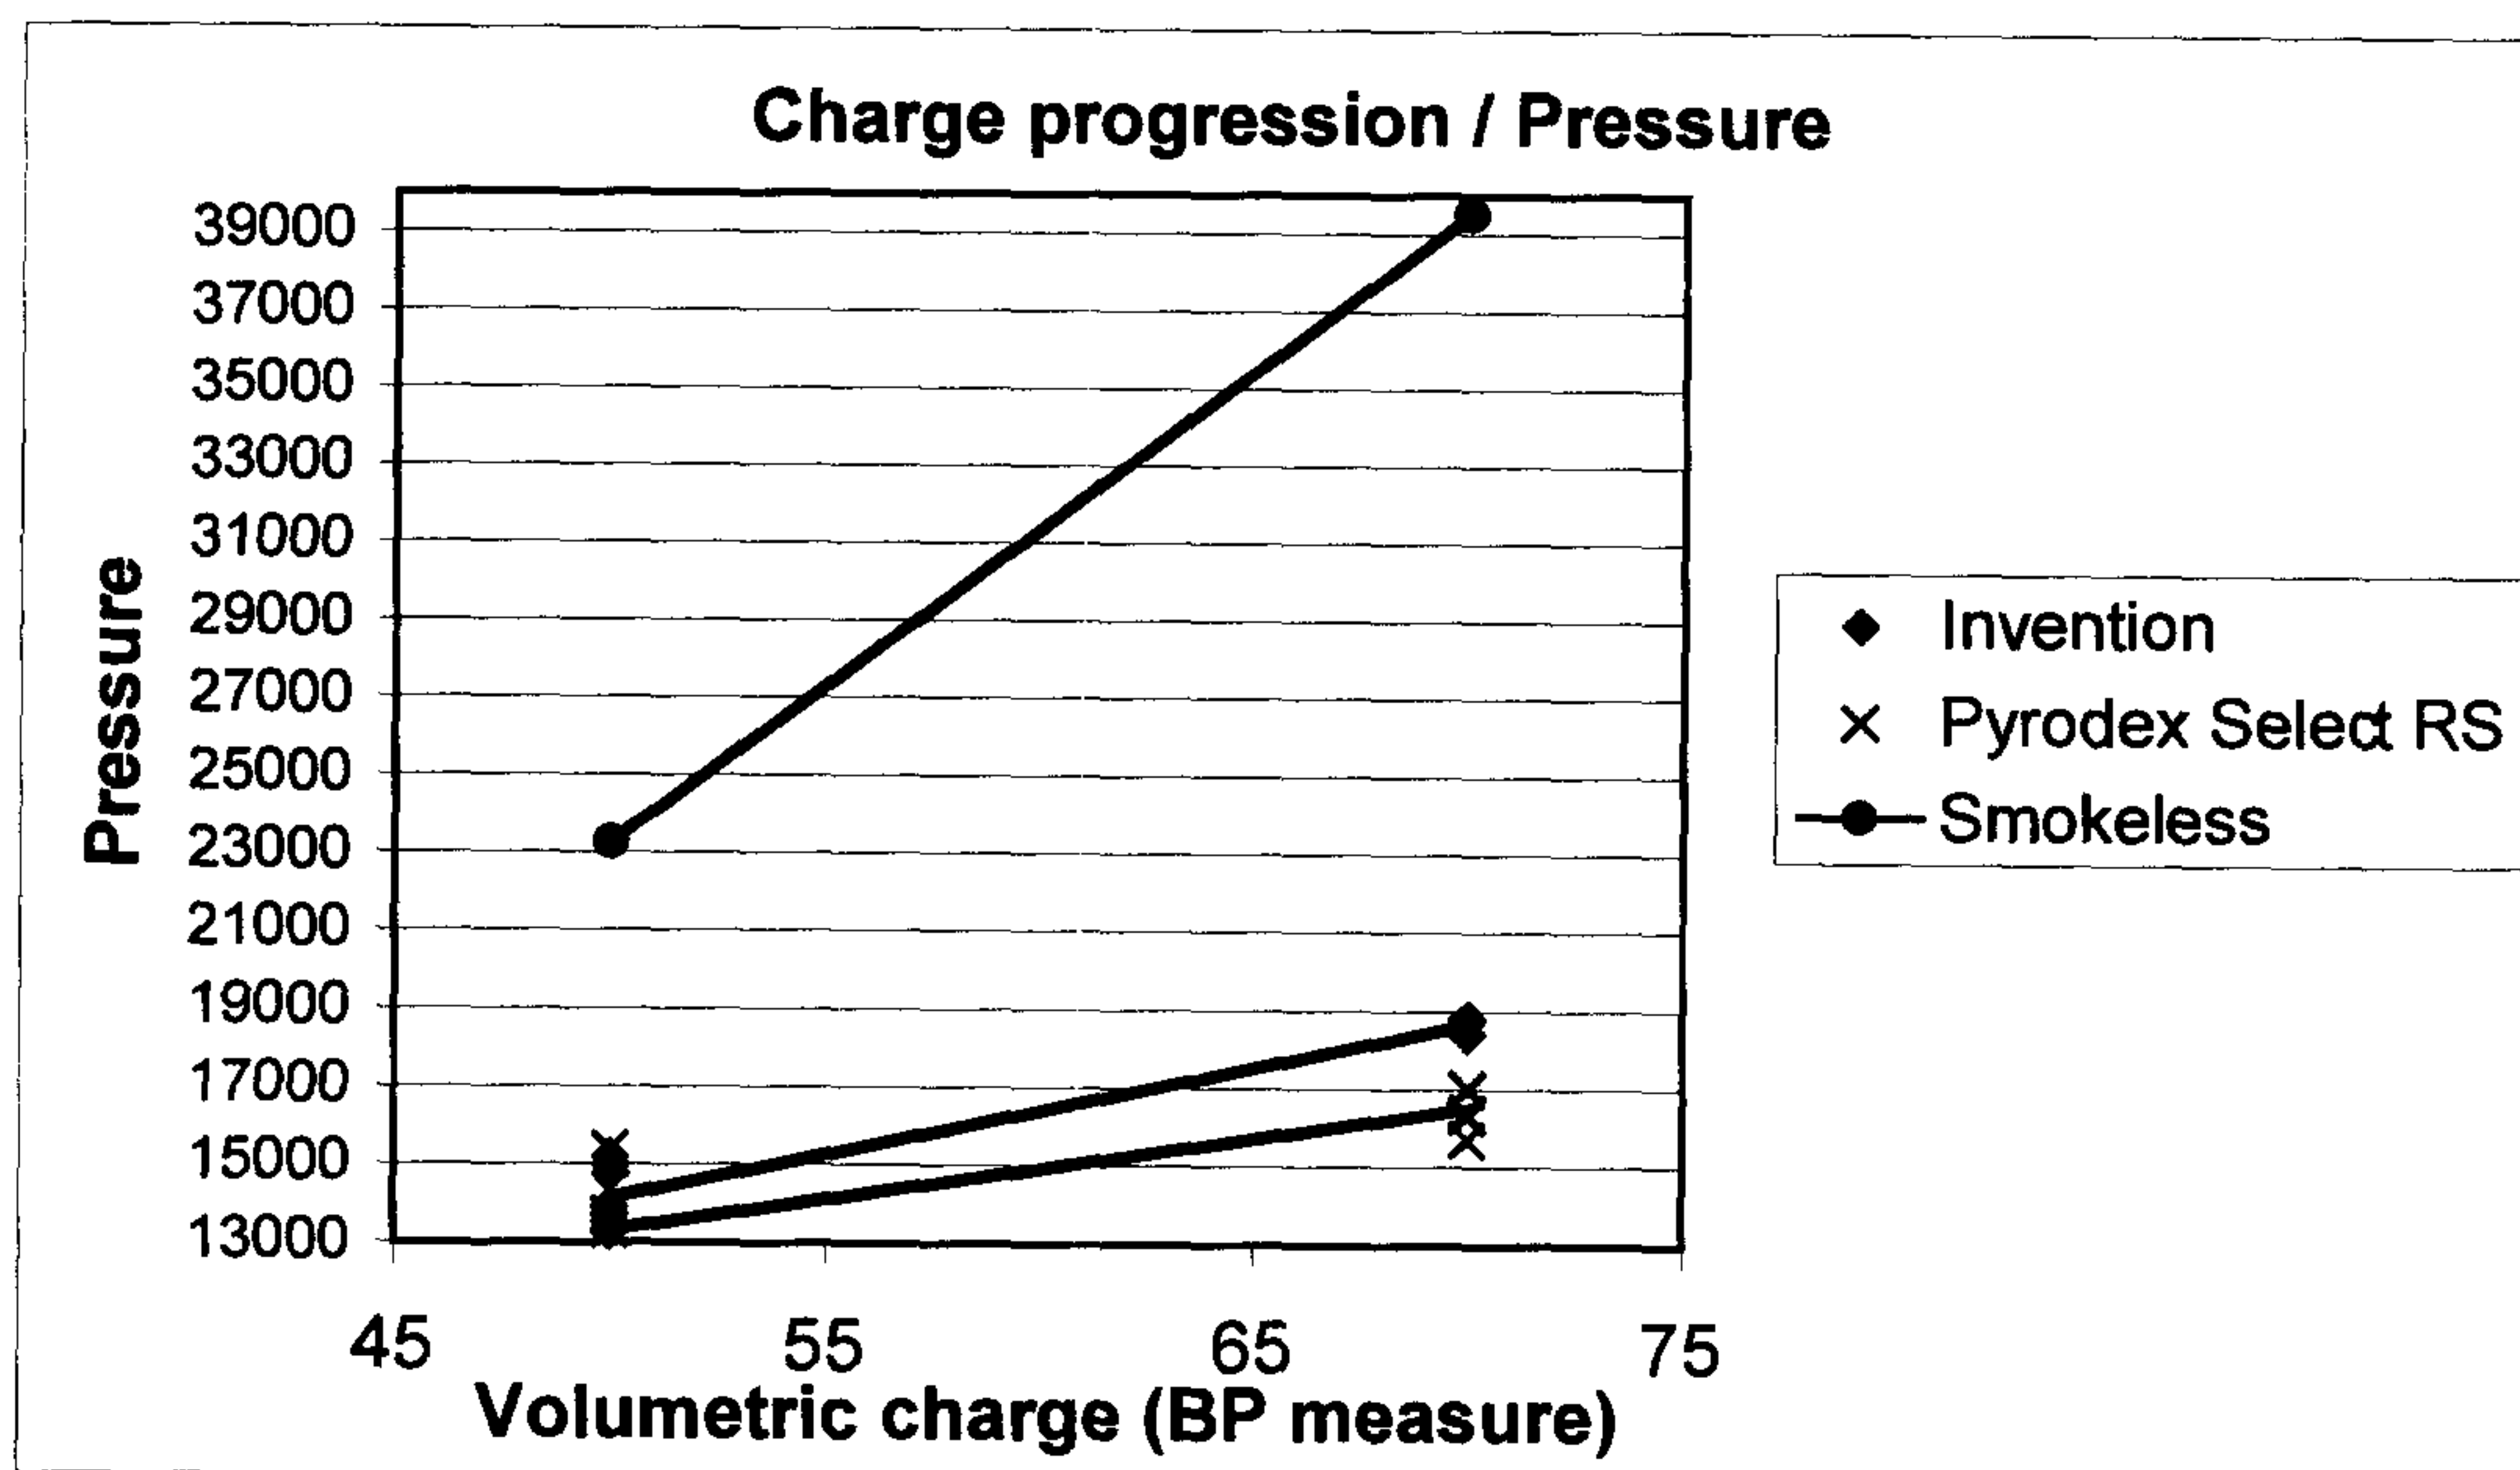

3 / 4

Figure 4



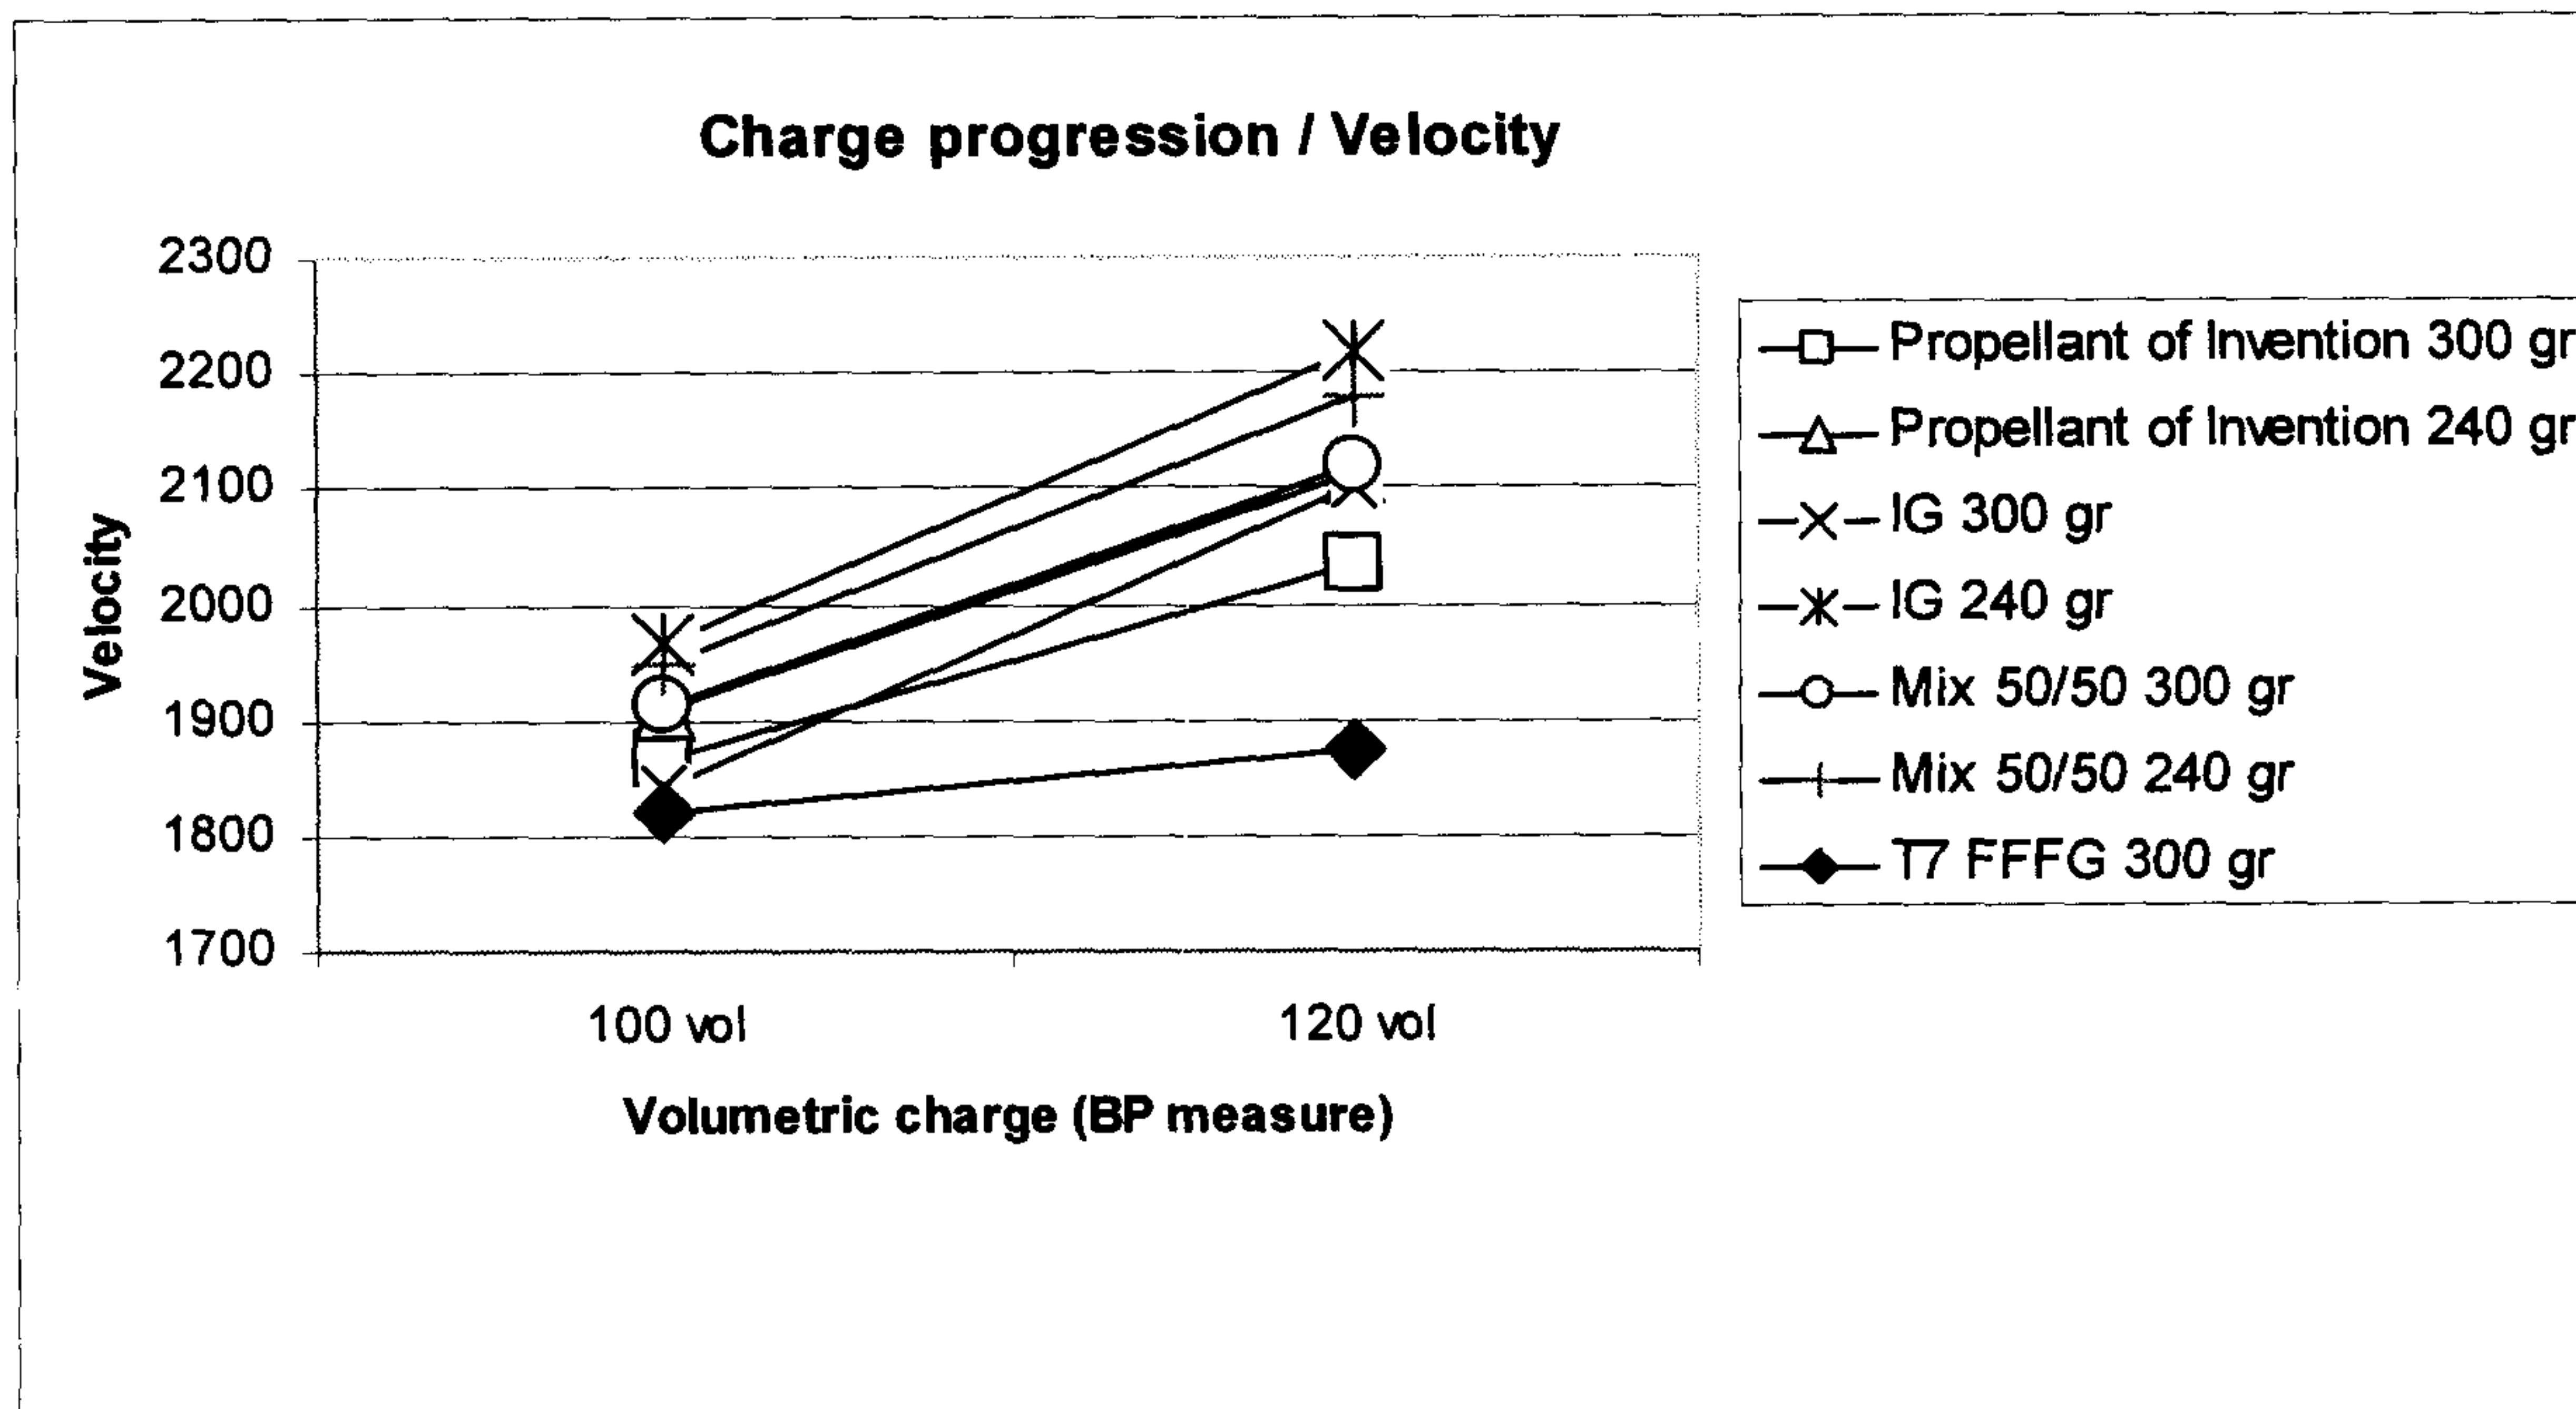


Figure 5

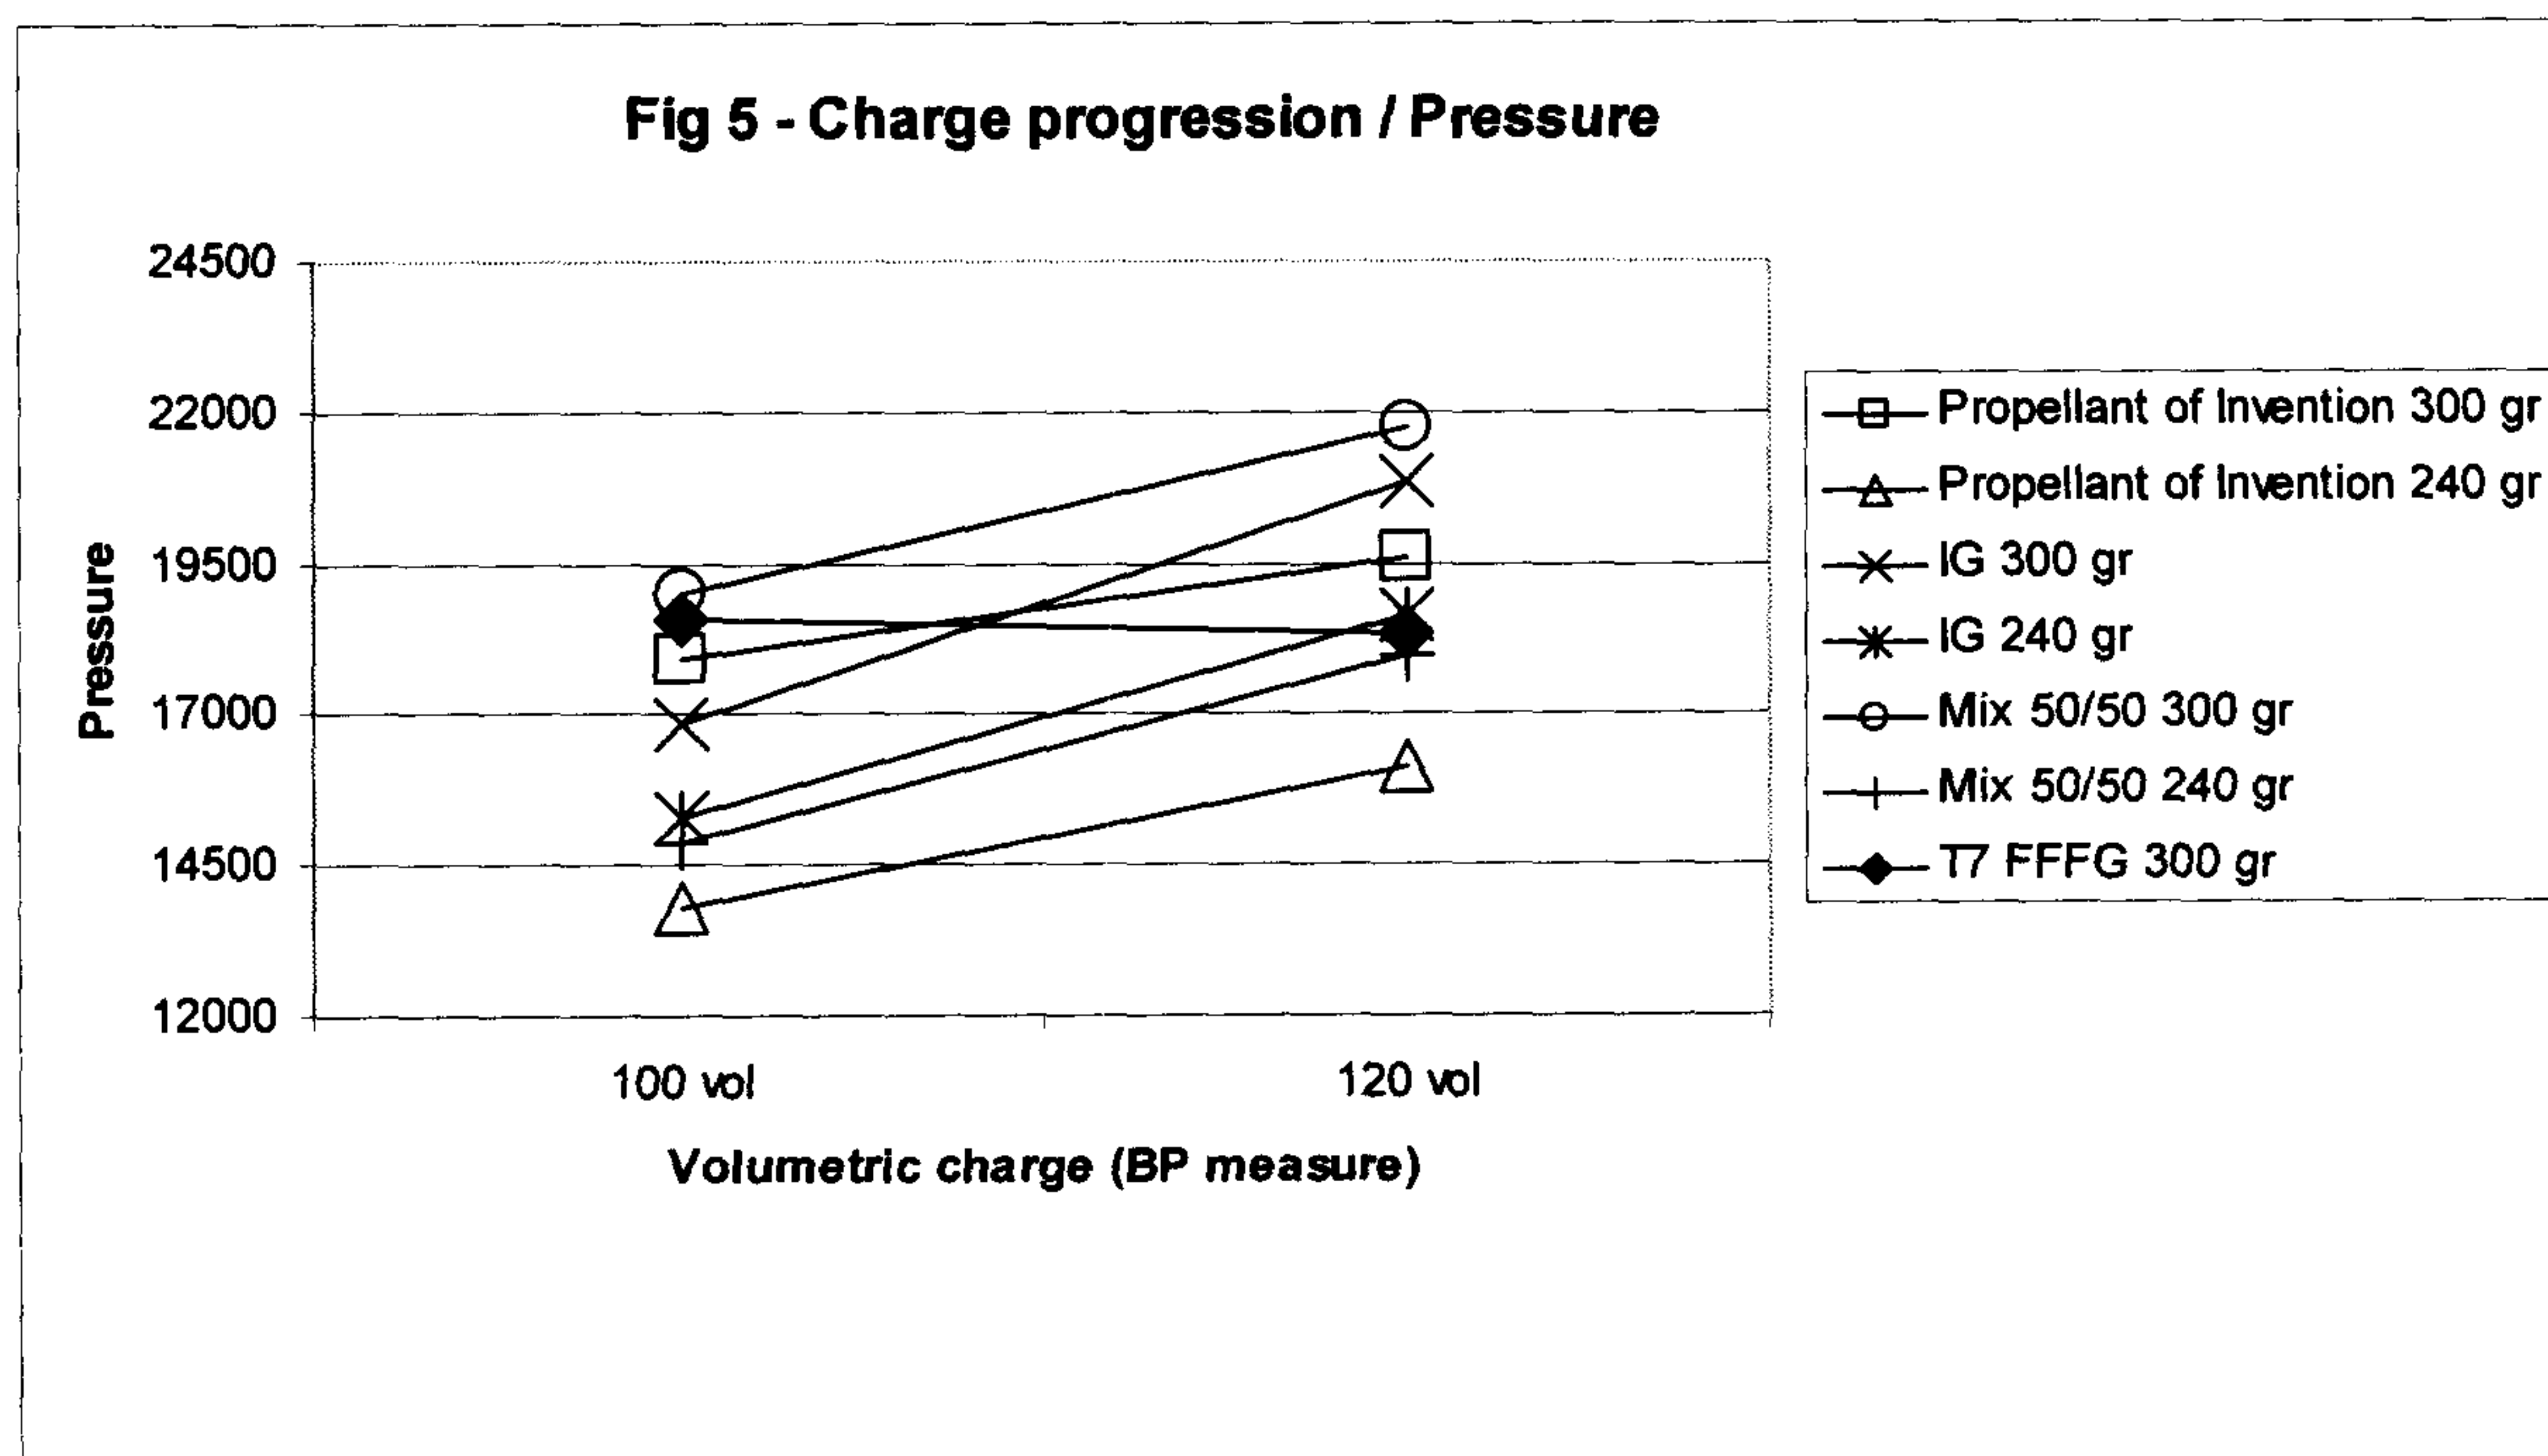


4 / 4

Figure 6

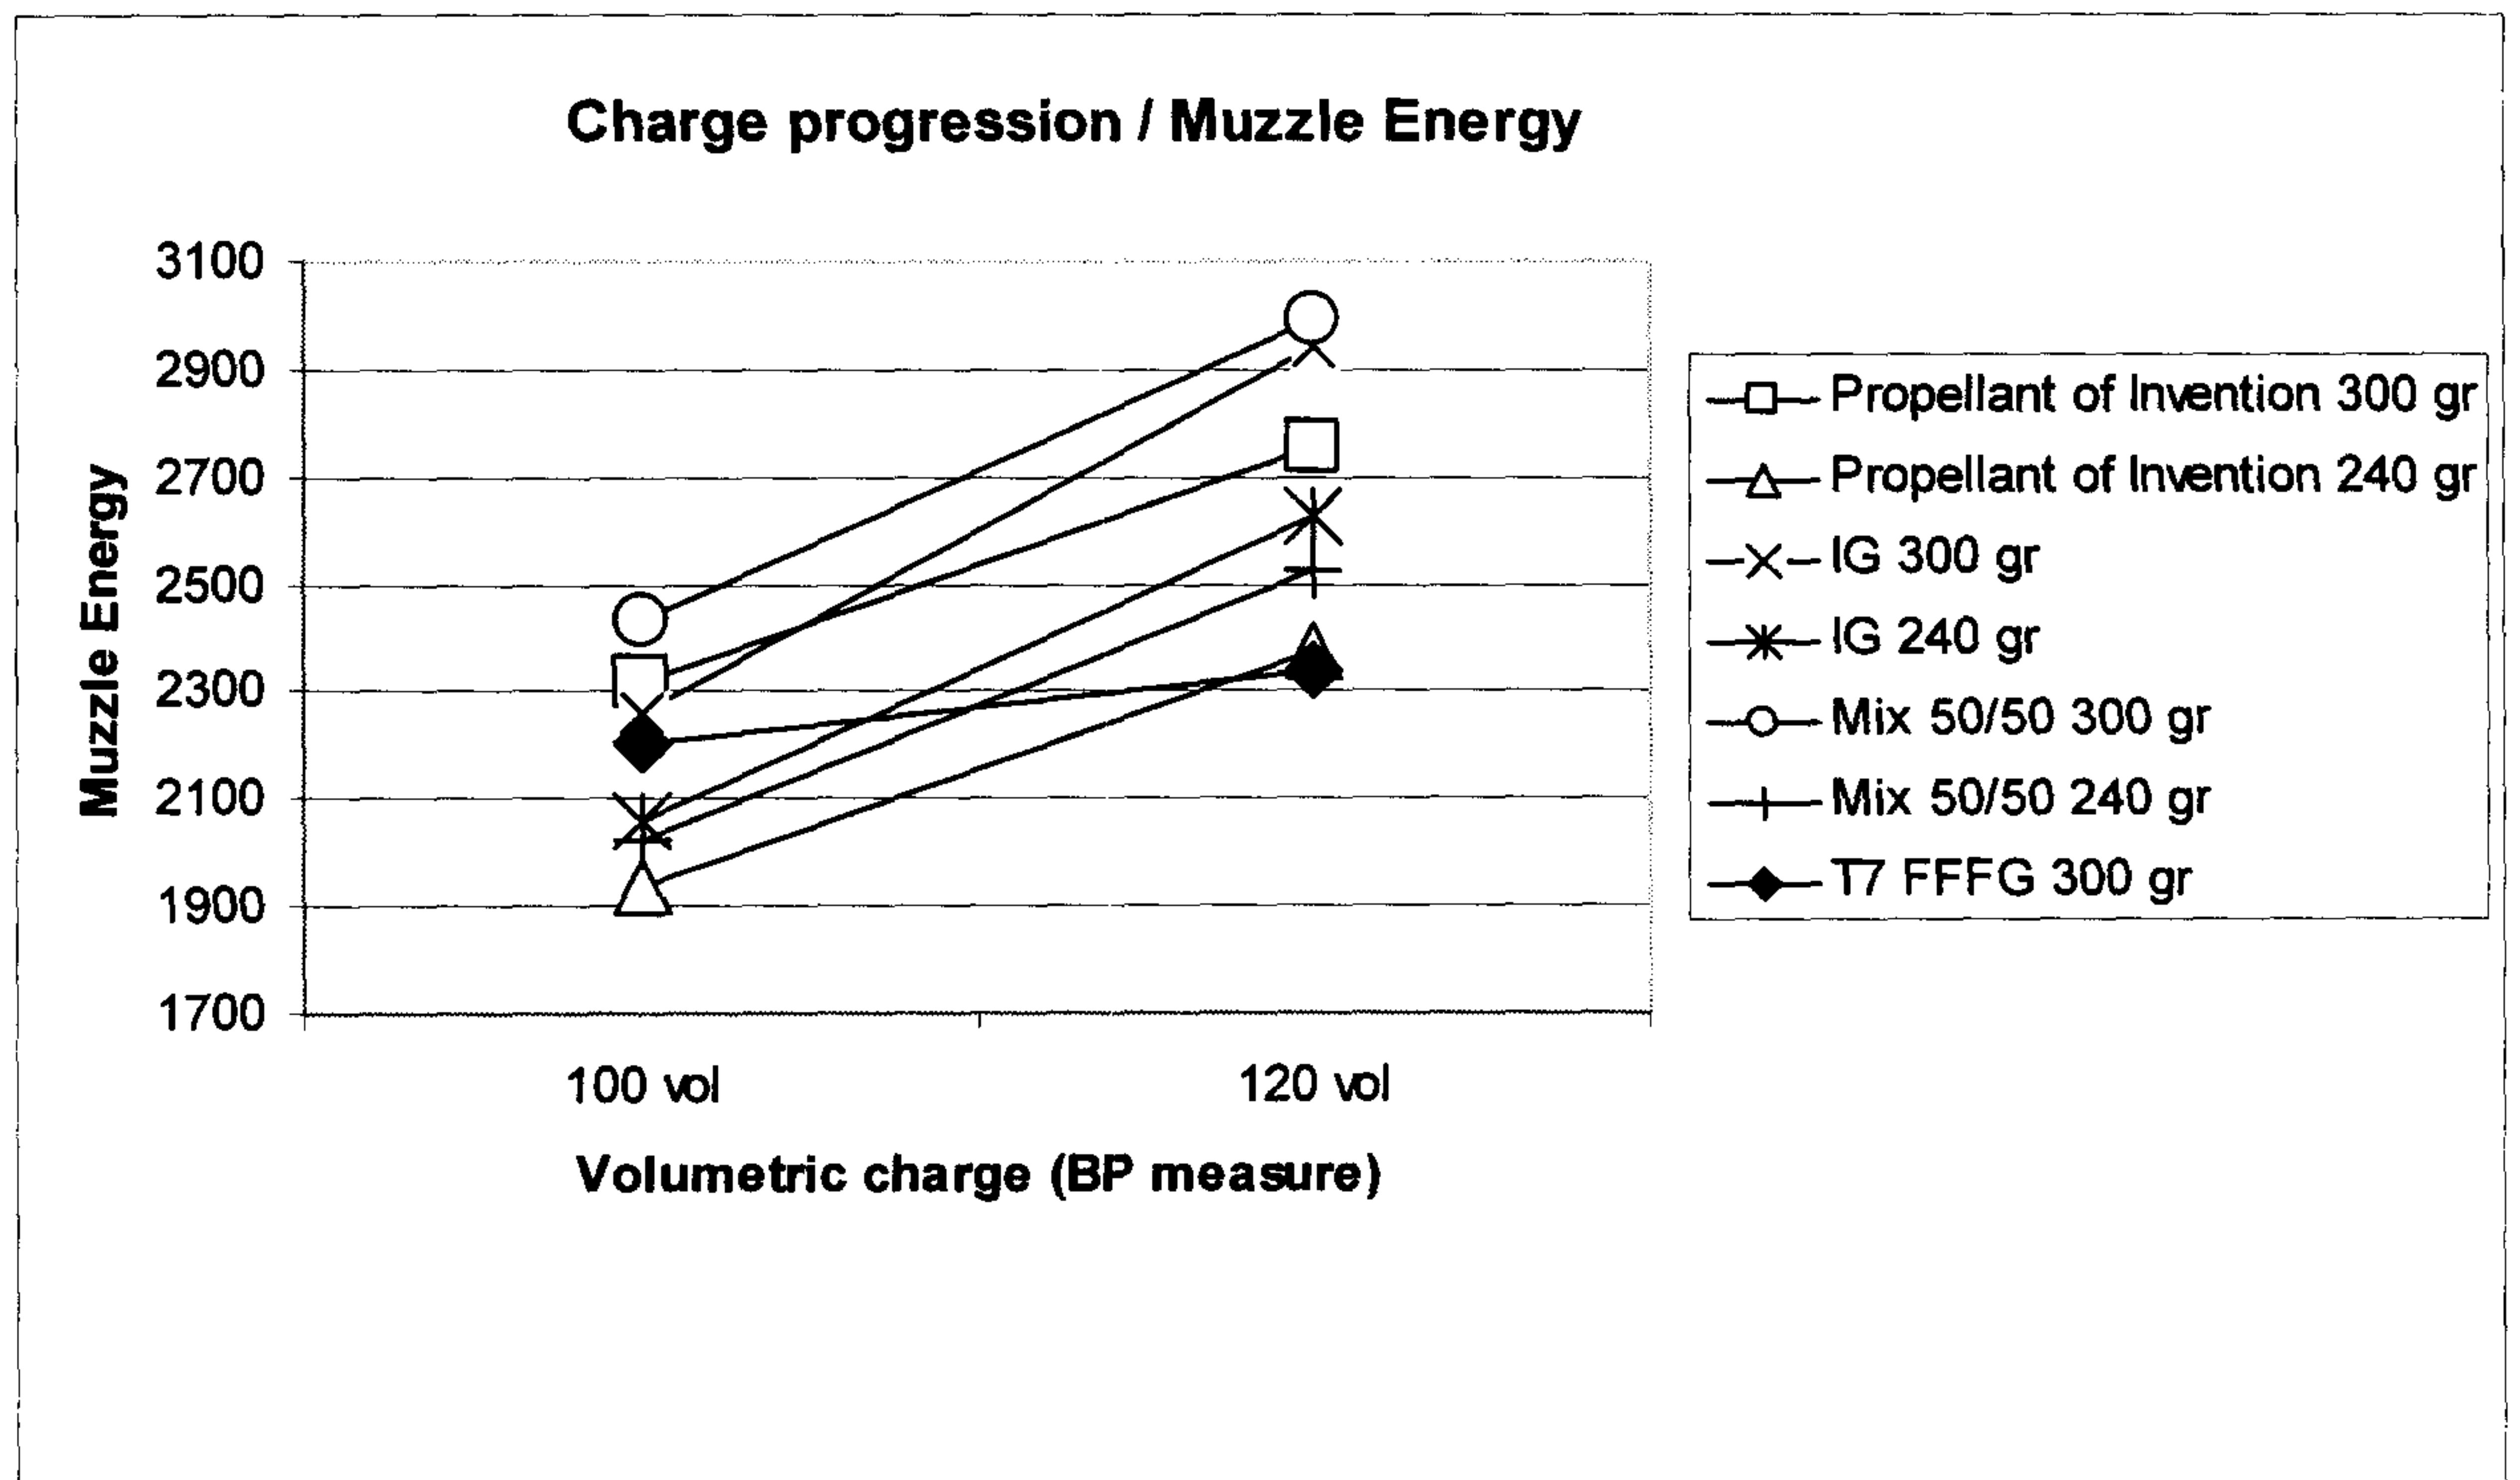

d

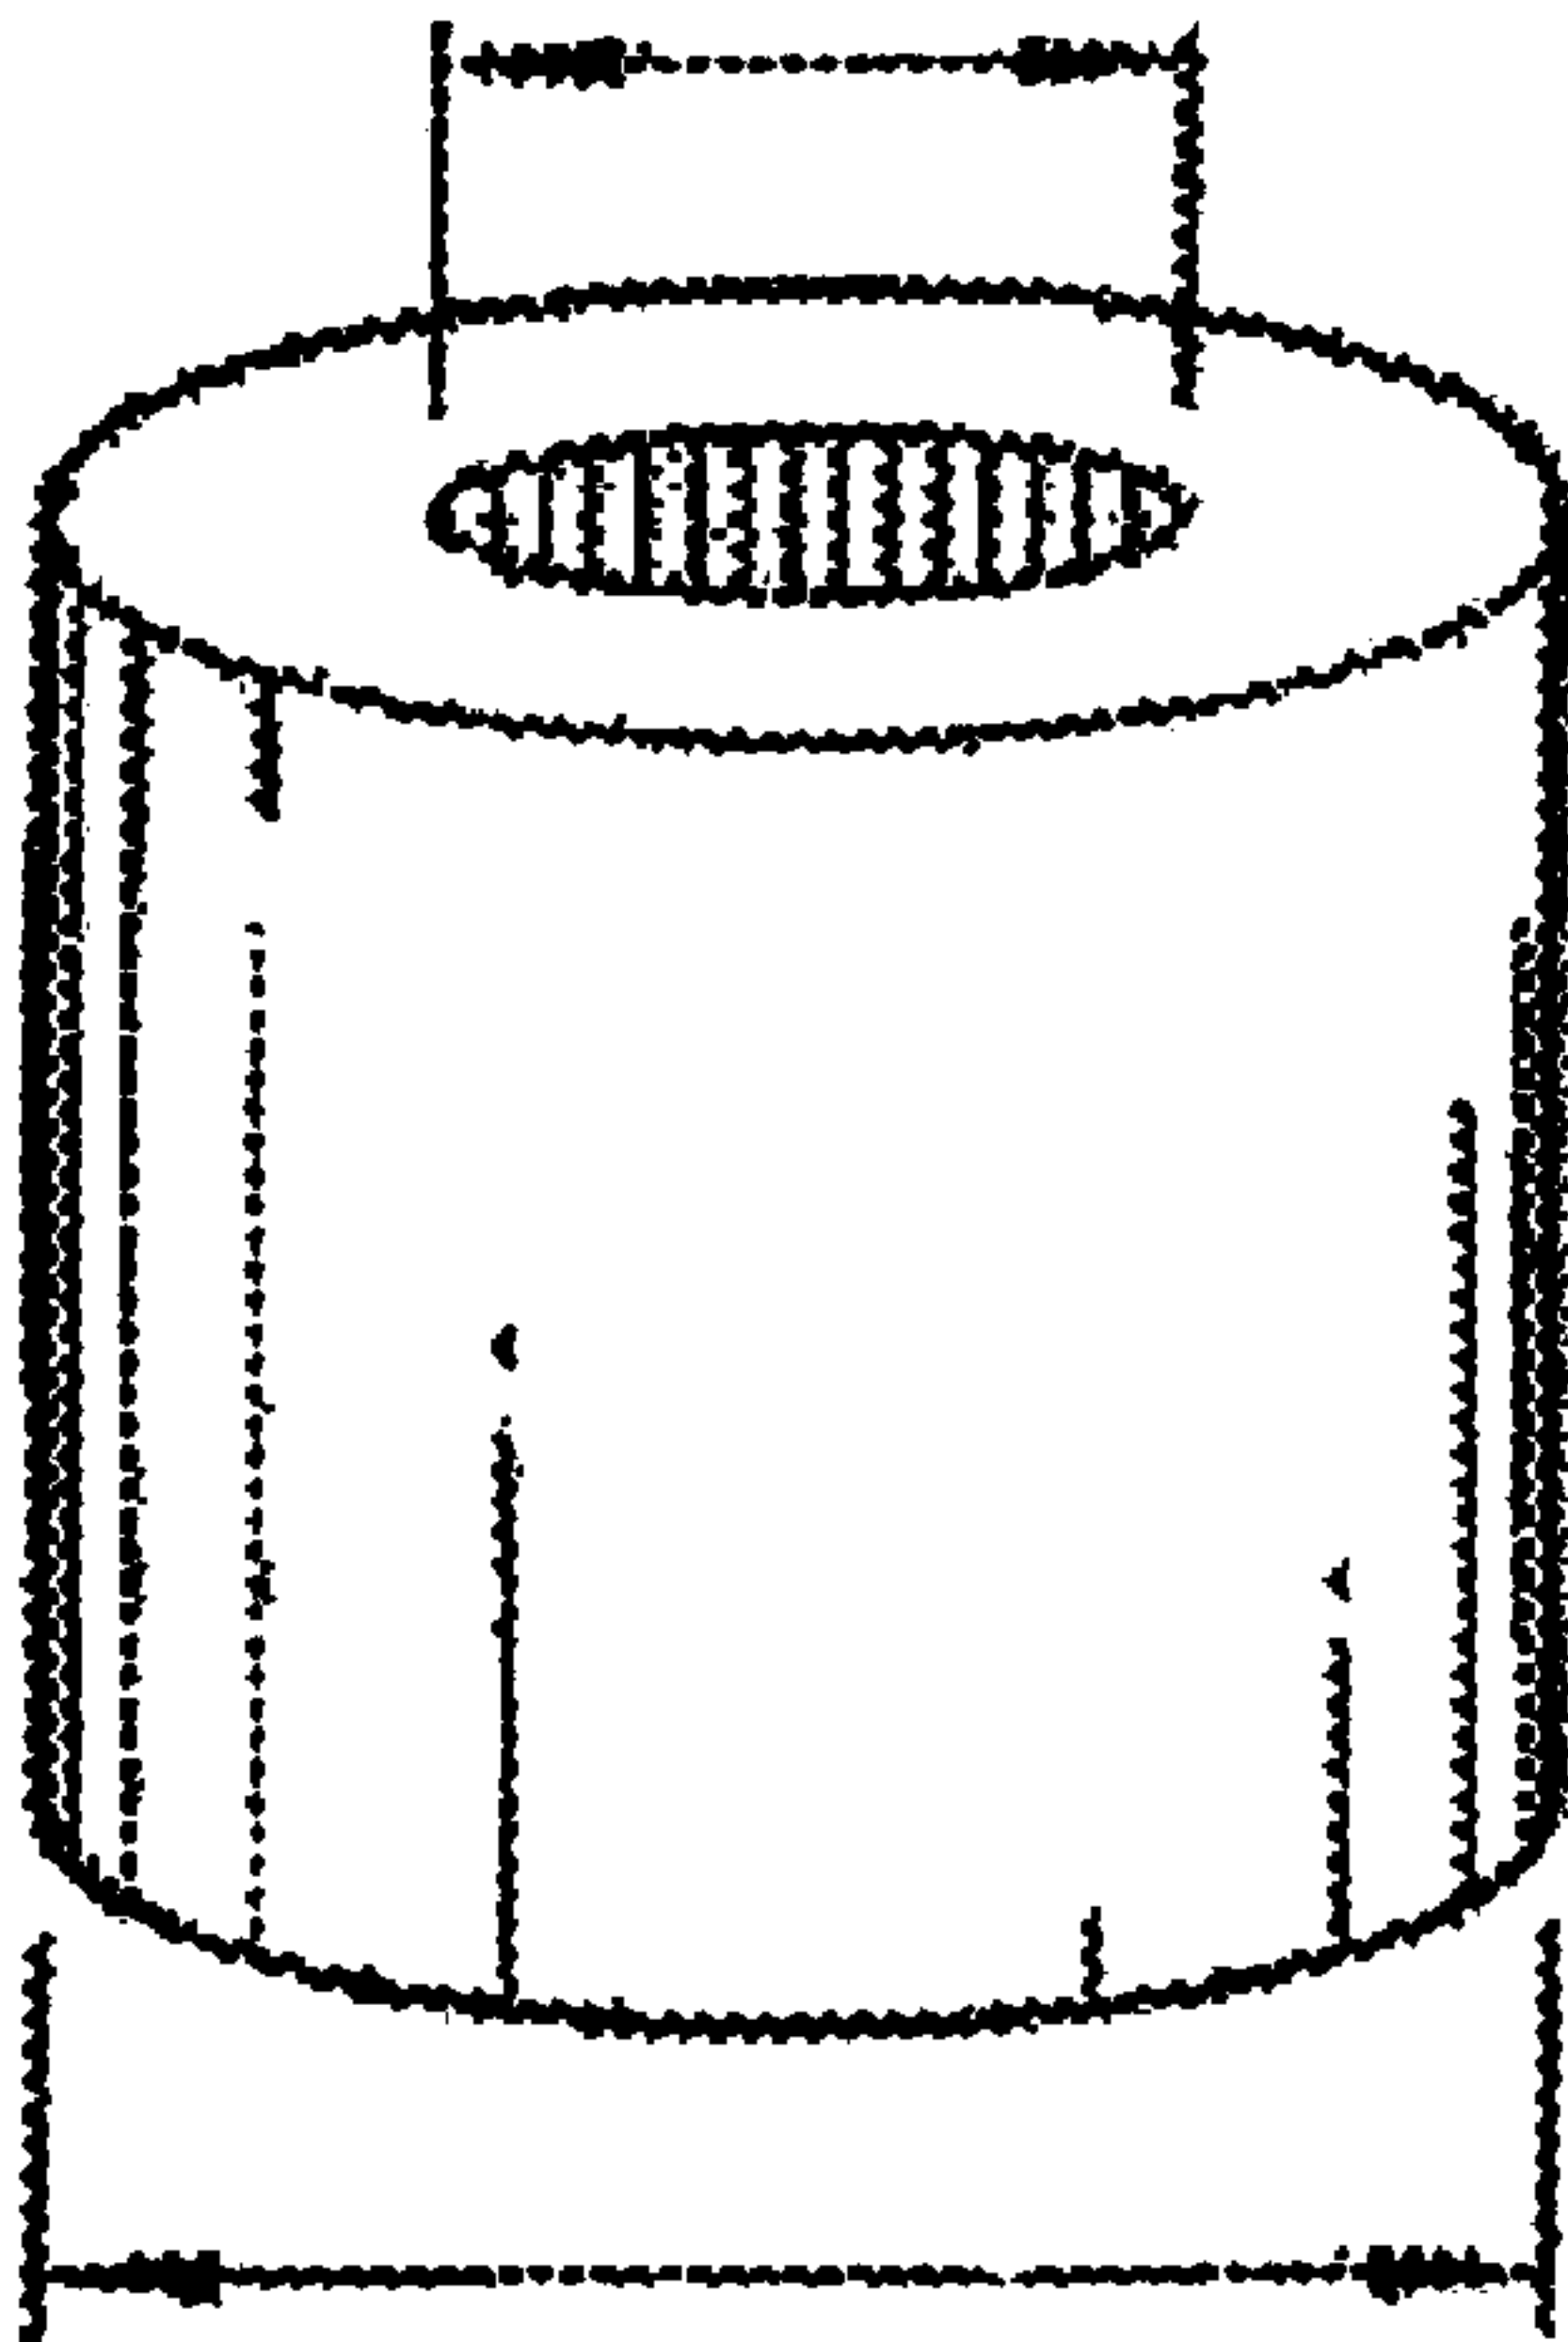

D

L