



(51) International Patent Classification:

H01M 4/88 (2006.01)

H01M 8/1041 (2016.01)

H01M 4/90 (2006.01)

(21) International Application Number:

PCT/US2022/073459

(22) International Filing Date:

06 July 2022 (06.07.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20210100473

14 July 2021 (14.07.2021)

GR

17/497,556

08 October 2021 (08.10.2021)

US

(71) Applicant: SAUDI ARABIAN OIL COMPANY

[SA/SA]; 1 Eastern Avenue, Dhahran, 31311 (SA).

(71) Applicant (for AG only): ARAMCO SERVICES COM-

PANY [US/US]; 1200 Smith Street, Two Allen Building, Houston, Texas 77002 (US).

(72) Inventors: HAMMAD, Ahmad D.; Saudi Aramco, P.O.

Box 13598, Dhahran, 31311 (SA). AMR, Issam T.; Sau-

di Aramco, P.O. Box 6815, Dhahran, 31311 (SA). WANG,

Yuguo; Saudi Aramco, P.O. Box 62, Dhahran, 31311

(SA). LITHOXOOS, Georgios; Saudi Aramco, P.O. Box

62, Dhahran, 31311 (SA). OTHMAN, Rashid M.; Saudi

Aramco, P.O. Box 62, Dhahran, 31311 (SA).

(74) Agent: BRUCE, Carl E. et al.; FISH & RICHARDSON

P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE,

KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU,

LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA,

NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,

RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,

ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: POLYMER ELECTROLYTE MEMBRANE (PEM) FUEL CELLS USING ZEOLITE-TEMPLATED CARBON (ZTC) AS ELECTROCATALYST

(57) Abstract: A polymer electrolyte membrane (PEM) fuel cell assembly, and a method for making the assembly, are provided. An exemplary method includes forming a functionalized zeolite templated carbon (ZTC), including forming a CaX zeolite, depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution including hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC. The method further includes incorporating the functionalized ZTC into electrodes, forming a membrane electrode assembly (MEA), and forming the PEM fuel cell assembly.

POLYMER ELECTROLYTE MEMBRANE (PEM) FUEL CELLS
USING ZEOLITE-TEMPLATED CARBON (ZTC) AS
ELECTROCATALYST

5 Claim of Priority

[0001] This application claims priority to Greek Application No. 20210100473, filed on July 14, 2021, and U.S. Application No. 17/497,556, filed on October 8, 2021, the contents of which are incorporated by reference herein.

10 Technical Field

[0002] The present disclosure is directed to enhancing the performance of polymer electrolyte membrane (PEM) fuel cells by using zeolite-templated carbon (ZTC) as electrocatalyst.

Background

15 [0003] Fuel cells are an alternative energy technology that generates electric energy through the reaction between hydrogen, or a hydrogen-rich fuel source, and oxygen. These devices have high efficiencies relative to traditional combustion engines and low emissions, producing only heat and water as waste products. Each individual fuel cell contains three primary components: two electrodes (anode and cathode) and a conductive electrolyte.

20 [0004] Proton exchange membrane (PEM) fuel cells, also referred to as polymeric electrolyte membrane fuel cells, is a type of fuel cells that has the major advantage of operating at relatively low temperatures, for example, from about 35 °C to about 160 °C. In the case of PEM fuel cells, each electrode is comprised of a porous, high-surface area material impregnated with an electrocatalyst, typically platinum or a platinum alloy. The electrolyte material is a polymeric membrane, which serves as an ionic conductor and electrical insulator, for example, allowing H⁺ ions to move from the anode to the cathode while blocking electron flow from anode to cathode.

25 [0005] For fuel cells operating on pure H₂, hydrogen gas is activated by the catalyst and split into protons and electrons at the anode. The protons are conducted through the electrolyte membrane, and the electrons flow around the membrane, generally through an external circuit, generating an electrical current. The charged ions (H⁺ and e⁻) combine with oxygen at the cathode, producing water and heat.

30

Summary

[0006] An embodiment described in examples herein provides a method for making a polymer electrolyte membrane (PEM) fuel cell assembly. The method includes forming a functionalized zeolite templated carbon (ZTC), comprising forming a CaX zeolite, depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution comprising hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC. The method further includes incorporating the functionalized ZTC into electrodes, forming a membrane electrode assembly (MEA), and forming the PEM fuel cell assembly.

[0007] Another embodiment described in examples herein provides a polymer electrolyte membrane fuel cell. The polymer electrolyte membrane fuel cell includes a membrane electrode assembly (MEA) that includes an anode, a polymer electrolyte membrane (PEM), and a cathode, wherein the anode, the cathode, or both comprises functionalized zeolite templated carbon (ZTC). The PEM fuel cell also includes a housing comprising inlets for fuel and oxidizer and outlets for excess fuel and oxidizer, a power coupled to the anode to provide current from the PEM fuel cell to an external device, and a return line from the external device coupled to the cathode.

[0008] Another embodiment described in examples herein provides a method for making a membrane electrode assembly (MEA). The method includes forming a functionalized zeolite templated carbon (ZTC) by forming a CaX zeolite, depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution comprising hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC. The method includes incorporating the functionalized ZTC into electrodes and forming a membrane electrode assembly.

Brief Description of Drawings

[0009] Figure 1 is a schematic drawing of a PEM fuel cell using ZTC supported catalyst at the interfaces between the anode and the PEM and between the PEM and the cathode.

[0010] Figure 2 is a process flow diagram of a method for making a polymer electrode membrane fuel cell assembly

[0011] Figure 3 is a plot comparing NH_3 TPD (temperature programmed desorption) profiles of CaX and commercial NaX.

5 [0012] Figure 4 is a schematic diagram of the synthesis of the zeolite templated carbon (ZTC)

[0013] Figure 5 is an XRD plot of the results for the different ZTCs formed.

[0014] Figure 6A is a plot of N_2 adsorption/desorption isotherms for the three different ZTCs.

10 [0015] Figure 6B is a plot of the pore size distribution of the ZTCs using an NLDFT algorithm.

[0016] Figure 7 is a plot of the N_2 adsorption-desorption isotherms of zeolite-carbon composite (without zeolite template removal) collected at the different steps of the synthesis process.

15 [0017] Figures 8A to 8C show the N_2 adsorption isotherms and XRD patterns for the representative samples in Table 3.

[0018] Figure 9 is a drawing of a ZTC impregnated with catalyst particles forming a functionalized ZTC.

20 [0019] Figure 10 is a schematic drawing of an MEA with the functionalized ZTC incorporated into the interfaces between the PEM and the anode and the cathode

Detailed Description

[0020] Reducing the noble metal content of polymer electrolyte membrane (PEM) fuel cells is an important goal of research in electrochemistry, materials science and catalysis, as a decrease in metals will lower the costs of fuel cells. The current
25 performance of PEM fuel cells, for example, operating on H_2 or CH_3OH fuel, is limited by slow electrocatalysis at the noble metal site on the anode and the cathode (e.g., activation overpotential), slow proton migration in the PEM (e.g., ohmic overpotential), or slow fuel and O_2 mass transfer at the anode and cathode (e.g.,
30 diffusion overpotential).

[0021] Embodiments described herein provide polymer electrolyte membrane fuel cells that include electrodes using zeolite templated carbon (ZTC) in contact with anodes or cathodes to provide high electrocatalytic activity. The ZTC is used to

support catalytic materials, such as noble metals, among others. As the ZTC, or microporous carbon, has a high surface area the amount of noble metal used as catalyst may be reduced. Further, the high surface area of the ZTC increases the available area for reduction and oxidation over flat surfaces. In addition, the ZTC exhibits high ion conductivity and high electronic conductivity.

[0022] Figure 1 is a schematic drawing of a PEM fuel cell 100 using ZTC supported catalyst at the interfaces 102 between the anode 104 and the PEM 106 and between the PEM 106 and the cathode 108. As used herein, the anode 104, PEM 106, and cathode 108, with the ZTC supported catalyst layers, form a membrane electrode assembly (MEA) 110, which is supported in a housing 112 that includes inlets for fuel 114 and oxidizer 116.

[0023] In the PEM fuel cell 100, the fuel 114, such as hydrogen 118, is introduced to the anode 104. The hydrogen 118 reacts at the anode to release electrons in the half-cell reaction shown as RXN 1.



The electrons flow from the anode 104, for example, through a current collector, to an external circuit 120 where they are used to power the external circuit 120. Hydrogen ions, H^+ , are conducted through the PEM 106 to the cathode 108. Excess fuel 122 is released from the housing 112 through an outlet.

[0024] The oxidizer 116, for example air, includes oxygen 124. The oxygen 124 reacts with hydrogen ions conducted through the PEM 106 and electrons returned from the external circuit 120, according to the half-cell reaction shown as RXN 2.



The H_2O 126 formed at the cathode 108, and any excess amounts of the oxidizer 116 exit the housing 112 through an outlet, with inert gases, such as nitrogen. The catalyst supported on the functionalized ZTC located at the interfaces 102, lowers the activation energy of the half-cell reactions. As the ZTC has a very high surface area, less catalyst may be used than in other PEM fuel cells.

[0025] Figure 2 is a process flow diagram of a method 200 for making a polymer electrode membrane fuel cell assembly. The method 200 begins at block 202 with the ion-exchanging of an NaX zeolite with Ca^{2+} ions to form a CaX zeolite. Although zeolite X is described in detail herein, other zeolites may be used in embodiments, including, for example, zeolite Y, or zeolite BAU, among others. The selection of the

zeolite, and any treatments used, such as ion exchange, may be based on the temperature stability and pore size of the zeolite.

[0026] At block 204, carbon is deposited in the zeolite to form a carbon/zeolite composite. In various embodiments, a chemical vapor deposition (CVD) process to deposit carbon in the zeolite by exposing the zeolite to an organic precursor gas at an elevated temperature, which deposits carbon in the pores of the zeolite. After deposition, the zeolite containing the deposited carbon is heated to carbonize the deposited carbon, forming a carbon/zeolite composite. In embodiments described herein, carbon is deposited in CaX zeolite by exposing the CaX zeolite to propylene, ethanol, or acetylene in mixtures with helium. In various embodiments, temperatures for the deposition and heat treatment range are between about 820 K and 1125 K. In some embodiments, deposition temperatures are between about 820 K and about 975 K. In one embodiment, the deposition temperature is about 823 K. In another embodiment, the deposition temperature is about 873 K.

[0027] At block 206 the carbon/zeolite composite is treated with an aqueous acid solution that includes HF to remove the CaX template forming zeolite template carbon (ZTC). In various embodiments, the aqueous acid solution includes HF and HCl, in approximately equal amounts. In various embodiments, the aqueous acid solution includes about 2 wt. % of each of HF and HCl, about 3 wt. % of each of HF and HCl, or about 4 wt. % of each of HF and HCl.

[0028] At block 208, the ZTC is treated to add catalyst sites, forming functionalized ZTC. To serve as electrode or electro catalyst, an oxide, a metal or a metal oxide is added to the ZTC. This can be performed by a number of techniques known in the art, including wet impregnation, sputtering, sputter-deposition, doping, chemical functionalization, thermal coating or electrochemical coating, among others. In some embodiments, this is performed by an incipient wetness technique.

[0029] Incipient wetness impregnation (IW or IWI), also called capillary impregnation or dry impregnation, is a commonly used technique for the synthesis of heterogeneous catalysts. Typically, the active metal precursor is dissolved in an aqueous or organic solution. Then the metal-containing solution is added to a catalyst support containing the same pore volume as the volume of the solution that was added. Capillary action draws the solution into the pores. Solution added in excess of the support pore volume causes the solution transport to change from a capillary action

process to a diffusion process, which is much slower. The catalyst can then be dried and calcined to drive off the volatile components within the solution, depositing the metal on the catalyst surface. The maximum loading is limited by the solubility of the precursor in the solution. The concentration profile of the impregnated compound depends on the mass transfer conditions within the pores during impregnation and drying.

[0030] At block 210, the functionalized ZTC is incorporated into electrodes. This may be performed by impregnation, suction impregnation, chemical crosslinking, or using a conducting adhesive. For example, in an embodiment the functionalized ZTC is adhered to the electrodes using ion conductive adhesive formed from a perfluorinated resin binder and isopropyl alcohol.

[0031] In other embodiments, an electrode can be prepared including a metal and metal oxide anode by metal sputtering. The functionalized ZTC can be introduced into the sputtering chamber. A thin metal film can be sputter-deposited first, and a second layer of metal oxide including the functionalized ZTC can be deposited over the metal film. In various embodiments, a magnetron sputtering system is used for the depositions. High purity argon and oxygen can be used as sputtering and reactive gas, respectively.

[0032] At block 212, a polymer electrolyte membrane assembly is formed. This may be performed by hot pressing the electrodes that incorporate the functionalized ZTC to the PEM, forming a single block. In some embodiments, current collectors are formed into the block with the electrodes and PEM. Other techniques may be used to make the polymer electrolyte membrane assembly, including, for example, using ion conductive adhesives to adhere the parts to each other.

[0033] At block 214, a PEM fuel cell assembly is formed. In various embodiments, this is performed by mounting the membrane electrode assembly (MEA) in a housing, which has inlets and outlets for fuel and oxidizer flows. The MEA is sealed to the housing, for example, using a high temperature sealant such as a silicone adhesive, among others. This prevents gases from the fuel side from contacting the oxidant side. In some embodiments, a number of housing units are stacked to increase current, voltage, or both.

[0034] Examples

[0035] Electrode preparation steps:

[0036] Synthesis of Zeolite-templated Carbon (ZTC) on the electrolyte (ionic conductors).

[0037] Carbon Replication of CaX zeolite

[0038] CaX zeolite was prepared by ion-exchanging NaX (commercial zeolite, not ultra-large crystal) with Ca^{2+} by stirring 10 g sample in 200 mL of 0.32 M $\text{Ca}(\text{NO}_3)_2$ solution for 4 h. Ca^{2+} exchange can generate acid sites in zeolite which catalyze the carbon deposition inside zeolite micropores and also increases the thermal stability of zeolite template during the conditions used for the CVD.

[0039] Figure 3 is a plot 300 comparing NH_3 TPD (Temperature Programmed Desorption) profiles of CaX 302 and commercial NaX 304. The plot 300 shows that the ion-exchange of an NaX zeolite with Ca^{2+} can generate acidity. This helps with the selective carbon deposition in micropores and enhances the thermal stability of zeolite template.

[0040] In the plot 300, the CaX 302 shows two desorption peaks, at 473 and 653 K, indicating the presence of two types of acid sites. In contrast, the NaX tool for does not show any desorption profile, indicating no acidity.

[0041] As shown in Table 1, the CaX zeolite also has a higher thermal stability than NaX, wherein the crystallinity does not change at temperatures up to 973 K. The thermal stability is useful, as the carbon deposition condition uses a chemical vapor deposition (CVD) at temperatures of 873 ~ 973 K.

[0042] Table 1. Thermo stability of NaX, CaX zeolites

Sample	$A_z^{[1]}$	$T_{\text{init}}^{[2]}$ (K)	$T_{0.5}^{[3]}$ (K)
NaX	1	933	1043
CaX	0.93	983	1153

^[1] Equivalent fraction of exchange cation in zeolite.

^[2] Temperature at which structural degradation is first observed from the X-ray powder pattern, in K.

^[3] Temperature at which the structure is 50 % decomposed, in K.

[0043] Carbon Deposition in Zeolites

[0044] The carbon deposition in the X zeolites was carried out in a conventional plug-flow reactor. Typically, 1 g NaX or CaX sample was placed in plug flow reactor and the temperature was increased to a specified temperature under He flow. For example, a temperature range of about 823 K to about 973 K is suitable to selectively deposit carbon in zeolite micropores. In some embodiments using NaX and propylene the temperature is 973 K. After the temperature was allowed to stabilize for 30 min, the gas was switched to an organic precursor gas. Three different organic precursor gases were used for the carbon deposition. The organic precursor gases were propylene, ethanol, and acetylene with respective kinetic diameters of 0.45, 0.45 and 0.33 nm. These were used in mixtures, with the propylene added as a 2% propylene/He (200 mL/min·g) mixture. The ethanol was added as a helium gas flow (200 mL/min·g) that was saturated with ethanol at room temperature, using bubbler, 6 kPa. The acetylene was added as a 2 vol. % acetylene/He gas (200 mL/min·g) mixture. After flowing the organic precursor gas for the specified time, the gas was switched to He and the reactor was cooled to room temperature. The incorporation of the organic precursor gas into the zeolite resulted in a zeolite/carbon composite.

[0045] Removing the Zeolite Template

[0046] To remove the zeolite template and format the microporous carbon, the zeolite/carbon composite was treated with a water solution of HCl and HF (3.4 wt. % HCl / 3.3 wt. % HF) at room temperature two times for 1 hour each time. This formed the microporous carbon. The resultant template-free carbon materials were filtered from the solution, washed thoroughly with deionized water and dried at 373 K overnight.

[0047] Figure 4 is a schematic diagram of the synthesis of the zeolite templated carbon (ZTC). As used herein, the ZTC may also be termed microporous carbon. The zeolite 402 may be treated, for example, with ion exchange, to form CaX. As shown in Figure 4, the zeolite 402 has carbon deposited in the pores of the zeolite through carbon infiltration and carbonization. This forms a carbon/zeolite nano composite 404. The carbon/zeolite nano composite 404 is exposed to an acidic leaching using HCl/HF to form the ZTC 406.

[0048] Optimization of organic precursor for carbon replication of CaX

[0049] Figure 5 is an X-ray powder diffraction (XRD) plot 500 of the results for different ZTCs formed. As used herein, XRD is used for phase identification of a crystalline material and can provide information on unit cell dimensions. The material to be analyzed is finely ground, homogenized, and an average bulk composition is determined. XRD is the used to characterize the structure. To optimize the CVD conditions for carbon deposition in CaX, two different carbon precursors, propylene and ethanol, were deposited at different temperatures. In Figure 5, and the description herein, the resultant ZTCs will be designated as CaX-tttNx where CaX indicates the zeolite template, ttt indicates temperature of the CVD in kelvin (K), N represents the organic precursor gas, e.g., P for propylene, E for ethanol, or A for acetylene. The term x indicates the CVD reaction time in hours. Accordingly, CaX-973P5-C 502 is a ZTC formed using CaX as the template at a CVD deposition temperature of 973 K, using propylene as the organic precursor gas for a CVD reaction time of 5 hours. Further, if the template has been removed, this is indicated by the addition of -C at the end of the designation. Other ZTCs shown in Figure 4 include CaX-973E6-C 504 and CaX-1073E6-C 506. As described with respect to the nomenclature above, the latter two were both formed using ethanol as the organic precursor gas at a temperature of 973 K and 1073 K, respectively.

[0050] As shown in the XRD plot 500, the ZTCs formed using the CaX as a template have a broad peak around a 2θ of about 5° to about 6° which indicates presence of structural order in the arrangement of the micropores. The CaX-973P5-C 502 showed the most highly resolved peak at a 2θ of about 5° to about 6° , indicating the most faithful replication of the zeolite structure. As used herein, the reference numbers in the XRD plot 500, e.g., 502, 504, and 506, refer to the particular structures, and are used to indicate the same structures in the following plots.

[0051] Figure 6A is a plot of N_2 adsorption/desorption isotherms for the three different ZTCs. In each of these plots, and the following plots, filled circles represent values collected during the pressure increase process, and open circles represent values during the pressure decrease process. Each group of one filled circle and one open circle represents one cycle of adsorption and desorption. Figure 6B is a plot of the pore size distribution of the ZTCs using a non-local density functional theory (NLDFT) algorithm. As known in the art, density functional theory (DFT) is a quantum mechanical modeling process used to determine structural features from quantum

mechanical calculations. Like numbered plots use the same reference numbers for referring to materials as in Figure 5.

[0052] As shown in the N₂ adsorption/desorption isotherms of Figure 6A (Table 2), the carbon materials showed dual porosity, with micropores of about 1.5 nm to about 2 nm in diameter, and mesoporosity, with pores of about 2 nm to about 5 nm. Since the initial CaX contained only microporous structure, the presence of mesopores, e.g., less than about 0.40 cm³g⁻¹, indicates a poor replication of the microporous structure of the zeolite. The presence of the mesopores in the carbon replicas can be attributed to incomplete filling of the zeolite micropores with carbon.

[0053] The organic precursor may not diffuse into the zeolite micropores above a certain level of carbon filling, due to steric effects. Thus, better carbon filling, leading to higher surface area and micropore volume, may be achieved using a smaller carbon precursor such as acetylene. In Table 2, it can be noted that sample CaX-1023A2-C exhibited much higher surface area (2567 m²g⁻¹) than the samples prepared with propylene (1900 m²g⁻¹) and ethanol (1792 m²g⁻¹). Furthermore, CaX-1023A2-C showed the highest micropore volume (1.09 cm³g⁻¹).

[0054] Table 2. BET surface area and pore volumes of carbon replicas.

Sample	$S_{\text{BET}}^{[1]}$ (m ² g ⁻¹)	$V_{\text{micro}}^{[2]}$ (cm ³ g ⁻¹)	$V_{\text{meso}}^{[2]}$ (cm ³ g ⁻¹)	$V_{\text{total}}^{[2]}$ (cm ³ g ⁻¹)
CaX-973P5-C	1915	0.75	0.34	1.09
CaX-973E6-C	1596	0.58	0.48	1.06
CaX-1073E6-C	1826	0.65	0.66	1.31
CaX-1023A2-C	2567	0.95	0.42	1.37

^[1] Brunauer-Emmett-Teller (BET) surface area.

^[2] Micropore volume (V_{micro}) calculated using *DR* equation.

[0055] Optimization of CVD conditions for acetylene incorporation into CaX zeolites

[0056] The results in Table 2 indicate that acetylene is most suitable for the faithful carbon replication of zeolite. This is likely due to acetylene having the smallest kinetic diameter (0.33 nm) and the highest C/H ratio. The carbon replica synthesized by CVD using acetylene at 1023 K for 2 h showed relatively high BET surface area (2567 m²g⁻¹) and large micropore volume (> 1.00 cm³g⁻¹). Such synthesis results,

however, were difficult to reproduce especially when a larger amount of zeolite template (> 1 g) is used for carbon CVD. The limitations in reproducibility and scale-ups have been the main obstacles for the practical application of the zeolite-templated carbon materials.

- 5 **[0057]** Properties of ZTC replicated from large crystallite CaX (LCaX)
- [0058]** The techniques described above were used to synthesize ZTC from CaX having a large crystallite size, for example, between about 10 μm to about 20 μm . The zeolite itself is designated as LCaX 702 in data and plots herein. The resulting structural properties are shown in Table 3. Hereinafter, the samples synthesized using the larger-crystal CaX will be denoted with a prefix of LCaX to differentiate from samples synthesized using CaX having small crystallites (about 2 μm or less). Thus, the samples will be denoted with the nomenclature of “zeolite template-CVD temperature-CVD time-heat treatment-template”. For example, LCaX-873-4H-C indicates a microporous carbon sample synthesized by CVD with acetylene at 873 K for 4 h and heat treated, followed by removal of the zeolite template. LCaX-873-4H4H-C sample is similarly synthesized by repeating the cycle of 4 h acetylene CVD/heat treatment twice.

- 20 **[0059]** Table 3. Pore structural properties of the carbons replicated from of larger-crystal CaX

Entry	Sample	$S_{\text{BET}}^{[1]}$ ($\text{m}^2 \text{g}^{-1}$)	$V_{\text{micro}}^{[2]}$ ($\text{cm}^3 \text{g}^{-1}$)	V_{meso} ($\text{cm}^3 \text{g}^{-1}$)	V_{total} ($\text{cm}^3 \text{g}^{-1}$)	Ref. Nos. in plots
1	LCaX-1023-2-C ^[3]	2567	0.95	0.42	1.37	802 ^[5]
2	LCaX-1023-2-C ^[4]	2156	0.83	0.43	1.26	
3	LCaX-973-3-C ^[3]	2381	0.93	0.31	1.24	
4	LCaX-873-4-C ^[3]	841	0.33	0.12	0.45	704 ^[5]
5	LCaX-873-4H-C ^[3]	3049	1.12	0.45	1.57	706 ^[5]
6	LCaX-873-4H4H-C ^[3]	2830	1.10	0.23	1.33	708 ^[5]
7	LCaX-873-4H4H-C ^[4]	2840	1.12	0.21	1.33	
9	LCaX-823-9H4H-C ^[4]	2950	1.17	0.18	1.35	

^[1] Brunauer-Emmett-Teller (BET) surface area.

^[2] Micropore volume (V_{micro}) calculated using DR equation.

^[3] 1 g zeolite is used for acetylene CVD.

^[4] 5 g zeolite is used for acetylene CVD.

^[5] Plots in Figures 7 are without zeolite template removal, plots in Figures 8A, 8B, and 8C are after zeolite template removal.

[0060] The results in entries 1, 3 and 4 showed that higher CVD temperature is useful for obtaining higher surface area and micropore volume. The carbon synthesized at relatively low temperature (873 K, entry 4) showed significantly lower surface area than other samples, which indicates that carbon structure is not sufficiently graphitized (or rigid) at 873 K and thus collapsed after removal of zeolite template. The result also shows that only highly graphitized carbon structure can retain highly microporous structure. Unfortunately, such high-temperature acetylene CVD is very sensitive to the starting amount of zeolite template, e.g., the bed thickness in the fixed-bed reactor. If the amount of zeolite is increased from 1 to 5 g, as shown by the comparison of entries 1 and 2, for CVD using acetylene, the BET surface area and porosity of the resultant carbon decreased significantly.

[0061] To overcome this problem, a sequential carbon synthesis procedure is described herein, which is composed of low-temperature acetylene CVD (< 873 K) and high-temperature heat treatment (1123 K) under noble gas (He). At low CVD temperature (< 873 K), carbon deposition occurs very uniformly over the zeolite bed. After the micropore of the zeolite is fully filled with non-graphitized carbon, the gas stream is switched to He and the temperature is increased to 1123 K for the graphitization (densification) of the carbon structure. Such consecutive steps allow uniform and selective deposition of high graphitized carbons inside the zeolite micropores. In result, LCaX-873-4H-C (entry 5) shows very high surface area of 3049 m² g⁻¹ and micropore volume of 1.12 cm³ g⁻¹, even surpass those of sample LCaX-1023-2-C 802 (entry 1, Figures 8A-8C).

[0062] Figure 7 is a plot 700 of the N₂ adsorption-desorption isotherms of zeolite-carbon composite (without zeolite template removal) collected at the different steps of the synthesis process. All measurements are in comparison to the microporosity of the LCaX 702. After the acetylene CVD at 873 K for 4 h (LCaX-873-4 704), negligible microporosity remains inside the zeolite template. This indicates that the zeolite micropore is fully filled with the non-graphitized carbon framework. After thermal treatment at 1123 K for 4 h under He (LCaX-873-4H 706), c.a. 25% of the zeolite micropore volume is regenerated. The result reveals that the thermal treatment led to the densification and hence the volume shrinkage of carbon framework inside the

zeolite micropores. Because the considerable fraction of zeolite micropores are regenerated after the thermal treatment, a secondary CVD/thermal treatment cycle using acetylene can be carried out to fill the remaining micropores. After repeating the CVD-thermal treatment cycle twice (LCaX-873-4H4H 708), the micropore of zeolite template are nearly fully filled with the graphitized carbon framework. After the removal of zeolite template, the repeated CVD/thermal treatment cycles significantly reduce the carbon mesopore volume while retaining the BET surface area: LCaX-873-4H4H-C 708 ($0.23 \text{ cm}^3\text{g}^{-1}$) showed significantly reduced mesopore volume than LCaX-873-4H-C 706 ($0.45\text{cm}^3\text{g}^{-1}$), as seen by comparing entries 5 and 6 in Table 3.

10 **[0063]** The result indicates that incomplete filling of zeolite micropores leads to the formation of mesopores in the replicated carbon structure. It can be noted that the sequential carbon synthesis procedure allows high reproducibility of the carbon structure regardless of the zeolite amount (bed thickness) used for the carbon synthesis (compare entries 6 and 7).

15 **[0064]** Decreasing the initial acetylene CVD temperature from about 873 K to about 823 K, the carbon can be synthesized (entry 9) with slightly enhanced BET surface area and micropore volume. Based on these results, an optimum temperature range for initial acetylene CVD is between about 823 K to about 873 K. At CVD temperatures lower than 773 K, the carbon deposition was too slow for practical application.

20 **[0065]** Figures 8A to 8C show the N_2 adsorption isotherms and XRD patterns for the representative samples in Table 3. It is noteworthy that the most faithfully replicated carbon structure (LCaX-873-4H4H-C 708) shows a Type I isotherm with small amount of N_2 adsorption at high pressure regime ($P/P_0 > 0.1$). LCaX-873-4H-C 706 sample synthesized by single cycle of acetylene CVD/thermal treatment showed even higher total pore volume than the sample of LCaX-873-4H4H-C 708, but the enhancement is only due to the presence of secondary mesoporosity, as indicated by the more pronounced adsorption at $P/P_0 > 0.1$. The samples synthesized by subsequent acetylene CVD-heat treatment cycle, LCaX-873-4H-C 706 and LCaX-873-4H4H-C 708, showed much narrower and more intense pore size distribution in the micropore regime ($W < 2 \text{ nm}$). It can be noted that the replicated carbon (LCaX-873-4H4H-C 708) showed a very sharp peak at $2\theta = 6.3^\circ$ in XRD. This indicates that the replicated carbon has ordered microporous structure like zeolite. Therefore, the presence of the

30

sharp XRD peak at $2\theta = 6.3^\circ$ can be used as an indicator for evaluating the replication of zeolite structure, e.g., the efficiency of the carbon deposition.

[0066] ZTC Functionalization.

[0067] Figure 9 is a drawing of a ZTC 902 impregnated with catalyst particles 904 forming a functionalized ZTC 906. In the example described herein, wet impregnation can be used to load a noble metal, such as platinum, onto a ZTC 902 support to function as a catalyst. For example, to impregnate Pt, a solution of $\text{Pt}(\text{NH}_3)(\text{NO}_3)_2$ can be prepared using the desired amount. In various embodiments, the amount can range from 0.1 wt% to 5 wt%. In some embodiments, 3 wt% is used, a solution volume equivalent to the pore volume of the ZTC 902 used is added to wet the ZTC 902. The impregnated ZTC is dried in oven at 80°C overnight. The dried Pt/ZTC is then calcined under a N_2 flow at a flow rate of 50 ml/min. This can be performed at 500°C for 12 hours to decompose the metal nitrates. After decomposition of the metal nitrates, the Pt/ZTC can be reduced in flowing hydrogen, for example, at a flow rate of 50 ml/min for 2 hours at 500°C , to produce dispersed Pt or catalyst particles 904 on the ZTC 902, herein termed functionalized ZTC 906.

[0068] In some embodiments, a strong electrostatic adsorption (SEA) method is used. In this method, impregnation is controlled by adjusting the pH of the carbon/water/precursor slurry to the adequate value to increase the electrostatic interactions between the metal precursor and the support are maximized.

[0069] Incorporating functionalized ZTC into electrode

[0070] After impregnation of the catalyst particles, the functionalized ZTC is added to the electrodes. In an embodiment, the functionalized ZTC can be adhered to the electrodes using a mixture that includes the functionalized ZTC with a perfluorinated resin binder (e.g., Nafion® at about 5 wt%) and isopropyl alcohol (70 wt%) as a conductive adhesive.

[0071] Membrane electrode assembly (MEA) preparation:

[0072] Figure 10 is a schematic drawing of an MEA 110 with the functionalized ZTC incorporated into the interfaces between the PEM and the anode and the cathode. Like numbered items are as described with respect to Figure 1.

[0073] In some embodiments, the MEA 110 is prepared by hot pressing the anode, PEM, and cathode together, for example, under about 1 to 2 metric tonnes of pressure for 3 min at $100\text{--}120^\circ\text{C}$. A polymer solution of perfluorinated ion-exchange resin

(Nafion®), or other ion-exchange resins, is applied to the surface of both anodic and cathodic electrodes, prior to the pressing. For example, a 5 wt. % solution of the ion-exchange resin in a solution or dispersion with lower aliphatic alcohols/H₂O. The polymer solution may help with the mechanical stability of the MEA 110 and the proton conductivity in the catalytic layer.

[0074] PEM Fuel Cell Assembly

[0075] The final PEM fuel cell assembly, shown in Figure 1, is made by mounting the MEA 110 (Figures 1 and 9) into a housing 112. As described herein, in various embodiment, the MEA 110 is sealed to the housing with a high temperature sealant, such as a silicone adhesive, or an epoxy, among others.

[0076] Embodiments

[0077] An embodiment described in examples herein provides a method for making a polymer electrolyte membrane (PEM) fuel cell assembly. The method includes forming a functionalized zeolite templated carbon (ZTC), including forming a CaX zeolite, depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution including hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC. The method further includes incorporating the functionalized ZTC into electrodes, forming a membrane electrode assembly (MEA), and forming the PEM fuel cell assembly.

[0078] In an aspect, the CaX zeolite is formed by ion exchanging a NaX zeolite with calcium ions.

[0079] In an aspect, the CVD process uses propylene, ethanol, or acetylene, or any combinations thereof, as an organic precursor gas. In an aspect, wherein the CVD process uses acetylene as an organic precursor gas. In an aspect, the acetylene is added as a 2 vol. % solution in helium. In an aspect, the CVD process is performed at a temperature of between 823 K and 1123 K.

[0080] In an aspect, the CVD process includes depositing carbon in a matrix of the CaX zeolite at a first temperature using a gas stream including acetylene, switching the gas stream to a helium stream, and increasing the first temperature to a second temperature. In an aspect, the first temperature is less than 875 K. In an aspect, the first temperature is about 823 K. In an aspect, the second temperature is greater than 1120 K. In an aspect, the second temperature is about 1123 K.

[0081] In an aspect, the method includes repeating the CVD process. Repeating the CVD process includes cooling back to the first temperature, switching the gas stream back to the gas stream including acetylene, depositing carbon in the matrix of the CaX zeolite at the first temperature, switching the gas stream to the helium stream, and
5 increasing the first temperature to the second temperature.

[0082] In an aspect, the method includes forming the functionalized ZTC using an incipient wetness technique. In an aspect, the method includes dissolving an active metal precursor to form an aqueous solution, adding an amount of the aqueous solution to the ZTC corresponding to a pore volume of the ZTC forming a metal/ZTC
10 composite, drying the metal/ZTC composite, and sintering the metal/ZTC composite to form the functionalized ZTC.

[0083] In an aspect, the method includes adhering the functionalized ZTC to a surface of an anode, a cathode, or both, using an ion conductive adhesive.

[0084] In an aspect, the method includes incorporating the functionalized ZTC into
15 an anode, a cathode, or both by sputtering.

[0085] In an aspect, the method includes forming the MEA by pressing an anode, a PEM, and a cathode together in a hot press, wherein a surface of the anode facing the PEM, a surface of the cathode facing the PEM, or both, is coated with the functionalized ZTC.

[0086] In an aspect, the method includes forming the PEM fuel cell assembly by
20 mounting the MEA in a housing with gas inlets for fuel and oxidizer.

[0087] Another embodiment described in examples herein provides a polymer electrolyte membrane fuel cell. The polymer electrolyte membrane fuel cell includes a membrane electrode assembly (MEA) that includes an anode, a polymer electrolyte
25 membrane (PEM), and a cathode, wherein the anode, the cathode, or both includes functionalized zeolite templated carbon (ZTC). The PEM fuel cell also includes a housing including inlets for fuel and oxidizer and outlets for excess fuel and oxidizer, a power coupled to the anode to provide current from the PEM fuel cell to an external device, and a return line from the external device coupled to the cathode.

[0088] In an aspect, the PEM fuel cell includes a layer of functionalized ZTC
30 disposed at the interface between the anode and the PEM, the interface between the cathode and the PEM, or both. In an aspect, the functionalized ZTC is formed by a method including forming a CaX zeolite, depositing carbon in the CaX zeolite using a

chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution including hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC.

[0089] Another embodiment described in examples herein provides a method for making a membrane electrode assembly (MEA). The method includes forming a functionalized zeolite templated carbon (ZTC) by forming a CaX zeolite, depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite, treating the carbon/zeolite composite with a solution including hydrofluoric acid to form a ZTC, and treating the ZTC to add catalyst sites, forming the functionalized ZTC. The method includes incorporating the functionalized ZTC into electrodes and forming a membrane electrode assembly.

[0090] In an aspect, the CVD process includes depositing carbon in a matrix of the CaX zeolite at a first temperature using a gas stream including acetylene, switching the gas stream to a helium stream, and increasing the first temperature to a second temperature. In an aspect, the first temperature is less than 875 K. In an aspect, the first temperature is about 823 K. In an aspect, the second temperature is greater than 1120 K. In an aspect, the second temperature is about 1123 K.

[0091] In an aspect, the method includes repeating the CVD process by cooling back to the first temperature, switching the gas stream back to the gas stream including acetylene, depositing carbon in the matrix of the CaX zeolite at the first temperature, switching the gas stream to the helium stream, and increasing the first temperature to the second temperature.

[0092] In an aspect, the method includes dissolving an active metal precursor to form an aqueous solution, adding an amount of the aqueous solution to the ZTC corresponding to a pore volume of the ZTC forming a metal/ZTC composite, drying the metal/ZTC composite, and sintering the metal/ZTC composite to form the functionalized ZTC.

[0093] In an aspect, the method includes adhering the functionalized ZTC to a surface of an anode, a cathode, or both, using an ion conductive adhesive. In an aspect, the method includes incorporating the functionalized ZTC into an anode, a cathode, or both by sputtering.

[0094] In an aspect, the method includes forming the MEA by pressing an anode, a PEM, and a cathode together in a hot press, wherein a surface of the anode facing the

PEM, a surface of the cathode facing the PEM, or both, is coated with the functionalized ZTC.

[0095] Other implementations are also within the scope of the following claims.

Claims

What is claimed is:

1. A method for making a polymer electrolyte membrane (PEM) fuel cell assembly, comprising:
5 forming a functionalized zeolite templated carbon (ZTC), comprising:
forming a CaX zeolite;
depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD) process to form a carbon/zeolite composite;
10 treating the carbon/zeolite composite with a solution comprising hydrofluoric acid to form a ZTC; and
treating the ZTC to add catalyst sites, forming the functionalized ZTC;
and
incorporating the functionalized ZTC into electrodes;
15 forming a membrane electrode assembly (MEA); and
forming the PEM fuel cell assembly.
2. The method of claim 1, wherein the CaX zeolite is formed by ion exchanging a NaX zeolite with calcium ions.
20
3. The method of claim 1, wherein the CVD process uses propylene, ethanol, or acetylene, or any combinations thereof, as an organic precursor gas.
4. The method of claim 1, wherein the CVD process uses acetylene as an
25 organic precursor gas.
5. The method of claim 4, wherein the acetylene is added as a 2 vol. % solution in helium.
- 30 6. The method of claim 1, wherein the CVD process is performed at a temperature of between 823 K and 1123 K.
7. The method of claim 1, wherein the CVD process comprises:

depositing carbon in a matrix of the CaX zeolite at a first temperature using a
gas stream comprising acetylene;
switching the gas stream to a helium stream; and
increasing the first temperature to a second temperature.

5

8. The method of claim 7, wherein the first temperature is less than 875 K.

9. The method of claim 7, wherein the first temperature is about 823 K.

10. The method of claim 7, wherein the second temperature is greater than
1120 K.

11. The method of claim 7, wherein the second temperature is about 1123
K.

15

12. The method of claim 7, comprising repeating the CVD process by
cooling back to the first temperature;
switching the gas stream back to the gas stream comprising acetylene;
depositing carbon in the matrix of the CaX zeolite at the first temperature;
switching the gas stream to the helium stream; and
increasing the first temperature to the second temperature.

20

13. The method of claim 1, comprising forming the functionalized ZTC
using an incipient wetness technique.

25

14. The method of claim 1, comprising:
dissolving an active metal precursor to form an aqueous solution;
adding an amount of the aqueous solution to the ZTC corresponding to a pore
volume of the ZTC forming a metal/ZTC composite;
drying the metal/ZTC composite; and
sintering the metal/ZTC composite to form the functionalized ZTC.

30

15. The method of claim 1, comprising adhering the functionalized ZTC to a surface of an anode, a cathode, or both, using an ion conductive adhesive.

16. The method of claim 1, comprising incorporating the functionalized
5 ZTC into an anode, a cathode, or both by sputtering.

17. The method of claim 1, comprising forming the MEA by pressing an anode, a PEM, and a cathode together in a hot press, wherein a surface of the anode facing the PEM, a surface of the cathode facing the PEM, or both, is coated with the
10 functionalized ZTC.

18. The method of claim 1, comprising forming the PEM fuel cell assembly by mounting the MEA in a housing with gas inlets for fuel and oxidizer.

19. A polymer electrolyte membrane fuel cell, comprising:
a membrane electrode assembly (MEA), comprising:
an anode;
a polymer electrolyte membrane (PEM); and
a cathode, wherein the anode, the cathode, or both comprises
20 functionalized zeolite templated carbon (ZTC);
a housing comprising inlets for fuel and oxidizer and outlets for excess fuel and oxidizer;
a power coupled to the anode to provide current from the PEM fuel cell to an external device; and
25 a return line from the external device coupled to the cathode.

20. The PEM fuel cell of claim 19, comprising a layer of functionalized zeolite template carbon disposed at the interface between the anode and the PEM, the interface between the cathode and the PEM, or both.

30

21. The PEM fuel cell of claim 19, wherein the functionalized ZTC is formed by a method comprising:
forming a CaX zeolite;

depositing carbon in the CaX zeolite using a chemical vapor deposition (CVD)
process to form a carbon/zeolite composite;
treating the carbon/zeolite composite with a solution comprising hydrofluoric
acid to form a ZTC; and
5 treating the ZTC to add catalyst sites, forming the functionalized ZTC.

22. A method for making a membrane electrode assembly (MEA),
comprising:

forming a functionalized zeolite templated carbon (ZTC), comprising:

10 forming a CaX zeolite;
depositing carbon in the CaX zeolite using a chemical vapor deposition
(CVD) process to form a carbon/zeolite composite;
treating the carbon/zeolite composite with a solution comprising
hydrofluoric acid to form a ZTC; and
15 treating the ZTC to add catalyst sites, forming the functionalized ZTC;
and
incorporating the functionalized ZTC into electrodes; and
forming a membrane electrode assembly.

20 23. The method of claim 22, wherein the CVD process comprises:
depositing carbon in a matrix of the CaX zeolite at a first temperature using a
gas stream comprising acetylene;
switching the gas stream to a helium stream; and
increasing the first temperature to a second temperature.

25 24. The method of claim 23, wherein the first temperature is less than 875
K.

25. The method of claim 23, wherein the first temperature is about 823 K.

30 26. The method of claim 23, wherein the second temperature is greater than
1120 K.

27. The method of claim 23, wherein the second temperature is about 1123 K.

28. The method of claim 23, comprising repeating the CVD process by
5 cooling back to the first temperature;
switching the gas stream back to the gas stream comprising acetylene;
depositing carbon in the matrix of the CaX zeolite at the first temperature;
switching the gas stream to the helium stream; and
increasing the first temperature to the second temperature.

10

29. The method of claim 22, comprising:
dissolving an active metal precursor to form an aqueous solution;
adding an amount of the aqueous solution to the ZTC corresponding to a pore
volume of the ZTC forming a metal/ZTC composite;
15 drying the metal/ZTC composite; and
sintering the metal/ZTC composite to form the functionalized ZTC.


20

30. The method of claim 22, comprising adhering the functionalized ZTC
to a surface of an anode, a cathode, or both, using an ion conductive adhesive.


31. The method of claim 22, comprising incorporating the functionalized
ZTC into an anode, a cathode, or both by sputtering.

32. The method of claim 22, comprising forming the MEA by pressing an
25 anode, a PEM, and a cathode together in a hot press, wherein a surface of the anode
facing the PEM, a surface of the cathode facing the PEM, or both, is coated with the
functionalized ZTC.

1/10

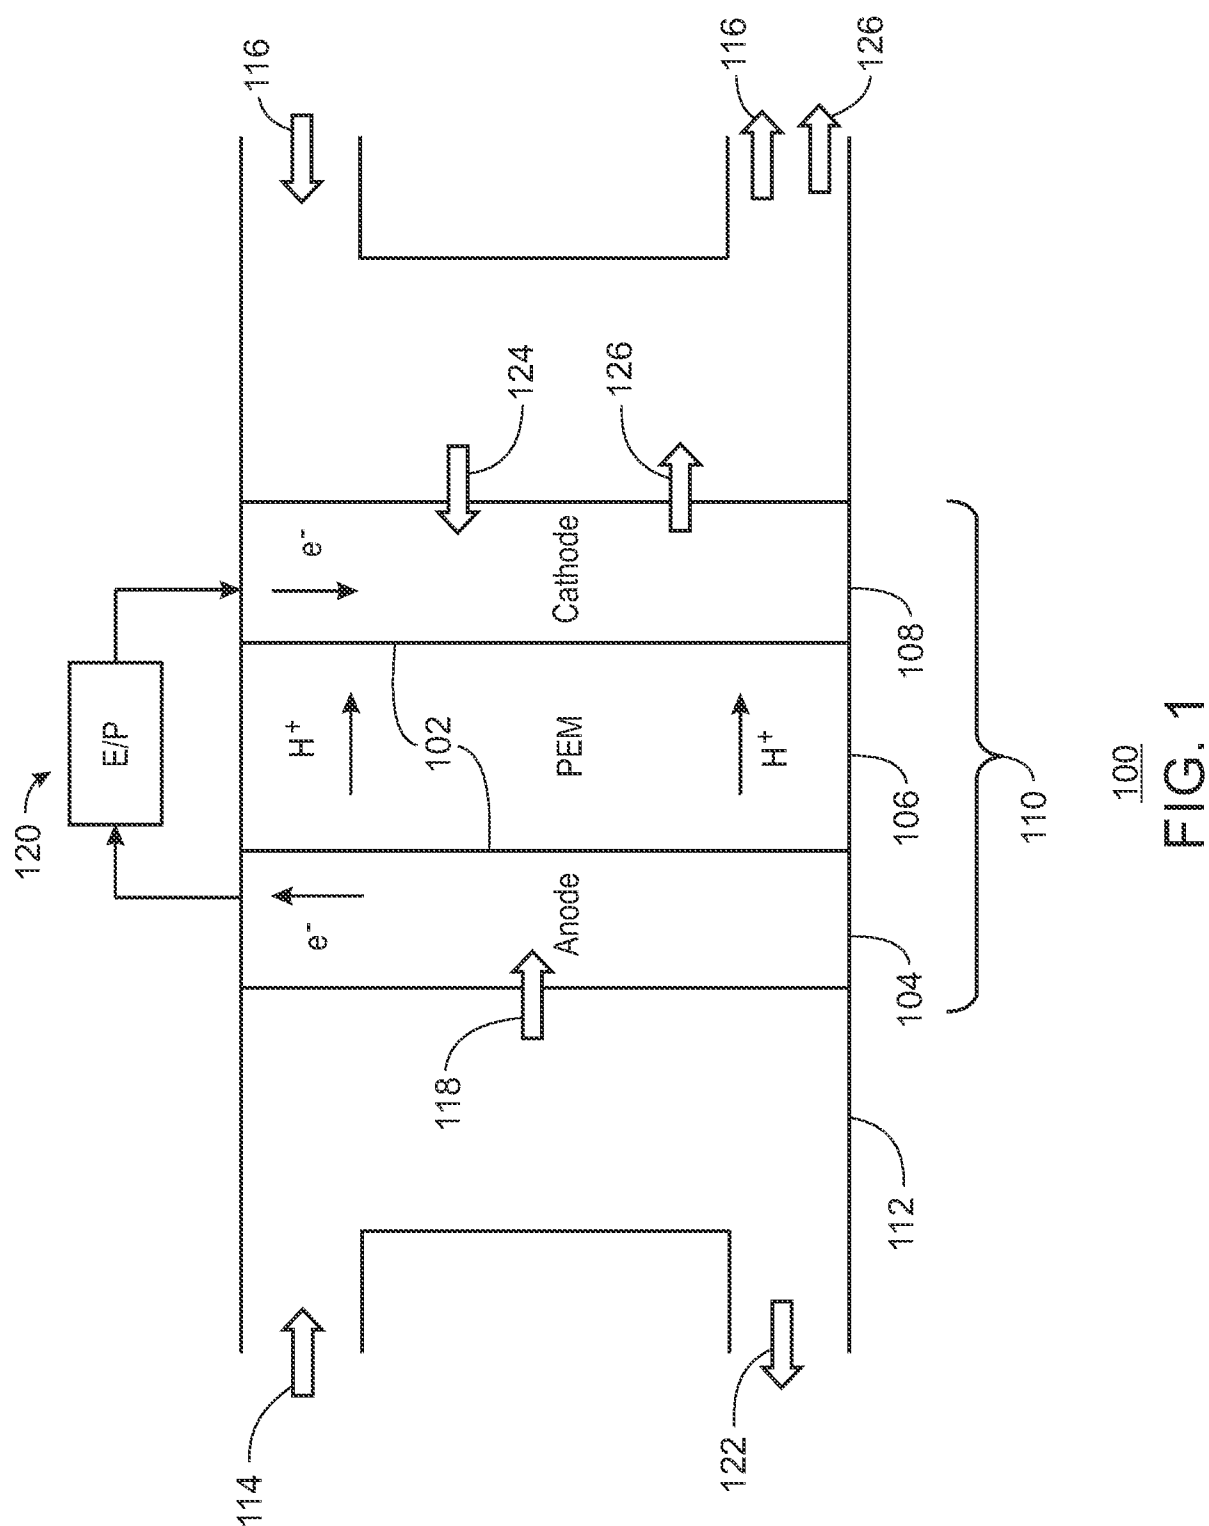


2/10

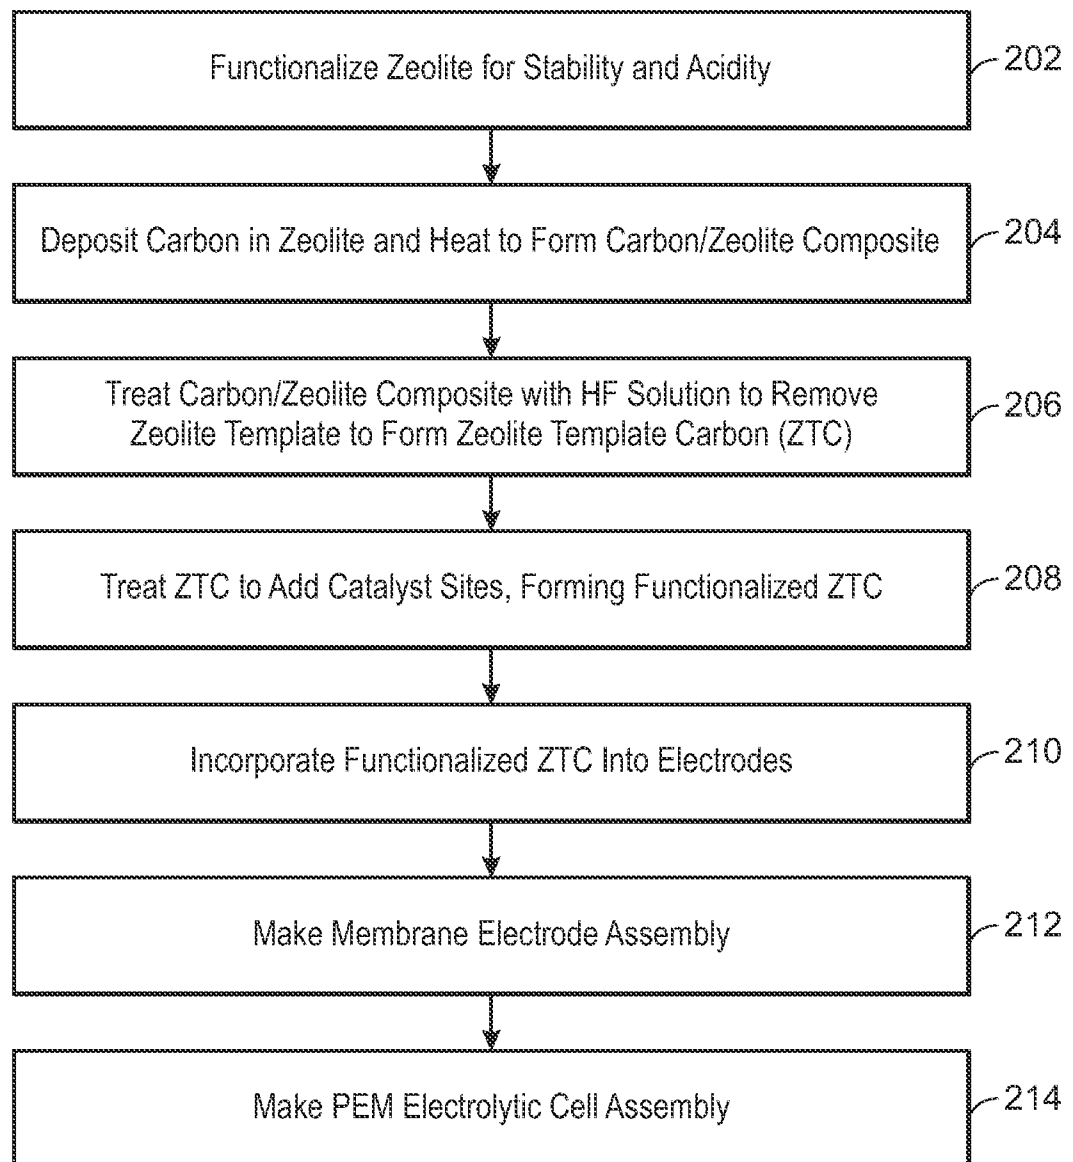


200
FIG. 2

3/10

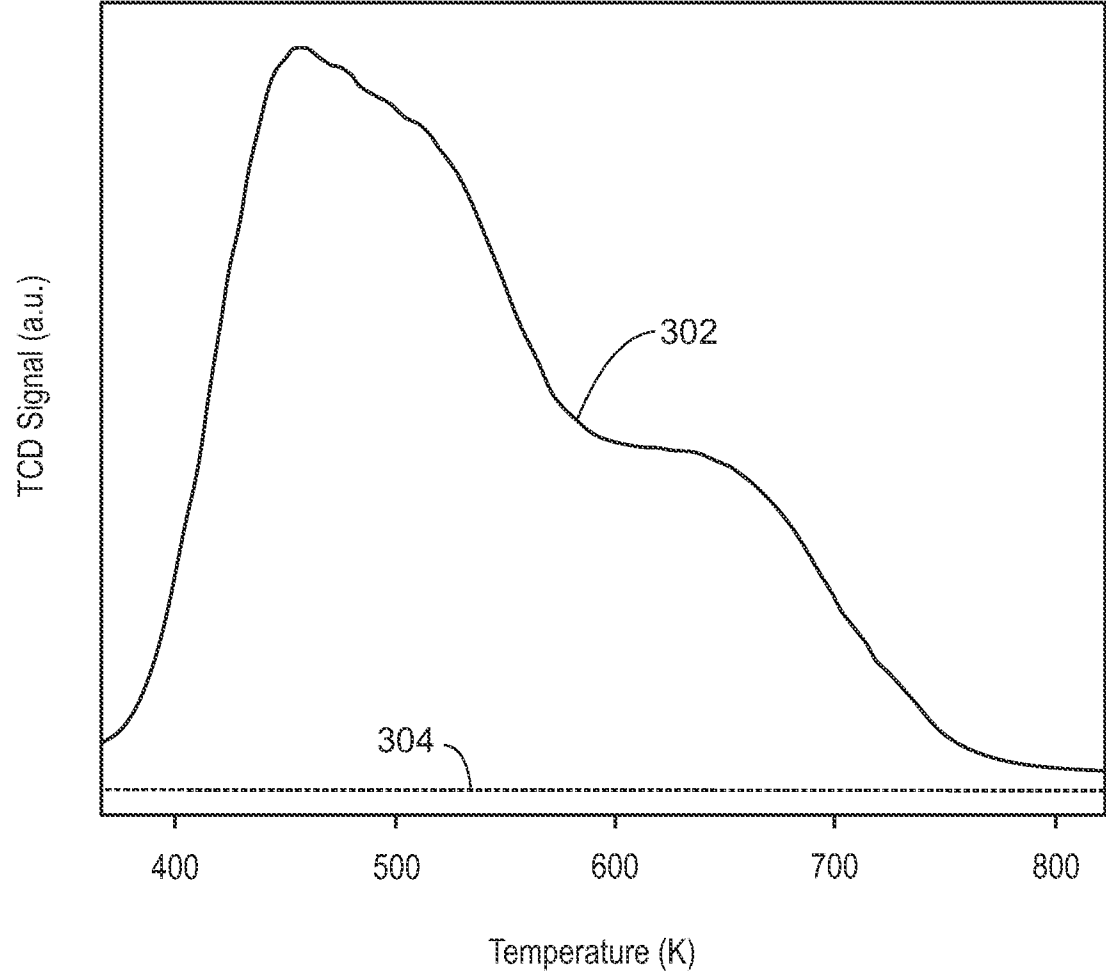


300
FIG. 3

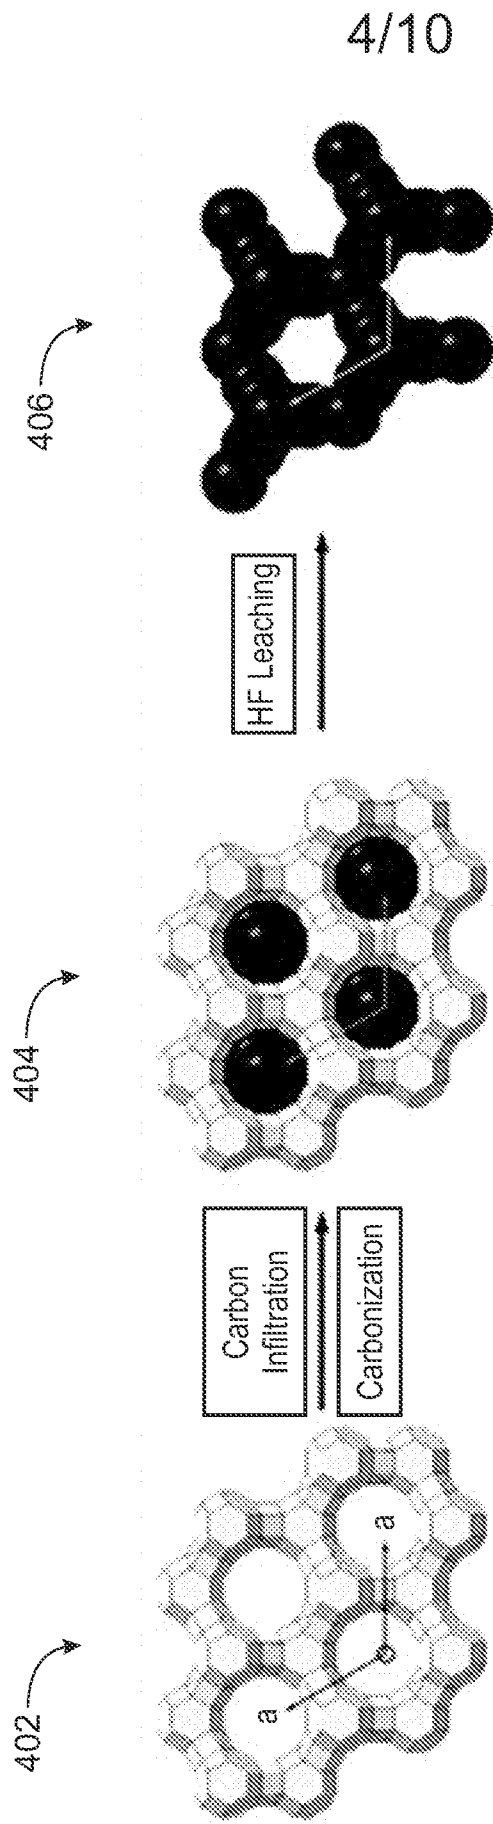

400
FIG. 4

5/10

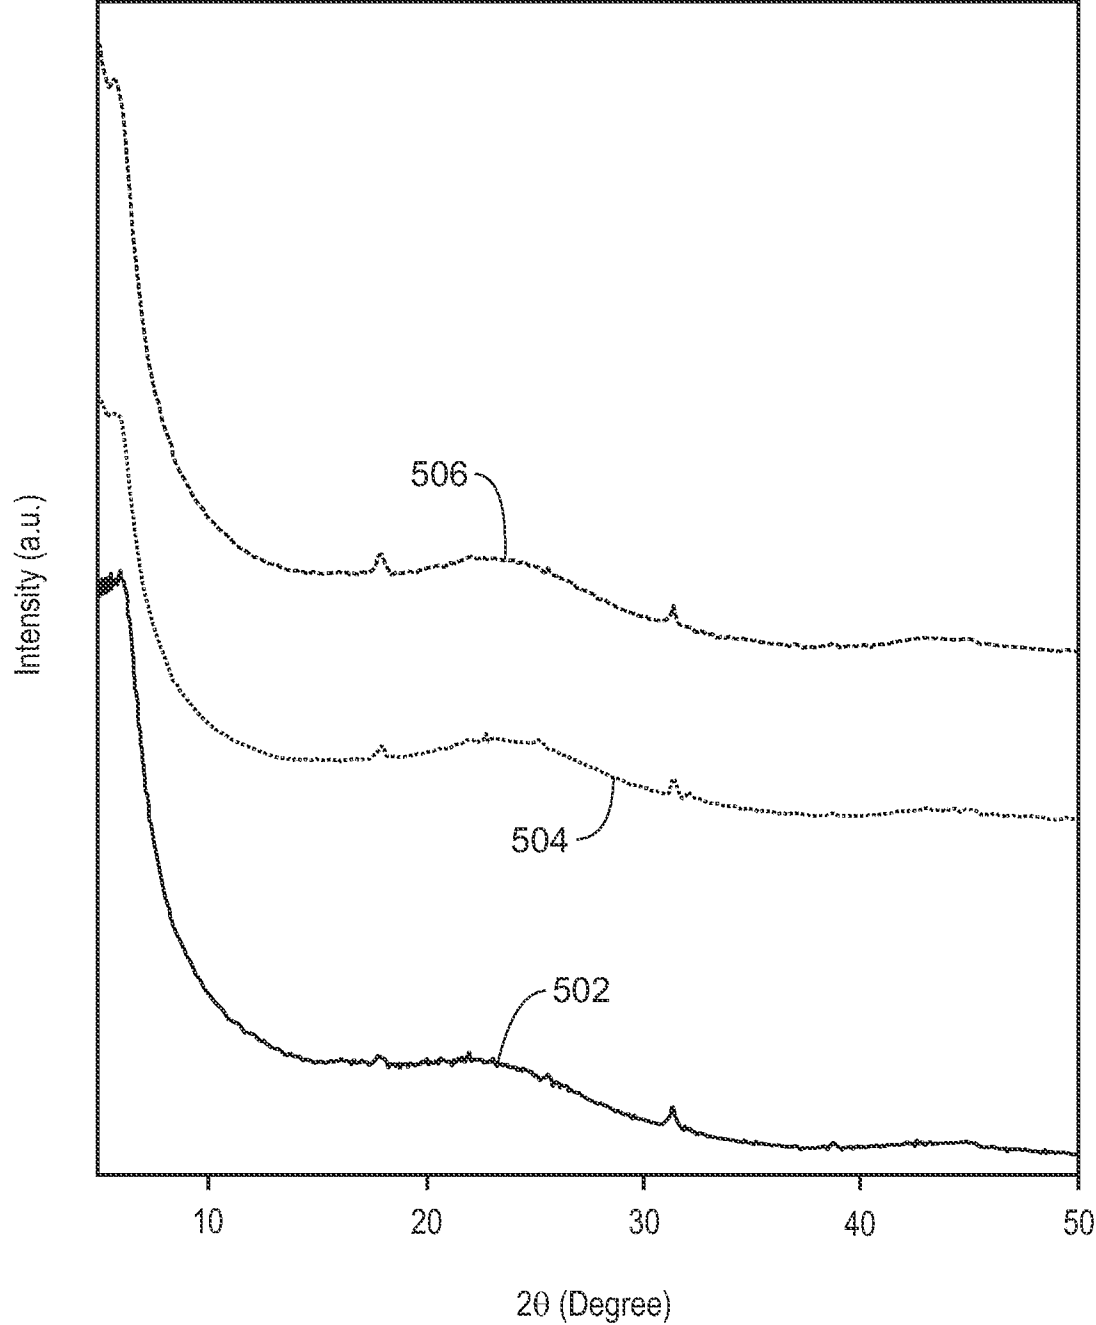

500
FIG. 5

6/10


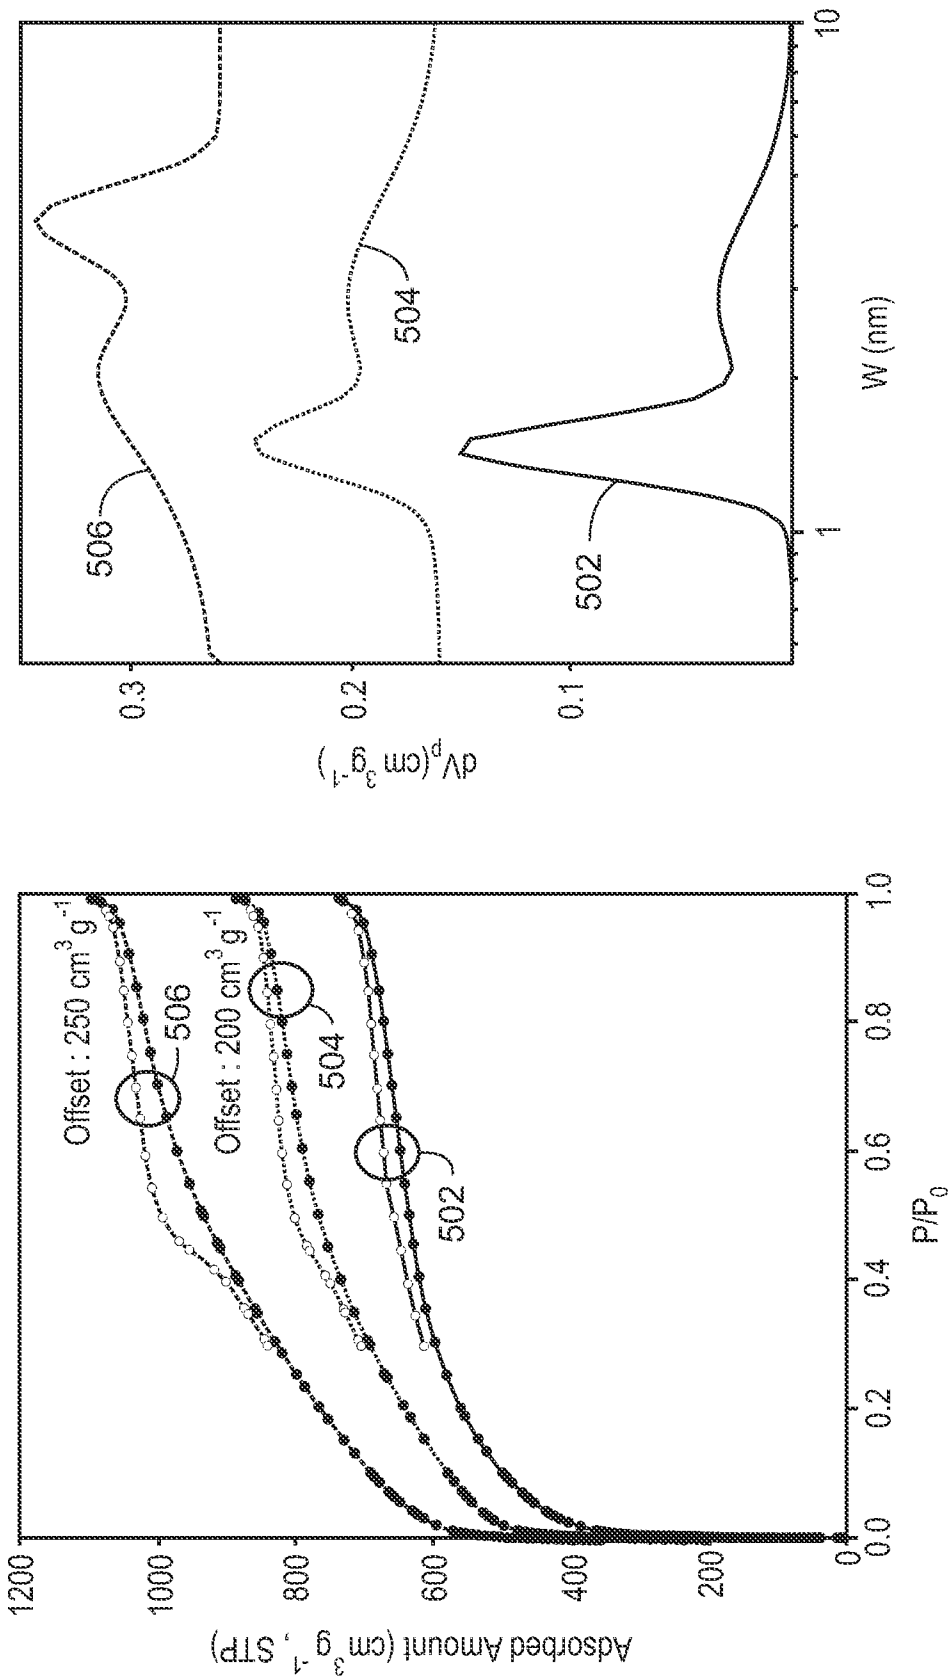


FIG. 6A

FIG. 6B

7/10

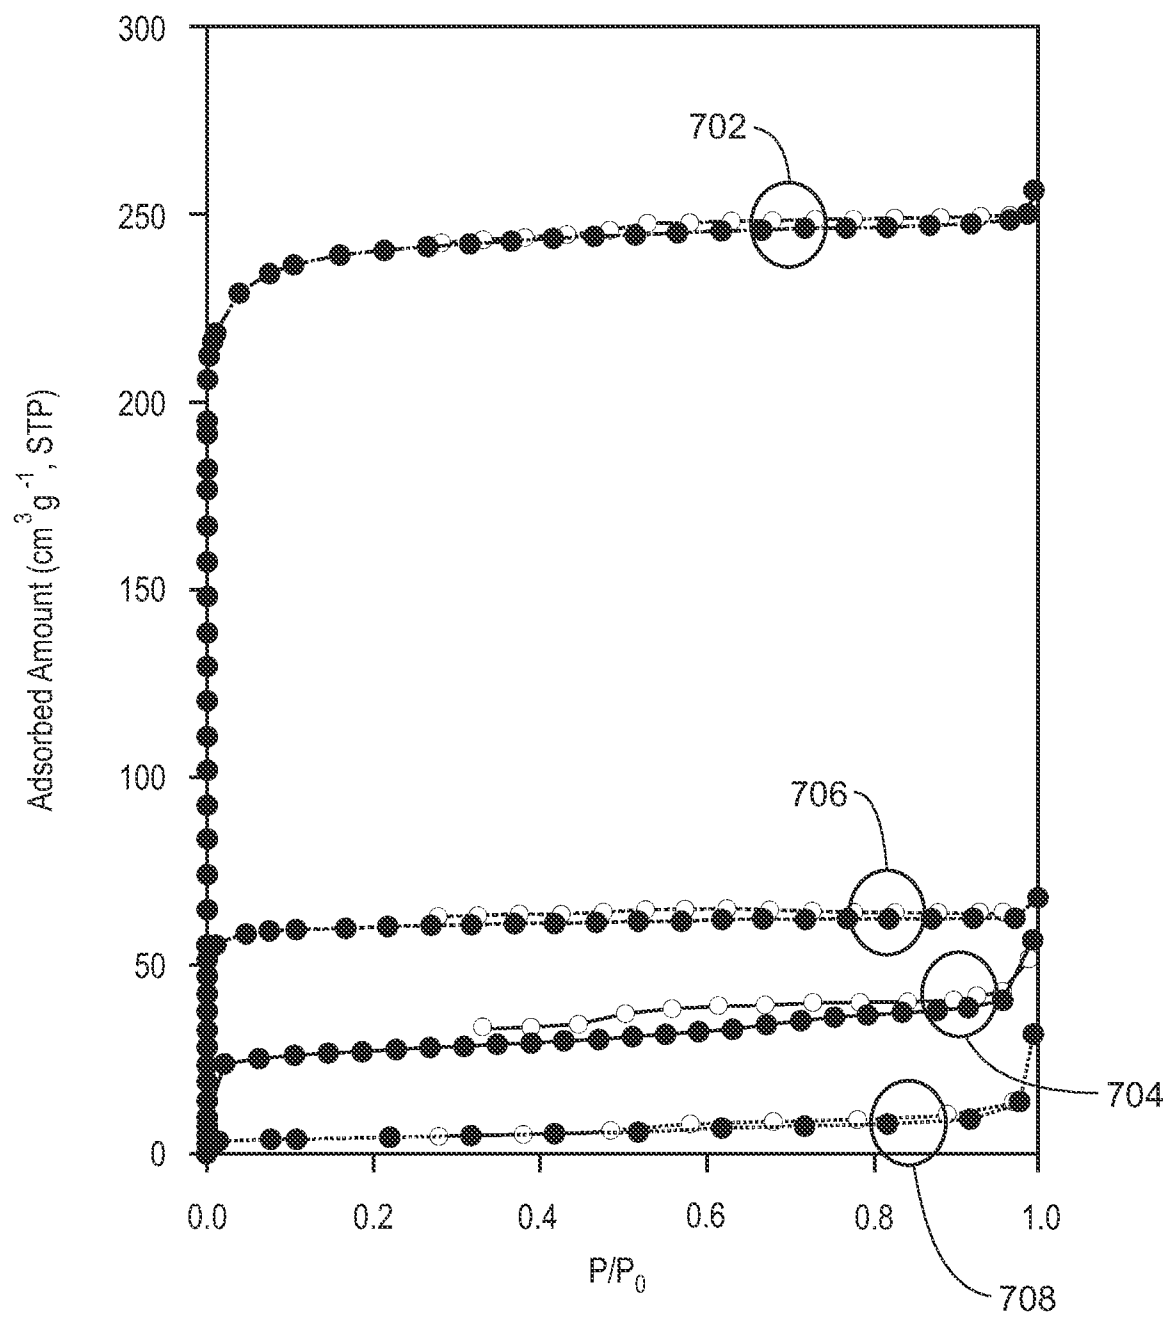

700
FIG. 7

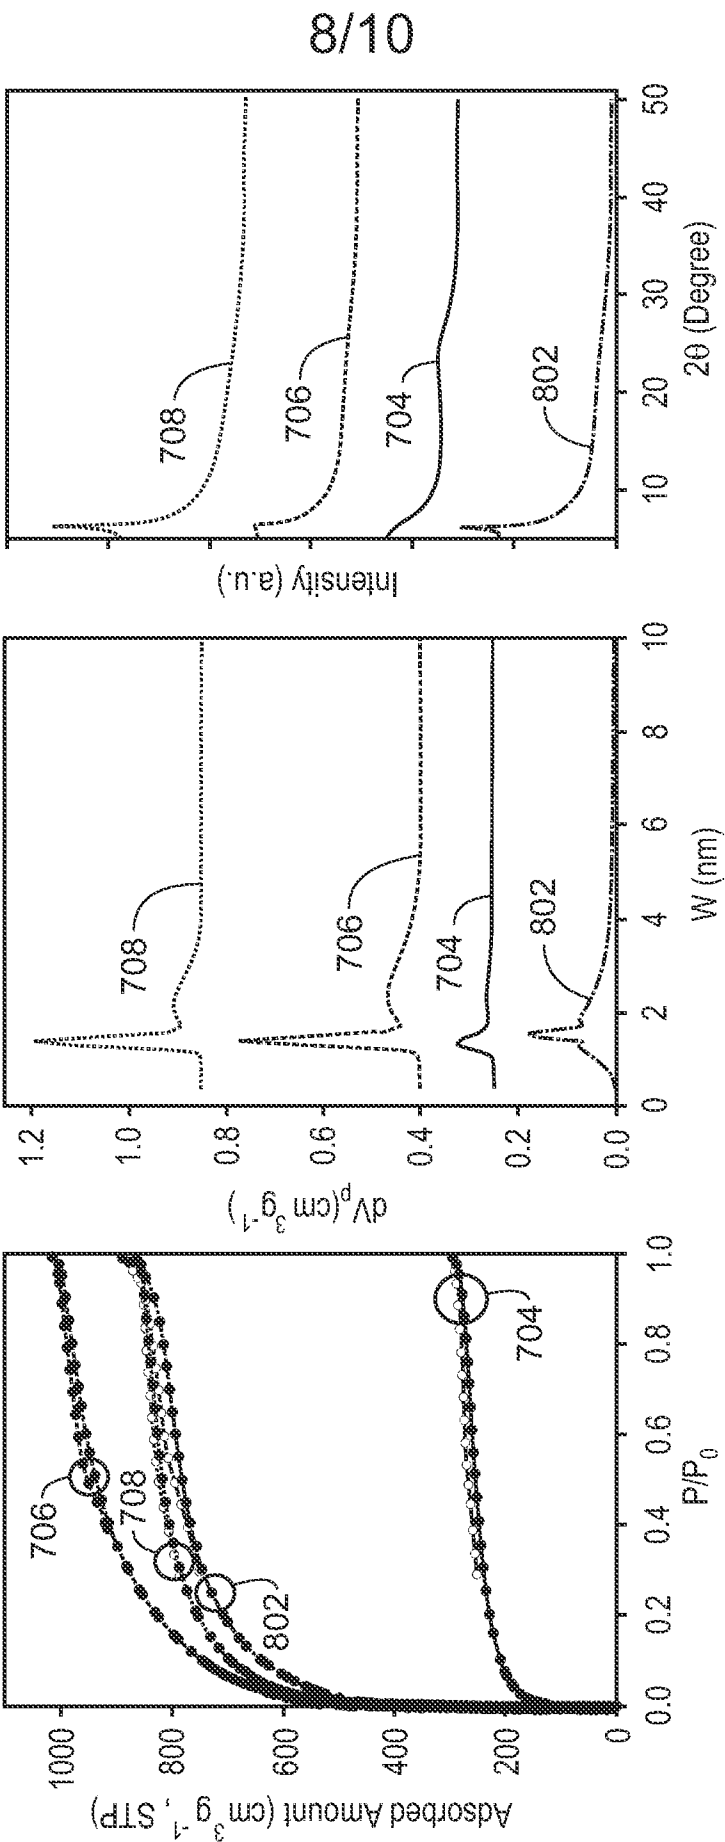


FIG. 8A

FIG. 8B

FIG. 8C

9/10

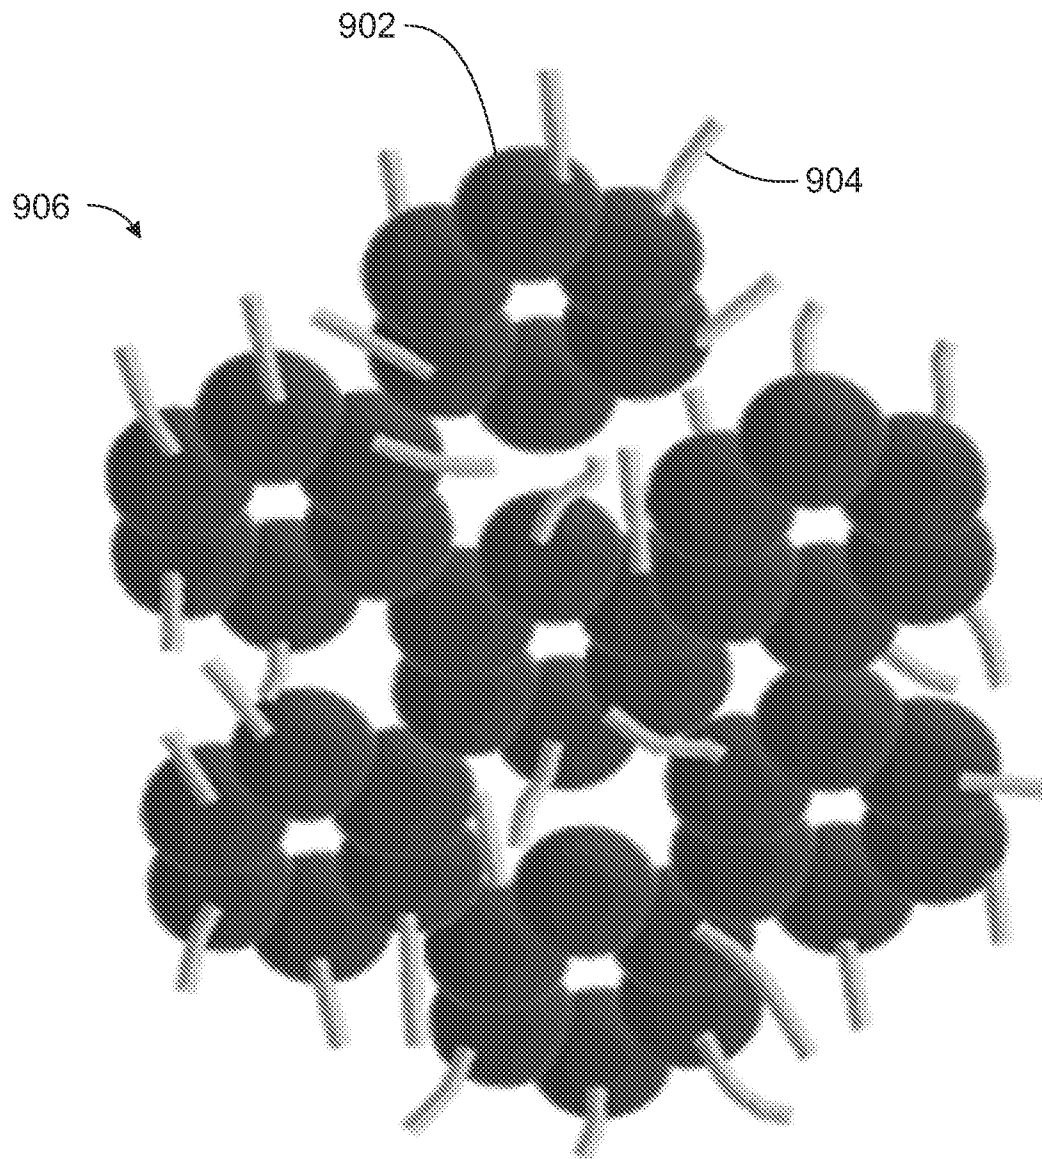


FIG. 9

10/10

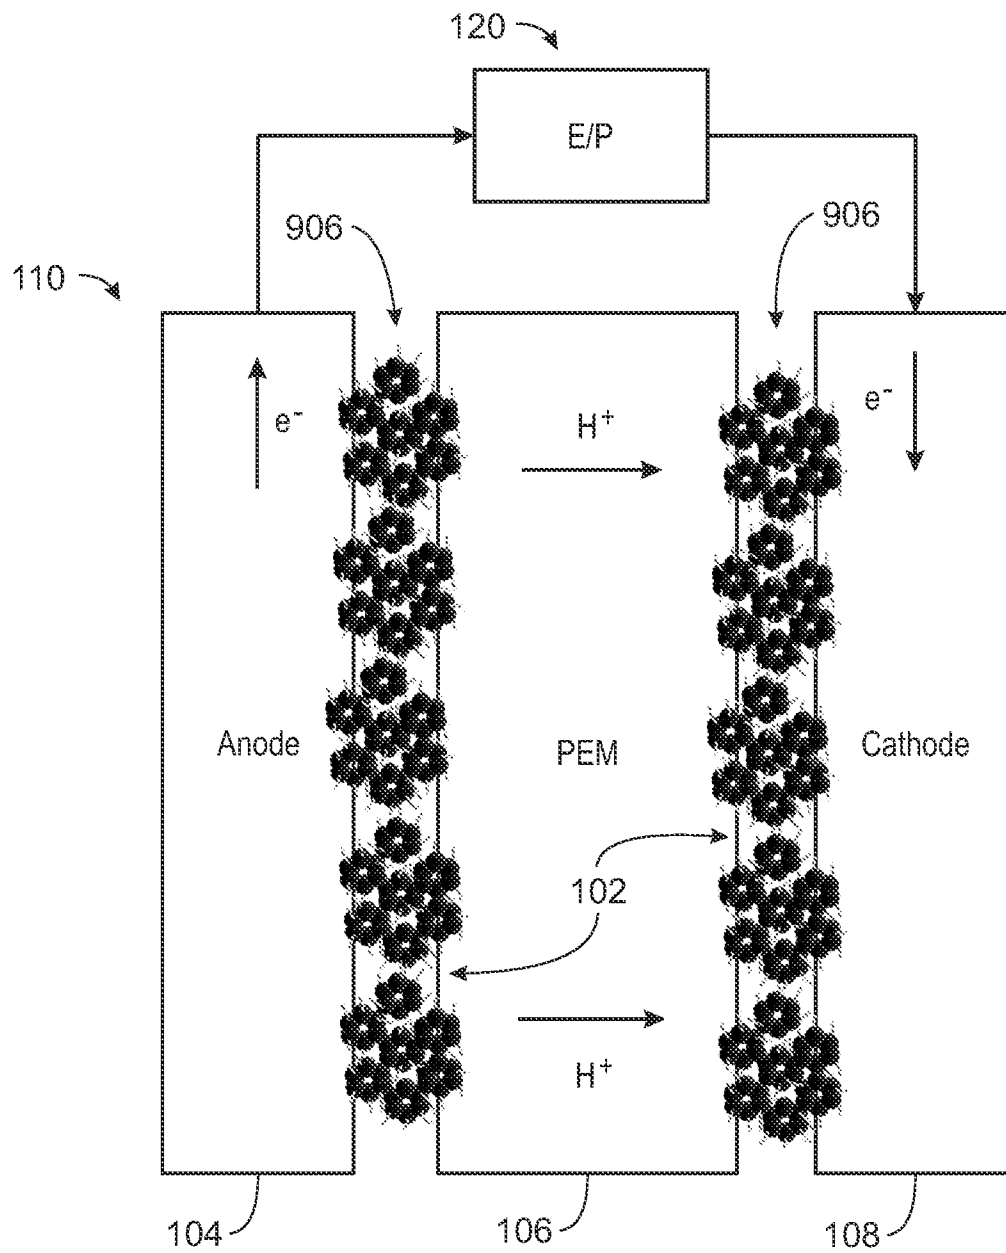


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2022/073459

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01M4/88 H01M4/90 H01M8/1041
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YANG H N ET AL: "Effect of functionalization for carbon molecular sieve (CMS) synthesized using zeolite template on the incorporation of Pt nanoparticle and performance of the electrodes in PEMFC", MICROPOROUS AND MESOPOROUS MATERIALS, ELSEVIER, AMSTERDAM ,NL, vol. 152, 21 November 2011 (2011-11-21), pages 148-156, XP028443342, ISSN: 1387-1811, DOI: 10.1016/J.MICROMESO.2011.11.042 [retrieved on 2011-12-02] * Experimental, pages 149 and 150 * -----	1-32
A	US 2017/200954 A1 (BIRSS VIOLA [CA] ET AL) 13 July 2017 (2017-07-13) the whole document ----- -----	1-32



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance;; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance;; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 October 2022

Date of mailing of the international search report

08/11/2022

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2

NL - 2280 HV Rijswijk

Tel. (+31-70) 340-2040,

Fax: (+31-70) 340-3016

Authorized officer

Nemes, Csaba A.

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2022/073459

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/112754 A1 (THATE SVEN [DE] ET AL) 17 June 2004 (2004-06-17) the whole document -----	1-32
A	US 2011/052486 A1 (ITO MASASHI [JP] ET AL) 3 March 2011 (2011-03-03) the whole document -----	1-32
A	JP 2013 173622 A (NISSAN MOTOR; UNIV TOHOKU) 5 September 2013 (2013-09-05) the whole document -----	1-32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2022/073459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017200954 A1	13-07-2017	US 2017200954 A1	13-07-2017
		US 2020358106 A1	12-11-2020
US 2004112754 A1	17-06-2004	DE 10257643 A1	24-06-2004
		EP 1437787 A2	14-07-2004
		JP 2004288620 A	14-10-2004
		US 2004112754 A1	17-06-2004
US 2011052486 A1	03-03-2011	JP 2014055110 A	27-03-2014
		US 2011052486 A1	03-03-2011
JP 2013173622 A	05-09-2013	JP 5854427 B2	09-02-2016
		JP 2013173622 A	05-09-2013