

(19)



INTELLECTUAL PROPERTY  
OFFICE OF SINGAPORE

(11) Publication number:

SG 185949 A1

(43) Publication date:

28.12.2012

(51) Int. Cl:

;

(12)

## Patent Application

(21) Application number: 2012081360

(71) Applicant:

INTERDIGITAL TECHNOLOGY  
CORPORATION 3411 SILVERSIDE  
ROAD, CONCORD PLAZA, SUITE 105,  
HAGLEY BUILDING, WILMINGTON, DE  
19810 UNITED STATES OF AMERICA  
DW US

(22) Date of filing: 29.04.2005

(72) Inventor:

ZHANG, GUODONG 490 MAIN STREET,  
APT. C8, FARMINGDALE, NY 11735 NEW  
YORK US  
TERRY, STEPHEN, E. 15 SUMMIT  
AVENUE, NORTHPOR, NY 11768 NEW  
YORK US

(30) Priority: US 60/568,937 07.05.2004

(54) **Title:**

IMPLEMENTING A DATA LIFESPAN TIMER FOR  
ENHANCED DEDICATED CHANNEL TRANSMISSIONS

(57) **Abstract:**

IMPLEMENTING A DATA LITESPAN TIMER FOR ENHANCED  
DEDICATED CHANNEL TRANSMISSIONS Abstract A wireless  
communication system, which supports enhanced dedicated  
channel (E DCH) data transmissions, includes a wireless  
transmit/receive unit (WTRU) (102), at least one Node-B (104)  
and a radio network controller (RNC) (106). The WTRU includes  
a buffer (126), a data lifespan timer (124), a data retransmission  
counter (130), a hybrid-automatic repeat request (H-ARQ)  
process (128) and a controller (122). The timer establishes  
a lifespan for at least one data block stored in the buffer. If  
physical resources have not been allocated for a data block  
associated with a lifespan timer that is close to expiration, the  
WTRU sends an urgent channel allocation request. If physical  
resources have been allocated, the data block is prioritized  
for transmission with respect to other data blocks. The data  
block is discarded if the lifespan timer expires or if the WTRU  
receives feedback information indicating that the data block was  
successfully received by the Node-B. Fig. I

IMPLEMENTING A DATA LIFESPAN TIMER FOR  
ENHANCED DEDICATED CHANNEL TRANSMISSIONS

**Abstract**

A wireless communication system, which supports enhanced dedicated channel (E-DCH) data transmissions, includes a wireless transmit/receive unit (WTRU) (102), at least one Node-B (104) and a radio network controller (RNC) (106). The WTRU includes a buffer (126), a data lifespan timer (124), a data retransmission counter (130), a hybrid-automatic repeat request (H-ARQ) process (128) and a controller (122). The timer establishes a lifespan for at least one data block stored in the buffer. If physical resources have not been allocated for a data block associated with a lifespan timer that is close to expiration, the WTRU sends an urgent channel allocation request. If physical resources have been allocated, the data block is prioritized for transmission with respect to other data blocks. The data block is discarded if the lifespan timer expires or if the WTRU receives feedback information indicating that the data block was successfully received by the Node-B.

Fig. 1

[0001]           IMPLEMENTING A DATA LIFESPAN TIMER FOR  
ENHANCED DEDICATED CHANNEL TRANSMISSIONS

[0002]           FIELD OF INVENTION

[0003]       The present invention is related to a wireless communication system including at least one wireless transmit/receive unit (WTRU), at least one Node-B and a radio network controller (RNC). More particularly, the present invention is related to a method and apparatus for implementing a data lifespan timer for supporting enhanced dedicated channel (E-DCH) transmissions.

[0004]           BACKGROUND

[0005]       Methods for improving uplink (UL) coverage, throughput, and transmission latency are currently being investigated in Release 6 of the Third Generation Partnership Project (3GPP). In order to achieve these goals, the Node-B will take over responsibility of scheduling and assigning UL resources to WTRUs. The Node-B can make more efficient decisions and manage UL radio resources on a short-term basis better than an RNC. The RNC still retains coarse overall control of the cell with enhanced uplink (EU) services so that the RNC can perform functions such as call admission control and congestion control.

[0006]       Hybrid-automatic repeat request (H-ARQ) techniques provide a procedure for generating transmissions and retransmissions with low latency. A primary aspect of H-ARQ techniques is that data received in failed transmissions is soft combined with successive retransmissions to increase the probability of successful reception.

[0007]       When an H-ARQ scheme and Node-B scheduling of transmissions is used, the time required to successfully transmit data will vary. Applications requiring very low latency transmission can be adversely effected by significantly delayed transmissions. For example, delayed data may be considered to be a failed transmission and end up being unnecessarily retransmitted by the application. Therefore, a mechanism that limits transmission latency is required.

[0008]

## SUMMARY

[0009] The present invention is implemented in a wireless communication system which supports E-DCH data transmissions. The wireless communication system includes a wireless transmit/receive unit (WTRU), at least one Node-B and a radio network controller (RNC). The WTRU includes a data buffer, a data lifespan timer, a data retransmission counter, a hybrid-automatic repeat request (H-ARQ) process and a controller. The lifespan timer establishes a lifespan for at least one data block stored in the buffer. The WTRU is configured to (i) periodically determine whether the lifespan timer has expired, (ii) determine whether the data block was previously transmitted, (iii) determine whether the lifespan timer is close to expiration, and (iv) determine whether physical resources have been allocated. If physical resources have not been allocated for a data block associated with a lifespan timer that is close to expiration, the WTRU sends an urgent channel allocation request to the Node-B. If physical resources have been allocated, the data block is prioritized for transmission with respect to other data blocks. The data block is discarded if the lifespan timer expires or if the WTRU receives feedback information indicating that the data block was successfully received by the Node-B.

[0010]

## BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

A more detailed understanding of the invention may be had from the following description of a preferred embodiment, given by way of example and to be understood in conjunction with the accompanying drawing wherein:

[0012]

Figure 1 is a block diagram of a wireless communication system operating in accordance with the present invention; and

[0013]

Figure 2 is a flow diagram of a process for implementing a data lifespan timer in the WTRU of the system of Figure 1 in accordance with the present invention.

[0014] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] Hereafter, the terminology "WTRU" includes but is not limited to a user equipment (UE), a mobile station, a fixed or mobile subscriber unit, a pager, or any other type of device capable of operating in a wireless environment. When referred to hereafter, the terminology "Node-B" includes but is not limited to a base station, a site controller, an access point or any other type of interfacing device in a wireless environment.

[0016] The features of the present invention may be incorporated into an integrated circuit (IC) or be configured in a circuit comprising a multitude of interconnecting components.

[0017] Figure 1 is a block diagram of a wireless communication system 100 in accordance with the present invention. The system 100 comprises at least one WTRU 102, at least one Node-B 104 and at least one RNC 106. The WTRU 102 includes a controller 122, a data lifespan timer 124, a buffer 126, a plurality of H-ARQ processes 128 and optionally a retransmission counter 130. The controller 122 controls overall data transmission procedures including initiation of the data lifespan timer 124 and allocation of an H-ARQ process 128.

[0018] The RNC 106 controls overall EU operation of the system 100 by configuring EU parameters for the Node-B 104 and the WTRU 102 such as the lifespan time for transport channel (TrCH) or logical channel data, initial transmit power level, maximum allowed EU transmit power or available channel resources per Node-B 104. E-DCH is established for supporting EU transmissions between the WTRU 102 and the Node-B 104.

[0019] For the E-DCH transmissions, the WTRU 102 sends a channel allocation request to the Node-B 104 via a UL EU signaling channel 110. The channel allocation request, (or other UL EU signaling), may be transmitted via the E-DCH 108 instead of the UL EU signaling channel 110. In response, the Node-B 104 sends channel allocation information to the WTRU 102 via a downlink (DL) EU signaling channel 112. After EU radio resources are allocated for the WTRU 102, the WTRU 102 transmits data via an E-DCH 108. In response to the E-DCH data transmission, the Node-B 104 sends an

acknowledgement (ACK) or non-acknowledgement (NACK) message for H-ARQ operation via the DL EU signaling channel 112.

[0020] Figure 2 is a flow diagram of a process 200 for implementing a data lifespan timer 124 in the WTRU 102 for supporting E-DCH transmissions in accordance with the present invention. The WTRU 102 may handle multiple E-DCH transmissions simultaneously using a plurality of data lifespan timers 124.

[0021] When a new data block is received for transmission via the E-DCH 108, the controller 122 activates a data lifespan timer 124 for the data block, associates an H-ARQ process 128 with the data block and the new data block waits in the buffer 126 (step 202). The RNC configures the data lifespan for each E-DCH TrCH or for each E-DCH logical channel. Upon reception in MAC or RLC for UL transmission the timer is initialized for each transmission.

[0022] The value of E-DCH data lifespan timer 124 may be determined by the controller 122 in the WTRU 102 considering several factors such as maximum allowed transmission latency, RLC configuration, and the TrCH block error ratio (BLER) requirement, or the like. For example, the maximum allowed latency determines how long the data can be buffered before delivery. Furthermore, the BLER determines the number of H-ARQ retransmissions which effect transmission latency. The value assigned to the data lifespan timer 124 may also take into account WTRU data processing external to a medium access control entity for EU (MAC-e) in the WTRU 102.

[0023] Application protocols, (e.g., TCP/IP), require minimal transmission latency and variance in transmission latency to achieve maximum throughput. When transmission delays occur, data is expected to be failed and discarded, not delayed and retransmitted. This results in an inefficient behavior of the application.

[0024] For each TTI at step 204, the controller 122 determines whether the data lifespan timer 124 for the data block in the buffer 126 of the WTRU 102 has expired (step 206). If the data lifespan timer 124 has expired, the controller 122 discards the data block and releases the associated H-ARQ process 128 (step

208). The WTRU 102 may report this event to either the RNC 106 or the Node-B 104 (step 210). The WTRU 102 may further report to the Node-B 104 that physical resources allocations are not sufficient by sending a channel allocation request with a unique indication.

[0025] Referring back to step 206, if the data lifespan timer 124 for the data block has not expired, the controller 122 determines whether the data block in the buffer 126 of the WTRU 102 was previously transmitted by the WTRU 102 (step 212). If the data block had been previously transmitted, it is further determined whether data feedback information associated with the data block was received from the Node-B 104 (step 214). If an acknowledgement (ACK) message indicating successful transmission of the data block is received, the data block is discarded from the buffer 126, the associated H-ARQ process 128 becomes available for supporting another data block and the data lifespan timer is reset (step 216). If no feedback message is received, the WTRU 102 waits for the feedback message until the next TTI (step 218).

[0026] If, at step 212, it is determined that the data block had not been previously transmitted by the WTRU 102, or that the data block has been transmitted but a non-acknowledgement (NACK) message indicating unsuccessful transmission of the data block is received, the data block is retransmitted. The controller 122 determines whether the data lifespan timer 124 for the data block is close to expiration (step 220). If the data lifespan timer 124 is not close to expiration, a normal H-ARQ operation is initiated for transmitting the data block (step 222).

[0027] In step 224, the controller 122 determines whether physical resources have been allocated when the data lifespan timer 124 is close to expiration (step 224). If physical resources have been allocated, the controller 122 may optionally prioritize transmission of the data block (step 226). If physical resources have not been allocated, the controller 122 may optionally send an urgent channel allocation request to the Node-B for supporting the transmission of the data block (step 228).

[0028] Referring back to step 214, if a NACK message has been received,

the data block is retransmitted, the controller 122 may determine whether the retransmission counter 130 has reached a maximum retransmission limit (step 280). The retransmission counter 130 is incremented each time the data block is retransmitted, and the maximum retransmission limit is configured by the RNC 106. If the retransmission counter 130 does not reach the maximum retransmission limit, the process 200 proceeds to step 220. If the retransmission counter 130 reaches the maximum retransmission limit, the controller 122 reinitializes the H-ARQ process 128 as long as the data lifespan timer 124 for the data block has not expired (step 232). The retransmission counter 130 is initialized and a new data indicator is incremented to indicate re-initiation of the H-ARQ process 128.

[0029] Although the features and elements of the present invention are described in the preferred embodiments in particular combinations, each feature or element can be used alone without the other features and elements of the preferred embodiments or in various combinations with or without other features and elements of the present invention.

\* \* \*

## CLAIMS

1. A method implemented in a wireless transmit/receive unit (WTRU) for transmission of a data block in an uplink, the method comprising:
  - receiving a data block for transmission from a higher layer;
  - storing the data block in a buffer;
  - assigning a hybrid-automatic repeat request (H-ARQ) process for the data block;
  - transmitting the data block via the H-ARQ process;
  - receiving feedback information for the data block, the data block being retransmitted via the H-ARQ process on a condition that the feedback information indicates unsuccessful delivery of the data block; and
  - initializing a retransmission counter for the H-ARQ process on a condition that the number of retransmissions of the data block has reached a configured maximum limit; and

wherein the initializing the retransmission counter for the H-ARQ process is further performed on the condition that a timer for the data block has expired; and

wherein the initializing the retransmission counter for the H-ARQ process is further performed on the condition that the feedback information indicates successful delivery of the data block.
2. The method of claim 1 wherein the data block is an enhanced dedicated channel (E-DCH) data block.
3. The method of claim 1 wherein a new data block is provided to the H-ARQ process on the conditions that the timer for the data block has expired or the feedback information indicates successful delivery of the data block.
4. The method of claim 1 further comprising:
  - receiving transport channel configuration information from a radio network

controller; wherein the transport channel configuration information includes configuration information for the timer.

5. The method of claim 1 further comprising:  
discarding the data block on a condition that the data lifespan expires.

6. The method of claim 1 further comprising:  
discarding the data block while the data lifespan is not expired on a condition that the feedback information indicates successful delivery of the data block.

7. A wireless transmit/receive unit (WTRU) for transmission of a data block in an uplink, the WTRU comprising:

a memory configured to store a data block for transmission;

a hybrid-automatic repeat request (H-ARQ) process for transmission and retransmission of the data block, the data block being retransmitted on a condition that feedback information indicates unsuccessful delivery of the data block; and

a controller configured to assign a H-ARQ process for transmission and retransmission of the data block, and to initialize a retransmission counter for the H-ARQ process on a condition that the number of retransmissions of the data block has reached a configured maximum limit; wherein the initializing of the retransmission counter for the H-ARQ process is further performed on the condition that a timer for the data block has expired; and wherein the initializing the retransmission counter for the H-ARQ process is further performed on the condition that the feedback information indicates successful delivery of the data blocks.

8. The WTRU of claim 7 wherein the data block is an enhanced dedicated channel (E-DCH) data block.

9. The WTRU of claim 7 wherein a new data block is provided to the H-ARQ process on the conditions that the timer for the data block has expired or the

feedback information indicates successful delivery of the data block.

10. The WTRU of claim 7 wherein the controller is configured to receive transport channel configuration information from a radio network controller; wherein the transport channel configuration information includes configuration information for the timer.

11. The WTRU of claim 7 wherein the controller is configured to discard the data block on a condition that the data lifespan expires.

12. The WTRU of claim 7 wherein the controller is configured to discard the data block while the data lifespan is not expired on a condition that the feedback information indicates successful delivery of the data block.

13. A radio network controller comprising:  
a controlling device configured to send transport channel configuration information to a wireless transmit/receive unit (WTRU) for transmitting enhanced uplink data blocks; wherein the transport channel configuration information includes a timer for transmission of the enhanced uplink data blocks such that the WTRU is configured to initiate a retransmission counter for a H-ARQ process for an enhanced uplink data block on a condition that the number of retransmissions of the data block has reached a configured maximum limit; wherein the initializing of the retransmission counter for the H-ARQ process is further performed on the condition that a timer for the data block has expired; and wherein the initializing the retransmission counter for the H-ARQ process is further performed on the condition that the feedback information indicates successful delivery of the data blocks.

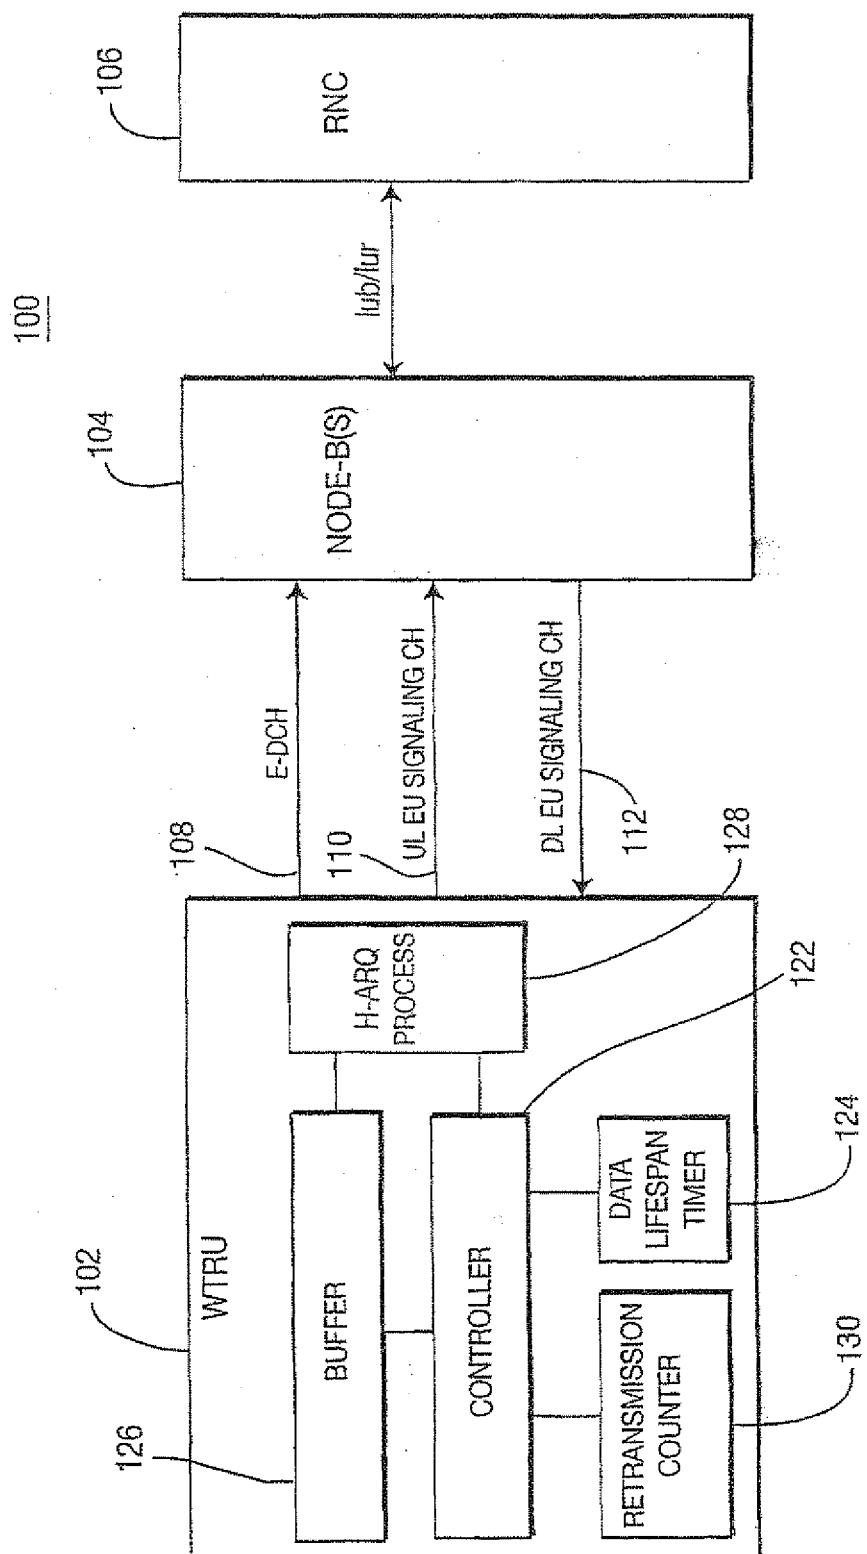


FIG. 1

FIG. 2

200

