



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2651080 C 2015/12/08

(11)(21) **2 651 080**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 2009/01/23

(41) Mise à la disp. pub./Open to Public Insp.: 2009/07/29

(45) Date de délivrance/Issue Date: 2015/12/08

(30) Priorité/Priority: 2008/01/29 (FR08 50540)

(51) Cl.Int./Int.Cl. *F01D 25/18* (2006.01),
B01D 45/14 (2006.01), *F02C 7/06* (2006.01),
F01M 13/04 (2006.01)

(72) Inventeurs/Inventors:
BART, JACQUES RENE, FR;
DERENES, JACKY RAPHAEL MICHEL, FR;
ROUSSELIN, STEPHANE, FR

(73) Propriétaire/Owner:
SNECMA, FR

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : DISPOSITIF DE DESHUILAGE ET TURBOMACHINE AINSI EQUIPEE

(54) Title: DEOILING DEVICE AND TURBOMACHINE COMPRISING THIS DEVICE

(57) **Abrégé/Abstract:**

The invention relates to a deoiling device. It comprises a tube, a first bearing and a second bearing, the first and second bearings being placed in an oil chamber in which an oil fog is maintained by rotation of the bearings. A deoiler is provided in one wall of the oil chamber. The deoiler centrifuges oil in suspension in air and allows a deoiled air flow to pass inside the tube. The tube comprises a closing cap fitted with one or several outlet orifices in its upper part designed to evacuate air, and an oil drain orifice in its lower part.



ABSTRACT OF THE DISCLOSURE

The invention relates to a deoiling device. It comprises a tube, a first bearing and a second bearing, the first and second bearings being placed in an oil chamber in which an oil fog is maintained by rotation of the bearings. A deoiler is provided in one wall of the oil chamber. The deoiler centrifuges oil in suspension in air and allows a deoiled air flow to pass inside the tube. The tube comprises a closing cap fitted with one or several outlet orifices in its upper part designed to evacuate air, and an oil drain orifice in its lower part.

DEOILING DEVICE AND TURBOMACHINE COMPRISING THIS DEVICE**DESCRIPTION**

The invention relates to a deoiling device
5 comprising a tube, a first bearing and a second
bearing, the first bearing and second bearings being
placed in an oil chamber in which an oil fog is
maintained, a deoiler being provided in one wall of the
oil chamber, the deoiler centrifuging oil in suspension
10 in air and allowing a deoiled air flow to pass inside
the tube.

On aircraft turbomachines, bearings are
contained in containments that have the function of
preventing lubrication oil from escaping into the
15 engine. Lubrication of bearings causes a sustained oil
fog due to the rotation of rotating parts.

Ventilation air circulates in the bearing
containments. This air contains oil and must be
deoiled before it leaves the containment. This is why
20 a deoiler is provided. The deoiler may for example
comprise a honeycomb structure on which oil droplets
stick and are then expelled into the bearings
containment by centrifuging.

However, the deoiler may become less
25 efficient. This will be the case for example at a low
engine rotation speed because the deoiler turns less
quickly and consequently centrifuging is less
efficient. It is also the case if the deoiling vents
become dirty or if the containment cap lip seals are
30 deteriorated. The deoiling vents are tubes for the

evacuation of residual oil in the front containment by centrifuging.

In this case, oiled air goes as far as the sheet metal cone called the plug or central body that extends the turbomachine on the output side. This air is expelled in the lower part in the primary stream or directly into the plug. The consequences are dirt generated by oil on the plug and the outer nacelle. This dirt is unacceptable, particularly in business aviation in which the engines and especially the outside of the nacelle must remain perfectly clean.

This situation also increases oil consumption which is expensive for the engine user.

The purpose of this invention is a deoiling device that overcomes these disadvantages.

These purposes are achieved according to the invention by the fact that the tube comprises a closing cap fitted with one or several outlet orifices at its upper part designed to evacuate air, and a drain orifice in its lower part for the recovery of oil.

Due to these characteristics, oiled air strikes the closing cap. Oil droplets present in air stick on this cap and drop by gravity to the oil drain orifice. Deoiled air escapes through the upper part of the closing cap in which orifices are provided for this purpose.

Thus, perfectly clean air enters the primary stream or directly into the plug. This prevents the accumulation of dirt.

In one embodiment, the tube is composed of a low pressure shaft extended by a hollow shaft that

fits onto the low pressure shaft. This embodiment mainly concerns small engines like those used in business aviation.

According to another embodiment, the tube
5 is composed of a central ventilation tube.

This embodiment relates to larger engines such as those used in commercial aviation. These engines are sufficiently large so that a central ventilation tube can be fitted in them.

10 Advantageously, the oil drain orifice is connected through a pipe to an oil recovery reservoir.

Secondly, the invention relates to a double flow turbomachine comprising a primary flow and a secondary flow and comprising a deoiling device. The
15 air outlet orifices are extended by ducts that bring air into the primary flow of the turbomachine.

In another embodiment, the invention relates to a turbomachine in which the outlet orifices are provided in the cap leading directly into the plug.

20 Other characteristics and advantages of this invention will become clear after reading the following description of an example embodiment given for illustrative purposes with reference to the appended figures. In these figures:

25 - figure 1 shows a general sectional view of a turbojet;

- figure 2 shows a sectional view of a deoiling device according to prior art;

30 - figure 3 shows a sectional view of a deoiling device according to this invention;

- figure 4 shows an enlarged view of part of the deoiling device shown in figure 3;

- figure 5 shows a detailed view of the oil reception reservoir.

5 Figure 1 shows a general view of an aircraft turbojet in which the invention could be used. Starting from the forward end and working in the aft direction, this comprises a fan 2, a low pressure compressor 4, a high pressure compressor 6, a
10 combustion chamber 8, a high pressure turbine 10 and a low pressure turbine 12. Reference 14 denotes the zone concerned by the invention, which is shown in more detail in figure 2. Reference 15 denotes a deoiling vent.

15 Reference 16 in figure 2 denotes a first bearing, and reference 18 denotes a second bearing. Bearings 16 and 18 are located inside a containment 20 forming an oil chamber. Bearings 16 and 18 are lubricated by a lubrication oil flow from a sprinkler
20 22 shown diagrammatically by arrows 24. Rotation of bearings 16 and 18 leads to an oil fog that fills the containment 20. The containment 20 is delimited by a pressurised containment cap 26. Pressurisation air enters into the chamber 20 as shown diagrammatically by
25 arrows 28. A deoiler 30 is provided around the central ventilation tube 32. The deoiler 30 comprises a honeycomb structure 34 onto which fine oil droplets stick. Due to rotation of the deoiler, these fine droplets are ejected by centrifugal force as shown
30 diagrammatically by arrows 36, while deoiled air passes through the deoiler and penetrates through orifices 38

inside the central ventilation tube 32. Deoiled air then passes through the central ventilation tube from the forward end in the aft direction as shown by arrow 40, and then penetrates into the plug after passing
5 through the outlet orifice 42. Reference 44 denotes the low pressure shaft.

With such a device, if the deoiler 30 becomes less efficient, badly deoiled air passes through it and reaches the plug and is expelled in the
10 lower part in the primary stream. This results in dirt generated by oil on the plug and the outer nacelle, which is not acceptable, particular in business aviation.

Figures 3 and 4 show an example embodiment
15 of a deoiling device according to this invention. Given that this device is intended to equip a small turbojet like a business aircraft, there is no room to house a central ventilation tube. This is why the low pressure shaft 44 is connected to a hollow shaft 46
20 that extends the low pressure shaft 44. According to this invention, a cap 48 is installed at the right end (according to figures 3 and 4) of the hollow shaft 46. The deoiler 30 is mounted on the hollow shaft 46. The closing cap 48 is fitted with one or several outlet
25 orifices 50 located in its upper part. It comprises a cavity 52 in its lower part through which oil drains. A duct 55 connects the cavity 52 to a small reservoir 56 used for oil recovery (figure 3).

The device operates as follows. Oiled air
30 that has passed through the deoiler 30 comes into contact with the internal walls of the hollow shaft 46

because of the rotation of the hollow shaft. The oil droplets stick to the inside wall of the hollow shaft and they are centrifuged onto the closing cap 48 at the end of the hollow shaft. Deoiled air escapes through the outlet orifices 50 while oil concentrates in the cavity 52.

Orifices 50 may open up directly into the plug or the ducts 54 to transport deoiled air into the primary stream.

Figure 5 shows a detailed view of the reservoir 56 that is used to collect oil. The reservoir is fixed onto the exhaust casing 57. It comprises a bushing 58 used to connect the pipe 55 and a plug 60 for draining the reservoir.

CLAIMS

1) Deoiling device comprising a tube, a first bearing and a second bearing, the first and second bearings being placed in an oil chamber in which an oil fog is maintained by rotation of the bearings, a deoiler being provided in one wall of the oil chamber, the deoiler centrifuging oil in suspension in air and allowing a deoiled air flow to pass inside the tube, wherein the tube comprises a closing cap fitted with at least one outlet orifice in an upper part thereof to evacuate air and an oil drain orifice in a lower part thereof.

2) The deoiling device according to claim 1, wherein the tube is composed of a low pressure shaft extended by a hollow shaft that fits onto the low pressure shaft.

3) The deoiling device according to claim 1, wherein the tube is composed of a central ventilation tube.

4) The deoiling device according to any one of claims 1 to 3, wherein the oil drain orifice is connected through a pipe to an oil recovery reservoir.

5) Double flow turbomachine comprising a primary flow and a secondary flow and comprising a deoiling device according to any one of claims 1 to 3, wherein the at least one outlet orifice is extended by a duct

that brings air into the primary flow of the turbomachine.

6) Turbomachine comprising a plug and comprising a deoiling device according to any one of claims 1 to 3, wherein the at least one outlet orifice provided in the cap opens up directly in the plug.

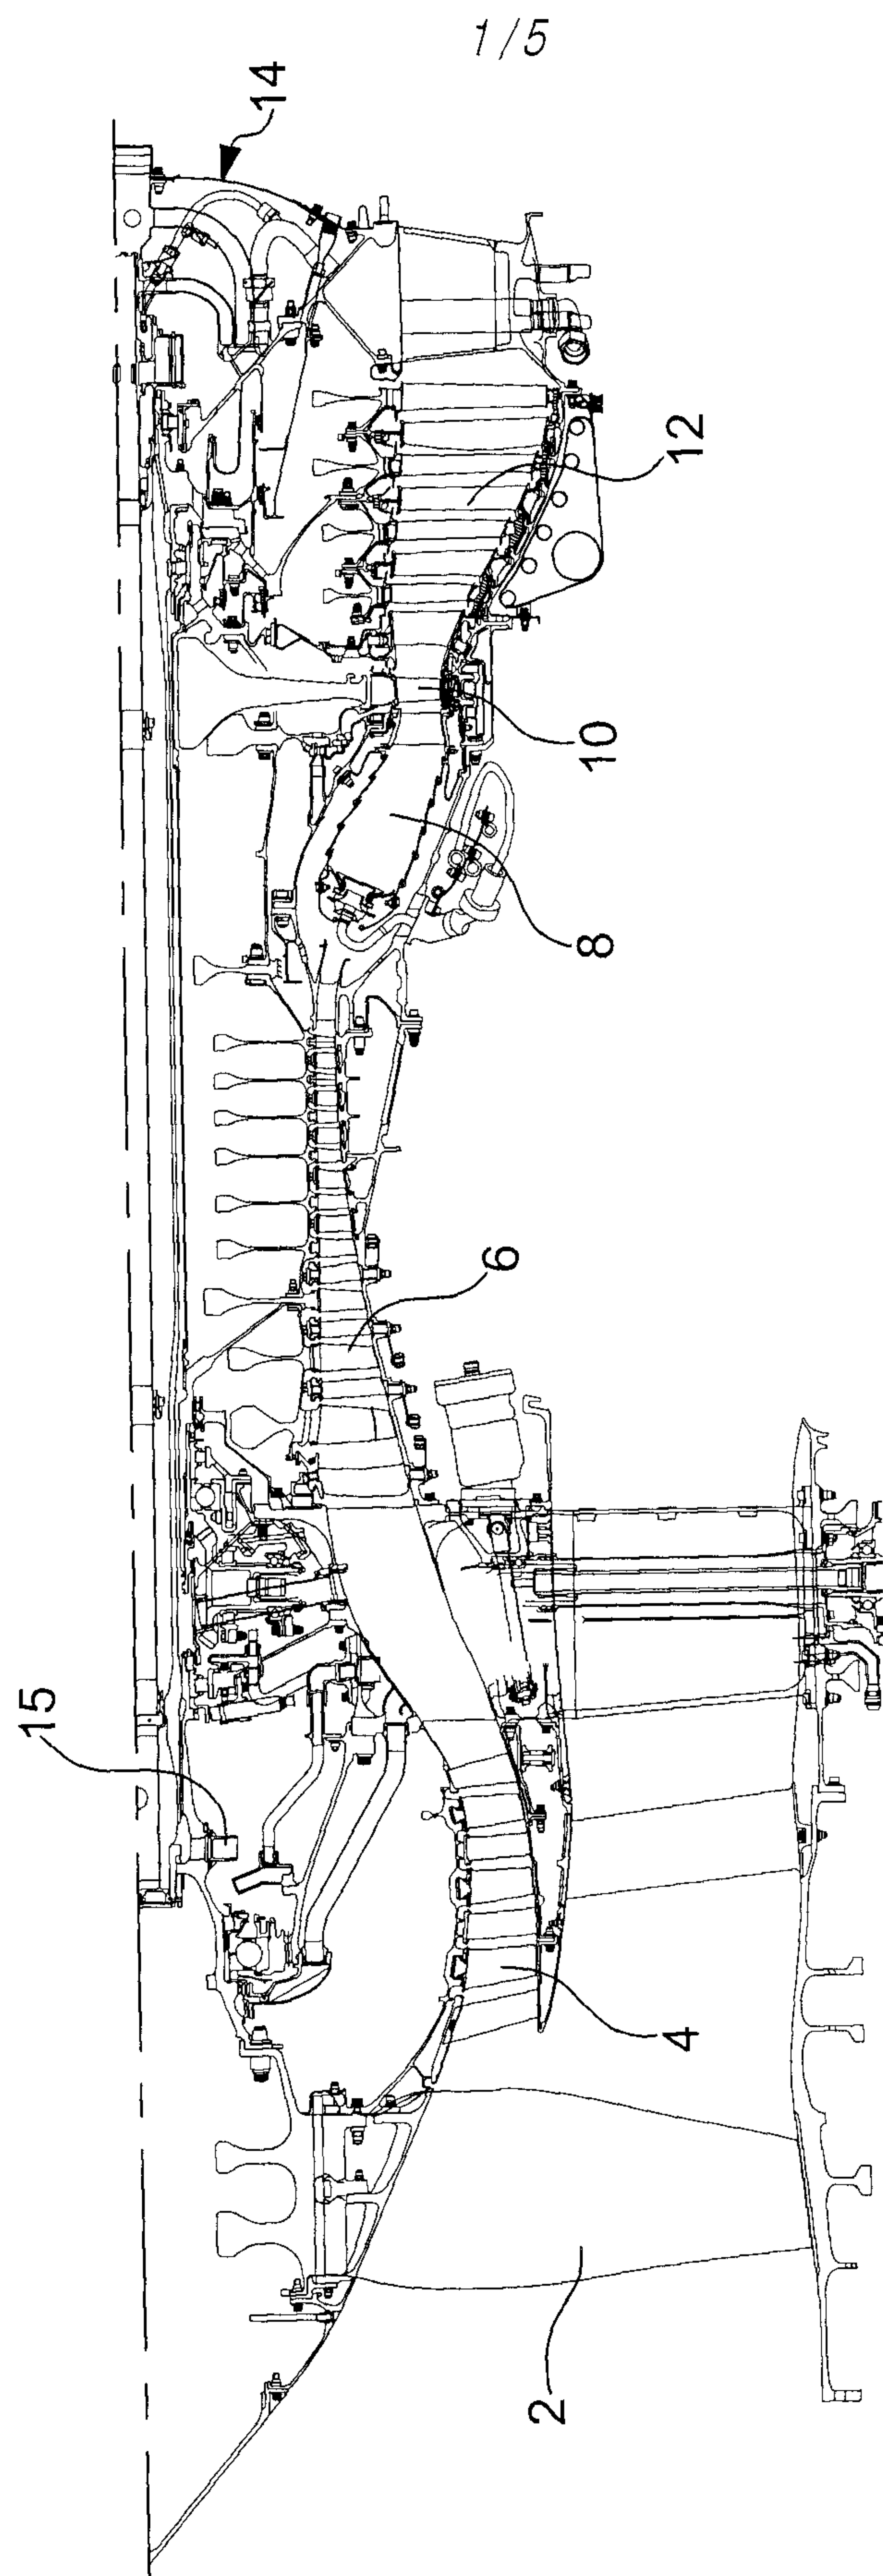


FIG. 1

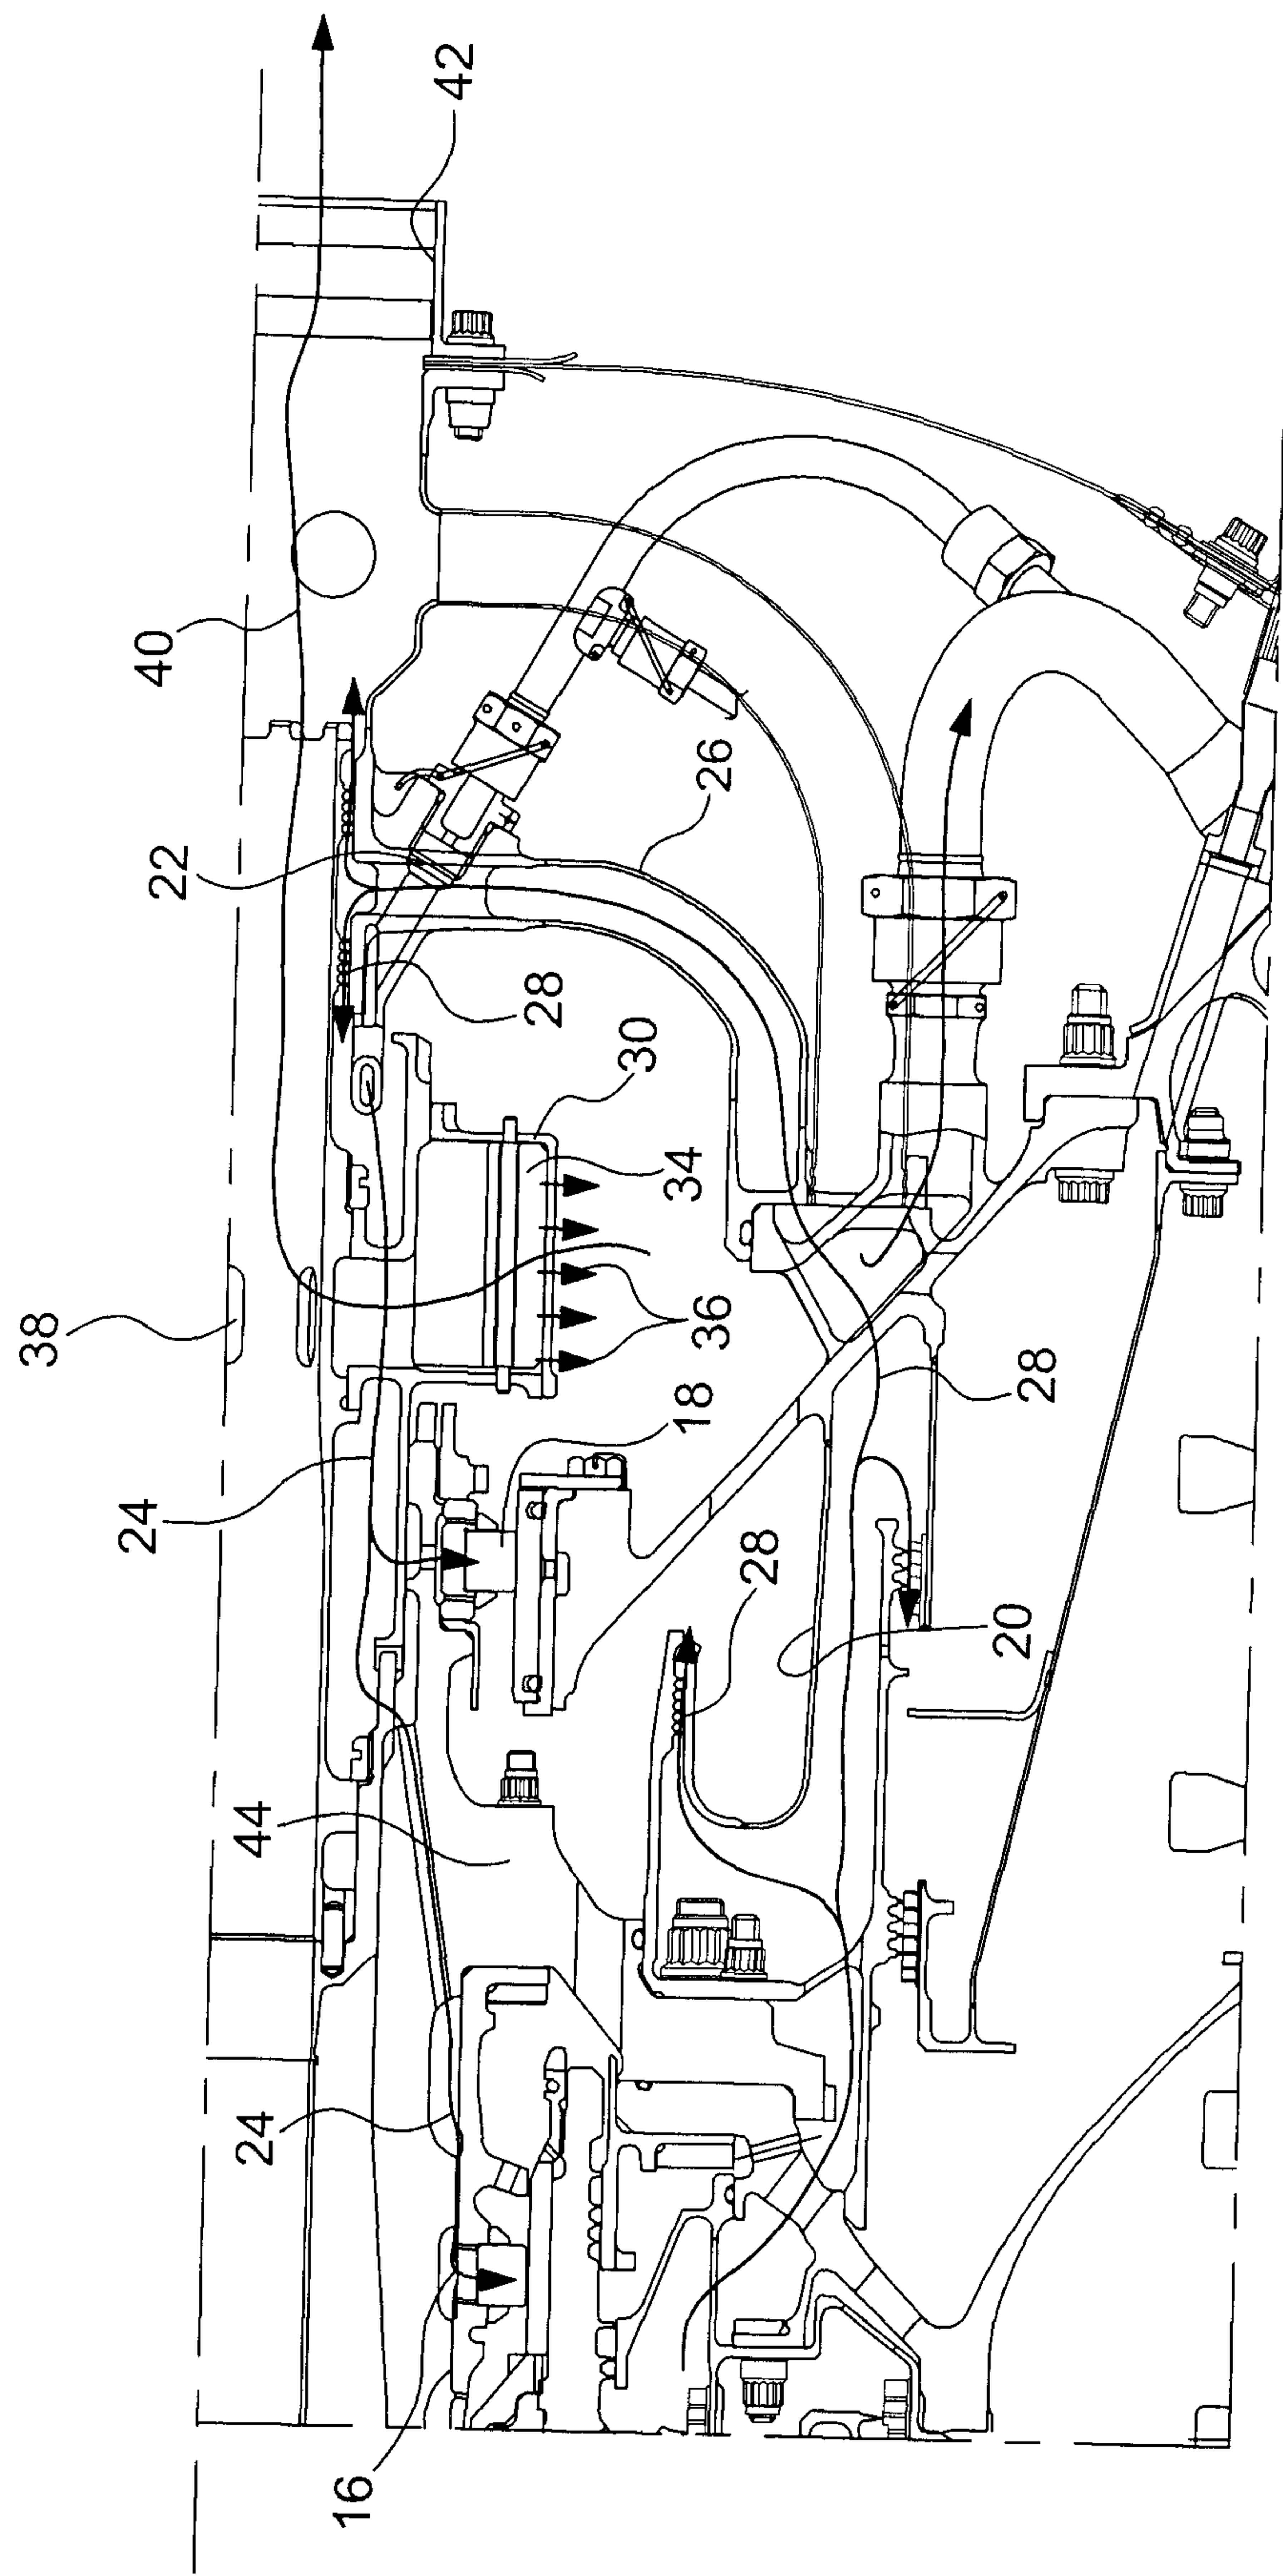


FIG. 2

3/5

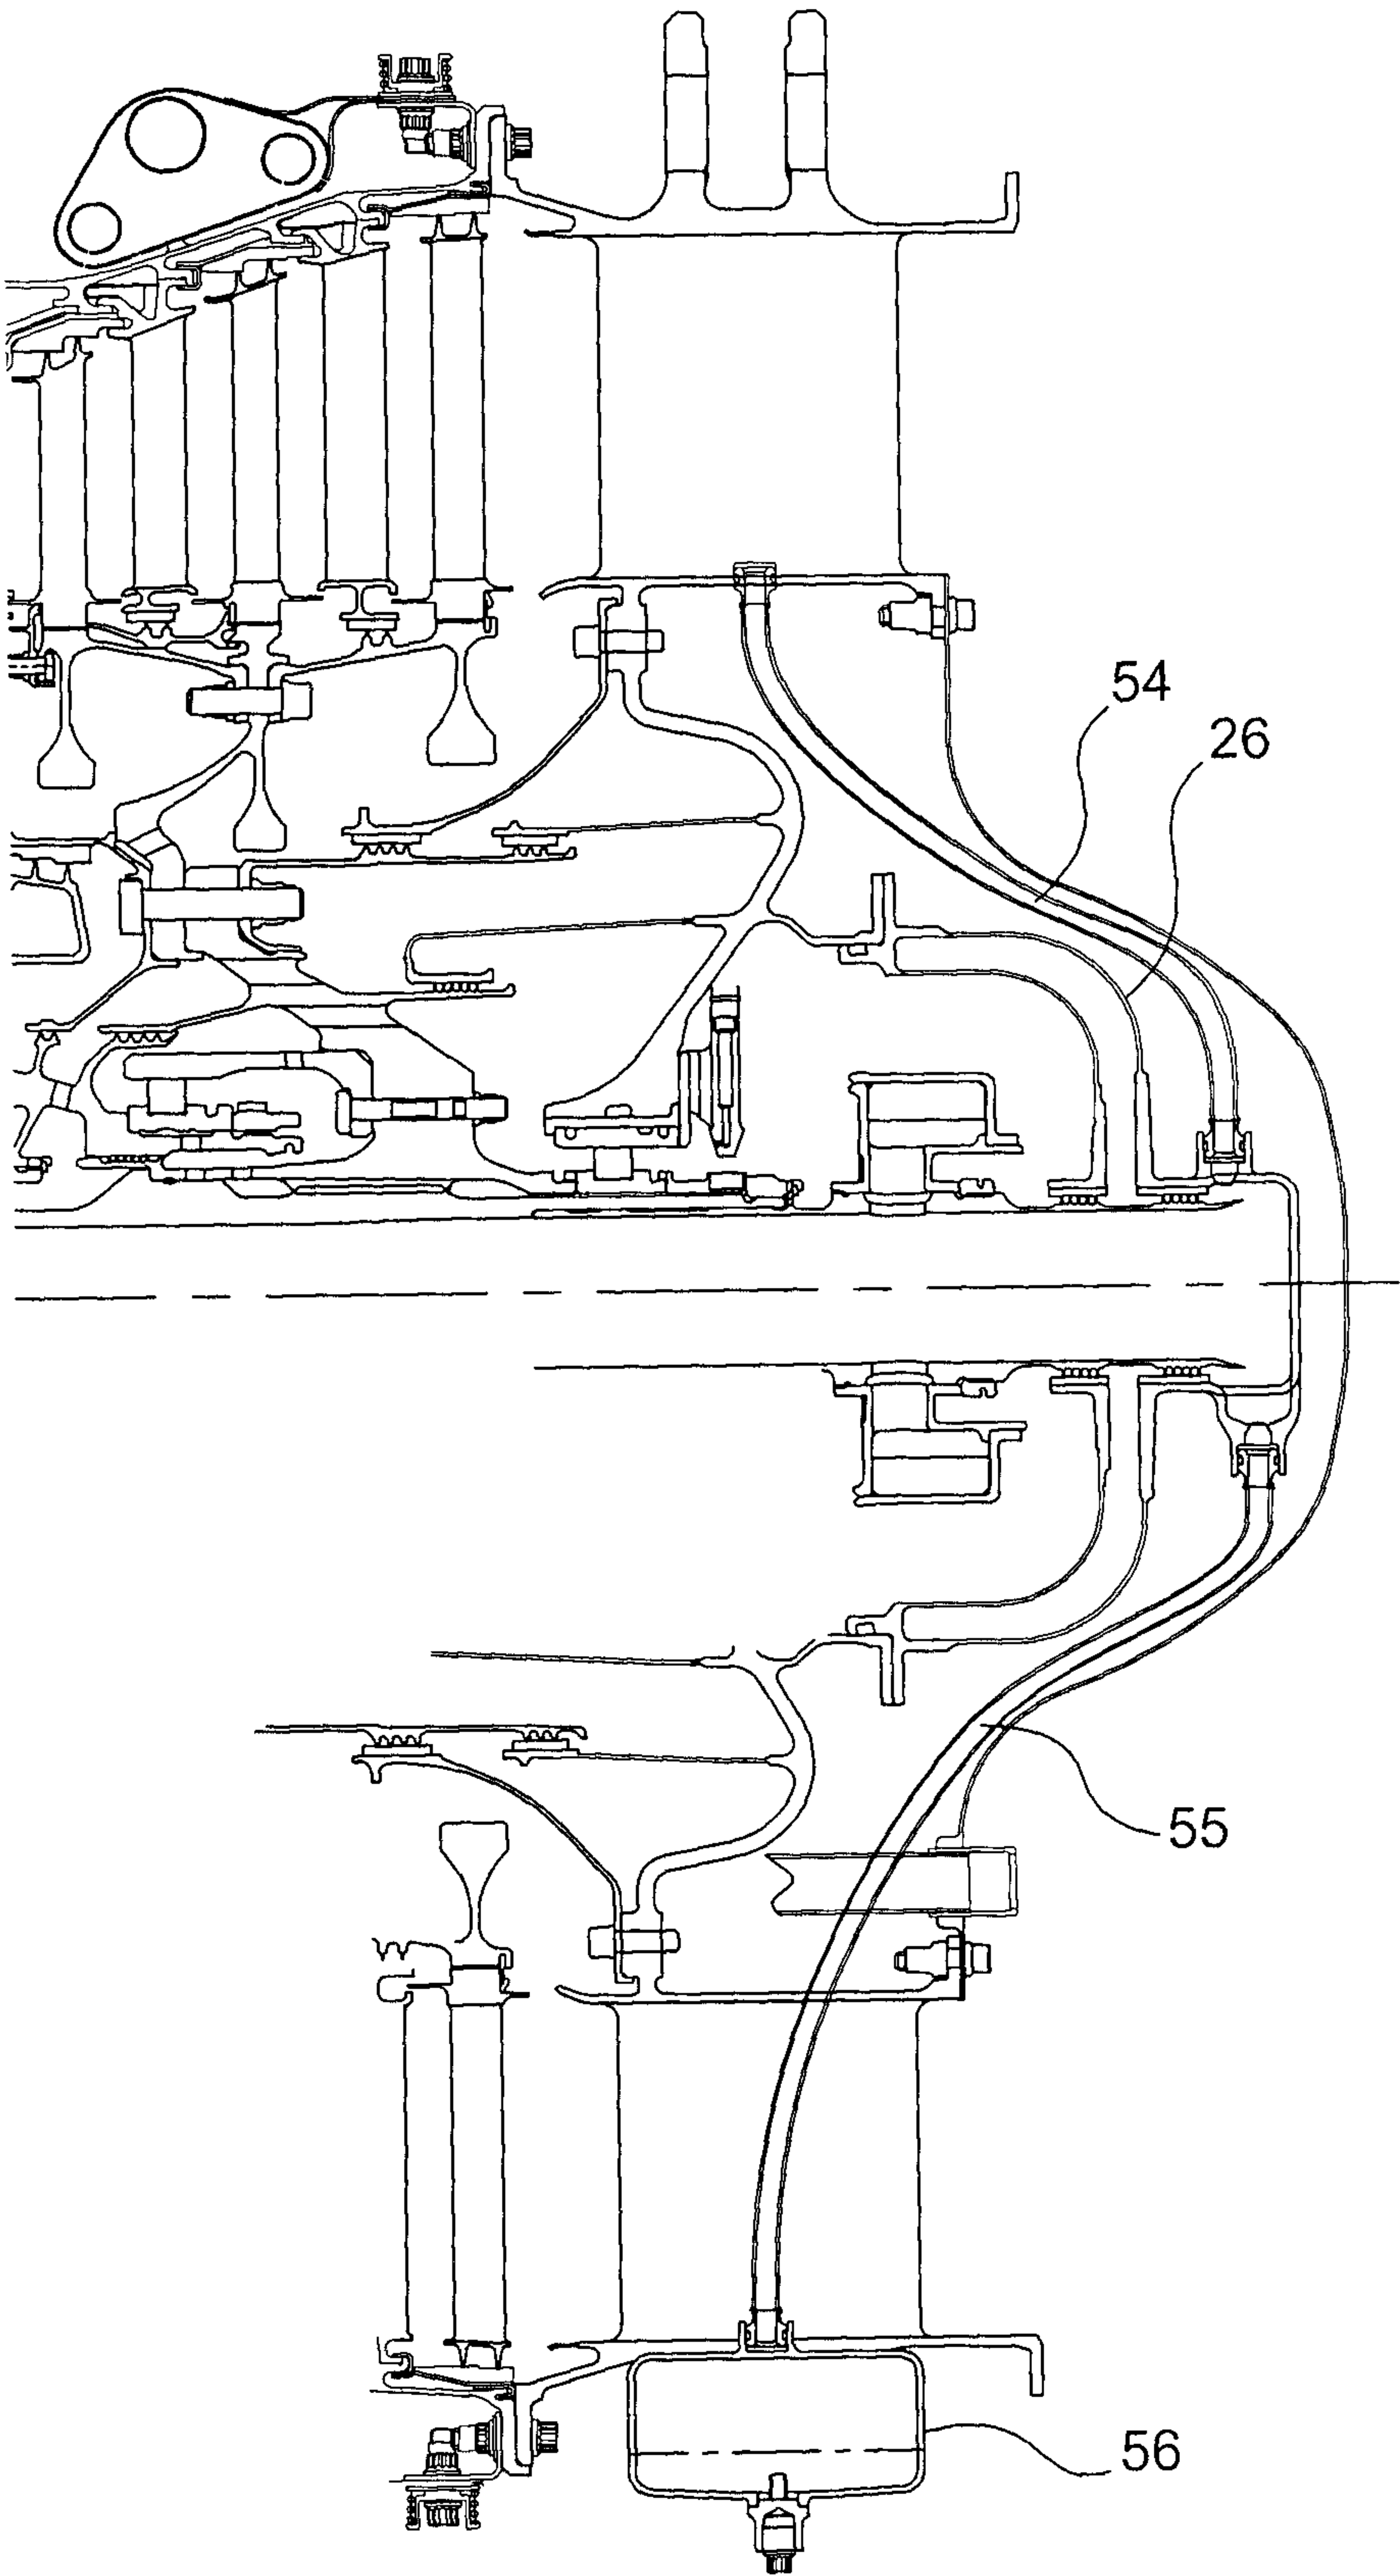


FIG. 3

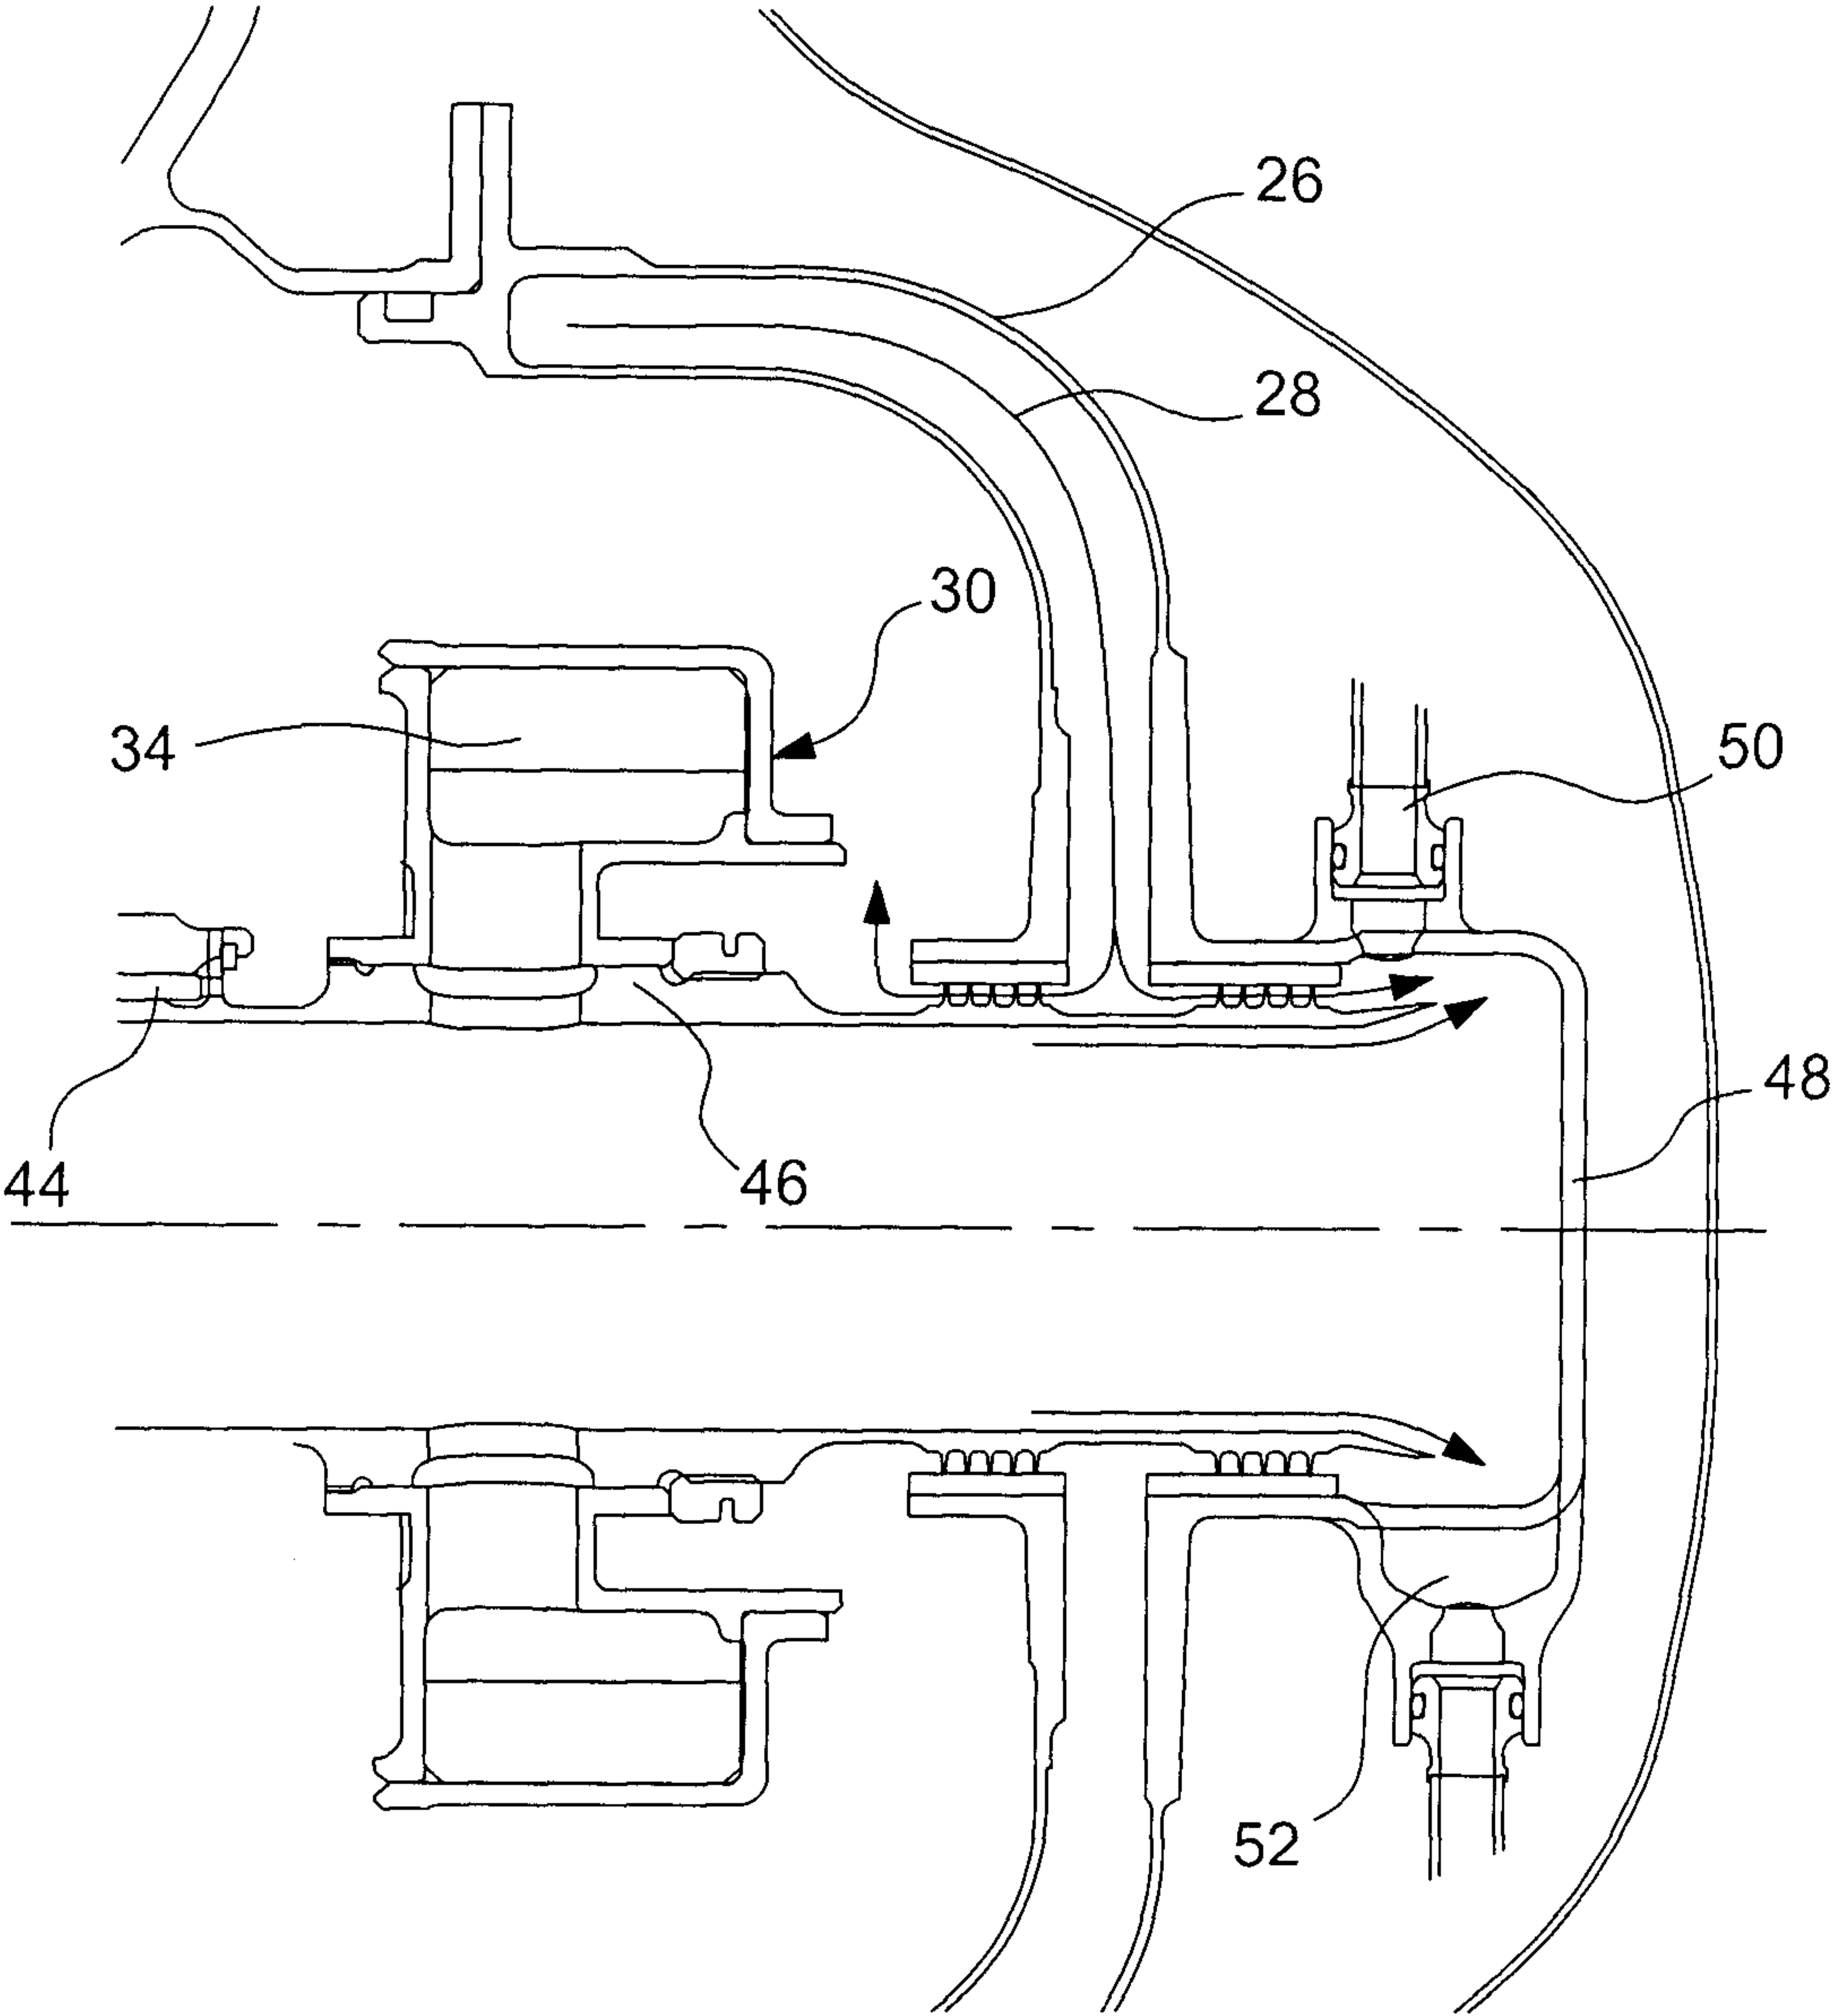


FIG. 4

5/5

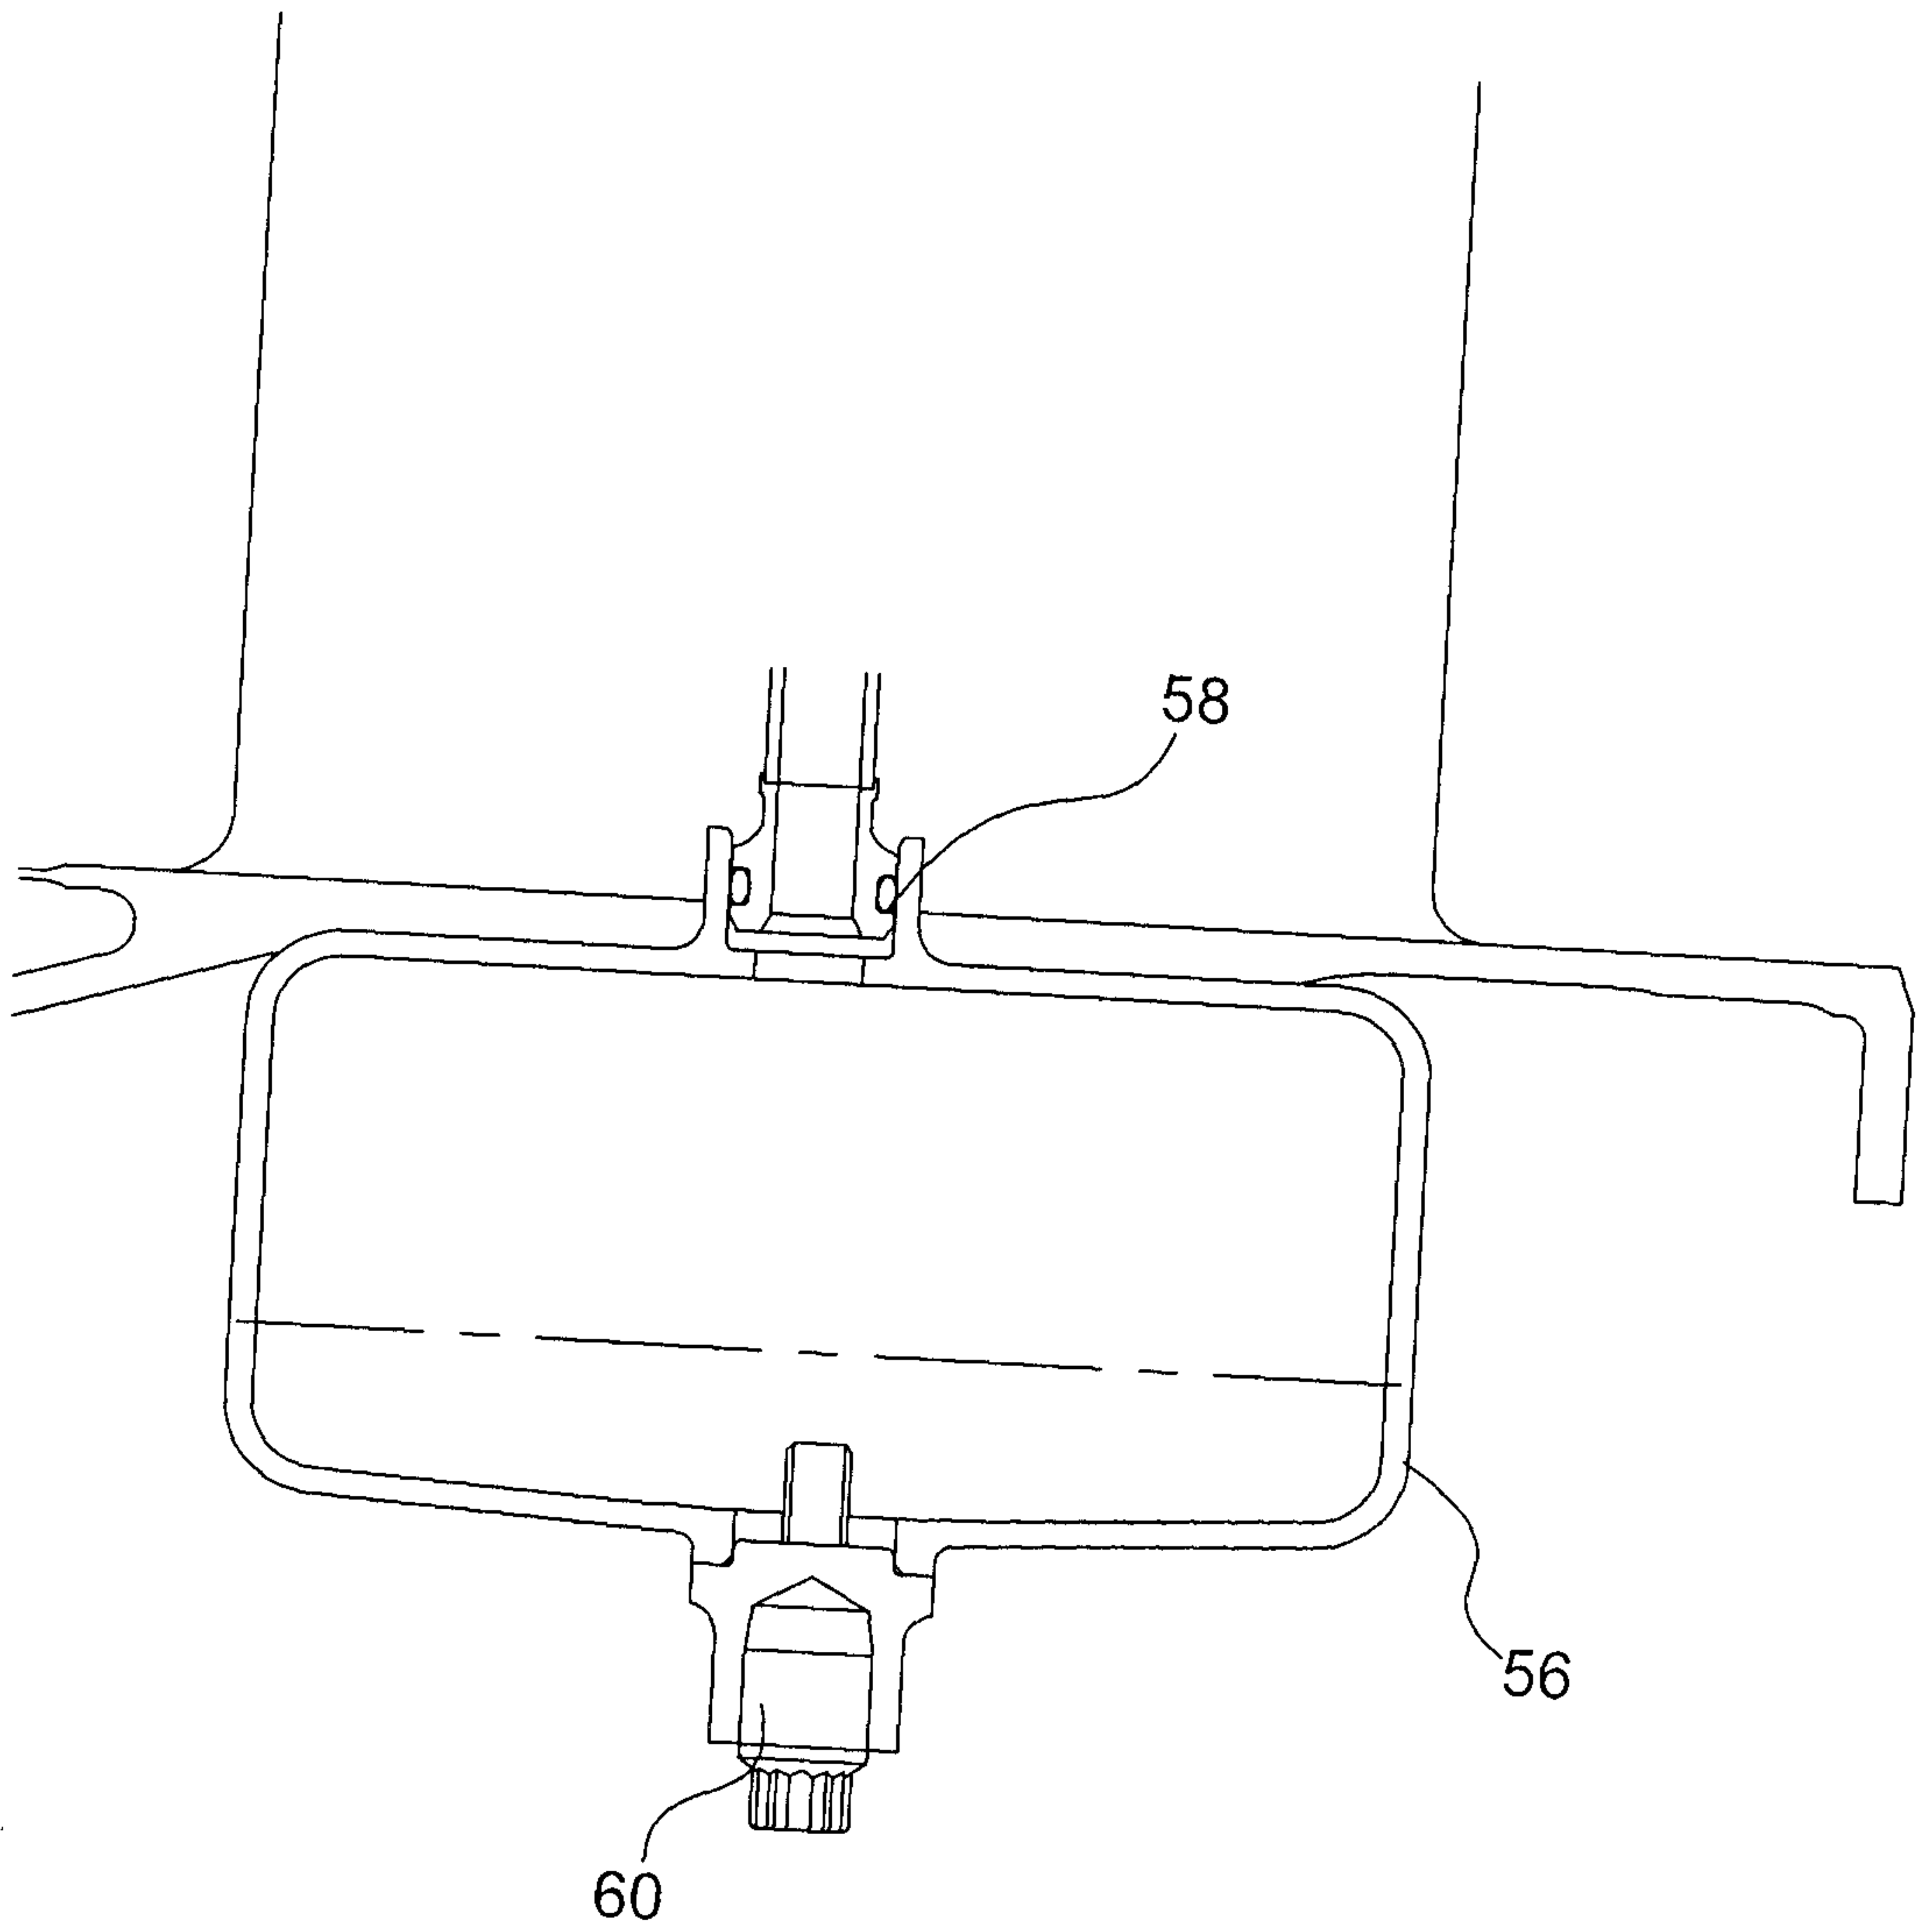


FIG. 5