


W. W. MURPHEY.
COMBINATION BATH AND TOILET CABINET.
APPLICATION FILED JAN. 23, 1911.

1,038,630.

Patented Sept. 17, 1912.

2 SHEETS—SHEET 1.

Fig. 1.

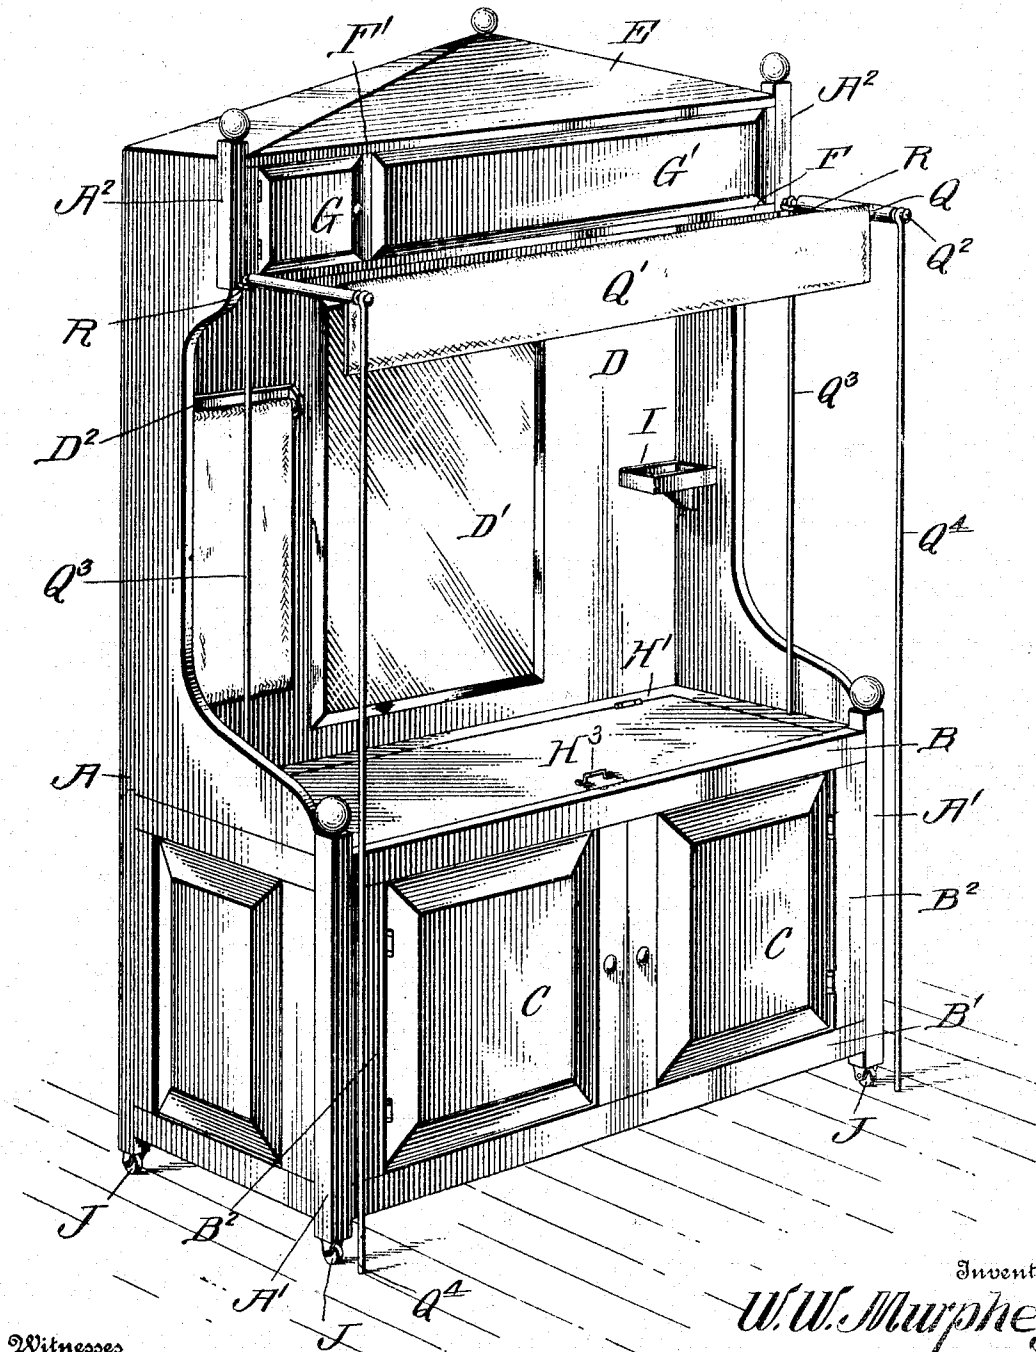

Witnesses

C. W. Holmes
Rea P. Wright

Inventor

W. W. Murphey

By

O. Mearns Brock

Attorneys


W. W. MURPHEY.
COMBINATION BATH AND TOILET CABINET.
APPLICATION FILED JAN. 23, 1911.

1,038,630.

Patented Sept. 17, 1912.

2 SHEETS—SHEET 2.

Fig. 2.

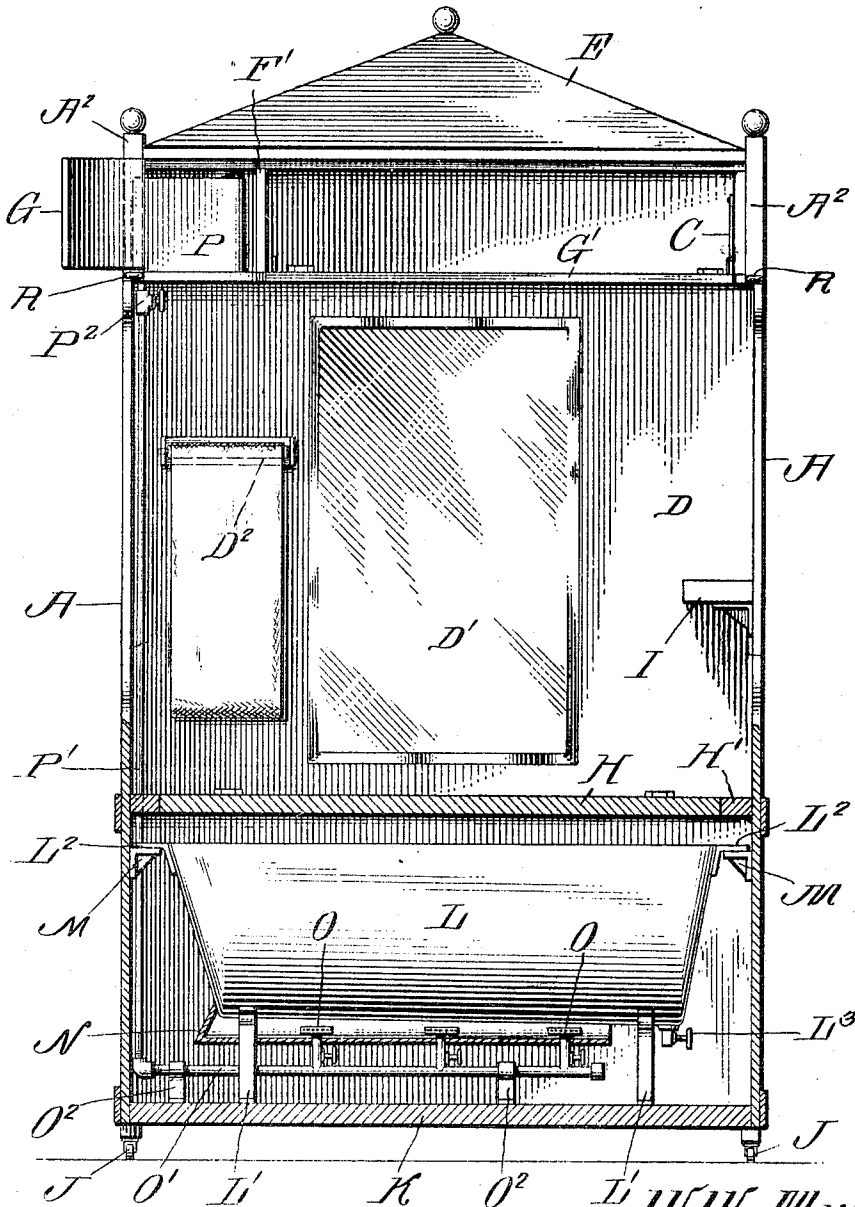

Inventor

W. W. Murphey

Witnesses

C. H. Holmes
Oscar Wright

By

O'Neale & Brock

Attorneys

UNITED STATES PATENT OFFICE.

WILLIAM W. MURPHEY, OF LOUISVILLE, KENTUCKY.

COMBINATION BATH AND TOILET CABINET.

1,038,630.

Specification of Letters Patent.

Patented Sept. 17, 1912.

Application filed January 23, 1911. Serial No. 604,258.

To all whom it may concern:

Be it known that I, WILLIAM W. MURPHEY, a citizen of the United States, residing at Louisville, in the county of Jefferson and State of Kentucky, have invented a new and useful Improvement in a Combined Bath and Toilet Cabinet, of which the following is a specification.

This invention relates to cabinets and more particularly to combined bath and toilet cabinets, the object being to provide a portable cabinet for house-hold use with a bath tub.

Another object of my invention is to provide a cabinet which can be completely closed by a curtain so that the bather will be as private as in a bath room.

With these and other objects in view, the invention consists in the novel features of construction, combination and arrangement of parts, hereinafter fully described and pointed out in the claim.

In the drawings forming a part of this specification:—Figure 1 is a perspective view of my improved cabinet. Fig. 2 is a vertical sectional view through the cabinet.

Referring to the drawings A indicates the side members of my improved cabinet provided with posts A' at their lower front edges which are connected together by cross-pieces B, B', adjacent their upper and lower ends which are connected together at their ends by vertical strips B², to which are hinged doors C completely closing the opening between the cross-piece and strips. The side members are provided with cut out portions and enlarged upper portions to which are connected posts A².

A back D is secured between the side members, provided with a mirror D' and a towel-rack D². Secured on the upper ends of the side members and back, is a top E and secured between the side members at the lower ends of the posts A², is a shelf F having a partition F' secured between the top and shelf, adjacent one end forming a tank-box and a clothes box. Hinged to one of the posts is a door G which completely closes the tank box and hinged to the shelf

is a door G' which completely closes the clothes box.

Secured to the sides and back on a line with the pieces B, is a frame H' to which is hinged a top H forming a top for the cabinet and provided with a handle H³, said top being adapted to fold against the back. Secured to one of the sides is a comb and brush tray I. The cabinet is mounted on rollers J, so that it can be moved from place to place as desired.

A bottom K is formed in the cabinet on which is mounted the feet L' of a bath-tub, L which is provided with angle-plates L² adapted to rest on brackets M secured to the side members of the cabinet, so that the tub will be easily supported therein with a drain-cock L³ at one end. Secured to the underside of the tub is an apron N in which are arranged a series of burners O carried by a pipe O' mounted in brackets O² secured to the bottom of the cabinet. One end of the pipe O' is connected to a pipe P' leading from an oil-tank P arranged in the tank-box at the top of the cabinet. The pipe P' is provided with a stop-cock P² under the tank-box so that the oil supply can be cut off from the burners when desired.

A curtain pole Q extends across and in advance of the upper portion of the cabinet and carries at its ends transversely arranged arms Q². They are supported by standards Q³ and Q⁴ the latter of which extend to the floor in advance of and to one side of the doors C. A suitable curtain Q' is carried by the rod Q and is adapted to close the front of the cabinet when the doors C are open at their rear ends the arms Q² engage eyes R carried by the posts A² and the standards Q³ and Q⁴ have suitable eyes at their upper ends which are engaged by the arms Q², so that the standards and curtain can be readily removed from the cabinet.

Having thus fully described my invention, what I claim as new and desire to secure by Letters Patent is:—

A device of the kind described comprising a cabinet, hinged front doors carried by

the lower portion of the cabinet, a top hinged to the cabinet back, a tub arranged below said top and to the rear of said doors, standards arranged in advance of and to
5 on side of the doors, said standards being connected to the upper portion of the cabinet, and a pole supported by said standards,

and a curtain carried by said pole and adapted to drop in advance of said doors and hinged top.

W. W. MURPHEY.

Witnesses:

B. A. REED,
F. M. MORRIS.