



(51) International Patent Classification:

F16L 55/26 (2006.01) *F16L 55/12* (2006.01)
F16L 55/11 (2006.01)

(21) International Application Number:

PCT/US2012/071737

(22) International Filing Date:

27 December 2012 (27.12.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/358,287 25 January 2012 (25.01.2012) US

(71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; P.O. Box 4740, Houston, Texas 77210-4740
(US).

(72) Inventors; and

(71) Applicants : **XU, YingQing** [US/US]; 11711 Rivergroove
Ct., Tomball, Texas 77377 (US). **KELBIE, Graeme Mi-**
chael [GB/US]; 14306 Cypress Green Drive, Cypress,
Texas 77429 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: TREATMENT PLUG AND METHOD OF ANCHORING AND SEALING THE SAME TO A STRUCTURE

FIG. 1

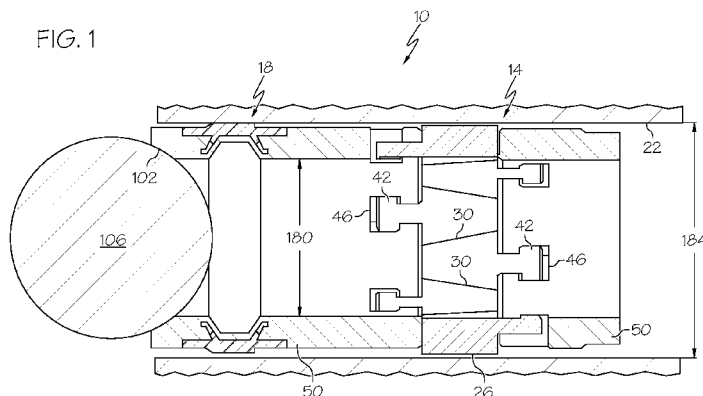

(57) Abstract: A treatment plug includes, an anchor runnable and settable within a structure having, at least two slips movably engaged with one another to cause the at least two slips to move radially into engagement with the structure in response to longitudinal movement between the at least two slips. The treatment plug also has at least one seal having a deformable metal member configured to radially deform into sealing engagement with the structure in response to longitudinal compression of the deformable metal member, and a seat that is sealingly receptive to a plug.

TREATMENT PLUG AND METHOD OF ANCHORING AND SEALING THE SAME TO A STRUCTURE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Application No. 13/358287, filed on January 25, 2012, which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] Tubular systems, such as those used in the completion and carbon dioxide sequestration industries often employ anchors to positionally fix one tubular to another tubular, as well as seals to seal the tubulars to one another. Although existing anchoring and sealing systems serve the functions for which they are intended, the industry is always receptive to new systems and methods for anchoring and sealing tubulars.

BRIEF DESCRIPTION

[0003] Disclosed herein is a treatment plug. The treatment plug includes, an anchor runnable and settable within a structure having, at least two slips movably engaged with one another to cause the at least two slips to move radially into engagement with the structure in response to longitudinal movement between the at least two slips. The treatment plug also has at least one seal having a deformable metal member configured to radially deform into sealing engagement with the structure in response to longitudinal compression of the deformable metal member, and a seat that is sealingly receptive to a plug.

[0004] Further disclosed herein is a method of anchoring and sealing a treatment plug. The method includes, longitudinally moving a first half of a plurality of slips relative to a second half of the plurality of slips, altering a radial dimension defined by the plurality of slips, anchoring the plurality of slips to a structure, longitudinally compressing at least one deformable member, and sealingly engaging the structure with the at least one deformable member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The following descriptions should not be considered limiting in any way. With reference to the accompanying drawings, like elements are numbered alike:

[0006] FIG. 1 depicts a cross sectional view of a treatment plug disclosed herein positioned within a structure;

[0007] FIG. 2 depicts a side view of the treatment plug of FIG. 1 shown in a non-anchored and non-sealing configuration;

[0008] FIG. 3 depicts a side view of the treatment plug of FIG. 1 shown in a sealed and anchored configuration;

[0009] FIG. 4 depicts a partial cross sectional view of a seal disclosed herein shown in a non-sealing configuration;

[0010] FIG. 5 depicts a partial cross sectional view of the seal of FIG. 4 shown in a sealing configuration;

[0011] FIG. 6 depicts a side view of an alternate embodiment of a treatment plug disclosed herein;

[0012] FIG. 7 depicts a cross sectional view of the treatment plug of FIG. 6 with a swaging tool engaged therewith; and

[0013] FIG. 8 depicts a cross sectional view of the treatment plug of FIG. 6 with a plug seated thereagainst.

DETAILED DESCRIPTION

[0014] A detailed description of one or more embodiments of the disclosed apparatus and method are presented herein by way of exemplification and not limitation with reference to the Figures.

[0015] Referring to FIG. 1, an embodiment of a treatment plug disclosed herein is illustrated at 10. The treatment plug 10 includes an anchor 14 and at least one seal 18, with a single seal 18 being illustrated in this embodiment, that are anchorable and sealable, respectively to a structure 22 shown herein as a casing or liner, although any tubular shaped structure, including an open earth formation borehole, could serve as the structure.

[0016] The anchor 14 has a plurality of slips 26, a first half 26A of which are movable in a first direction according to arrow 'A' relative to a second half 26B movable in a second direction according to arrow 'B,' the first direction being longitudinally opposite to the second direction. Each of slips 26 has opposing perimetrical edges 30 that are tapered to form a perimetrical wedge shape. Additionally each of slips 26 in the first half 26A are positioned perimetrically between adjacent slips 26 of the second half 26B. A tongue 34 on one edge 30 fits into a groove 38 on a complementary edge 30. This tongue 34 and groove 38 arrangement maintains the slips 26 at a radial dimension relative to each other of the slips

26. As such, all of the slips 26 move radially in unison in response to the first half 26A moving longitudinally relative to the second half 26B of the slips 26. One should appreciate that a perimetrical (indeed substantially circumferential in the Figures) dimension defined by the slips 26 will increase when the two halves 26A, 26B are moved longitudinally toward one another and decrease as the two halves 26A, 26B are moved longitudinally away from one another. A 'T' shaped tab 42 on each of the slips 26 is radially slidably engaged with a slot 46 in a collar 50 to allow the slips 26 to move radially while being supported in both longitudinal directions. Although not shown in the Figures, a tubular or membrane could be sealably engaged with both of the collars 50 to prevent fluidic communication between an outside and an inside of the components of the treatment plug 10 through the gaps between tabs 42 and the slots 46 or clearances between the adjacent slips 26.

[0017] Optionally, teeth 54, also known as wickers, on an outer surface 58 of the slips 26 can bitingly engage with a surface 62 of the structure 22 to increase locational retention of the anchor 14 within the structure 22. This biting engagement can hold the two halves 26A, 26B relative to one another in the longitudinally compressed position so that external means of holding them in such a position is not required.

[0018] Referring to Figures 4 and 5, the seal 18 has a deformable metal member 66 that is radially deformable in response to longitudinal compression thereof. The seal 18 is positioned and configured such that the radial deformation causes the deformable metal member 66 to sealingly engage with the surface 62 of the structure 22. An optional polymeric member 70 (made of polymeric material) located radially of the deformable metal member 66 may be used to improve sealing between the deformable metal member 66 and the surface 62.

[0019] The deformable metal member 66 has a thin cross section in comparison to collars 74 displaced in both longitudinal directions from the deformable metal member 66. This difference in cross sectional thickness assures that the deformable metal member 66, and not the collars 74, deform when longitudinally compressed. The deformable metal member 66 may also have a profile such that a longitudinal central portion 78 is displaced radially from portions 82 immediately to either longitudinal side of the central portion 78. This relationship creates stress in the deformable metal member 66 to control a radial direction in which the central portion 78 will move when longitudinal compressive forces are applied to the deformable metal member 66.

[0020] The collars 74 each have a shoulder 86 that is contactable by the deformable metal member 66 during deformation thereof. The shoulders 86 may be contoured to allow

the deformable metal member 66 to follow during deformation to control a shape of the deformation. These contours can prevent sharp bends in the deformation that might result in undesirable rupturing of the deformable metal member 66 had the contours not been present. A minimum dimension 90 between the shoulders 86 may be less than a maximum longitudinal dimension 94 of the deformable metal member 66 after deformation. By plastically deforming the deformable metal member 66 the as deformed position (illustrated in Figure 5) can be maintained without having to hold the collars 74 longitudinally relative to one another as is often required of typical seal devices.

[0021] The seal 18 of this embodiment is further configured such that the central portion 78 is located radially within surfaces 98 defining a maximum radial dimension of the collars 74 prior to deformation of the deformable metal member 66 but is located radially outside of the surfaces 98 after deformation. It should be noted that other embodiments are contemplated wherein the direction of deformation of the deformable metal member 66 is opposite to that shown in the Figures. In such an embodiment the relationships discussed herein would be reversed.

[0022] Referring again to FIG. 1, a seat 102 is sealingly receptive to a plug 106, shown herein as a ball, runnable there against. The seat 102 is positioned on a side of the seal 18 that is longitudinally opposite to a side on which the anchor 14 is located. Pressuring up against the plug 106 sealed against the seat 102 allows an operator employing the treatment plug 10 to do work therewith such as, fracturing an earth formation, or actuating a pressure actuator, for example, in a hydrocarbon recovery or a carbon dioxide sequestration application. Additionally, pressure applied against the seated plug 106 could be used to generate forces needed to compress the seal 18 into sealing engagement with the structure 22 or to urge the first half 26A of the slips 26 toward the second half 26B of the slips 26 to set the anchor 14.

[0023] Referring to FIG. 6, an alternate embodiment of a treatment plug disclosed herein is illustrated at 110. The treatment plug 110 includes an anchor 114 and at least one seal 118, with a single seal 118 being illustrated in this embodiment, that are anchorable and sealable, respectively to a structure 122 shown herein as a casing or liner, although any tubular shaped structure, including an open earth formation borehole, could serve as the structure.

[0024] The anchor 114 has a plurality of slips 126, a first half 126A of which are movable in a first direction according to arrow 'C' relative to a second half 126B movable in a second direction according to arrow 'D,' the first direction being longitudinally opposite to

the second direction. Each of slips 126 has opposing perimetrical edges 130 that are tapered to form a perimetrical wedge shape. Additionally each of slips 126 in the first half 126A are positioned perimetricaly between adjacent slips 126 of the second half 126B. As such, all of the slips 126 move radially in unison in response to the first half 126A moving longitudinally relative to the second half 126B of the slips 126. One should appreciate that a perimetrical (indeed substantially circumferential in the Figures) dimension defined by the slips 126 will increase when the two halves 126A, 126B are moved longitudinally toward one another and decrease as the two halves 126A, 126B are moved longitudinally away from one another. A 'T' shaped tab 142 on each of the slips 126 in the second half 126B is radially slidably engaged with a slot 146 in a collar 150 to allow the slips 126B to move radially while being supported in both longitudinal directions. The slips 126 of the first half 126A differ from the slips 126 of the anchor 14 in that the slips 126A do not include 'T' shaped tabs but instead are integrally formed as part of a sleeve 132. As such an area 140 defined where the sleeve 132 and fingers 136 of the slips 126A meet will deform as the fingers 136 radially expand while the sleeve 132 does not.

[0025] Another difference between the anchor 114 and the anchor 14 is that each of the slips 126 has a plurality of wedge shaped portions 144 displaced longitudinally from one another. The illustrated embodiment includes three such wedge portions 144 although any practical number of the wedge portions 144 is contemplated. One effect of employing more than one of the wedge portions 144 is the anchor 114 is able to engage with walls 120 of a structure 122 within which the anchor 114 is deployed over a greater longitudinal span.

[0026] Referring to Figure 7 a swaging tool 148 is shown engaged with the treatment plug 110. The swaging tool 148 has a mandrel 152 that aligns a swage 156 and a plate 160. The swage 156 is sized and configured to increase radial dimensions of a portion 164 of the sleeve 132 when forced therethrough. In so doing, a seal element 168 positioned radially of the portion 164 is displaced into sealing engagement with the walls 120 of the structure 122. The plate 160 includes a shear ring 172 where it engages with a groove 176 in the collar 150. Movement of the plate 160 towards the swage 156 of the swaging tool 148 causes the first half 126A of the slips to move longitudinally relative to the second half 126B of the slips 126 thereby causing them to move radially outwardly into anchoring engagement with the walls 120 of the structure 122. The shear ring 172 is designed to shear, thereby releasing the swaging tool 148 from engagement with the treatment plug 110, at forces greater than would be applied thereto during either of the swaging operation or the anchoring operation. As

such, once swaging and anchoring is complete the swaging tool 148 can be retrieved upon shearing of the shear ring 172.

[0027] Referring to Figure 8, a plug 106 is shown seated on a seat 102 of the treatment plug 110 in a similar fashion as to that of the treatment plug 10 in Figure 1.

[0028] The treatment plugs 10, 110 disclosed herein are designed to have a large minimum through bore dimension 180 in relation to the minimum radial dimension 184 of the structure 122 (see Figures 1 and 7). The large dimension 180 means that the treatment plugs 10, 110 do not require drilling or milling therethrough prior to completion and production, as is required of typical treatment plugs, as production can flow through the minimum through bore dimension 180 directly. Typically available treatment plugs employ composite materials for the bulk of the assembly (with only the slips being made of metal) because it is easier to drill through than if the bulk of the treatment plug were made of metal, for example. Since the composite materials employed are weaker than metal the cross sectional dimensions need to be larger to support the loads encountered. These larger cross sectional dimensions equates to a smaller bore dimension through which to produce. The treatment plugs 10, 110 disclosed herein rely upon the high hoop strength provided by the wedge shape of the slips 26, 126 and the high material strength of metal employed in the slips 26, 126 to allow the loads to be supported while leaving the relatively large bore dimension 180 therethrough.

[0029] Similarly, the seals 18, 118 also employ relatively thin walled metal material that when deformed into sealing engagement with structures 22, 122 can maintain the needed sealing loads while having the large bore dimension 180 therethrough. In fact, studies have shown that the treatment plugs 10, 110 disclosed herein can have bore dimensions 180 that are in the range of 80% to 85% of the minimum radial dimension 184 of the structure 122.

[0030] While the invention has been described with reference to an exemplary embodiment or embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the claims. Also, in the drawings and the description, there have been disclosed exemplary embodiments of the invention and, although specific terms may have been employed, they

are unless otherwise stated used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention therefore not being so limited. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced item.

CLAIMS

What is claimed:

1. A treatment plug comprising:
an anchor runnable and settable within a structure having;
at least two slips movably engaged with one another to cause the at least two slips to move radially into engagement with the structure in response to longitudinal movement between the at least two slips;
at least one seal having a deformable metal member configured to radially deform into sealing engagement with the structure in response to longitudinal compression of the deformable metal member; and
a seat that is sealingly receptive to a plug.
2. The treatment plug of claim 1, wherein the at least two slips is a plurality of slips with a first half of the plurality of slips being longitudinally movable together relative to a second half of the plurality of slips.
3. The treatment plug of claim 2, wherein each of the plurality of slips has a first perimetrical edge that is perimetrically tapered relative to a second perimetrical edge, the first perimetrical edge being perimetrically opposite to the second perimetrical edge.
4. The treatment plug of claim 3, wherein each of the plurality of slips is perimetrically wedged between two other of the plurality of slips.
5. The treatment plug of claim 4, wherein the perimetrical wedging causes a radial dimension defined by surfaces of the plurality of slips to alter when the first half of the plurality of slips is urged longitudinally relative to the second half of the plurality of slips.
6. The treatment plug of claim 3, wherein the first perimetrical edge of each of the plurality of slips has a tongue engagable with a groove on the second perimetrical edge of another of the plurality of slips.
7. The treatment plug of claim 6, wherein alteration of the radial dimension includes an increase thereof.
8. The treatment plug of claim 7, wherein the increase of the radial dimension causes the plurality of slips to fixedly engage with a structure to thereby anchor the treatment plug to the structure.
9. The treatment plug of claim 1, wherein engagement of the at least two slips with the structure maintains the at least two slips in relative longitudinal position with each other.

10. The treatment plug of claim 1, further comprising a polymeric member in operable communication with the deformable metal member configured to sealingly engage with both the deformable metal member and the structure when the deformable metal member is in a deformed configuration.

11. The treatment plug of claim 1, wherein the deformable metal member is configured to remain substantially in a deformed position without external forces being applied thereto.

12. The treatment plug of claim 1, further comprising two collars having maximum radial dimensions that a portion of the deformable metal member extends radially beyond when in a deformed position.

13. The treatment plug of claim 12, wherein the two collars have shoulders that are longitudinally closer to one another than a maximum longitudinal dimension of the portion of the deformable metal member that extends radially therebeyond.

14. The treatment plug of claim 1, wherein the treatment plug includes more than one of the at least one seals.

15. The treatment plug of claim 1, wherein the plug is a ball.

16. The treatment plug of claim 1, wherein pressure built against a plug seated at the seat urges a half of the at least two slips to longitudinally move relative to the other half of the at least two slips to set the anchor.

17. The treatment plug of claim 1, wherein pressure built against a plug seated at the seat generates forces to longitudinally compress the deformable metal member.

18. The treatment plug of claim 1, wherein the at least one seal is positioned longitudinally between the seat and the at least two slips.

19. The treatment plug of claim 1, wherein a minimum through bore of the treatment plug is in the range of about 80% to 85% of the minimum radial dimension of the structure where the treatment plug is positioned.

20. The treatment plug of claim 1, wherein the treatment plug is configured to produce through a minimum bore dimension therethrough without having to be milled or drilled to increase a size thereof.

21. A method of anchoring and sealing a treatment plug to a structure, comprising:
longitudinally moving a first half of a plurality of slips relative to a second half of the plurality of slips;

altering a radial dimension defined by the plurality of slips;

anchoring the plurality of slips to a structure;

longitudinally compressing at least one deformable member; and
sealingly engaging the structure with the at least one deformable member.

22. The method of anchoring and sealing a treatment plug to a structure of claim 21, further comprising compressing a polymeric member between the at least one deformable member and the structure.

23. The method of anchoring and sealing a treatment plug to a structure of claim 21, further comprising building pressure against a plug seated at the treatment plug.

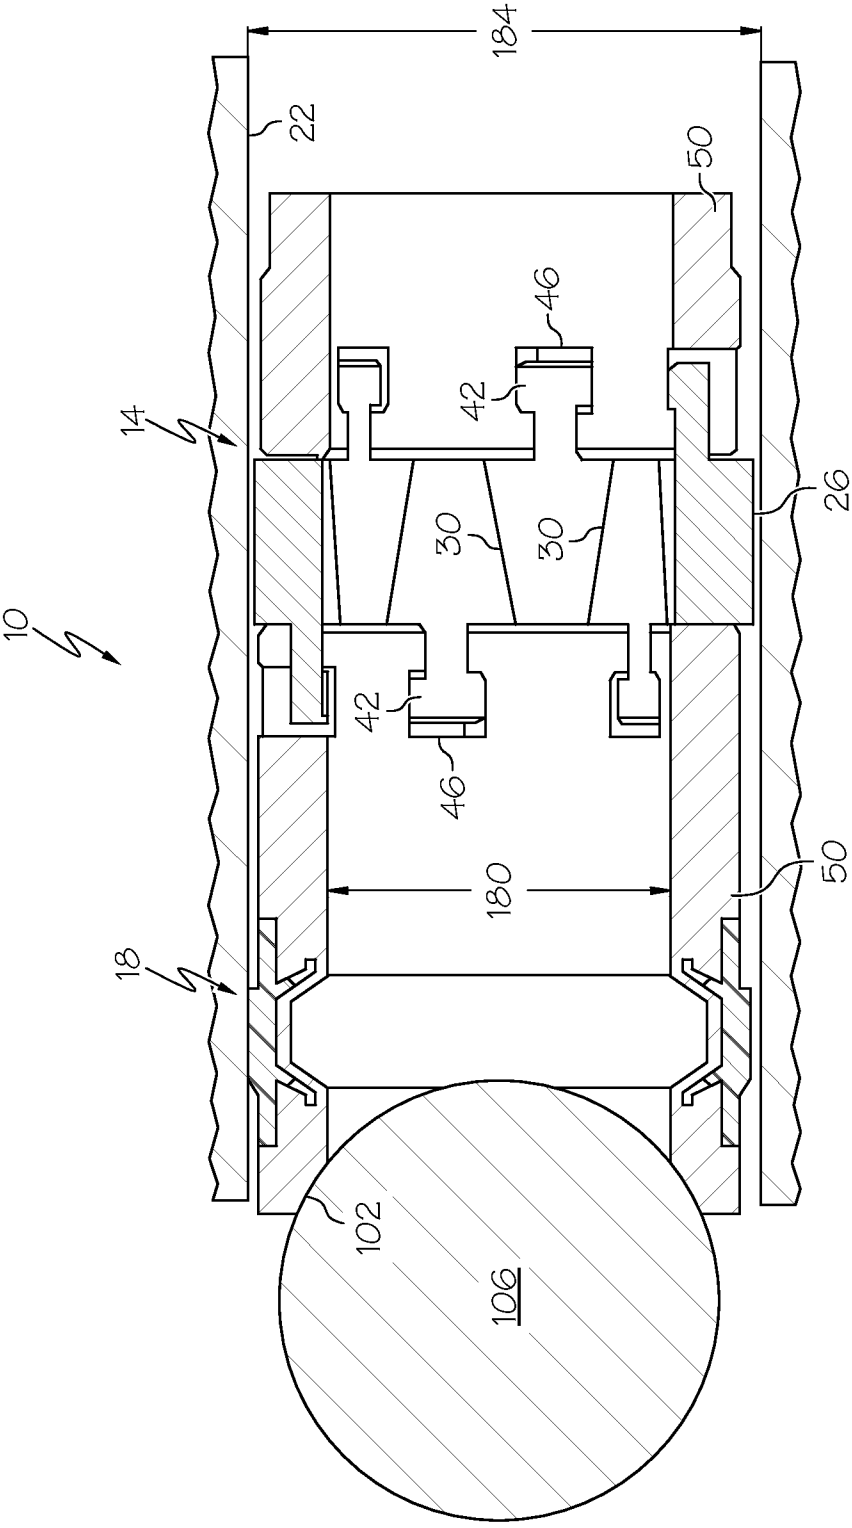


FIG. 1

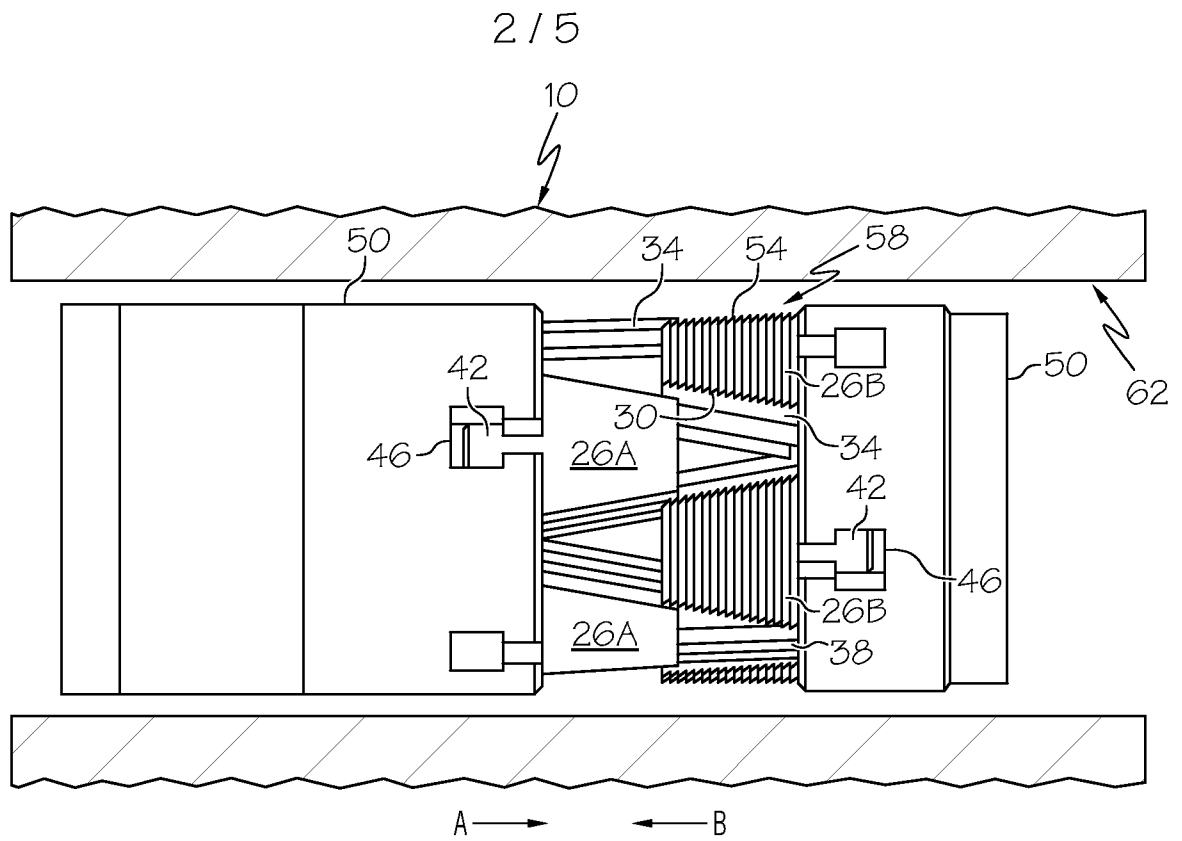


FIG. 2

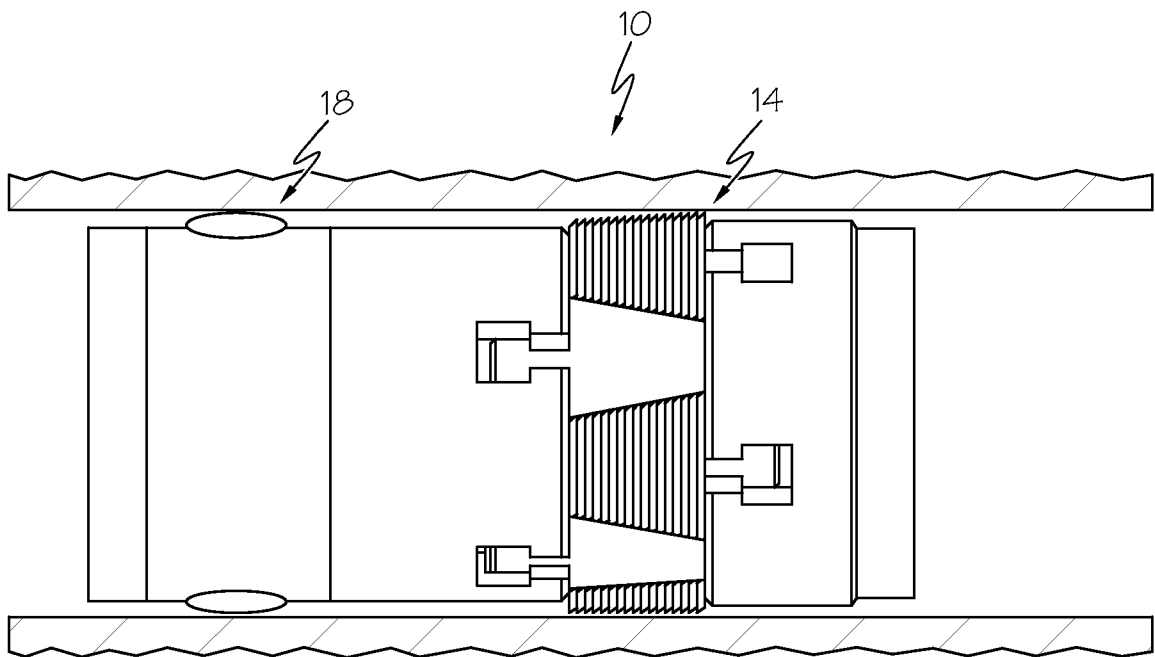


FIG. 3

3 / 5

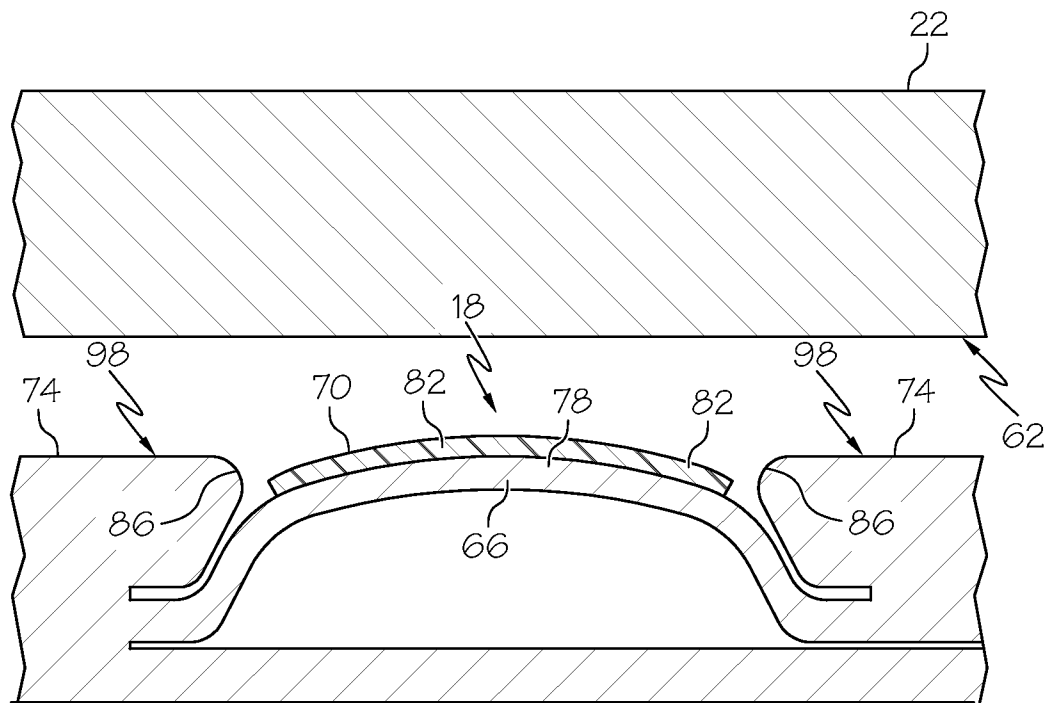


FIG. 4

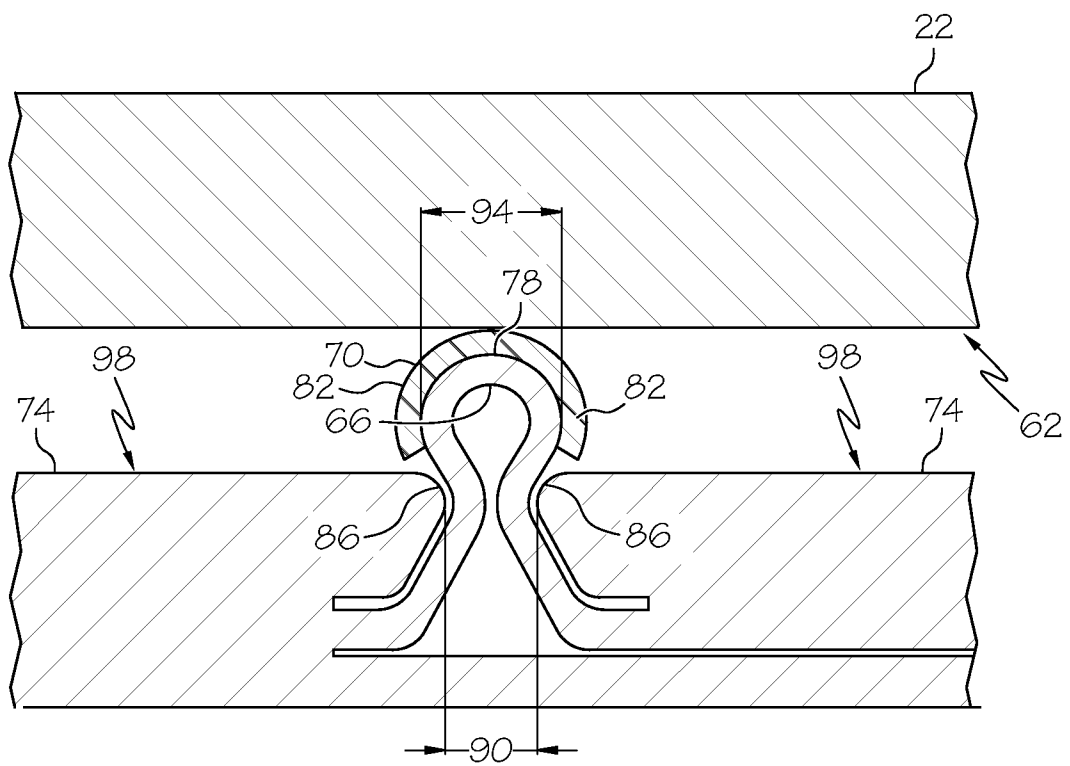


FIG. 5

4 / 5

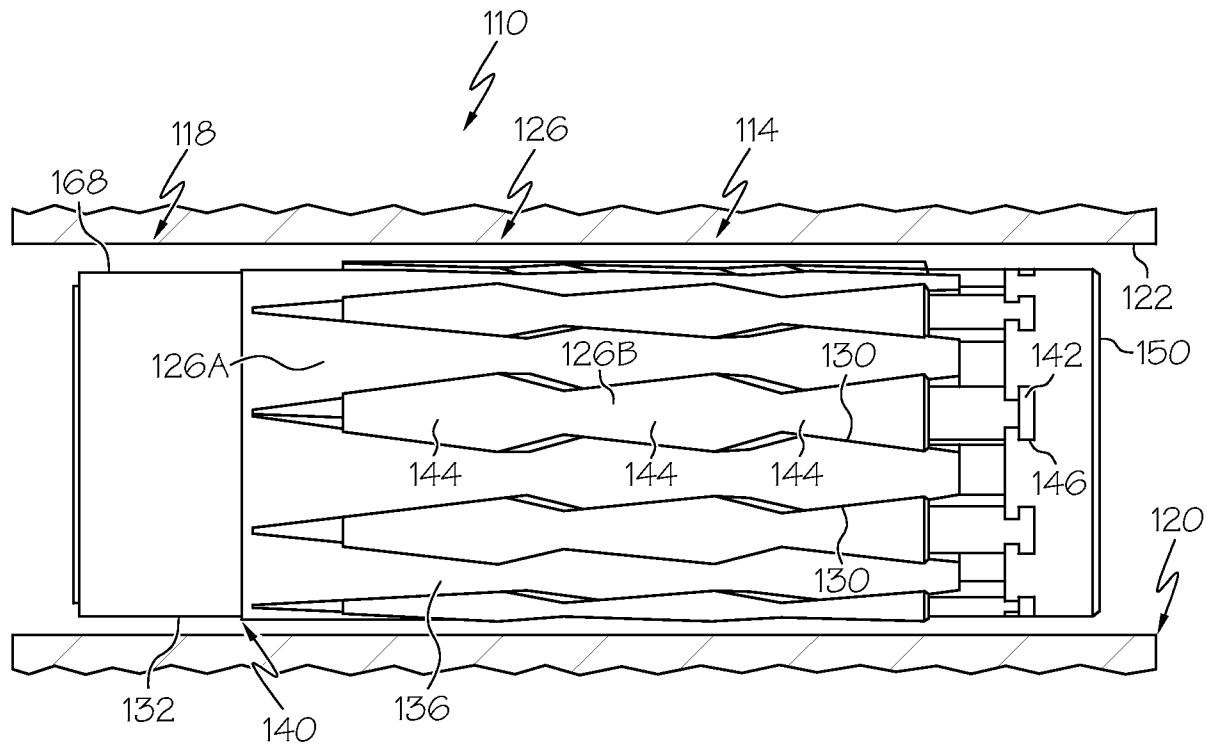


FIG. 6

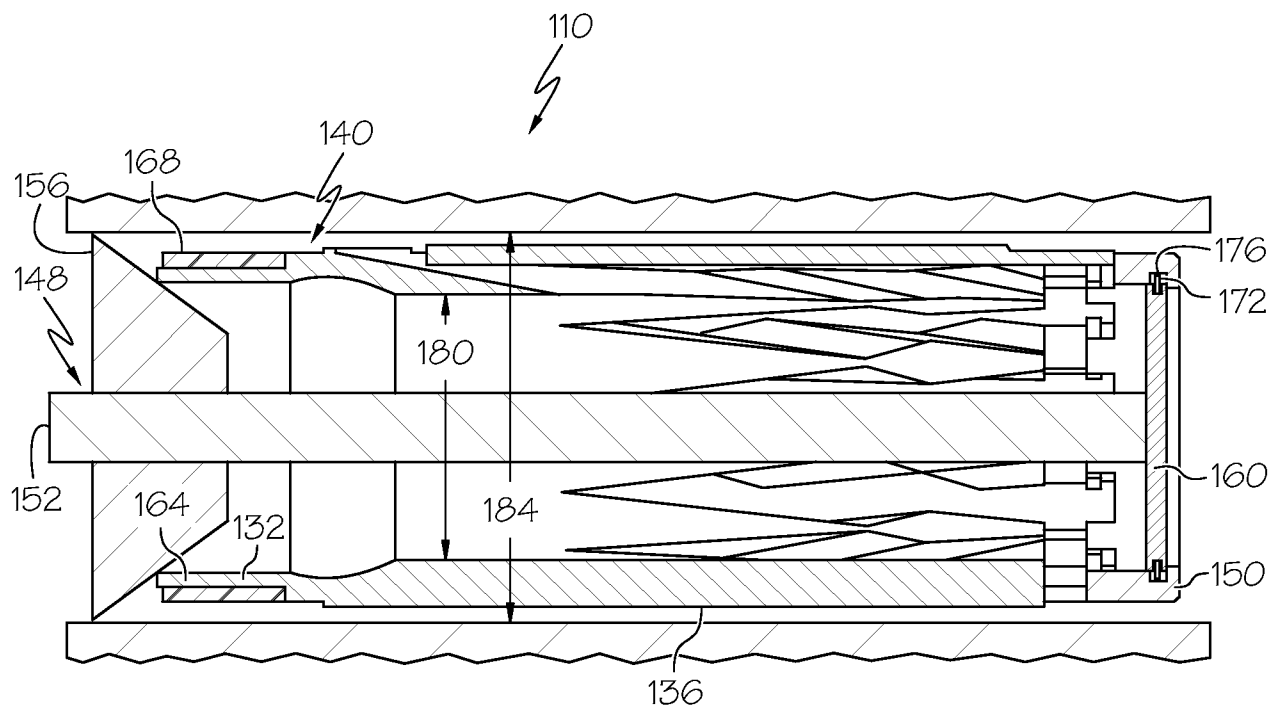


FIG. 7

5 / 5

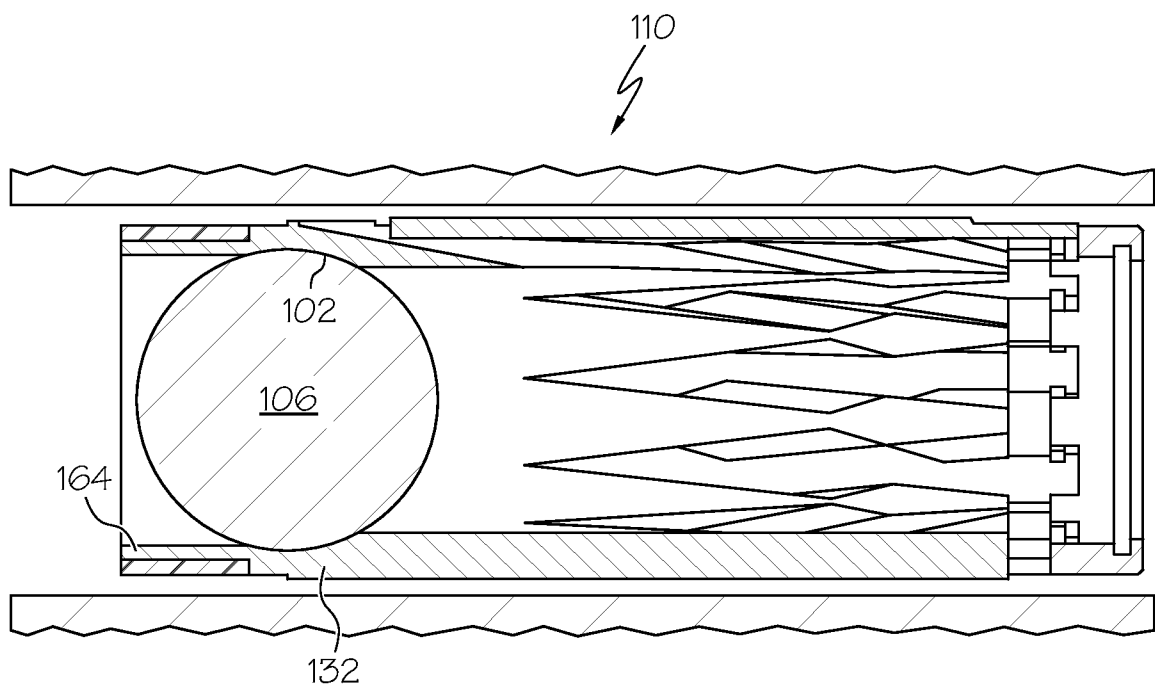


FIG. 8

A. CLASSIFICATION OF SUBJECT MATTER***F16L 55/26(2006.01)i, F16L 55/11(2006.01)i, F16L 55/12(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F16L 55/26; E21B 34/06; E21B 23/06; E21B 33/12; F16K 31/44; E21B 33/129

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: treatment, wellbore, plug, anchoring, sealing, slips, wedged, tapered, tongue, groove and radial

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011-0277987 A1 (FRAZIER, W. LYNN) 17 November 2011 See abstract; paragraphs 54-61 and figures 3A-3C.	1-23
Y	US 2008-0264627 A1 (ROBERTS et al.) 30 October 2008 See abstract; paragraphs 49-53 and figures 6-6D.	1-20
Y	US 5775429 A (ARZMENDI et al.) 07 July 1998 See abstract; column 4, line 40 - column 5, line 58 and figures 1-3.	10-13, 17, 21-23
A	US 2011-0259610 A1 (SHKURTI et al.) 27 October 2011 See abstract; paragraphs 64-70 and figures 2A, 8-9, 29.	1-23
A	US 2011-0061856 A1 (KELLNER et al.) 17 March 2011 See abstract; paragraph 17 and figure 2.	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 April 2013 (24.04.2013)

Date of mailing of the international search report

25 April 2013 (25.04.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

AHN, Jae Yul

Telephone No. 82-42-481-8525



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/071737

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0277987 A1	17.11.2011	US 8079413 B2	20.12.2011
US 2008-0264627 A1	30.10.2008	CA 2629591 A1	30.10.2008
		CA 2629591 C	04.01.2011
		GB 0807894 D0	04.06.2008
		GB 2448983 A	05.11.2008
		GB 2448983 B	31.03.2010
		NO 20081940 A	31.10.2008
		US 7665516 B2	23.02.2010
US 05775429 A	07.07.1998	AU 1998-60542 B2	09.08.2001
		CA 2280003 A1	06.08.1998
		CA 2280003 C	10.05.2005
		EP 1019613 A1	19.07.2000
		EP 1019613 A4	31.01.2001
		EP 1019613 B1	20.04.2005
		US 05941313 A	24.08.1999
		WO 98-34008 A1	06.08.1998
US 2011-0259610 A1	27.10.2011	WO 2011-133810 A2	27.10.2011
		WO 2011-133810 A3	29.12.2011
		WO 2012-003419 A2	05.01.2012
US 2011-0061856 A1	17.03.2011	AU 2010-292470 A1	15.03.2012
		EP 2475842 A2	18.07.2012
		US 8365829 B2	05.02.2013
		WO 2011-031632 A2	17.03.2011
		WO 2011-031632 A3	16.06.2011