

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number
WO 2004/074635 A1

(51) International Patent Classification⁷: **E21D 21/00**,
E21B 10/58

(21) International Application Number:
PCT/SE2004/000153

(22) International Filing Date: 6 February 2004 (06.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003200561 19 February 2003 (19.02.2003) AU

(71) Applicant (for all designated States except US): **SAND-
VIK AB** [SE/SE]; S-811 81 Sandviken (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WEAVER, Steven**
[AU/AU]; 2 Bilbungra Way, Maryland, NSW 2287 (AU).
MCLEAN, Michael [AU/AU]; 20 Hebburn Street, Hamil-
ton East NSW 2303 (AU).

(74) Agent: **CARLSSON, Lars-Åke**; Sandvik AB, Intellectual
Property, S-811 81 Sandviken (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: A DRILL BIT, A DRILL ROD AND A SELF DRILLING ROOF BOLT

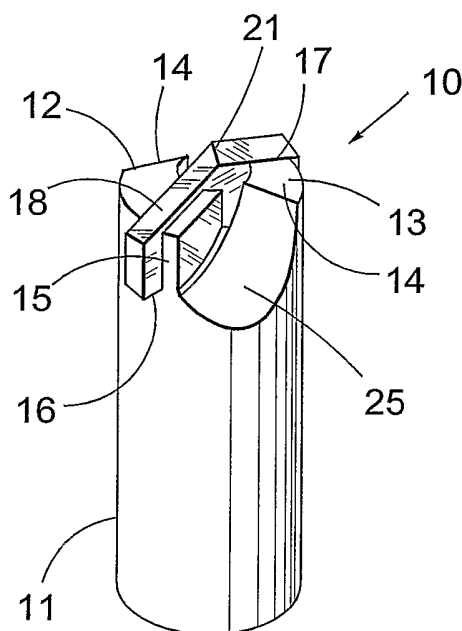

(57) Abstract: A drill bit (11) for attachment to an elongate drill rod (10), the drill bit (11) including means for attachment to an end of the drill rod, and a leading end which defines a pair of diametrically opposed slots (16, 17) which open axially for receipt of a portion of a drill tip (18) which projects axially from the slots (16, 17). The drill tip (18) being fixedly secured within each of the slots (16, 17). Further, a drill rod or a self drilling roof bolt comprising the above drill bit (11).

A drill bit, a drill rod and a self drilling roof bolt

The present invention relates to a drill bit, in particular for the drilling of rock. The invention has particular relevance to drill rods and to bolts of the type
5 known as rock or roof bolts (hereinafter called "roof bolts") and to such bolts of the self drilling kind.

Roof bolts are commonly employed in the underground mining industry to support the walls and/or the roof of excavated tunnels and openings against fragmentation and collapse. Roof bolts typically are applied by first drilling a pilot
10 hole in the rock wall and thereafter inserting the roof bolt therein. The bolt is fixed within the hole normally by a settable glue, such as a resin or a mortar cement. Otherwise, the roof bolt can be arranged to interlock with the internal wall of the pilot opening, such as by a thread or an expanding sleeve and typically a combination of settable glue and an interlocking arrangement is
15 employed.

Self drilling roof bolts have a drilling capacity that a simple roof bolt does not have. If a self drilling roof bolt is employed, the bolt itself can be driven to drill into the rock wall and when the bolt has sufficiently penetrated the wall, suitable fixing means, such as a settable resin may be employed. A self drilling
20 roof bolt therefore increases the speed at which roof bolts can be installed, because it eliminates the need to remove the drill from the pilot hole to insert the roof bolt. Effectively the drilling operation and the insertion are completed at the same time. This advantageously means that the drill operator is next to the unsupported wall, or is under the unsupported roof, for a significantly reduced
25 amount of time, thereby reducing the risk of injury to such operators.

US Patent No. 6,309,159 discloses a self drilling roof bolt which has an elongate bolt body and a drill tip attached to the leading end thereof. The drill tip extends across the end of the bolt and is supported against a pair of radially spaced, axially extending abutment elements, which engage the drill tip on
30 opposite sides thereof. In practice the tip is secured to the abutment elements by welding, soldering or brazing.

In the self drilling roof bolt of US 6,309,159 the type of mechanism used to secure the tip to the abutment elements adds significant cost to the roof bolt,

as the welding, soldering or brazing operation must be carefully performed so as to ensure the integrity of the connection under the highly aggressive conditions of drilling.

5 A further disadvantage resides in the most common form of connection which is brazing, because brazing requires expensive induction equipment for production line manufacture. Also, a brazed connection often suffers from concentricity problems between the tip and the bolt body or shank, because during brazing, it is difficult to maintain proper concentric alignment.

10 It is an object of the invention to provide a drill bit for a drill rod and/or a self drilling roof bolt which provides an alternative connection arrangement between the drill tip and the leading end of the rod or bolt to improve the connection therebetween and/or to facilitate connection by different means to those discussed above.

15 According to the present invention there is provided a drill bit for attachment to an elongate drill rod, said drill bit including means for attachment to an end of said drill rod, a leading end which defines a pair of diametrically opposed slots, which open axially for receipt of a portion of a drill tip which projects axially from said slots, said drill tip being fixedly secured within each of said slots.

20 The present invention further provides a drill rod to which a drill bit as described above, is attached.

The present invention still further provides a drill rod which is formed as a self drilling roof bolt to which a drill bit as described above, is attached. In the alternative, the invention provides a self drilling roof bolt in which the drill bit is
25 integrally formed with the bolt at one end thereof.

The present invention advantageously provides for extremely secure location of the drill tip in the drill bit. The drill tip may be a single piece or "spade" tip, which extends radially across the leading end of the drill bit, or it may be formed by a pair of tips or "wing tip", each of which is received within one of
30 the pair of slots. In the latter arrangement, the pair of tips are separate and when fixed in the respective slots, the tips are separated by a central or axial gap. If the drill tip is a single piece, it is secured on opposite sides thereof and at

each of the opposite ends thereof. Each of these arrangement facilitates the preferred use of adhesive glue to fix the drill tip (whether a single or two-piece tip) in place, rather than the prior art arrangements which utilise welding, soldering or brazing, although the invention includes within its scope fixing by
5 such means. The preferred use of glue is facilitated by the increased surface area provided for bonding between the drill tip and the slot surfaces. That increased surface area means an adequate adhesive bond can be formed between the slots and the drill tip, which is not possible, or which is not reliable, when the drill tip is securable only against a single surface, or abutment face as
10 in the prior art. In such prior art arrangements, the use of adhesive glue is not appropriate.

The benefit of securing the drill tip in place by adhesive glue, is that the glue is far more easily handled and applied and does not require induction equipment of the kind which is presently employed in some non-glue
15 applications. Also, the provision of slots is such as to more securely hold the drill tip in place when it is being fitted to the drill bit.

The drill bit preferably includes a pair of axially extending abutment elements which define the slots that receive the drill tip (hereinafter the expression "drill tip" will include both single piece and two-piece tips). The
20 abutment elements can be formed in any suitable manner, such as by machining, or investment casting, or other suitable process. Preferably the abutment elements have leading and trailing ends and each slot is formed toward the leading end rather than the trailing end. This facilitates minimising the bulk or mass of the abutment elements, because the majority of load the drill
25 tip experiences during drilling is transmitted to the trailing end of the abutment elements, whereas the leading ends experience relatively little load. Accordingly, the leading end can be of a relatively reduced thickness compared to the trailing end.

The slot formed in each abutment element preferably is generally
30 rectangular in cross-section and is of a depth sufficient to accept almost the full height of the drill tip, although the depth of the slots may vary radially with variation in the height of the drill tip. If necessary one of the leading or trailing

ends can have a reduced height compared to the other of those ends. In particular, the leading end may be of reduced height given that it has relatively low exposure to load during drilling compared to the trailing end. The cross-sectional width of each slot preferably is about equal to, although slightly greater than the cross-sectional width of the drill tip, so that the drill tip is snugly received within each slot. The radial length of each slot can be equal to the wall thickness of the drill bit about the through bore, so that the slots can be formed through the full wall thickness, and do not need to be formed lesser or greater than that thickness. The base of each slot typically will be flat and will extend generally perpendicular to the lengthwise axis of the rod or bolt to which the drill bit is attached, while the upper ends of each slot can be angled, or inclined at the same, or a similar angle to the cutting edge of the drill tip. Such drill tips often will be inclined on opposite sides thereof towards a centre apex and for proper support, the upper slot edges can have the same or similar inclined configuration.

The drill bit preferably includes a central bore which in use, preferably is aligned coaxially with the bore formed in the drill rod. The arrangement preferably is such that the central bore of the drill bit is open at the leading end, so that flushing medium which is used to flush drilled debris out of the hole being drilled and, in the case of self drilling roof bolts, glue which is used to secure the bolt in place in the rock, can be pumped through the central bore of both the drill rod or bolt and the drill bit, and egress out thereof through the leading end. The abutment elements must be arranged so as to permit the egress of the flushing medium and the glue from the central bore. This can be achieved by placement of the abutment elements on diametrically opposite sides of the central bore, so that the bore is open on either side of the drill tip which extends across the open end of the bore.

In a preferred arrangement, the drill tip extends diametrically on either side thereof beyond the external periphery of the bolt at the leading end. In other words, the radial extent of the drill tip is greater than the diameter of the bolt at the leading end.

If glue is employed to secure the drill tip to the leading end any suitable glue may be employed. For example, an epoxy resin may be employed. Advantageously, the use of the glue simplifies the manufacture of the roof bolt, because the drill tip can be glued to the leading end and the glue left to cure (possibly at an elevated temperature) without additional processing required.

The attached drawings show an example embodiment of the invention of the foregoing kind. The particularity of those drawings and the associated description does not supersede the generality of the preceding broad description of the invention.

Figure 1 shows the leading end of a roof bolt according to one embodiment of the present invention.

Figure 2 is a plan view of the roof bolt of Figure 1.

Figure 3 is a radial view of the roof bolt of Figure 1.

Figure 4 is a further side view of the roof bolt of Figure 1 rotated at about 90° from the Figure 3 view.

Figure 1 shows the leading end of a self drilling roof bolt (10) according to one aspect of the present invention. Typically the bolt (10) would have a length of about 1800-2400mm and would include an arrangement for driving it to rotate for drilling purposes. Such an arrangement is usually provided at the trailing end of the bolt and can comprise the end being formed square or hexagonal for gripping in a chuck, or can be formed as a nut. Drill rods generally are driven by engaging the end in a chuck, whereas roof bolts normally are driven by the nut, which is later used for tightening the bolt in place.

The bolt (10) is normally formed as a cylinder, having a circular outer surface and a central circular bore. The outer surface can be formed with ribs that enhance the secure location of the bolt in a wall and the ribs may be formed as a thread. Often the thread is formed to be discontinuous to create a lengthwise flat portion (unthreaded) preferably on each of opposite sides of the bolt. This facilitates transport of drilled rock debris to the rear end of the bolt for removal. That removal can be assisted by flushing medium which can be pumped to the leading end through the central bore for discharge therefrom. It is possible however to have a continuous thread which extends substantially the

length of the bolt and in such a bolt, the thread may be deeper to facilitate clearance of debris.

As the novel characteristics of the bolt reside in the construction of the leading end thereof, no further discussion of other parts of the bolt (10) will be made.

The bolt (10) has a leading end (11) which defines a drill bit for drilling into rock. The drill bit includes a pair of abutment elements (12, 13) which extend axially from the leading end (11). The abutment elements (12, 13) are provided on diametrically opposite sides of the leading end (11). The abutment elements (12, 13) each have a trailing portion (14) and a leading portion (15), which define between them slots (16, 17). The slots (16, 17) accommodate a drill tip (18) which in the illustrated embodiment, extends diametrically across the leading end (11).

The drill tip (18) has a pair of inclined cutting edges (19, 20) (see Figure 3) which incline towards a central apex (21). The drill tip (18) defines a pair of axially extending radial edges (22, 23) which extend outside the outer cylindrical periphery (24) of the leading end (11). The edges (22, 23) are formed as cutting edges, so that the drill tip (18) drills a hole of greater diameter than the diameter of the leading end (11) and the remaining bolt body which depends from the leading end.

Between the trailing portion (14) of one of the abutment elements (12, 13) and the leading portion (15) of the other of those abutment elements, on each side of the drill bit (18), the leading end is inclined to form scalloped faces (25). By this arrangement, frontal clearance is provided for the drill bit (18) to facilitate drilling action thereof.

The bolt (10) includes a central bore (26) and it can be seen from Figure 2 that the bore (26) is open at the leading end (11), on either side of the drill bit (18) which extends diametrically across the bore and the leading end. The bore (26) is used to transport flushing medium to the leading end (11) for flushing drilled material from the leading end (11) rearwardly and out of the drilled hole, and for introducing setting adhesive for fixing the bolt (10) within the drilled hole. The bore (26) can take a variety of different forms and can include branching

conduits, which extend from the bore (26), to achieve different distribution of flushing medium or adhesive.

As shown in the figures, the drill tip (18) is accommodated by, or received within the slots (16, 17). The slots (16, 17) support the drill tip (18) along the base thereof and along the front and rear faces (27, 28) thereof. By that support, adhesive glue may be employed to fix the drill tip (18) to the leading ends. A suitable adhesive glue is Permabond ESP110. By forming the abutment elements (12, 13) so that the trailing portions (14) thereof, have a greater bulk or mass than the leading portions (15) thereof, the trailing portions have a greater load bearing capacity than the leading portions, which is appropriate, because it is the trailing portions which facilitate the transmission of drive to the drill tip (18) and it is the trailing portions which accept the major portion of the load the drill tip experiences during drilling. The leading portions (15) are exposed to much less load and therefore it is appropriate that they have much less bulk than the trailing portions. The leading portions in effect act only to facilitate the secure location of the drill tip (18) to the leading end (11) by increasing the bond area for adhesive bonding. Accordingly, the absence of the leading portions (15) would mean that the drill tip (18) would have to be secured to the leading end (11) by other arrangements, such as by welding, soldering or brazing. However, because the leading portions (15) increase the bond area, adhesive glues become appropriate for use providing the advantages set out earlier.

It will be appreciated that the self drilling roof bolt illustrated in the drawings has the drill bit arrangement of the invention integrally formed with the elongate bolt body of the bolt. However, it is equally permissible that the drill bit be formed separately from the bolt body and fixed thereto by any suitable attachment arrangement. For example, the drill bit may be formed for threaded connection to the bolt body. Moreover, in relation to drill rods, it is generally necessary for the drill bit to be replaceable, so that when the drill tip has worn, the drill bit can be removed and replaced. Self drilling roof bolts do not have this requirement, because the bolt only experiences a single drilling operation, at the completion of which the bolt is fixed within the drilled hole.

The construction of the drill bit of the present invention and of drill rods and self drilling roof bolts which employ the present invention, advantageously facilitates the preferred use of adhesive glue for securing a drill tip to a bolt, and consequently simplifies the manufacture of drill rods and self drilling roof bolts, and reduces their overall cost, as well as the cost of associated machinery used in their manufacture.

The invention described herein is susceptible to variations, modifications and/or additions other than those specifically described and it is to be understood that the invention includes all such variations, modifications and/or additions which fall within the spirit and scope of the above description.

Claims:

1. A drill bit for attachment to an elongate drill rod, said drill bit including means for attachment to an end of said drill rod, and a leading end which defines a pair of diametrically opposed slots which open axially for receipt of a portion of a drill tip which projects axially from said slots, said drill tip being fixedly secured within each of said slots.
5
2. A drill bit according to claim 1, including a pair of axially extending abutment elements which each define one of said slots.
10
3. A drill bit according to claim 2, said abutment elements each having leading and trailing ends relative to the direction of rotation for drilling, each said slot being formed toward said leading ends of said abutment elements.
15
4. A drill bit according to claim 3, said leading end being of reduced height relative to said trailing end.
5. A drill bit according to any one of claims 2 to 4, wherein said drill bit includes a central through bore and the radial length of each said slot is equal to the length of said drill bit between said through bore and an outer surface of said drill bit.
20
6. A drill bit according to any one of claims 1 to 5, each said slot being generally rectangular in cross-section and of a depth to accept substantially the full height of said drill tip.
25
7. A drill bit according to claim 6, said height of said slots varying through the radial length thereof to accommodate height variation in said drill tip, so that the axial projection of said drill tip from each said slot is substantially constant.
30

8. A drill bit according to any one of claims 1 to 7, said slots having a cross-sectional width slightly greater than the thickness of said drill tip, for snug receipt of said drill tip within each said slot.
- 5 9. A drill bit according to any one of claims 1 to 8, said drill tip being of single piece construction and extending radially across said leading end of said drill bit.
- 10 10. A drill bit according to any one of claims 1 to 8, said drill tip being of two-piece construction, each piece being received within a respective slot and the pieces being separated centrally by a gap.
11. A drill bit according to any one of claims 1 to 10, said drill tip being secured within said slots by adhesive glue.
- 15 12. A drill bit according to any one of claims 1 to 10, said drill tip being secured within said slots by welding or soldering or brazing.
- 20 13. A drill bit according to claim 1, said drill bit including a central through bore for alignment with a central bore of said drill rod.
- 25 14. A drill rod for drilling into rock, including an elongate body and a drill bit at one end thereof, a central bore extending through said elongate body and communicating with a bore in said drill bit for transport of flushing medium through said drill rod to egress through said drill bit, said drill bit having a leading end which defines a pair of diametrically opposed slots which open axially for receipt of a drill tip which projects axially from said slots, said drill tip being fixedly secured within each of said slots.
- 30 15. A drill rod according to claim 14, said drill tip being secured within said slots by adhesive glue.

16. A drill rod according to claim 14 or 15, said drill bit being separately attachable to said elongate body.

5 17. A self drilling roof bolt for drilling and bolting into rock, including an elongate body and a drill bit at one end thereof, a central bore extending through said elongate body and communicating with a bore in said drill bit for transport of medium through said bolt to egress through said drill bit during drilling and during fixing of said bolt when drilling is completed, said drill bit having a leading end which defines a pair of diametrically opposed slots which open axially for receipt
10 of a drill tip which projects axially from said slots, said drill tip being fixedly secured within each of said slots.

18. A drill rod according to claim 17, said drill tip being secured within said slots by adhesive glue.

15

19. A self drilling roof bolt according to claim 17 or 18, said drill bit being separately attachable to said elongate body.

1/1

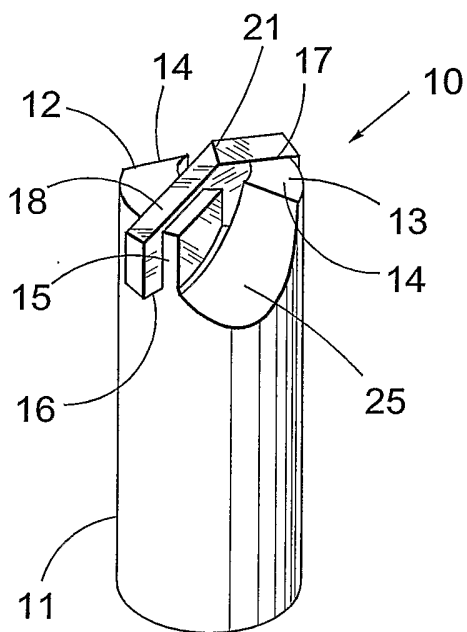


Fig. 1

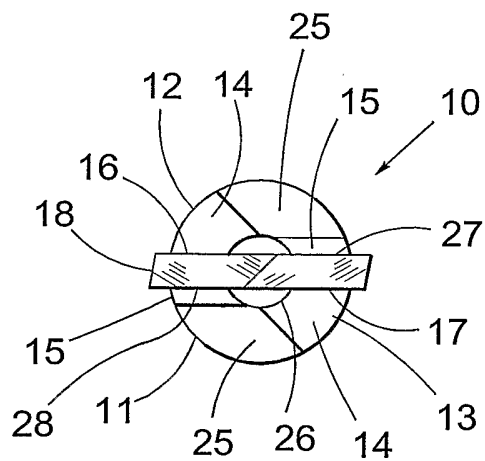


Fig. 2

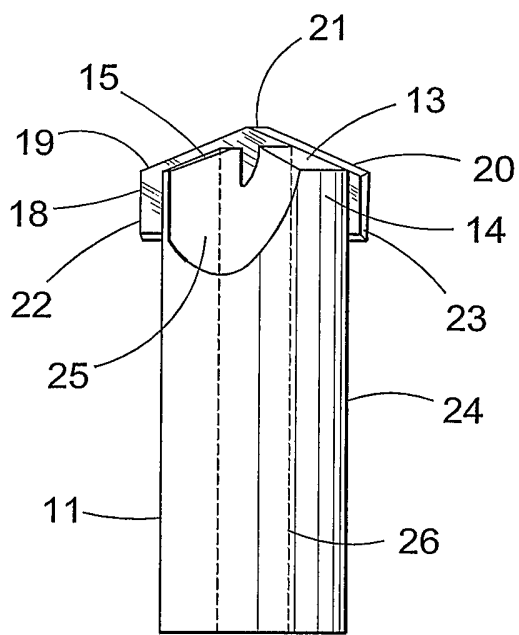


Fig. 3

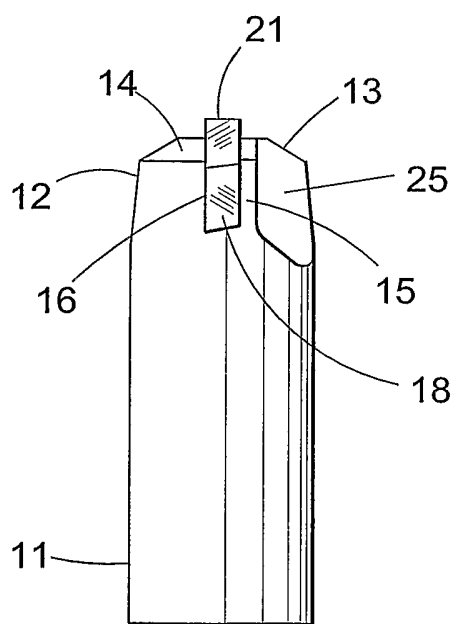


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000153

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21D 21/00, E21B 10/58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21D, E21B, B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4527931 A (SARIN), 9 July 1985 (09.07.1985), column 1, line 43 - line 68; column 2, line 12 - line 25; column 2, line 66 - column 3, line 49, figures 1-5	1-10,12,13
Y		11,14-19
A	--	
Y	US 6309159 B1 (WEAVER ET AL), 30 October 2001 (30.10.2001), column 1, line 4 - line 6; column 2, line 7 - line 35, figures 1-8	14,16,17,19
A	--	1-13,15,18

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 May 2004

Date of mailing of the international search report

12 -05- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Anna Ahlander/EK

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000153

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 664983 A (BRIAN EXLEY BERRY), 16 January 1952 (16.01.1952), page 1, line 47 - line 63, figure 3 --	11,15,18
X	US 6260638 B1 (MASSA ET AL), 17 July 2001 (17.07.2001), figures 1-9, abstract	1-8,10,12,13
A	--	9,11,14-19
P,X	US 20030068209 A1 (LEIBHARD ET AL), 10 April 2003 (10.04.2003), figures 1-5	1-9,13,14, 16,17,19
A	--	10-12,15,18
A	US 4819748 A (TRUSCOTT), 11 April 1989 (11.04.1989), column 7, line 33 - line 60; column 8, line 6 - line 13; column 8, line 26 - line 46, figures 1-8, abstract --	1-19
A	US 5836410 A (KLEINE), 17 November 1998 (17.11.1998), column 4, line 33 - line 55; column 5, line 15 - line 32, figures 1-5 --	1-19
A	DE 10114882 A1 (BACH F-W ET AL), 24 October 2002 (24.10.2002), column 1, line 39 - line 51 --	11,15,18
A	US 5927912 A (MIHAI ET AL), 27 July 1999 (27.07.1999), abstract -- -----	11,15,18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000153

US	4527931	A	09/07/1985	NONE		
US	6309159	B1	30/10/2001	AU	717071 A,B	16/03/2000
				BR	0015132 A	25/06/2002
				CN	1382243 T	27/11/2002
				EP	1224375 A	24/07/2002
				WO	0131161 A	03/05/2001
				ZA	200202950 A	15/07/2003
GB	664983	A	16/01/1952	NONE		
US	6260638	B1	17/07/2001	AU	728745 B	18/01/2001
				AU	8255798 A	10/02/1999
				CA	2293251 A	28/01/1999
				DE	69803677 D,T	12/09/2002
				EP	0996807 A,B	03/05/2000
				PL	337671 A	28/08/2000
				US	5996714 A	07/12/1999
				WO	9904129 A	28/01/1999
				ZA	9805662 A	26/01/1999
US	20030068209	A1	10/04/2003	NONE		
US	4819748	A	11/04/1989	NONE		
US	5836410	A	17/11/1998	CN	1075431 B	28/11/2001
				CN	1154900 A	23/07/1997
				DE	19545648 A	12/06/1997
				DE	59610671 D	00/00/0000
				DK	778391 T	15/12/2003
				EP	0778391 A,B	11/06/1997
				SE	0778391 T3	
				JP	9177465 A	08/07/1997
DE	10114882	A1	24/10/2002	NONE		
US	5927912	A	27/07/1999	EP	1119431 A	01/08/2001
				JP	2002501836 T	22/01/2002
				US	6030157 A	29/02/2000
				WO	9938632 A	05/08/1999