



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:** PCT/US2012/038218
- (22) **International Filing Date:** 16 May 2012 (16.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:** 61/486,595 16 May 2011 (16.05.2011) US
- (71) **Applicant (for all designated States except US):** **THE UNIVERSITY OF CHICAGO** [US/US]; 5801 South Ellis Avenue, Chicago, IL 60637 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **NAG, Angshuman** [IN/US]; 929 E. 57th St., #E247A, Chicago, IL 60637 (US). **TALAPIN, Dmitri V.** [BY/US]; 90 S. Herbert Road, Riverside, IL 60546 (US).
- (74) **Agents:** **DANEK, Shelley C.** et al.; Marshall, Gerstein & Borun LLP, 233 S. Wacker Drive, 6300 Willis Tower, Chicago, IL 60606-6357 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report (Rule 48.2(g))



(54) **Title:** MATERIALS AND METHODS FOR THE PREPARATION OF NANOCOMPOSITES

(57) **Abstract:** Disclosed herein is an isolable colloidal particle comprising a nanoparticle and an inorganic capping agent bound to the surface of the nanoparticle, a method for making the same in a biphasic solvent mixture, and the formation of structures and solids from the isolable colloidal particle. The process can yield photovoltaic cells, piezoelectric crystals, thermoelectric layers, optoelectronic layers, light emitting diodes, ferroelectric layers, thin film transistors, floating gate memory devices, phase change layers, and sensor devices.

MATERIALS AND METHODS FOR THE PREPARATION OF NANOCOMPOSITES

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The benefit of U.S. Provisional Application No. 61/486,595, filed May 16, 2011, is claimed, the disclosure of which is incorporated by reference in its entirety.

STATEMENT OF GOVERNMENT INTEREST

[0002] The invention was made with governmental support under grants from the U.S. National Science Foundation (DMR-0847535; IIP-1047180) and U.S. Department of Energy (DE-AC02-06CH11357). The U.S. government has certain rights in the invention.

FIELD OF DISCLOSURE

[0003] The disclosure generally relates to materials and methods for the preparation of nanocomposites. More specifically, the disclosure relates to inorganic capped colloidal materials and the methods of depositing these inorganic capped colloidal materials on a substrate to form nanocomposites. Still more specifically, the disclosure relates to the selective deposition and formation of nanocomposites on a substrate.

[0004] All-inorganic colloidal nanocrystals (NC) were synthesized by replacing organic capping ligands on chemically synthesized nanocrystals with metal-free inorganic ions such as S^{2-} , HS^- , Se^{2-} , HSe^- , HSe^- , Te^{2-} , HTe^- , TeS_3^{2-} , OH^- and NH_2^- . These simple ligands adhered to the NC surface and provided colloidal stability in polar solvents. The use of small inorganic ligands instead of traditional ligands with long hydrocarbon tails facilitated the charge transport between individual nanocrystals and opened up interesting opportunities for device integration of colloidal nanostructures.

BRIEF DESCRIPTION OF RELATED TECHNOLOGY

[0005] Nanoscale materials, materials with at least one dimension between about 1 and 1000 nm, have increasingly garnered attention due to their potential electronic, photophysical, chemical, and medicinal effects. The large-scale industrial application of nanoscale materials has generally focused on the formation of nanometer thick films and/or nanometer wide wires. Many of these industrially-applied nanoscale materials display extraordinary electronic and photophysical properties, but more often the materials lack the features that originally drew scientific interest toward nanocrystals, nanorods, and nanowires.

[0006] Attempts to incorporate the physical properties of nanocrystals, nanorods, and nanowires into films or bulk solids have led to the self-assembly of ordered nanoarrays. See Shevchenko et al, "Structural diversity in binary nanoparticle superlattices" in *Nature*, 439, 55-59 (2006). These self-assembled ordered nanoarrays have been produced from stable colloidal solutions of nanomaterials. For example, close-packed nanocrystal films have been

made by spin-coating or drop casting of colloidal solutions. Often these films show short range ordering, but forces such as entropy, electrostatics, and van der Waals interactions can cause these materials to self-assemble into superlattices. These techniques have afforded binary superlattices with tunable electronic structures based on the colloidal materials employed in the synthesis.

[0007] Though some single-component and binary superlattices exhibit desirable physical and electronic properties, these materials are not robust enough for large scale advanced material applications and their synthesis is not general enough to provide easy production of idealized materials.

[0008] A larger-scale approach to the synthesis of solid state materials encompassing nanocrystals is the impregnation and forced crystallization of nanocrystals from melts of inorganic materials. See Sootsman et. al, "Large Enhancements in the Thermoelectric Power Factor of Bulk PbTe at High Temperature by Synergistic Nanostructuring" in *Angew. Chem. Int. Ed.* 47, 8618-22 (2008). This rapid quenching approach can provide nanocrystalline material in bulk inorganic phases but lacks any methodology for the formation of ordered nanoarrays in the bulk material.

[0009] While the synthesis of solid state materials with ordered arrays of nanoscale materials has progressed to the point where nanocrystals can be deposited in ordered arrays on a surface, the use of these ordered arrays are hampered by the insulating ligands generally used in the manufacture of the nanocrystal. The practical use of these nanocrystals has been discovered through the blending of these organic soluble nanocrystals with polymers. See for example U.S. Pat. No. 7,457,508. For example, nanocomposites of nanocrystals and conjugated polymers can yield tunable semiconducting photonic structures, and with unique optical, electrical, magnetic, electrochromic, and chemical properties. See for example U.S. Pat. No. 7,200,318.

[0010] The majority of applications wherein these advanced materials will be applicable employ inorganic solids as the functional material. One example of an applicable inorganic solid that incorporates nanoscale materials is the fabrication of inorganic nanocomposites described in U.S. Pat. Appl. No. 11/330,291. This methodology involves the codeposition of a nanocrystalline material with an inorganic matrix precursor from a homogeneous hydrazine solution, a technique similar to the deposition of nanocrystalline materials in polymers as described in J. W. Lee et al., *Advanced Materials* 2000, 12, 1102. This methodology fails to provide the selectivity of structure for the synthesis of tunable semiconducting materials, does not prevent the carbon contamination of the synthesized inorganic nanocomposite, and requires a highly toxic, hypergolic solvent. Hence, the industrial applicability of the

methodology is limited by material requirements, and the overwhelming health and safety concerns.

[0011] Generally, the prior art does not sufficiently teach or suggest the isolation of colloidal particles useful for the easy and safe deposition of a pure colloidal material. Moreover, the prior art does not teach or suggest a methodology based on isolable colloidal nanomaterials for the production of superlattices, inorganic matrices, hetero-alloys, alloys, and the like.

SUMMARY OF INVENTION

[0012] Disclosed herein is a composition and a method for making that composition having a nanoparticle capped with an inorganic capping agent. The method generally includes at least two immiscible solvents and the exchange of an organic capping agent on a nanoparticle with the herein described inorganic capping agent.

[0013] Another aspect of the disclosure is a composition made of the nanoparticle and the inorganic capping agent. The composition is isolable, can be purified, and importantly may display approximately the same opto-electronic characteristics as the nanoparticle with an organic capping agent.

[0014] Yet another aspect of the disclosure is the deposition of the composition on a substrate. Herein, the composition can be deposited as thin or bulk films by a variety of techniques with short or long range ordering of the nanoparticles. The deposited composition, importantly, displays approximately the same opto-electronic characteristics as the composition in solution.

[0015] Still another aspect of the disclosure is the thermal decomposition of the deposited composition to form inorganic matrices with imbedded nanoparticles. The annealed composition has an inorganic matrix that corresponds to the thermal decomposition product of the inorganic capping agent. Additionally, as the annealed composition can be produced from the deposited composition with ordered nanoparticles (arrays), the annealed composition can have ordered arrays of nanoparticles in a solid state matrix. The annealed composition can also, importantly, display approximately the same optical characteristics as the deposited composition.

[0016] Additionally, the deposited composition can be thermally treated such that the composition partially or wholly anneals. The formed alloy can have discrete regions with elemental compositions that approximate the nanoparticle and the solid state matrix as made through the above referenced thermal decomposition or the alloy can be annealed to a single phase.

[0017] The herein disclosed materials and methods provide a route to new and useful solid state materials that can exhibit for example thermoelectric, piezoelectric, ferroelectric, phase change and electroluminescent characteristics. These solid state materials can be used in devices like photovoltaic cells, piezoelectric crystals, thermoelectric layers, optoelectronic layers, light emitting diodes, ferroelectric layers, thin film transistors, floating gate memory devices, phase change layers, and sensor devices. Uses of and methods of assembling such devices are generally described in USSN 12/142,454, US Patent 7,348,224, USSN 12/328,788, USSN 11/865,325, USSN 11/864,877, PCT/US2007/018015, USSN 12/285,158, USSN 12/108,500, USSN 11/942,441, PCT/US2008/002246, USSN 11/584,304, USSN 12/241,333, USSN 12/179,807, USSN 12/155,015, PCT/US2006/022250, US Patent 7,517,702, USSN 12/050,676, USSN 12/130,075, USSN 11/789,344, PCT/KR2007/002885, USSN 11/704,623, USSN 11/856,086, USSN 11/604,746, PCT/US2008/000271, US Patent 7,485,526, USSN 12/079,088, USSN 12/032,252, PCT/US2008/005430, USSN 12/050,284, and USSN 11/803,261 all of which are incorporated herein by reference. Solid state materials in accordance with the descriptions herein may be used in assembling any of these and similar devices.

[0018] Additional features of the invention may become apparent to those skilled in the art from a review of the following detailed description, taken in conjunction with the drawings, the examples, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

[0019] The patent or application file contains at least one drawing and at least one photograph executed in color. Copies of this patent or patent application publication with color drawings and color photographs will be provided by the Office upon request and payment of the necessary fee.

[0020] For a more complete understanding of the disclosure, reference should be made to the following detailed description and accompanying drawings wherein:

[0021] Figure 1 **(a)** Red colored colloidal dispersion of CdSe NCs undergoes the phase transfer from toluene to FA upon exchange of the original organic surface ligands with S^{2-} . **(b)** Absorption and PL spectra of 5.5 nm CdSe NCs capped with organic ligands and S^{2-} ligands dispersed in toluene and FA respectively. **(c)** FTIR spectra of 5.5 nm CdSe NCs with different combinations of ligands and solvents. **(d)** NC size-distributions measured by Dynamic Light Scattering for ~12 nm CdSe NCs capped with organic ligands and S^{2-} ions. Inset shows TEM image of the NCs capped with S^{2-} ligand. **(e)** TEM images of S^{2-} - DDA⁺ capped CdS nanorods. **(f)** Absorption spectra of 5.5 nm CdSe NCs capped with different ligands.

[0022] Figure 2 (a) Absorption and PL spectra of CdSe/ZnS core/shell NCs capped with S^{2-} ligands dispersed in FA; inset shows the luminescence of NC dispersion upon illumination with 365 nm UV light. (b) Absorption spectra of InP NCs capped with organic ligands and S^{2-} ligands dispersed in toluene and FA respectively. Inset shows the optical photograph of colloidal dispersion of InP NCs in FA. (c) Absorption spectra of Au NCs capped with dodecanethiol and S^{2-} ligands dispersed in toluene and FA, respectively. Inset shows the optical photograph of a colloidal dispersion of Au NCs in FA. (d) DLS size-distribution plots for Au NCs capped with the organic and S^{2-} ligands.

[0023] Figure 3 (a) ESI-MS spectrum of $(NH_4)_2TeS_3$ solution. The inset compares an experimental high-resolution mass-spectrum with simulated spectra for TeS_3H^- and TeS_3^- ions. (b) Absorption spectra for $(NH_4)_2TeS_3$, for CdSe NCs capped with the organic ligands in toluene and for CdSe NCs capped with TeS_3^{2-} ions in formamide.

[0024] Figure 4 (a) Absorption and PL spectra of OH^- and NH_2^- capped CdSe NCs dispersed FA. Inset shows a photograph of the colloidal solution. (b) Absorption spectra of ZnSe NCs capped with oleylamine and OH^- ligands dispersed in toluene and FA, respectively.

[0025] Figure 5 (a) Removal of the organic ligands from the surface of CdSe NCs by HBF_4 treatment. For simplicity, monodentate binding mode of carboxylate group is shown. The proposed mechanism can hold for other chelating and bridging modes as well. (b) Absorption and PL spectra of ligand-free colloidal CdSe and CdSe/ZnS NCs obtained after HBF_4 treatment. (c) FTIR spectra of organically capped and ligand-free CdSe NCs after HBF_4 treatment.

[0026] Figure 6 (a-c) Plots of drain current I_D vs. drain-source voltage V_{DS} , measured as different gate voltages V_G for the field-effect transistors (FETs) assembled from colloidal NCs capped with $(NH_4)_2S$: (a) CdSe, (b) CdSe/CdS core-shells and (c) CdSe/ZnS core-shells. Insets to panel (c) show the photoluminescence spectrum (left) and a photograph (right) for CdSe/ZnS NC film capped with $(NH_4)_2S$ ligands annealed at 250°C for 30 min. (d,e) Plots of I_D vs. V_G at constant $V_{DS} = 2V$ used to calculate current modulation and linear regime field-effect mobility for FETs using CdSe and CdSe/CdS NCs. (f) Plots of I_D vs. V_G measured at constant $V_{DS} = 4V$ in a FET assembled from CdSe/ZnS NCs. $L = 80 \mu m$, $W = 1500 \mu m$, 100 nm SiO_2 gate oxide.

[0027] Figure 7 is the photoluminescent spectrum of SH^- capped CdSe NCs dispersed in formamide;

[0028] Figure 8 is the FTIR spectra of FA, DMSO, H_2O and an aqueous solution of $(NH_4)_2S$;

- [0029] Figure 9 is the ESI Mass spectra of different sulfide and polysulfide ions used as ligands for colloidal nanocrystals;
- [0030] Figure 10 are the Experimental and simulated mass-spectra showing the regions of (a) S_5Na^- , (b) S_6Na^- and (c) S_7Na^- . Experimental spectra were obtained from red colored Na_2S_x aqueous solution and different spectral regions were collected from the corresponding ESI-MS spectrum in Figure 9;
- [0031] Figure 11 Experimental and simulated mass spectra showing the regions of (a) S_3^{2-}/S_3H^- , (b) $S_2O_3^{2-}/S_2O_3H^-$, (c) S_4^{2-}/S_4H^- , (d) S_5H^- and (e) S_6H^- . Experimental spectra were obtained from the yellow colored aqueous solution $(NH_4)_2S$ and different spectral regions were collected from the corresponding spectrum in Figure 9;
- [0032] Figure 12 Powder X-ray diffraction patterns of CdSe NCs capped with the organic ligands and same NCs capped with TeS_3^{2-} ligands after annealing at 120 °C;
- [0033] Figure 13 is XRD patterns of TeS_3^{2-} capped PbS NCs;
- [0034] Figure 14 is XRD patterns of 5 nm CdSe NCs capped with different ligands;
- [0035] Figure 15 is FTIR spectra CdSe NCs capped with organic ligands, KOH and $NaNH_2$;
- [0036] Figure 16 is a table comparing the ζ -potential values for NCs capped with soft bases (S^{2-} and SH^-) and hard base (OH^-). Soft bases exhibit more negative ζ -potential, indicating higher binding affinity, for NCs with softer acidic sites. In contrast, the hard base shows higher binding affinity for NCs with harder acidic sites;
- [0037] Figure 17 is UV-visible absorption spectra of ~5 nm CdSe NCs capped with organic ligands and same NCs after $NOBF_4$ treatment, dispersed in hexane and FA, respectively;
- [0038] Figure 18 is Plots of I_D vs. V_G at constant $V_{DS} = 30V$ used to calculate the saturation field-effect mobility for FETs using (a) CdSe, (b) CdSe/CdS core-shell NCs and (c) CdSe/ZnS core-shell NCs. $L = 80 \mu m$, $W = 1500 \mu m$, 100 nm SiO_2 gate oxide;
- [0039] Figure 19 are FETs assembled from 3.9 nm CdSe NCs capped with TeS_3^{2-} ligands annealed at 250 °C for 30 min. (A) Plots of drain current I_D vs. drain-source voltage V_{DS} , measured as different gate voltages V_G . (B) Plots of I_D vs. V_G at constant $V_{DS} = 2V$ used to calculate current modulation and linear regime field-effect mobility. $L = 80 \mu m$, $W = 1500 \mu m$, 100 nm SiO_2 gate oxide;
- [0040] Figure 20 is a schematic of top-gate transistor used here; and
- [0041] Figure 21 is plots of the (a) Transfer and (b) output characteristics of transistors based on S^{2-} capped CdSe nanocrystals annealed at 200 °C.

[0042] Figure 22 shows (A) Dynamic light scattering (DLS) size histogram for Fe_2O_3 NCs (15nm) capped with POMs. (B) Zeta potential (ζ) measurements for CdSe and Fe_2O_3 NCs before and after PO_4^{3-} ligand capping. FTIR spectra of (C) Fe_2O_3 NCs (D) CdSe NCs before and after organic ligands removal. (E) Zeta potential measurements for positively charged CdSe NCs in FA with addition of PO_4^{3-} ligands. (F) Absorption spectra of CdSe NCs capped with different oxo- ligands.

[0043] Figure 23 shows TEM images of Fe_2O_3 NCs capped with (A,B) Na_2MoO_4 (C,D) Na_2HAsO_4 (E,F) $\text{Na}_3[\text{PMo}_{12}\text{O}_{40}]$ (G,H) $\text{K}_6[\text{P}_2\text{Mo}_{18}\text{O}_{62}]$ in NFA (left panel) and FA (right panel), respectively.

[0044] Figure 24 shows TEM images of CdSe NCs capped with (A) organic ligands (B) in DMF after HBF_4 treatment (C) Na_3VO_4 (D) $\text{Na}_2\text{S}_2\text{O}_3$ (E) Na_2MoS_4 (F) Na_2MoO_4 (G) Na_2HAsO_4 (H) Na_3PO_4 in FA.

[0045] Figure 25 shows Zeta potential titration of (A) CdSe NCs and (B) Fe_2O_3 NCs by addition of different amounts of oxo-ligands in DMF.

[0046] Figure 26 shows ζ -potential measurements of Fe_2O_3 NCs solutions in DMF with different pHs.

[0047] Figure 27 shows a TEMs for comparison of growth made on two different NCs at room temperature.

[0048] Figure 28 shows TEM images and absorption spectra of different NCs with different inorganic ligands.

[0049] Figure 29 shows absorption spectra of CdSe-xSCd for $x=1..10$. TEM images of CdSe and CdSe-10SCd grown by successive phase transfer.

[0050] Figure 30 shows (left) Absorption spectra of CdSe(nanoplatelets absorbing at 462nm)/xSCd, all the spectra have been done at the same concentration. (right top) Variation of the first excitonic peak absorption wavelength, wavelength of photoluminescence maximum (green dots) and the FWHM in function of the thickness of the shell. (right bottom) Picture of the aliquots CdSe/SCd.

[0051] Figure 31 shows absorption spectra of CdS-xSZn doped with manganese in the third layer for $x=1..6$ and emission spectrum of CdS-6SZn :Mn showing the phosphorescence coming from Mn^{2+} .

[0052] Figure 32 shows (a) Ligand exchange of TOP capped InAs NCs with $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ upon phase transfer from hexane to N_2H_4 . (b) Absorption spectra of InAs NCs capped with TOP and $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ in toluene and N_2H_4 , respectively. (c) TEM image of InAs NCs capped with $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$. (d) Absorption spectra of InP NCs capped with TOP/TOPO and $(\text{N}_2\text{H}_4)_3(\text{N}_2\text{H}_5)_4\text{Sn}_2\text{S}_6$ in toluene and N_2H_4 , respectively. (e)

TEM image of InP NCs capped with $(\text{N}_2\text{H}_4)_3(\text{N}_2\text{H}_5)_4\text{Sn}_2\text{S}_6$. (f) Size distribution of InAs NCs measured by Dynamic Light Scattering after ligand exchange with $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$.

[0053] Figure 33 shows (a) Fourier transform infrared spectra of InAs NCs capped with TOP (red line) and $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ before (green line) and after (blue line) annealing at 200°C. (b) Fourier transform infrared spectra for InP NCs capped with myristic acid (red line) and $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ ligand before (green line) and after (blue line) annealing at 200°C. (c) Powder X-ray (CuK_α radiation) diffraction of InAs NCs capped with $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ before (red line) and after (blue line) annealing at 280°C. (d) Powder X-ray (CuK_α radiation) diffraction of InP NCs capped with $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ before (red line) and after (blue line) annealing at 280°C. (e) Thermogravimetric scans for $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ (black line) and $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ capped InAs NCs. (f) Absorption spectra taken with an integrated sphere for thin film of $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ capped InAs NCs before and after annealing at 200°C.

[0054] Figure 34 shows (a-c) Plots of drain current (I_D) vs drain-source voltage (V_{DS}) measured at different gate voltages (V_G) for field-effect transistor (FETs) assembled from InAs NCs capped with $\text{Cu}_7\text{S}_4^{2-}$, $\text{Sn}_2\text{S}_6^{4-}$ and $\text{Sn}_2\text{Se}_6^{4-}$, respectively. (d-e) Plots of I_D vs V_G at constant $V_{DS}=2\text{V}$ used to calculate current modulation and linear electron mobility for FETs assembled from InAs NCs capped with $\text{Cu}_7\text{S}_4^{2-}$, $\text{Sn}_2\text{S}_6^{4-}$ and $\text{Sn}_2\text{Se}_6^{4-}$, respectively. $L=50\text{nm}$, $W=1500\text{nm}$, 100nm gate oxide.

[0055] Figure 35 shows (a-c) Photoresponse measured at a bias of 2V as a function of excitation energy in closed-packed films of InAs NC capped with $\text{In}_2\text{Se}_4^{2-}$, $\text{Cu}_7\text{S}_4^{2-}$, and $\text{Sn}_2\text{S}_6^{4-}$, respectively. (d) Gate dependent photoresponse for the FETs assembled from colloidal InAs NCs capped with $\text{Sn}_2\text{S}_6^{4-}$. $L=50\ \mu\text{m}$, $W=1500\ \mu\text{m}$, 100nm gate oxide.

[0056] Figure 36 shows (a) Plots of drain current (I_D) vs drain-source voltage (V_{DS}) measured at different gate voltages (V_G) for the FETs assembled from colloidal InP NCs capped with $\text{In}_2\text{Se}_4^{2-}$. (b) Plot of I_D vs V_G at constant $V_{DS}=30\ \text{V}$ used to calculate current modulation and saturation mobility for FETs assembled from colloidal InP NCs capped with $\text{In}_2\text{Se}_4^{2-}$. $L=4.5\ \mu\text{m}$, $W=7800\ \mu\text{m}$, 100 nm gate oxide. (c) I-V curves of films of InP NCs capped with $\text{In}_2\text{Se}_4^{2-}$ as a function of excitation energy. (d) Photoresponse measured at the bias of 3 V as function of excitation energy in closed-packed films of InP NC capped with $\text{In}_2\text{Se}_4^{2-}$.

[0057] Figure 37(a) Schematic representation of surface charges for K_2S capped CdSe NCs, before (left) and after (right) treatment with strongly binding metal ions M^{n+} . Figure 37(b) The variations of ζ -potential of K_2S capped CdSe NCs in formamide in presence of 5 mM various metal ions. The inset shows the variation of ζ -potential in the Mg^{2+} , Ca^{2+} , Ba^{2+} series plotted against the metal ion radius relative to the ionic radius of Cd^{2+} . Figure 37(c)

UV-visible absorption and PL spectra of CdSe NCs capped with K_2S , before and after addition of 5 mM Cd^{2+} ions. Figure 37(d) Room temperature PL efficiency of CdSe/ S^{2-} NCs in the presence of different metal ions, plotted against ζ -potential.

[0058] Figure 38(a) Photoluminescence spectra for CdSe/ZnS NCs capped with K_2S in the presence of different concentrations of Cd^{2+} ions. Figure 38(b) PL decay profiles for CdSe/ZnS NCs with different surface modifications. The excitation wavelength was 400 nm.

[0059] Figure 39(a) UV-visible absorption spectra for a film of CdSe NCs capped with K_2S before and after treatment with Cd^{2+} ions. The measurements were carried out using an integrating sphere. Figure 39(b) Schematics of NC linking with metal ions. (c) Schematics of a field-effect transistor used for studies of electronic coupling in the NC solids.

[0060] Figure 40 generally illustrates The effect of metal ion on the electron mobility in all-inorganic NC solids. Output characteristics, I_D vs. V_{DS} as a function of gate voltage V_G for the field-effect devices (FETs) using films of 4.2 nm CdSe NCs capped with K_2S (CdSe/ S^{2-}/K^+), as shown in Figure 40(a) and CdSe/ S^{2-} NCs treated with Cd^{2+} ions (CdSe/ S^{2-}/Cd^{2+}), as shown in Figure 40(b). Figure 40(c) Transfer characteristics, I_D vs. V_G at $V_{DS} = 3V$ for FET devices using CdSe/ S^{2-}/K^+ and CdSe/ S^{2-}/Cd^{2+} NC solids. The inset shows the turn-on gate voltage (V_{th}) for CdSe/ S^{2-} NCs treated with different cations. Figures 40(d) and 40(e) illustrate plots of output characteristic and Figure 40(f) illustrates a plot of transfer characteristics for FETs made of K_2S capped 4.5 nm InAs NCs before (InAs/ S^{2-}/K^+) and after (InAs/ S^{2-}/In^{3+}) treatment with In^{3+} ions. Figures 40(g) and 40(h) illustrate plots showing the effect of different metal ions in the field-effect electron mobility in CdSe/ S^{2-} InAs/ S^{2-} NC films, respectively.

[0061] Figure 41 generally illustrates output characteristics, I_D vs. V_{DS} as a function of gate voltage V_G for FET devices using K_2Te capped CdSe NC films (CdTe/ Te^{2-}/K^+), as shown in Figure 41(a), and the same films treated with In^{3+} ions (CdTe/ Te^{2-}/In^{3+}), as shown in Figures 41(b) and 41(c). Figure 41(d) is a plot of the output characteristics for an n-type FET using CdTe NCs capped with $In_2Se_4^{2-}$ ions (CdTe/ $In_2Se_4^{2-}$). Figures 41(e) and 41(h) are plots of transfer characteristics, I_D vs. V_G in the saturation limit for FET devices made of Figure 41(e) CdTe/ Te^{2-}/K^+ , Figure 41(f) and 41(g) CdTe/ Te^{2-}/In^{3+} NCs and Figure 41(h) CdTe/ $In_2Se_4^{2-}$ NCs. The data shown in panels a-c, e-g were obtained using bottom gate / bottom source-drain FET device geometry (Ti/Au source and drain electrodes, channel length = 5 μm and width = 7800 μm). Data in panels d and h were obtained using bottom gate / top source-drain FET geometry (Al electrodes, channel length = 150 μm and width = 1500 μm).

[0062] Figure 42 is a plot of magnetization (M) vs field (H) plots for K_2S capped CdSe NCs, before (CdSe/ S^{2-}/K^+) and after (CdSe/ S^{2-}/Mn^{2+}) treatment with Mn^{2+} ions. Upper-left

inset shows M-H data for CdSe/S²⁻/Mn²⁺ in the low-field region. The bottom-right inset shows ZFC and FC curves measured at 100 Oe for CdSe/S²⁻/Mn²⁺ NCs.

[0063] Figure 43 is a plot of X-band EPR spectrum of CdSe/S²⁻/Mn²⁺ NCs measured at 4.6K. The inset shows the variation of EPR signal intensity at 305.9 mT during on/off illumination cycles.

[0064] Figure 44(a) is a plot of a comparison of Mn K-edge XANES spectra for Mn²⁺ treated K₂S - capped CdSe NCs (CdSe/S²⁻/Mn²⁺) with standard compounds containing Mn in different oxidation states. Figure 44(b) is a plot of magnitude of the Fourier transformed Mn K-edge EXAFS data and the fit for CdSe/S²⁻/Mn²⁺ NCs. Figure 44(c) is a plot of a comparison of the S-edge XANES spectra for CdSe/S²⁻/K⁺ and CdSe/S²⁻/Mn²⁺ NCs with XANES spectra of K₂S and MnS used as standards.

[0065] Figure 45(a) is a schematic of CdSe/S²⁻ NC surface with coordinated Pt²⁺ ions showing that electrons supplied by NC can drive proton reduction. Figure 45(b) is a plot of cyclic voltammograms measured for CdSe/S²⁻/K⁺ and CdSe/S²⁻/Pt²⁺ NC films in anhydrous acetonitrile in presence of 0.01 M [H(DMF)]OTf as a proton source and 0.1 M tetrabutylammonium perchlorate as an electrolyte. Figure 45(c) is a plot of cyclic voltammograms measured for CdSe/S²⁻/K⁺ and CdSe/S²⁻/Pt²⁺ NC films in aqueous solution buffered at pH 6.5 with a phosphate buffer. The inset shows onsets of hydrogen reduction process for different electrodes.

[0066] Figure 46 illustrates FTIR spectra of original 4.2 nm CdSe NCs capped with octadecylphosphonic acid (red line) and after the exchange of the organic ligands with K₂S (blue line).

[0067] Figure 47 illustrates the variation of ζ-potential of K₂S capped CdSe NCs after treatment with various metal nitrates. The concentrations of metal ions were adjusted such that the total ionic strength was 15 mM for all solutions.

[0068] Figure 48 is a plot comparison of PL spectra of Sn₂S₆⁴⁻ capped CdSe NCs before and after Cd²⁺ treatment. Corresponding ζ-potential values are shown in figure legend.

[0069] Figure 49 is a plot of UV-visible absorption spectra of solutions of K₂S capped CdSe NCs in formamide, before and after treatment with different metal ions.

[0070] Figure 50 is a plot of PL spectra of K₂S capped CdSe/ZnS NC dispersion in FA, before and after treatment with different cations. The PL intensity was normalized to the absorbance of colloidal solutions at the excitation wavelength (450 nm).

[0071] Figure 51 is a schematics showing agglomeration of CdSe/S²⁻ NCs due to linking of NCs by Cd²⁺ ions.

[0072] Figure 52 is a plot of powder X-ray diffraction patterns for Cd²⁺ treated S²⁻ capped CdSe (CdSe/S²⁻/Cd²⁺) NCs at room temperature and after annealing the sample at 200°C for 30 minutes.

[0073] Figure 53 is a plot showing transfer characteristics for the field-effect transistors with FET channel assembled from CdSe/S²⁻/K⁺ NCs (black line) and CdSe/S²⁻/Cd²⁺ NCs (red line). The I_D vs. V_G curves were measured at $V_{DS} = 3V$. Channel length is 150 μm , width is 1500 μm .

[0074] Figures 54(a)-(c) are plots of output characteristics (I_D vs. V_{DS}) as a function of gate voltage V_G for FET devices made of CdSe/S²⁻/K⁺ NC solids treated with different metal ions (Zn²⁺, In³⁺ and Mn²⁺). Figures 54(d)-(f) plot transfer characteristics, (I_D vs. V_G at $V_{DS} = 3V$) for FET devices made of CdSe/S²⁻/K⁺ NC solids treated with different metal ions. Channel length is 150 μm , width is 1500 μm .

[0075] Figures 55(a) and 55(b) plot output characteristics (I_D vs. V_{DS}) as a function of gate voltage V_G for FET devices made of InAs S²⁻/K⁺ NC solids treated with Cd²⁺ ions (InAs/S²⁻/Cd²⁺) and Mn²⁺ ions (InAs/S²⁻/Mn²⁺). Figures 55(c) and 55(d) plot transfer characteristics (I_D vs. V_G at $V_{DS} = 3V$) for InAs/S²⁻/Cd²⁺ and InAs/S²⁻/Mn²⁺ NCs. Channel length is 150 μm , width is 1500 μm .

[0076] Figure 56(a) is a plot of transfer characteristics (I_D vs. V_G at $V_{DS} = 3V$) for Li₂S capped CdSe NCs before (CdSe/S²⁻/Li⁺) and after treatment with Cd²⁺ ions (CdSe/Li₂S/Cd²⁺). Figure 56(b) is a plot of transfer characteristics at $V_{DS} = 3V$ for K₂Se capped CdSe NC before (CdSe/Se²⁻/K⁺) and after treatment with Cd²⁺ ions (CdSe/K₂Se/Cd²⁺). Channel length is 150 μm , width is 1500 μm .

[0077] Figure 57(a) is a plot of output characteristics (I_D vs. V_{DS}) and Figure 57(b) is a plot transfer characteristics (I_D vs. V_G) for Cd²⁺ treated S²⁻ capped CdSe (CdSe/S²⁻/Cd²⁺) NC film annealed at 300°C for 10 seconds using rapid thermal annealing. Channel length is 150 μm , width is 1500 μm .

[0078] Figure 58 is a plot of transfer characteristics (I_D vs. V_G at $V_{DS} = -30V$) for K₂Te capped CdTe NC using FET geometry bottom-gate and top source / drain gold electrodes. Channel length is 150 μm , width is 1500 μm .

[0079] Figure 59 is a plot of transfer characteristics (I_D vs. V_G) at (a) $V_{DS} = -30V$ and (b) $V_{DS} = +30V$ using bottom-gated and bottom source / drain electrodes geometry (Ti/Au electrodes, channel length=5 μm , width=7800 μm) for K₂Te capped CdTe NC treated with Cd²⁺ ions (CdTe/Te²⁻/Cd²⁺).

[0080] Figure 60(a) is a plot of output characteristics (I_D vs. V_{DS}) and Figure 60(b) is a plot of transfer characteristics (I_D vs. V_G) In₂Se₄²⁻ capped CdTe NCs (CdTe/In₂Se₄²⁻/N₂H₅⁺) using

bottom gate / top source-drain geometry with Au source and drain electrodes. Channel length is 150 μm , width is 1500 μm .

[0081] Figure 61 is an illustration of powder X-ray diffraction patterns for K_2S capped CdSe NCs before ($\text{CdSe/S}^{2-}/\text{K}^+$) and after ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) treatment with Mn^{2+} ions.

[0082] Figures 62(a) and 62(b) are plots of temperature dependence of magnetic susceptibility for (a) Mn^{2+} treated S^{2-} capped 4.5 nm InAs NCs ($\text{InAs/S}^{2-}/\text{Mn}^{2+}$) and (b) Mn^{2+} treated S^{2-} capped 4.2 nm CdSe NCs ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) plotted in Curie-Weiss coordinates. Figure 62(c) is a modified Curie-Weiss plot for $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NCs confirming the presence of temperature-independent paramagnetism. The linear dependence is expected in $\chi_{\text{exp}}T$ vs. T coordinates if $\chi_{\text{exp}} = C/(T-\theta) + \chi_{\text{TIP}}$, where χ_{exp} is the magnetic susceptibility measured in experiment, χ_{TIP} is temperature-independent component of the magnetic susceptibility, C is the Curie constant, θ is the Curie temperature and $T \gg \theta$.

[0083] Figure 63 is a plot of normalized EPR spectra of a central sextet after subtracting broad signals showing that the EPR parameters are the same for Mn^{2+} treated S^{2-} capped CdSe NCs ($\text{InAs/S}^{2-}/\text{Mn}^{2+}$) and Mn^{2+} treated S^{2-} capped InAs NCs ($\text{InAs/S}^{2-}/\text{Mn}^{2+}$). Spectra were measured at 4.6K.

[0084] Figure 64 is a plot of variation of the EPR signal intensity at 305.9 mT during light on/off cycle. Gray and black lines were obtained after illuminating the sample with a Xe-lamp using a combination of IR-blocking filter and a long-pass filter with cutoff at 700 nm and 400 nm, respectively.

[0085] Figure 65 is a plot comparison of Mn pre-edge (K-edge) XANES spectra for Mn^{2+} treated K_2S - capped CdSe NCs ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) with MnS and MnO bulk standard samples.

[0086] Figure 66 is a plot of the real part of the Fourier transformed Mn K-edge EXAFS data and model fit for of Mn^{2+} treated K_2S capped CdSe ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) NCs. The fit parameters are given in Table 2.

[0087] Figure 67 is a comparison of S K-edge XANES for K_2S capped CdSe NCs before ($\text{CdSe/S}^{2-}/\text{K}^+$) and after ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) Mn^{2+} treatment along with different standards.

[0088] Figure 68 is a plot of the S-edge XANES for K_2S capped CdSe NCs ($\text{CdSe/S}^{2-}/\text{K}^+$) after Mn^{2+} treatment ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$), and a linear combination fit using XANES data for $\text{CdSe/S}^{2-}/\text{K}^+$ NCs and MnS.

[0089] Figure 69 is a plot of UV-visible absorption spectra of ITO-covered glass electrodes coated with thin films of K_2S capped CdSe NCs before (black) and after (blue) dipping in 0.1 M solutions of $\text{K}_2[\text{PtCl}_4]$ in FA. Spectra were taken before (solid) and after (dashed) electrochemical cycling in acetonitrile between -1.7 V and 0 V vs. Ag^+/Ag reference electrode at 100mV/s.

[0090] Figure 70 is a plot of cyclic voltammograms measured for CdSe/S²⁻/K⁺ and CdSe/S²⁻/Pt²⁺ NC films in aqueous solution buffered at pH 6.5 with a phosphate buffer. The inset shows onsets of hydrogen reduction process for different electrodes.

[0091] Figure 71(a) is a plot of cyclic voltammograms measured for bare glassy carbon (GC) electrodes before (black curve) and after (blue curve) treatment with 0.1M K₂PtCl₄ solution in FA for 30 min. Figure 7a(b) is a plot of cyclic voltammograms measured for bare glassy carbon electrode (black curve) and films of TDPA-capped CdSe NCs before (blue curve) and after (red curve) treatment with 0.1M K₂PtCl₄ solution in FA for 30 min. All measurements were carried out in aqueous solutions buffered at pH 6.5 with a phosphate buffer. The potential scan rate was 100 mV/s.

[0092] While the disclosed compositions and methods are susceptible of embodiments in various forms, there are illustrated in the drawings (and will hereafter be described) specific embodiments of the invention, with the understanding that the disclosure is intended to be illustrative, and is not intended to limit the invention to the specific embodiments described and illustrated herein.

DETAILED DESCRIPTION OF THE INVENTION

[0093] The compositions and methods described herein generally relate to a new colloidal material, a composite, made from nanometer scale particles and soluble precursors to inorganic matrices. The colloidal material can be facily produced from single or multi-component mixtures of colloidal particles. These new colloidal materials and the general methods described herein may reduce the time, expense, and uncertainty in the manufacture of advanced materials. Disclosure of U.S. patent application No. 13/266,079 (published as U.S. Patent Application No. 2012/104325 and as International Patent Publication No. WO 10/124212) is incorporated by reference in its entirety.

[0094] Colloidal particles, from which colloidal materials can be produced, are discrete particles and are generally suspendable in at least one solvent. Often colloidal particles have sizes ranging from the nanometer scale to the micron scale and commonly exist as mixtures of colloidal particles with broad size ranges. One subset of colloidal particles are nanoparticles, specifically those colloidal particles where at least the cross-sections of the particle in two dimensions are between about 1 and about 1000 nanometers (nm). Nanoparticles can be produced in a large variety of morphologies and sizes all of which are applicable herein. Nonlimiting examples of the morphologies of nanoparticles include nanocrystals, nanorods, nanoplates, nanowires, and dendritic nanomaterials. Within each morphology there is an additional large variety of shapes available, for example nanocrystals can be produced in spheres, cubes, tetrahedra, octahedra, icosahedra, prisms, cylinders, wires, branched and hyperbranched morphologies and the like. The morphology and the

size of the nanoparticles do not inhibit the general method for making colloidal materials described herein; specifically the selection of morphology and size of the nanoparticle allows for the tuning and control of the properties of the colloidal material, as will become clear.

[0095] Non-limiting examples of nanoparticles applicable herein include: AlN, AlP, AlAs, Ag, Au, Bi, Bi₂S₃, Bi₂Se₃, Bi₂Te₃, CdS, CdSe, CdTe, Co, Cu, Fe, FeO, Fe₂O₃, Fe₃O₄, FePt, GaN, GaP, GaAs, GaSb, GaSe, Ge, HgS, HgSe, HgTe, InN, InP, InSb, InAs, Ni, PbS, PbSe, PbTe, Pd, Pt, Ru, Rh, Si, Sn, ZnS, ZnSe, ZnTe, and mixtures thereof. Examples of applicable nanoparticles include core/shell nanoparticles like CdSe/CdS, CdSe/ZnS, InP/CdSe, InP/ZnS, InP/ZnSe, InAs/CdSe, and InAs/ZnSe; nanorods like CdSe, core/shell nanorods like CdSe/CdS; nano-tetrapods like CdTe, and core/shell nano-tetrapods like CdSe/CdS.

[0096] Often nanoparticles are synthesized in such a manner that the resulting nanoparticle is capped, or coated, in a stabilizing organic material, an organic capping agent. One typical example of an organic capping agent is trioctylphosphine oxide (TOPO), used in the manufacture of CdSe. The TOPO capping agent prevents the agglomeration of the nanoparticle during and after the synthesis of the particle, additionally the long organic chains radiating from the capping agent on the surface of the nanoparticle assist in the suspension and/or solubility of the nanoparticle in a solvent. A second type of organic capping agent is a organic thiol, often used in the manufacture of silver or gold nanoparticles. These organic thiols range from simple long chain alkane thiols, like dodecane thiol, to complex monothiols. The long organic chain of the organic thiol capping agent, as with the TOPO capping agent, assists in the suspension and/or solubility of the capped nanoparticle. Other known capping agents include long-chain aliphatic amines, long-chain aliphatic phosphines, long-chain aliphatic carboxylic acids, long-chain aliphatic phosphonic acids and mixtures thereof.

[0097] The present disclosure provides techniques for replacement of the organic capping agents with inorganic capping agents. As used herein, inorganic capping agents refer to those soluble reagents free of organic functionality that displace organic capping agents from nanoparticles and wherein the inorganic capped nanoparticle is dispersible, that is suspendable and/or soluble. One aspect of the technique for replacing the organic capping agents with inorganic capping agents is the complete displacement of the organic capping agents from the nanoparticle and replacement with the inorganic capping agent.

[0098] Inorganic capping agents can be neutral or ionic, and can be discrete species, linear or branched chains, or two-dimensional sheets. Ionic inorganic capping agents are commonly referred to as salts, a pairing of a cation and an anion, and the portion of the salt specifically referred to as an inorganic capping agent is the ion that displaces the organic

capping agent and caps the nanoparticle. Often an inorganic ion is paired with an ion that has organic functionality; the paired ion that does not displace organic capping agents is referred to herein as a counter ion. The counter ion can affect the solubility and reactivity of the inorganic capping agent as well as the inorganic capped nanomaterial but the great variability of counter ions allows for their facile replacement and a balance of desired properties.

[0099] Inorganic capped nanoparticles differ from core/shell nanoparticles. Core/shell nanoparticles are those particles where, often, one nanocrystal is subjected to a treatment with a reagent such that a crystalline layer forms over all or a portion of the original nanocrystal. Core/shell nanoparticles are commonly designated through the simple formula of (core composition)/(shell composition), for example CdSe/CdS has a CdSe core and a CdS shell. The crystalline layer, the shell, generally forms over the entire nanocrystal but as used herein core/shell nanoparticles refers to those nanoparticles where at least one surface of the nanocrystal is coated with a crystalline layer. While the inorganic capping agents may form ordered arrays on the surface of a nanocrystal these arrays differ from a core/shell crystalline layer because the thickness of the array is dependent on the size of the inorganic capping agent not the concentration of reagent provided or the growth time of the layer, because, without being bound by theory, the ordering of the inorganic capping agent array on the nanocrystal is believed to be dependent on the exposed crystal face of the nanocrystal not the crystal structure of the crystalline (shell) layer, and because the interaction with the face of the nanocrystal is independent of the crystal structure of the crystalline (shell) layer there is no crystal structure mismatch between the inorganic capping agent and the crystal faces of the nanocrystal.

[0100] The disclosed colloidal particles, e.g. inorganic capped nanoparticles, are soluble and/or suspendable in a solvent. Typically, the purification of chemicals requires some isolation procedure and for inorganic materials this procedure is often the precipitation of the inorganic product. The precipitation of inorganic products permits one of ordinary skill to wash the inorganic product of impurities and/or unreacted materials. The isolation of the precipitated inorganic products then allows for the selective application of those materials.

[0101] Moreover, the disclosed colloidal particles are isolable and dispersible, soluble or suspendable, in a variety of solvents. Manufacturing techniques, environmental and/or workplace rules often require the application of certain solvents. Colloidal materials dispersible in a variety of solvents are applicable for a broader use than those colloidal materials that require specific, toxic, environmentally hazardous, or costly solvents.

[0102] Solvents applicable to the isolation of the disclosed colloidal particles include but are not limited to: 1,3-butanediol, acetonitrile, ammonia, benzonitrile, butanol,

dimethylacetamide, dimethylamine, dimethylethylenediamine, dimethylformamide, dimethylsulfoxide, dioxane, ethanol, ethanolamine, ethylenediamine, ethyleneglycol, formamide, glycerol, methanol, methoxyethanol, methylamine, methylformamide, methylpyrrolidinone, pyridine, tetramethylethylenediamine, triethylamine, trimethylamine, trimethylethylenediamine, and water.

[0103] The above-described colloidal particles are made by mixing the nanoparticle with the inorganic capping agent in accordance with the techniques described herein. Often the mixing of the nanoparticle with the inorganic capping agent causes a reaction of the nanoparticle with the inorganic capping agent and rapidly produces insoluble and intractable materials. Herein a mixture of immiscible solvents is used to control the reaction of the nanoparticle with the inorganic capping agent. Immiscible solvents facilitate a rapid and complete exchange of the organic capping agents with the inorganic capping agents and prevent the production of the common intractable/insoluble materials.

[0104] Generally, the inorganic capping agent is dissolved in a polar solvent while the nanoparticle is dissolved in an immiscible, generally non-polar, solvent. These two solutions are then combined in a single vessel. Non-limiting examples of polar solvents include 1,3-butanediol, acetonitrile, ammonia, benzonitrile, butanol, dimethylacetamide, dimethylamine, dimethylethylenediamine, dimethylformamide, dimethylsulfoxide, dioxane, ethanol, ethanolamine, ethylenediamine, ethyleneglycol, formamide, glycerol, methanol, methoxyethanol, methylamine, methylformamide, methylpyrrolidinone, pyridine, tetramethylethylenediamine, triethylamine, trimethylamine, trimethylethylenediamine, water, and mixtures thereof. Non-limiting examples of non-polar solvents include pentane, pentanes, cyclopentane, hexane, hexanes, cyclohexane, heptane, octane, nonane, decane, dodecane, hexadecane, benzene, 2,2,4-trimethylpentane, toluene, petroleum ether, ethyl acetate, diisopropyl ether, diethyl ether, carbon tetrachloride, carbon disulfide, and mixtures thereof; provided that the non-polar solvent is immiscible with the polar solvent. Other immiscible solvent systems that are applicable include aqueous-fluorous, organic-fluorous, and those using ionic liquids.

[0105] Without wishing to be bound by theory, it is thought that the nanoparticle reacts with the inorganic capping agent at or near the solvent boundary, the region where the two solvents meet, and a portion of the organic capping agent is exchanged/replaced with the inorganic capping agent, that is the inorganic capping agent displaces an organic capping agent from a surface of the nanoparticle and the inorganic capping agent binds to the surface of the nanoparticle. Without wishing to be bound by theory, it is thought that this process continues until an equilibrium is established between the inorganic capping agent on a nanoparticle and the free inorganic capping agent. Preferably, the equilibrium favors the inorganic capping agent on a nanoparticle, although other equilibria are applicable for

making mixed colloidal particles. The herein described immiscible solvent method of forming nanoparticles capped with inorganic capping agents has the added benefit of providing for the extraction of the organic capping agents from the polar-solvent-soluble reaction product.

[0106] The sequential addition of inorganic capping agents on a nanoparticle is available under the disclosed method. Depending, for example, upon concentration, nucleophilicity, capping agent to nanoparticle bond strength, and crystal face dependent capping agent to nanoparticle bond strength, the inorganic capping of the nanoparticle can be manipulated to yield hereto unknown combinations. For example, assume that a nanoparticle has two faces, face A and face B, and that the bond strength of the organic capping agent to face A is twice that of the bond strength to face B. The organic capping agents on face B will be preferentially exchanged when employing the herein described methodology. Isolation and reaction of this intermediate species, having organic and inorganic capping agents, with a second inorganic capping agent will produce a colloidal particle with a first inorganic capping agent on face B and a second inorganic capping agent on face A. Alternatively, the preferential binding of inorganic capping agents to specific nanoparticle faces can yield the same result from a single mixture of multiple inorganic capping agents.

[0107] Another aspect of the disclosed method is the possibility of a chemical reactivity between inorganic capping agents. This inorganic capping agent reactivity can be employed to make colloidal particles wherein, for example, the nanoparticle is capped by an inorganic capping agent. For example, a first inorganic capping agent bound to the surface of a nanocrystal and reactive with a second inorganic capping agent can directionally react with the second inorganic capping agent. This methodology provides for the synthesis of colloidal particles that could not be selectively made from a solution of nanoparticle and inorganic capping agents. The interaction of the first inorganic capping agent with the nanoparticle controls both the direction and scope of the reactivity of the first inorganic capping agent with the second inorganic capping agent. Furthermore, this methodology controls what part of the new inorganic capping agent binds to the nanocrystal. Presumably, the result of the addition of a combined-inorganic capping agent capping to a nanocrystal by other methods will produce a random arrangement of the combined-inorganic capping agent on the nanocrystal.

[0108] Yet another method of making colloidal particles involves the mixing of a nanoparticle in a non-polar organic solvent with a purified colloidal particle in a polar organic solvent. In this example, the colloidal particle in the polar solvent is the inorganic capping agent. These methodologies can form colloidal particle capped nanoparticles and other variations on the capping architecture.

[0109] Still another aspect of the current disclosure is the bridging of colloidal particles with metal ions. Herein bridging means that one or more metal ions individually bind, ionically or covalently, binding sites on the exterior of a plurality of colloidal particles. Preferably, binding sites are parts of the inorganic capping agent that is disposed perpendicular to a surface on the nanoparticle. Understanding that the bridging between two colloidal particles can involve a plurality of metal ions, for descriptive purposes the binding of a single metal ion between two colloidal particles is exemplified herein. As described above, inorganic capping agents include anionic and neutral capping agents, when for example, anionic inorganic capping agents are bound to the surface of a nanoparticle the anionic charge associated with the inorganic capping agent remains (providing a theoretical basis for electrostatic repulsion between colloidal particles having anionic inorganic capping agents). The addition of a cationic ion, preferably a cationic metal ion, still more preferably a polycationic (wherein the charge on the metal ion is greater than 1) metal ion to the colloidal particle can produce a colloidal particle with the cationic ion bound to a surface of the colloidal particle (herein, an inorganic capping agent). Preferably, the cationic ion additionally binds to the surface of a second colloidal particle thereby bridging between the two colloidal particles. Preferably, the cationic ion is a transition metal ion, a main group ion, a lanthanide ion, or an actinide ion. More preferably, the cationic ion is selected from those ions that can impart advanced electronic, magnetic (e.g., Mn^{2+} , Co^{2+}), or photophysical properties on the bridged colloidal particles. Still more preferably the cationic ion is Pt^{2+} , Zn^{2+} , Cd^{2+} , Mn^{2+} , Mn^{3+} , Eu^{2+} , Fe^{2+} , Fe^{3+} , Co^{2+} , Ge^{4+} , Cu^{2+} , Cu^{+} , Pb^{2+} , Bi^{3+} , Sb^{3+} , In^{3+} , Ga^{3+} , Au^{+} , Au^{3+} , Ag^{+} , Sn^{2+} , Sn^{4+} , or Hg^{2+} . When the addition of the cationic ion to the colloidal particle is conducted on a scale wherein there is a multiplicity of colloidal particles, the binding and bridging of the colloidal particles is termed a polycondensation reaction. Herein, a controlled polycondensation reaction yields colloidal materials. Moreover, the selection of cationic ion and polycondensation reaction conditions allows for control of the three-dimensional structure of the colloidal material. Without being bound by theory, these polycondensation reactions are envisioned as behaving analogously to molecular self-assembled three-dimensional arrays.

[0110] Another aspect of the current disclosure is the isolation of the colloidal particles as colloidal materials. As used herein, colloidal materials are samples of the herein described colloidal particle in a solid form. The form can be ordered or disordered. The nanoparticle may have a crystalline, that is, ordered internal structure but the precipitation of the colloidal particles may produce a random (disordered) arrangement of particles. Alternatively, the controlled dissolution or spontaneous self-assembly of the colloidal particles can yield ordered arrays of particles.

[0111] The careful deposition of thin layers of colloidal arrays yields ordered arrays dependent on the possible packing of the colloidal particle in three dimensional space. As

non-limiting examples, the deposition of colloidal particles of nanocrystals that are roughly spherical has yielded hexagonal close-packed arrays of colloidal particles or cubic close-packed arrays of colloidal particles. Such selective deposition of colloidal particles has advanced materials applications for which the selection of the nanoparticle and the ordering of the three dimensional array can change the physical and electronic characteristics of the material.

[0112] The deposition of layers of the colloidal particles to make colloidal material thin films is another aspect of the current disclosure. Depending on the desired application or the available resources, multiple film deposition methodologies are available. One method that is applicable to form colloidal material thin films is a reverse Langmuir-Blodgett technique. Herein the insolubility of the colloidal particle in nonpolar solvents permits the monolayer deposition of films of the colloidal particle on a substrate. Multiple application of the Langmuir-Blodgett technique can be employed to grow multilayer films of the colloidal particle or mixed layer films of colloidal particles.

[0113] A second applicable technique for the deposition of layers of the colloidal particles to make colloidal material thin films is spin coating. Here a solution of the colloidal particle is applied to a substrate and the substrate and solution are rapidly rotated to leave a thin layer of the solution on the substrate, this solution is then dried leaving the colloidal material thin film. Herein, the use of multiple solvents described above provide a hereto before unknown control in the manufacture of these films. The wetting of the substrate by the colloidal particle solution is an important factor in achieving uniform thin films and the ability to apply the colloidal particle in a variety of different solvents enhances the commercial applicability of this technique. One method to achieve uniform wetting of the substrate surface is to match the surface free energy of the substrate with the surface tension of the liquid (colloidal particle solution). The perfect wetting of a substrate by a colloidal particle solution will yield a uniform colloidal material thin film on the substrate.

[0114] Additional techniques for the deposition of layers of the colloidal particles to make colloidal material thin films include spray coating, spray pyrolysis, dipping, sputtering, printing, and the like and combinations of spray coating, spray pyrolysis dipping, sputtering, printing and the like with spin coating.

[0115] Colloidal material can additionally be produced through a combination of one of the above processes with the bridging of the colloidal particles with cationic ions. One example of this combination method is the alternating dipping of a substrate into a solution of colloidal particles and a solution of cationic ions. Preferably, the substrate has a sufficient affinity for the first material, whether colloidal particles or cationic ions, that a layer of the first material uniformly deposits on the surface of the substrate. Examples of substrates wherein the

colloidal particle would be the first material include but are not limited to mono or multilayers of copper, silver, gold, nickel, palladium, platinum, alloys, and amalgams thereof. Moreover, when a colloidal particle has sulfur, selenium, and or tellurium atoms on the exposed surface (the outermost surface of the colloidal particle) thiophilic substrates are preferentially employed. Herein, thiophilic means having a thermodynamic preference for binding to sulfur, selenium, and/or tellurium. Examples of thiophilic substrates include monolayers, multilayers, or bulk amounts of silver, gold, and other known thiophilic substrates. Another preferred substrate applicable when the first material is a colloidal particle is a positively charged substrate. Substrates made from glass, sapphire, quartz, silicon, or other solid materials can be manipulated to have a positive charge through many known methods. For example, the chemical treatment of a substrate with an amine functionalized siloxane can produce a positively charged surface on the substrate. Alternatively, the substrate can be coated with a cationic polymer through any of the known methods for forming polymer coatings on substrates. Examples of polymers applicable to coat substrates to form the positive charged substrate include the known polyquaternium polymers. One of the preferred cationic polymers is poly(diallyldimethylammonium) chloride (polyquaternium-6 (CAS#: 26062-79-3)). A typical procedure for this alternating dip coating process is to repetitively, dip the substrate in a first solution, rinse the substrate, dip the substrate in a second solution, and rinse the substrate. Typically, as described above, the substrate prior to any dipping preferentially binds the colloidal particle thereby the first solution is a solution having the colloidal particle dispersed therein. Additional combination procedures are available, for example first spin coating a substrate with a solution of a colloidal particle then dipping the substrate in a solution of a cationic ion and then repeating.

[0116] Another technique wherein the ability to select the solvent in which the colloidal material is dissolved and from which it is deposited is ink-jet deposition. Similar to the necessary balance in the wetting of a substrate, ink-jet deposition often requires the ability to adjust liquid surface tensions to applicable ranges. One easy method for adjusting the surface tension of a liquid containing colloidal particles is the blending or mixing of a multiplicity of solvents.

[0117] Yet another application of the present disclosure is the deposition of colloidal particles to make non-thin film solids. Herein, the described colloidal particles are deposited by bulk techniques to yield three dimensional solids. Known bulk deposition techniques include pressing of powders, growth of three-dimensional ordered arrays, painting, printing, and the like.

[0118] Still another aspect of the techniques described above for the production or deposition of colloidal materials is the production or deposition of mixed, colloidal particle, solids. These hetero-colloidal materials comprise a plurality of colloidal particles in the

resulting solid material. Similar to the disclosure above, multiple techniques can be used to produce hetero-colloidal materials. Non-limiting examples include, mixing of colloidal particles in a solvent followed by deposition of a hetero-colloidal material, alternating deposition of colloidal material films to produce a layered hetero-colloidal material, multispray coating of a substrate, and blending of colloidal material solids followed by pressing into a cohesive material.

[0119] One example of the hetero-colloidal materials described herein is a binary superlattice. Binary superlattices are those organized structures wherein the three-dimensional packing of two different nanoparticles produces an ordered structure. Multiple physical and chemical characteristics can facilitate the production of binary superlattices, for example, nanoparticle size, nanoparticle shape, and nanoparticle Coulombic potential. This assembly of two different colloidal particles into a binary superlattice is a general and inexpensive method to produce multiple hetero-colloidal materials with precise control of the chemical composition and physical properties. D. V. Talapin, et al., "Dipole-dipole interactions in nanoparticle superlattices." *Nano Letters* **2007**, 7, 1213-1219.

[0120] Yet another aspect of the current disclosure is the thermal treatment of the herein described colloidal materials. As discussed above, many of the inorganic capping agents are precursors to inorganic materials (matrices) and low-temperature thermal treatment of these inorganic capping agents provides a gentle method to produce crystalline films from these materials. The thermal treatment of colloidal materials yields, for example, ordered arrays of nanoparticles within an inorganic matrix, hetero-alloys, or alloys. A multiplicity of thermally treated colloidal materials are available from the disclosed colloidal particles.

[0121] As used herein, colloidal matrices are ordered arrays of nanoparticles within an inorganic matrix. Generally, the inorganic matrix has larger crystal domains than the nanoparticles and, importantly, separates the nanoparticles. The inorganic matrix can be a glass, a solid, or a crystalline material. Additionally, the order of the array of nanoparticles can be short range or long range. Very dilute samples of nanoparticles in the inorganic matrix are expected to have lower relative ordering than concentrated samples wherein the nanoparticles may be ordered prior to and preferably after the formation of the inorganic matrix.

[0122] Additional embodiments of the hetero-colloidal matrix include selective deposition of colloidal materials in confined spatial arrangements followed by thermal treatment to form the inorganic matrix. The layered, structured, or patterned deposition of a plurality of colloidal materials followed by thermal treatment to form the inorganic matrix creates solid-state architecture that is not available by other known methodologies.

[0123] The colloidal matrices can be produced in thin films, films, coatings, solids and/or mixed solids. Moreover, the colloidal matrices can be produced in bulk, layered, structured, or patterned arrangements on a substrate. Additionally, the procedure described herein yields colloidal matrices that effectively preserve the electronic characteristics of the nanoparticle after thermal treatment.

[0124] Another embodiment of the materials and methods disclosed herein is an alloy made from a nanoparticle and an inorganic capping agent. Alloys are continuous homogeneous phases of a composition and herein alloys are produced by the thermal treatment of the disclosed colloidal particles. Similar to the colloidal matrices, the formulation of the alloy is dependent on the nanoparticle and inorganic capping agent. Unlike the colloidal matrices, the formation of the alloy involves the destructive reaction of the inorganic capping agent, and/or optionally additional reagent(s), with the nanoparticle, herein a destructive reaction means the nanoparticle loses at least one aspect of its defining physical characteristic, examples include size, shape, photoactivity, formulation, and the like.

[0125] Generally, the formation of an alloy requires some atom mobility during the thermal treatment phase and processing conditions can and often do affect the formation of an alloy. The incomplete alloying of the disclosed materials, whether purposefully or serendipitously, yields a hetero-alloy. As used herein, hetero-alloys are solid state materials formed from the thermal treatment of a colloidal material that is characterized by a multiplicity of domains, wherein the domains may have different formulations and/or crystal structures and/or crystallinity. Whether a thermal treatment of a colloidal material forms an alloy or a hetero-alloy is often difficult to determine, but, without being bound by theory, it is believed that a lower temperature thermal treatment limits atom mobility and therefore prohibits the formation of a homogeneous phase (alloy).

[0126] Yet another embodiment of the materials and methods disclosed herein is the deposition of colloidal matrices, alloys, or hetero-alloys on a surface to form an advanced material, a printed circuit, a solar cell, a thermoelectric cell, a light emitting diode, and the like. The colloidal materials disclosed herein are applicable for the printing or deposition of colloidal matrices, alloys, or hetero-alloys through the application and heating of the colloidal material on a substrate. Representative examples of the application of the disclosed colloidal materials include sputter deposition, electrostatic deposition, spray deposition, spin coating, inkjet deposition, laser printing (matrices), and the like. An alternative method of deposition is the electrochemical deposition of a colloidal matrix from a solution of a colloidal material.

[0127] The low temperature formation of the colloidal matrix, alloy, or hetero-alloy makes the disclosed methodology compatible with photolithographic patterning, for example,

wherein a photolithographic applied substrate mask is removed after the thermal treatment of the colloidal material.

[0128] Another aspect of the disclosed materials and methods is the formation of materials that exhibit enhanced thermoelectric properties; that is the direct conversion of a thermal gradient to electrical energy. Thermoelectric energy conversion is an all-solid-state effect that converts thermal gradients directly to electrical energy without an electromechanical generator. The derived voltage and power, work, drains the heat from the location of the thermal gradient. Materials that display thermoelectric energy conversion are useful in heat pumps, power generators, and thermoelectric coolers. Thermoelectric devices have no moving parts and therefore have advantages in reliability, silent operation, high power density, and high efficiency for moderate power applications. In addition, thermoelectric materials can be used for cooling by driving current through the material.

[0129] The NC can be capped with an inorganic ligand. Contemplated inorganic ligands include oxo- and polyoxometalates (POMs). POMs are heavily charged anions that can accept one or more electrons without significant structural changes. The delocalization of these electrons within the POM framework makes them candidates in catalysis or related applications. Unlike some other inorganic ligands, most of the oxo-ligands do not replace the surface organic ligands directly. A two-step ligand exchange procedure was used, including the removal of original organic ligands followed by the adsorption of negatively charged inorganic ligands.

[0130] In some exemplary embodiments, metal oxide Fe_2O_3 NCs and semiconductor CdSe NCs were used as standard systems. POMs of early transition metals molybdenum or tungsten are specifically contemplated, as are Keggin type and Dawson type POMs. Most Keggin type POMs $[\text{X}^{\text{n}+}\text{M}_{12}\text{O}_{40}]^{(8-\text{n})-}$ are commercially available (X=P, Si; M=Mo, W). Dawson type POMs $[(\text{X}^{\text{n}+})_2\text{M}_{18}\text{O}_{62}]^{(16-2\text{n})-}$, polymolybdate giant wheels $\{\text{Mo}_{11}\}_{14}$ and known water oxidation catalyst $\text{Rb}_8\text{K}_2[\{\text{Ru}_4\text{O}_4(\text{OH})_2(\text{H}_2\text{O})_4\}(\gamma\text{-SiW}_{10}\text{O}_{36})_2]\cdot 25\text{H}_2\text{O}$ were prepared following literature protocols. (Graham et al., *Inorg. Chem.*, 2008, 47: 3679-3686; Geletii et al., *Angew. Chem.*, 2008, 120: 3960-3963; and Rosen et al., *Angew. Chem. Int. Ed.*, 51:684-689) Simple oxo- molecules were also explored such as VO_4^{3-} , MoO_4^{2-} , WO_4^{2-} , PO_4^{3-} , AsO_4^{3-} , HPO_3^{2-} , H_2PO_2^- , and the like.

[0131] For a typical ligand exchange, a solution of organic-capped NCs in a nonpolar solvent (toluene or hexane) were combined with a solution of an inorganic ligand (K_2S , KHS, $(\text{NH}_4)_2\text{TeS}_3$, KOH, KNH_2 , etc) in formamide (FA). The two-phase mixture containing immiscible layers of FA and nonpolar solvent was stirred for about 10 min, after which complete transfer of NCs from non-polar solvent to FA (Figure 1a) was observed. Such exchange can be carried out in different solvents, ruling out a special role of FA in colloidal

stabilization. For example, S^{2-} -capped CdSe NCs can be easily prepared using $(NH_4)_2S$ aqueous medium or Na_2S and K_2S in dimethylsulphoxide (DMSO). Experimental results suggested that colloidal stability of NC dispersions is mainly determined by the solvent dielectric constant; highly polar FA ($\epsilon=106$) was found to be the best solvent, while water ($\epsilon=80$) and DMSO ($\epsilon=47$) provided moderate stability. DMF, the least polar in this series ($\epsilon=36$), did not stabilize the colloidal dispersions.

[0132] In some cases, the ligand exchange can be performed in the following manner. For organic ligands removal, either phase transfer or direct ligand removal can be performed. For a typical phase transfer process, certain amount of nitrosonium tetrafluoroborate ($NOBF_4$), fluoroboric acid (HF_4) or trimethyloxonium tetrafluoroborate (Me_3OBF_4) was first dissolved in fresh dimethylformamide (DMF). NCs in fresh hexane were added on top of the DMF phase. The resulting mixture was stirred vigorously until NCs were completely transferred into DMF phase. For a direct ligand removal process, NCs were first diluted with excessive solvent such as hexane, followed by addition of nitrosonium tetrafluoroborate ($NOBF_4$), fluoroboric acid (HF_4) or trimethyloxonium tetrafluoroborate (Me_3OBF_4). The mixture was stirred vigorously until NCs were precipitated. NCs were collected and dispersed into fresh DMF.

[0133] To functionalize NCs with oxo- molecules or POMs, they were precipitated from DMF with addition of toluene or toluene/hexane mixture. Certain amount of oxo- molecules or POMs in formamide (FA) was added to NCs in FA. The stabilization of oxo- molecules or POMs capped NCs in FA was strongly depending on the pH. NCs treated with $NOBF_4$ or HF_4 to remove organic ligands usually formed very acidic solution in DMF. They needed to be further purified with FA/acetonitrile to increase the pH to a value suitable for oxo- ligands adsorption. Following this approach, both CdSe and Fe_2O_3 NCs can be colloidally stabilized with VO_4^{3-} , MoO_4^{2-} , WO_4^{2-} , PO_4^{3-} , AsO_4^{3-} , HPO_3^{2-} , $H_2PO_2^-$ etc. Fe_2O_3 NCs can be further stabilized with POMs such as $Na_3[PMo_{12}O_{40}]$, $K_6[P_2Mo_{18}O_{62}]$ etc (Table 1). Other metal oxide NCs such as ZnO, CoFeO and TiO_2 with some of the POMs are also contemplated (Table 1).

[0134] Different characterization techniques were used to confirm that oxo- molecules or POMs were attached to the NCs surface. Dynamic light scattering measurements showed that the size of NCs decreased from 15nm to 13nm after organic ligands removal and increased around 1-2nm after capping with POMs (Figure 22A). Zeta potential measurement showed that both CdSe and Fe_2O_3 NCs surface charge changed from positive to negative after oxo- ligands exchange. In aqueous or similar media, a zeta potential of ± 30 mV is regarded as the borderline between stable and unstable colloids. Figure 23B indicated that CdSe and Fe_2O_3 NCs capped with PO_4^{3-} were stable in FA. FTIR spectra acquired for both CdSe and Fe_2O_3 NCs showed that the majority of the surface organic ligands were removed

after NOBF_4 or HBF_4 treatment (Figure 22C,D). C-H vibration coming from organics from 2500-3300 cm^{-1} was strongly suppressed. TEM images of CdSe and Fe_2O_3 NCs capped with various oxo- ligands were taken from either FA or N-methylformamide (NFA) (Figure 23,24). In NFA, the spacing between NCs was larger than that in FA possibly due to NFA molecules also acting as ligands to stabilize NCs.

TABLE 1

Ligands \ NCs	Fe_2O_3	ZnO	CoFeO	TiO_2
$\text{H}_3[\text{PMo}_{12}\text{O}_{40}]$	Stable			Stable
$\text{H}_3[\text{PW}_{12}\text{O}_{40}]$	Stable			Stable
$\text{Na}_3\text{PMo}_{12}\text{O}_{40}$	Stable			Stable
$\text{Na}_6\text{H}_2\text{W}_{12}\text{O}_{40}$	Stable			Stable
$\text{H}_4[\text{SiW}_{12}\text{O}_{40}]$	Stable			
$(\text{NH}_4)_6[\text{H}_2\text{W}_{12}\text{O}_{40}]$	Unstable			
$\text{K}_6[\text{P}_2\text{W}_{18}\text{O}_{62}]$	Stable	Stable	Stable	Stable
$\text{K}_6[\text{P}_2\text{Mo}_{18}\text{O}_{62}]$	Stable		Stable	Stable
Mo_{154}	Stable		Stable	Stable
$\text{Rb}_8\text{K}_2\{[\text{Ru}_4\text{O}_4(\text{OH})_2(\text{H}_2\text{O})_4](\gamma\text{-SiW}_{10}\text{O}_{36})_2\}$	Stable			

[0135] To further explore the ligand chemistry, simplified zeta potential titration experiments were performed to study the ligand binding process. In a typical experiment, CdSe or Fe_2O_3 NCs were treated with NOBF_4 , HBF_4 or Me_3OBF_4 to remove the surface ligands resulting in stable colloidal solution in DMF (~5mg/ml). These NCs were positively charged due to unbound metal sites on the surface such as Cd^{2+} or Fe^{3+} . For zeta potential titration, 50 μl of positively charged NCs in DMF (5mg/ml) was added to 1ml of DMF or FA. Oxo- ligands stock solutions were prepared at different concentrations such as 3mM, 5mM, 10mM and 15mM. Zeta potential of the colloidal solution was measured with the addition of oxo- ligands of increasing volume. Ideally, the surface positive charge would be slowly neutralized by negatively charged oxo- ligands until the surfaces of NCs were fully passivated at which point the surface charge would be saturated (Figure 22E).

[0136] To compare the binding capability of different ligands such as oxo- ligands and chalcogenide ligands, $\text{K}_2\text{S}_2\text{O}_3$, Na_2MoO_4 , $(\text{NH}_4)_2\text{MoS}_4$ were selected as typical ligands for

CdSe NCs. The electrophoretic mobilities were measured using Zetasizer Nano-ZS. Excessive NaBF_4 was added to the samples to contribute to the total ionic strength. The electrophoretic mobilities were plotted according to the ligands concentration, which indicated $\text{S}_2\text{O}_3^{2-}$, MoS_4^{2-} have stronger binding affinity to CdSe NCs compared to MoO_4^{2-} (Figure 25A). The same experiments were performed on Fe_2O_3 NCs (15nm) as well. Na_3AsS_3 , $\text{H}_3[\text{PMo}_{12}\text{O}_{40}]$, Na_2MoO_4 , $(\text{NH}_4)_2\text{MoS}_4$ were chosen as ligands. Similar results were obtained as CdSe NCs (Figure 25B). It showed $[\text{PMo}_{12}\text{O}_{40}]^{3-}$, MoO_4^{2-} binded to Fe_2O_3 NCs stronger than MoS_4^{2-} , and AsS_3^{3-} which, without being bound by theory, can be explained by the hard and soft acids and bases (HSAB) principles.

[0137] From the experiments of zeta potential titration, pH was an influential parameter for Fe_2O_3 NCs just after treatment with either NOBF_4 or HBF_4 showed strong acidity (~ 1.4 - 1.8 in DMF) while they showed a higher pH around 3 after treatment with Me_3OBF_4 . After washing the original solution with different solvents/non-solvents combinations, the pH increased to around 7-11, and showing a difference in zeta potential titration. The solution with a higher pH showed the ligands binding trend as expected while the same ligand did not show a strong binding capability to NCs in a less acidic solution (Figure 26).

[0138] In the case of CdSe NCs, there was not a huge influence of pH on ligands binding capability. Possible reasons could be: pH affects the surface charge density of Fe_2O_3 NCs and pH affects the actual binding species existing in the solution.

[0139] **Chalcogenide and hydrochalcogenide ligands (S^{2-} , HS^- , Se^{2-} , HSe^- , Te^{2-} and HTe^-).** Figure 1b compares the absorption and photoluminescence (PL) spectra of 5.5 nm CdSe NCs capped with organic ligands in hexane and S^{2-} in FA. The excitonic features in the absorption spectrum of CdSe NCs remained unchanged after the ligands exchange, implying no changes in size, shape and size-distribution of CdSe NCs. S^{2-} -capped CdSe NCs in FA also showed band-edge photoluminescence with $\sim 2\%$ QE, which was rather unexpected since alkylthiols are well-known PL quenchers for CdSe NCs. In contrast to thiols, charged S^{2-} ligands do not introduce midgap states serving as fast non-radiative recombination channels. CdSe NCs capped with HS^- ligands also retained their band-edge PL (Figure 7). S^{2-} can replace different kinds of organic ligands such as carboxylates, amines, phosphonic acids, and alkylphosphonic oxide from surface of CdSe NCs.

[0140] Regarding Figure 1; **(a)** Red colored colloidal dispersion of CdSe NCs undergoes the phase transfer from toluene to FA upon exchange of the original organic surface ligands with S^{2-} . **(b)** Absorption and PL spectra of 5.5 nm CdSe NCs capped with organic ligands and S^{2-} ligands dispersed in toluene and FA respectively. **(c)** FTIR spectra of 5.5 nm CdSe NCs with different combinations of ligands and solvents. **(d)** NC size-distributions measured by Dynamic Light Scattering for ~ 12 nm CdSe NCs capped with organic ligands and S^{2-} ions.

Inset shows TEM image of the NCs capped with S^{2-} ligand. (e) TEM images of S^{2-} - DDA⁺ capped CdS nanorods. (f) Absorption spectra of 5.5 nm CdSe NCs capped with different ligands.

[0141] Figure 1c shows FTIR spectra of 5.5 nm CdSe NCs taken before and after the exchange of organic ligands with S^{2-} . The transfer of NCs from toluene to FA resulted in complete disappearance of the bands at 2852 and 2925 cm^{-1} corresponding to C-H stretching in the original organic ligands. Other bands in the FTIR spectra for S^{2-} capped NCs can be assigned to the solvent and $(NH_4)_2S$ (Figure 8). For example, FTIR spectra of S^{2-} -capped CdSe NCs prepared from water dispersion showed no observable C-H bands. These results confirm the efficacy of S^{2-} ligands in complete removal of the original organic ligand, forming all-inorganic colloidal NCs.

[0142] NC surface with electrophilic sites, for example, a Cd rich surface of CdSe NC, should favor adsorption of nucleophilic S^{2-} ions compared to positively charged counter ions (e.g., K^+ or NH_4^+ ions). In addition, in polar solvents cations are generally more solvated than anions. Colloidal stabilization of NCs in FA was achieved through binding negatively charged S^{2-} ions to NC surface, leading to the formation of an electrical double layer around each NC. The negative charging of CdSe NC surface resulted in a negative (-40 mV) ζ -potential, sufficient for electrostatic stabilization of the colloidal dispersion. Dynamic light scattering (DLS) studies also confirmed single-particle populations in the solutions of S^{2-} capped CdSe NCs (Figure 1d, for NCs with the TEM image shown in the inset). The direct comparison of the volume distribution curves calculated from DLS revealed that average hydrodynamic diameter of S^{2-} capped NCs was smaller by ~1.7 nm than that of the same NCs capped with n-tetradecylphosphonic acid, which accounted for the effective length of the hydrocarbon chains.

[0143] In polar solvents like FA, we used small inorganic cations like K^+ , Na^+ , NH_4^+ to balance the negative charge of anions adsorbed on the NC surface. These cations can be replaced with hydrophobic quaternary ammonium ions by treatment with didodecyldimethylammonium bromide (DDA^+Br^-), rendering NC insoluble in FA, but soluble in toluene. This technique was applied to S^{2-} capped CdS nanorods. Figure 1e shows a TEM image of S^{2-} - DDA⁺ capped CdS nanorods. The shape and dimensions of nanorods remained intact during the transfer from toluene (ODPA-TOPO ligands) to FA (S^{2-} ligands) to toluene (S^{2-} -DDA⁺ ion pair ligands).

[0144] Stable colloidal solutions of CdSe NCs can be prepared in FA using different chalcogenide (S^{2-} , Se^{2-} and Te^{2-}) and hydrochalcogenide (HS^- , HSe^- and HTe^-) ions. Figure 1f shows the absorption spectra for colloidal solutions of the same CdSe NCs stabilized with different ligands. In all cases of chalcogenide and hydrochalcogenide ligands the formation

of stable colloidal solutions of negatively charged NCs was observed. It should be noted that selenide and telluride ions can be easily oxidized in air and corresponding colloidal solutions should be handled under inert atmosphere.

[0145] Chalcogenide ions can stabilize different nanomaterials in polar solvents. For example, Figure 2a shows S^{2-} capped CdSe/ZnS core-shell NCs with strong band edge PL with QE about 25%. All-inorganic films of S^{2-} capped CdSe/ZnS NCs also showed bright emission, even after annealing at 250 °C for 30 min. S^{2-} ligand worked well for InP NCs (Figure 2b) providing the first example of all-inorganic colloidal III-V NCs. The absorption spectra of S^{2-} capped InP NCs in FA were similar to those of the organically capped NCs in toluene. The ζ -potential of S^{2-} capped InP NCs was about -60 mV. The ability of chalcogenide ions to provide colloidal stabilization was not limited to semiconductors; Figure 2c compares the absorption spectra for spherical 7 nm Au NCs capped with dodecanethiol in toluene and with S^{2-} ions in FA. A 11 nm red-shift for surface plasmon band in S^{2-} capped Au NCs was observed, consistent with the difference in dielectric constants of toluene and FA. DLS studies revealed that S^{2-} capped Au colloids retained size distribution after the ligands exchange (Figure 2d), with no agglomeration for both organic and S^{2-} capped NCs. The ζ -potential of S^{2-} capped Au NCs was about -60 mV.

[0146] Regarding Figure 2; **(a)** Absorption and PL spectra of CdSe/ZnS core/shell NCs capped with S^{2-} ligands dispersed in FA; inset shows the luminescence of NC dispersion upon illumination with 365 nm UV light. **(b)** Absorption spectra of InP NCs capped with organic ligands and S^{2-} ligands dispersed in toluene and FA respectively. Inset shows the optical photograph of colloidal dispersion of InP NCs in FA. **(c)** Absorption spectra of Au NCs capped with dodecanethiol and S^{2-} ligands dispersed in toluene and FA, respectively. Inset shows the optical photograph of a colloidal dispersion of Au NCs in FA. **(d)** DLS size-distribution plots for Au NCs capped with the organic and S^{2-} ligands.

[0147] Mild oxidation of chalcogenide ions typically results in the formation of polychalcogenide ions (S_n^{2-} , Se_n^{2-} , Te_n^{2-}). In fact, polychalcogenides are often present as an impurity in commercial metal chalcogenide chemicals. As a simple test, aqueous sulfide solutions should be colorless whereas polysulfides absorb visible light and appear yellow to red. ESI-MS was used to identify the presence and stability of polychalcogenides in different solvents. The mass spectra of the red Na_2S_n solution prepared by adding an excess of sulfur to aqueous 0.7 M Na_2S solution showed the presence of polysulfides with $n=5, 6,$ and 7 unlike to colorless Na_2S solution (Figures 9-11). Both $(NH_4)_2S_n$ and Na_2S_n solutions can stabilize colloidal NCs in polar solvents, suggesting that polysulfides behave similarly to sulfide ions.

[0148] Mixed chalcogenide TeS_3^{2-} ligands. Having molecular structure intermediate between MCCs and polychalcogenide ions, mixed chalcogenide ions such as TeS_3^{2-} represent another interesting choice of metal-free ligands. For the study, light-yellow aqueous $(\text{NH}_4)_2\text{TeS}_3$ was used to stabilize colloidal CdSe NCs via ligand exchange in FA. ESI-MS spectra show that $(\text{NH}_4)_2\text{TeS}_3$ aqueous solution contains mainly TeS_3^{2-} ions along with $\text{Te}_2\text{S}_5^{2-}$ (Figure 3a). Adsorption of submonolayer amounts of Te-S ions onto the surface of 4.4 nm CdSe NCs was confirmed by elemental analysis, indicating Te-to-Cd atomic ratio 0.25. The atomic ratio of S-to-Te equal to 3.67 suggests the adsorption of TeS_3^{2-} ions, along with possibility for some additional S^{2-} incorporated onto the NC surface. Note that Cd-to-Se ratio of 1.25 was similar to that in original NCs. The integrity of CdSe NC core was also evident from the similar excitonic absorption features in the optical absorption spectra (Figure 3b). The main difference lies in the high energy part of absorption spectra (≤ 450 nm) showing the contribution from the TeS_3^{2-} ions. Surface affinity of TeS_3^{2-} ions is rather similar to that of MCC ligands. For example, stable colloidal solutions of PbS NCs can be formed with TeS_3^{2-} ions in FA, whereas capping with S^{2-} cannot provide stable colloidal solutions for IV-VI NCs.

[0149] The presence of two chalcogens in different oxidation states opens interesting possibilities for surface redox reactions. Te^{4+} can oxidize its own ligand (S^{2-}) releasing elemental Te and S, which explains limited stability of $(\text{NH}_4)_2\text{TeS}_3$ in the solid state, under light or heat. Another redox pathway is the reaction of Te^{4+} with the NC material. For example, metal telluride NCs such as CdTe and PbTe slowly reacted with TeS_3^{2-} releasing elemental Te ($\text{Te}^{4+} + \text{Te}^{2-} \rightarrow \text{Te}^0$ comproportionation reaction) and leading to partial or complete conversion to CdS and PbS. For PbTe NCs this reaction occurred within minutes after the ligand exchange, while more covalent CdTe converted to CdS only upon heating of NC films at 120 °C. CdSe NCs are significantly more stable, and only partially react under the thermal treatment (Figure 12). At the same time, PbS NCs do not react with TeS_3^{2-} as confirmed by powder XRD patterns for dried and annealed samples (Figure 13). Therefore, the use of mixed chalcogenide ligands can be advantageous for compositional modulations in nanogranular solid materials such as thermoelectric Pb and Sb chalcogenides.

[0150] Regarding Figure 3; **(a)** ESI-MS spectrum of $(\text{NH}_4)_2\text{TeS}_3$ solution. The inset compares an experimental high-resolution mass-spectrum with simulated spectra for TeS_3H^- and TeS_3^- ions. **(b)** Absorption spectra for $(\text{NH}_4)_2\text{TeS}_3$, for CdSe NCs capped with the organic ligands in toluene and for CdSe NCs capped with TeS_3^{2-} ions in formamide.


[0151] Other metal-free anionic ligands (OH^- and NH_2^-). Stabilization of colloidal NCs with other inorganic anions was explored. OH^- and NH_2^- successfully replaced organic ligands at the surface of CdSe NCs and stabilized colloidal solutions in FA. Figure 4a shows that absorption and PL spectra of OH^- and NH_2^- capped 5.5 nm CdSe NCs did not change

compared to original NCs (Figure 1b); no change was also detected in the XRD patterns of corresponding NCs (Figure 14). Similar to S^{2-} capped NCs, OH^- capped CdSe NCs exhibited negative ζ -potentials in polar solvents, consistent with the electrostatic stabilization. The value of ζ -potential for OH^- capped CdSe NCs in FA (-20 mV) was substantially lower than that for S^{2-} capped NCs. Right after the ligand exchange, colloidal solutions can be easily filtered through a 0.2 μm filter but they slowly aggregated and precipitated in several days. Unlike S^{2-} capped NCs, FTIR spectra of OH^- capped CdSe NCs (Figure 15) did not show complete removal of CH_2 bands at 2852 and 2925 cm^{-1} , but the intensity of C-H bands decreased by >90% compared to the original NCs. Similar behavior and ζ -potentials have been observed for NH_2^- capped CdSe NCs. These observations point to somewhat lower affinity of OH^- and NH_2^- toward CdSe surface compared to chalcogenides. In contrast, ZnSe NCs did not form stable colloidal solutions with S^{2-} ligands but can be easily stabilized with OH^- in FA (Figure 4b). The possible origin of such selectivity will be discussed in the next section.

[0152] Regarding Figure 4; (a) Absorption and PL spectra of OH^- and NH_2^- capped CdSe NCs dispersed FA. Inset shows a photograph of the colloidal solution. (b) Absorption spectra of ZnSe NCs capped with oleylamine and OH^- ligands dispersed in toluene and FA, respectively.

[0153] Application of hard and soft acid and base (HSAB) classification to colloidal nanostructures. In 1963 Pearson proposed HSAB principle that explained many trends in stability of the complexes between Lewis acids and bases by classifying them into "hard" and "soft" categories. Generally, soft acids form stable complexes with soft bases, whereas hard acids prefer hard bases. The inorganic ligands used in this work represent classical examples of soft (highly polarizable HS^- , S^{2-} , Se^{2-}) and hard (less polarizable OH^- , NH_2^-) Lewis bases. It was noticed that original ligands on Au and CdTe NCs can be easily replaced with S^{2-} , Se^{2-} or HS^- ligands, but did not form stable colloidal solutions in the presence of OH^- . In contrast, ZnSe (Figure 4b) and ZnO NCs can be stabilized with OH^- but did not interact with S^{2-} and HS^- . Other NCs, including CdSe and CdS, formed stable colloidal solutions with both hard and soft ligands. This difference in behavior was attributed to the differences in chemical affinity between NCs and Lewis bases and proposed that HSAB theory, originally developed for molecular coordination compounds, can be extended to the world of nanomaterials (Scheme 1). The ligands used in this work bind primarily to the electrophilic sites at NC surface. In agreement with HSAB, soft Au^0 and Cd^{2+} sites exhibited stronger affinity to soft S^{2-} and HS^- ligands compared to hard OH^- , whereas harder Zn^{2+} sites in ZnSe and ZnO NCs had higher affinity to OH^- rather than to HS^- . More quantitative information on the binding affinity can be obtained from the comparison of ζ -potentials related to the charges on NC surface (Figure 16). The extension of HSAB principle to NCs

appears to fail for InP and InAs NCs. Free In is a hard acid, while InAs and InP behave as soft acids preferentially binding to S^{2-} and HS^- rather than to OH^- . This discrepancy, however, can be explained by taking into account the character of chemical bonding inside NCs. Small difference in electronegativity between In and P or As led to very small positive effective charge on the In surface sites, much smaller than the charge on isolated In ions. Low charge density softens the acidic sites at InP and InAs NCs surface. To further test this hypothesis, In_2O_3 NCs were synthesized, where the bonding has a higher ionic character compared to InP and InAs, and their interaction with OH^- and HS^- ligands was studied. Both HS^- and OH^- bound to In_2O_3 NC surface resulting in similar ζ -potentials (-40 mV), suggesting that the metal surface sites in In_2O_3 NCs were harder than those in InP and InAs NCs.

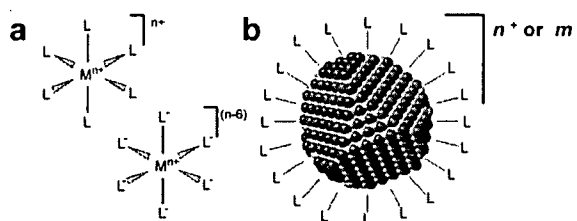

[0154] Scheme 1. (a) Typical metal complexes and (b) a nanocrystal with surface ligands. Similarities between metal-ligand (M-L) bonding in both classes of compounds should be noted. HSAB theory, originally developed for metal complexes, can also apply to colloidal nanomaterials.

[0155] Comparison of metal-free inorganic ligands to MCCs. Negatively charged metal-free ligands can be viewed as an addition to the family of all-inorganic colloidal NCs that started with the discovery of MCC ligands. In this section, observations comparing metal-free inorganic ligands to MCCs are summarized.

[0156] The solutions of MCCs in polar solvent are expected to contain a certain equilibrium concentration of free chalcogenide ions. The possibility of using chalcogenide ions to prepare stable colloidal solutions of NCs in hydrazine, typically used with MCC ligands have been explored. It turned out that chalcogenides can not stabilize II-VI, IV-VI and III-V NCs in hydrazine. Probably, the dielectric constant of hydrazine ($\epsilon=51$) and its solvation ability were not sufficient to obtain stable colloids with pure chalcogenides. In contrast, $Sn_2Se_6^{4-}$ and other MCC ligands provided long-term, up to several years, stability to CdSe NC colloids in hydrazine. In FA, both chalcogenides and MCCs generated stable colloidal solutions, e.g., for Au and CdSe NCs. Direct comparison revealed that CdSe NCs capped with SnS_4^{4-} or AsS_3^{3-} MCC ligands exhibited higher ζ -potentials, typically in the range of -50 to -80 mV. That probably corresponded to a higher affinity of MCCs toward CdSe NCs. On the other hand, S^{2-} was superior for CdSe/ZnS NCs, for which many MCCs showed poor affinity. MCCs and mixed chalcogenide ligands were better for Pb chalcogenide NCs, for

which S^{2-} -capping failed. Compared to the MCCs, free chalcogenide ions were somewhat more prone to oxidative degradation. Both, sulfide-based MCC-capped NCs and S^{2-} -capped nanomaterials can be prepared and handled in air, but S^{2-} -capped NCs were stable much longer if prepared and stored in a glovebox.

[0157] Electrostatic stabilization of colloidal nanocrystals in the absence of charged ligands (“ligand-free” nanocrystals). Inorganic ligands that provided negative charge to the NC surface have been discussed. All-inorganic positively charged NCs are rarer, presumably, without wishing to be bound by theory, because NCs typically have electrophilic metal-rich surfaces with preferential affinity toward nucleophilic ligands. Recently, Murray and coworkers reported colloidal NCs with positively charged surface. They used nitrosonium tetrafluoroborate ($NOBF_4$) and aryldiazonium tetrafluoroborate to perform ligand exchange on Fe_3O_4 , FePt, Bi_2S_3 and $NaYF_4$ NCs, resulting in positively charged NC surface. Unfortunately this approach did not work with CdSe and other semiconductor NCs. Nitrosonium salts are known as strong one-electron oxidants, resulting in the etching of NC surface immediately after the addition of $NOBF_4$ (Figure 17).

[0158] To cleave the bonds between CdSe NC and carboxylate organic ligands without oxidizing the NCs, HF_4 and HPF_6 in polar solvents were used. This reaction resulted in the phase transfer of NCs from non-polar solvent (toluene) to a polar solvent (FA). In the case of oleylamine and oleate capping ligands, H^+ cleaved the Cd-N and Cd-O bonds, as schematically shown in Figure 5a, leaving behind positively charged metal sites at the NC surface. HF_4 treatment was efficient for NCs capped with carboxylate and alkylamine ligands whereas CdSe NCs capped with alkylphosphonic acid remained in the toluene phase even after extended HF_4 treatment. BF_4^- and PF_6^- are known as very weak nucleophiles. These weakly coordinating anions did not bind to the NC surface, instead they acted as counter ions in the electrical double layer around NCs. Figure 5b shows the absorption and PL spectra of 5.5 nm CdSe NCs and CdSe/ZnS core-shells after treatment with HF_4 in FA. The size, size-distribution and band-edge emission remained, however, with a significant drop in the PL efficiency (<0.5% for CdSe NCs and ~2% for CdSe/ZnS NCs). ζ -potentials of CdSe and CdSe/ZnS NCs in FA were measured to be around +30 mV. Similar values were obtained with HPF_6 . The removal of organic ligands was not possible with $NaBF_4$ and $NaPF_6$, emphasizing the role of H^+ ions in the reaction, which was also suggested in previous reports. Figure 5c compares FTIR spectra of CdSe NCs capped with organic ligands and FTIR spectra of the same CdSe NCs after HF_4 treatment. The absence of C-H bands at 2852 and 2925 cm^{-1} constituted complete removal of the original organic ligand. The band centered at 2890 cm^{-1} was from FA (Figure 8). Apart from the FA related bands, a new sharp band at 1083 cm^{-1} corresponding to BF_4^- ions was observed.

[0159] Regarding Figure 5; **(a)** Removal of the organic ligands from the surface of CdSe NCs by HBF_4 treatment. For simplicity, the monodentate binding mode of carboxylate group is shown. The proposed mechanism can hold for other chelating and bridging modes as well. **(b)** Absorption and PL spectra of ligand-free colloidal CdSe and CdSe/ZnS NCs obtained after HBF_4 treatment. **(c)** FTIR spectra of organically capped and ligand-free CdSe NCs after HBF_4 treatment.

[0160] Growth of metal chalcogenides on NCs at room temperature. For the growth of metal chalcogenides on nanocrystals at room temperature, several approaches have been studied either in polar solvent or non polar solvent. In 2011, Talapin and co-workers have reported the use of chalcogenides and hydrochalcogenides as capping ligands for nanocrystals in polar solvents such as formamide or N-methylformamide. These ligands create a bond with the surface of nanocrystals and allow them to be soluble in a polar solvent. Hence it can be considered as the addition of a half monolayer, the second half monolayer would be induced through the addition of cadmium either in polar phase or in non polar phase. In an exemplary synthetic approach, ammonium sulfide or potassium sulfide are chosen as the sulfide source and cadmium nitrate, cadmium acetate, cadmium perchlorate or cadmium oleate are used as the cadmium source.

[0161] Several methods are contemplated, comprising use of both a polar and a nonpolar solvent. Contemplated nonpolar solvents include toluene, chloroform, methylene chloride, hexanes, octadecane, and mixtures thereof. Contemplated polar solvents include FA, DMF, NMFA, methanol, ethanol, and mixtures thereof. In some cases, the method further comprises adding a quaternary ammonium salt. Contemplated quaternary ammonium salts include Tetramethylammonium bromide; Tetramethylammonium chloride; Tetramethylammonium hexafluorophosphate; Tetramethylammonium hydroxide pentahydrate; Tetramethylammonium hydroxide; Tetramethylammonium hydroxide; Tetramethylammonium iodide; Tetramethylammonium nitrate; Tetramethylammonium perchlorate; Tetramethylammonium tetrafluoroborate; Triethylmethylammonium chloride; Tetraethylammonium bromide; Tetraethylammonium chloride monohydrate; Tetraethylammonium hydroxide; Tetraethylammonium hydroxide; Tetraethylammonium hydroxide; Tetraethylammonium iodide; Tetraethylammonium nitrate; Tetraethylammonium perchlorate; Tetraethylammonium tetrafluoroborate; Tetraethylammonium p-toluenesulfonate; (1-Hexyl)trimethylammonium bromide; Phenyltrimethylammonium bromide; Phenyltrimethylammonium chloride; Phenyltrimethylammonium iodide; Phenyltrimethylammonium methosulfate; Benzyltrimethylammonium bromide; Benzyltrimethylammonium chloride; Benzyltrimethylammonium hexafluorophosphate; Benzyltrimethylammonium hydroxide; Benzyltrimethylammonium hydroxide; Benzyltrimethylammonium iodide; (1-Butyl)triethylammonium bromide; (1-

Octyl)trimethylammonium bromide; Tetra-n-propylammonium bromide; Tetra-n-propylammonium chloride; Tetra-n-propylammonium hydrogen sulfate; Tetra-n-propylammonium hydroxide; Tetra-n-propylammonium iodide; Phenyltriethylammonium iodide; Methyltri-n-butylammonium bromide; Methyltri-n-butylammonium chloride; (1-Decyl)trimethylammonium bromide; Benzyltriethylammonium bromide; Benzyltriethylammonium chloride; Benzyltriethylammonium hydroxide; Benzyltriethylammonium tetrafluoroborate; (1-Dodecyl)trimethylammonium chloride; (1-Dodecyl)trimethylammonium bromide; Benzyltri-n-propylammonium chloride; Tetra-n-butylammonium acetate; Tetra-n-butylammonium acetate, Tetra-n-butylammonium bromide; Tetra-n-butylammonium chloride; Tetra-n-butylammonium chloride; Tetra-n-butylammonium hexafluoro-phosphate; Tetra-n-butylammonium hydrogen sulfate; Tetra-n-butylammonium hydroxide; Tetra-n-butylammonium hydroxide; Tetra-n-butylammonium hydroxide; Tetra-n-butylammonium hydroxide; Tetra-n-butylammonium iodide; Tetra-n-butylammonium nitrate; Tetra-n-butylammonium perchlorate,; Tetra-n-butylammonium perchlorate; Tetra-n-butylammonium phosphate; Tetra-n-butylammonium sulfate; Tetra-n-butylammoniumtrifluoromethane-sulfate; (1-Tetradecyl)trimethylammonium bromide; (1-Tetradecyl)trimethylammonium chloride; (1-Hexadecyl)trimethylammonium bromide; Ethyl(1-hexadecyl)dimethylammonium; Tetra-n-pentylammonium iodide; Benzyltri-n-butylammonium bromide; Benzyltri-n-butylammonium chloride; Benzyltri-n-butylammonium iodide; (1-Hexadecyl)pyridinium bromide monohydrate; (1-Hexadecyl)pyridinium chloride monohydrate; Di-n-decyldimethylammonium bromide; Tetra-n-hexylammonium bromide; Tetra-n-hexylammonium hydrogen sulfate; Tetra-n-hexylammonium iodide; Tetra-n-hexylammonium perchlorate; Di-n-dodecyldimethylammonium bromide; Tetra-n-heptylammonium bromide; Tetra-n-heptylammonium iodide; Tetra-n-octylammonium bromide; Dimethyldistearylammonium chloride; Tetra-n-dodecylammonium iodide; Tetraoctadecylammonium bromide, or mixtures thereof.

[0162] In some cases, the method further comprises adding an alkyl amine to the admixture of nanoparticle and inorganic capping agent. Contemplated alkyl amines include mono-, di- and tri-substituted alkyl amines. The alkyl group can be a hydrocarbon of 6 to 20 carbon, optionally with one or more double bonds. A specific alkyl amine contemplated is oleylamine.

[0163] In one method, in a vial, 1 ml of FA, 30 μ l of a solution at 0.1M of K_2S in FA ($(NH_4)_2S$ can also be used as sulfide precursor), 1 ml of toluene, 60 μ l of a solution at 0.1M of DDAB (didodecyldimethylammonium bromide) in toluene and 200 μ l of NCs (20mg/ml) are stirred for five minutes. There is no transfer of phase and the NCs are stabilized with S-DDA in toluene. The non polar phase is washed two times with 1ml of pure formamide by stirring one minute each time. Then 30 μ l of a solution at 0.1M of cadmium oleate, $Cd(OA)_2$, in

toluene is added to the mixture and stirred for one minute. Finally the NCs are precipitated with ethanol and resuspended in 400 μ l of toluene. By repeating the same process with increasing the amount of precursors, it is possible to grow at least 10 monolayers.

[0164] It is possible to prevent from the precipitation of nanocrystals by using octadecene (ODE) as a solvent for NCs and by extraction the excess of Cd(OA)₂ with addition of toluene (or hexane or chloroform) and methanol (or ethanol). The NCs will stay in ODE while the excess of precursor will go in the mixture of Methanol/Toluene.

[0165] In another method, in a vial, 1ml of FA, 2 μ l of (NH₄)₂S, 200 μ l of NCs (20mg/ml), 1ml of toluene and 15 μ l of oleylamine are stirred for five minutes. There is no transfer of phase since NCs are stabilized by oleylamine. The non polar phase containing the NCs, is washed two times with pure formamide. Then 1ml of formamide, and 30 μ l of a solution at 0.1M of Cd(OAc)₂ in formamide are added to the polar phase and stirred for 5 minutes. The nanocrystals are still stabilized by oleylamine in the non polar phase, but cadmium has grown on the sulfide on surface of nanocrystals. The non polar phase is rinsed two times with formamide. The successive monolayers are grown by the same way. This process doesn't require a precipitating step after each monolayer.

[0166] Growth by phase transfer: In a vial 1ml of FA, 2 μ l of (NH₄)₂S, 200 μ l of NCs (20mg/ml) and 1ml of toluene are stirred until complete phase transfer. The NCs are then moved back with addition of toluene, DDAB and Et₄NBr in formamide. The transfer from polar to non polar phase is fast. The addition of Et₄NBr allows an increase of the ionic strength. The non polar phase is then rinse two times with fresh formamide. Then 1ml of formamide, and 30 μ l of a solution at 0.1M of Cd(OAc)₂ in formamide are added to the polar phase and stirred for 5 minutes. The polar phase is then rinse two times with fresh formamide.

[0167] Growth in polar phase: In a vial 1ml of NMFA, 2 μ l of (NH₄)₂S, 200 μ l of NCs and 1ml of hexane are stirred until complete phase transfer. The NCs are then rinsed two times with hexane, precipitated with acetonitrile and redispersed with NMFA. Then 30 μ l of a solution at 0.1M of Cd(OAc)₂ in NMFA is added and stirred for 30 seconds. The NCs are then precipitated with toluene and redispersed with NMFA.

[0168] Colloidal NCs with metal-free inorganic ligands for device applications. Small inorganic ligands like S²⁻ or Se²⁻ do not introduce insulating barriers around NCs and provide an exciting opportunity for the integration of colloidal NCs in electronic and optoelectronic devices. Detailed investigations of NCs with these new capping ligands will be a subject of a separated study. Here results on electron transport in the arrays of S²⁻ capped CdSe NCs as well as CdSe/CdS and CdSe/ZnS core-shell NCs are shown.

[0169] The electron mobility in NC arrays can be conveniently measured from transfer characteristics of a field-effect transistor. For these studies, 20-40 nm thick close packed NC films were deposited on highly doped Si wafers with 100 nm thick SiO₂ thermal gate oxide. The NC films were spin-coated from FA solutions at elevated temperatures (80 °C), followed by short annealing at 200-250 °C. When (NH₄)₂S was used to stabilize the solution of CdSe NCs, this mild thermal treatment resulted in the complete removal of surface ligands and led to much higher carrier mobility in the NC array. Source and drain Al electrodes were patterned on the annealed NC films using a shadow mask. Figures 6a-c show sets of drain current (*I_D*) vs. drain-source voltage (*V_{DS}*) scans at different gate voltages (*V_G*) for devices made of (NH₄)₂S capped 4.6 nm CdSe NCs (originally capped with oleylamine and oleic acid), 10 nm CdSe/CdS, and 8 nm CdSe/ZnS core/shell NCs. *I_D* increased with increasing *V_G*, characteristic of the n-type transport.

[0170] The electron mobility corresponding to the linear regime of FET operation (measured at *V_{DS}* = 2V across a 80μm long channel) for a film of CdSe NCs capped with (NH₄)₂S annealed at 200 °C was $\mu_{lin} = 0.4 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ with *I_{ON}*/*I_{OFF}* ~10³ (Figure 6a,d). FETs assembled from CdSe/CdS (Figure 6b,e) and CdSe/ZnS (Figure 6c,f) core-shell NCs capped with (NH₄)₂S ligands annealed at 250 °C showed $\mu_{lin} = 0.04 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ with *I_{ON}*/*I_{OFF}* ~10⁴ at *V_{DS}* = 2V and $\mu_{lin} = 6 \cdot 10^{-5} \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ with *I_{ON}*/*I_{OFF}* ~10² at *V_{DS}* = 4V, respectively. The electron mobility measured in the saturation mode of FET operation (*V_{DS}* = 30V, Figure 18) was slightly higher than μ_{lin} for CdSe and CdSe/ZnS NCs: 0.5 cm²V⁻¹s⁻¹ and 9·10⁻⁵ cm²V⁻¹s⁻¹, correspondingly. The devices assembled from CdSe/CdS core-shell NCs showed similar electron mobility in both linear and saturation regimes.

[0171] The channel currents were orders magnitude lower for CdSe NCs capped with K₂S ligands as compared to (NH₄)₂S ligands. Without wishing to be bound by theory, low conductivity is attributed to the presence of K⁺ ions creating local electrostatic barriers around NCs and behaving as the electron scattering centers. The devices assembled from CdSe NCs capped with (NH₄)₂TeS₃ also showed n-type transport with $\mu_{lin} = 0.01 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ (Figure 19).

[0172] Although the films of CdSe/ZnS core-shell NCs showed rather low carrier mobility, these NCs preserved bright band-edge photoluminescence even after annealing at 250 °C (inset to Figures 7c). Generally, metal-free ligands allowed obtaining conductive NC layers without introducing foreign metal ions that often introduce recombination centers. As a result, efficient band-edge PL in electronically conductive NC arrays were observed for the first time (Figure 6c).

[0173] To conclude this work, it has been demonstrated that various metal-free inorganic ligands like S²⁻, OH⁻ and NH₂⁻ can behave as the capping ligands for colloidal semiconductor

and metallic NCs. These ligands significantly enrich the colloidal chemistry of all-inorganic NCs, and represent a useful strategy for integration of colloidal nanostructures in electronic and optoelectronic devices.

[0174] Regarding Figure 6; **(a-c)** Plots of drain current I_D vs. drain-source voltage V_{DS} , measured as different gate voltages V_G for the field-effect transistors (FETs) assembled from colloidal NCs capped with $(NH_4)_2S$: (a) CdSe, (b) CdSe/CdS core-shells and (c) CdSe/ZnS core-shells. Insets to panel (c) show the photoluminescence spectrum (left) and a photograph (right) for CdSe/ZnS NC film capped with $(NH_4)_2S$ ligands annealed at 250°C for 30 min. **(d,e)** Plots of I_D vs. V_G at constant $V_{DS} = 2V$ used to calculate current modulation and linear regime field-effect mobility for FETs using CdSe and CdSe/CdS NCs. **(f)** Plots of I_D vs. V_G measured at constant $V_{DS} = 4V$ in a FET assembled from CdSe/ZnS NCs. $L = 80 \mu m$, $W = 1500 \mu m$, 100 nm SiO_2 gate oxide.

Mobility calculations.

[0175] *Linear range mobility* (μ_{lin}); At low V_{DS} the current I_D increases linearly with V_{DS} . In this mode the FET operates like a variable resistor and the FET is said to be operating in a *linear regime*. I_D can be obtained from the following equation:

$$I_D = \frac{WC_i\mu_{lin}}{L} \left(V_G - V_T - \frac{V_D}{2} \right) V_D, \quad (S1)$$

where L is the channel length, W is the channel width, C_i is the capacitance per unit area of the dielectric layer, V_T is the threshold voltage, and μ_{lin} is *the linear regime field-effect mobility*. μ_{lin} is usually calculated from the transconductance (g_m) by plotting I_D versus V_G at a constant low V_D . The slope of this plot is equal to g_m :

$$g_m = \left. \frac{\partial I_D}{\partial V_G} \right|_{V_D=const} = \frac{WC_i V_D}{L} \mu_{lin} \quad (S2)$$

Saturation mobility (μ_{sat}); At high V_{DS} the current saturates as the channel "pinches off" near the drain electrode. If V_{DS} voltage is increased further, the pinch-off point of the channel begins to move away from the drain towards the source. The FET is said to be in *the saturation regime*. For $V_{DS} \geq (V_{GS} - V_T)$, I_D can be expressed as:

$$I_D = \frac{WC_i\mu_{sat}}{2L} (V_G - V_T)^2 \quad (S3)$$

where μ_{sat} is *the saturation regime field-effect mobility*. This parameter is typically calculated from the slope of $[I_D]^{1/2}$ vs. V_G curve.

Hysteresis-free operation of Field-Effect Transistors on CdSe nanocrystals capped with S^{2-} ligands

[0176] For many practical applications of nanocrystal transistors, solar cells and other electronic and optoelectronic devices, the hysteresis free operation is a very important

requirement that can be satisfied in addition to the high field effect mobility. Hysteretic response in FETs appears as a difference in the source-drain current (I_{DS}) values observed during forward and backward sweeps of the gate voltage. (V_{GS}) The mechanisms that cause hysteresis in transistors have been extensively studied on bulk inorganic or organic field effect transistors. In general, i) interface-trapped charge, ii) fixed charge in the dielectric layer and iii) mobile ions in the dielectric layer are known to be responsible for the hysteresis. By preventing these mechanisms, hysteresis free transistors have been reported in those fields.

[0177] However, the previous reports on nanocrystal transistors always have shown large hysteresis both in the output and transfer characteristics. Considering above mentioned mechanisms, the previously reported hysteresis in nanocrystal transistors can originate from hydrophilic SiO_2 surface, of which hydroxyl group can trap electron, and charge trapping ligand surrounding the nanoparticles. For example, by using an amorphous fluoropolymer (Cytop™) (hydroxyl free polymer) as the dielectric layer and $\text{In}_2\text{Se}_4^{2-}$ capped CdSe nanocrystals as the semiconductor layer, one can dramatically reduce the hysteresis of transfer curve. However one can still observe a certain hysteresis which can originate from the hole trapping by $\text{In}_2\text{Se}_4^{2-}$ ligands.

[0178] Based on the assumption that S^{2-} ligands trap holes less efficiently than molecular metal chalcogenide (MCC) ligands, transistors were fabricated with top-gate geometry using Cytop™ as the gate dielectric layer and S^{2-} capped CdSe as the semiconductor layer. As mentioned earlier, the use of Cytop™ can guarantee hydroxyl group free interfaces between semiconductor and dielectric layer, thus enabling electron trap-free operation for transfer curves. The devices were fabricated as follows: MCC- or S^{2-} capped nanocrystal solutions were spin-coated onto heavily doped Si wafers served as substrate under dry nitrogen atmosphere. As-deposited NC films were annealed at 200 °C for 30 min and Al source-drain electrode was patterned by thermal evaporation with channel length of 150 μm and channel width of 1500 μm . For the insulating layer, Cytop CTL-809M (solvent : CT-Solv.180) from Asahi Glass, Japan was spin coated onto the nanocrystal layer and dried for 30 min. at 150 °C. The thickness of the insulating layer was determined to be 800-850 nm thick, which gives a gate capacitance of $C_i=2.2\text{--}2.3 \text{ nF/cm}^2$. Finally Al gate electrode was deposited by thermal evaporation. (Figure 20)

[0179] Figure 21 shows very ideal transfer and output characteristics of S^{2-} capped CdSe transistors without any hysteresis which tell that the interface between S^{2-} capped CdSe nanocrystal and Cytop™ is free from both electron and hole traps. Considering that the transistor based on $\text{In}_2\text{Se}_4^{2-}$ capped CdSe nanocrystals using same transistor geometry still showed some hysteresis, it is probable that S^{2-} capped CdSe nanocrystals have lower hole trap density than MCC capped CdSe nanocrystals. These results further confirm that S^{2-}

capped colloidal nanocrystal transistors can be useful for real application in integrated circuit with high reliability.

Producing chalcogenide-capped III-V semiconductors

[0180] Bridging InAs NCs with $(\text{N}_2\text{H}_4)(\text{N}_2\text{H}_5)\text{Cu}_7\text{S}_4$ MCC ligands can lead to very high electron mobility approaching $15 \text{ cm}^2/\text{Vs}$. In addition, bipolar (positive/negative) photoresponse of MCC-capped InAs NCs solids was observed that can be tuned with ligands chemistry, temperature and wavelength and the doping of NC solid.

[0181] III-V semiconductors such as GaAs, InP, InAs combine a direct band gap with very high mobility, reliable p- and n-type doping and other characteristics making them excellent materials for various electronic and photonic applications. The fastest commercial transistors and the most efficient solar cells employ III-V semiconductors. At the same time, despite all the benefits, various technological difficulties with growing and processing single crystals do not allow III-V materials to successfully compete with silicon and chalcogenides for large consumer markets. As a possible solution, colloidal nanocrystals such as InAs and InP, can be used as a cost-efficient alternative to III-V single crystals for applications, for example, in photovoltaics, light detectors, field effect transistors (FET), and light emitting diodes (LED). For these applications efficient charge transport between NCs is preferred. The electronic properties of functional materials made of semiconductor NCs strongly depend on the ability of charge carriers to move from one NC to another through the interparticle boundaries. Charge transport through interfaces and grain boundaries is also of general importance for various applications of granular semiconducting materials.

[0182] Colloidal synthesis of high quality semiconductor nanocrystals has required the use of organic surface ligands that form insulating shells around each NC and negatively affect the charge transport. Removal of organic surfactants via thermal or chemical treatment often leads to surface traps and NCs sintering. A more useful approach is to chemically treat NCs with small ligands. These techniques have been originally developed for II-VI (e.g., CdSe) and IV-VI (e.g., PbSe) NCs. A few reported charge transport studies for InAs NCs used either postdeposition ligand exchange treatment of InAs NCs with ethanedithiol or solution ligand exchange of TOP capped InAs with aniline followed by postdeposition crosslinking with ethylenediamine (EDA). Such treatments converted highly insulating organics-capped InAs NCs into semiconducting NC solids.

[0183] Ligand exchange of organic capped nanocrystals with MCCs. All ligand exchange procedures were performed inside a nitrogen-filled glovebox (sub-1 ppm O_2 and H_2O levels) using anhydrous solvents. The molar ratio of MCC to NC materials is around 0.5. As a typical example for 4 nm InAs- $\text{In}_2\text{Se}_4^{2-}$ NC system, 0.1 ml 0.25 M $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ solution was mixed with 2 ml N_2H_4 . 0.16 ml of 0.30 M InAs NC solution in toluene was diluted

with 2 ml hexane and then loaded onto the top of the hydrazine phase. The solution was stirred for around 30 min to 1 hour until the upper organic phase turned colorless and the lower hydrazine phase turned dark. The organic solution was removed carefully. And the lower hydrazine phase was purified to remove any organics by washing with anhydrous toluene for three times. Furthermore, the hydrazine solution was precipitated by minimal amount of anhydrous acetonitrile (approximately 50% of NC solution volume), collected by centrifugation, redissolved into hydrazine and filtered through a 0.2 μm PTFE.

[0184] FET Device fabrication. Samples for electrical measurements were prepared by depositing thin 10 nm–30 nm ($\pm 20\%$) films by spin-coating MCC-capped NCs onto highly doped Si wafers with a 100 nm thick SiO_2 thermal gate oxide. The oxide surface was hydrophilized by piranha solution prior to NC deposition. The film thickness can be controlled by adjusting concentration of the NC solution and the spinning rate. All sample preparations were carried out under dry nitrogen atmosphere. As-deposited NC films were dried at 80°C for 30min, followed by the annealing at 200°C for 1hr. Source and drain Al ($\sim 1000 \text{ \AA}$) electrodes were directly patterned on the annealed NC films using a shadow mask.

[0185] Electrical measurements. The electrical measurements were performed using Agilent B1500A semiconductor parameter analyzer under dry nitrogen atmosphere. All FET measurements were carried out under quasi-static conditions with typical voltage scan rates of 0.12 Vs^{-1} and 40 mVs^{-1} for ID-VG and ID-VDS scans, respectively.

[0186] The electron mobility was calculated from the slope of the drain current (ID) versus VG measured when the gate voltage was scanned in the forward direction (i.e., from negative to positive). For an n-type FET, this measurement typically provides a conservative estimate for the field effect mobility.

[0187] Photoconductivity measurements. For the photoconductivity measurements, close-packed films of different MCCs ($\text{In}_2\text{Se}_4^{2-}$, $\text{Cu}_7\text{S}_4^{2-}$, and $\text{Sn}_2\text{S}_6^{4-}$) capped InAs and $\text{In}_2\text{Se}_4^{2-}$ capped InP NCs were deposited on a Si wafers with a thick layer of 100nm SiO_2 gate oxide with Ti/Au (5/45nm) electrodes patterned by photolithography. The surface of the substrates was hydrophilized by oxygen plasma treatment. As-deposited NC films were dried at 80°C for 30 min, following by the annealing at 200°C for 1hr. For the photocurrent vs time (I-t) measurements, the devices were biased using Keithley 2400 source meter controlled by a LabView program. The photocurrent was measured under illumination with four different CW LED's emitting at 660nm (1.88eV), 980nm (1.27eV), 1310nm (0.95eV), and 1550nm (0.80eV), respectively.

[0188] For synthesis of hydrazinium chalcogenidometallates (MCCs used here) the Mitzi's approach was used based on the dissolution metals or metal chalcogenides in neat N_2H_4 in the presence of elemental chalcogens. The ligand exchange was carried out through a

phase transfer procedure in which TOP-capped InAs or myristate-capped InP NCs in a nonpolar solvent such as hexane were transferred into the N_2H_4 phase as the organic ligands were replaced with MCCs forming a stable colloidal solution (Figure 32a). To explore the versatility of the MCC ligand exchange with InAs and InP NCs, five inorganic N_2H_4 -MCCs were studied: $(N_2H_4)_2(N_2H_5)_2In_2Se_4$, $(N_2H_4)_3(N_2H_5)_4Sn_2S_6$, $(N_2H_4)(N_2H_5)_4Sn_2Se_6$, $(N_2H_4)(N_2H_5)Cu_7S_4$, and $(N_2H_4)_x(N_2H_5)_3\{In_2Cu_2Se_4S_3\}$. TOP-capped InAs NCs worked well with all above MCCs whereas InP NCs capped with myristic acid could be stabilized with all MCC ligands except $(N_2H_4)(N_2H_5)Cu_7S_4$ that apparently etched InP NCs. The purity of the original organics-capped NCs was important to success of the ligand exchange and to the performance of the NC-based FET devices. The type of original organic ligand on the NCs also influenced the results of the ligand exchange. For instance, InP NCs initially capped with TOP/TOPO precipitated out in N_2H_4 after ligand exchange with MCCs. Among these precipitates, only $(N_2H_5)_4Sn_2S_6$ capped InP NCs can be redissolved into formamide (FA) which has much higher dielectric constant ($\epsilon=106$) compared to N_2H_4 ($\epsilon=55$). The attempts to treat TOP/TOPO capped InP NCs with $NOBF_4$ to get ligand-free NCs following the approach of Murray et al. and then to perform ligand exchange with MCCs was not successful because $NOBF_4$ etched the InP NCs. On the other hand, successful inorganic MCC ligand exchange happened with myristic acid-capped InP NCs leading to the formation of colloidal NCs in N_2H_4 . Simple chalcogenide ligands (S^{2-} , Se^{2-} and Te^{2-}) worked well with InAs and InP NCs regardless of original organic surfactants.

[0189] The time required to complete the ligand exchange ranged from a few minutes to several hours. As confirmed by TEM images, the size and shape of the InAs and InP NCs were preserved after the ligand exchange as shown in Figures 32c and 32e. $In_2Se_4^{2-}$ - capped InAs and $Sn_2S_6^{4-}$ - capped InP NCs retained their excitonic features in the absorption spectra as shown in Figure 32b and 32d, inferring the preservation of NCs size distribution. A slight redshift in the first excitonic peak of $In_2Se_4^{2-}$ - capped InAs NCs compared to TOP-capped InAs NCs can be explained by partial relaxation of the quantum confinement due to electron and/or hole wave function leakage to the MCC layer. FTIR spectra taken before and after ligand exchange showed the extent of ligand exchange (Figure 33a,b). The strong absorption bands at $2800-3000\text{ cm}^{-1}$ arising from characteristic C-H stretching were completely diminished after the ligand exchange reaction, confirming the complete removal of the organic surfactants from the surface of the NCs. Two weak absorption lines characteristic of the N-H stretching appear at $3200-3300\text{ cm}^{-1}$, indicating new N_2H_4 -MCCs attachment to the NCs. The negatively charged InAs NC surface resulted in a negative zeta potential (Figure 32f) which is sufficient to electrostatically stabilize the colloidal dispersion in N_2H_4 . A zeta potential of $\pm 30\text{ mV}$ is generally regarded as the borderline between electrostatically stable and unstable colloidal solution in aqueous or similar media.

[0190] Dynamic lighting scattering (DLS) measurements shown in Figure 32f, confirm that the narrow size distribution after ligand exchange is similar to that of organic capped NCs. A small decrease in the particle size of the MCC capped NCs compared to the organic ones can be attributed to a smaller hydrodynamic diameter of the MCC capped NCs after removal of the longer organic ligands. Since all the electric and optoelectric measurements of inorganic capped InAs and InP NCs were performed after 200 °C annealing, various techniques were applied to probe their morphological and electronic properties before and after the heat treatment. TGA data (Figure 33e) of $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ capped InAs NCs showed much less weight loss than the pure ligand at 200 °C. The weight loss at 200 °C, was caused by the elimination of weakly bound and thermally unstable N_2H_4 and N_2H_5^+ as confirmed by FTIR data (Figure 33a) that the N-H stretching bands disappear after annealing at 200 °C annealing for 30min. The X-ray diffraction patterns of $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ capped InAs and InP NCs were nearly identical before and after 200 °C annealing and showed no reflection of In_2Se_3 phase (Figure 33c and 33d). The first excitonic absorption peak (Figure 33f) of $(\text{N}_2\text{H}_4)_2(\text{N}_2\text{H}_5)_2\text{In}_2\text{Se}_4$ capped InAs NCs thin film broadened and slightly blue shifted after annealing at 200 °C for 30min, indicating enhanced electronic coupling between nanocrystals and etching of the InAs NCs by the In_2Se_3 ligand.

[0191] Charge transport and photoresponse in arrays of MCC-capped InAs NCs.

The exchange of bulky organic surfactants with small inorganic ligands such as $\text{In}_2\text{Se}_4^{2-}$, $\text{Cu}_7\text{S}_4^{2-}$, $\text{Sn}_2\text{S}_6^{4-}$ and $\text{Sn}_2\text{Se}_6^{4-}$ should facilitate strong electronic coupling between individual NCs (Fig. 33f). Strong electronic coupling provides an exciting path for the integration of colloidal NCs into electronic and optoelectronic application. For charge transport studies, source and drain electrodes were deposited on the films of MCCs-capped InAs NCs after annealing at 200 °C, which preserving excitonic features in the absorption spectra of annealed films.

[0192] Figure 34 shows the effect of inorganic MCCs ligands on the performance of FET in closed -packed films of MCC capped of InAs NCs. Figure 34a-c shows representative drain current (I_D) versus drain-source voltage (V_{DS}) scans at different gate voltages (V_G) for assemblies a films of InAs NCs capped with $\text{Cu}_7\text{S}_4^{2-}$, $\text{Sn}_2\text{S}_6^{4-}$, and $\text{Sn}_2\text{Se}_6^{4-}$ MCCs, respectively. I_D increased with increasing V_G as characteristic of n-type transport. The electron mobility corresponding to the linear regime of FET operation measured at $V_{DS} = 2$ V for a film of InAs NCs capped with $\text{Cu}_7\text{S}_4^{2-}$ annealed at 200 °C was $\mu_{lin} = 1.64 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ with $I_{ON}/I_{OFF} = 8 \times 10^1$ (Figure 34a,d). The saturation mobility (μ_{sat}) measured at $V_{DS} = 30$ V was slightly lower than linear mobility (μ_{lin}), $\mu_{sat} \sim 1.3 \text{ cm}^2/\text{Vs}$. This result expected the high-quality channel layers fabricated from $\text{Cu}_7\text{S}_4^{2-}$ -capped InAs NC. $\text{NH}_4\text{Cu}_7\text{S}_4$ required a relatively low decomposition temperature (~ 120 °C) due to the relatively weak hydrogen-bonding between

the Cu_7S_4^- anion and thiozincium/hydrazine species, which allows the formation of high-quality channel layers in FET devices at low annealing process.

[0193] On the other hand, FETs assembled from InAs NCs capped with $\text{Sn}_2\text{S}_6^{4-}$ and $\text{Sn}_2\text{Se}_6^{4-}$ ligands annealed at 200 °C showed lower carrier mobility; $\mu_{\text{lin}} = 0.2 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ with $I_{\text{ON}}/I_{\text{OFF}} = 3 \times 10^1$ (Figure 34b,e) and $\mu_{\text{lin}} = 0.05 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ with $I_{\text{ON}}/I_{\text{OFF}} = 2 \times 10^2$ at $V_{\text{DS}} = 2 \text{ V}$ (Figure 34c,f), respectively. The electron mobility measured in the saturation mode of FET operation ($V_{\text{DS}} = 30 \text{ V}$) was much lower than μ_{lin} for InAs NCs capped with $\text{Sn}_2\text{S}_6^{4-}$, and $\text{Sn}_2\text{Se}_6^{4-}$; $3.6 \times 10^{-5} \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ and $4.4 \times 10^{-6} \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$, respectively. The measured electron mobility depends both on the intrinsic property of the material (particle size, monodispersity etc.) and on a number of parameters related to device characteristics (FET structure, gate dielectric, film uniformity, contacts, etc.). These are all reasons to expect that higher performance will be obtained after further optimization of the FET devices.

[0194] Photoconductivity: The photoresponse of close-packed films of InAs NCs capped with $\text{In}_2\text{Se}_4^{2-}$, $\text{Cu}_7\text{S}_4^{2-}$ and $\text{Sn}_2\text{S}_6^{4-}$ at room temperatures were measured by four different excitation sources with respective energies at 660nm (1.88eV), 980nm (1.27eV), 1310nm (0.95eV), and 1550nm (0.80eV) under nitrogen atmosphere. The dependence of gate voltage on the photocurrent was also studied for films of InAs NC capped with $\text{Sn}_2\text{S}_6^{4-}$. For these studies, close-packed films of MCCs-capped InAs NCs were deposited on Si wafers with a thick layer of 100nm SiO_2 gate oxide and Ti/Au (5/45nm) electrodes patterned by photolithography, followed by annealing at 200°C for 1hr. The gate voltage was applied using a back gate electrode in bottom gate FET configuration (channel length=4.5 μm , $W=7800\mu\text{m}$). The photoresponse for the colloidal inorganic capped InAs NCs reveals a strong dependence on MCC-ligands. The results show that the coupling of illumination and gate effect leads to changing the sign of the photocurrent.

[0195] Figure 35a shows the photocurrent response as a function of excitation energy in films of $\text{In}_2\text{Se}_4^{2-}$ capped InAs NCs measured at a bias of 2V. The photocurrent shows a positive photoresponse for all excitation energy. With an increase in excitation energies, more free carriers photogenerated from the valance band to conduction band can be generated higher photocurrent. When the light was off the photocurrent generated with a higher energy (>1.27eV) decayed exponentially with a time constant greater than several hundred seconds. Figure 35 b and c show that the sign of photoreponse of $\text{Cu}_7\text{S}_4^{2-}$ and $\text{Sn}_2\text{S}_6^{4-}$ -capped InAs NCs was converted from negative at the higher energy excitations of 1.88eV and 1.27eV to positive at the lower energy excitations of 0.95eV and 0.80eV. Negative photocurrent has been observed in several material systems such as nanowires, heterostructures, and quantum well structures. Without wishing to be bound by theory, the negative photocurrent was mainly attributed to a reduction in the number of carriers available for transport in conduction channel. The response time of the negative photogeneration was

faster than that of the positive photoresponse. For an explanation of this phenomena, it is postulated that the closed-packed films of $\text{Cu}_7\text{S}_4^{2-}$ - and $\text{Sn}_2\text{S}_6^{4-}$ -capped InAs NCs annealed at 200°C can be formed high-quality quasi-multi-quantum well (MQW) structures due to their relatively low decomposition temperature. These quasi-MQW structures can provide strong electron confinement resulting from the large energy difference between the conduction bands and a large type-II valance band offset between InAs and Cu_2S (InAs/ Cu_2S /InAs) or InAs and SnS_2 (InAs/ SnS_2 /InAs), which provides the formation of a two-dimensional electron gas (2DEG) in the InAs layer. These carriers might produce donor-like defects in the barriers or donors at the InAs/MCC ligands interfaces. Positive photoconductivity, which increases the 2DEG density in the conduction channel layer, is detected upon illumination by photons with excitation energies lower than about 0.95 eV and might be attributed to the photoionization of deep donors. On the other hand, negative photoconductivity occurs upon illumination by excitation energies larger than about 1.27 eV. The negative photoresponse can be attributed to photogenerated electron-hole pairs in the large gap layer (MCC layer) followed by spatial charge separation by the built-in field in the heterojunction layer (NC/MCC). The photoexcited electrons are captured by ionized deep donors in the MCCs barriers, while the holes reaching the interface of NC/MCC recombine with electrons in the InAs NCs, resulting in a decrease of carrier density in the channel layer.

[0196] Figure 35d represents the gate-dependent photoresponse in films of $\text{Sn}_2\text{S}_4^{2-}$ capped InAs NCs measured by a function of back gate bias ($-20 < V_g < 20\text{V}$) at excitation energy of 1.27eV (980nm). The effect of applied back gate bias was found to be similar to that observed prior to illumination. The sign of the photocurrent was converted from negative to positive response by applying a gate bias from -20Vg to 20Vg. By increasing the negative gate bias ($< -20\text{Vg}$), negative photocurrent was decreased and by further increasing the negative bias to -30Vg, the photocurrent was completely degenerated due to complete depletion of carriers in the inversion layer on the NC/dielectric layer. On the other hand, when a positive gate bias was applied, the sign of photocurrent changed above 3Vg and the positive photocurrent increased with increasing of positive gate voltage due to the increase of the 2DEG sheet density.

[0197] Figure 36a-b shows that FETs assembled from colloidal InP NCs capped with $\text{In}_2\text{Se}_4^{2-}$ show poor charge transport behavior even after annealing at 250°C for 30min. Figure 36c-d show photoresponse for a film of $\text{In}_2\text{Se}_4^{2-}$ capped InP NCs. Upon illumination an excitation source above the band gap of InP ($E_g=1.27\text{eV}$ at 300K), the photocurrent sharply increased with respective energies at 1.88eV and 1.27eV. On the other hand, photocurrent in films of $\text{In}_2\text{Se}_4^{2-}$ capped InP NCs was not generated when lower energy excitation sources.

Examples

[0198] Chemicals: Potassium sulfide (anhydrous, ≥95%, Strem), sodium sulfide nonahydrate (98%, Aldrich), ammonium sulfide (40-48 wt% solution in water, Aldrich), Potassium hydroxide (≥90%, Aldrich), Sodium amide (Aldrich), Sulfur (99.998%, Aldrich), Selenium (powder, 99.99%, Aldrich), tellurium (shot, 99.999%, Aldrich), formamide (FA, spectroscopy grade, Aldrich), dimethylsulfoxide (DMSO, anhydrous, 99.9%, Aldrich), acetonitrile (anhydrous, 99.8%, Aldrich), didodecyldimethylammonium bromide (DDAB, 98%, Fluka), Trioctylphosphine oxide (TOPO, 99%, Aldrich), tetradecylphosphonic acid (TDPA, 99%, Polycarbon), octadecylphosphonic acid (ODPA, 99%, Polycarbon), dimethylcadmium (97%, Strem), Cadmium oxide (99.995%, Aldrich), diethylzinc (Aldrich), trioctylphosphine (TOP, 97%, Strem), dodecanethiol (98%, Aldrich), oleylamine (Aldrich), tert-butylamine-borane (97%, Aldrich), InCl₃ (99.99%, Aldrich), Indium acetate (99.99%, Alfa Aesar), Al₂Se₃ (95%, Strem) and Al₂Te₃ (99.5%, CERAC Inc.).

[0199] Nanocrystal Synthesis. Zinc blende phase *CdSe* NCs capped with oleic acid and oleylamine were prepared following Cao et al. Wurtzite phase *CdSe* NCs capped with n-octadecylphosphonic acid (ODPA) were prepared from CdO and TOPSe. Large, 12 nm *CdSe* NCs capped with n-tetradecylphosphonic acid (TDPA) were synthesized using Cd(CH₃)₂ and TOPSe as precursors. *CdSe* and *CdSe/ZnS* core/shell NCs capped with proprietary ligands obtained from Evident Technologies Inc. (Troy, NY) were also used.

[0200] To synthesize *InP* NCs, InCl₃ solution (1.036g InCl₃ in 3.44 mL TOP), 075g P(SiMe₃)₃, 7.4g TOP and 0.9g TOPO were mixed at room temperature. The mixture was heated at 270 °C for 2 days, and cooled down to room temperature. Post-synthesis size selective precipitation was carried out using toluene and ethanol as solvent and non-solvent, respectively.

[0201] *InAs* NCs with TOP as capping ligands were prepared from InCl₃ and As[Si(CH₃)₃]₃.

[0202] *Au* NCs were synthesized following Stucky et al. 0.25 mmol AuPPh₃Cl was mixed with 0.125 mL of dodecanethiol in 20 mL benzene forming a clear solution. 2.5 mmol of tert-butylamine-borane complex was then added to the above mixture followed by stirring at 80°C.

[0203] *ZnSe* NCs were prepared with some modifications. 7 mL oleylamine was degassed at 125°C under vacuum for 30 min and then heated to 325°C under N₂ flow. The solution containing 0.5M Zn and Se precursors was prepared by co-dissolution of diethylzinc and Se in TOP at room temperature. 2 mL of the precursors solution was added to degassed oleylamine at 325 °C. One mL of additional precursors solution was added to the reaction mixture after 1 h, followed by two successive injections of 1.5 mL precursors solution after

2.5 and 4 hrs. The reaction was continued for 1 h after the final injection of the precursors and then cooled to room temperature. The NCs were washed by precipitation with ethanol and redispersed in hexane. The washing procedure was repeated three times.

[0204] *CdS nanorods* were prepared by slightly modified procedure. 0.207g CdO, 1.08g n-ODPA, 0.015g n-propylphosphonic acid, and 3.35g TOPO were heated at 120°C under vacuum for 1 h, followed by heating the mixture to 280°C under N₂ until the formation of a clear solution. The mixture was degassed at 120 °C for 2 h before it was heated to 300°C under N₂. 2 g TOP was injected into the mixture at 300°C and temperature was immediately set to 320° C. 1.30g TOPS (TOP : S = 1:1) was injected at 320°C and heating was continued for 2 h. The reaction mixture was cooled to room temperature, washed twice with toluene/acetone and redispersed in toluene.

[0205] *In₂O₃ NCs* were prepared using the recipe of Seo et al. by heating a slurry of In(OAc)₃ and oleylamine at 250°C.

[0206] *CdTe NCs* were synthesized similar to the recipe published.

[0207] *PbS NCs* capped with oleic acid were synthesized according to the protocol developed by Hines et al.

[0208] **Synthesis of inorganic ligands.** Sulfides, hydrogen sulfide, hydroxides and amide ligands were purchased from Aldrich and Strem and used as received.

[0209] *K₂Se* was synthesized by the reaction of K (25.6 mmol) with Se (12.8 mmol) in about 50 mL liquid ammonia. Special care was taken to make sure that the chemicals and reaction environment were air and moisture free. A mixture of dry ice and acetone was used to liquefy NH₃ gas. Gray-white K₂Se powder was stored inside a glovebox. In air K₂Se turned red because of the formation of polyselenides. *K₂Te* was prepared in the same way as K₂Se. 7.6 mmol of K and 3.8 mmol of Te were used.

[0210] 0.05 M solutions of *KHSe* and *KHTe* in formamide (FA) were prepared by titrating 25 mL of 0.05 M KOH solution with H₂Se (or H₂Te) gas generated by the reaction of Al₂Se₃ (or Al₂Te₃) with 10% H₂SO₄. 1.7 fold molar excess of H₂Se (or H₂Te) was used. A rigorous N₂ environment was maintained while handling the KHSe and KHTe solutions.

[0211] *(NH₄)₂TeS₃* was synthesized using a modified literature method of Gerl et al. 2TeO₂*HNO₃ was prepared by dissolving 5g Te (pellets, Aldrich) in 35 mL HNO₃ (65%, aqueous) diluted with 50 mL H₂O. The solution was boiled in an open beaker until volume decreased to about 30 mL. Upon cooling, 2TeO₂*HNO₃ was precipitated as a white solid that was separated by filtering, rinsed with deionized water and dried. To prepare (NH₄)₂TeS₃, 2 g of 2TeO₂*HNO₃ was mixed with 40 mL aqueous ammonia solution (~30% NH₃, Aldrich). Solution was first purged with N₂ for 5 min, then with H₂S until all telluronitrate dissolved

forming a yellow solution, characteristic for TeS_3^{2-} ions. Solvents and $(\text{NH}_4)_2\text{S}$ were removed by vacuum evaporation. The solid was redispersed in 36 mL H_2O , 4 mL NH_4OH and 0.1 mL N_2H_4 (used as a stabilizer against oxidative decomposition) forming a clear yellow solution of TeS_3^{2-} ions (with small amounts of $\text{Te}_2\text{S}_5^{2-}$ as confirmed by ESI-MS) at a concentration of about 0.25M.

[0212] Ligand Exchange. *Ligand exchange with chalcogenide (S^{2-} , Se^{2-} , Te^{2-}) and hydrochalcogenide (HS^- , HSe^- , HTe^-) ions.* The ligand exchange process was typically carried out under inert atmosphere. Colloidal dispersions of different NCs with organic ligands were prepared in nonpolar solvents like toluene or hexane while solutions of inorganic ligands were prepared in polar formamide (FA) immiscible with toluene and hexane. For a typical ligand exchange using S^{2-} ions, 1 mL CdSe NC solution (~ 2 mg/mL) was mixed with 1 mL of K_2S solution (5mg/mL). The mixture was stirred for about 10 min leading to complete phase transfer of CdSe NCs from toluene to FA phase. The phase transfer can be easily monitored by the color change for toluene (red to colorless) and FA (colorless to red) phases. The FA phase was separated out followed by triple washing with toluene to remove any remaining non-polar organic species. The washed FA phase was then filtered through a 0.2 μm PTFE filter and ~1 mL acetonitrile was added to precipitate out the NCs. The precipitate was re-dispersed in FA and used for further studies. The NC dispersion in FA was stable for months. Ligand exchange with Se^{2-} , Te^{2-} , HS^- , HSe^- and HTe^- ligands were carried out in a similar manner. In some cases, the ligand exchange can take longer time, up to several hours.

[0213] The exchange of organic ligands with S^{2-} and SH^- can be carried out in air as well. Moreover, one can use concentrated aqueous solutions of $(\text{NH}_4)_2\text{S}$, K_2S and Na_2S as S^{2-} source to carry out the ligand exchange. As an example, 10 μL of $(\text{NH}_4)_2\text{S}$ solution (Aldrich, 40-48 wt% in water) was added to 1 mL FA and mixed with NC dispersion in toluene or hexane. The rest of the ligand exchange procedure was similar to the above protocol. When handled in air, the solutions of S^{2-} capped NCs preserve their colloidal stability for only several days. Resulting precipitates can be easily re-dispersed after addition of ~5 μL $(\text{NH}_4)_2\text{S}$ solution; the dispersions stabilized with additional S^{2-} remained stable for several weeks in air. Similar to water and FA, the ligand exchange can be carried out in DMSO.

[0214] Ligand Exchange with TeS_3^- . The mixed chalcogenide Te-S species are stable in basic solutions, (NH_4OH was typically used) and are highly susceptible to oxidation. All ligand-exchange reactions were carried out in a glovebox. In a typical ligand exchange for CdTe NCs, 0.4 mL CdTe NCs capped with oleic acid in toluene (~25 mg/mL) was mixed with 3 mL FA, 3 mL toluene, and 0.4 mL ~0.25M $(\text{NH}_4)_2\text{TeS}_3$ solution. Upon stirring for 2-10 hours, CdTe NCs quantitatively transferred into FA phase. NC solution was rinsed 3 times

with toluene and mixed with 3-6 mL acetonitrile. NCs were isolated by centrifuging and redispersed in FA.

[0215] *Ligand Exchange with OH⁻*. A stock solution of KOH was prepared by dissolving 135mg KOH in 0.4 mL FA. For a typical ligand exchange reaction, ~2mg 5.5 nm CdSe NCs were dispersed in 1 mL toluene. 1 mL FA was added to the NC solution followed by the addition of 20 μ L KOH solution and stirred for about 10 min. Red colored FA phase was separated out, washed three times with toluene and passed through a 0.2 μ m PTFE filter. Acetonitrile was added to precipitate the NCs, followed by centrifugation and re-dispersion of NCs in FA. The process was carried out under inert atmosphere.

[0216] *Ligand Exchange with NH₂⁻*. 0.05g NaNH₂ was dissolved in 0.5 mL FA to prepare a stock solution. Then, 0.1 mL of the NaNH₂ stock solution was diluted to 1 mL by adding FA and the resulting solution was added to 1.5mg CdSe NCs dispersed in 1 mL toluene. The mixture was stirred for about 10 min. The NCs were separated out to the FA phase, washed, precipitated, centrifuged and re-dispersed in FA under inert atmosphere.

[0217] *Treatment with HBF₄ and HPF₆*. 1.5mg CdSe NCs was dispersed in 1 mL toluene followed by the addition of a solution of HBF₄ (prepared by mixing 25 μ L of 50 wt% aqueous HBF₄ with 1 mL FA). NCs completely transferred to the FA phase within 5 minutes. The colorless toluene phase was discarded followed by the addition of pure toluene to wash out any remaining non-polar organics. The washing was repeated 3-4 times in about 30 minutes and finally the NCs dispersed in FA were passed through a 0.2 μ m PTFE filter. HPF₆ treatment was carried out in similar manner. All these steps were carried out under the nitrogen environment inside a glove box, and the FA dispersion of CdSe NCs obtained after the ligand exchange was found to be stable for a few days, after which the NCs precipitates out from the solution.

[0218] **Characterization.** UV-vis absorption spectra of NC dispersions were recorded using a Cary 5000 UV-vis-NIR spectrophotometer. Photoluminescence (PL) spectra were collected using a FluoroMax-4 spectrofluorometer (HORIBA Jobin Yvon). PL quantum efficiency (QE) of the NC dispersions were measured using Rhodamine 6G (QE = 95%) as a reference dye dissolved in ethanol. Fourier-transform infrared (FTIR) spectra were acquired in the transmission mode using a Nicolet Nexus-670 FTIR spectrometer. Samples for FTIR measurements were prepared by drop casting concentrated NC dispersions on KBr crystal substrates (International Crystal Laboratories) followed by drying at 90 °C under vacuum. Transmittance of different NC samples was normalized by the weight of NCs per unit area of the deposited film, assuming a uniform film thickness across the KBr substrate. Transmission Electron Microscopy (TEM) data were obtained using a FEI Tecnai F30 microscope operated at 300 kV. Dynamic light scattering (DLS) and ζ -potential data were

obtained using a Zetasizer Nano-ZS (Malvern Instruments, U.K.). ζ -potential was calculated from the electrophoretic mobility using Henry's equation in the Smoluchowski limit.

Electrospray ionization mass spectrometry (ESI-MS) was performed using Agilent 1100 LC/MSD mass-spectrometer. The peak assignments were based on the comparison of experimental mass-spectra with calculated isotope patterns.

[0219] Charge Transport Studies. Device Fabrication. All fabrication steps were carried out under dry nitrogen atmosphere. Highly p-doped Si wafers (Silicon Quest, Inc) with a 100 nm thick layer of thermally grown SiO₂ gate oxide were used as a substrate. The oxide layer on the back side of the wafers was etched using 1% HF aqueous solution, followed by careful rinsing with high purity deionized water. The substrates were cleaned with acetone, iso-propanol and ethanol, followed by drying in a flow of N₂ gas. SiO₂ surface was hydrophilized by oxygen plasma or piranha (H₂SO₄:H₂O₂) treatments immediately prior to NC deposition. The substrates were treated by oxygen plasma (~80W) for 10-15 min. Piranha treatment was usually carried out at 120°C for 10 minutes followed by multiple washings with high purity deionized water. Piranha solution was prepared by adding concentrated sulfuric acid to 30% H₂O₂ solution (2:3 volume ratio).

[0220] The NC films for electrical measurements were prepared by depositing thin 20–40 nm films by spin-coating (spread: 600 rpm, 6 s; spin: 2000 rpm, 30 s) from FA solutions at elevated temperatures (80 °C) using an infrared lamp placed above the substrate. After deposition, the NC films were dried at 80 °C for 30 min, followed by the annealing at 200-250 °C for 30 min using a hot plate with calibrated temperature controller. The NC film thickness was measured using AFM or high resolution SEM of device cross-sections. The top source and drain electrodes were thermally evaporated at 1.0-2.5 Å/s rate up to ~1000 Å total thickness using a metal evaporator located inside nitrogen-filled glove box. After deposition of Al electrodes, the devices were post annealed at 80 °C for 30 min to improve the contacts.

[0221] Electrical Measurements. All electrical measurements were performed using Agilent B1500A semiconductor parameter analyzer. The source electrode was grounded for the field-effect transistor measurements. All electrical measurements were performed under dry nitrogen atmosphere and under quasi-static conditions with slow scan of source-drain or source-gate voltage.

[0222] CdSe(zb)/CdS and CdSe(w)/CdS: Figure 27 shows the comparison between growth made on zinc blende CdSe NCs and wurtzite CdSe NCs. The XRay pattern of the cores confirm the two structures. Absorption spectra of CdSe-xSCd with x=1..10 and TEM images of CdSe-10SCd for two different ways to grow the shell: (A middle) with (NH₄)₂S as a precursor of sulfide and cadmium oleate, Cd(OA)₂, as a precursor of cadmium, and the

nanocrystals are washed after each monolayer; (B bottom) QDs are stabilized by oleylamine either when they are sulfide rich or cadmium rich. $\text{Cd}(\text{OAc})_2$ and $(\text{NH}_4)_2\text{S}$ are used as precursors of cadmium and sulfide. TEM images of each sample, scale bar=20nm.

[0223] CdS/ZnS doped with manganese : Figure 31 shows absorption spectra (color) of CdS-xSZn doped with manganese in the third layer for $x=1..6$ and emission spectrum of CdS-6SZn :Mn showing the phosphorescence coming from Mn^{2+} .

[0224] As discussed above colloidal particles may be cross-linked (i.e., bridged) using metal ions, whereby one or more metal ions individually binds, ionically or covalently, binding sites on the exterior of a plurality of colloidal particles. The binding sites may be parts of the inorganic capping agent disposed perpendicular to a surface on the nanoparticle. Various example bridging configurations between colloidal particles are described herein using cationic ions, preferably cationic metal ions. And, as described, selection of the bridging cationic ions may be chosen to adjust various properties of the colloid particles. As described the cationic ion may be a transition metal ion, a main group ion, a lanthanide ion, or an actinide ion. Preferably, the cationic ion is selected from those ions that can impart advanced electronic, magnetic (e.g., Mn^{2+} , Co^{2+}), or photophysical properties on the cross-linked colloidal particles. Still more preferably the cationic ion is Pt^{2+} , Zn^{2+} , Cd^{2+} , Mn^{2+} , Mn^{3+} , Eu^{2+} , Fe^{2+} , Fe^{3+} , Co^{2+} , Ge^{4+} , Cu^{2+} , Cu^+ , Pb^{2+} , Bi^{3+} , Sb^{3+} , In^{3+} , Ga^{3+} , Au^+ , Au^{3+} , Ag^+ , Sn^{2+} , Sn^{4+} , or Hg^{2+} . The ability to adjust such properties allows for tailored selectivity of colloidal particles, in particular colloidal nanocrystals (NCs) which provide convenient "building blocks" for various electrical, electromechanical, magnetic, electrooptic structures, photovoltaics, and thermoelectrics, including solar cells, light-emitting devices, photocatalytic systems, etc. The use of inorganic ligands for colloidal NCs dramatically improves inter-NC charge transport, enabling fast progress in NC-based devices.

[0225] As described herein, the cationic part of inorganic ligands may be used to systematically engineer the NC properties and to impart additional functionalities to all-inorganic colloidal NCs. And in this way, cations provide a convenient tool for tailoring optical, electronic, magnetic and catalytic properties of all-inorganic NCs and NC solids. In examples discussed herein, cationic metal ions such as Cd^{2+} , Mn^{2+} , In^{3+} etc. can bind to the NC surface in solution and inverse the surface charge of the colloidal particles from negative to positive, along with dramatic improvement of luminescence efficiency. In a NC film, for example, cations can link adjacent NCs and improve electron mobility. Cationic metal ions (e.g., K^+ , In^{3+}) can switch conductivity in CdTe NC solids from p-type to ambipolar to n-type. Cationic metal ions Mn^{2+} can bridge S^{2-} capped CdSe NCs via S-Mn-S bonds and impart magnetic properties to originally diamagnetic CdSe NCs. Bridging semiconductor NCs with Pt^{2+} ions offer control over the catalytic properties of NC solids. Example empirical NC

synthesis and cationic ion bridging and corresponding effects and effect on colloidal NC properties are now described.

[0226] Nanocrystal synthesis. 4.4 nm Zinc blende *CdSe* NCs capped with oleic acid were prepared following the techniques as described by Cao et al. 4.2 nm Wurtzite *CdSe* NCs capped with octadecylphosphonic acid (ODPA) were prepared from CdO and *n*-trioctylphosphine selenide (TOPSe) following Manna, et al. As described below the Zinc blende NCs and the wurtzite NCs showed similar results in various studies. In addition, *CdSe/ZnS* core/shell NCs capped with proprietary amine-based ligands obtained from Evident Technologies Inc. (Troy, NY) were used. *InAs* NCs capped with trioctylphosphine (TOP) were prepared by reacting InCl_3 and $\text{As}[\text{Si}(\text{CH}_3)_3]_3$. *CdS nanorods* were prepared. *CdTe* NCs capped with tetradecylphosphonic acid (TDPA) were then prepared.

[0227] Ligand Exchange. The exchange of original organic ligands with S^{2-} and Te^{2-} was carried out per the foregoing. For example, in a typical experiment, 1 mL (5 mg/mL) organics-capped *CdSe* NCs dispersion in toluene was combined with 1 mL K_2S solution (12 mg/mL) in formamide (FA), stirred for about 10 min leading to a complete phase transfer of NCs from toluene to the FA phase. The FA phase was separated out and washed three times with toluene. NCs were then precipitated by adding a minimum amount (~0.8 mL) of acetonitrile, centrifuged and re-dispersed in FA. A similar ligand exchange with $\text{Na}_2\text{Sn}_2\text{S}_6$ was carried. All ligand exchange reactions were carried out in a glovebox filled with dry nitrogen.

[0228] NC charge inversion and photoluminescence (PL) in solution. For studies of charge inversion and PL efficiency, 1 mL dilute solution (0.3 mg/mL) of K_2S capped *CdSe* or *CdSe/ZnS* NCs in FA was combined with 2 mL FA solution of a salt containing desired cation and an anion with low nucleophilicity (NaNO_3 , KNO_3 , $\text{Cd}(\text{NO}_3)_2$, $\text{Zn}(\text{NO}_3)_2$, $\text{Ca}(\text{NO}_3)_2$, $\text{Mg}(\text{NO}_3)_2$, $\text{Cd}(\text{ClO}_4)_2$, $\text{Ba}(\text{NO}_3)_2$, $\text{In}(\text{NO}_3)_3$, or $\text{Al}(\text{NO}_3)_3$, etc). To ensure colloidal stability, all NC solutions were filtered through 0.2 μm PTFE syringe filter prior to optical measurements. The NC solutions retained their colloidal stability in the presence of some metal ions for only several days and freshly prepared mixtures of NCs and metal ions for all optical and zeta-potential measurements were used. The solutions were typically handled inside a N_2 glovebox.

[0229] Linking NCs with inorganic cations and fabrication of FET devices. ~20 nm thick films of inorganically-capped NCs were prepared by spin-coating (2000 rpm, 60 s) solutions of K_2S capped *CdSe* NCs (~20 mg/mL) in FA on a suitable substrate at an elevated temperature (80 °C) using an infrared lamp placed above the substrate. Quartz substrates were used for UV-visible measurements and heavily p-doped Si wafers (Silicon Quest, Inc) with a 100 nm thick layer of thermally grown SiO_2 gate oxide were used for FET

measurements. Substrates were hydrophilized by oxygen plasma or piranha ($\text{H}_2\text{SO}_4:\text{H}_2\text{O}_2$) treatments. Dried NC films were dipped into 50 mM solutions of metal salts ($\text{Cd}(\text{NO}_3)_2$, $\text{Zn}(\text{NO}_3)_2$, $\text{In}(\text{NO}_3)_3$, and $\text{Mn}(\text{NO}_3)_2$) in methanol for 30 min followed by washing the films in fresh methanol. For FET measurements, the cation treated NC films were annealed at 200 °C for 30 min to remove solvents and remaining volatile ligands without sintering the NCs. The NC film thickness was measured using AFM. The top source and drain electrodes (Al) were thermally evaporated at 1-2 Å/s rate up to ~1000 Å total thickness using metal evaporator installed inside a glovebox. The FET channel length was 150 μm for the FET devices with bottom gate and top source-drain electrodes. After deposition of top electrodes, the devices were annealed at 80 °C for 30 min to improve the contacts. All steps were carried out under N_2 atmosphere inside a glovebox. For the CdTe NC devices, both bottom gate / top source-drain FET geometry (channel length 150 μm) and bottom gate / bottom source-drain FET geometry (channel length 5 μm) with Au or Al source and drain electrodes, were examined.

[0230] Electrical measurements were carried out under quasi-static conditions with slow scan of source-drain or source-gate voltage using Agilent B1500A semiconductor parameter analyzer and home-made probe station placed inside a N_2 -filled glovebox. The transfer characteristics for the FETs were measured with the gate voltage (V_G) sweep rate 40 mV/s. The linear regime mobility (μ_{lin}) and the saturation regime mobility (μ_{sat}) were calculated from FET transfer characteristics as described below.

[0231] Characterization. Continuous wave *EPR experiments* were carried out using a Bruker ELEXSYS E580 spectrometer operating in the X-band (9.4 GHz) mode and equipped with an Oxford CF935 helium flow cryostat with an ITC-5025 temperature controller. Magnetic properties were studied using *SQUID Magnetometry* (MPMS XL, Quantum Design). Zero-field-cooled (ZFC) and field-cooled (FC) studies were recorded in the 5-300K range at $H=100$ Oe after cooling the NC samples in zero field or in a 100 Oe field, respectively. Mn K-edge *EXAFS measurements* were carried out at the MRCAT 10-ID beamline at the Advanced Photon Source, Argonne National Laboratory (ANL) in the fluorescence mode with ionization chamber in Stern-Heald geometry for the NC samples. Samples were loaded in a teflon sample holder inside an N_2 glovebox and sealed inside an air-tight chamber. Mn standard samples were measured in the transmission mode. The sulfur K-edge XANES spectra were measured at the 9-BM beamline at the Advanced Photon Source in the fluorescence mode. The EXAFS data were processed using Athena software by extracting the EXAFS oscillations $\chi(k)$ as a function of photoelectron wave number k following standard procedures. The theoretical paths were generated using FEFF6 and the models were fitted in the conventional way using Artemis software. Artemis was used to refine the fitting parameters used for modeling each sample in the R-space until a

satisfactory model describing the system was obtained. For EPR, magnetic and EXAFS/XANES measurements, samples were prepared in form of thoroughly washed and dried powders of CdSe/S²⁻ nanocrystals cross-linked with Mn²⁺ ions.

[0232] Electrochemical experiments were carried out using a Gamry Reference 600 potentiostat using a three-electrode electrochemical cell. For electrochemical measurements in anhydrous acetonitrile, 0.1 M tetrabutylammonium perchlorate (TBAP) was used as an electrolyte. Glassy carbon (GC), platinum wire and Ag⁺/Ag (0.01 M AgNO₃ in CH₃CN) electrodes were used as the working, counter and reference electrodes, respectively. The NC films were formed at the surface of a glassy carbon electrode by drop casting. For optical studies, ITO-covered glass was used as the working electrode with a NC film prepared by spin-coating. The electrochemical measurements in acetonitrile were carried out in presence of dimethylformamide (DMF) protonated by trifluoromethanesulfonic (triflic) acid. Protonated DMF was synthesized. Equimolar amounts of triflic acid and DMF were mixed and stirred for 2-3 minutes resulting in formation of white solid soluble in acetonitrile and dichloromethane. Typical [H(DMF)]⁺OTf⁻ concentration used in this work was 0.01 M.

[0233] For electrochemical measurements in aqueous solutions, pH was buffered at 6.50 by a phosphate buffer (a mixture of K₂HPO₄ and KH₂PO₄ with total concentration of phosphate 0.15 mol/L). Glassy carbon (GC), platinum wire and Ag/AgCl (saturated KCl solution) electrodes were used as the working, counter and reference electrodes, respectively. The area of GC electrode was 7.07·10⁻² cm². The NC films were prepared at the surface of glassy carbon electrode by drop casting. All solutions were carefully degassed and kept under nitrogen atmosphere.

[0234] Charge inversion of inorganically-capped nanocrystals. 4.2 nm CdSe NCs were transferred from toluene into a polar solvent (formamide, FA) by treatment with K₂S that exchanged original n-tetradecylphosphonate surface ligands with S²⁻. The completeness of ligands exchange was confirmed by FTIR measurements showing complete removal of the absorption bands around 3000 cm⁻¹ corresponding to C-H stretching in the hydrocarbon tails of the organic ligands (Figure 46). S²⁻ covalently bonded to the NC surface (Figure 37A) resulting in negatively charged CdSe NCs with measured electrophoretic mobility -0.7×10⁻⁸ m²V⁻¹s⁻¹ and ζ-potential -35 mV calculated using Henry's equation. By knowing the ionic strength, one could also calculate surface charge density (σ). For a spherical particle immersed in an electrolyte, $\sigma = \epsilon_0 \epsilon \zeta (1 + \kappa r) / r$, where ϵ_0 is the vacuum permittivity, ϵ (109 for FA) is the dielectric constant of solvent, r is a hydrodynamic radius of NC and κ^{-1} is Debye screening length of the electrolyte. The corresponding average surface charge of a spherical NC, Z , in units of elementary charges (e) can be obtained as $Z = 4\pi r^2 \sigma / e$. For

K₂S capped CdSe NCs (CdSe/S²⁻ NCs, $\zeta = -35$ mV), $\sigma = -0.016$ C/m² was obtained or ~9 negative elemental charges accumulated at the surface of CdSe NCs.

[0235] Negatively charged chalcogenide ions bound to the surface of CdSe NCs should electrostatically interact with nearby cations. In addition, they may exhibit specific chemical affinity toward metal ions forming strong chemical bonds to chalcogens (Figure 37A). In a polar solvent, these interactions can be monitored by measuring changes of electrophoretic mobility in the presence of specific cations. It was found that addition of 5 mM of various metal salts to a dilute (0.3 mg/mL) solution of CdSe/S²⁻ NCs results in significant changes of ζ -potential. Figure 37B, for example shows that ζ -potential of 4.2 nm CdSe NCs in FA can be tuned almost continuously from -35 mV for CdSe/S²⁻ to +28 mV for CdSe/S^{2-}/Cd²⁺ depending upon the chemical nature of added cation. Figure 38B shows data for ζ -potentials in presence of 5 mM metal ion solution for different metal ions. In Figure 47, the concentrations of each M(NO₃)_n salt were adjusted to the total ionic strength of 15 mM (corresponding to 5 mM concentration of divalent metal nitrate, n=2), revealing the same trend of ζ -potentials. When K⁺ or Na⁺ were added to the NC solutions in form of nitrates, the absolute value of ζ -potential decreased from -35 mV to about -20 mV which could be explained as an increase of the ionic strength without specific binding of metal ions to the NC surface. This scenario agrees with the Derjaguin-Landau-Verwey-Overbeek (DLVO) theory that takes into account Coulombic interactions of colloidal particles with point-like charges. However, the DLVO theory cannot explain the interaction of CdSe NCs with other cations, such as Al³⁺, In³⁺, Zn²⁺, Ca²⁺ and Cd²⁺ that result in the charge inversion as shown in Figure 37B. For example, the addition of 5 mM Cd²⁺ in the form of Cd(NO₃)₂ or Cd(ClO₄)₂ to 0.3 mg/mL solution of 4.2 nm CdSe/S²⁻ NCs in FA resulted in +28 mV ζ -potential. This corresponds to ~11 elemental charges ($\sigma = +0.018$ C/m²) associated with CdSe/S²⁻ NCs exposed to 5 mM Cd²⁺ solution. After addition of Mg²⁺, Ba²⁺, Al³⁺ or In³⁺ to CdSe/S²⁻ NCs, the magnitude of ζ -potential is less than 15 mV, resulting in a limited colloidal stability. Charge inversion was observed in case of CdSe NCs capped with MCC ligands such as Sn₂S₆⁴⁻ (Figure 48).}

[0236] In general, charge inversion does not require a specific binding of opposite charges. It can result from the effect of correlation between multiple charged ions near the interface, not accounted by the mean-field theories such as DLVO. For example, it has been shown that screening of a strongly charged particle by multivalent counterions can result in the inverted charge Q^* with magnitude $Q^* \approx 0.83\sqrt{QZe}$, where Q is the original particle charge, Ze is the charge of the counter ions. This would predict 4.2 nm CdSe NCs with $Q = -9e$ maximum inverted charge of $Q^* = 3.5e$ after treating with divalent cations. The predicted Q^* is significantly smaller than the inverted charge ($Q^* = 11e$) calculated from the measured

electrophoretic mobility of CdSe/S²⁻/Cd²⁺ NCs in presence of 5 mM Cd²⁺ ions. In addition, Figure 37B shows that highly charged cations (Al³⁺, In³⁺) generate smaller charge inversion than Ca²⁺, Zn²⁺ and Cd²⁺. Moreover, the chosen cationic metal ion may vary the amounts of charge inversion experienced. For example, the addition of Ca²⁺ ions to cross-link colloidal NCs results in a strong charge inversion, while Mg²⁺ and Ba²⁺ with similar charge and chemical properties do not show this effect at all (see, e.g., Figure 37B, inset). Without wishing to be bound by theory, these observations suggest that charge inversion of CdSe/S²⁻ NCs cannot be explained by electrostatic mechanism, but rather requires analysis of chemical interactions between NCs and metal ions. Indeed, the addition of Cd²⁺ ions to CdSe NCs results in a small but reproducible (~4 nm or ~16 meV) red shift of the excitonic peaks in UV-Vis and photoluminescence (PL) spectra (Figure 37C), consistent with a small increase in the effective NC diameter due to surface binding of Cd²⁺. Other metal ions resulted in even smaller shifts of the absorption maximum, suggesting cation exchange reactions do not occur inside the NCs (Figure 49).

[0237] The charge inversion should be facilitated by high affinity of the counter ion to NC surface and by lower solvation energy of the counter ion. Herein, there are indications that softer cations have higher affinity (Cd²⁺>Zn²⁺; In³⁺>Al³⁺) to CdSe/S²⁻ NC surface exposing soft basic sites like S^{δ-} and Se^{δ-}. Generally, cation hardness and solvation energy in polar solvents decrease down the group in the periodic table, thus the charge inversion efficiency for CdSe/S²⁻ NC is expected to follow the trend Mg²⁺<Ca²⁺<Ba²⁺. However, among these chemically-similar cations, only Ca²⁺ induced charge inversion, whereas addition of Mg²⁺ and Ba²⁺ resulted in aggregation of NCs (Figure 37B). To examine this disparity, ionic radii of metal ions were compared to the radius of Cd²⁺ ions as shown in the inset to Figure 37B. As shown, Mg²⁺ ions are too small and Ba²⁺ is too large to efficiently integrate into surface sites of CdSe lattice, while the ionic radius of Ca²⁺ is only about 5% larger than that of Cd²⁺, offering an excellent match to the CdSe lattice. This observation suggests that, in addition to chemical affinity, steric factors play an important role in the interaction of metal ions with surface of all-inorganic NCs. For a colloidal solution of crystalline particles, similar size of the counter ion (ionic radius of Mg²⁺<Cd²⁺~Ca²⁺<Ba²⁺) compared to the parent cation (Cd²⁺ in CdSe/S²⁻) can significantly facilitate charge inversion.

[0238] **The correlation of charge inversion and PL efficiency.** Through these examples, a correlation between ζ-potential and PL efficiency was revealed, as shown in Figure 37D. The metal ions providing large charge inversion also resulted in a large increase of PL efficiency. For example, a 25-fold increase of PL efficiency from 0.7% for CdSe/S²⁻ to 17.3% was observed upon addition of 5 mM Cd²⁺ ions. The PL efficiency is a very sensitive probe of the NC surface. Without wishing to be bound by theory, it is believed this correlation between surface charge and PL efficiency results, at least in part, from reduced

concentration of surface trap states. The increase of PL efficiency may also be explained by binding metal ions to the surface of CdSe/S²⁻ NCs. At the same time, the correlation and effects on PL efficiency are counterintuitive and do not align with current understanding of surface passivation for traditional CdSe NCs. First, it was found that Cd²⁺ and Ca²⁺ ions provided higher PL efficiency than Zn²⁺, despite the fact that ZnS is known as an excellent material to passivate the surface of CdSe NCs confining both electron and hole in the core. Furthermore, the same trend was observed when metal ions were added to CdSe/ZnS/S²⁻ NCs. The addition of Cd²⁺ and Ca²⁺ ions, for example, reproducibly yielded higher PL efficiency than the addition of Zn²⁺ (Figures 38A and Figure 50). This trend was observed for several batches of CdSe/ZnS core-shells synthesized in-house or obtained from different commercial sources. The addition of Cd²⁺ or Ca²⁺ increased PL efficiency to nearly 60%, which was close to the efficiency of original, organically capped NCs. The possible explanation is that Zn²⁺ ions are strongly solvated by FA molecules and therefore show weaker affinity to the surface of CdSe or CdSe/ZnS NCs.

[0239] Time-resolved PL decay studies for CdSe/ZnS NCs before and after treatment with Cd²⁺ ions suggest that observed PL increase resulted from the suppression of a non-radiative recombination channel introduced by S²⁻ ligands (Figure 37B). In presence of 5 mM Cd²⁺ ions, the PL decay of CdSe/ZnS NCs closely matched that of the original organics-capped NCs (Figure 37B).

[0240] These results also point to the potential of calcium salts as shell material for luminescent colloidal NCs. It should be noted that Ca²⁺ typically forms solids with octahedrally coordinated Ca²⁺ sites, instead of tetrahedrally coordinated Cd²⁺ sites in CdSe lattice. Therefore, Ca²⁺ can be used as a shell material for lead chalcogenide NCs. In addition to chemical passivation of surface dangling bonds, positively charged ions adsorbed at the NC surface can generate an electric field pushing holes away from the NC surface.

[0241] Cation cross-links (i.e., bridges) determine electron mobility in all-inorganic nanocrystal arrays. Thus, the foregoing provides further examples that metal ions, such as Cd²⁺, can bind directly to the surface of CdSe/S²⁻ NCs resulting in a charge inversion in dilute (~0.1-0.3 mg/mL) colloidal solutions. However, when the concentrations of CdSe/S²⁻ NCs and Cd²⁺ were increased to 10 mg/mL and 50 mM, respectively, immediate precipitation of CdSe NCs (Figure 51) was observed. At the same time, the addition of 0.15 M NaNO₃ with ionic strength identical to the ionic strength of 0.05 M Cd(NO₃)₂ did not cause precipitation of CdSe/S²⁻ NCs (Figure 51), ruling out the increase of ionic strength as the cause of colloidal instability. Without wishing to be bound by theory, it was concluded that precipitation of NCs was a result of linking CdSe/S²⁻ NCs with Cd²⁺ ions as schematically shown in Figure 39B. The elemental analysis of precipitated CdSe/S²⁻/Cd²⁺ NCs revealed no original K⁺ counter ions, suggesting that Cd²⁺ completely displaced K⁺ ions during

aggregation of NCs. This treatment was then applied to the close-packed films of CdSe/S²⁻ NCs, originally charge-balanced with K⁺ ions. The absorption spectra of CdSe/S²⁻ NC films red-shifted by ~10 nm (38 meV) and broadened after dipping into a 50 mM solution of Cd(NO₃)₂ in methanol, suggesting enhanced electronic coupling between the NCs (Figure 39A). To gain a better insight to the electronic coupling strength, charge carrier mobility was measured in the arrays of CdSe/S²⁻ NCs bridged with different cations. For these studies bottom-gated thin-film FETs were fabricated, with top source and drain electrodes (Figure 39C). The films (~20 nm thick) of K₂S capped CdSe NCs were deposited by spin coating on highly doped Si wafers with 100 nm thick SiO₂ thermal gate oxide. The NC films were treated with different cations, by dipping into 50 mM solutions of corresponding metal nitrates in methanol, followed by rinsing the films with neat solvent. The films were then annealed at 200 °C followed by patterning source and drain Al electrodes by a shadow mask (channel length 150 μm, width 1500 μm). This annealing step allowed evaporation of residual solvent molecules coordinated to NC surface and further increased electronic coupling between CdSe NCs, evidenced by additional broadening of the excitonic peaks (Figure 39A). At the same time, this annealing temperature was insufficient to sinter CdSe NCs, as seen by the blue shift of the absorption onset with respect to the bulk CdSe band gap (1.74 eV or 713 nm) and by powder X-ray diffraction pattern typical for 4.2 nm CdSe NCs (Figure 52).

[0242] The FET devices assembled from CdSe/S²⁻ NCs showed n-type transport. Figures 40A and 40B show the output characteristics (i.e., drain current I_{DS} as a function of source-drain voltage V_{DS} at different gate voltages V_G) for FETs made of pristine films of CdSe/S²⁻ NCs with K⁺ counter ions and the same films cross-linked with Cd²⁺ ions. The cross-linking of NCs with Cd²⁺ resulted in ~100-fold increase in I_{DS} values for comparable V_G values. Large difference in the channel currents can be seen in the transfer curves (I_{DS} vs. V_G at fixed V_{DS}) for both devices (Figure 40C). When positive bias is applied to the gate terminal ($V_G > 0$), electrons are injected into the FET channel and provide additional doping to the NC film resulting in a dramatic increase of the channel current. The ratio of drain currents at $V_G = 30V$ and $V_G = -10V$ was $I_{ON}/I_{OFF} \sim 10^4$ and $\sim 10^7$, for the pristine and Cd²⁺ treated CdSe/S²⁻ NC films, respectively (Figure 53). The slope of the I_{DS} vs. V_G curves at $V_{DS} = 3V$ was used to calculate the electron mobility corresponding to the linear regime of FET operation (μ_{lin}). It revealed a large increase in the electron mobility, from $\mu_{lin} = 0.01$ for NC films with K⁺ counter ions to $1.3 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ for those bridged with Cd²⁺. Reproducible changes in electron mobility were observed for the films treated with other cations like Mn²⁺, Zn²⁺ and In³⁺, establishing a generic trend for NCs linked with different cations (Figure 40G and Figure 54). The large increase of carrier mobility after Cd²⁺ or Zn²⁺ treatment was caused by the linking adjacent NCs, which also explain the broadening and red-shift in UV-visible absorption spectra

(Figure 39A). The extent of enhancement of electron mobility with different metal ions may depend on both the chemical affinity of the metal to NC surface, and the electronic structure of the NC/S²⁻-Mⁿ⁺-S²⁻/NC interface. Experiments above showed that CdSe/ZnS and CdSe/CdS core/shell NCs showed lower electron mobility compared to CdSe NCs; particularly, CdSe/ZnS NCs exhibited rather poor electron mobility ($\sim 10^{-5}$ cm²V⁻¹s⁻¹) because of additional electron tunneling barriers imposed by the shell material. In a similar manner, it is expected that μ_{lin} in metal-bridged all-inorganic NC solids should correlate with the alignment of the NC 1S_e state and the LUMO of the S-Mⁿ⁺-S bridge. Indeed, the comparison of the conduction band energies (E_{CB}) for corresponding metal sulfides $E_{\text{CB}}(\text{K}_2\text{S}) > E_{\text{CB}}(\text{MnS}) > E_{\text{CB}}(\text{ZnS}) > E_{\text{CB}}(\text{In}_2\text{S}_3) > E_{\text{CB}}(\text{CdS})$ correlates well with the observed mobility trend in Figure 40G.

[0243] The effect of cationic metal ion cross-linking was also observed for III-V InAs NCs (Figures 40D-F, 40H and Figure 55), again showing a clear enhancement of the electron mobility after bridging InAs/S²⁻ NCs with metal ions. The cation linking phenomenon was also found effective for CdSe NCs capped with Li₂S and K₂Se (Figure 56). The use of metal cross-links in combination with rapid thermal annealing allowed for the achievement of rather high electron mobilities in NC solids, up to $\mu_{\text{lin}} = 7$ cm²V⁻¹s⁻¹ (Figure 57). Such high FET mobility was achieved using NCs processed from an environmentally benign FA solvent.

[0244] Carrier mobility reflects the connectivity between neighboring NCs whereas the FET turn-on gate voltage (V_{th}) reflects the initial concentration of charge carriers in the channel (i.e., the doping level). Generally, lower V_{th} implies higher doping of the NC solid. The effect of different cations on V_{th} was compared and it was observed that CdSe/S²⁻ NCs bridged with In³⁺ ions showed a lower V_{th} than those bridged with Cd²⁺ ions (inset to Figure 40C). In turn, the NCs with K⁺ counter ions showed even higher V_{th} values. Without wishing to be bound by theory, this trend can be explained by drawing a comparison between inter-NC bridges (Figure 39B) and substitutional dopands in conventional semiconductors. Indeed, when a monovalent cation (e.g., K⁺) occupies divalent (Cd²⁺) lattice site, it typically creates an acceptor level and behaves as a p-type dopant. On the other hand, In³⁺ integrated in CdSe lattice behaves as the n-type dopant. A similar trend in V_{th} was observed for InAs NCs bridged with K⁺, Cd²⁺ and In³⁺ ions. Without wishing to be bound by theory, it can be concluded that metal ions bridging all-inorganic NCs strongly interact with NCs and can control not only the carrier mobility but the concentration of charge carriers in the NC solids.

[0245] Surface metal ions determining the type of majority carriers in all-inorganic nanocrystal solids. The ability of colloidal NC cationic metal ion cross-links to control doping in NC solids was examined by studying charge transport in CdTe NC arrays. CdTe is a rather unusual II-VI semiconductor that can support both p-type and n-type transport,

depending on the native defects and impurity doping. K_2Te capped colloidal CdTe NCs were prepared following standard organic-to-inorganic ligand exchange. The films of as-synthesized CdTe/ Te^{2-}/K^+ NCs formed a p-type transistor channel (Figures 41A and 41E, and 58). Depending on the FET geometry and electrode material, measured hole mobility was in the range 10^{-6} - 10^{-4} cm^2/Vs . P-type mobility was also dominant when the films of K_2Te capped CdTe NCs were treated with Cd^{2+} ions (Figure 59). When CdTe/ Te^{2-} NCs was treated with In^{3+} ions, obtained NC solids exhibited ambipolar transport (Figure 41B, 41C, 41F, and 41G), with significantly enhanced n-type transport compared to the NC films treated with Cd^{2+} . To further enhance n-type transport in the CdTe NC solids, the concentration of In^{3+} ions at the NC surface was increased by using $In_2Se_4^{2-}$ metal chalcogenide complexes instead of electron-accepting Te^{2-} ligands. CdTe/ $In_2Se_4^{2-}$ NC solids showed strong n-type conductivity with electron mobility approaching 0.1 cm^2/Vs (Figure 41C and Figure 60).

[0246] Magnetic Properties of CdSe and InAs NCs linked with Mn^{2+} ions. In addition to tuning the electronic properties of colloidal NC solids, cationic cross-links can be used to introduce new functionalities to all-inorganic NC solids. As an example, Mn^{2+} ions can be used to introduce magnetic functionality to non-magnetic CdSe/ S^{2-} NCs.

[0247] For example, a colloidal solution of K_2S capped CdSe NCs in FA was precipitated by adding Mn^{2+} ions. The elemental analysis showed a complete displacement of K^+ with Mn^{2+} , leading to Mn-to-Cd ratio of 1:6.7 corresponding to about 13 molar % Mn^{2+} with respect to Cd^{2+} . This value sets an upper limit, corresponding to about 0.3 monolayers coverage of 4.2 nm CdSe NC surface with Mn^{2+} ions. Lower doping level (e.g., 0.5% Mn) can be easily achieved by using mixtures of Mn^{2+} and Cd^{2+} ions (1:5.7 molar ratio) for NC linkage. In all cases, the XRD patterns of CdSe NCs remained identical before and after the Mn^{2+} treatment suggesting binding Mn^{2+} to the NC surface without forming any impurity phases (Figure 61).

[0248] Bulk CdSe is diamagnetic with temperature-independent magnetic susceptibility $\chi_m \sim -3.3 \cdot 10^{-7}$ cm^3/g . A diamagnetic response of 4.2 nm CdSe NCs capped with K_2S ($\chi_m \sim -7 \cdot 10^{-7}$ cm^3/g) was observed. Figure 42 shows magnetization (M) vs. magnetic field strength (H) plots for CdSe/ S^{2-} NCs before and after exchange of K^+ ions for Mn^{2+} . Mn^{2+} ions imparted positive magnetic susceptibility combined with a hysteretic magnetization with a small coercivity ~ 40 Oe at 5 K, which vanished at 300 K (Figure 42, top left inset). At room temperature, CdSe NC solids bridged with Mn^{2+} ions showed field-independent paramagnetic response with $\chi_m \sim 5.9 \cdot 10^{-6}$ cm^3/g . Similar behavior was observed for 4.5 nm InAs/ S^{2-} NCs linked with Mn^{2+} ions. In the case of InAs/ S^{2-}/Mn^{2+} NCs, high-temperature paramagnetic behavior can be described by the Curie-Weiss law $1/\chi = (T - \theta)/C$ where C is the Curie constant, T is temperature, and θ is the Curie temperature (Figure 62A). The

negative θ value -22 K is indicative of the antiferromagnetic (AFM) exchange interaction between Mn^{2+} ions. Similar AFM coupling was observed for Mn^{2+} doped into the lattice of various semiconductors both in bulk and NCs. The magnetic susceptibility of $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NCs showed more complex behavior, with a significant contribution from temperature-independent paramagnetism (Figures 62B, 62C).

[0249] The bottom right inset in Figure 42 shows zero-field-cooled (ZFC) and field-cooled (FC, 100 Oe) magnetization data for $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NCs, revealing a magnetic transition with the blocking temperature about 34 K, that can be similar to the formation of a ferrimagnetic phase in CdSe NCs doped with Mn^{2+} ions. These magnetic studies show that bridging all-inorganic semiconductor NCs with paramagnetic Mn^{2+} ions can lead to behaviors typical for dilute magnetic semiconductor NCs. When combined with the electronic properties provided by inorganic ligands, further applications are possible for capped NCs, such as spintronic applications. For example, charging of NCs by applying gate voltage, could induce ferromagnetic ordering of the magnetic moments of Mn^{2+} d-electrons. One may also expect fundamental differences between CdSe NCs substitutionally doped with Mn^{2+} and those bridged with Mn^{2+} ions. This comes from different local environment for Mn^{2+} ions, possible differences in the oxidation state and the interaction of metal bridges with the NC core. The local environment is of great importance for colloidal NC cationic metal ion cross-linkages. Applied electron paramagnetic resonance (EPR), X-ray Absorption Near Edge Structure (XANES), and Extended X-Ray Absorption Fine Structure (EXAFS) techniques were used to better understand the bonding and local structure Mn^{2+} ions between all-inorganic NCs.

[0250] Probing the local environment of Mn^{2+} ions linking CdSe NCs by EPR, XANES and EXAFS spectroscopy. Mn^{2+} has five unpaired electrons and its local environment can be probed by EPR spectroscopy. Figure 43 shows EPR spectrum measured at 4.6 K for CdSe/S^{2-} NCs cross-linked with Mn^{2+} ions. This spectrum can be deconvoluted into two overlapping components: (i) a broad signal arising from the exchange coupled Mn^{2+} ions, and (ii) a characteristic sextet arising from the hyperfine interaction of the electron spin with Mn nucleus ($I = 5/2$) in isolated Mn^{2+} ions. Measured Landé g-factor 2.002 is closer to that for $\text{Mn}^{2+}:\text{CdS}$ than to the g-factor for $\text{Mn}^{2+}:\text{CdSe}$ (2.004), which suggests that the local coordination of Mn^{2+} ions can be sulfur-rich, in accord with the bonding shown in Figure 37A. At the same time, the hyperfine coupling constant $A_{\text{iso}} = 86 \cdot 10^{-4} \text{ cm}^{-1}$ (9.2 mT), is significantly larger than that for tetrahedrally coordinated Mn^{2+} in bulk CdS and CdSe lattices ($65 \cdot 10^{-4} \text{ cm}^{-1}$ and $62 \cdot 10^{-4} \text{ cm}^{-1}$, respectively), The large value of hyperfine splitting is characteristic of Mn^{2+} ions residing at the NC surface. For example, $A_{\text{iso}} = 85 \times 10^{-4} \text{ cm}^{-1}$ was reported for Mn^{2+} ions localized at the surface of CdSe NCs, but for Mn^{2+} doped into a II-VI semiconductor NC lattice, $A_{\text{iso}} < 70 \cdot 10^{-4} \text{ cm}^{-1}$.

[0251] 4.5 nm InAs NCs capped with S^{2-} ligands and bridged with Mn^{2+} ions revealed similar g-factor and A_{iso} (Figure 63), suggesting that both in $CdSe/S^{2-}/Mn^{2+}$ and $InAs/S^{2-}/Mn^{2+}$ NCs, the manganese ions are bound to the surface through the same ligand, and are not part of the crystal structure of the substrate. At the same time, upon illuminating the samples of $CdSe/S^{2-}/Mn^{2+}$ and $InAs/S^{2-}/Mn^{2+}$ NCs with a 300 W Xe-lamp through an IR-blocking filter and a long-pass filter with cutoff at 400 nm, the EPR intensity decreased by ~7%. The variation of the EPR intensity was fully reversible with the light on/off cycles shown in the inset to Figure 43. The use of illumination above 400 nm ($h\nu < 3.1$ eV) ruled out the direct excitation of MnS clusters at the NC surface because $E_g(MnS) \sim 3.7$ eV. The intensity of the EPR signal remained independent of illumination when a long-pass filter with a cutoff at 700 nm was used, which was smaller than the band gap of CdSe NCs (Figure 64). The control experiments also ruled out the variation in sample temperature caused by illumination. The effective concentration of Mn^{2+} decreases under light, and recovered completely upon shutting light off suggesting an efficient coupling between Mn^{2+} ions in $CdSe/S^{2-}/Mn^{2+}$ NCs and light-absorbing CdSe NCs. Such coupling could occur either via energy transfer exciting Mn^{2+} from 6A_1 to 4T_1 state or via the charge transfer to Mn^{2+} ions reducing its total spin. The decrease in EPR intensity may also arise from the antiferromagnetic p-d coupling of the valence-band-hole with Mn^{2+} , which dominates over the ferromagnetic s-s interaction of conduction-band-electron with Mn^{2+} , particularly for Mn^{2+} ion residing near the NC surface. Further studies will be necessary to clarify the spin dynamics in all-inorganic NCs.

[0252] The XANES spectroscopy provided additional information about the oxidation of surface Mn and S atoms at the surface of all-inorganic NCs while the EXAFS spectroscopy was employed to probe the local environment around Mn ions on the surface of $CdSe/S^{2-}$ NCs. The degree of edge shift, obtained via comparison of Mn K-edge XANES for the Mn^{2+} treated NC sample ($CdSe/S^{2-}/Mn^{2+}$) with different Mn standards (Figure 44A) is indicative of a +2 oxidation state, similar to that in bulk MnS. At the same time, differences in the shape of the XANES spectra for $CdSe/S^{2-}/Mn^{2+}$ NCs and MnS indicate the local structure around Mn^{2+} in the NC sample is unique. Particularly, in the NC sample, the Mn K-edge XANES revealed a strong pre-edge absorption peak (highlighted with the arrow in Figure 44A and Figure 65) that corresponds to the dipole-forbidden $1s \rightarrow 3d$ transition. The intensity of this transition allows probing the local environment for Mn^{2+} . Thus, the pre-edge peak is absent or very weak for centrosymmetric metal sites with O_h symmetry typical for MnS and MnO phases with rock salt structure. The observation of a strong $1s \rightarrow 3d$ transition suggests non-centrosymmetric, e.g., tetrahedral (T_d) coordination of Mn^{2+} ions. The relative intensities of the pre-edge ($1s \rightarrow 3d$) and edge ($1s \rightarrow 4p$) transition in $CdSe/S^{2-}/Mn^{2+}$ NCs were similar to those reported for isoelectronic Fe^{3+} sites with T_d symmetry in Fe-doped Na_2SiO_3 glass and for tetrahedral Mn^{2+} doped into ZnO wurtzite lattice.

[0253] Further information on the coordination environment for Mn^{2+} sites in $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NCs can be obtained from the analysis of EXAFS spectra. Figure 44B shows the magnitude of the Fourier transform (FT) of Mn K-edge EXAFS data for $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NC sample and the corresponding fit using Mn-S path generated from MnS with zinc blende structure using FEFF6. The fitting procedure together with the real part of the FT data are shown in Figure 66 and Table 2. This analysis suggests that Mn atoms are bonded to S atoms with average Mn-S coordination number (CN) = 3.1, and bond length = 2.37 Å. The obtained CN is slightly smaller than the typical tetrahedral (CN = 4, wurtzite and zinc blend) and octahedral (CN = 6, rock salt) coordination. At the same time, obtained bond length is close to the theoretical bond length of Mn-S path in the MnS with wurtzite and zinc blende phases (~2.41 Å) while significantly shorter than the bond length 2.62 Å for Mn-S path in MnS with rock salt structure. This reduced Mn-S CN and bond length for $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NC sample suggest Mn^{2+} binding exclusively to the NCs surface, which was also demonstrated independently by XRD and EPR studies. The combination of intense pre-edge peak observed in XANES spectra with the bond length and CN obtained from EXAFS fits rule out the possibility of the formation of MnS phase and support T_d symmetry of Mn^{2+} sites at the NC surface.

Table 2

List of the fit parameters for Mn K-edge fit of Mn^{2+} treated K_2S capped CdSe ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) NCs.

Data range: k is from 2.6 – 8 Å⁻¹ and the fit range: r is from 1.0 - 3.0 Å. $S_0^2 = 1$

Path	Coordination number	Bond length (Å)	σ^2 (Å ²)	ΔE (eV)
Mn-S	3.1 ± 0.5	2.37 ± 0.02	0.01 ± 0.003	-6.0 ± 1.6

(σ^2 =mean square displacement of the distance between the atoms, ΔE = energy shift).

R-factor for the fit is 0.02.

[0254] The S-edge XANES data of K_2S capped CdSe NCs before ($\text{CdSe/S}^{2-}/\text{K}^+$) and after ($\text{CdSe/S}^{2-}/\text{Mn}^{2+}$) Mn^{2+} treatment along with several sulfur standards are shown in Figures 44C and Figure 67. The difference of XANES spectra between K_2S and $\text{CdSe/S}^{2-}/\text{K}^+$ NCs agrees with the preconceived notion that S^{2-} binds covalently to the Cd^{2+} sites at the surface of CdSe NCs. More importantly, the XANES data for $\text{CdSe/S}^{2-}/\text{Mn}^{2+}$ NC samples can be reasonably well fitted as a superposition of S-edge XANES spectra for $\text{CdSe/S}^{2-}/\text{K}^+$ NCs and

MnS. A linear combination fit shows that the XANES spectrum for CdSe/S²⁻/Mn²⁺ NCs can be modeled as 55% contribution from CdSe/S²⁻/K⁺ NC and 45% from MnS; once again suggesting the formation of Cd-S-Mn bonds on the NC surface (Figure 68 and Table 3).

Table 3

S-edge XANES Linear Combination Fit Result:

Sample	S-std	Percentage	R-factor
<u>CdSe-Mn-S</u>	CdSe-S	0.55	.003
	MnS	0.45	
<u>CdSe-S-K₂S</u>	CdS	0.85	.006
	K ₂ S	0.15	

[0255] Combined together, EPR, XANES and EXAFS studies suggest that Mn²⁺ ions bind to the surface of CdSe/S²⁻ NCs without changes of their oxidation state. The Mn²⁺ primarily bind to the electron-rich S²⁻ ligands at the NC surface with tetrahedral-like coordination environment, average coordination number 3.1 and Mn-S bond length 2.37 Å. At the same time, S²⁻ ligands bind simultaneously to Cd²⁺ and Mn²⁺ ions, behaving as bridges for electronic coupling for paramagnetic Mn²⁺ ions to CdSe NCs.

[0256] Pt²⁺ bridges can be used to enhance the electrocatalytic properties of all-inorganic nanocrystal solids. Engineered nanomaterials formed of colloid particles represent an important class of prospective photo- and electrocatalysts that combine tunable electronic structure with high surface-to-volume ratio. To optimize the catalytic efficiency, the NC surface can be modified with oxidation or reduction catalysts, including, but not limited to, noble metal nanoparticles, MoS₃ or even enzymes. The present techniques show that transition metal ions bound to the surface of all-inorganic NCs can be used to mediate redox processes at the NC surface. To demonstrate this effect, the electrochemical properties of CdSe/S²⁻ nanocrystals was compared with different counter ions, K⁺ and Pt²⁺, in a model electrochemical reaction of proton reduction and hydrogen evolution in acetonitrile and aqueous media (Figure 45A). The first set of electrochemical measurements was performed in anhydrous acetonitrile inside air-free glovebox. Protonated DMF treflate [H(DMF)]OTf, behaving as a weak acid with pK_a=6.1 in acetonitrile, was used as a proton source and tetrabutylammonium perchlorate (TBAP) was used as an electrolyte. The CdSe/S²⁻/K⁺ NC films were deposited on either ITO-covered glass or on glassy carbon (GC) electrodes from formamide solutions. As-deposited films showed the first absorption peak near 590 nm. Treatment of CdSe/S²⁻/K⁺ NC films with 0.1 M formamide solution of [PtCl₄]²⁻ for 30 minutes resulted in a 5 nm red shift of first absorption peak (Figure 69) indicating binding of Pt²⁺ to

NC surface, which probably enhanced the electronic coupling between NCs analogous to the data shown in Figure 39A. In control experiments, it was confirmed that neither the shape of the absorption spectrum nor the position of the first excitonic peak changed after five cycles of the electrode potential between -1.7 V and 0 V vs. Ag^+/Ag reference electrode at 100mV/s ($E_{\text{Ag}^+/\text{Ag}} = -0.125\text{V}$ relative to $\text{Cp}_2\text{Fe}^+/\text{Cp}_2\text{Fe}$ couple), indicating that CdSe NCs stayed intact in the course of electrochemical studies (Figure 69).

[0257] Cyclic voltammetry of $\text{CdSe}/\text{S}^{2-}/\text{K}^+$ and $\text{CdSe}/\text{S}^{2-}/\text{Pt}^{2+}$ NC films on a GC electrode in presence of 0.01 M $[\text{H}(\text{DMF})]\text{OTf}$ showed diffusion limited proton reduction. The wave for reduction of protons on GC electrode was observed with a half-wave potential of -0.778 V vs Ag^+/Ag reference electrode (Figure 70). It corresponds to the overpotential of ~403 mV. Depositing $\text{CdSe}/\text{S}^{2-}/\text{K}^+$ NC film on a GC surface increased the overpotential to ~410 mV (Figure 45B, black curve). The exchange of K^+ ions with Pt^{2+} resulted in significantly lower overpotential of ~273 mV (Figure 45B, blue curve), in agreement with increased catalytic activity of the NC surface. To study electrocatalytic performance of all-inorganic NCs in aqueous medium, similar measurements were carried out in aqueous solutions buffered at pH 6.5 with a phosphate buffer. At this pH, the Nernst equation gives $E(\text{H}_2/2\text{H}^+) = -0.38\text{ V}$ relative to the SHE or -0.58 V relative to the saturated $\text{Ag}/\text{AgCl}/\text{Cl}^-$ reference electrode used in this work. However, no hydrogen reduction was observed up to -1.4 V on glassy carbon (GC) because of low exchange currents for this reaction leading for high overpotentials. The deposition of 4.2 nm $\text{CdSe}/\text{S}^{2-}/\text{K}^+$ NC film on a GC electrode resulted in a minor improvement of catalytic activity (Figure 45C, black curve). After replacing the K^+ ions with Pt^{2+} by exposing the NC film to 0.1 M FA solution of $\text{K}_2[\text{PtCl}_4]$ for 30 minutes followed by careful rinse with acetonitrile, a strong enhancement of the faradaic current was observed, with the current onset shifted to -0.736 V vs $\text{Ag}/\text{AgCl}/\text{Cl}^-$ (or ~-0.539 V vs SHE) as shown in Figure 45C. The Tafel analysis revealed ~50-fold enhancement of the exchange current, from ~6 nA/cm² to 0.3 $\mu\text{A}/\text{cm}^2$ when K^+ ions were replaced with Pt^{2+} . In the control experiments, polished GC electrode or a film of TOPO-capped CdSe NCs was exposed to 0.1M FA solution of $\text{K}_2[\text{PtCl}_4]$ and measured the effect of such treatment on electrochemical properties. In both cases, only minor changes in cathodic current were observed before and after treatment with $\text{K}_2[\text{PtCl}_4]$ (Figure 71). These results can be explained by inefficient adsorption of Pt^{2+} on GC and TOPO-capped surface of CdSe NCs. In contrast, the exchange of K^+ ions with Pt^{2+} in $\text{CdSe}/\text{S}^{2-}/\text{K}^+$ NC solids occurred very efficiently at room temperature because of accessibility of NC surface and the presence of negatively charged S^{2-} groups exhibiting high chemical affinity to Pt(II) species. This also demonstrates that charge carriers in all-inorganic semiconductor NCs can efficiently interact with redox catalysts at the NC surface.

[0258] Thus as shown, cationic metal ions can interact with the surface of colloidal particles, such as all-inorganic semiconductor NCs, and allow engineering the NC properties both in solution and in the NC solids. For example, Cd^{2+} , Ca^{2+} , Zn^{2+} can efficiently bind to S^{2-} capped CdSe or CdSe/ZnS core shell NCs in dilute solution inverting the surface charge from negative to positive, and significantly increasing the luminescence efficiency. The cationic metal ions can bridge neighboring NCs and control the magnetic and electrochemical properties of all-inorganic NCs. In an array of K_2S capped CdSe NCs the treatment with suitable metal ions allows replacing weakly bound K^+ ions and linking adjacent NCs. The formation of cross-linked NC structures enhances charge carrier mobility by two orders of magnitude, leading to the electron mobility $1.3 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$ achieved via a benign hydrazine-free device processing. The cationic metal ion cross-links also allow tailoring the doping in the NC solids, for example, switching CdTe NC FETs from p-type to ambipolar to n-type. EPR and EXAFS spectroscopy carried out for CdSe NCs with S^{2-} ligands bridged by Mn^{2+} ions confirmed that Mn^{2+} bonded to the S^{2-} capped CdSe NC via S-Mn-S bonds with bond length 2.37 \AA and average coordination number 3.1. NCs with Mn^{2+} on surface exhibit superparamagnetic behavior. Magnetization studies showed that bridging with Mn^{2+} ions can switch the magnetic properties of NC solids from diamagnetic to paramagnetic at room temperature and to a magnetically ordered phase at low temperature. Finally, it was demonstrated that the bridging CdSe NCs with Pt^{2+} ions allows improving the electrocatalytic properties of all-inorganic NCs in the hydrogen evolution reaction, both in aqueous and acetonitrile media. These examples show the generality and versatility of the approach described herein for tailoring physical and chemical properties for a broad class of NC-based materials.

[0259] While the present invention has been described with reference to specific examples, which are intended to be illustrative only and not to be limiting of the invention, it will be apparent to those of ordinary skill in the art that changes, additions and/or deletions may be made to the disclosed embodiments without departing from the spirit and scope of the invention.

WHAT IS CLAIMED:

1. An isolable colloidal particle comprising a nanoparticle and an inorganic capping agent, wherein the inorganic capping agent is bound to at least a portion of the nanoparticle surface.
2. The colloidal particle of claim 1, wherein the nanoparticle is substantially free of an organic capping agent.
3. The colloidal particle of claim 2, wherein the colloidal particle is isolable from a reaction mixture comprising a first solvent and a second solvent; wherein the second solvent is appreciably immiscible in the first solvent, wherein the colloidal particle is prepared by a reaction in the reaction mixture, and wherein the colloidal particle is dispersible in a third solvent.
4. The colloidal particle of claim 3, wherein the first solvent is selected from a group consisting of water, dimethylsulfoxide, formamide, methylformamide, ethanolamine, dimethylformamide, benzonitrile, 1,3-butanediol, butanol, dimethylacetamide, dioxane, methoxyethanol, methylpyrrolidinone, pyridine, ethyleneglycol, glycerol, methanol, ethanol, trimethylamine, dimethylamine, methylamine, ammonia, triethylamine, tetramethylethylenediamine, trimethylethylenediamine, dimethylethylenediamine, ethylenediamine, and a mixture thereof, and wherein the third solvent is selected from a group consisting of water, dimethylsulfoxide, formamide, methylformamide, ethanolamine, dimethylformamide, benzonitrile, 1,3-butanediol, butanol, dimethylacetamide, dioxane, methoxyethanol, methylpyrrolidinone, pyridine, ethyleneglycol, glycerol, methanol, ethanol, trimethylamine, dimethylamine, methylamine, ammonia, triethylamine, tetramethylethylenediamine, trimethylethylenediamine, dimethylethylenediamine, ethylenediamine, acetonitrile, and a mixture thereof.
5. The colloidal particle of claim 3, wherein the first solvent is not hydrazine.
6. The colloidal particle of claim 3, wherein the second solvent is selected from a group consisting of pentane, pentanes, cyclopentane, hexane, hexanes, cyclohexane, heptane, octane, nonane, decane, dodecane, hexadecane, benzene, 2,2,4-trimethylpentane, toluene, petroleum ether, ethyl acetate, diisopropyl ether, diethyl ether, carbon tetrachloride, carbon disulfide, and mixtures thereof.
7. The colloidal particle of claim 2, wherein the colloidal particle is substantially free of hydrazine.
8. The colloidal particle of claim 2, wherein the inorganic capping agent is a precursor to a matrix selected from a group consisting of a conducting matrix, a semiconductor matrix, an

optically transparent matrix, a piezoelectric matrix, a ferroelectric matrix, a phase change matrix, a thermoelectric matrix, and a mixture thereof.

9. The colloidal particle of claim 1, wherein the nanoparticle is selected from the group consisting of a nanocrystal, a nanorod, a nanowire, and a mixture thereof.

10. A method of making a colloidal particle comprising admixing an inorganic capping agent in a first solvent and a nanoparticle in a second solvent together to form the colloidal particle, wherein the inorganic capping agent is bound to at least a portion of the nanoparticle surface and the second solvent is appreciably immiscible in the first solvent.

11. The method of claim 10, wherein the nanoparticle has a size before admixing with an inorganic capping agent and shape before admixing with an inorganic capping agent and wherein the size and shape before admixing with the inorganic capping agent is approximately the same size and shape after admixing with an inorganic capping agent.

12. The method of claim 10, wherein the nanoparticle, prior to admixing, comprises a nanoparticle core and an organic capping agent, and wherein a sufficient quantity of the inorganic capping agent is admixed with the nanoparticle to displace the organic capping agent.

13. A method of making a colloidal material comprising depositing a first plurality of colloidal particles on a substrate, wherein a colloidal particle comprises a nanoparticle and an inorganic capping agent and wherein the inorganic capping agent is bound to a surface of the nanoparticle.

14. The method of claim 13, wherein the colloidal material is a super-lattice.

15. A colloidal material comprising a nanoparticle and an inorganic capping agent, wherein the inorganic capping agent is bound to at least a portion of the nanoparticle surface.

16. The colloidal material of claim 15, wherein the nanoparticle comprises AlN, AlP, AlAs, Ag, Au, Bi, Bi₂S₃, Bi₂Se₃, Bi₂Te₃, CdS, CdSe, CdTe, Co, Cu, Fe, FeO, Fe₂O₃, Fe₃O₄, FePt, GaN, GaP, GaAs, GaSb, GaSe, Ge, HgS, HgSe, HgTe, InN, InP, InSb, InAs, Ni, PbS, PbSe, PbTe, Pd, Pt, Ru, Rh, Si, Sn, ZnS, ZnSe, ZnTe, or a mixture thereof.

17. The colloidal material of claim 15, wherein the nanoparticle comprises CdSe/CdS, CdSe/ZnS, InP/CdSe, InP/ZnS, InP/ZnSe, InAs/CdSe, InAs/ZnSe; CdSe, CdSe/CdS; CdTe, CdSe/CdS, or a mixture thereof.

18. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises Pt²⁺, Zn²⁺, Cd²⁺, Mn²⁺, Mn³⁺, Eu²⁺, Fe²⁺, Fe³⁺, Co²⁺, Ge⁴⁺, Cu²⁺, Cu⁺, Pb²⁺, Bi³⁺, Sb³⁺, In³⁺, Ga³⁺, Au⁺, Au³⁺, Ag⁺, Sn²⁺, Sn⁴⁺, Hg²⁺, or a mixture thereof.

19. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises S^{2-} , HS^- , Se^{2-} , HSe^- , Te^{2-} , HTe^- , TeS_3^{2-} , OH^- , NH_2^- , or a mixture thereof.
20. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises a polyoxometalate.
21. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises H_nMO_y , where $n=0,1$, or 2 , $y = 2, 3$, or 4 , M is a metal, metalloid or phosphorus and H_nMO_y is negatively charged.
22. The colloidal material of claim 21, wherein M is P , As , W , V , or Mo .
23. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises VO_4^{3-} , MoO_4^{2-} , WO_4^{2-} , PO_4^{3-} , AsO_4^{3-} , HPO_3^{2-} , $H_2PO_2^-$, or a mixture thereof.
24. The colloidal material of any one of claims 15 to 17, wherein the inorganic capping agent comprises $H_3[PMo_{12}O_{40}]$; $H_3[PW_{12}O_{40}]$; $Na_3PMo_{12}O_{40}$; $Na_6H_2W_{12}O_{40}$; $H_4[SiW_{12}O_{40}]$; $(NH_4)_6[H_2W_{12}O_{40}]$; $K_6[P_2W_{18}O_{62}]$; $K_6[P_2Mo_{18}O_{62}]$; Mo_{154} ; $Rb_8K_2[\{Ru_4O_4(OH)_2; (H_2O)_4\}(\gamma-SiW_{10}O_{36})_2]$, or a mixture or derivative thereof.
25. The colloidal material of any one of claims 15 to 24, wherein the colloidal material is a super-lattice.
26. The colloidal material of any one of claims 15 to 25 made by a method comprising admixing an inorganic capping agent in a first solvent and a nanoparticle in a second solvent together to form the colloidal material, wherein the second solvent is appreciably immiscible in the first solvent.
27. A method of making the colloidal material of any one of claims 15 to 25, comprising
(a) admixing the nanoparticle in a first solvent and the inorganic capping agent in a second solvent in the presence of a quaternary ammonium salt to form the colloidal material; and
(b) isolating the colloidal material from the admixture,
wherein the first solvent is nonpolar and the second solvent is polar.
28. The method of claim 27, further comprising adding a cadmium salt to the admixture prior to isolating the colloidal material.
29. The method of claim 27 or 28, further comprising admixing the colloidal material with the inorganic capping agent and the quaternary ammonium salt.
30. The method of any one of claims 27 to 29, wherein the quaternary ammonium salt comprises didodecyldimethylammonium bromide.

31. The method of any one of claims 27 to 30, wherein the nanoparticle is transferred from the nonpolar solvent to the polar solvent or from the polar solvent to the nonpolar solvent during the admixing step.
32. The method of claim 31, further comprising admixing an alkyl amine with the nanoparticle and the inorganic capping agent.
33. The method of claim 32, wherein the alkyl amine comprises oleylamine.
34. The method of claim 27, wherein the colloidal material forms in the first solvent.
35. The method of claim 27, wherein the colloidal material forms in the second solvent.
36. The method of any one of claims 27 to 35, wherein the admixing is performed at a temperature of about 15°C to about 30°C.
37. A matrix comprising a plurality of colloidal particles, each comprising a nanoparticle and an inorganic capping agent, wherein the inorganic capping agent is bound to at least a portion of the nanoparticle surface, and wherein pairs of colloidal particles are bridged by a cationic ion cross-linkages bound to the respective colloidal particles of the pair.
38. The matrix of claim 37, wherein the cationic ion of the cross-linkages is a transition metal ion.
39. The matrix of claim 37, wherein the cationic ion of the cross-linkages is a cationic metal ion.
40. The matrix of claim 37, wherein the cationic ion of the cross-linkages is a main group ion.
41. The matrix of claim 37, wherein the cationic ion of the cross-linkages is one of Pt²⁺, Zn²⁺, Cd²⁺, Mn²⁺, Mn³⁺, Eu²⁺, Fe²⁺, Fe³⁺, Co²⁺, Ge⁴⁺, Cu²⁺, Cu⁺, Pb²⁺, Bi³⁺, Sb³⁺, In³⁺, Ga³⁺, Au⁺, Au³⁺, Ag⁺, Sn²⁺, Sn⁴⁺, or Hg²⁺.
42. The matrix of claim 37, wherein the cationic ion of the cross-linkages is selected to increase an electronic property of the matrix.
43. The matrix of claim 42, wherein the electronic property is carrier mobility.
44. The matrix of claim 42, wherein the electronic property is threshold voltage.
45. The matrix of claim 37, wherein the cationic ion of the cross-linkages is selected to increase a magnetic property of the matrix.
46. The matrix of claim 37, wherein the cationic ion of the cross-linkages is selected to increase a photophysical property of the matrix.
47. The matrix of claim 37, wherein the colloidal particles are nanocrystals.

48. The matrix of claim 47, wherein the nanocrystals are III-V nanocrystals.
49. A field effect transistor comprising:
a source region and a drain region and the matrix of claim 34 extending between, and electrically coupled to, the source region and the drain region to provide current flow between the source region and the drain region, in response to activation of the field effect transistor by a gate coupled to the matrix and having a threshold gate voltage.
50. The field effect transistor of claim 49, wherein the cationic ion of the cross-linkages is chosen to reduce the threshold gate voltage.
51. The field effect transistor of claim 49, wherein the cationic ion of the cross-linkages is chosen to increase carrier mobility in the matrix.

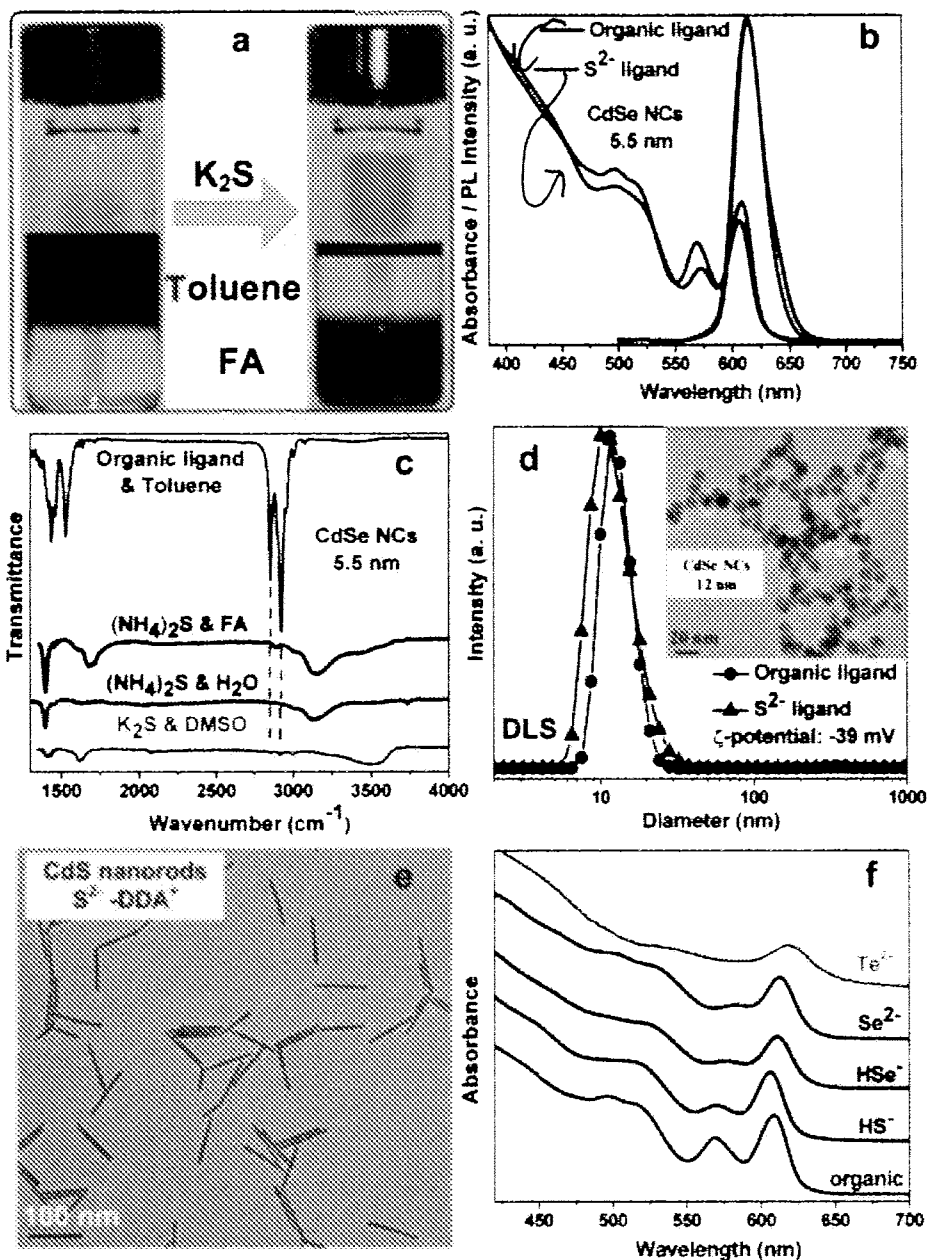


FIGURE 1

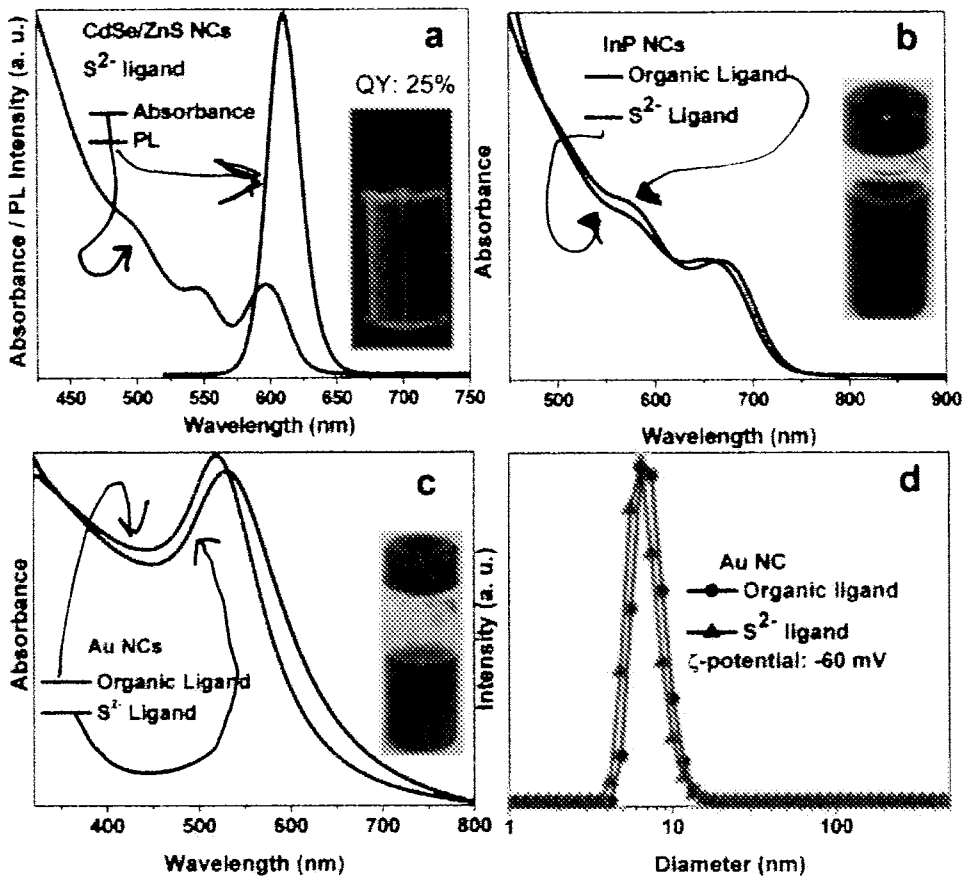


FIGURE 2

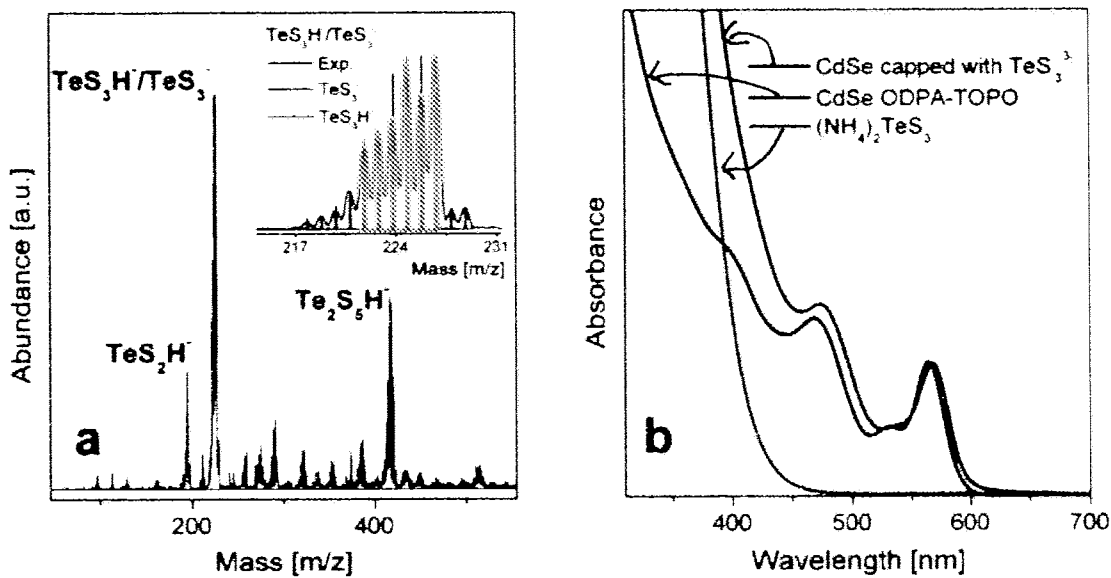


FIGURE 3

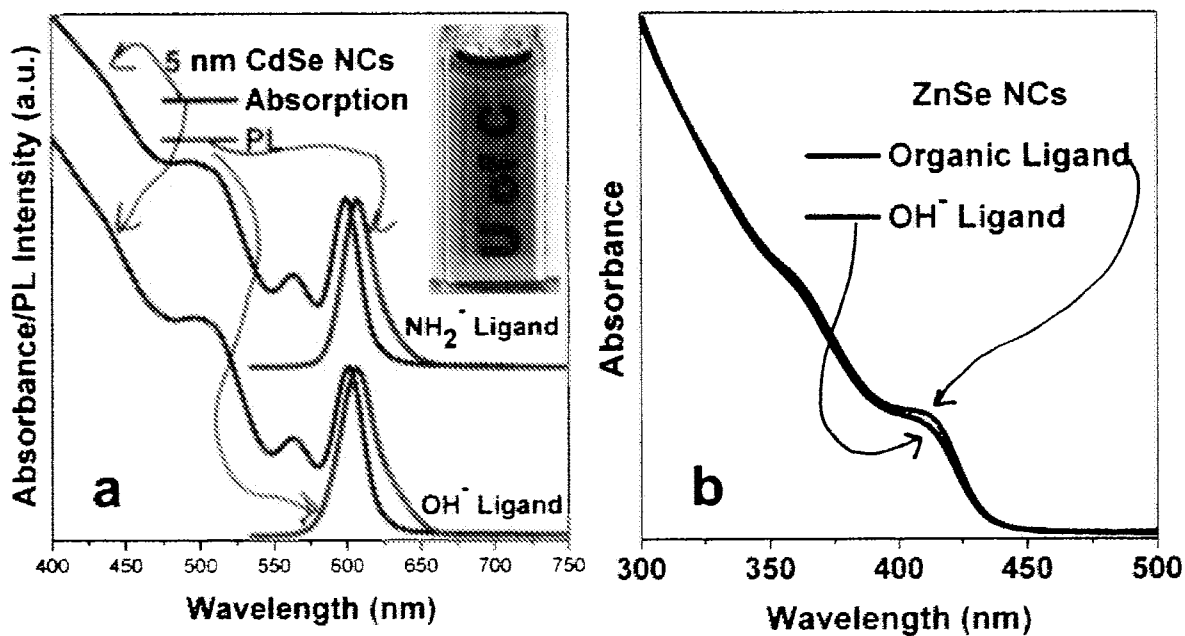


FIGURE 4

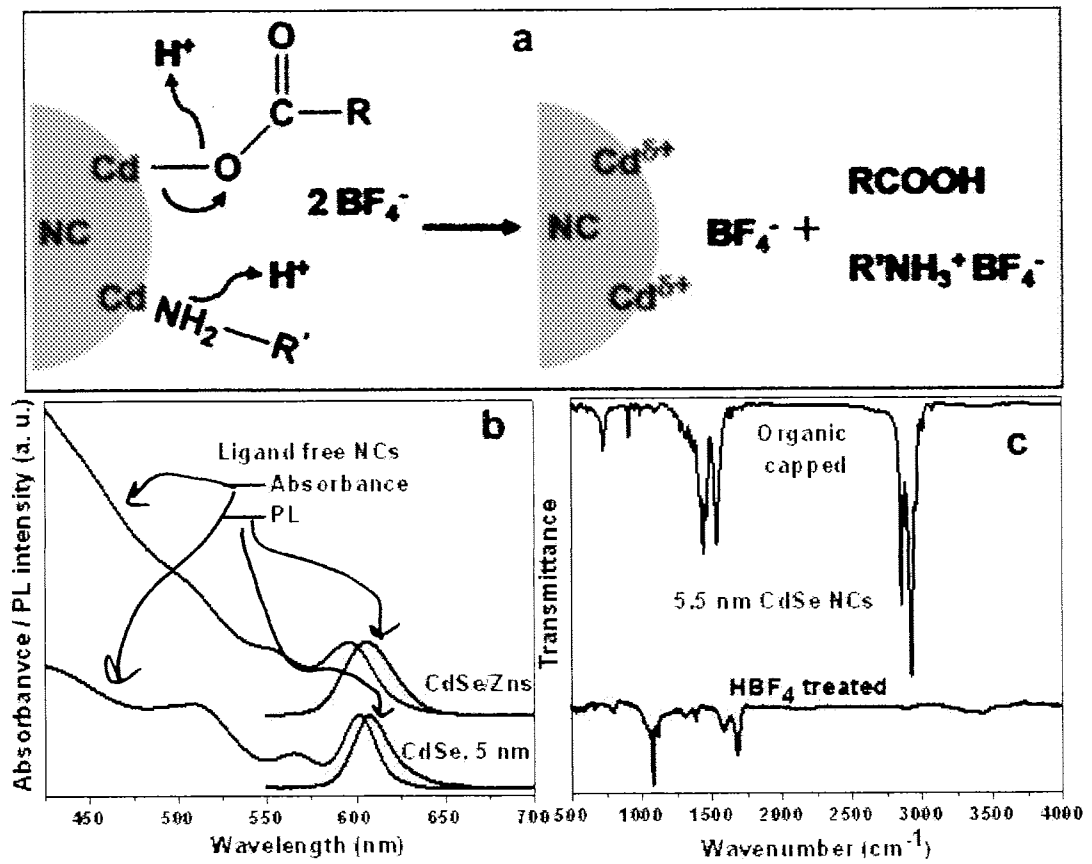


FIGURE 5

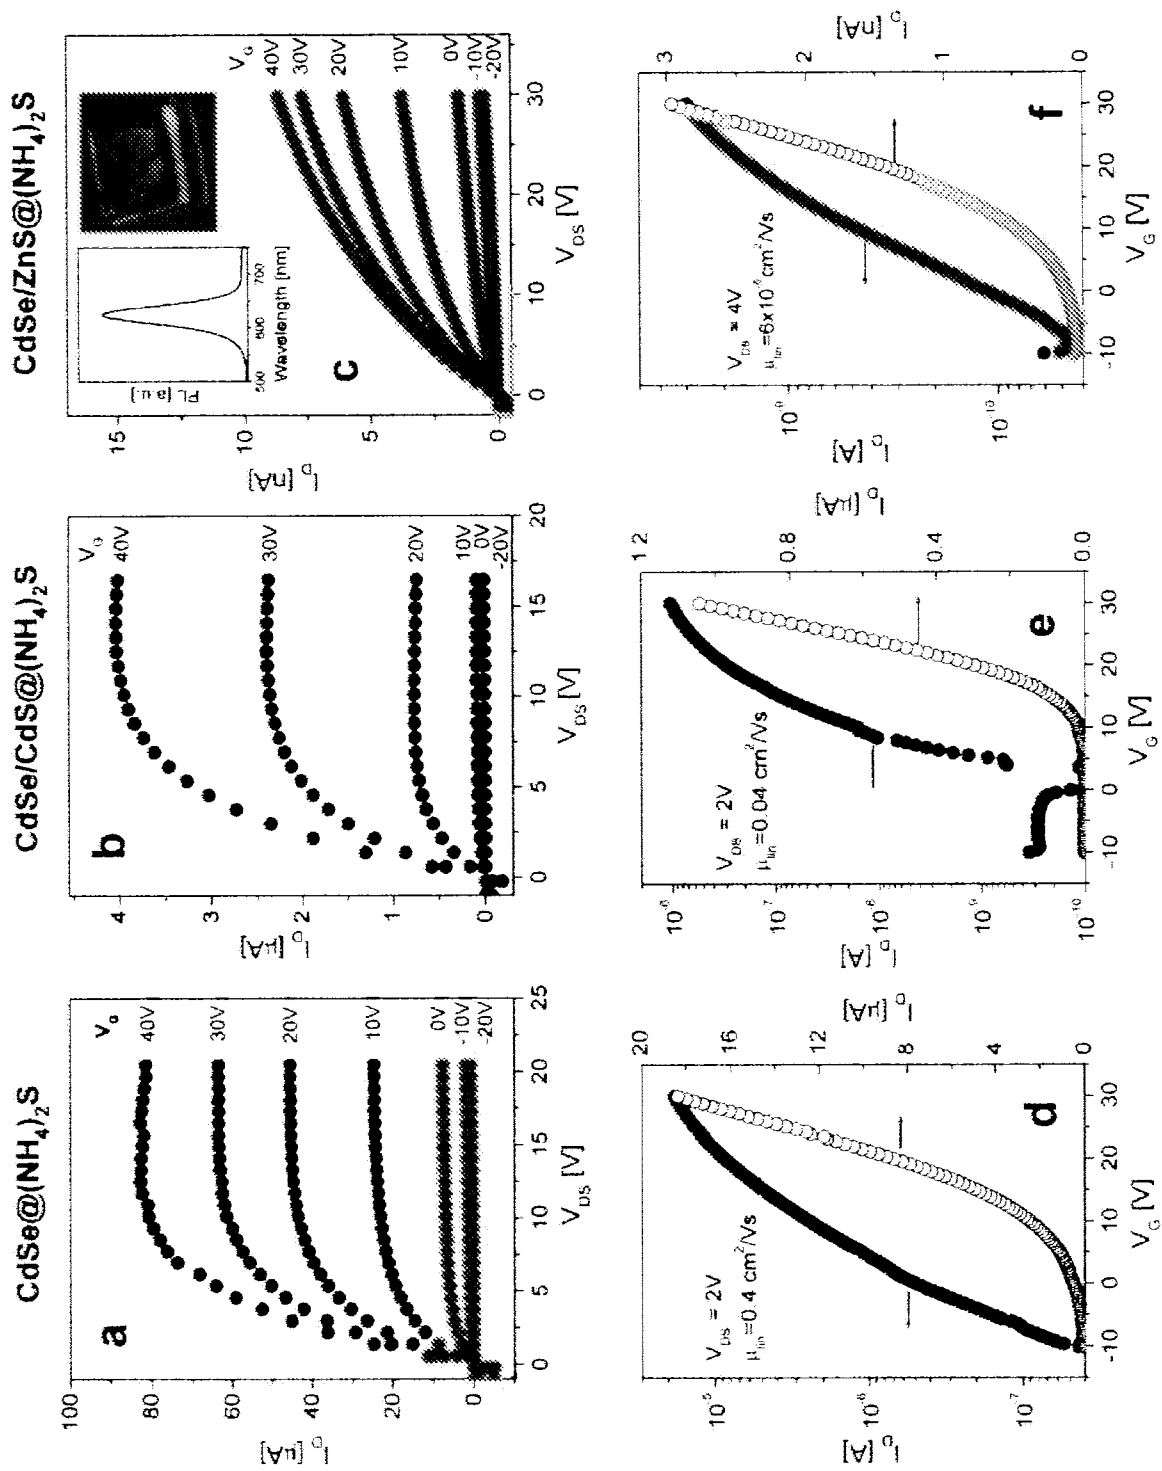


FIGURE 6

6 / 43

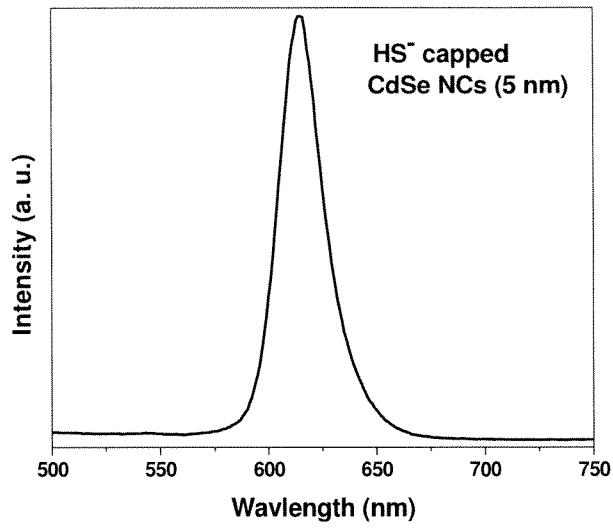


FIGURE 7

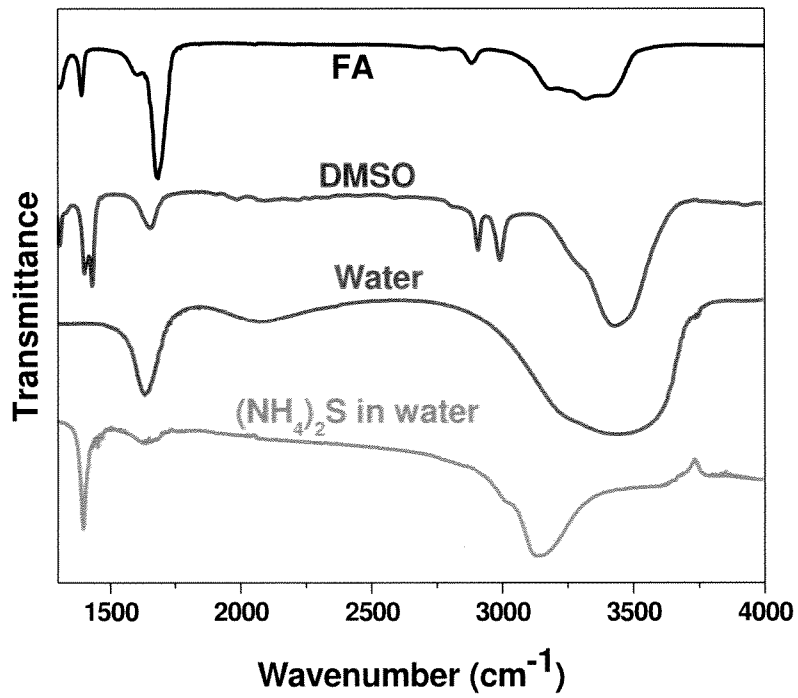


FIGURE 8

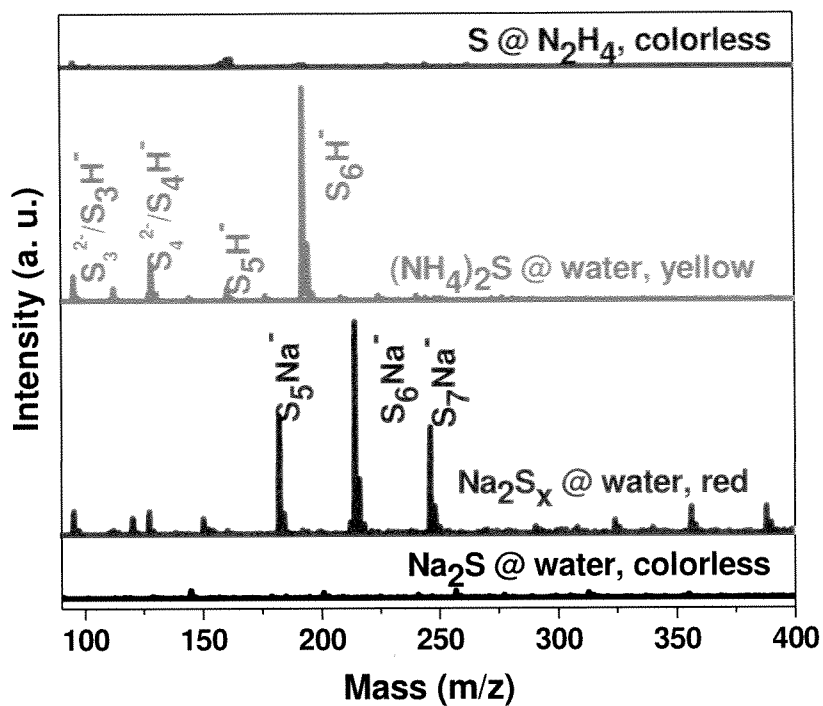


FIGURE 9

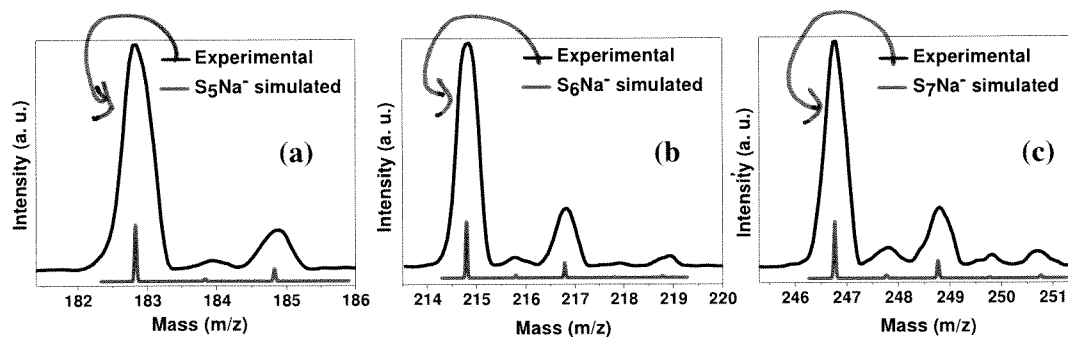


FIGURE 10

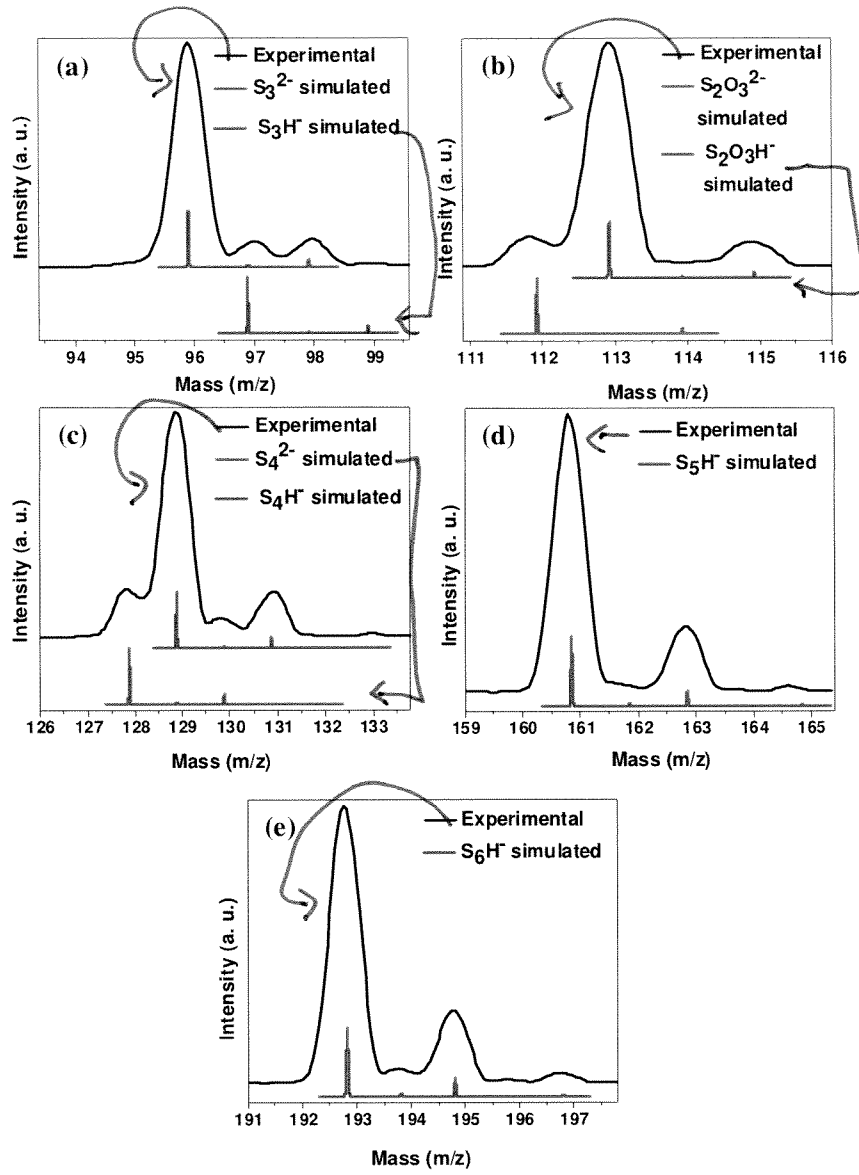


FIGURE 11

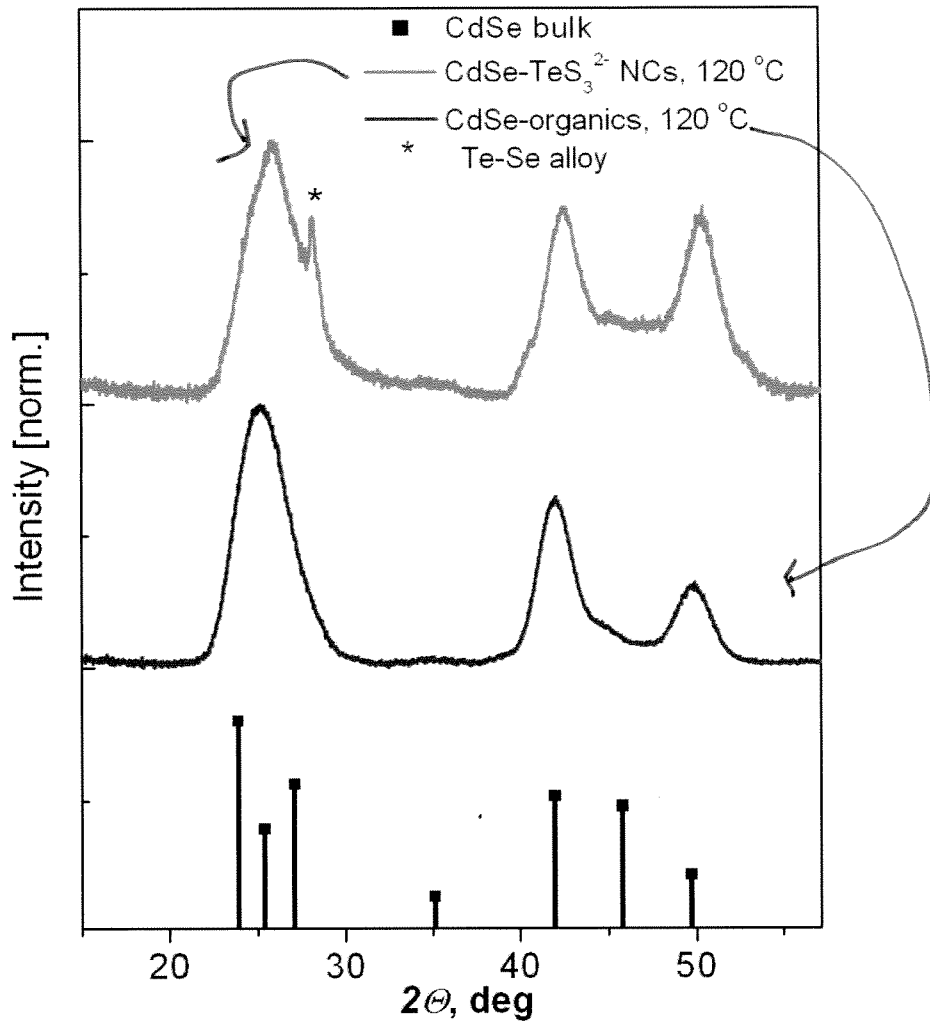


FIGURE 12

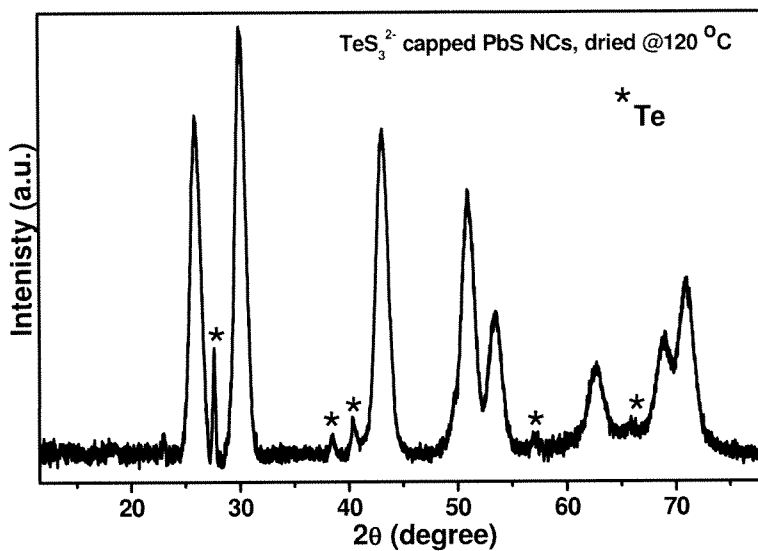


FIGURE 13

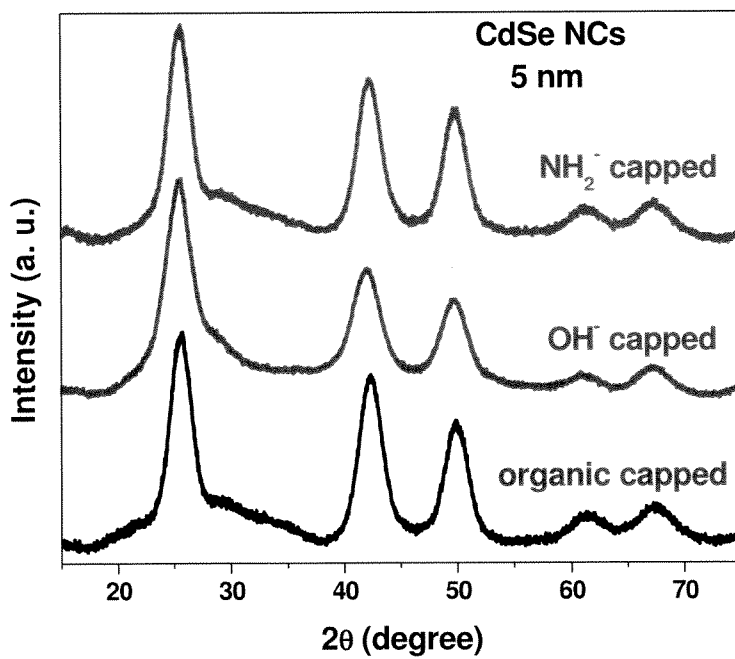


FIGURE 14

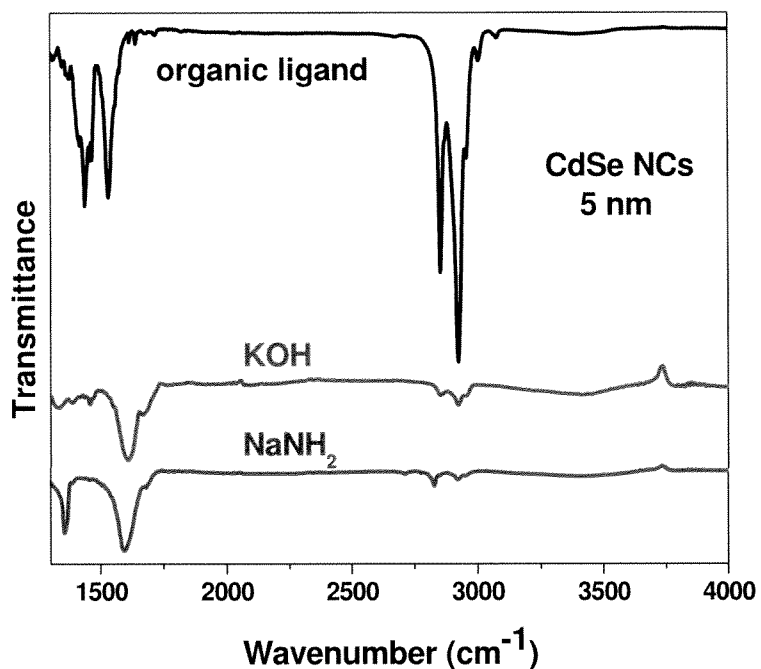


FIGURE 15

NCs	Surface ligands (ζ -potential)	Do not provide colloidal stabilization
CdSe	S^{2-} (-40 mV), SH^- (-42 mV), OH^- (-20 mV).	
ZnSe	OH^- (-26 mV)	S^{2-} , SH^-
Au	S^{2-} (-60 mV), SH^- (-56 mV)	OH^-
InP	S^{2-} (-60 mV)	OH^-
InAs	S^{2-} (-39mV), SH^- (-43mV)	OH^-
In_2O_3	S^{2-} (-45mV), SH^- (-40 mV), OH^- (-44mV)	

FIGURE 16

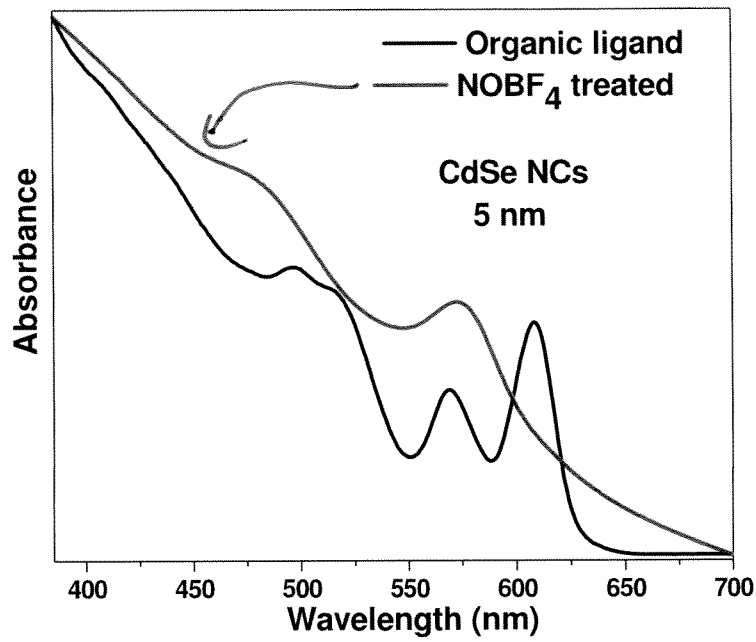


FIGURE 17

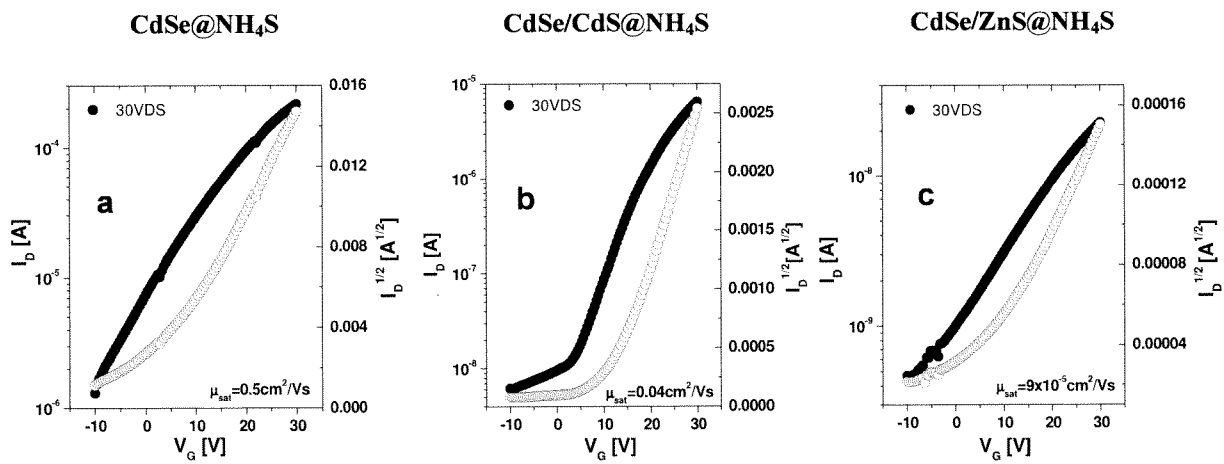


FIGURE 18

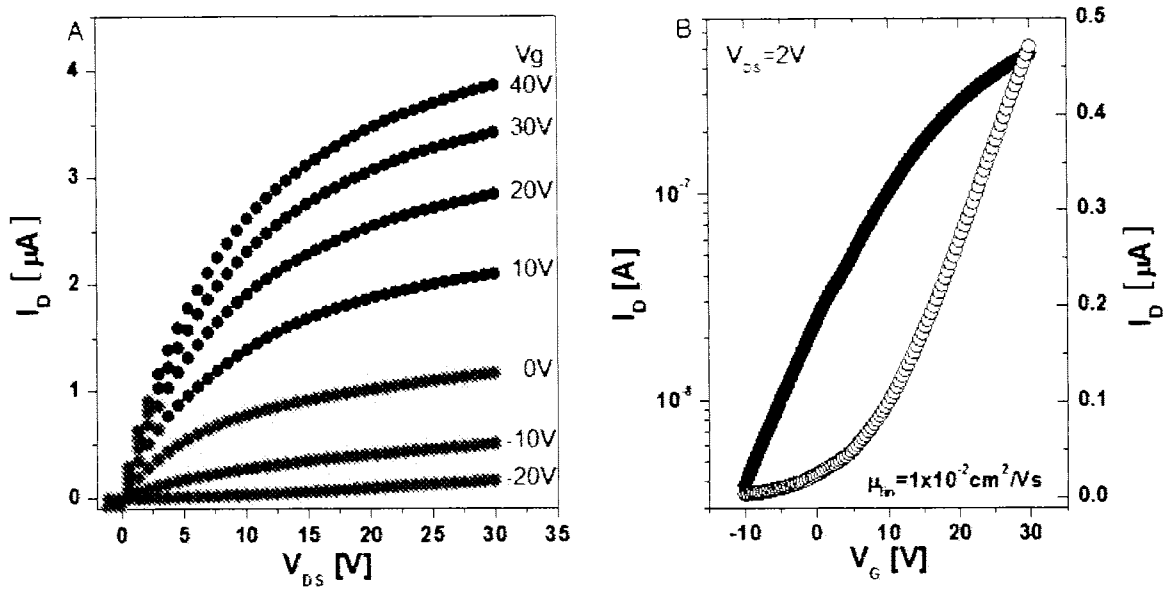


FIGURE 19

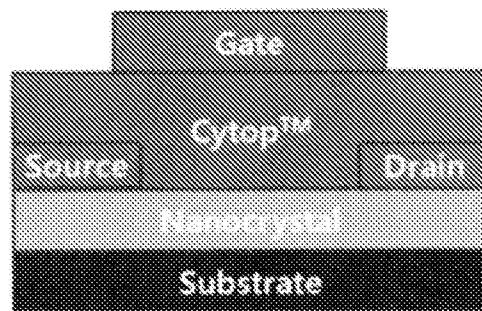


FIGURE 20

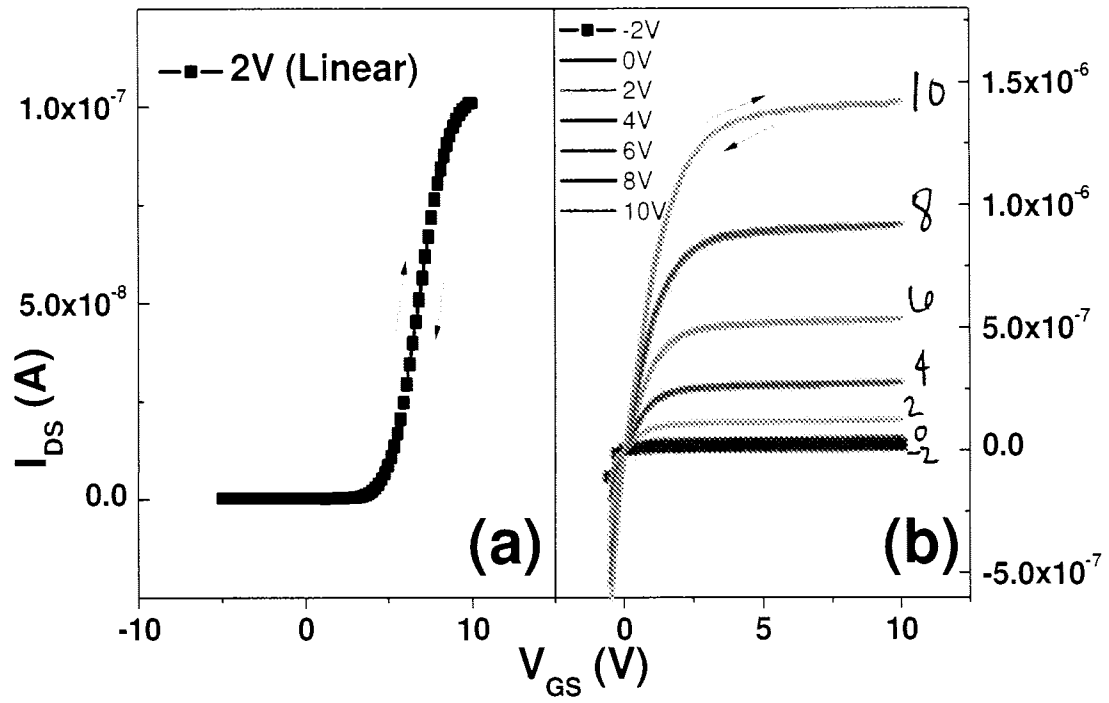


FIGURE 21

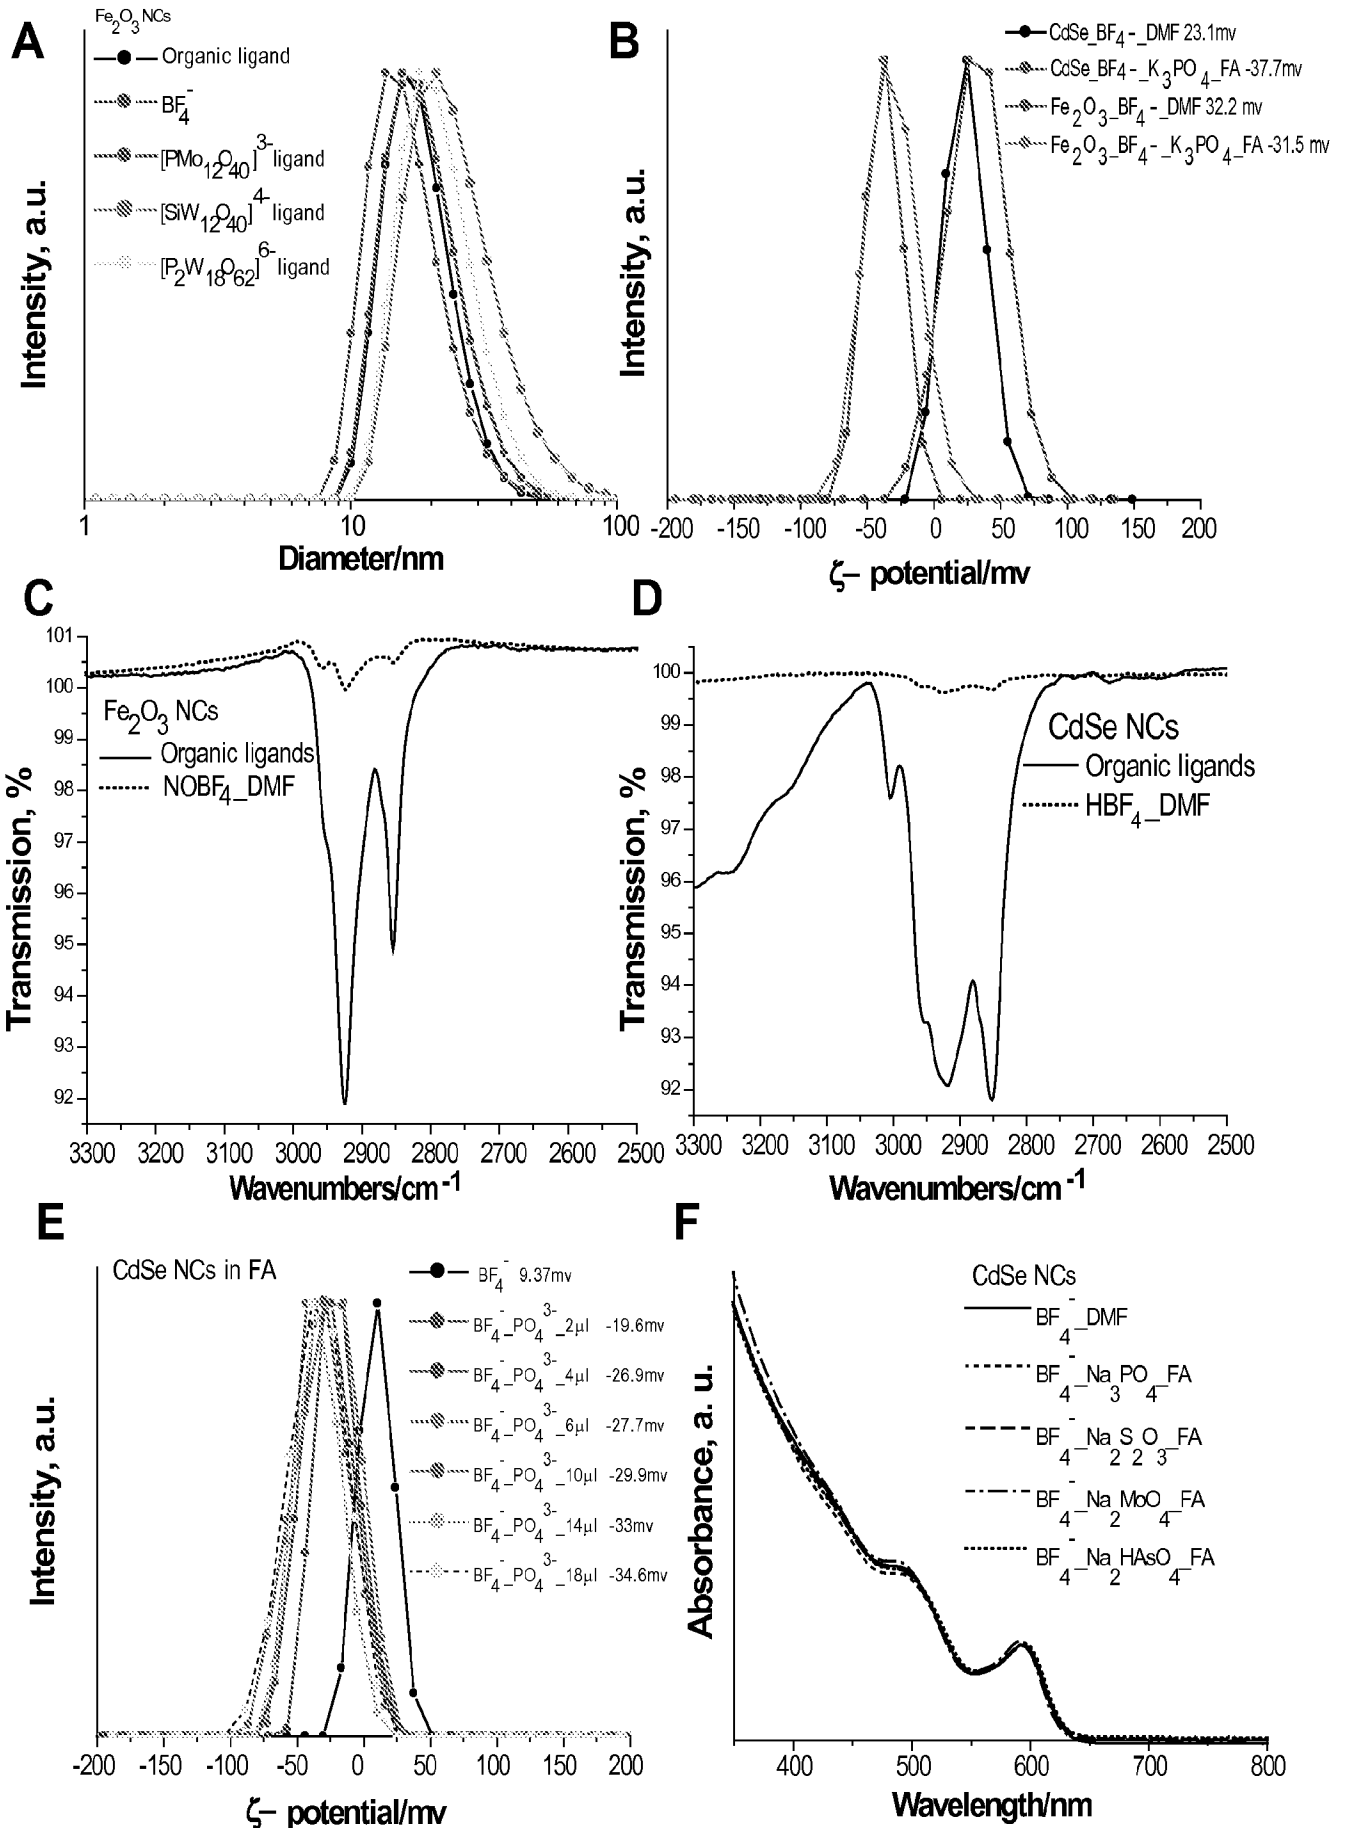


FIGURE 22

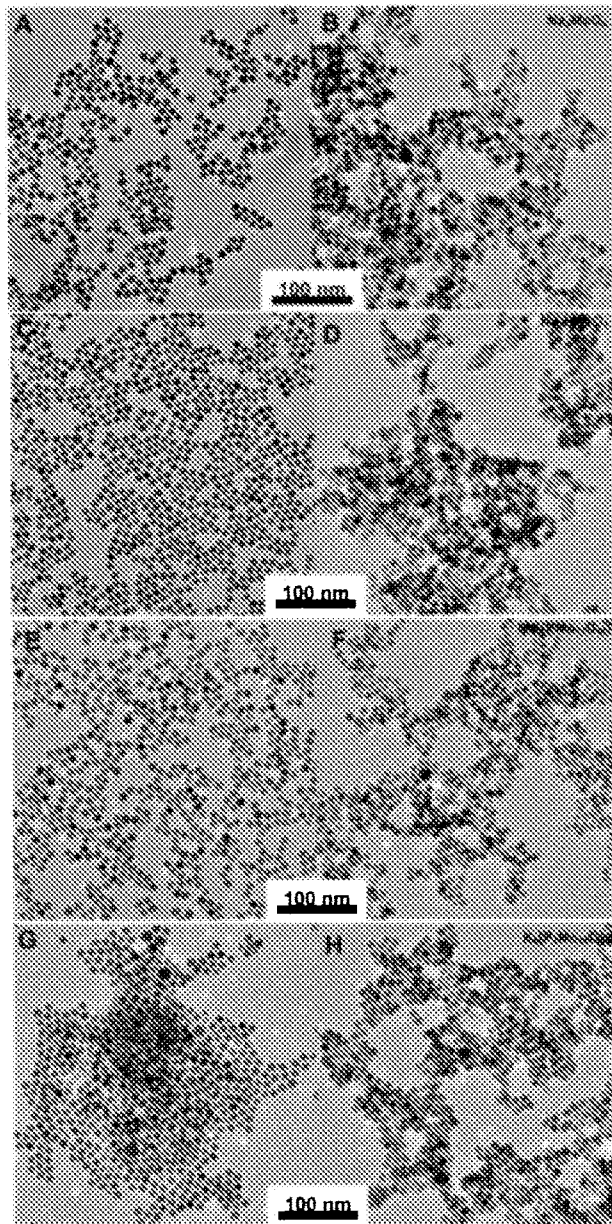


FIGURE 23

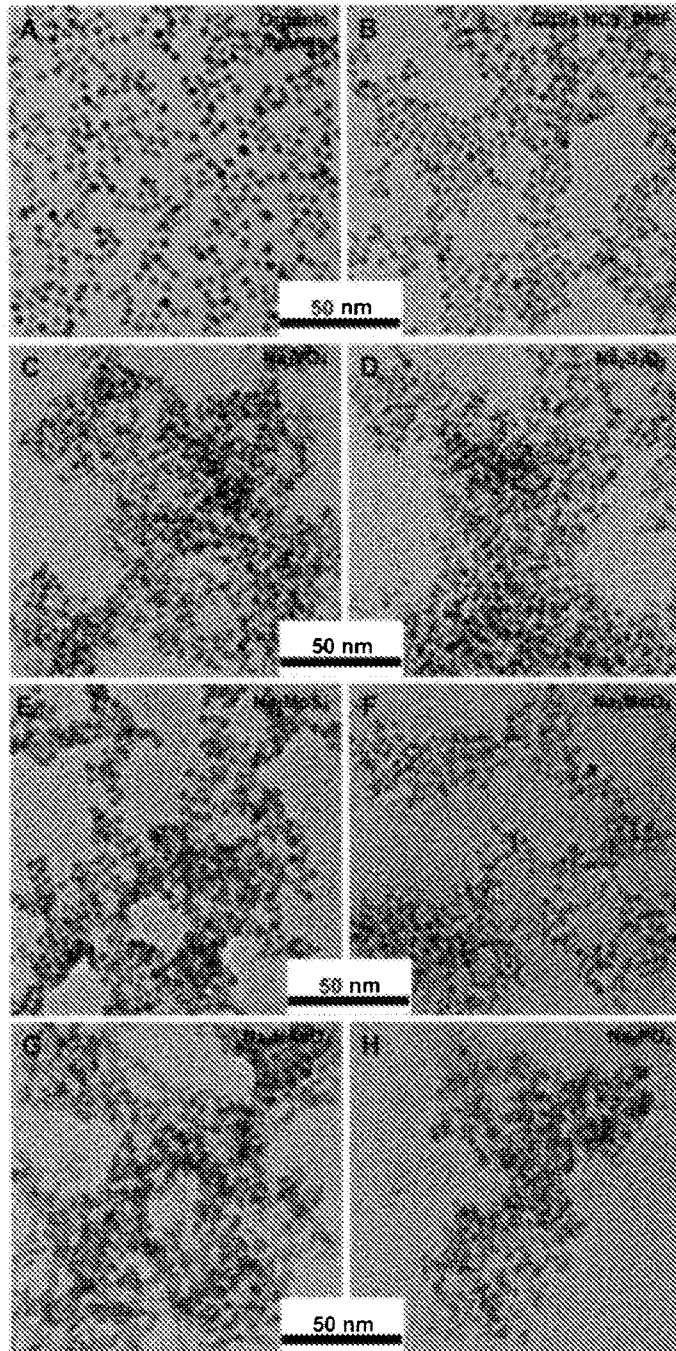


FIGURE 24

FIGURE 25

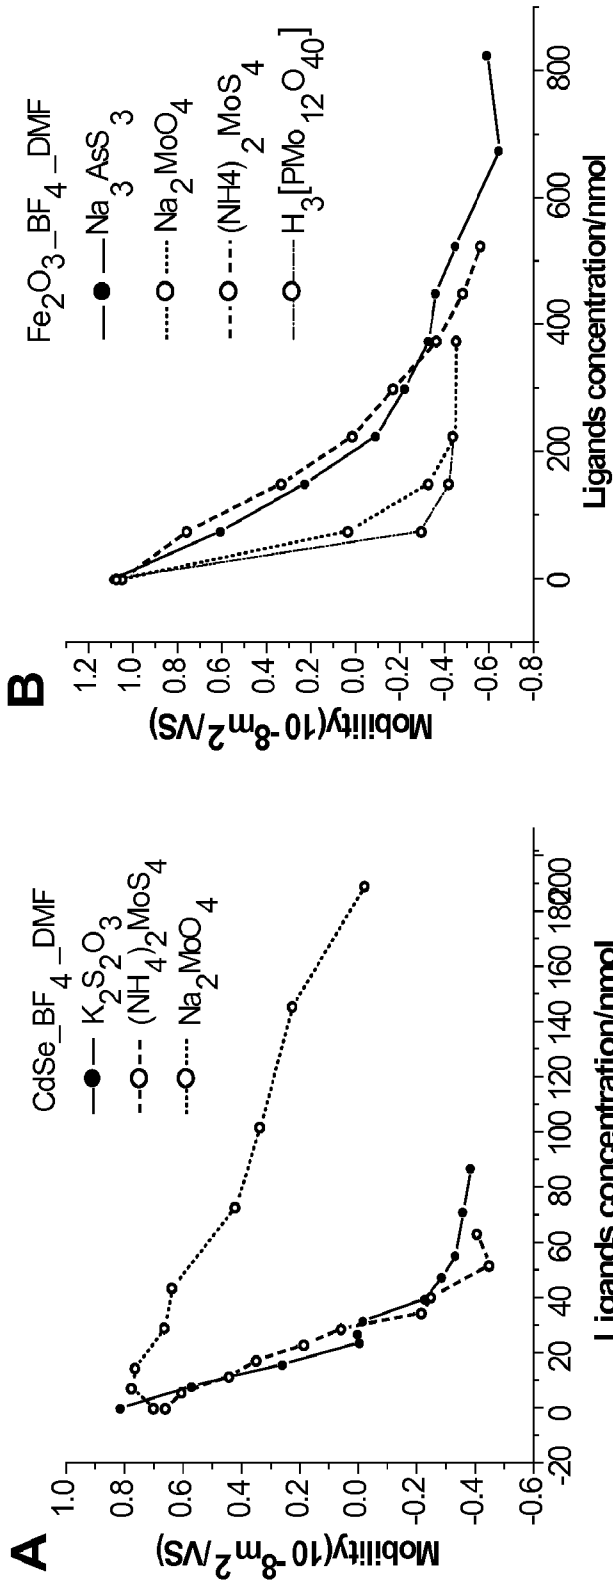
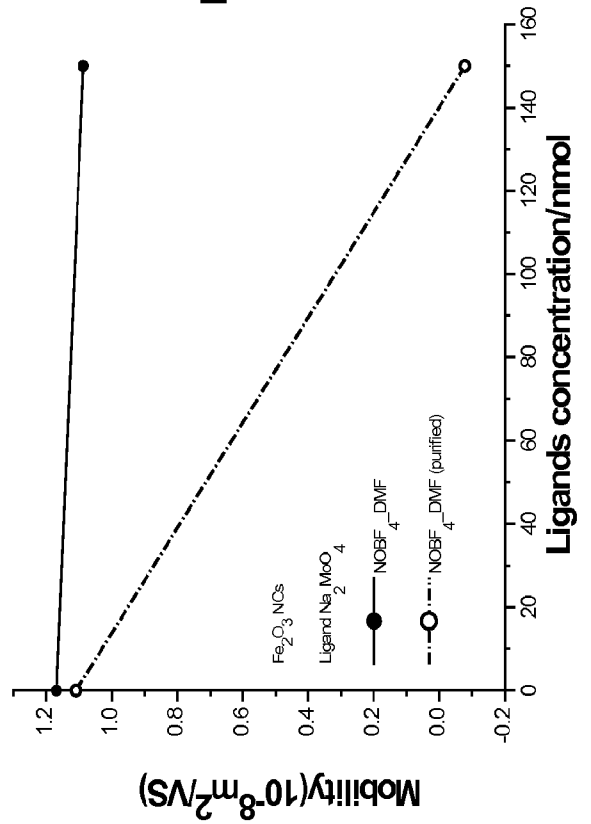


FIGURE 26




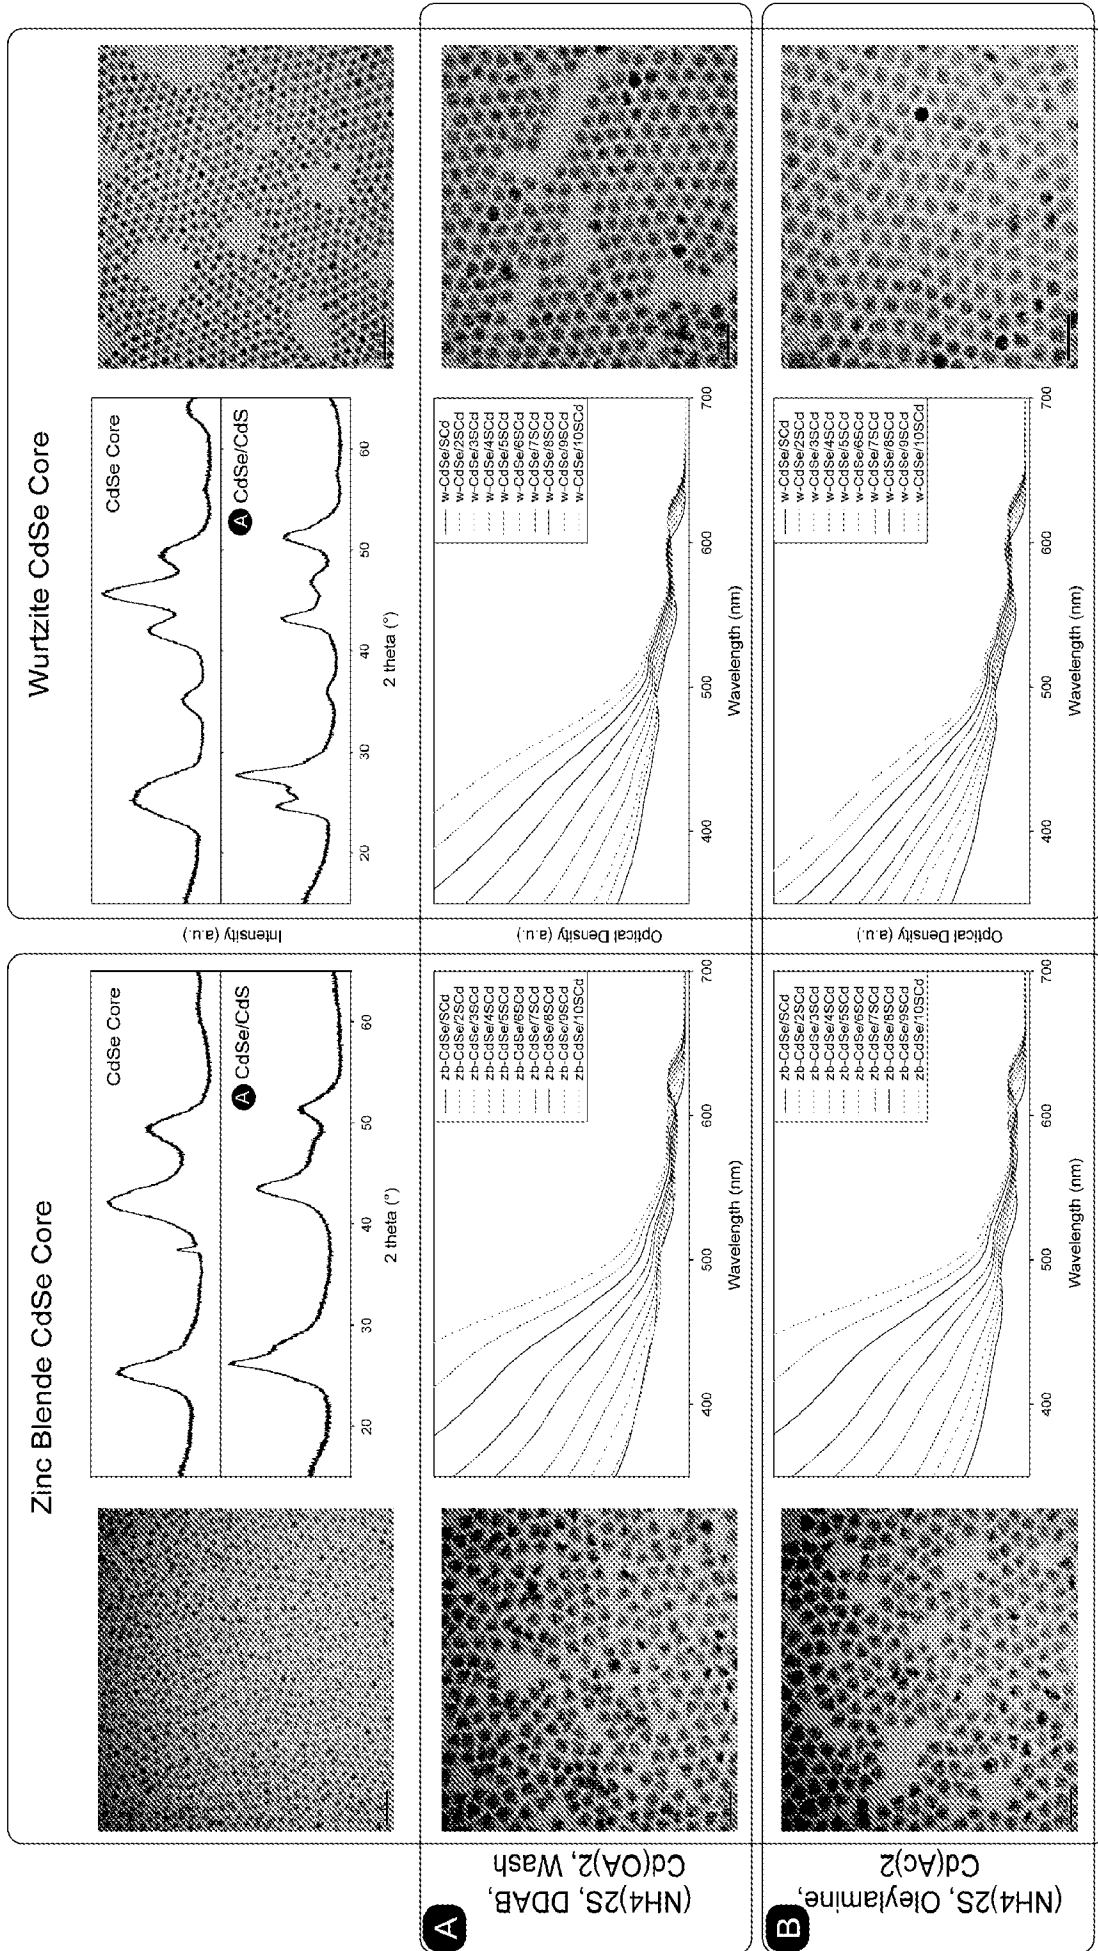


FIGURE 27

CdSe(NRs)-5SCd

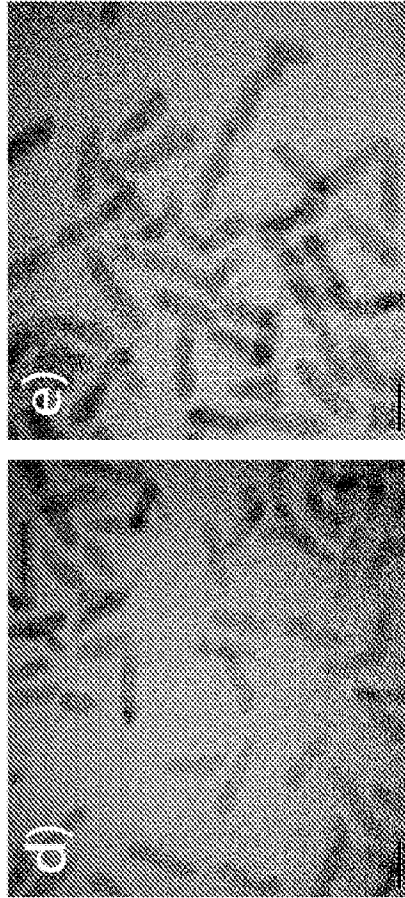

CdSe(zb)-5SZn

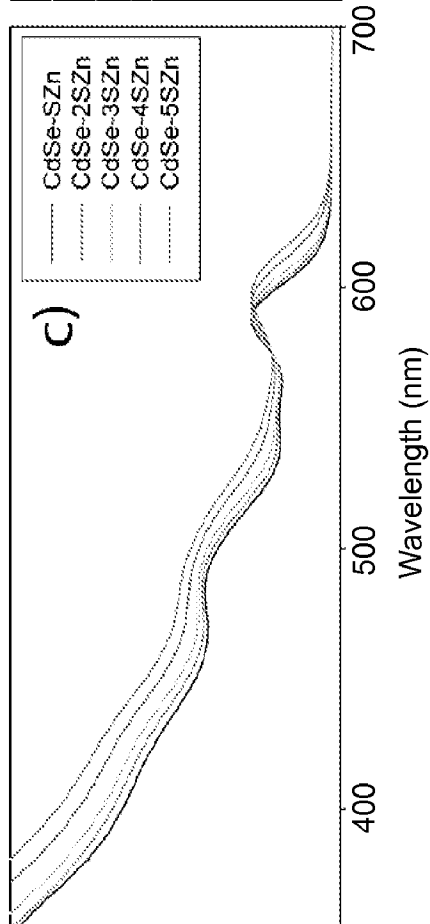
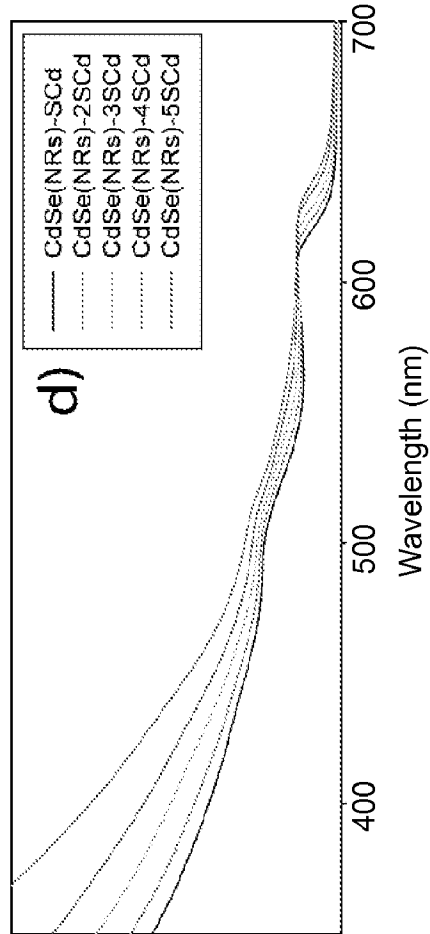
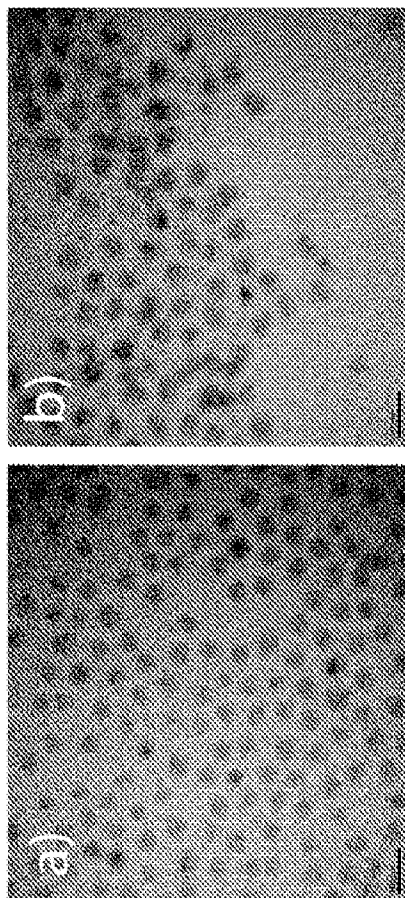


FIGURE 28

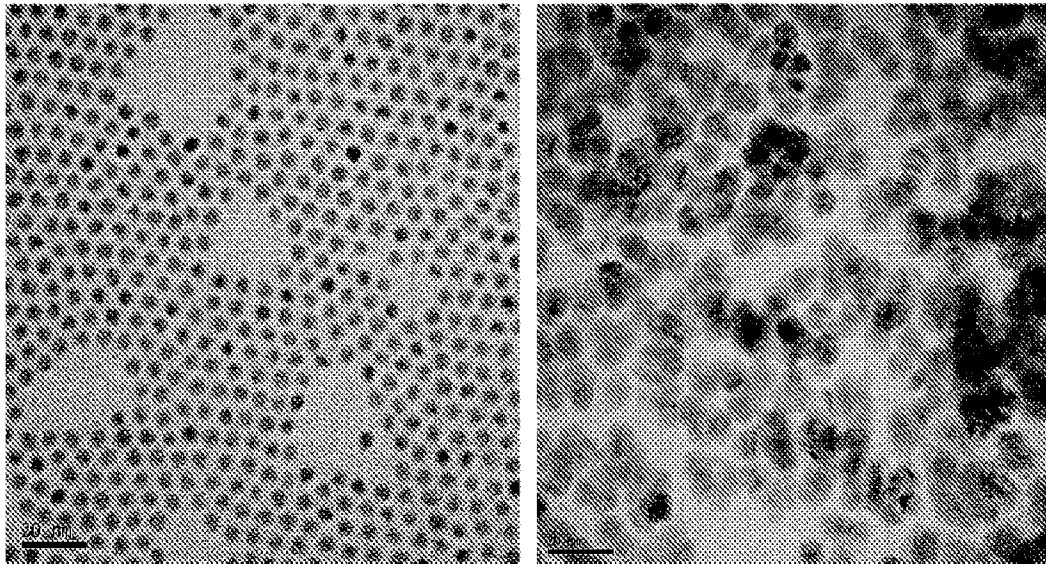
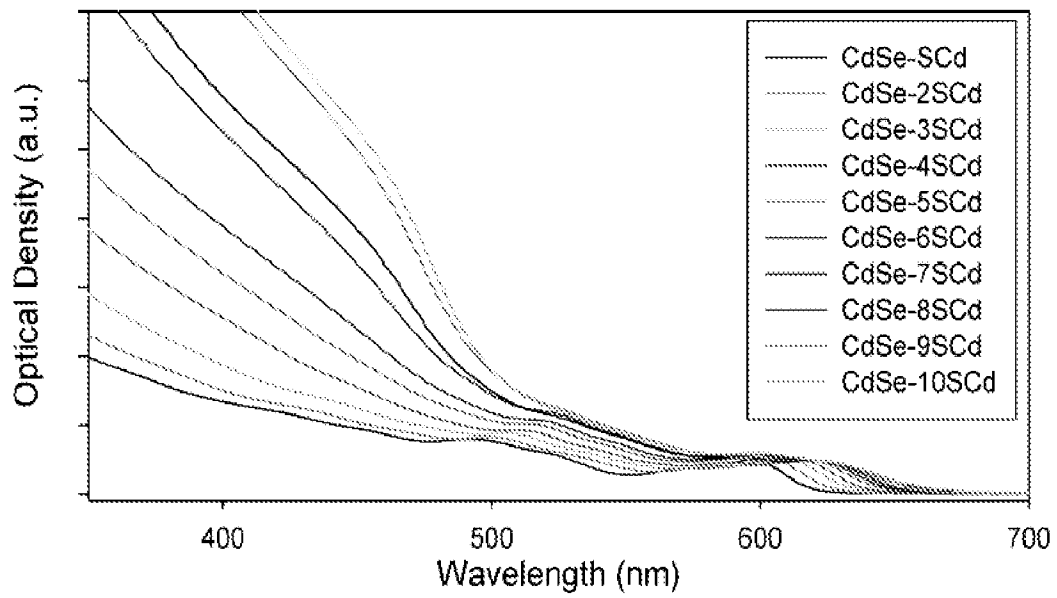


FIGURE 29

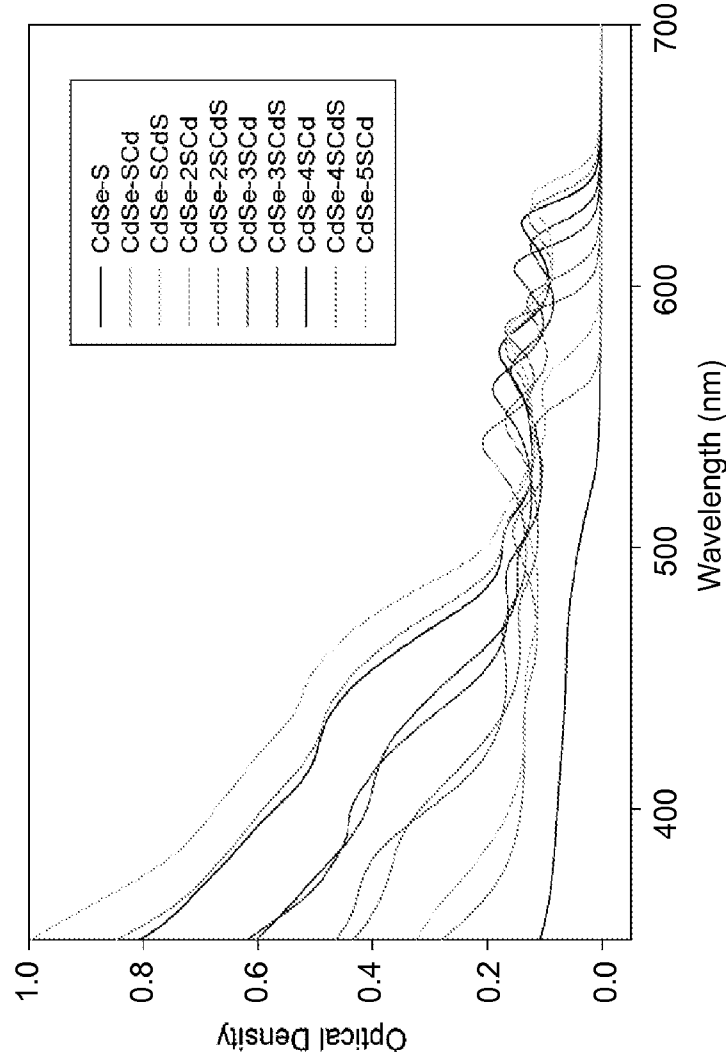
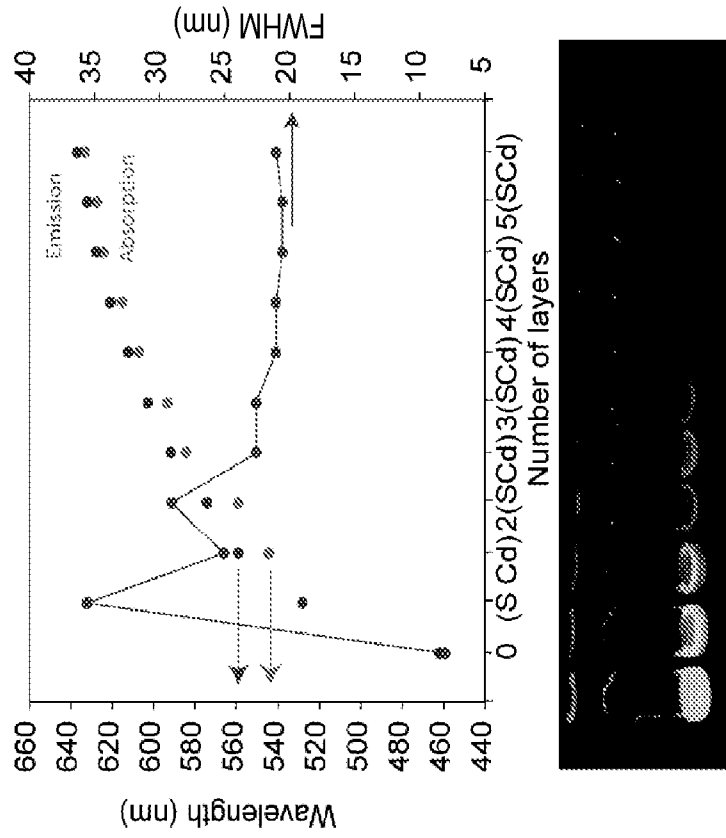


FIGURE 30

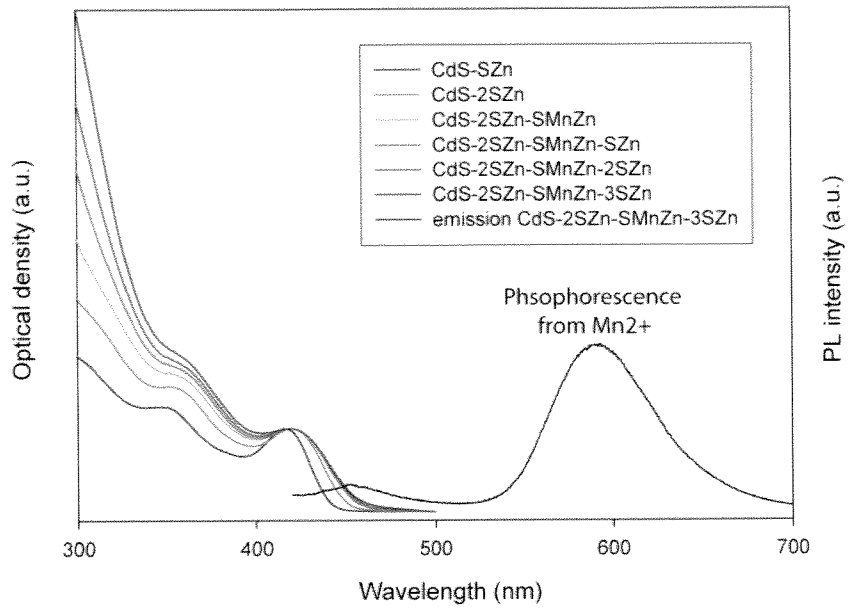


FIGURE 31

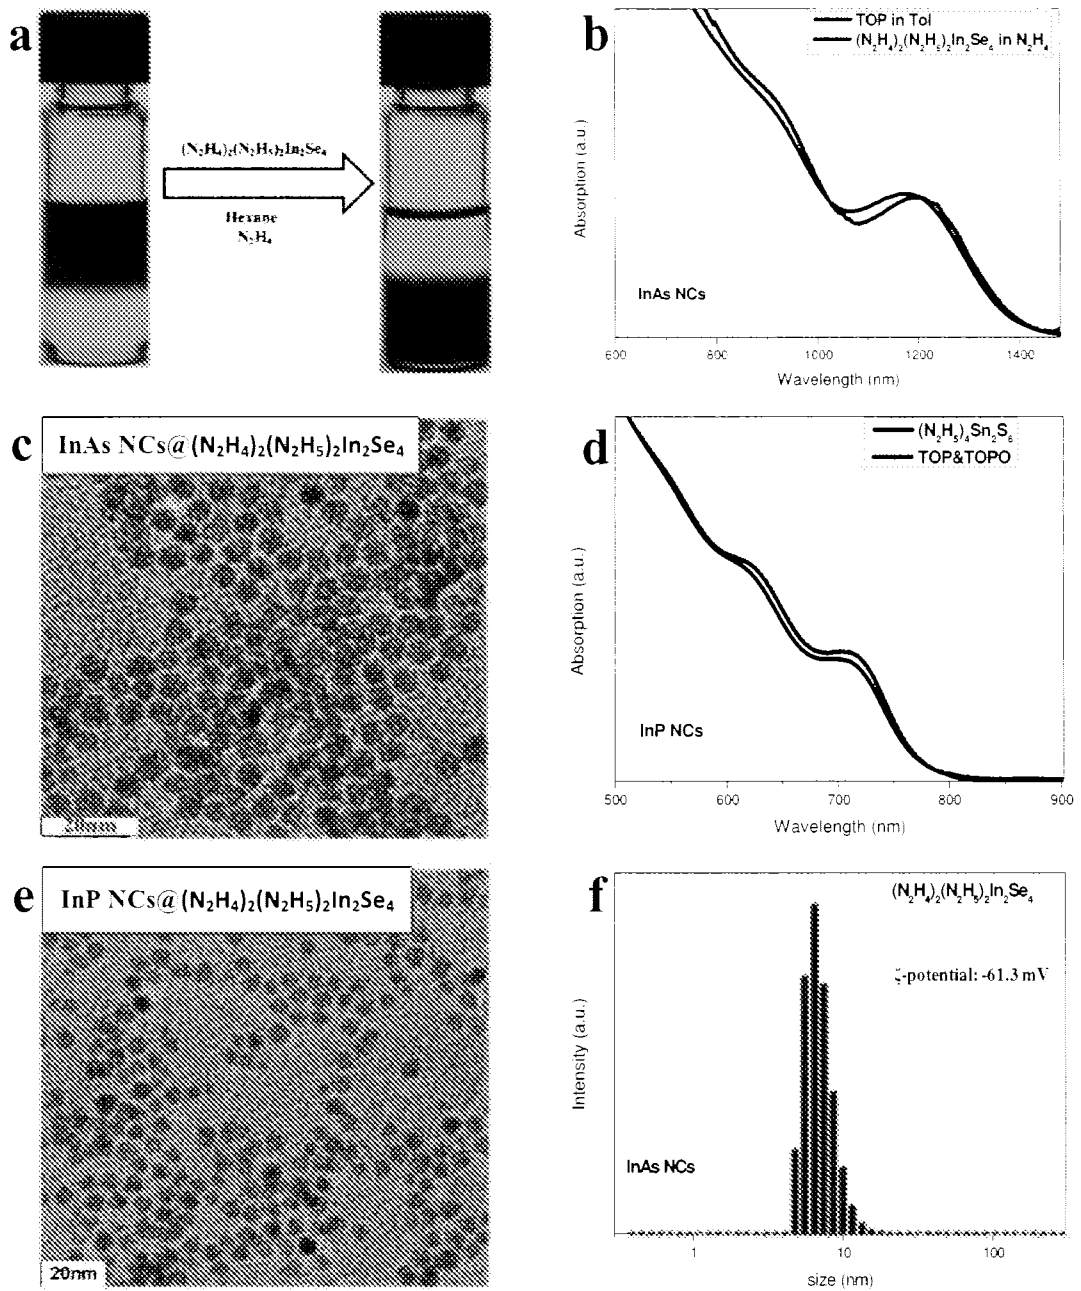


FIGURE 32

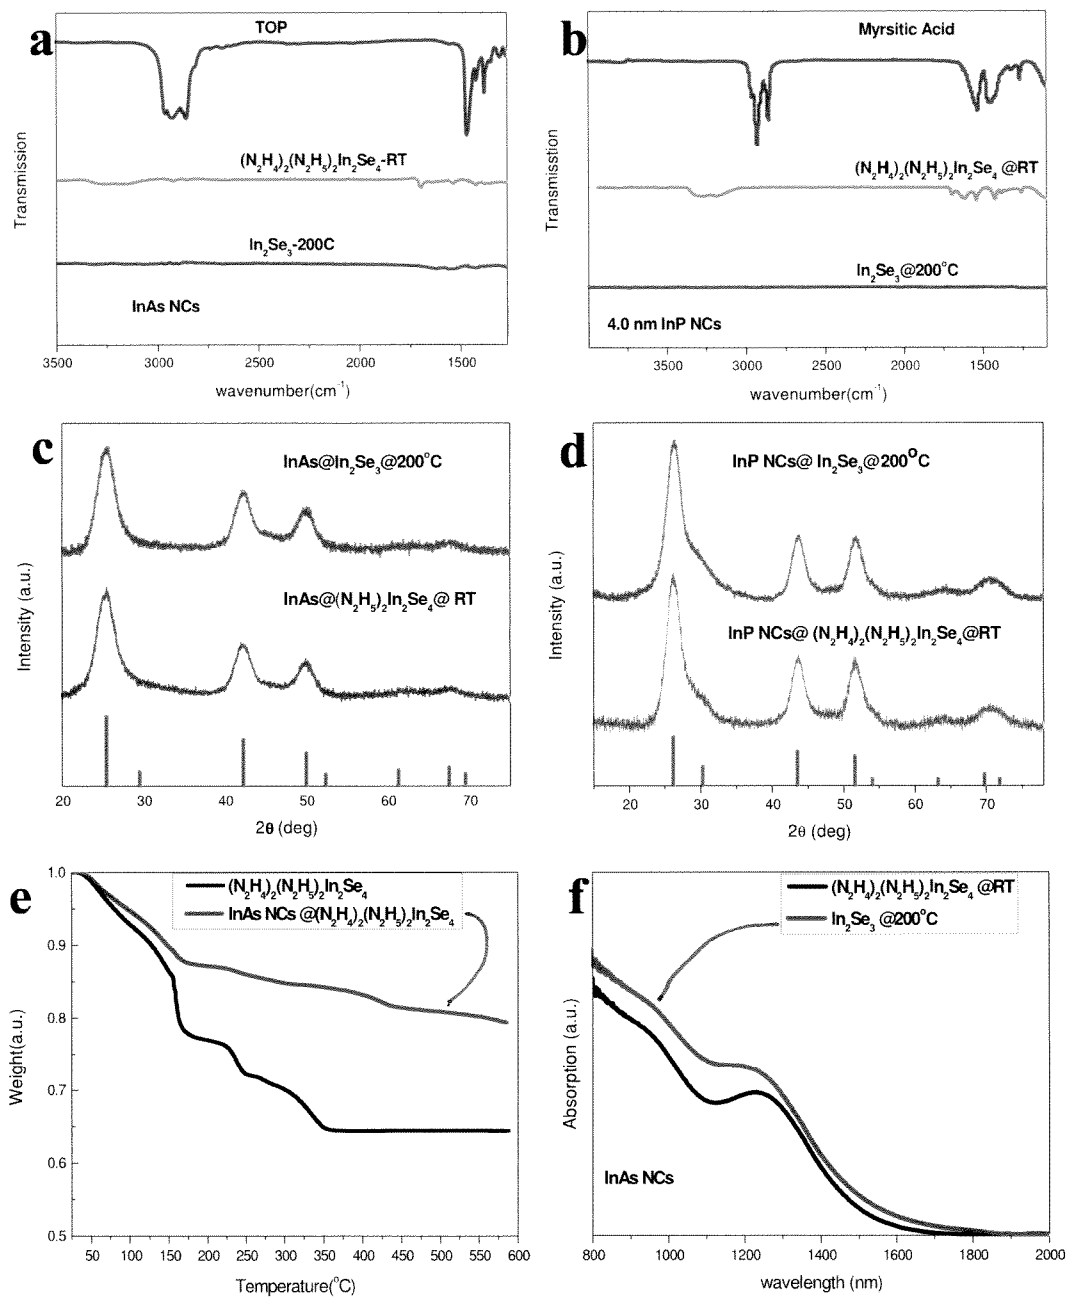


FIGURE 33

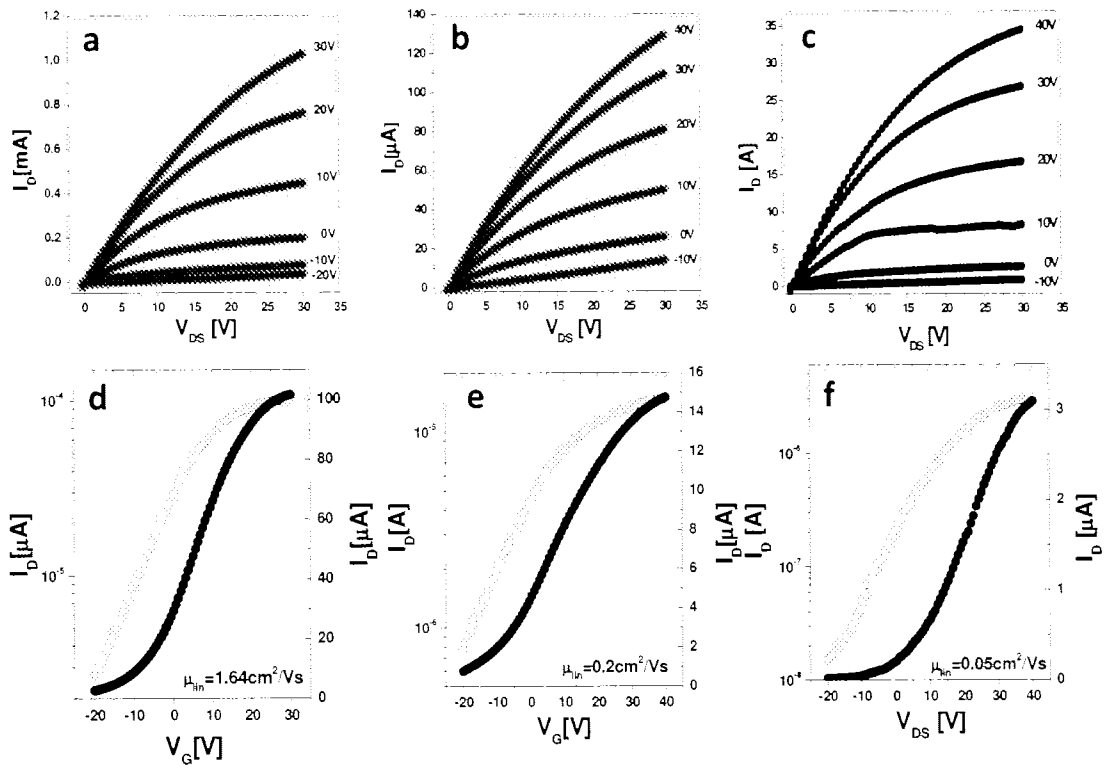


FIGURE 34

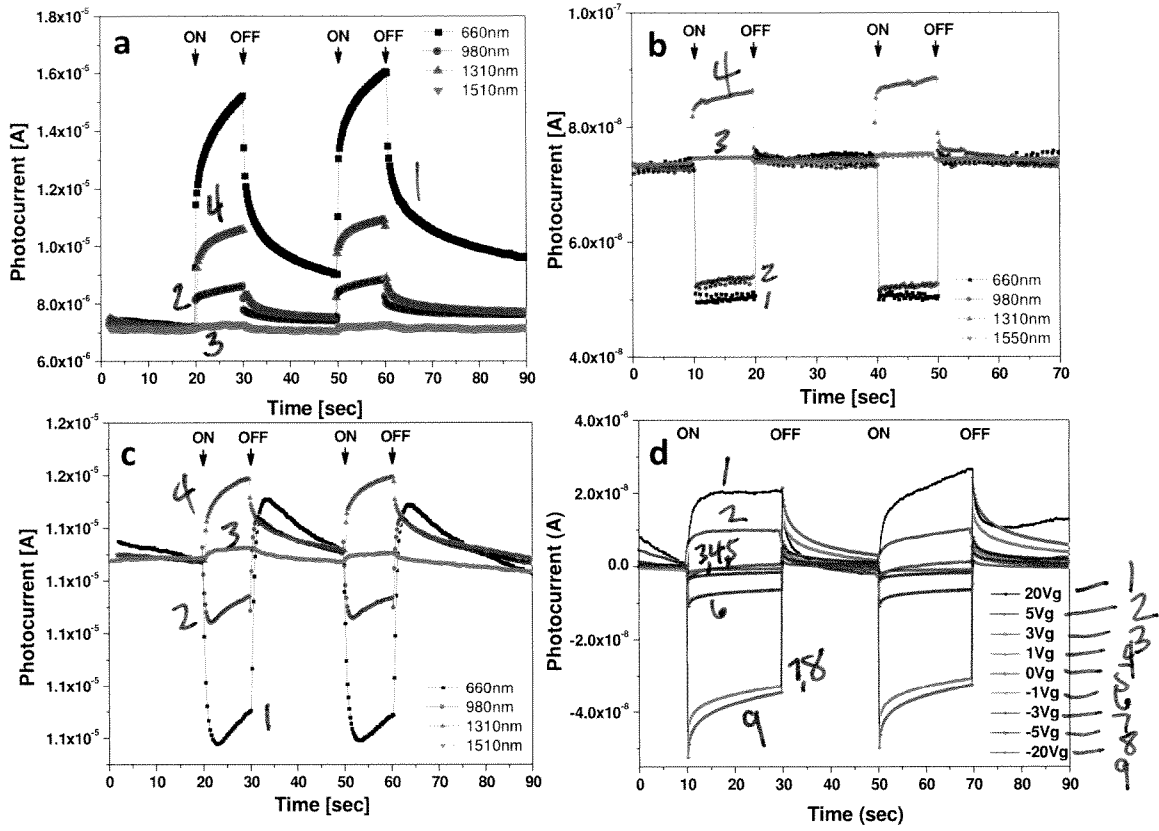


FIGURE 35

660 - 1
 980 - 2
 1510 - 3
 1310 - 4

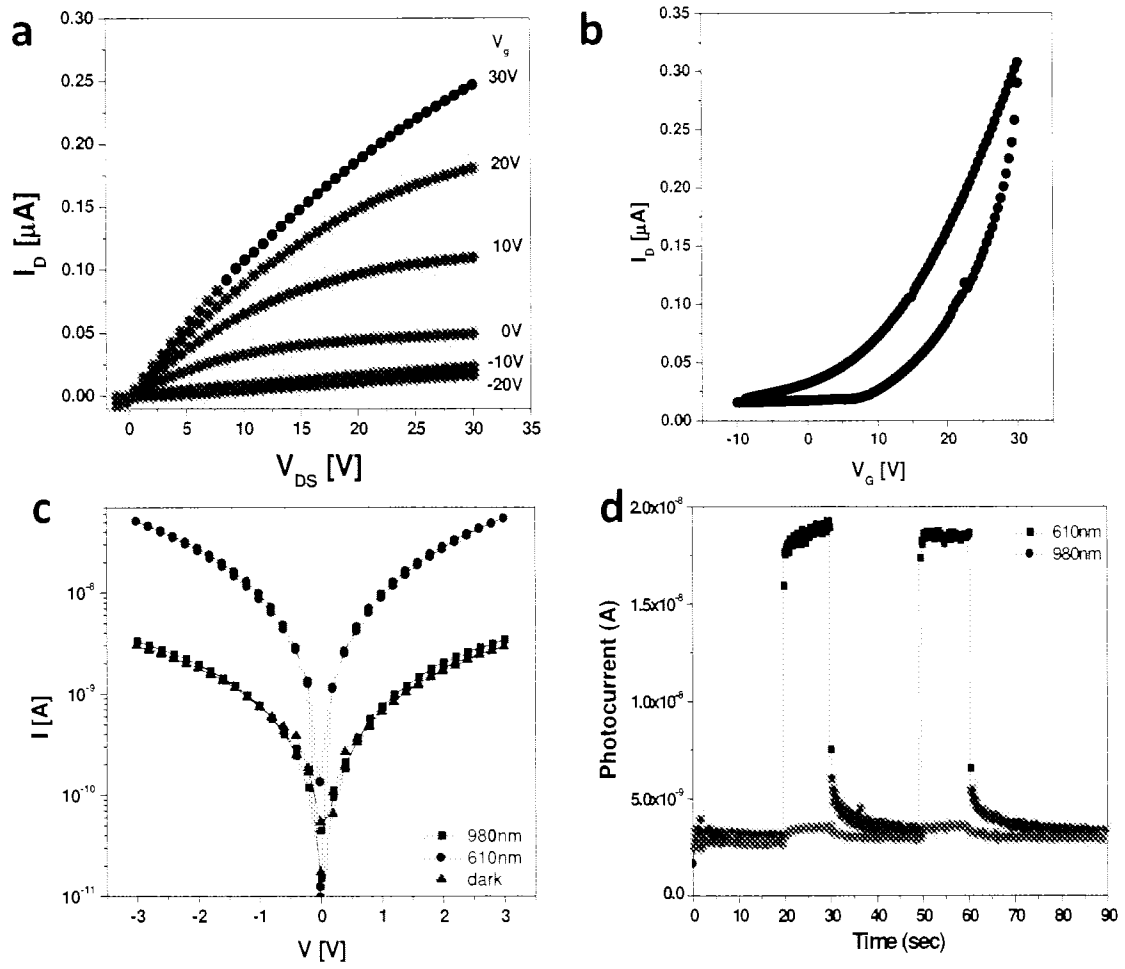


FIGURE 36

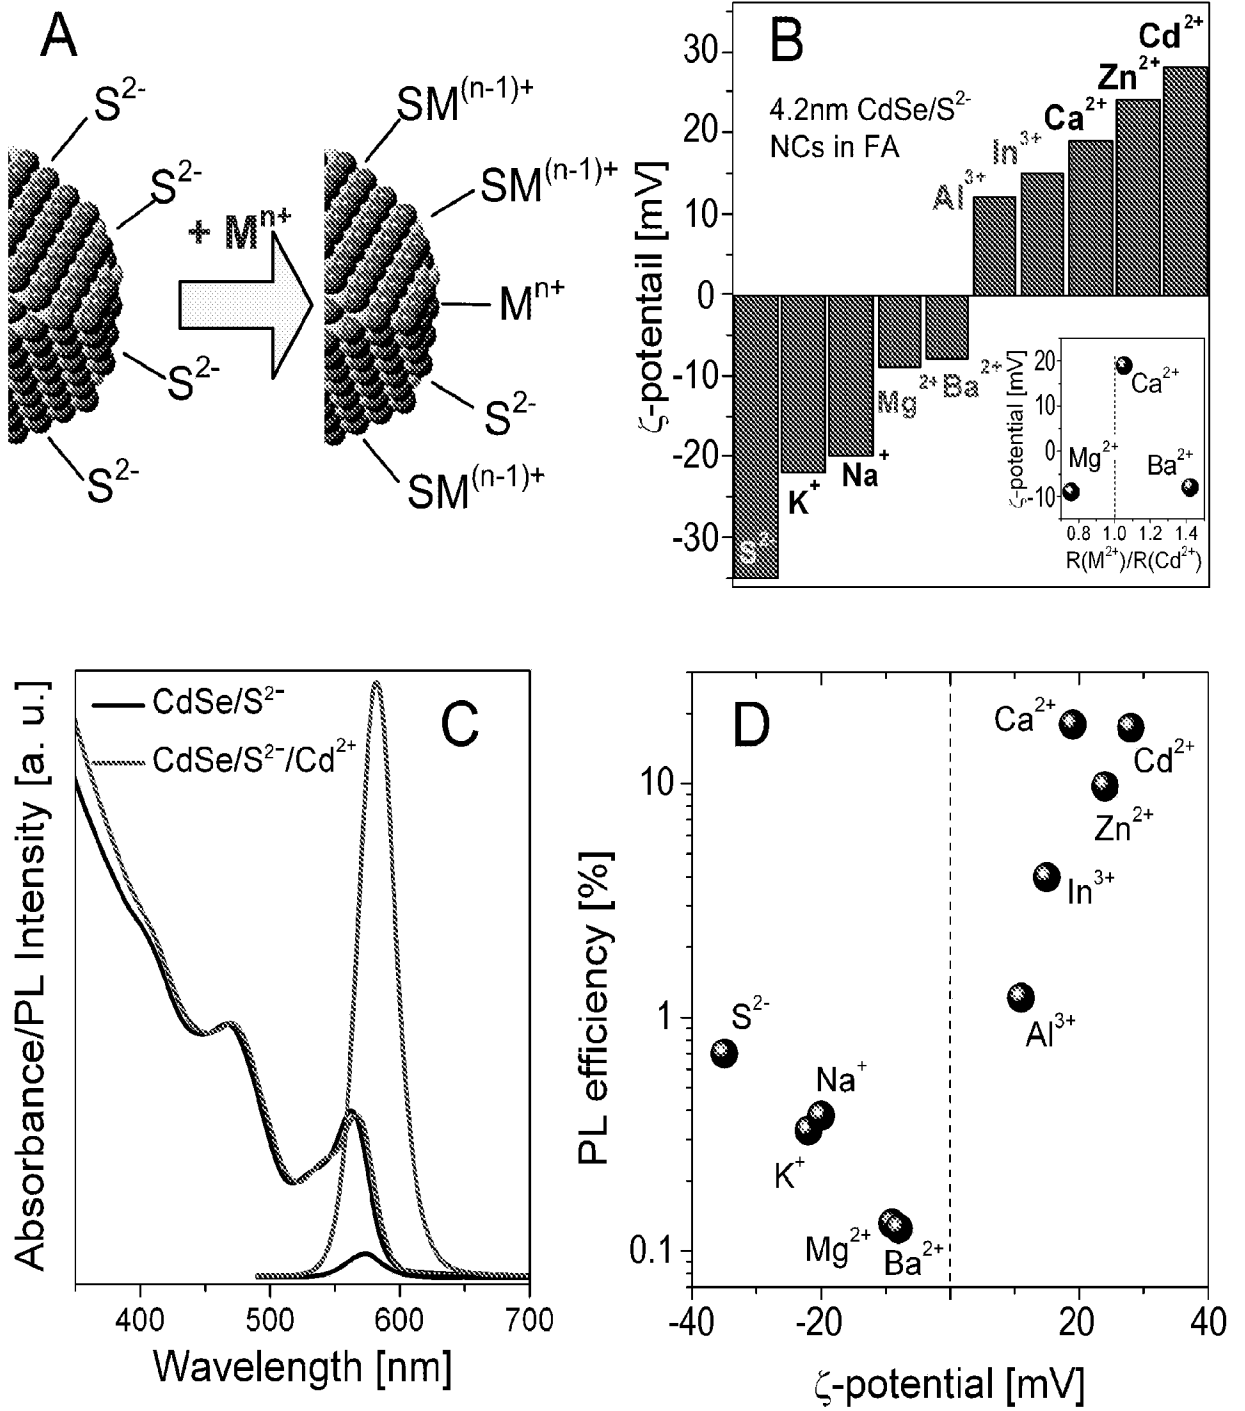


FIGURE 37

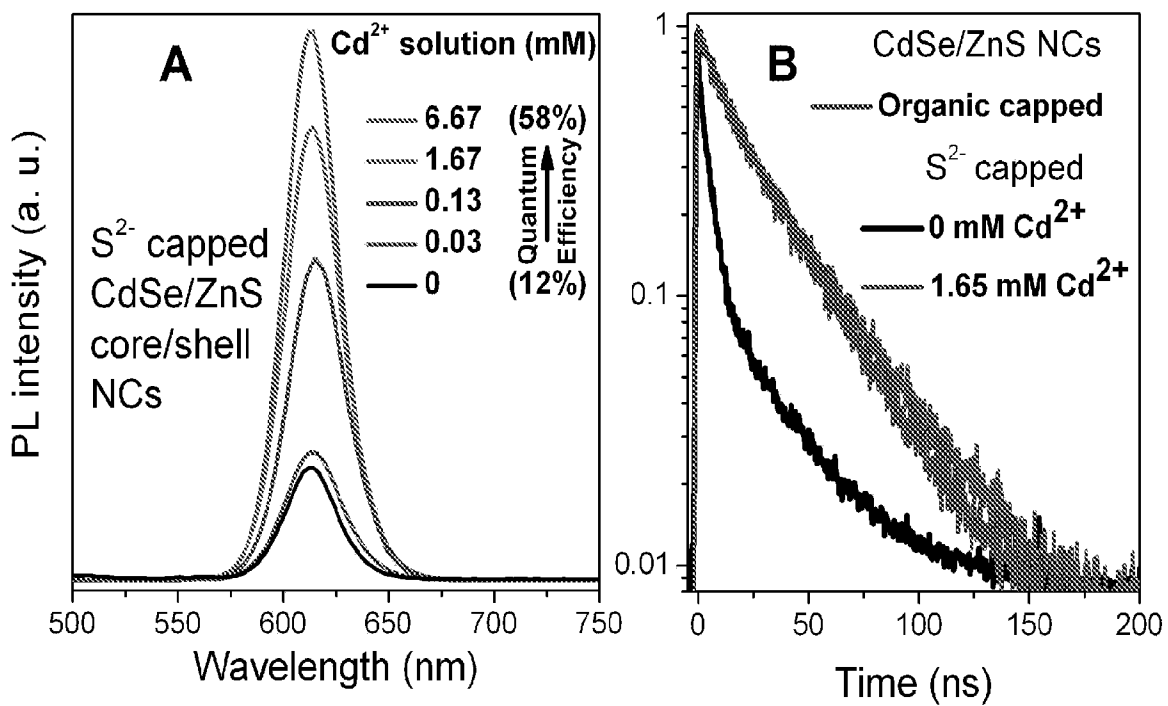


FIGURE 38

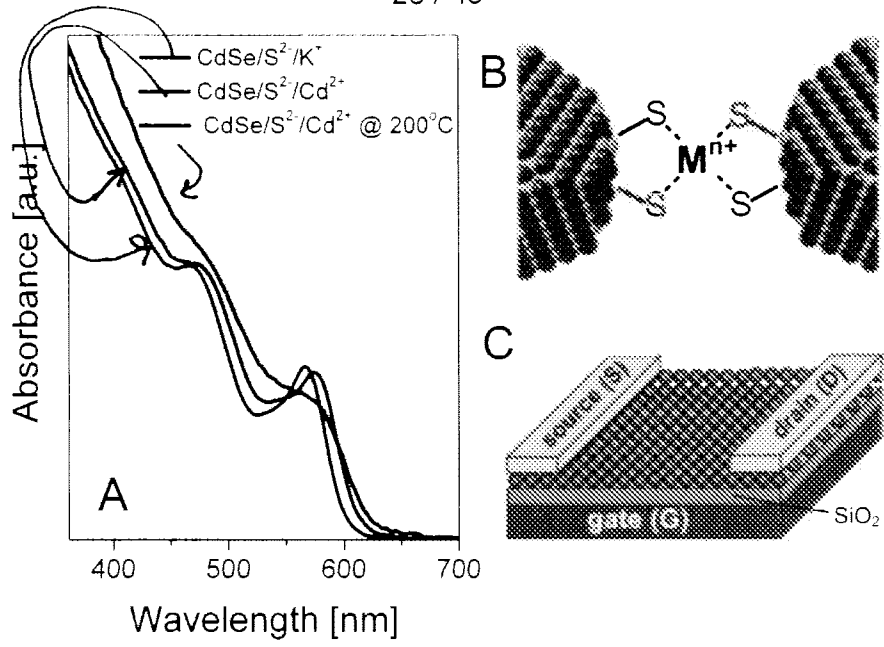


FIGURE 39

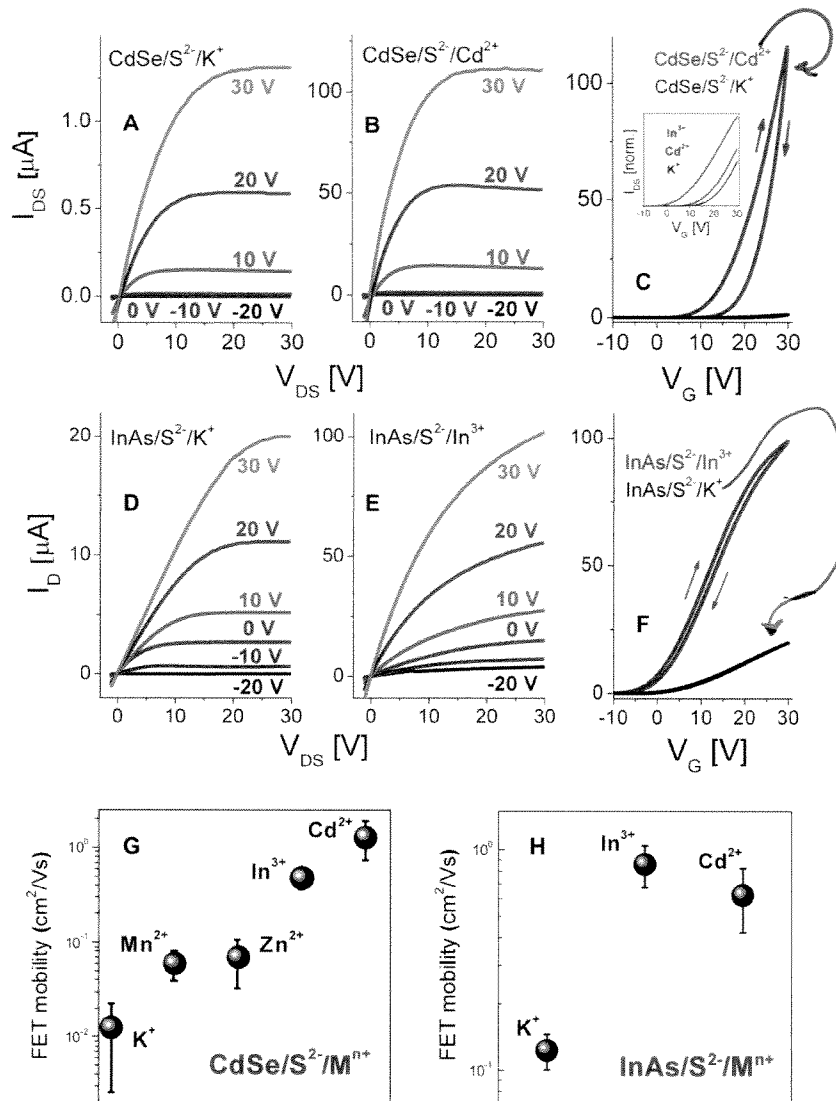


FIGURE 40

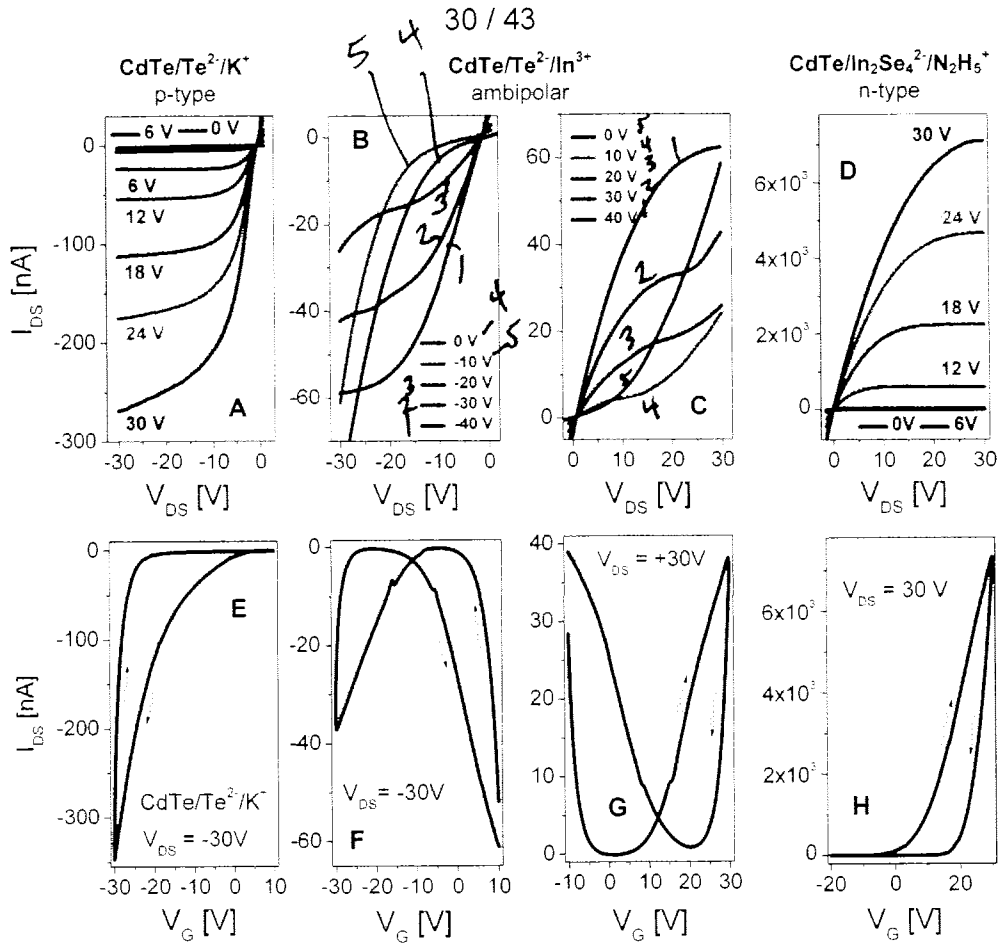


FIGURE 41

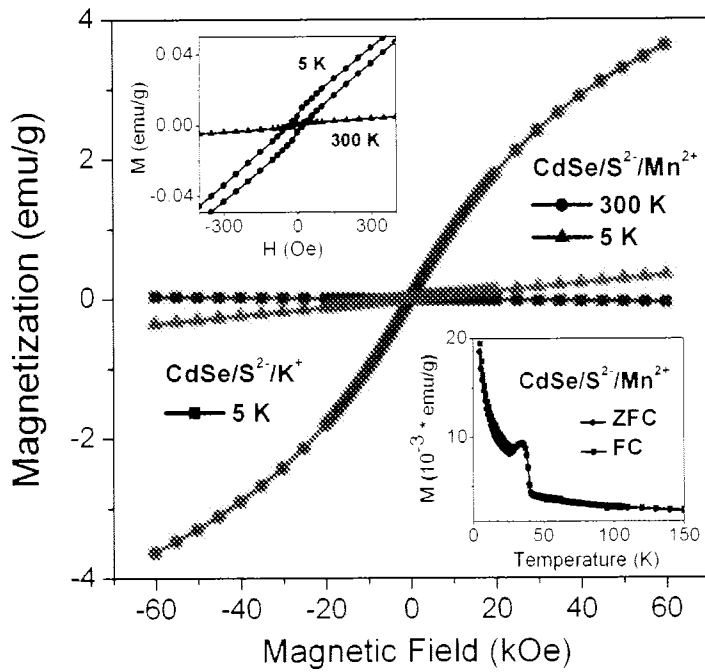


FIGURE 42

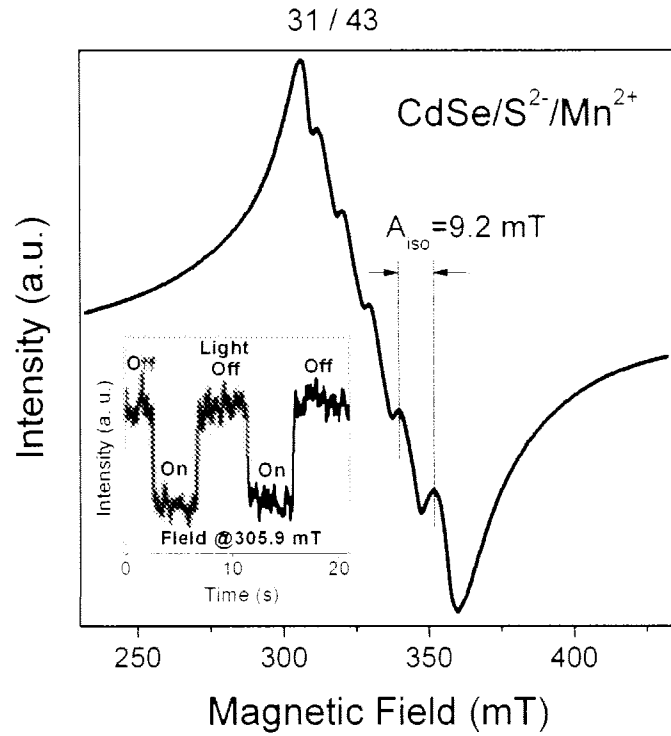


FIGURE 43

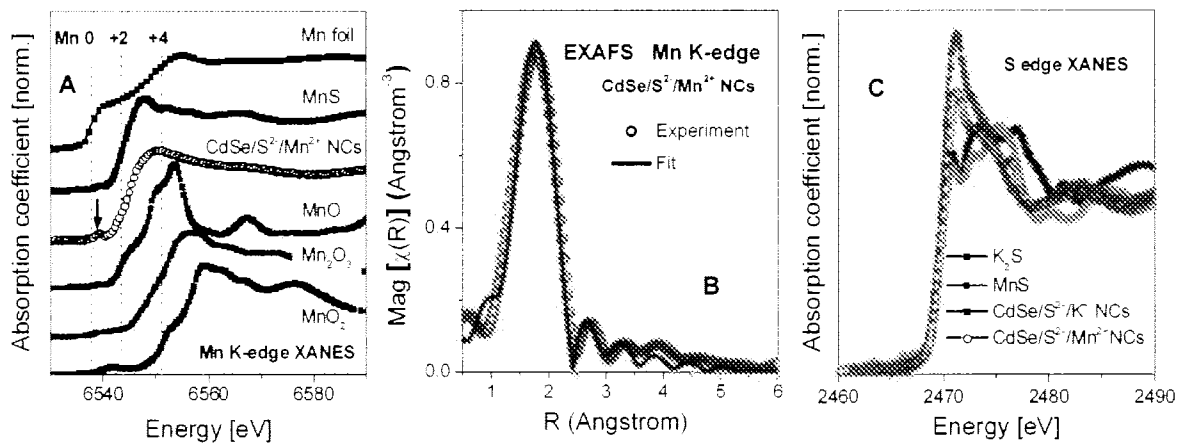


FIGURE 44

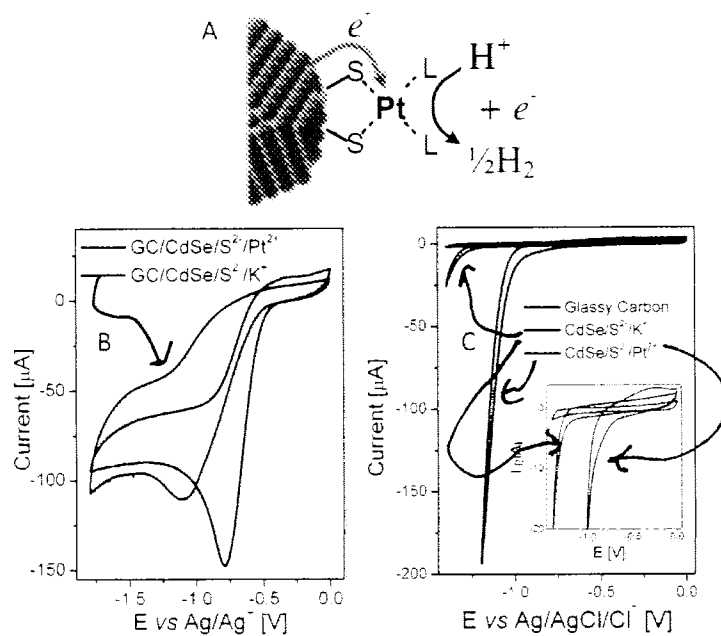


FIGURE 45

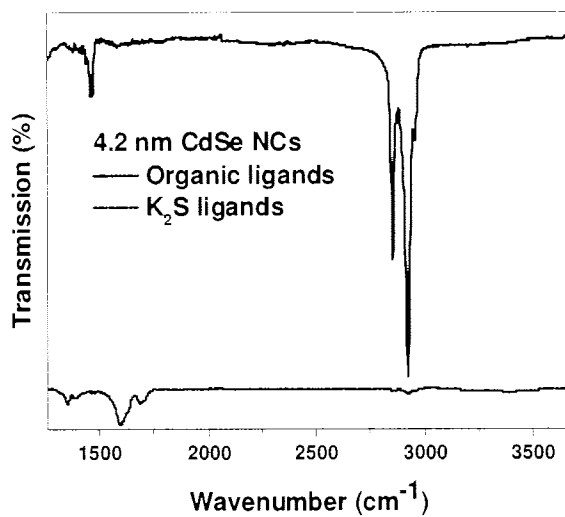


FIGURE 46

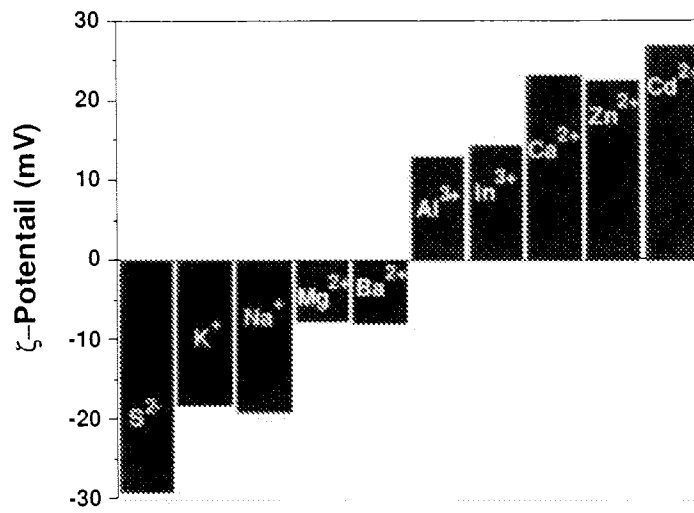


FIGURE 47

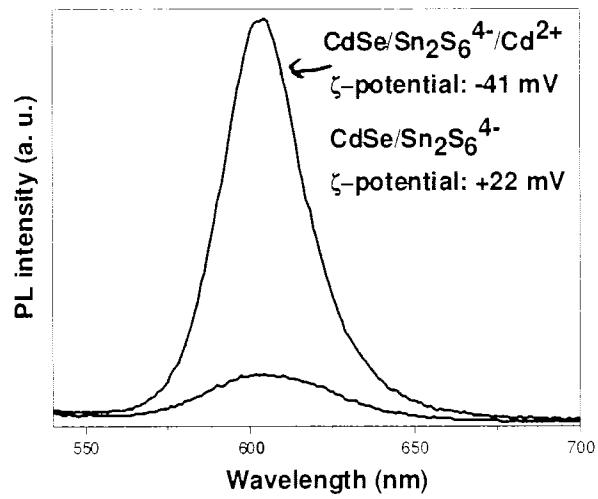


FIGURE 48

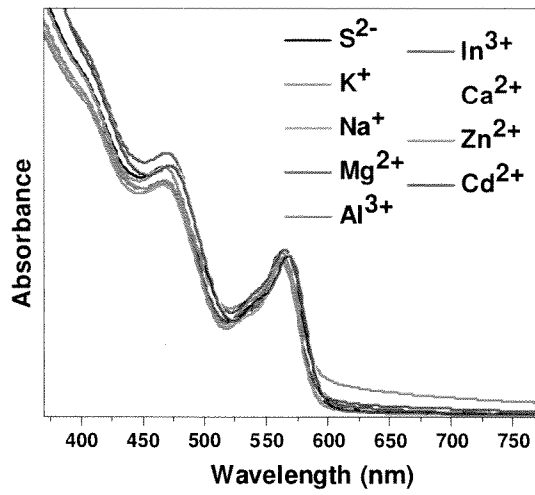


FIGURE 49

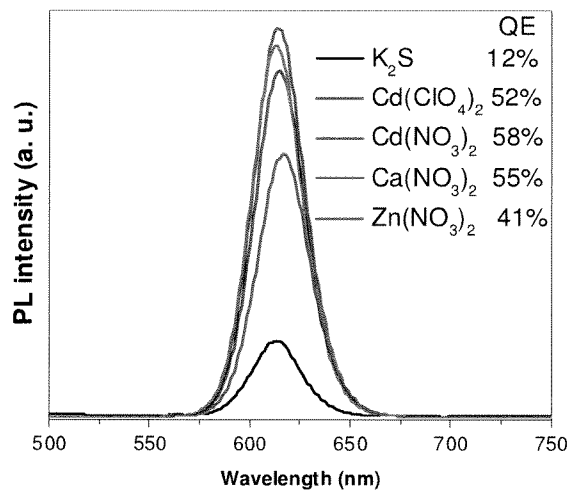


FIGURE 50

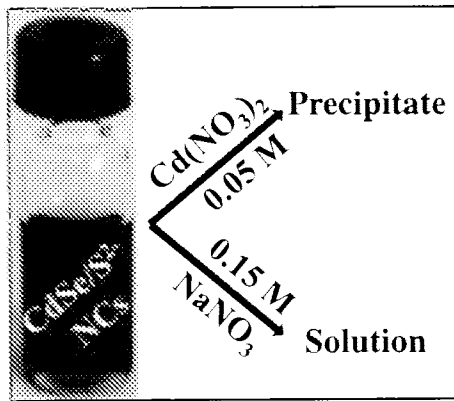


FIGURE 51

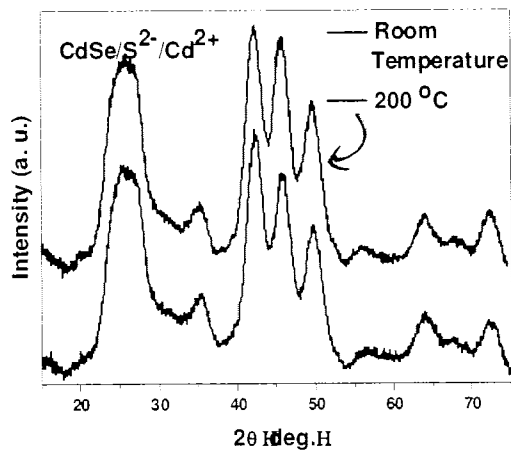


FIGURE 52

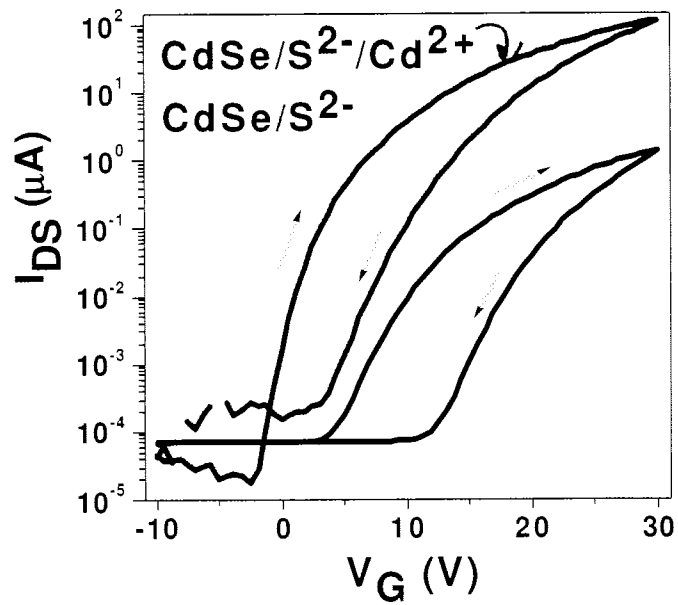


FIGURE 53

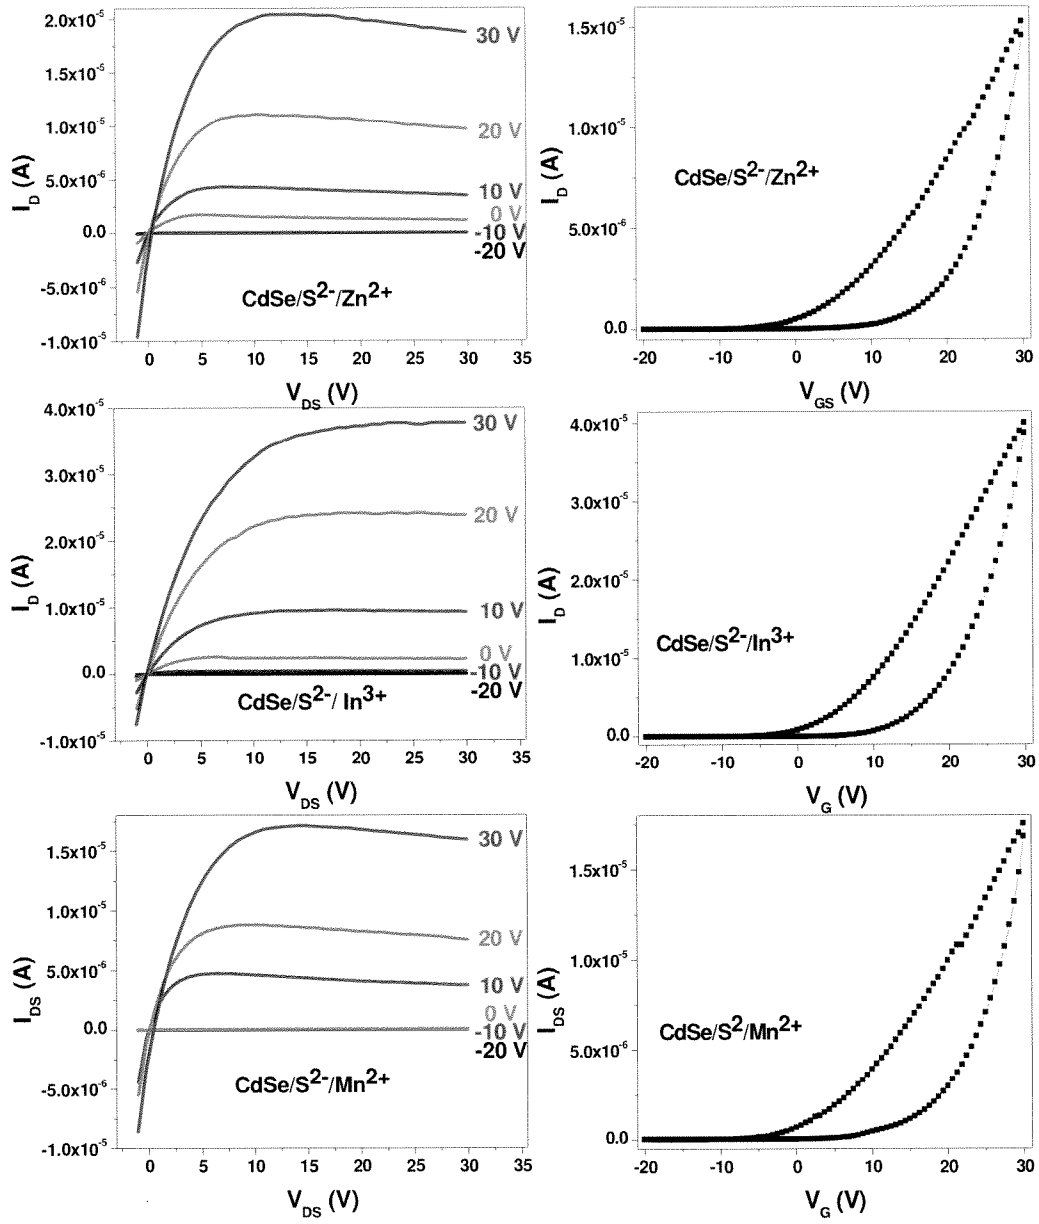


FIGURE 54

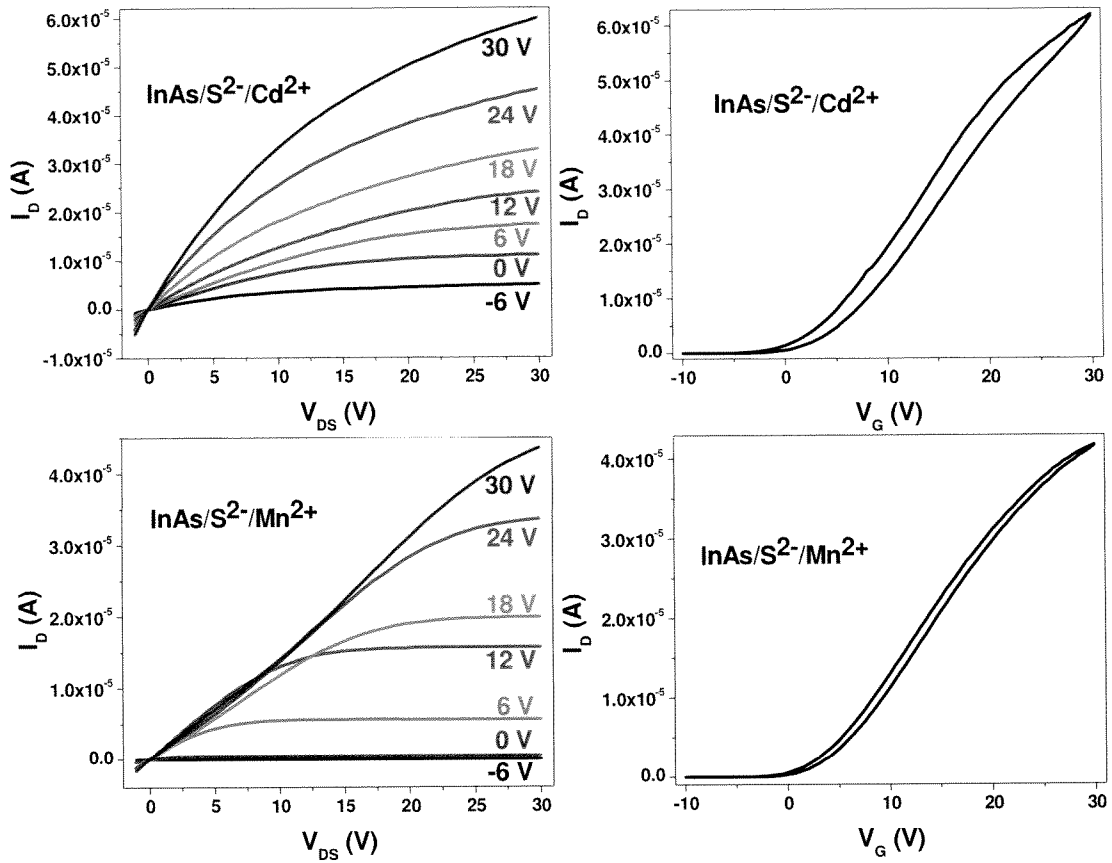


FIGURE 55

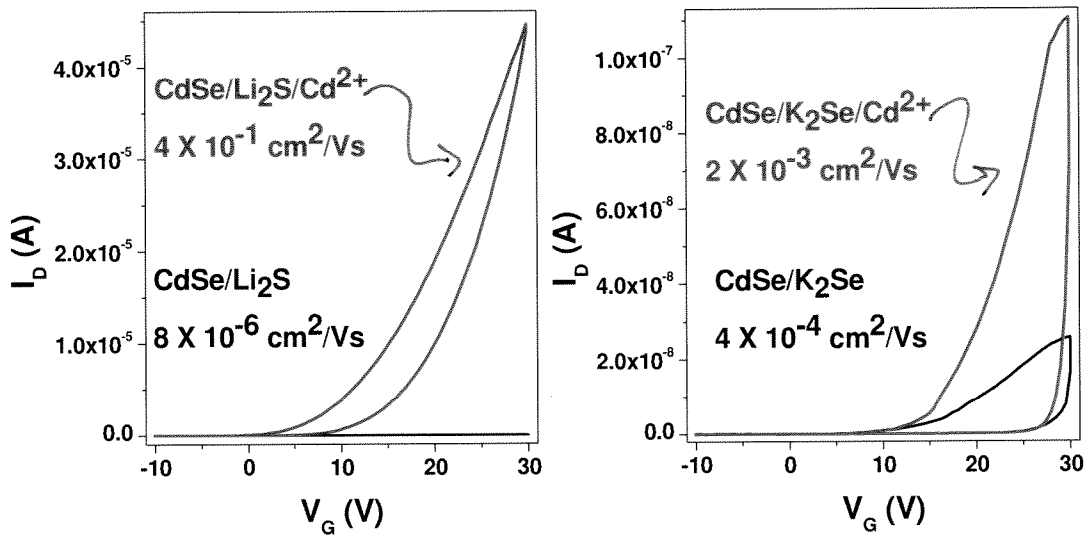


FIGURE 56

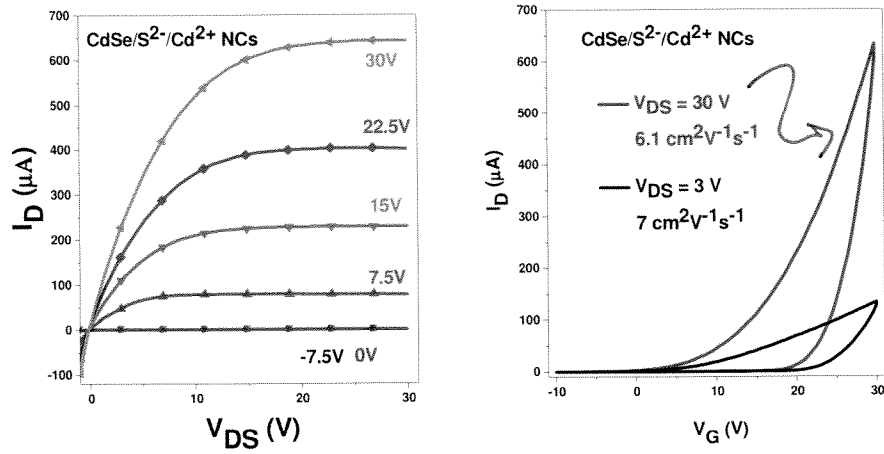


FIGURE 57

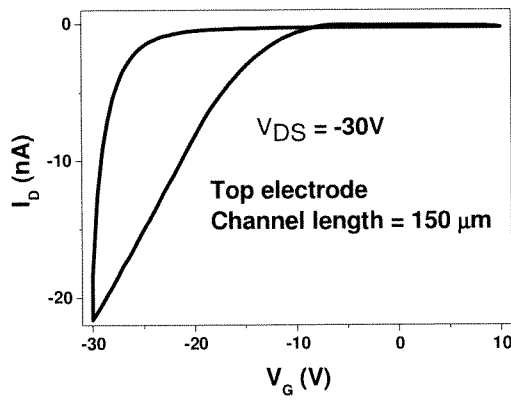


FIGURE 58

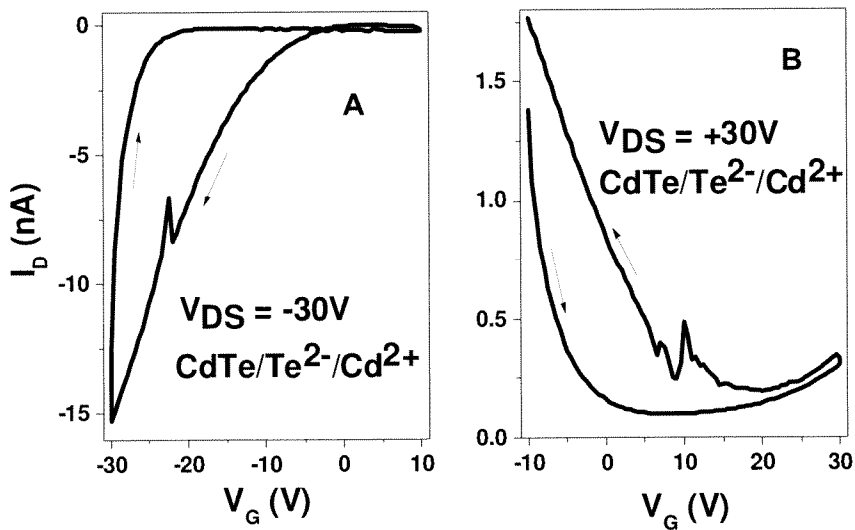


FIGURE 59

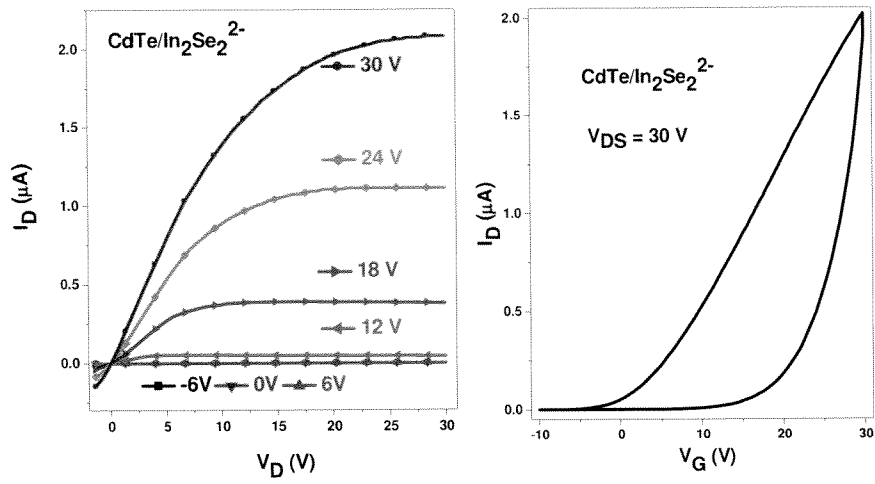


FIGURE 60

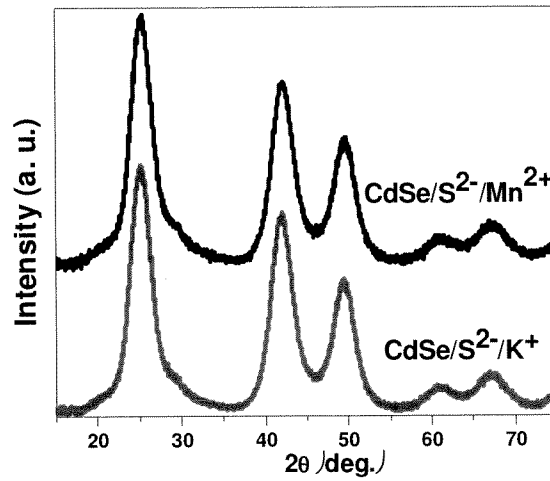


FIGURE 61

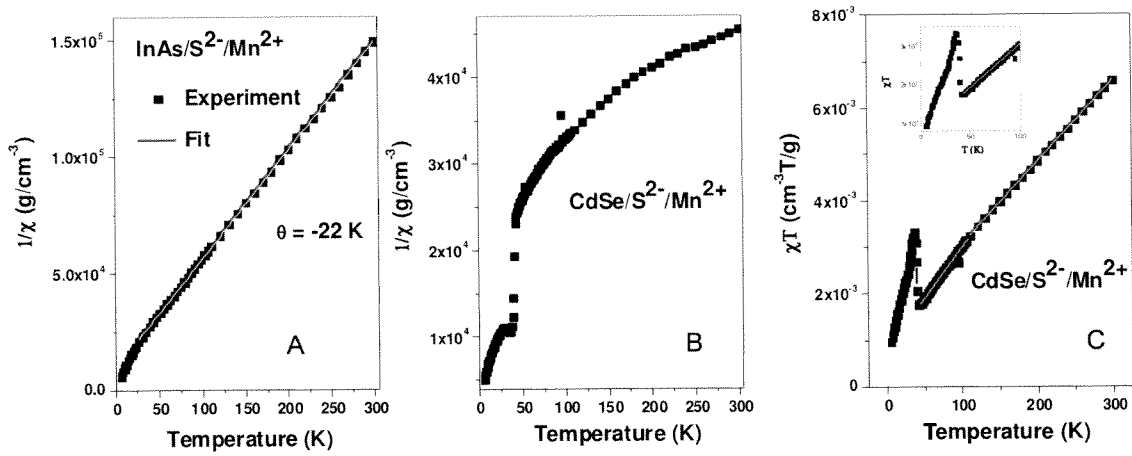


FIGURE 62

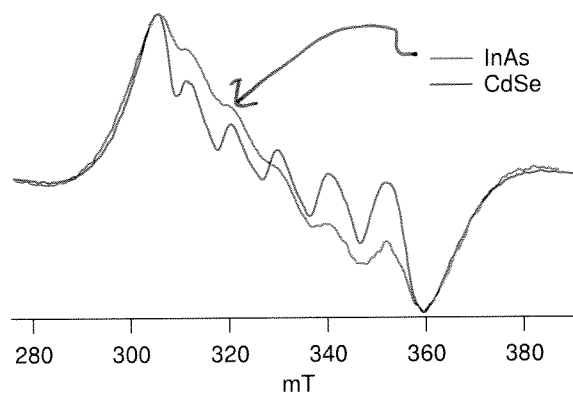


FIGURE 63

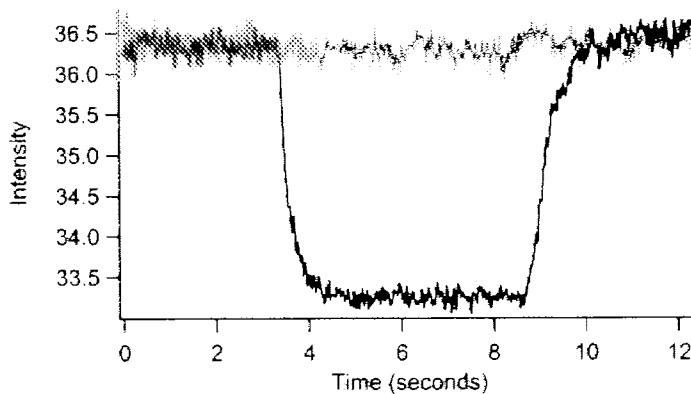


FIGURE 64

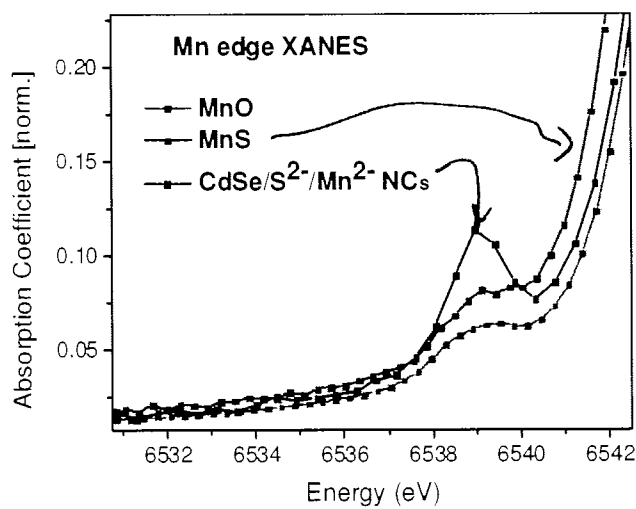


FIGURE 65

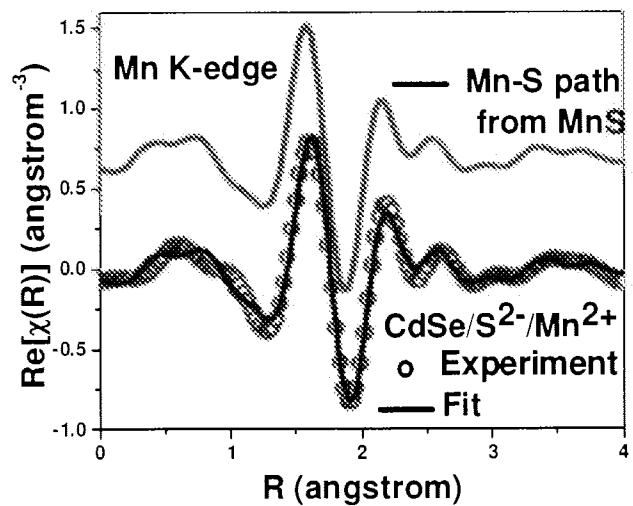


FIGURE 66

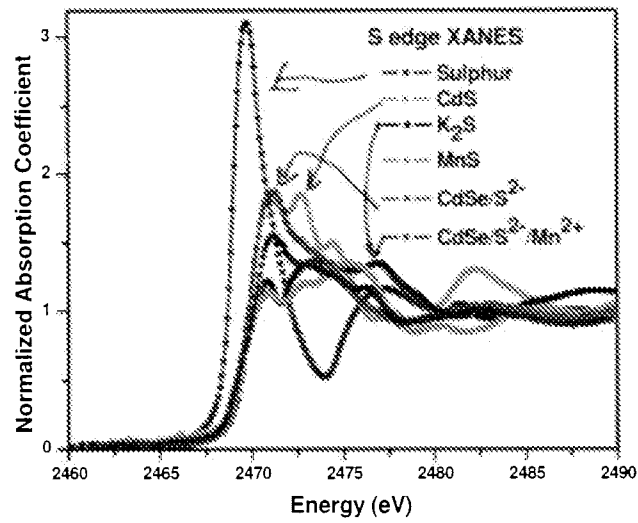


FIGURE 67

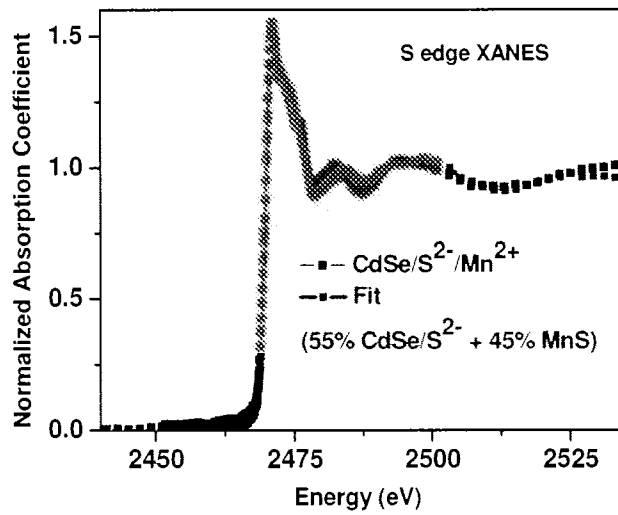


FIGURE 68

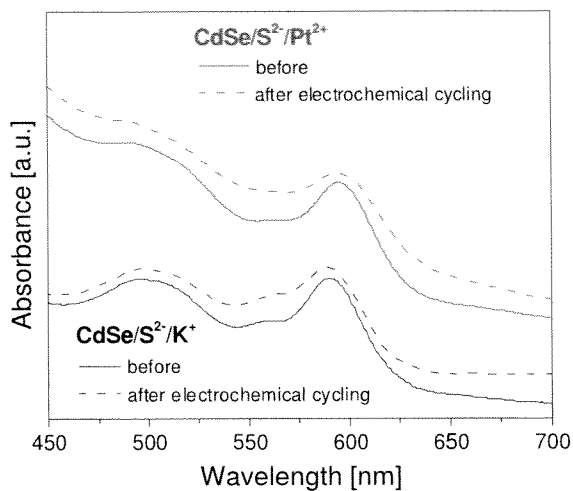


FIGURE 69

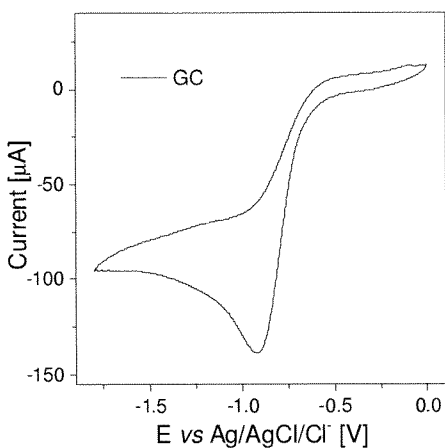


FIGURE 70

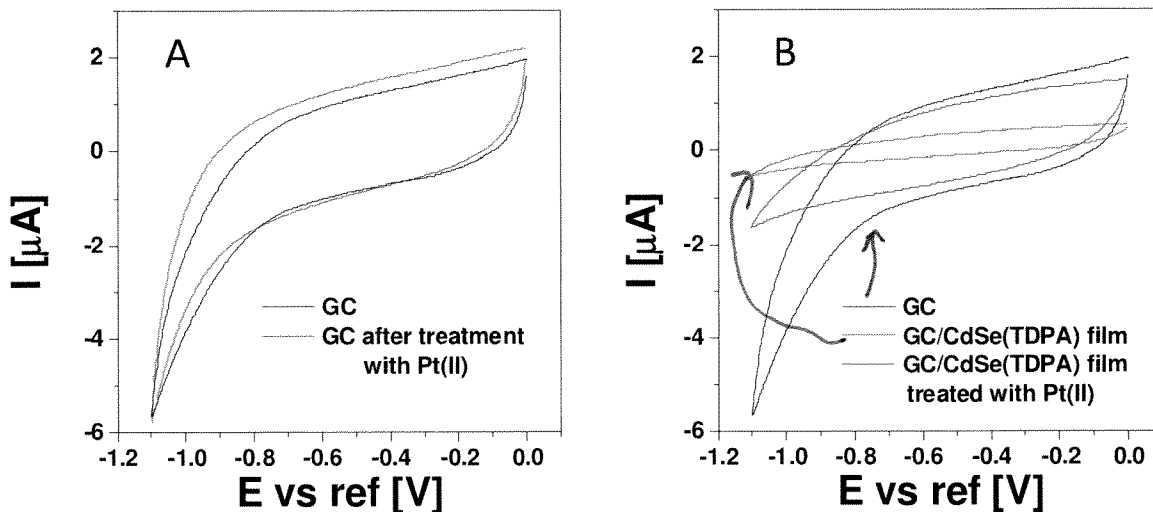


FIGURE 71