



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2204967 C 2006/08/01

(11)(21) **2 204 967**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 1997/05/09

(41) Mise à la disp. pub./Open to Public Insp.: 1997/11/10

(45) Date de délivrance/Issue Date: 2006/08/01

(30) Priorité/Priority: 1996/05/10 (DE196 18 775.3)

(51) Cl.Int./Int.Cl. *D04H 1/00* (2006.01),
D04H 13/00 (2006.01)

(72) Inventeurs/Inventors:
GROH, WERNER, DE;
PROFE, HANS-JURGEN, DE;
SCHOPS, MICHAEL, DE

(73) Propriétaire/Owner:
JOHNS MANVILLE INTERNATIONAL, INC., US

(74) Agent: BERESKIN & PARR

(54) Titre : DOUBLURE INTERIEURE DE BASE - FABRICATION ET UTILISATION

(54) Title: BASE INLINER, PRODUCTION THEREOF AND USE THEREOF

(57) **Abrégé/Abstract:**

Disclosed is a base inliner comprising a textile sheet material and a reinforcement, wherein said reinforcement absorbs a force so that, in a stress-strain diagram (at 20°C), the load at an elongation within the range between 0 and 1% differs by at least 10% at at least one location for said base inliner with said reinforcement compared with said base inliner without said reinforcement, preferably by at least 20%, particularly preferably by at least 30%. The base inliner is useful for producing optionally bituminized roofing and sealing membranes.



Abstract:

Base inliner, production thereof and use thereof

Disclosed is a base inliner comprising a textile sheet material and a reinforcement, wherein said reinforcement absorbs a force so that, in a stress-strain diagram (at 20°C), the load at an elongation within the range between 0 and 1% differs by at least 10% at at least one location for said base inliner with said reinforcement compared with said base inliner without said reinforcement, preferably by at least 20%, particularly preferably by at least 30%. The base inliner is useful for producing optionally bituminized roofing and sealing membranes.

HOECHST TREVIRA GMBH & CO KG

HOE 96/T 010

Dr.KD/PI

Description

5 Base inliner, production thereof and use thereof

The invention relates to a base inliner which is especially useful as base inliner for producing roofing membranes or as tarpaulin or sheet.

- 10 Base inliners for roofing membranes have to meet a wide variety of requirements. First, for instance, there is a need for adequate mechanical stability, such as good perforation resistance and good tensile strength, to withstand, for example, the mechanical stresses of further processing, such as bituminization or laying. In addition, there is a need for high
- 15 resistance to thermal stress, for example the thermal stress of bituminization, radiant heat and flying brands. There has therefore been no shortage of attempts to improve existing base inliners.

- For instance, it is already known to combine nonwovens based on
- 20 synthetic fiber webs with reinforcing fibers, for example with glass fibers. Examples of such sealing membranes may be found in GB-A-1,517,595, DE-U-77-39,489, EP-A-160,609, EP-A-176-847, EP-A-403,403 and EP-A-530,769. The fiber web and reinforcing fibers are joined together in this art either by adhering by means of a binder or by needling together the layers
- 25 composed of different materials.

- It is further known to produce composite materials by knitting or sew-knit techniques. Examples thereof may be found in DE-A-3,347,280, US-A-4,472,086, EP-A-333,602 and EP-A-395,548.

30

DE-A-3,417,517 discloses a textile interlining having anisotropic properties and a process for producing it. The interlining consists of a substrate which has a surface that melts below 150°C and reinforcing filaments that melt at

above 180°C, which are fixed to the surface in a parallel arrangement. In one embodiment, the substrate can be a nonwoven supporting, on one of its surfaces, fusible adhesive fibers or filaments provided for producing an adhesive bond between the parallel reinforcing fibers and the nonwoven.

5

US-A-4,504,539 discloses a combination of reinforcing fibers in the form of bicomponent fibers with nonwovens based on synthetic fibers.

10

EP-A-0,281,643 discloses a combination of reinforcing fibers in the form of a network of bicomponent fibers with nonwovens based on synthetic fibers, wherein the weight proportion of the network of bicomponent fibers is at least 15% by weight.

15

JP-A-81-5879 discloses a composite provided with a netlike reinforcing material.

20

GB-A-2,017,180 discloses a filter material composed of inorganic web material and metal wires, which is used for waste air cleaning at high temperatures (higher than 300°C).

25

DE-U-295 00 830 describes the reinforcement of a glass web with synthetic monofilaments. These reinforcing monofilaments do not contribute significantly to the load at low elongations in the sealing membrane. However, they have a distinctly higher ultimate tensile stress extension than the glass web; thus, the sheetlike integrity of the sealing membrane is ensured even in the event of deformations which can lead to the rupture of the glass web. The shrinkage of the synthetic monofilaments is higher than the shrinkage of the glass web and can lead to waviness in the sealing membrane.

30

DE-A-3,941,189 likewise discloses a combination of reinforcing fibers in the form of a yarn warp with nonwovens based on synthetic fibers, which

can be joined together in a wide variety of ways. It is emphasized in this reference that the Young's modulus of the reinforced base inliner does not change compared with an unreinforced base web.

5 However, there are a number of applications for which a high modulus at low elongations is desired at room temperature, too. This high modulus improves the handleability, especially in the case of lightweight nonwovens.

10 Depending on the requirements profile and also on cost considerations, the load at low elongations in the reinforced base inliner can be split in various ways between the textile sheet material and the reinforcements.

A suitable measure for how the load at a stated elongation is split is the
15 ratio of this load at a measuring temperature of 20°C to the load at 180°C.

Base inliners having a so defined ratio of 3.3, as described in DE-A-3,941,189, do not show any noticeable improvement in the load at stated elongation at room temperature.

20

It is an object of the present invention to develop a base inliner which has a distinctly improved load at low elongation over the entire temperature range.

25 Surprisingly, the load at elongations below 1% improves, significantly even at room temperature, when this ratio is less than 3 (three).

The present invention accordingly provides a base inliner comprising a textile sheet material and a reinforcement, wherein said reinforcement
30 absorbs a force so that, in a stress-strain diagram (at 20°C), the load at an elongation within the range between 0 and 1% differs by at least 10% at at least one location for said base inliner with said reinforcement compared

with said base inliner without said reinforcement, preferably by at least 20%, particularly preferably by at least 30%.

5 In addition, the reinforcement is such that the ratio, measured at at least one point, of the load at an elongation within the range between 0 and 1% for said inliner at room temperature (20°C) to said base inliner at 180°C is not more than 3 (three), preferably not more than 2.5, particularly preferably less than 2.

10 The term "textile sheet material" is herein used in its widest sense. It encompasses all structures formed from synthesized polymer fibers by a sheet-forming technique.

15 The terms "barb depth" and "kick-up" are defined in Groz-Beckert's 1994 brochure entitled "Felting Needles".

The load at stated elongation is measured in accordance with EN 29073 Part 3 on specimens 5 cm in width using a measuring length of 100 mm. The numerical value of the pretensioning force in centinewtons
20 corresponds to the numerical value of the basis weight of the specimen in grams per square meter.

Examples of such textile sheet materials are wovens, lays, knits and, preferably, webs.

25

Of the webs composed of fibers composed of synthetic polymers, spunbonded webs, spunbonds, which are produced by random laydown of freshly melt-spun filaments, are preferred. They consist of continuous filament synthetic fibers composed of melt-spinnable polymer materials.

30 Suitable polymer materials include for example polyamides, e.g. polyhexamethylenediadipamide, polycaprolactam, wholly or partly aromatic polyamides ("aramids"), aliphatic polyamides, e.g. nylon, partly or wholly

aromatic polyesters, polyphenylene sulfide (PPS), polymers having ether and keto groups, e.g. polyetherketones (PEKs) and polyetheretherketone (PEEK), or polybenzimidazoles.


- 5 The spunbonded webs preferably consist of melt-spinnable polyesters. The polyester material can in principle be any known type suitable for fibermaking. Such polyesters consist predominantly of building blocks derived from aromatic dicarboxylic acids and from aliphatic diols. Commonly used aromatic dicarboxylic acid building blocks are the bivalent
- 10 radicals of benzenedicarboxylic acids, especially of terephthalic acid and of isophthalic acid; commonly used diols have 2 to 4 carbon atoms, and ethylene glycol is particularly suitable. Spunbonded webs which are at least 85 mol % polyethylene terephthalate are particularly advantageous. The remaining 15 mol % are then composed of dicarboxylic acid units and
- 15 glycol units, which act as modifiers, so-called, and which enable the person skilled in the art to adjust the physical and chemical properties of the product filaments in a specific manner. Examples of such dicarboxylic acid units are the radicals of isophthalic acid or of aliphatic dicarboxylic acid such as, for example, glutaric acid, adipic acid, sebacic acid; examples of
- 20 modifying diol radicals are those of diols having longer chains, for example of propanediol or butanediol, of di- or triethylene glycol or, if present in a small amount, of polyglycol having a molecular weight of about 500 to 2000.
- 25 Particular preference is given to polyesters comprising at least 95 mol % of polyethylene terephthalate (PET), especially those composed of unmodified PET.

If the base liners of the invention are additionally to have a flame-

30 retardant effect, it is advantageous to spin them from polyesters which have been modified to be flame-retardant. Such flame-retardant modified polyesters are known. They comprise additions of halogen compounds,

especially bromine compounds, or, particularly advantageously, contain phosphorus compounds incorporated into the polyester backbone by cocondensation.

- 5 The spunbonded webs particularly preferably comprise flame-retardant modified polyesters containing, cocondensed in the backbone, units of the formula (I)

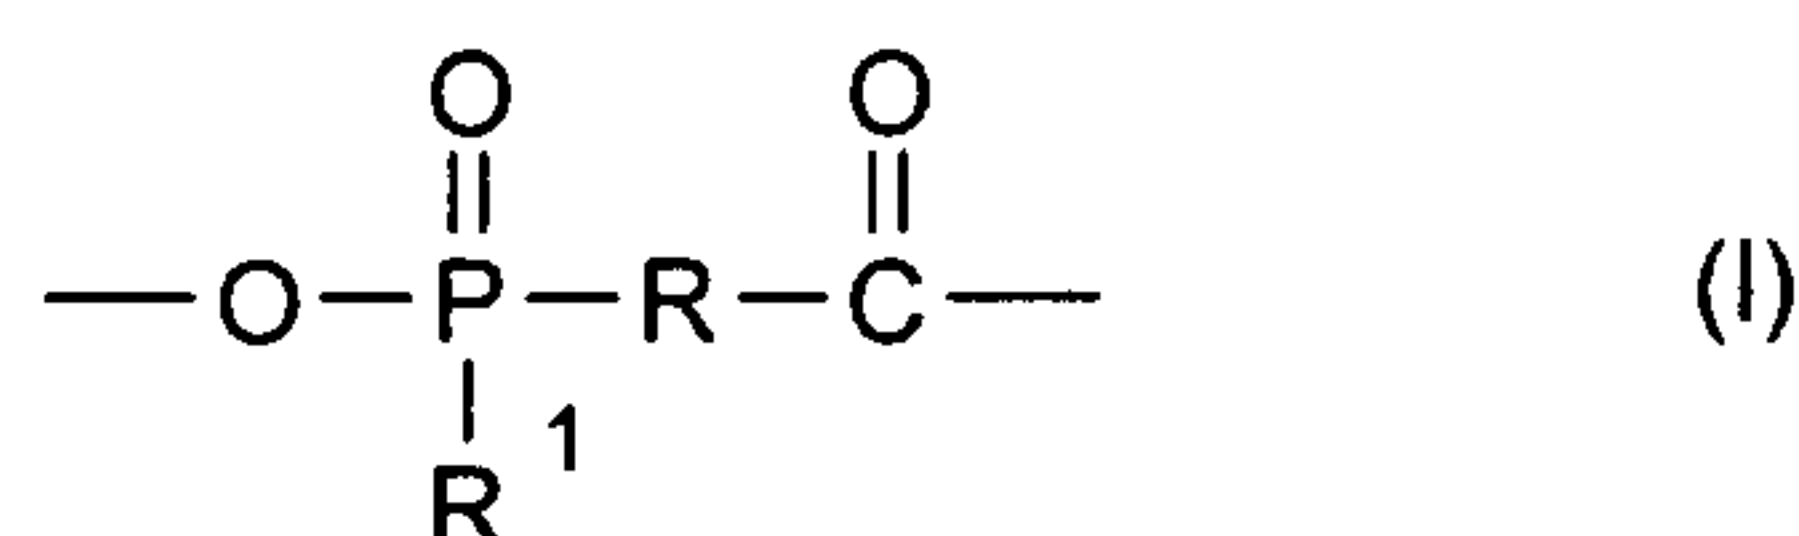

10

where R is alkylene or polymethylene having 2 to 6 carbon atoms or phenyl and R¹ is alkyl having 1 to 6 carbon atoms, aryl or aralkyl.

Preferably, in the formula (I), R is ethylene and R¹ is methyl, ethyl, phenyl or o-, m- or p-methylphenyl, especially methyl. Such spunbonded webs are
15 described in DE-A-39 40 713, for example.

20

The polyesters in the spunbonded web preferably have a molecular weight corresponding to an intrinsic viscosity (IV) of 0.6 to 1.4, measured in a solution of 1 g of polymer in 100 ml of dichloroacetic acid at 25 °C.

The polyester filaments in the spunbonded web have filament linear densities between 1 and 16 dtex, preferably 2 to 8 dtex.

25

In a further embodiment of the invention, the spunbonded web can also be a nonwoven which has been consolidated by means of a fusible binder, said nonwoven comprising loadbearing and fusible adhesive fibers. The loadbearing and fusible adhesive fibers can be derived from any desired thermoplastic fiber-forming polymers. Loadbearing fibers may in addition also be derived from nonmelting fiber-forming polymers. Such fusible
30 binder consolidated spunbonds are described for example in EP-A-0,446,822 and EP-A-0,590,629.

Examples of polymers from which the loadbearing fibers can be derived are polyacrylonitrile, polyolefins, such as polyethylene, essentially aliphatic polyamides, such as nylon-6,6, essentially aromatic polyamides (aramids), such as poly(p-phenyleneterephthalamide) or copolymers containing a
5 proportion of aromatic m-diamine units to improve the solubility or poly(m-phenyleneisophthalamide), essentially aromatic polyesters, such as poly(p-hydroxybenzoate) or preferably essentially aliphatic polyesters, such as polyethylene terephthalate.

10 The relative proportions of the two fiber types can be chosen within wide limits, although care has to be taken to ensure that the proportion of the fusible adhesive fibers is sufficiently high for the nonwoven to acquire a strength which is sufficient for the desired application as a result of the loadbearing fibers being adhered together by the fusible adhesive fibers.

15 The proportion in the nonwoven of fusible adhesive due to the fusible adhesive fiber is customarily less than 50% by weight, based on the weight of the nonwoven.

Suitable fusible adhesives include in particular modified polyesters having
20 a melting point which is 10 to 50°C, preferably 30 to 50°C, lower than that of the nonwoven raw material. Examples of such fusible adhesive are polypropylene, polybutylene terephthalate, and polyethylene terephthalate modified through incorporative cocondensation of longer-chain diols and/or of isophthalic acid or aliphatic dicarboxylic acids.

25

The fusible adhesives are preferably introduced into the webs in fiber form.

Loadbearing and fusible adhesive fibers are preferably composed of the same class of polymer. This is to be understood as meaning that all the
30 fibers used are selected from the same class of substances so that they can be readily recycled after use of the web. If the loadbearing fibers consist of polyester, for example, the fusible adhesive fibers are likewise

made of polyester or of a mixture of polyesters, for example as bicomponent fiber with PET in the core and a lower melting polyethylene terephthalate copolymer as sheath. In addition, however, it is also possible to use bicomponent fibers constructed from different polymers. Examples
5 are bicomponent fibers composed of polyester and polyamide (core/sheath).

The fiber linear densities of the loadbearing and the fusible adhesive fibers can be chosen within wide limits. Examples of customary linear density
10 ranges are 1 to 16 dtex, preferably 2 to 6 dtex.

If the flame-retardant base inliners of the invention are additionally bonded, they preferably comprise flame-retardant fusible adhesives. An example of the form a flame-retardant fusible adhesive can take in the layered product
15 of the invention is a polyethylene terephthalate modified by incorporation of chain members of the above-indicated formula (I).

The filaments or staple fibers of the nonwovens may have a virtually round cross-section or else another shape, such as dumbbell-shaped, kidney-shaped, triangular or tri- or multilobal cross-section. It is also possible to
20 use hollow fibers. Furthermore, the fusible adhesive fiber can also be used in the form of bicomponent fibers or fibers constructed from more than two components.

25 The fibers of the textile sheet material may be modified by customary additives, for example by antistats, such as carbon black.

The basis weight of the spunbonded web is between 20 and 500 g/m², preferably 40 and 250 g/m².
30

The foregoing properties are obtained for example by means of threads and/or yarns whose Young's modulus is at least 5 Gpa, preferably at least

10 Gpa, particularly preferably at least 20 Gpa. The aforementioned reinforcing threads have a diameter between 0.1 and 1 mm, preferably 0.1 and 0.5 mm, in particular 0.1 and 0.3 mm, and possess a breaking extension of 0.5 to 100%, preferably 1 to 60%. The base inliners of the invention particularly advantageously have a strain reserve of less than 1%.

The strain reserve is the strain which acts on the base inliner before the load is transferred to the reinforcing threads; that is, a strain reserve of 0% would mean that tensile forces acting on the base inliner would immediately be transferred to the reinforcing threads. Consequently, forces acting on the spunbonded web do not first cause an alignment or orientation of the reinforcing threads, but are on the contrary directly transferred to the reinforcing threads, so that damage to the textile sheet material can be avoided. This shows itself in particular in a steep increase in the force to be applied at low elongations (stress-strain diagram at room temperature). In addition, the ultimate tensile stress extension of the base inliner can be appreciably improved by means of suitable reinforcing threads, which have a high breaking extension. Examples of suitable reinforcing threads are high tenacity monofilaments composed of polyester and wires composed of metals or metallic alloys whose breaking extension is at least 10%.

Preferred reinforcing threads are multifilaments and/or monofilaments based on aramids, preferably high modulus aramids, carbon, glass, high tenacity polyester monofilaments and also hybrid multifilament yarns (yarns comprising reinforcing fibers and lower melting binding fibers) or wires (monofilaments) composed of metals or metallic alloys.

Preferred reinforcements consist of glass multifilaments in the form of sheets of parallel threads or in the form of lays for economic reasons. Usually, the nonwovens are only reinforced in the longitudinal direction, by

sheets of parallel threads.

The reinforcing threads can be used as such or else in the form of a textile sheet material, for example as a woven, lay, knit or web. Preference is
5 given to reinforcements with mutually parallel reinforcing yarns, i.e. warp-thread sheets, and to lays or wovens.

The thread count can vary within wide limits as a function of the desired property profile. The thread count is preferably between 20 and 200
10 threads per meter. The thread count is measured perpendicularly to the thread running direction. The reinforcing threads are preferably supplied during the formation of the spunbonded web and thus become embedded in the spunbonded web. Preference is similarly given to a web laydown onto the reinforcement or to a subsequent layer formation from
15 reinforcement and nonwoven by assembling.

After production, the spunbonded webs are customarily subjected to chemical or thermal and/or mechanical consolidation in known manner. The spunbonded webs are preferably consolidated mechanically by
20 needling. For this, the spunbonded web, which advantageously already comprises the reinforcing threads, is customarily needled using a needling density of 20 to 100 stitches/cm². The needling is advantageously effected by means of needles whose kick-up, preferably the sum total of kick-up and barb depth, is less than the diameter of the reinforcing threads. This
25 prevents damage to the reinforcing threads. Subsequently, the spunbonded webs which already comprise reinforcing threads are subjected to further consolidation steps, for example to a thermal treatment.

30 For this, the spunbonded webs which, as well as loadbearing fibers, comprise fusible binding fibers are thermally consolidated in a conventional manner using a calender or in an oven.

If the spunbonded webs do not comprise binding fibers capable of thermal consolidation, these spunbonded webs are impregnated with a chemical binder. Acrylate binders are suitable for this purpose, in particular. The binder content is advantageously up to 30% by weight, preferably 2 to 25%
5 by weight. The precise choice of binder is made according to the specific requirements of the subsequent processor. Hard binders permit high processing speeds for an impregnation, especially bituminization, whereas a soft binder provides particularly high values of tear and nail pullout resistance.

10

In a further embodiment, flame-retardant modified binders can be used, also.

In a further embodiment of the invention, the base material of the invention
15 exhibits an embossed pattern of randomly distributed or regularly arranged, small-area embossments, preferably a plain-weave embossment in which the embossed area, i.e. the totality of all thin densified areas of the spunbonded web, accounts for 30 to 60%, preferably 40 to 45%, of its total area and the thickness of the densified areas of the web is at least
20 20%, preferably 25 to 50%, of the thickness of the undensified areas of the web. This embossed pattern is advantageously applied in the course of a calender consolidation in the case of spunbonded webs consolidated with a fusible binder. If the base inliner is end-consolidated by means of a chemical binder, the embossed pattern can likewise be impressed by
25 means of a calender. This embossed pattern, which is applied upon both surfaces of the spunbonded web, but preferably only upon one surface of the spunbonded web, as it passes through a heated calender, comprises a multiplicity of small embossments which are 0.2 to 40 mm², preferably 0.2 to 10 mm², in size and are separated from one another by unembossed
30 aerial elements of the web which are located in between and of roughly the same size. The determination of the total area of the densified areas of the web and of the total area of the undensified areas of the web can be

effected by means of cross-sectional micrographs, for example.

The base liners of this invention can be combined with further textile sheet materials, so that their properties can be varied. Such composites as
5 comprise the base inliner of the invention likewise form part of the subject-matter of this invention.

The reinforcement can be supplied before, during and/or after the formation of the textile sheet.

10

The production of the base inliner of the invention involves the conventional measures of

- a) forming a textile sheet material,
 - b) providing the reinforcement,
 - 15 c) optionally providing a further textile sheet material so that the reinforcement is surrounded by textile sheet materials in sandwich fashion,
 - d) consolidating the base inliner obtained as per measure c),
 - e) optionally impregnating the base inliner consolidated as per d) with
20 a binder, and
 - f) optionally consolidating the intermediate obtained as per d) by means of elevated temperature and/or pressure, in which process the order of steps a) and b) may also be reversed.
- 25 The process of this invention comprises performing the providing of the reinforcement and each thermal treatment in the base inliner production process under tension, preferably under longitudinal tension. A thermal treatment under tension is present when the position of the reinforcement in the base inliner remains unchanged during a thermal step; of particular
30 interest is the preservation of the longitudinal ends through application of a longitudinal tension. The textile sheet material is formed on a reinforcement which is provided under tension, or the reinforcement is

provided during the sheet-forming process, for example in the course of the formation of the web, leading to the textile sheet, or a textile sheet material can be formed and be joined to a reinforcement by subsequent assembling. The joining of the textile sheet material to the reinforcement
5 can be effected by means of conventional measures, for example by needling or adhering including fusible adhering. The advantages of the process are particularly manifest in the production of needled base inliners.

The formation of a textile sheet material as per a) can be effected by
10 spunbond formation by means of conventional spinning apparatus.

For this, the molten polymer is fed through a plurality of consecutive rows of spinnerets, or groups of spinneret rows are supplied with polymers. If a spunbonded web consolidated by means of a fusible binder is to be
15 produced, polymers to form the loadbearing fiber and the fusible adhesive fibers are supplied alternately. The spun polymer streams are stretched in a conventional manner and, for example by means of a rotating impact plate, laid down on a transport belt in scattered texture.

20 To meet special requirements, for example fire protection or extreme thermomechanical stress, the base inliners of the invention can be combined with further components to form multilayered composite materials. Examples of further components are glass webs, thermoplastic films, metallic foils, insulants, etc.

25

The base inliners of the invention are useful for producing bituminized roofing and sealing membranes. This likewise forms part of the subject-matter of the present invention. To this end, the base material is treated with bitumen in a conventional manner and then optionally besprinkled with
30 a granular material, for example with sand. The roofing and sealing membranes produced in this way are notable for good processibility. The bituminized membranes comprise at least one above-described base

material embedded in a bitumen matrix, the weight of the bitumen preferably accounting for 40 to 90% by weight of the basis weight of the bituminized roofing membrane and the spunbonded web for 10 to 60% by weight. The contemplated membranes also include roofing underfelts.

5

Instead of bitumen it is also possible to use some other material, for example polyethylene or polyvinyl chloride, to coat the base inliner of the invention.

10 Example 1

Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 2 m in width. During laydown, steel wires are continuously provided in the longitudinal direction with a spacing of 2 cm (50 wires/m). The wires (from Bekaert) are supplied on spools and have a diameter of 0.18 mm, a strength of 2300 N/mm² and a breaking extension of 1.5%.

15

The web/wires composite is needled together with 40 stitches/cm² to a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylate binder whose weight proportion is 20% in the finished web. The binder is cured in a perforated drum oven at 210°C. This affords a reinforced web having a basis weight of 190 g/m².

20

The load at stated elongation values of the web were measured at ambient temperature (20°C) with and without reinforcement, with the following results:

25

	Elongation %	Web without reinforcement	Web with reinforcement
		(N/5 cm)	(N/5 cm)
5	0.6	100	159
	0.8	129	208
	1.0	170	266
	1.2	191	302
	1.4	210	332
	1.6	230	240
10	1.8	240	245
	2	252	255
	4	305	305
	6	337	340

15 Example 2

Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 1 m in width. During laydown, steel wires (No. 1.4301) are continuously provided in the longitudinal direction with a spacing of 6.7 mm (150 wires/m).

20 The wires (from Sprint Metal) are supplied on spools and have a diameter of 0.15 mm, a strength of 14 N and a breaking extension of 34%.

The web/wires composite is needled together with 40 stitches/cm² to a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylate binder whose weight proportion is 20% in the finished web. The binder is cured in a perforated drum oven at 210°C. This affords a reinforced web having a basis weight of 165 g/m².

The load at stated elongation values of the web were measured at ambient temperature (20°C) with and without reinforcement, with the following results:

	Elongation	Web without reinforcement	Web with reinforcement
	%	(N/5 cm)	(N/5 cm)
5	0.6	77	117
	1.0	120	163
	1.6	200	244
	2	220	266
	4	285	337
	6	330	388
10	10	385	453
	15	440	518
	20	515	598
	25	577	664
	30	638	727

15

This Example clearly shows that the web strength is improved not only in the low elongation range but also at high elongation.

Example 3

20 Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 2 m in width. During laydown, wires consisting of an alloy of type CuZn37 are continuously provided in the longitudinal direction with a spacing of 2 cm (50 wires/m). The wires (from J.G. Dahmen) are supplied on bobbins and have a
25 diameter of 0.25 mm, a strength of 47 N and a breaking extension of 1.4%.

The web/wires composite is needled together with 40 stitches/cm² to a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylic binder whose weight proportion is
30 20% in the finished web. The binder is cured in a perforated drum oven at 210°C. This affords a reinforced web having a basis weight of 192 g/m².

The load at stated elongation values of the web were measured at ambient temperature (20°C) with and without reinforcement, with the following results:

5	Elongation %	Web without reinforcement (N/5 cm)	Web with reinforcement (N/5 cm)
	0.6	100	160
	0.8	129	203
	1.0	170	257
	1.2	191	287
10	1.4	210	310
	1.6	230	235
	2	252	255
	4	305	300

15

Example 4

Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 2 m in width. During laydown, wires consisting of an alloy of type CuSn6 are continuously provided in the longitudinal direction with a spacing of 1.2 cm (83 wires/m). The wires (from J.G. Dahmen) are supplied on bobbins and have a diameter of 0.25 mm, a strength of 21 N and a breaking extension of 54%.

The web/wires composite is needled together with 40 stitches/cm² to a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylic binder whose weight proportion is 20% in the finished web. The binder is cured in a perforated drum oven at 210°C. This affords a reinforced web having a basis weight of 165 g/m².

The load at stated elongation values of the web was measured at ambient temperature (20°C) with and without reinforcement, with the following results:

	Elongation %	Web without reinforcement	Web with reinforcement
		(N/5 cm)	(N/5 cm)
5	0.6	77	120
	1.0	120	162
	1.6	200	244
	2	220	264
	4	285	332
10	6	330	381
	10	385	442
	20	515	582
	25	577	647
	30	638	710

- 15 This Example clearly shows that the web strength is improved not only in the low elongation range but also at high elongation.

Example 5

20 Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 2 m in width. During laydown, wires consisting of an alloy of type CuZn37 are continuously provided in the longitudinal direction with a spacing of 2 cm (50 wires/m). The wires (from J.G. Dahmen) are supplied on bobbins and have a diameter of 0.25 mm, a strength of 25 N and a breaking extension of 15%.

25

The web/wires composite is needled together with 40 stitches/cm² to a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylic binder whose weight proportion is 20% in the finished web. The binder is cured in a perforated drum oven at 30 210°C. This affords a reinforced web having a basis weight of 160 g/m².

The load at stated elongation values of the web were measured at ambient temperature (20°C) with and without reinforcement, with the following results:

5	Elongation %	Web without reinforcement (N/5 cm)	Web with reinforcement (N/5 cm)
	0.6	77	114
	1.0	120	165
	1.6	200	247
10	2	220	267
	4	285	334
	6	330	380
	10	385	436
15	15	440	493

Example 6

Polyethylene terephthalate (PET) ends are produced with a filament linear density of 4 dtex and laid down to form a random web 1 m in width.

20 During laydown, glass multifilaments of the type EC 934T6Z28 from Vetrotex are provided in the longitudinal direction with a spacing of 6.25 mm (160 ends per meter). The glass yarns are supplied on bobbins and have a strength of 20 N and a breaking extension of 2.5%.

The composite of web and yarn is needled together with 40 stitches/cm² to
 25 a penetration depth of 12.5 mm using needles of the type Foster 15x18x38x3 CB and then impregnated with an acrylate binder whose weight proportion is 20% in the finished web. The binder is cured in a perforated drum oven at 210°C. This affords a reinforced web having a basis weight of 110 g/m². The load at stated elongation values of the web
 30 were measured at ambient temperature (20°C) with and without reinforcement, with the following results:

5

10

Elongation %	Web without reinforcement (N/5 cm)	Web with reinforcement (N/5 cm)
0.5	2	39
1.0	5.5	78
2	11	151
3	16	30
4	22	25
6	31	30
10	44	42
15	67	70
20	100	106
30	172	167
60	390	380

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A base inliner comprising a textile sheet material and a reinforcement, wherein said reinforcement absorbs a force so that, in a stress-strain diagram (at 20°C), an applied load needed to generate an elongation of the base inliner within the range between 0 and 1% is at least 10% greater than an applied load needed to generate the same elongation of said base inliner without said reinforcement at at least one value of elongation within the range of 0 to 1%.
2. The base inliner of claim 1, wherein, in a stress-strain diagram (at 20°C), the applied load needed to generate an elongation within the range between 0 and 1% is at least 20% greater than the applied load needed to generate the same elongation of said base inliner without said reinforcement at at least one value of elongation within the range of 0 to 1%.
3. The base inliner of claim 2, wherein, in a stress-strain diagram (at 20°C), the applied load needed to generate an elongation within the range between 0 and 1% is at least 30% greater than the applied load needed to generate the same elongation of said base inliner without said reinforcement at at least one value of elongation within the range of 0 to 1%.
4. A base inliner comprising a textile sheet material and a reinforcement, wherein the ratio of the load at a stated elongation, measured at at least one point within the range between 0 and 1%, for said inliner at room temperature (20°C) to said base inliner at 180°C is not more than 3.
5. The base inliner of claim 1 or 4, wherein the textile sheet material is a spunbonded web.

6. The base inliner of claim 5, wherein the spunbonded web is composed of polyester.
7. The base inliner of claim 5 or 6, wherein said spunbonded web has been consolidated by a method including at least one of the group consisting of: mechanically, thermally and chemically.
8. The base inliner of claim 7, wherein said reinforcement is present in the form of reinforcing threads and said spunbonded web has been mechanically consolidated by needling.
9. The base inliner of claim 8, wherein one of a kick-up and a sum - total of kick-up and barb depth is less than the diameter of the reinforcing threads.
10. The base inliner of claim 6, wherein the polyester is at least 85 mol % polyethylene terephthalate.
11. The base inliner of claim 7, wherein said spunbonded web has been consolidated by means of a fusible binder.
12. The base inliner of claim 7, wherein said spunbonded web has been consolidated by means of a chemical binder.
13. The base inliner of claim 1 or 4, wherein the basis weight of said textile sheet material is between 20 and 500 g/m².
14. The base inliner of claim 1 or 4, wherein said reinforcement is present in the form of reinforcing threads whose diameter is 0.1 to 1 mm and whose Young's modulus is at least 5 Gpa.
15. The base inliner of claim 14, wherein said reinforcing threads have a diameter of 0.1 to 0.5 mm.
16. The base inliner of claim 14, wherein said reinforcing threads have a breaking extension of 0.5 to 100%.

17. The base inliner of claim 14, characterized by a strain reserve of less than 1%.
18. The base inliner of claim 1 or 4, wherein said reinforcement is present in the form of reinforcing threads composed of one or the group consisting of: monofilaments and multifilaments.
19. The base inliner of claim 18, wherein said reinforcing threads consist of at least one of the group consisting of: aramids, carbon, glass, high tenacity polyester monofilament, hybrid multifilaments, metal and metallic alloys.
20. The base inliner of claim 1 or 4, wherein said reinforcement is present in the form of one of the group consisting of: a woven, lay, knit, film and web.
21. The base inliner of claim 6, wherein said spunbonded polyester web has an embossed pattern.
22. A process producing the base inliner defined in claim 1, comprising the steps of:
 - a) forming a textile sheet material,
 - b) providing the reinforcement,
 - c) providing a further textile sheet material so that the reinforcement is surrounded by textile sheet materials in sandwich fashion, and
 - d) consolidating the base inliner obtained in step c).
23. The process of claim 22, further comprising the step of: impregnating the consolidated base inliner with a binder.
24. The process of claim 23, further comprising the step of: consolidating the base inliner obtained in step d) by means of at least one of

elevated temperature and pressure, and wherein the providing and consolidating steps are performed under tension.

25. The process of claim 24, wherein the providing and consolidating steps are performed under longitudinal tension.
26. The process of claim 22, wherein the textile sheet material is formed on a reinforcement which is provided under tension.
27. The process of claim 22, wherein the reinforcement is provided during the sheet-forming process leading to the textile sheet.
28. The process of claim 22, wherein at least one completed textile sheet material and at least one reinforcement are assembled and joined together by at least one of the group consisting of: needling and adhering.
29. The process of claim 22, wherein step d) is effected by needling and one of a kick-up and a sum - total of kick-up and barb depth of the needles is less than the diameter of the reinforcing threads.
30. The process of claim 22, wherein step d) is effected by adhering.
31. Use of the base inliner of claim 1 for producing composite materials.
32. The use of claim 31, wherein the composite materials include roofing and sealing membranes.
33. Use of the base inliner of claim 1 for producing bituminized roofing and sealing membranes.
34. A composite material comprising the base inliner of claim 1 or 4.
35. A roofing membrane comprising the base inliner of claim 1 or 4.
36. A sealing membrane comprising the base inliner of claim 1 or 4.