

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 April 2009 (09.04.2009)

PCT

(10) International Publication Number
WO 2009/046355 A1

(51) International Patent Classification:
B01J 19/12 (2006.01)

(21) International Application Number:
PCT/US2008/078825

(22) International Filing Date: 3 October 2008 (03.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/973,170 5 October 2007 (05.10.2007) US
12/244,648 2 October 2008 (02.10.2008) US

(71) Applicant (for all designated States except US): **REALM INDUSTRIES** [US/US]; 2470 Stearns Street 359, Simi Valley, CA 93063 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STEHL, William** [US/US]; 2470 Stearns Street 359, Simi Valley, CA 93063 (US). **LARSON, Tyson** [US/US]; 4417 Presidio Drive, Simi Valley, CA 93063 (US).

(74) Agent: **CISLO, Daniel, M.**; Cislo & Thomas, LLP, 1333 2nd Street, Suite 500, Santa Monica, CA 90401-4110 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: METHOD OF AND APPARATUS FOR MODIFYING BOND ANGLES OF MOLECULES AND APPLICATIONS THEREOF

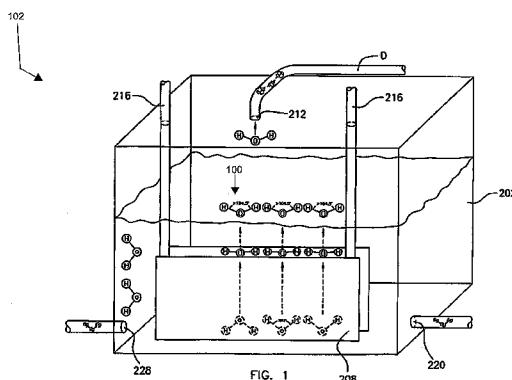

(57) **Abstract:** An apparatus 102 and method for converting fluid molecules from a liquid state into a vapor state wherein the fluid has unnatural bond angles. The apparatus 102 comprises a resistor-capacitor (RC) circuit, a chamber 202 to contain the RC circuit and the fluid and a power source 210 to provide power to the RC circuit. The RC circuit comprises an anode 204, a cathode 206 and a plurality of substantially parallel electrically conductive plates 208. Current through the RC circuit generates a frequency that modifies the bond angles of molecules in a vapor state. Ignition of these molecules with unnatural bond angles 100 reverts the molecules back to normal bond angles with a release of energy that can be utilized in many different applications without the release of toxic or noxious gases, greenhouse gases or any interaction with the atmosphere or the consumption of any atmospheric oxygen. For example, the molecules with unnatural bond angles 100 may be used in engines 1400 to power a motorized vehicle 1800.

WO 2009/046355 A1

METHOD OF AND APPARATUS FOR MODIFYING BOND ANGLES OF MOLECULES AND APPLICATIONS THEREOF

TECHNICAL FIELD

[0001] This invention relates to motorized vehicles, specifically automobiles powered by an energy source other than conventional fuels, such as gasoline, diesel, alcohol, hydrogen, and the like.

BACKGROUND ART

[0002] Alternative sources of fuel have been the subject of concern for many years due to the limited practical energy resources and the dangerous byproducts produced. Currently, over 70% of the energy generated comes from fossil fuels. These fossil fuels are converted to oil and natural gas. The burning of oil and natural gas leads to the production of electrical energy with carbon dioxide and other toxic gases released as the byproduct. The production of carbon dioxide is purported to be involved in the greenhouse effect.

[0003] A significant source of toxic gases, such as hydrocarbons, nitrogen oxides, carbon monoxide, and carbon dioxide, released into the air is from automobiles burning gasoline. To combat these toxic emissions, alternative sources of fuel have been investigated. Ethanol has been used alone or mixed with gasoline to reduce reliance on gasoline; however, energy production is lower than gasoline alone and production can be time consuming. Electric cars eliminate toxic byproducts, but power output is also low and charging stations, like gasoline stations would be required. Hydrogen powered cars have been under development, but pose a danger due to the explosiveness of hydrogen.

[0004] Thus, there is a need for a safe, renewable, alternative fuel to power motorized vehicles that can be quickly and easily produced, is easy and safe to use, and is cost-effective.

SUMMARY

[0005] The present invention is directed towards a method and an apparatus for changing bond angles of a molecule. The apparatus comprises a resistor-capacitor (RC) circuit to generate a resonating frequency sufficient to modify the bond angles of a molecule but insufficient to break the covalent bonds between molecules. The RC circuit comprises an anode, a cathode and a plurality of parallel electrically conductive plates separated by a narrow gap of less than 1 inch. The RC circuit is contained inside a chamber containing a fluid, such as water. A dual frequency created by the RC circuit and a power supply generates an optimal frequency conducive for modify bond angles. It is believed that modification of bond angles converts the fluid molecules into a vapor state. The vapor molecules with unnatural bond angles can be stored in a pressurized vessel for use in numerous applications.

[0006] For example, these vapor molecules with unnatural bond angles can be used to power motorized vehicles, such as automobiles. A pressurized vessel containing the vapor molecules with unnatural bond angles may be placed in a convenient location in an automobile. A gas line can connect the pressurized vessel with the intake system or directly into the cylinder of an engine to power the vehicle.

BRIEF DESCRIPTION OF DRAWINGS

- [0007] Figure 1 is a front view of an embodiment of the current invention showing a possible effect on the bond angles of water;
- [0008] Figure 2 is a front view of another embodiment of the current invention;
- [0009] Figure 3 is a cross-section of the embodiment shown in Figure 2;
- [0010] Figure 4 is a perspective view of an embodiment of the electrically conductive plates;
- [0011] Figure 5 is a close up of the top view of the electrically conductive plates;
- [0012] Figure 6 is a top perspective view of an embodiment of the chamber;
- [0013] Figure 7 is a bottom perspective view of an embodiment of the chamber;
- [0014] Figure 8 is a top view of the electrically conductive plates inside the chamber;
- [0015] Figure 9 is a front perspective view of an embodiment of the current invention;
- [0016] Figure 10 is perspective view of the water manifold;
- [0017] Figure 11 is a graph of an experiment measuring the amount of various gases produced as a function of time in a standard automobile when switching from standard fuel to vapors with unnatural bond angles;
- [0018] Figure 12 is a graph of another experiment measuring the amount of various gases produced as a function of time in another automobile when switching from standard fuel to vapors with unnatural bond angles;

[0019] Figure 13 is a graph of another experiment of the amount of various gases produced as a function of time in a standard automobile when switching from standard fuel to vapors with unnatural bond angles;

[0020] Figure 14 is a block diagram of an embodiment of an engine modified to use the vapor molecules with unnatural bond angles;

[0021] Figure 15 is a block diagram of another embodiment of an engine modified to use the vapor molecules with unnatural bond angles;

[0022] Figure 16 is a block diagram of another embodiment of an engine modified to use the vapor molecules with unnatural bond angles;

[0023] Figure 17 is a block diagram of another embodiment of an engine modified to use the vapor molecules with unnatural bond angles;

[0024] Figure 18 is a block diagram of another embodiment of an engine modified to use the vapor molecules with unnatural bond angles;

[0025] Figure 19 is a plan view of a vehicle modified to use the vapor molecules with unnatural bond angles as an alternative fuel; and

[0026] Figure 20 is a plan view of another embodiment of a vehicle modified to use the vapor molecules with unnatural bond angles as an alternative fuel.

BEST MODE FOR CARRYING OUT THE INVENTION

[0027] The detailed description set forth below in connection with the appended drawings is intended as a description of presently-preferred embodiments of the invention and is not intended to represent the only forms in which the present invention may be constructed or utilized. The description sets forth the functions and the sequence of steps

for constructing and operating the invention in connection with the illustrated embodiments. However, it is to be understood that the same or equivalent functions and sequences may be accomplished by different embodiments that are also intended to be encompassed within the spirit and scope of the invention.

[0028] The invention is directed towards an apparatus **102** and method for generating pressurized vapor molecules with unnatural bond angles, for example, a water molecule with a bond angle greater than approximately 104.5 degrees as shown in Fig. 1. Although the embodiments are described with water as the fluid, other fluids may be used, including fluids mixed with water and fluids that are substantially water or where water makes up the base component of the fluid. In addition, there is no requirement for the water to be purified. Without being bound by theory, the inventors believe that the conversion of a water molecule with an unnatural bond angle **100** back to a water molecule with a natural bond angle results in the release of energy. The energy released can be used in an unlimited number of applications. In addition, the water molecules with unnatural bond angles **100** impart improved electrical properties over water molecules with natural bond angles.

[0029] This process and resulting product have advantages over the traditional electrolysis process in that less energy is consumed in making the product and the product produced, that is water molecules with unnatural bond angles **100**, is safer to use than the highly explosive hydrogen gas produced by electrolysis. In addition, unlike electrolysis, which requires the use of water and added electrolytes, the current method and apparatus

does not require the addition of any electrolytes to the water or solution. In other words, pure water may be used.

[0030] As shown in Figs. 2 and 3, the apparatus **102** for generating water molecules with unnatural bond angles **100** comprises a chamber **202** containing a fluid or water, an anode **204**, a cathode **206**, and a plurality of electrically conductive plates **208** connected either to the anode **204** or the cathode **206**; and a voltage source **210**. The electrically conductive plates **208** are arranged in parallel and are alternatingly connected to the anode and the cathode such that an anode connected plate is parallel and adjacent to a cathode connected plate as shown in Fig. 4 and 5. The anode **204** is electrically connected to the positive terminal of the voltage source and the cathode **206** is electrically connected to the negative terminal of the voltage source effectively creating a resistor capacitor circuit for the generation of water vapors with unnatural bond angles.

[0031] The apparatus **102** for generating water molecules with unnatural bond angles **100** further comprises a water vapor outlet **212** to allow the water vapor molecules to escape and a pressure vessel **214** connected to the water vapor outlet **212** to contain the escaped water molecules with unnatural bond angles. Without being bound by theory, the inventors believe that applying a predetermined amount of power to the electrically conductive plates **208** creates agitation and modification of bond angles of the water molecules on the surface of the plates without breaking covalent bonds. The agitation and modification of bonds into unnatural angles disrupts the non-covalent interactions of water molecules with each other, resulting in water vapors. The water vapors escape from the liquid water, thereby increasing the pressure within the vessel. The pressure build-up

further facilitates maintaining water molecules with unnatural bond angles in a vapor state. Ignition of this water vapor causes the bond angles to return to their natural state and release energy.

[0032] The current applied to the anode **204**, cathode **206**, and electrically conductive plates **208** causes the water molecules to have a weak dielectric constant, which effectively generates a resistor-capacitor (RC) circuit, with a fixed capacitor in parallel with a variable resistor, generating an oscillating or resonating frequency. The resonating frequency may be calculated as the inverse of the product of the resistance and the capacitance. The resistance changes as a function of the purity of the fluid, the changes in electrical resistivity based upon the nature of the impurities in the fluid, the amount of the gas entrained in the fluid, the rate of circulation of the fluid, the surface tension of the fluid, the pressure in the vessel, the amount of vapor produced and the temperature of the water. The capacitance is a function of the applied current, the surface area of the electrically conductive plates **208** and number of electrically conductive plates **208**, and the gap between plates **208**. It is believed the resonating frequency in combination with the intrinsic or inherent frequency generated by the power source **210**, which has a different frequency, amplitude, and cycle than the resonating frequency, results in an optimal modified frequency, referred to as the modifying frequency, that facilitates the agitation and modification of bond angles without breaking covalent bonds, resulting in water vapors with unnatural bond angles. In addition, the water vapor with unnatural bond angles adopts an electrical property and a magnetic property that can be utilized in a variety of applications. This is distinguishable from the electrolysis process in which covalent bonds

are broken and diatomic hydrogen and oxygen gases are generated without any electrical or magnetic properties. In addition, electrolysis requires higher levels of energy since breaking of covalent bonds is required as opposed to modification of bond angles.

[0033] A computer may be implemented to automatically calculate the proper parameters necessary to generate a predetermined optimal frequency based upon feedback received from the operating unit.

[0034] For reasons not completely understood, this dual frequency stimulation results in better performance, or better production of water vapors with unnatural bond angles, than a single frequency stimulus that is equivalent to the sum of the dual frequency stimulation. It is theorized that one frequency delivers the necessary power characteristics to the fluid while the compounded frequency delivers the vibratory energy necessary to the modification of the bonding angle. In addition, the dual frequency stimulation provides for broader range of frequencies than a single frequency stimulus. It is theorized that the use of multiple frequencies, that is, more than two frequencies, may improve the efficiency of the apparatus. The resonating frequency may be approximately 50 Hz to approximately 40 KHz. Preferably the resonating frequency is approximately 1 KHz to approximately 22 KHz.

[0035] Unlike electrolysis, which requires direct current, the current invention may use alternating current or direct current. Therefore, electricity from a standard outlet can be used to power the apparatus.

[0036] The current may be supplied by any power source **210** of approximately 1 volt to approximately 500 volts. Preferably the power source **210** is from approximately 2

volts to approximately 24 volts. The preferred amount of current utilized is a function of the surface area of the plates **208** and the distance between the plates and the varying resistance of the substance between plates. The voltage and current can be adjusted to produce approximately 1 watt per square feet of surface area to approximately 100 watts per square feet of surface area. Adjustment beyond this level is possible should it be required for efficient operation of the apparatus.

[0037] In one embodiment, the current is continuously applied to the plates **208**. In another embodiment, the current can be applied with a duty cycle of approximately 0.005 to 0.5 (or 0.5% to approximately 50%). For example, the current can be on for 2 milliseconds then off for 98 milliseconds. The predetermined duty cycle may be generated by using a MOSFET array or SCR networks. The duty cycle may be modified by a computer in real time based upon feedback received from the apparatus. In one embodiment, the MOSFET array is powered by DC supply. In a preferred embodiment, the MOSFET array is powered by a battery.

[0038] In some embodiments, a power pass through **216** connects the voltage source **210** with the anode **204** and the cathode **206** to supply current to the anode plate and the cathode plate at the anode terminal and cathode terminal, respectively. In one embodiment, two anode terminals and two cathode terminals are used to provide structural stability for the plates. The two anode terminals and the two cathode terminals can be secured through their respective power pass throughs **216**.

[0039] In some embodiments, the anode **204** and the cathode **206** are plates, each comprising a surface. The anode plate surface and the cathode plate surface may be

opposite and parallel to each other. The plurality of electrically conductive plates **208** can be positioned perpendicular to and in between the anode plate and the cathode plate. The electrically conductive plates **208** can be arranged parallel to each other in an alternating arrangement such that a first electrically conductive plate connected to the anode is parallel and adjacent to a second electrically conductive plate connected to the cathode. In other words, a first set of electrically conductive plates **500** may be attached perpendicular to the anode plate with the surface of each electrically conductive plate aligned parallel to each other, thereby creating a plurality of parallel anode plates. A second set of electrically conductive plates **502** may be attached perpendicular to the cathode plate with the surface of each electrically conductive plate aligned parallel with each other, thereby creating a plurality of parallel cathode plates. The plurality of parallel anode plates and the plurality of parallel cathode plates can then be aligned parallel with each other such that the electrically conductive plates from the first and second set are aligned adjacent to each other in alternating fashion as shown in Figs. 4 and 5. A non-conductive rod **402** can be inserted through the first and second set **500, 502** of electrically conductive plates so as to provide structural stability. Each electrically conductive plate can be separated from the other by a non-conductive washer **404**.

[0040] The anode plate and the cathode plate may each comprise a plurality of plate holes. Screws or bolts can be inserted into the plate holes to fasten an electrically conductive plate.

[0041] In some embodiments each electrically conductive plate has a right angle bend and a plurality of fastener holes to provide a means for attaching the first and second

set **500**, **502** of electrically conductive plates to the anode **204** or cathode **206**, which are parallel to each other, while maintaining a parallel alignment among the electrically conductive plates. Each fastener hole can be aligned with a corresponding hole on the anode or cathode plate.

[0042] In another embodiment, the anode plate and the cathode plate may be replaced by a plurality of anode power blocks **406** and cathode power blocks **408**. Each electrically conductive plate **208** from the first set **500** of electrically conductive plates may be sandwiched in between each anode power block **406** and each electrically conductive plate **208** of the second set **502** of electrically conductive plates may be sandwiched in between each cathode power block **408** as a means for fastening or securing the electrically conductive plates parallel to each other. The power blocks **406**, **408** and electrically conductive plates **208** can be further secured with a rod **402** that passes through each electrically conductive plate **208** and each power block.

[0043] The anode **204**, the cathode **206**, and the plurality of electrically conductive plates **208** can be made of any conductive material such as copper, aluminum, platinum, silver and other metals and metal alloys. Metals that are sturdy and non-corrosive are preferred, such as stainless steel. Other embodiments could utilize flexible electrical conductive materials in irregular shapes with structural integrity and anode / cathode spacing maintained by an appropriate exoskeletal structure or support. Such an embodiment would enable the apparatus to fit into irregular shaped spaces as may be required by some applications. In one embodiment, the electrically conductive plates **208** are sandblasted or sanded to create miniature pits, crevices, points, or edges, thereby

increasing the surface area of the electrically conductive plates and enhancing the transfer of energy into the fluid.

[0044] The electrically conductive plates **208** can take on an unlimited number of shapes, sizes, and dimensions, constrained only by spacing issues, arrangement, and surface area. In a preferred embodiment, the electrically conductive plates **208** should be parallel to each other. This maximizes the potential number and size of plates that can be placed inside a chamber. In one embodiment, a chamber **202** contained twenty parallel plates **208** having a length of 1 foot and a height of 0.5 foot. In another embodiment, a chamber **202** contained twenty parallel plates **208** having a length of 4 feet and a height of 0.5 foot.

[0045] The gap between each adjacent plate **208** can be from approximately 0.05 inch to approximately 1 inch. Preferably each adjacent plate **208** has a gap of approximately less than 0.25 inch. In one embodiment, the gap between adjacent plates **208** is approximately 0.125 inch.

[0046] The parallel arrangement also facilitates movement of water in between the electrically conductive plates **208**. The movement of water allows water to pass across the surface areas of the electrically conductive plates **208** in between the gap between the electrically conductive plates **208**, thereby dislodging the water vapors forming on the electrically conductive plates **208** from the plates causing the water vapor to rise to the surface of the water and escape from the liquid water. In some embodiments, the electrically conductive plates **208** can be a series of cylinders or cones of decreasing size, concentrically arranged one inside another, with open ends. The open ends can be aligned

with the direction of the movement of water.

[0047] In some embodiments, movement of water can be created by vibrating, rocking, tilting, shaking or otherwise agitating the chamber 202. For example, the chamber 202 may be placed on a rocking or tilting machine. In some embodiments, a chamber 202 may be placed inside a vehicle so as to encounter natural agitation of the water due to vibrations, bumps, turns, acceleration and deceleration of the vehicle. In other embodiments, movement of water is generated by creating a flow of water, for example, with a water pump 110. In some embodiments, one or more ultrasonic transducers could be placed in or upon the chamber 202, the effect of which would be to detach the bubbles of vapor as they are formed.

[0048] The chamber 202 may further comprise a water inlet orifice 220. The water inlet orifice 220 may be positioned anywhere on the chamber to generate a continuous flow of water. As shown in Figs. 2 and 3, to maximize the flow across the electrically conductive plates, the water inlet orifice 220 may be placed adjacent and perpendicular to the electrically conductive plates 208 such that water flowing in through the water inlet orifice 220 will flow parallel with the electrically conductive plates 208 through the gaps. In some embodiment, the chamber 202 may have a second water inlet orifice 222 opposite the first water inlet orifice 220. Water can flow through the first water inlet orifice 220 in a first direction parallel with the electrically conductive plates 208 through the gap at one end of the chamber while also flowing through the second water inlet orifice 222 in a second direction, opposite the first direction, from the other end of the chamber, parallel to the electrically conductive plates 208 into the gaps. Water flowing through the electrically

conductive plates **208** from two opposite ends will maximize the water movement at the ends and the middle of the electrically conductive plates, thereby increasing the efficiency of water vapor production. A branching water pipe may be used to supply water simultaneously through the first water inlet orifice **220** in a first direction and through the second water inlet orifice **222** in a second direction, opposite the first direction.

[0049] In another embodiment, a water inlet orifice **220** may be positioned at the bottom of the chamber, below the electrically conductive plates, with the water flow projecting upwards into the gaps, parallel to the electrically conductive plates as shown in Figs. 6-8. A plurality of water inlet orifices **220** can be positioned at the bottom of the chamber, below the electrically conductive plates **208** to ensure sufficient water movement across all surfaces. Each water inlet orifice **220** may be equipped with nozzles **700** to help secure tubing.

[0050] A water pump **110** may be used to force the flow of water from an external water supply **226** into the chamber through the water inlet orifice **220**. In some embodiments, a pump base **702** may be attached near or to the chamber **202** to support the water pump **110**. In one embodiment, the water pump **110** draws water from the external water supply **226** through tube A and forces the water into the chamber **202** via tube B.

[0051] In embodiments with a plurality of water inlet orifices **220**, a water manifold **704** may be attached near or to the chamber **202**. As shown in Fig. 10, the water manifold **702** may comprise at least one entry hole **1000** and a plurality of exit holes **1002**. The entry hole **1000** is attached to the water pump **110** to receive water flow. The plurality of exit holes **1002** are connected to tubes that feed back into the water inlet orifices **220**

through the nozzles 700 to recycle the water back into the chamber 202.

[0052] In embodiments where water is forced through the chamber 202, the chamber 202 may further comprise a water outlet orifice 228. The water outlet orifice 228 can lead back to the water supply 226 via tube C, thereby allowing the water that was not converted into vapors to be recycled. Therefore, water can be added to the chamber 202 to a desired level. When the water pump 110 is turned on water is force into the water manifold 704 where the water splits into a plurality of tubes connected to the plurality of water inlet orifices 220, thereby forcing water into the chamber 202. In embodiments without a water manifold 704, the water pump 110 pumps the water directly to the water inlet orifice 220. From the chamber 202 the water is forced out the water outlet orifice 228 back into the water pump 226, thereby forming a closed loop.

[0053] As shown in Figs. 3 and 9, the water vapor outlet 212 may be located above the electrically conductive plates. Preferably, the water vapor outlet 212 is located close to the electrically conductive plates 208 so that the water vapors are not required to traverse relatively large distances through the liquid water to escape into the space. In some embodiments, the water vapor outlet 212 connects to the pressure vessel 214 via a tube D. Tube E is also attached to tank 214 to ensure that any gas trapped in the water supply 226 is allowed to escape to pressure vessel 214 for use.

[0054] The amount and nature of current passed across the electrically charged plates is sufficient to agitate and modify chemical bonds of water molecules into unnatural bond angles but insufficient to break the covalent oxygen-hydrogen bonds. Nonetheless, due to the agitation and modification of bond angles of water molecules, the non-covalent

bonding interactions between adjacent water molecules is disrupted and water across the surface of the electrically conductive plates convert into water vapors. The water flow across the surface of the plates facilitates the escape of water vapors created on the surface of the electrically conductive plates into the air. The creation of water vapors increases pressure in the chamber and generates a pressurized water vapor molecule with unnatural bond angles. The pressure build up helps maintain water molecules with unnatural bond angles.

[0055] The amount of water inside the chamber should be sufficient to completely immerse the electrically conductive plates 208. In one embodiment, the chamber is large enough such that even when the electrically conductive plates are completely submerged, a space exists above the water for the water vapors to escape into. A water vapor outlet orifice 212 can be positioned along the top of the chamber 202 leading to a pressure vessel 112. In embodiments with a water outlet orifice 228, the water outlet orifice 228 may be positioned along the chamber 202 such that the water level remains below the water vapor outlet 212. The water flow rate into the chamber should be approximately equal to the water flow rate out of the chamber so as to maintain a constant water level to keep the electrically conductive plates 208 submerged and to prevent water from entering into the water vapor outlet 212.

[0056] In another embodiment, a water vapor trap 108 is located above the water. The water vapor trap 108 may have a wide base to increase the area which the water vapor can escape into. The water vapor trap 108 may taper towards the top to funnel the water vapor in a desired direction. In embodiments with a water vapor trap 108, the water vapor

outlet **212** can be positioned on the water vapor trap **108**. In addition, the water vapor trap **108** may further comprise the water outlet orifice **228** to direct the water back to the water supply for recirculation. In another embodiment, the water vapor trap **108** can simply be the area above the level of the water.

[0057] The chamber **202** is connected to a pressure vessel **214** via the water vapor outlet **212**. As the pressure builds up inside the chamber **202**, the pressurized water vapor molecules are forced through the water vapor outlet **212** into the pressure vessel **214**. The pressure vessel **214** may comprise a pressure gauge to determine the amount of pressure build up. The preferred amount of pressure to maintain water molecules with unnatural bond angles is approximately 1 pound per square inch (psi) to approximately 100 psi. However a higher pressure could be used for certain compressed gas applications. Contained at this pressure, the water molecule can maintain an unnatural bond angle for several months depending on the quality of the pressure vessel. The water molecules with unnatural bond angles can be released, for example, tube **F** for use in a variety of applications.

[0058] Due to the pressure build-up the chamber **202**, pressure vessel **214**, water trap **108**, and water supply tank **104** should be made of material sturdy enough to maintain structural stability at high pressures. In addition, the material used may be non-corrosive such as metal, acrylic, PVC, plastic and the like. Preferably, the chamber **202** is made of stainless steel.

[0059] A non-conductive, non-water permeable coating may also be used to coat the inner surface of a metal chamber to increase the efficiency of energy production. A metal

chamber may decrease the efficiency of water vapor production by shunting some of the electricity to ground. By coating the inner surface of a metal chamber with a non-conductive material, the electricity generated will remain in the electrically conductive plates. Suitable coatings include acrylic and fiber glass. A coating may be applied to the surface by, for example, sandblasting.

[0060] The apparatus may comprise a single chamber or a plurality of chambers. In embodiments with a plurality of chambers, each chamber would require the parts associated with the chamber. To share the water supply, maximize space, and increase efficiency, the chambers can be arranged in parallel. The power source can be attached to the plates of the different chambers in series or parallel as may suit the application. In addition, the water supply can flow into the chamber in parallel. This will allow the apparatus to share the same power source and water supply. A merging tube can be connected to each water outlet orifice and merge the water into a single vapor trap. The vapor trap can comprise its own water outlet orifice to recycle the water back into the water supply. The water vapors can also merge and collect in the water vapor trap and be forced through the water vapor outlet into a pressure vessel. This allows the water vapors generated in each chamber to combine together in a single pressure vessel.

[0061] It is believed that a water molecule with an unnatural bond angle can be created by exposing the water molecule to electromagnetic radiation of a wavelength greater than 0.1 cm and less than 100 cm. Preferably the electromagnetic radiation has a wavelength in the range of approximately 0.1 cm to approximately 100 cm. More preferably, the electromagnetic radiation has a wavelength of approximately 1 cm to 50

cm. In another embodiment, the electromagnetic frequency is between approximately 0 to approximately 5 gigahertz (GHz). In one embodiment, the electromagnetic frequency is approximately 1.1 GHz. In another embodiment, the electromagnetic frequency is approximately 2.2 GHz.

[0062] The electromagnetic radiation is applied through current. In one embodiment, the electromagnetic radiation may be applied as pulse width modulated direct current of unequal pulse spacing and reduced duty cycles. Therefore, although these ranges of wavelengths encompass microwaves, the mechanism of action differs from that of microwaves being applied with alternating currents as in the conventional microwave oven.

[0063] This invention is also directed towards a method of modifying a bond angle of a molecule, for example, generating a water molecule with an unnatural bond angle, comprising providing a first frequency; providing a second frequency different from the first frequency; generating a modifying frequency by combining or summing the first frequency and the second frequency; and exposing the molecule to the modifying frequency to create the unnatural bond angle without breaking the covalent bond.

[0064] The first frequency may be the intrinsic or inherent frequency generated by a power source. The second frequency may be the resonating frequency generated from the plurality of electrically conductive plates. The resonating frequency is approximately 50 Hz to approximately 40 KHz. In some embodiments, the resonating frequency is approximately 1 KHz to approximately 22 KHz.

[0065] Each electrically conductive plate comprises a surface area and is arranged parallel to each other. The power source and the electrically conductive plates effectively

create a resistor-capacitor circuit. The current from the power source may be applied with a duty cycle of approximately 0.005 to approximately 0.5. The amount of power applied to the plurality of electrically conductive plates may range from approximately 10 watts per square feet of surface area to approximately 100 watts per square feet of surface area. In some embodiments, the power applied to the plurality of electrically conductive plates is approximately 30 watts per square feet of surface area to approximately 50 watts per square feet of surface area.

[0066] The method of generating a molecule, such as a water molecule, with an unnatural bond angle further comprises pressurizing the molecule with the unnatural bond angle to maintain the unnatural bond angle and containing the pressurized molecule with an unnatural bond angle in a pressure vessel.

[0067] Although this invention was described with respect to water as the molecule with an unnatural bond angle, the apparatus and methods described herein may be applied to other aqueous and non-aqueous solutions whose electro-magnetic properties are conducive to similar processing. As such, this invention is also directed towards a molecule comprising an unnatural bond angle. Preferably, the molecule comprising an unnatural bond angle is pressurized. The unnatural bond angle is any bond angle other than a characteristic bond angle of a molecule in its natural state. For example, the bond angle of water in its natural state is approximately 104.5 degrees. Therefore, a water molecule with an unnatural bond angle is one a bond angle other than 104.5 degrees. For example, the bond angle may be greater than approximately 104.5 degrees. In some embodiments, the bond angle may be greater than approximately 109 degrees. In some

embodiments, the bond angle may be 180 degrees.

[0068] It is believed that the reversion of a molecule with an unnatural bond angle back to its natural state with natural bond angles results in the release of energy. As such, numerous applications have been contemplated as listed below. One example is that a molecule with an unnatural bond angle may be used as an alternative fuel source. This can be accomplished by providing a molecule with an unnatural bond angle in a pressurized vessel at a pressure of approximately 1 psi to approximately 100 psi, then releasing the molecule with the unnatural bond angle from the pressurized vessel, and igniting the molecule with the unnatural bond angle with an electrical discharge. For example, a high frequency, high voltage ignition source such as a spark plug may be utilized. The ignition of the molecule with the unnatural bond angle reverts the unnatural bond angle back to a natural bond angle state and releases energy. Energy is released as sonic energy, mechanical energy, heat and chemical energy. In some embodiments, the energy released may be useable as an alternative fuel. The alternative fuel may be used as a replacement for gasoline for powering a motorized device, such as an automobile. In some embodiments, the energy released may be used to maintain a flame or fire.

[0069] EXAMPLES

[0070] Water vapors with unnatural bond angles were generated and captured in a pressure vessel at 35 psi by applying 5 volts to a generator comprising four parallel chambers with 20 plates in each unit; each plate having a surface area of 4 square feet and arranged parallel to each other with a gap of 0.1765 inches between plates. The pressurized vapor was regulated down to 5 psi and released through a cutting torch tip of

the size #00 and ignited effectively creating a blowtorch, cutting torch, or welding torch. The flame generated was used to cut through many different materials including thin sheets of titanium and nickel plated steel. Also a tungsten welding rod was used as a sample metal and was melted by the cutting torch using water vapor with unnatural bond angles.

[0071] Water vapors with unnatural bond angles were generated and captured in a pressure vessel at 35 psi by applying 5 volts to a generator comprising four parallel chambers with 20 plates in each unit; each plate having a surface area of 4 square feet and arranged parallel to each other with a gap of 0.1765 inches between plates. The pressurized vapor was regulated down to 6 psi and injected into the intakes of two different types of single cylinder internal combustion engines. The two types of engines were a gasoline engine, a Honda GX 340, and a tri-fuel engine, a Honda GX 390. The modifications to the engines that allowed the insertion of the water vapor with unnatural bond angles was the removal of the carburetor and an insertion plate on the intake to allow only the water vapor with unnatural bond angles and not outside air to enter. This modification allowed these engines to start and run without any outside air or extra fuel other than the modified water vapor.

[0072] As summarized in Fig. 11, the pressurized vapor was also used to run an automobile with significantly reduced toxic byproducts. A Toyota FJ-40 with a 2-F straight six cylinder engine was modified such that the pressurized water vapor with unnatural bond angles was inserted below the carburetor in an extra port in the manifold intake using a ball valve as a shutoff and an automobile quick connect. Also a shutoff was installed in the engines normal gasoline line to allow a complete interruption of gasoline

from the gas tank to the engine's carburetor. The engine was started and regular unleaded car gasoline was used to keep the motor running. The levels of gases emitted from the tailpipe were measured in 10 second intervals by the IMR 2800A Exhaust Gas Analyzer and the results are shown in Fig. 11. Data points 1 through 71 indicate conditions when regular unleaded gasoline was used. Oxygen levels in the air were above 20% before ignition and dropped to less than 5% within 3 minutes. Levels of hydrocarbons, carbon monoxide, and carbon dioxide were virtually undetectable before ignition and rose to approximately 10% or more. After approximately 12 minutes, the fuel source was switched from the unleaded gas to the vapor described as this invention (see Data points 72-78 in Fig. 11). Approximately 1 minute after switching to the vapor, the engine was running on pure vapors (data points 79-147 in Fig. 11). As shown, oxygen levels in the air had return to normal at above 20% and hydrocarbon, carbon monoxide, and carbon dioxide levels returned back to undetectable levels. The engine, however, was still running. After an additional 11 minutes, the engine was turned off (data points 148 to 154) and the levels of oxygen, hydrocarbons, carbon monoxide, and carbon dioxide remained unchanged compared to levels when the engine was running on the vapors.

[0073] This experiment was repeated two more times and the results have been reproduced in Figs. 12 and 13 with similar results. As shown in Fig. 12, when the engine was turned on using unleaded gasoline oxygen levels in the air dropped from above 20% to below 5% (data points 1-35) and toxic gas levels rose from undetectable levels to over 5% (carbon monoxide) and 15% (carbon dioxide). When the fuel was switched from unleaded gasoline to the vapor, oxygen levels rose back to approximately 20% while toxic gas levels

dropped back to below 1% (data points 43-87). When the engine was turned off, oxygen levels remained unchanged and toxic gas levels decreased to undetectable levels.

[0074] Fig. 13 shows the third experiment with oxygen levels dropping from above 20% when the engine was off to below 5% when the engine was turned on using unleaded gasoline. Carbon monoxide and carbon dioxide rose from undetectable levels when the engine was off to levels exceeding 5% and 15%, respectively, when the engine was running on unleaded gasoline (data points 1-36 in Fig. 13). After the fuel was switched from unleaded gasoline to the vapor described herein, the levels of oxygen rose back up to approximately 20% and the toxic gases dropped to undetectable levels (data points 51-129 in Fig. 13). After the engine was turned off gas levels were unchanged compared to when the engine was running on the vapor (data points 130-150 in Fig. 13).

[0075] APPLICATION

[0076] One application of vapor molecules with unnatural bond angles ("the vapor molecules") **100** is as an alternative fuel source for engines and motor vehicles, such as automobiles, as well as other motorized devices relying on fuel for power. For example, conventional fuels used in internal combustion engines, such as gasoline, diesel, natural gas, propane, and the like can be replaced, in whole or in part, with the vapor molecules **100**. The vapor molecules **100** can replace from about 0% to about 100% of the conventional fuel. Utilizing the vapor molecules **100** reduces toxic emissions associated with the burning of gasoline and other fuels.

[0077] Replacement of conventional fuels with vapor molecules **100** may be accomplished by a variety of methods depending on the type of engine. For example, as

shown in Figs. 14-18, in an internal combustion engine **1400**, the vapor molecules **100** may be free flowing into the intake manifold **1416**, injected directly into the cylinders **1404**, or mixed and metered with air and/or fuel prior to delivery to the cylinders **1404**.

[0078] By way of example only, the vapor molecules **100** can be used in conjunction with or as a replacement for fuel **1402** in a standard internal combustion engine **1400**. The internal combustion engine **1400** combusts fuel **1402**, such as gasoline, inside a cylinder **1404** to drive pistons **1406** to power a motorized vehicle **1800**. In a standard four stroke internal combustion engine **1400**, fuel **1402** and air **1408** are drawn into the cylinder **1404** through an intake valve **1410** as the piston **1406** moves to the bottom of the cylinder **1404** during the first stroke or intake stroke. During the second stroke or compression stroke, the fuel **1402** and air **1408** are compressed as the piston **1406** moves towards the top of the cylinder **1404**. In the third stroke or combustion stroke, the fuel **1402** and air **1408** inside the cylinder **1404** are ignited by a spark plug **1412** and combusts, thereby driving the piston **1406** towards the bottom of the cylinder **1404**. In the fourth stroke or exhaust stroke, the piston **1406** moves back up and the exhaust is eliminated through an exhaust valve **1414**.

[0079] Since the vapor molecules **100** can also release energy when actuated, ignition of the vapor molecules **100** inside a cylinder **1404** would have a similar effect as ignition of the fuel **1402** and air **1408** mixture. The engine **1400** may be modified to feed vapor molecules **100** into the cylinder **1404**. Various techniques may be employed to feed the vapor molecules **100** into the cylinder **1404** during the intake stroke. Some of the techniques and methods include, but are not limited to, free flow of vapor molecules **100**

into the intake manifold **1416**, metered flow of the vapor molecules **100** and air **1408** in an appropriate ratio, and direct injection of the of the vapor molecules **100** into the cylinder **1404**. Once in the cylinder **1404** the vapor molecules **100** may be ignited, for example by a spark plug **1412**, the combustion of diesel fuel in a diesel engine, or any other source of a spark or flame. In test experiments, a vapor molecule **100** to diesel fuel ratio of 60:40 and even up to 70:30 still allowed the diesel fuel to combust upon compression to actuate the vapor molecules to release energy.

[0080] In some embodiments, there may be a free flow of the vapor molecules **100** into the cylinder **1404** via the intake manifold **1416**. In vehicles using carburetors **1418**, the carburetor **1418** has a fuel inlet **1420** through which the fuel is drawn into the intake manifold **1416**, mixed with air **1408**, and introduced into the cylinder **1404**. An alternative fuel or vapor molecule inlet **1422** can be created through which the vapor molecules **100** can be introduced to the fuel/air mixtures. This vapor molecule inlet **1422** may be aligned with, adjacent to, or opposite from the fuel inlet **1420** so that the fuel **1402** and vapor molecules **100** are drawn into the venturi **1424** of the carburetor **1418**. Thus, when the throttle valve (not shown) of the carburetor **1418** is opened, air **1408**, fuel **1402**, and vapor molecules **100** are sucked into the manifold **1416** for distribution into the cylinders **1404**.

[0081] In some embodiments, air flow **1408** through the carburetor **1418** and/or the introduction of the vapor molecules **100** to the intake manifold **1416** may be controlled or metered using a mass flow controller **1500**, valves, fuel injectors, and the like as shown in Figs. 15 and 17. These may work in conjunction with the vehicle's computer system **1426**.

[0082] In embodiments in which the carburetor **1418** has been replaced with the

fuel injector **1428**, a second fuel injector **1428b** may be employed to inject the vapor molecules **100** into the intake system **1416** or directly into the cylinder **1404**. A computer system **1426** can synchronize and calculate the proper mixture of fuel **1402**, air **1408**, and vapor molecules **100** to inject into the intake system **1416** and/or the cylinder **1404**.

[0083] In some embodiments, the carburetor **1418** may be used in conjunction with the fuel injector **1428**. For example, fuel **1402** may be introduced into the cylinder **1404** via the fuel injector **1428** while the vapor molecule **100** is introduced into the cylinder **1404** via the carburetor after mixing with the air. Alternatively, the vapor molecule **100** may be directly introduced into the cylinder **1404** via a fuel injector **1428** while the fuel is introduced via the carburetor **1424** after having been mixed with air. In addition, an option may be provided to completely shut off the introduction of fuel **1402** into the cylinder and rely completely on the vapor molecule **100**.

[0084] By way of example only, in an embodiment using both a carburetor **1418** and fuel injector **1428**, with the fuel **1402** entering the cylinders **1404** through the fuel injector **1428** and the vapor molecules **100** entering the cylinders **1404** via the carburetor, if fuel is no longer desired, a switch can shut off the fuel injector **1428** so that the vehicle is powered solely by the vapor molecules **100**.

[0085] Therefore, a variety of different combinations may be employed for introducing the vapor molecule and/or fuel into the cylinder. The precise approach used may depend on fuel savings or power. Therefore, the vapor molecules **100** and/or the fuel **1402** may be injected directly into the cylinder **1404** or through an existing intake system **1416**. In utilizing an existing intake system **1416**, the flow of the vapor molecules **100** may

be controlled or free flowing. In addition, the vapor molecules **100**, the fuel **1402**, and air **1408** may be mixed before entering the cylinder **1404** or mixed inside the cylinder **1404** through parallel injections via electrical injectors, mechanical injectors, solenoid valves, and the like, or mixed in any combination prior to or during the introduction into the cylinder **1404**.

[0086] As shown in Fig. 19, the vapor molecules **100** may be stored in a vehicle **1800** in a storage container **1802**. For example, the storage container **1802** may be a pressurized vessel **214** containing the vapor molecules **100** placed in or near the trunk of the vehicle **1800**. A high pressure hose or line **1804** can connect the storage container **1802** to the intake system **1416** or directly into the cylinders **1404** to deliver the vapor molecules **100** at the appropriate time and in the appropriate amount. Thus, a fuel tank **1806** and the storage container **1802** may work in parallel.

[0087] In some embodiments, the storage container **1802** may be a vapor molecules generator **102** placed in the vehicle **1800**. Since water may be used as one of the fluids to generate the vapor molecules **100**, a user need only find a source of water to “re-fuel” the vehicle **1800**. Furthermore, since the fluid need not be in pure or filtered form, the user could stop nearly anywhere and use nearly any type of fluid or water that can be found.

[0088] As shown in Fig. 20, the vapor molecules **100** may also be used in conjunction with current alternative fuel vehicles. For example, the vapor molecules **100** may be fed into fuel cells **1900** to power the fuel cell **1900** in electric vehicles **1800**. The fuel cell **1900** can then power the batteries or an electrical generator **1902** to provide power to the engine **1400** or electrical power for use to power other electrical devices. In some

embodiments, the vapor molecules **100** may be used to directly power an electrical generator to provide power to any electrical or electromechanical device. The vapor molecules **100** may be from a pressurized vessel **214** or generated in the vehicle by a vapor molecules generator **102**.

[0089] Thus, as described herein, the present invention is also a method of powering an engine **1400**, such as the engine of a motorized vehicle comprising introducing vapor molecules with unnatural bond angles (“vapor molecules”) **100** into the engine **1400**, and actuating the vapor molecules **100** to create kinetic energy. Preferably, the vapor molecules **100** are water molecules with an unnatural bond angle of greater than approximately 104.5 degrees.

[0090] Specifically, the method of powering an engine **1400**, comprises introducing vapor molecules **100** into a cylinder **1404** of an engine **1400**; and actuating the vapor molecules **100** to drive a piston **1406**. The method further comprises feeding the vapor molecules **100** into the cylinder **1404** from a storage container **1802**. In some embodiments, the storage container **1802** may be a pressurized vessel **214**. In some embodiments, storage container **1802** generates the vapor molecules **100**. Thus, the storage container **1802** may be a vapor molecule generator **102**.

[0091] The vapor molecules **100** may be introduced into the cylinder **1404** through an intake valve **1410**, injected directly into the cylinder **1404**, or metered into the intake manifold **1416** by a mass flow controller **1500**. In addition, the vapor molecules **100** may be mixed with a fuel **1402**. In some embodiments, the vapor molecules **100** and the fuel **1402** are mixed before introduction into the cylinder **1404**. In some embodiments, the

vapor molecules **100** and the fuel **1402** are mixed in the cylinder **1404**.

[0092] In some embodiments, the engine **1400** may be an internal combustion engine and the method of powering the internal combustion engine comprises generating vapor molecules with unnatural bond angles **100** in a storage container **1802** inside a motorized vehicle **1800**, metering vapor molecules **100** into an engine **1400** with a first mass flow controller **1500a**, metering air flow into the engine with a second mass flow controller **1500b**, mixing the vapor molecules, air, and a fuel in a compartment of the engine, such as the carburetor **1418**, intake manifold **1416**, or the cylinder **1404**, and actuating the vapor molecules **100** inside the cylinder **1404** to drive a piston **1406** to create work.

[0093] Implementation of this method into vehicles results in an alternative fuel vehicle **1800**, comprising an engine **1400**, the engine **1400** comprising a cylinder **1404**, and a piston **1406** housed inside the cylinder **1404**; and an alternative fuel comprising vapor molecules with unnatural bond angles **100**, wherein the alternative fuel **100** is introduced into the cylinder **1404** of the engine **1400** and actuated to release energy to drive the piston **1406** inside the cylinder **1404**.

[0094] The alternative fuel vehicle **1800** further comprises a means for introducing the alternative fuel **100** into the cylinder **1404**. For example, the alternative fuel vehicle **1800** may have a first fuel injector **1428a** to inject a fuel **1402** into the cylinder **1404**; and a second fuel injector **1428b** to inject the alternative fuel **100** into the cylinder **1404**. The second fuel injector **1428b** may be positioned on the cylinder in a similar manner as the first fuel injector **1428a**. In some embodiments, the alternative fuel vehicle **1800** may have

a standard carburetor **1418**, the carburetor **1418** comprising a throttle body having a first end and a second end; a channel within the throttle body extending from the first end to the second end, the channel having a wall; a throttle plate positioned at the second end, the throttle plate rotatable within the channel; a fuel inlet **1420** within the wall of the channel to introduce the fuel into the carburetor; and an alternative fuel inlet **1422** within the wall of the channel to introduce the alternative fuel into the carburetor to mix with the fuel.

[0095] In some embodiments, the alternative fuel vehicle **1800** further comprises a mass flow controller **1500** to meter an amount of the alternative fuel **100** into the cylinder **1404**.

[0096] The alternative fuel vehicle **1800** may also have a storage container **1802** and a line **1804** connecting the storage container **1802** to the engine **1400**. In some embodiments, the storage container **1802** is a pressurized vessel **214**. In some embodiments, the storage container **1802** generates the vapor molecules with unnatural bond angles **100**. In other words, the storage container **1802** is a vapor molecule generator **102**.

[0097] OTHER APPLICATIONS

[0098] Numerous other applications have been contemplated by the inventors. The following is not an exhaustive list of possible applications but rather a few examples in various fields to provide a sample of the potential uses.

[0100] Water

[0101] Water Treatment Systems for Culinary / Commercial Uses - Saline / Brackish

- [0102] Water for Injectables - Medical
- [0103] Semi-conductor Manufacturing Water
- [0104] Reclamation of Useful or Valuable Substances from Water
- [0105] Mine Waste Water Treatment
- [0106] Food Product Water
- [0107] Reclamation of Industrial Waste Water and Contents
- [0108] Reclamation of Grey Water for Agriculture, Recreation
- [0109] **Energy (Electrical)**
- [0110] Air Quality Improvement for Existing Facilities by Pollutant Capture
Including Coal
- [0111] Reduce / Eliminate Hydrocarbon Fuel Requirements
- [0112] Reduce / Eliminate Greenhouse Gas Emissions
- [0113] Utilize Water / Gravity Systems in Electrical Energy Production
- [0114] Utilize Charged Gas Systems in Electrical Energy Production
- [0115] Bring Shut-in Plants On-Line - Can Meet Air Quality Requirements
- [0116] **Personal Transportation**
- [0117] Retrofit Existing Internal Combustion Engines for New Fuel
- [0118] Retrofit Existing Internal Combustion Engines to Capture Carbon Based
Emissions
- [0119] Retrofit to Eliminate Nitric Oxide, Sulfur Dioxide, Particulate Emissions
- [0120] New Engine Designs to Optimize Use of New Fuel
- [0121] Internal and External Combustion Engines

- [0122] **Mass Transportation**
- [0123] Retrofit Buses etc. to Reduce Hydrocarbon Use and Emissions
- [0124] Retrofit Trains to Reduce Hydrocarbon and Emissions
- [0125] New Engines to Optimize Environmental, Efficiency, Safety for both
Internal and External Combustion Engines
- [0126] **Commercial Transportation**
- [0127] Retrofit Over the Road Trucks Reduce Hydrocarbon Use
- [0128] Reduce Emissions, Noise
- [0129] New Internal and External Combustion Engines
- [0130] Harvest, Store, Distribute Excess Energy
- [0131] **Maritime**
- [0132] Retrofit Marine Engines to reduce Hydrocarbon Use and Emissions
- [0133] Reduce Emissions While in Port Areas
- [0134] Provide Fresh Water for On-board Use
- [0135] Reduce Need to Carry Ice to Cool Fish Cargo
- [0136] Increase Effective Time at Sea
- [0137] Reduce Cost, Hydrocarbon, Emissions for On-Board Generation of Ship's
Power
- [0138] Reduce Pollution at Sea from Hydrocarbon Use, Cargo
- [0139] Increase Effective Range
- [0140] Increase Effective Cargo Capacity
- [0141] "Pull Push" Propeller Free Low Draft Propulsion and Maneuvering System

[0142] Energy (Hydrocarbon)

[0143] Capture and Utilize Emissions from Coal Powered Plants Eliminating CO₂

[0144] Reduce / Eliminate Use of Fuel Oil and Natural Gas Eliminating CO₂

[0145] Enable Hydrocarbon Production from Oil Shales and Sands

[0146] Utilize Excess Hydrocarbons in Production of Plastics, Pharmaceuticals, Chemicals, etc.

[0147] Energy (Nuclear)

[0148] Replacement of Nuclear Fuel Rods in Existing Reactors Reduction of Nuclear Waste Materials Treatment of Reactor Cooling Water

[0149] Chemistry

[0150] High Purity Gases

[0151] Inorganic / Organic Chemical Synthesis

[0152] High Temperature Chemistry in Vacuum Over Long Periods

[0153] Reductive Purification of Metals (Aluminum, etc.) without Carbon

[0154] Multi-Frequency Redox Reaction Chemistry in Vacuum or Atmosphere

[0155] Chemical Reactions in Extreme Conditions

[0156] Physics

[0157] Sustained Plasma Reactions in Vacuum and Near Vacuum Conditions

[0158] Reactions in Electron Rich Conditions - Heat - Vacuum

[0159] Spectroscopy

[0160] Time / Space Continuum Phenomenon

[0161] Ion / Plasma Propulsion Systems for Deep Space

- [0162] Real Time Elemental Analysis
- [0163] Materials Testing
- [0164] High Temperature Synthetic Crystal Growth
- [0165] **Metallurgical**
- [0166] High Temperature Assaying and Testing
- [0167] High Temperature Production and Refining in Vacuum
- [0168] Reduction of Carbon Emissions from Heating Operations
- [0169] Elimination of Storage of Dangerous Gases
- [0170] Electrical Energy Reduction
- [0171] Real Time Monitoring and Control of Pyrometallurgical Processes
- [0172] High Temperature Operations Without Electrical and Magnetic Field Generation
- [0173] **Heat, Cooling, Refrigeration**
- [0174] Residential and Commercial Heating - Reduction / Elimination Carbon Fuels
- [0175] Air Conditioning
- [0176] Large Scale Refrigeration
- [0177] Reduced Electrical Consumption
- [0178] Air Quality Maintenance
- [0179] **Public Safety**
- [0180] Aircraft Oxygen Systems
- [0181] Firefighter Breathing Apparatus
- [0182] Portable Oxygen Apparatus
- [0183] Non-destructive Stun Grenade

- [0184] Fire Control / Extinguishment
- [0185] Precision Metal Cutting Apparatus, Small, Portable, Quick
- [0186] Decontamination, Detoxification Systems
- [0187] Large Scale Anti-bacterial Systems
- [0188] Crowd Control
- [0189] **Recreation**
- [0190] Tankless Underwater Breathing Apparatus
- [0191] Special Effects
- [0192] Personal Watercraft / ATV Propulsion
- [0193] Lighter than Air Craft
- [0194] Small Scale Water, Electrical, Waste Systems for Recreational Use
- [0195] **Military (Defensive Only)**
- [0196] "Caterpillar Drive" for Submarine Use
- [0197] Water Thrust Surface Propulsion System
- [0198] Remote Observation Propulsion
- [0199] Lighter than Air Craft
- [0200] Mine Clearance
- [0201] Disorientation Devices
- [0202] Tunnel and Bunker Destruction
- [0203] Covert Naval Vessel Destruction
- [0204] Extra-atmospheric Power, Water, Light, Oxygen, Propulsion Systems from
Water or Ice

- [0205] Rocket Fuel - Non-explosive
- [0206] Vehicle Fuel - Non-combustive
- [0207] Hydrocarbon Free Torpedo Propulsion
- [0208] Reduces Fuel Transportation, Delivery Hazards and Time
- [0209] **Food Processing**
- [0210] Reduction / Elimination of Harmful Organisms through Cell Membrane Rupture
- [0211] Container Size Flash Freezing / Refrigeration
- [0212] Large Scale Anti-Bacterial Systems Vacuum Packaging systems
- [0213] **Industrial**
- [0214] Welding and Cutting Like and Unlike Materials
- [0215] Vibration and Shock Testing
- [0216] Sustained Heat in Vacuum
- [0217] Vacuum Based Burn-in Systems
- [0218] Simplified Liquid Pumping Systems Over Long Distances
- [0219] Large Scale Vacuum Pumps
- [0220] **Environmental**
- [0221] Reclamation of Atmospheric Pollutants for Product Synthesis
- [0222] Reduction of Carbon Footprints Across the Board
- [0223] Creation of Carbon Credits to Fund Environmental Programs
- [0224] Reduce Destruction of Environment by Carbon Based Pollutants
- [0225] Reduce Need to Harvest Trees, Bum Rain Forest

- [0226] Atmospheric Oxygen Enrichment
- [0227] **Agricultural**
- [0228] Atmospheric Nitrogen Fixation
- [0229] Low Cost Pumping Systems with Reduced Moving Parts
- [0230] On-site Fertilizer Production
- [0231] Food / Feed Preservation
- [0232] Pest Control
- [0233] Reduce / Eliminate Hydrocarbon Fuel Use - Carbon Emissions
- [0234] Reclamation of Soil Fouled by Irrigation Residue
- [0235] Reclamation - Recycling of Fertilizer from Irrigation Run-off Water
- [0236] **Waste Management**
- [0237] Human Waste Management
- [0238] Industrial Waste Management
- [0239] Medical Waste Management
- [0240] Toxic Waste Management
- [0241] Sewage Treatment
- [0242] Large Scale Waste Disposal
- [0243] Portable Trash and Waste Management Equipment
- [0244] Waste Recycling / Reclamation Systems
- [0245] Methane Synthesis to Liquid Fuels, Solvents, Industrial Products
- [0246] Run-off Water Treatment
- [0247] **Petroleum Industry**

- [0248] Repressurization of Reservoirs to restore Oil Production - Avoids New Drilling
- [0249] Reclamation of Water from Oil / Water Mix at Wellhead
- [0250] Recovery of Carbon Dioxide for Ethanol Synthesis
- [0251] Down Hole Hydrogenation of Petroleum Products
- [0252] Reclamation of Drilling Mud Water
- [0253] Enable Hydrocarbon Production from Oil Bearing Shales and Sands
- [0254] **Miscellaneous**
- [0255] Echo Ranging for Geological Structural Analysis
- [0256] Extreme Depth Water Measurement
- [0257] Sea Floor Mapping at Extreme Depth
- [0258] Eliminate Gas Transportation Hazards - Point of Use Generation

[0259] The foregoing description of the preferred embodiment of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention not be limited by this detailed description, but by the claims and the equivalents to the claims appended hereto.

INDUSTRIAL APPLICABILITY

[0260] This invention may be industrially applied to devices and methods for generating alternative fuel sources, in particular, converting water into a viable alternative fuel source, for use in engines, such as the internal combustion engine.

CLAIMS

WHAT IS CLAIMED:

1. An apparatus for generating a water vapor molecule with an unnatural bond angle
2 comprising:
 - 3 a. a voltage source of approximately 1 volt to approximately 500 volts
4 providing current to create an intrinsic frequency;
 - 5 b. a plurality of anode plates and a plurality of cathode plates in an alternating
6 arrangement such that a gap of approximately 0.05 inch to approximately 1
7 inch exists between adjacent anode and cathode plates and each anode and
8 cathode plate oriented to allow a flow of a water to pass in between each
9 adjacent anode and cathode plate to create a resonating frequency of
10 approximately 1 KHz to approximately 22 KHz;
 - 11 c. a power pass through connecting the voltage source with the plurality of
12 anode plates and the plurality of cathode plates to supply current to the
13 plurality of anode plates and the plurality of cathode plates;
 - 14 d. a water supply to provide the flow of the water across the plurality of anode
15 plates and the plurality of cathode plates;
 - 16 e. a chamber to contain the plurality anode plates, the plurality of cathode
17 plates, and the water comprising
 - 18 i. a first water inlet orifice,
 - 19 ii. a second water inlet orifice opposite the first water inlet orifice,
 - 20 f. a water pump to force the flow of water from the water supply into the

chamber through the first water inlet orifice in a first direction and through
the second water inlet orifice in a second direction, opposite the first
direction, wherein the passage of the water across an electrically charged
plate increases pressure in the chamber;

g. a water vapor trap located above the water, the water vapor trap comprising
a water outlet orifice positioned on the water vapor trap for an overflowing
water to be redirected back to the water supply;

h. a water vapor outlet positioned on the water vapor trap to allow the water
vapor molecule with the unnatural bond angle to escape from the water
vapor trap; and

i. a pressure vessel connected to the water vapor outlet to contain the water
vapor molecule with the unnatural bond angle; wherein combining the
intrinsic frequency and the resonating frequency created between the
plurality of cathode plates and the plurality of anode plates converts the
water molecule into the water vapor molecule with the unnatural bond angle
for use as a fuel source.

2. An apparatus for generating a vapor molecule with an unnatural bond angle
comprising:

a. a voltage source to provide a current;

b. a resistor-capacitor circuit comprising

i. an anode electrically connected to a negative terminal of the voltage
source;

ii. a cathode, opposite the anode and electrically connected to a positive
terminal of the voltage source; and

iii. a plurality of electrically conductive plates in between the anode and
the cathode, each electrically conductive plate comprising a surface area
and being separated by a gap;

c. a chamber to contain the anode, the cathode, the plurality of electrically
conductive plates, and a fluid, wherein passing the current between the
cathode and the anode generates a modifying frequency and increases a
pressure in the chamber, thereby generating the vapor molecule with the
unnatural bond angle.

3. The apparatus of claim 2, wherein

a. the voltage applied to the resistor-capacitor circuit comprises an intrinsic
frequency; and

b. the plurality of electrically conductive plates generate a resonating frequency
of approximately 50 Hz to approximately 40 KHz within the resistor-
capacitor circuit, whereby the intrinsic frequency and the resonating
frequency summate to generate the modifying frequency sufficient to modify
a bond angle of the vapor molecule to an unnatural state.

4. The apparatus of claim 3, wherein the electrically conductive plates are substantially
parallel to each other.

5. The apparatus of claim 4, wherein the gap is approximately 0.05 inch to
approximately 1 inch.

6. The apparatus of claim 4, wherein the gap is approximately 0.05 inch to
2 approximately 0.25 inch.
7. The apparatus of claim 4 further comprising a means for causing the fluid to flow
2 substantially parallel along the electrically conductive plates to increase the
efficiency of generating the vapor molecule with the unnatural bond angle.
8. The apparatus of claim 7, wherein the chamber comprises a first fluid inlet orifice
2 through which the fluid can flow into the chamber and along the plurality of
electrically conductive plates.
9. The apparatus of claim 8 further comprising
- 2 a. a fluid supply;
- b. a fluid pump to force the flow of the fluid through the first fluid inlet orifice
4 along the plurality of electrically conductive plates; and
- c. a fluid outlet orifice to allow the fluid to recycle the fluid back to the fluid
6 supply so as to allow a constant motion of flowing fluid across the plurality
of electrically conductive plates.
10. The apparatus of claim 9 further comprising a second fluid inlet orifice positioned
2 opposite the first fluid inlet orifice such that the fluid pump forces the fluid through
the first fluid inlet orifice in a first direction while simultaneously forcing the fluid
4 through the second fluid inlet orifice in a second direction opposite the first
direction such that the fluid flows across the plurality of electrically conductive
6 plates from at least two different directions to maximize a flow rate across the
electrically conductive plates.

11. The apparatus of claim 9 further comprising:

- a. a water vapor outlet; and
- b. a pressure vessel connected to the water vapor outlet to contain the vapor molecule with the unnatural bond angle for storage until use.

12. A method of modifying a bond angle of a molecule comprising:

- a. providing a first frequency;
- b. providing a second frequency different from the first frequency;
- c. generating a modifying frequency by combining the first frequency and the second frequency; and
- d. exposing the molecule to the modifying frequency to create an unnatural bond angle.

13. The method of claim 12, further comprising the steps of

- a. providing at least one additional frequency; and
- b. combining the at least one additional frequency with the first and second frequency to generate the modifying frequency.

14. The method of claim 12, wherein

- a. the first frequency is an intrinsic frequency generated by a power source;
- b. the second frequency is a resonating frequency generated from a plurality of electrically conductive plates, wherein each electrically conductive plate comprises a surface area and is arranged parallel to each other; and
- c. wherein the power source and the electrically conductive plates create a resistor-capacitor circuit.

15. The method of claim 14 further comprising:
- a. pressurizing the molecule with the unnatural bond angle to maintain the unnatural bond angle; and
 - b. containing the pressurized molecule with the unnatural bond angle in a pressure vessel.
16. The method of claim 14, wherein the resonating frequency is approximately 50 Hz to approximately 40 KHz.
17. The method of claim 14, wherein the resonating frequency is approximately 1 KHz to approximately 22 KHz.
18. The method of claim 14 further comprising applying a current from the power source with a duty cycle of approximately 0.005 to approximately 0.50.
19. The method of claim 18, wherein the power source applied to the plurality of electrically conductive plates creates a power of at least approximately 10 watts per square feet of surface area.
20. The method of claim 19, wherein the power source applied to the plurality of electrically conductive plates creates a power of approximately 10 watts per square feet to approximately 100 watts per square feet of surface area.
21. The method of claim 20, wherein the power applied to the plurality of electrically conductive plates is approximately 30 watts per square feet of surface area to approximately 50 watts per square feet of surface area.
22. The method of claim 12 wherein the molecule is water.
23. A molecule comprising an unnatural bond angle wherein reversion of the unnatural

2 bond angle back to a natural bond angle state releases energy.

24. The molecule of claim 23, wherein the molecule comprising the unnatural bond
2 angle is pressurized.

25. The molecule of claim 24, wherein the molecule is water.

26. The molecule of claim 25, wherein the unnatural bond angle is greater than
2 approximately 104.5 degrees.

27. The molecule of claim 26, wherein the unnatural bond angle is greater than
2 approximately 109 degrees.

28. A method of using a molecule with an unnatural bond angle as an energy source
2 comprising:

a. providing the molecule with the unnatural bond angle in a pressurized vessel
4 at a pressure of approximately 1 psi to approximately 100 psi;

b. releasing the molecule with the unnatural bond angle from the pressurized
6 vessel;

c. igniting the molecule with the unnatural bond angle,

8 d. wherein ignition of the molecule with the unnatural bond angle reverts the
unnatural bond angle back to a natural bond angle state and releases energy.

29. The method of claim 28 further comprising using the energy as an alternative fuel
2 source.

30. The method of claim 29, wherein the alternative fuel is used as a replacement for
2 gasoline for powering a motorized device.

31. The method of claim 30, wherein the alternative fuel is used to maintain a flame.

32. A method of powering a motorized vehicle comprising:
- a. generating vapor molecules with unnatural bond angles ("vapor molecules")
in a storage container inside a motorized vehicle;
 - b. metering vapor molecules into an engine with a first mass flow controller;
 - c. metering air flow into the engine with a second mass flow controller;
 - d. mixing the vapor molecules, air, and a fuel in a compartment of the engine
selected from the group consisting of a carburetor, an intake manifold, and a
cylinder; and
 - e. actuating the vapor molecules inside a cylinder to drive a piston to create
work.
33. A method of powering an engine, comprising:
- a. introducing vapor molecules with unnatural bond angles ("vapor molecules")
into a cylinder of an engine; and
 - b. actuating the vapor molecules to drive a piston.
34. The method of claim 33, further comprising feeding the vapor molecules into the
cylinder from a storage container.
35. The method of claim 34, wherein the storage container is a pressurized vessel.
36. The method of claim 34, wherein the storage container generates the vapor
molecules.
37. The method of claim 34, wherein the vapor molecules are introduced into the
cylinder through an intake valve.

38. The method of claim 34, wherein the vapor molecules are injected directly into the
cylinder.
39. The method of claim 34, wherein the vapor molecules are metered into an intake
manifold by a mass flow controller.
40. The method of claim 33 further comprising mixing the vapor molecules with a fuel.
41. The method of claim 40, wherein the vapor molecules and the fuel are mixed before
introducing into the cylinder.
42. The method of claim 40, wherein the vapor molecules and the fuel are mixed in the
cylinder.
43. An alternative fuel vehicle, comprising:
- a. an engine, the engine comprising
 - i. a cylinder, and
 - ii. a piston housed inside the cylinder; and
 - b. an alternative fuel comprising vapor molecules with unnatural bond angles to
provide energy to the engine, wherein the alternative fuel is introduced into
the cylinder of the engine for actuation to generate energy to drive the piston
inside the cylinder to create work;
 - c. a means for introducing the alternative fuel into the cylinder, the means
selected from the group consisting of a passive flow device, a metering
device, and an injection device;
 - d. an alternative fuel generator carried on the vehicle to generate the alternative
fuel and contain the alternative fuel in a compressed state; and

- 14 e. a line connecting the alternative fuel generator to the engine to feed the
 alternative fuel to the engine.

44. An alternative fuel vehicle, comprising:

- 2 a. an engine, the engine comprising:
- i. a cylinder, and
- 4 ii. a piston housed inside the cylinder; and
- b. an alternative fuel comprising vapor molecules with unnatural bond angles,
6 wherein the alternative fuel is introduced into the cylinder of the engine and
 actuated to release energy to drive the piston inside the cylinder.

45. The alternative fuel vehicle of claim 44, wherein the engine comprises a means for
2 introducing the alternative fuel into the cylinder.

46. The alternative fuel vehicle of claim 45 further comprising:

- 2 a. a first fuel injector to inject a fuel into the cylinder; and
- b. a second fuel injector to inject the alternative fuel into the cylinder.

47. The alternative fuel vehicle of claim 45 further comprising a carburetor, the
2 carburetor comprising:

- a. a throttle body having a first end and a second end;
- 4 b. a channel within the throttle body extending from the first end to the second
 end, the channel having a wall;
- 6 c. a throttle plate positioned at the second end, the throttle plate rotatable
 within the channel;

8 d. a fuel inlet within the wall of the channel to introduce the fuel into the
carburetor; and

10 e. an alternative fuel inlet within the wall of the channel to introduce the
alternative fuel into the carburetor to mix with the fuel.

48. The alternative fuel vehicle of claim 44 further comprising a mass flow controller to
2 meter an amount of the alternative fuel into the cylinder.

49. The alternative fuel vehicle of claim 44 further comprising:

2 a. a storage container; and

 b. a line connecting the storage container to the engine to feed the alternative
4 fuel to the engine.

50. The alternative fuel vehicle of claim 49, wherein the storage container is a
2 pressurized vessel.

51. The alternative fuel vehicle of claim 49, wherein the storage container generates the
2 vapor molecules with unnatural bond angles.

52. A method of powering an engine, comprising:


2 a. introducing vapor molecules with unnatural bond angles ("vapor molecules")
into an engine; and

4 b. actuating the vapor molecules to create kinetic energy.

53. The method of claim 52, wherein the vapor molecules are water molecules with an
2 unnatural bond angle of greater than approximately 104.5 degrees.

54. The method of claim 52, wherein the engine is an internal combustion engine.

1/20

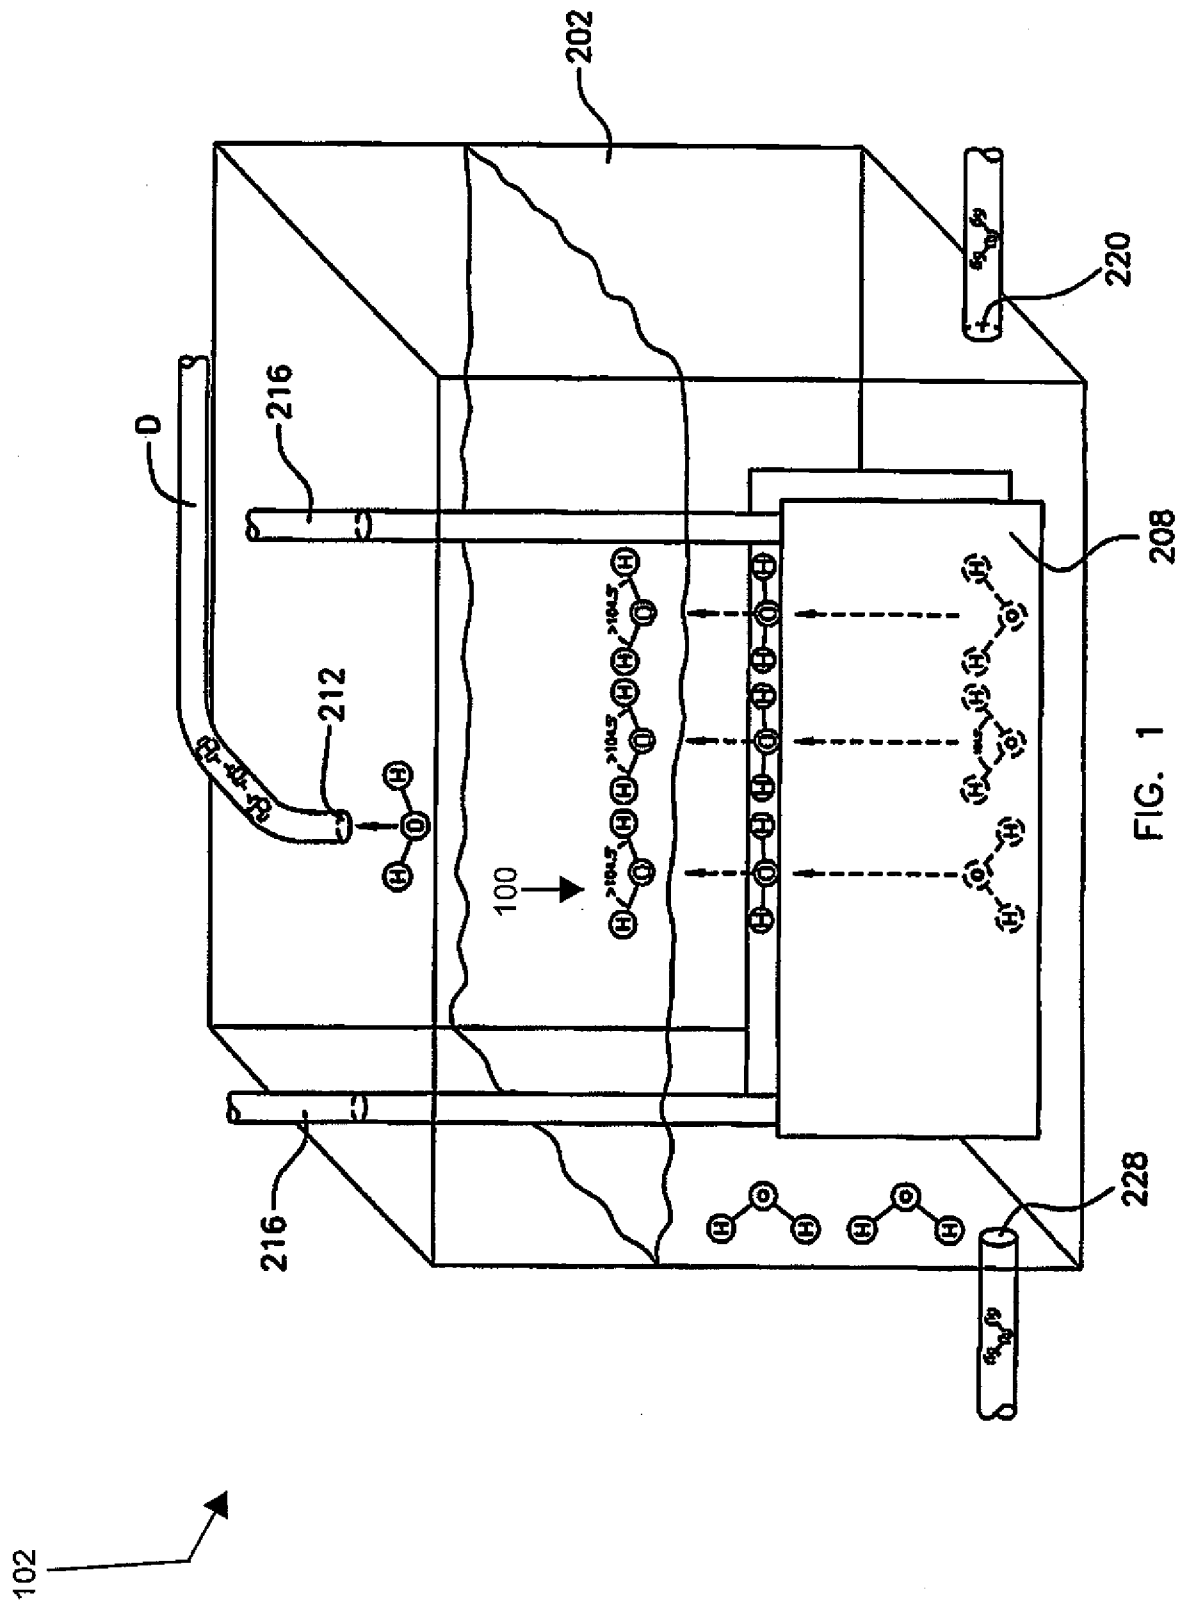

102

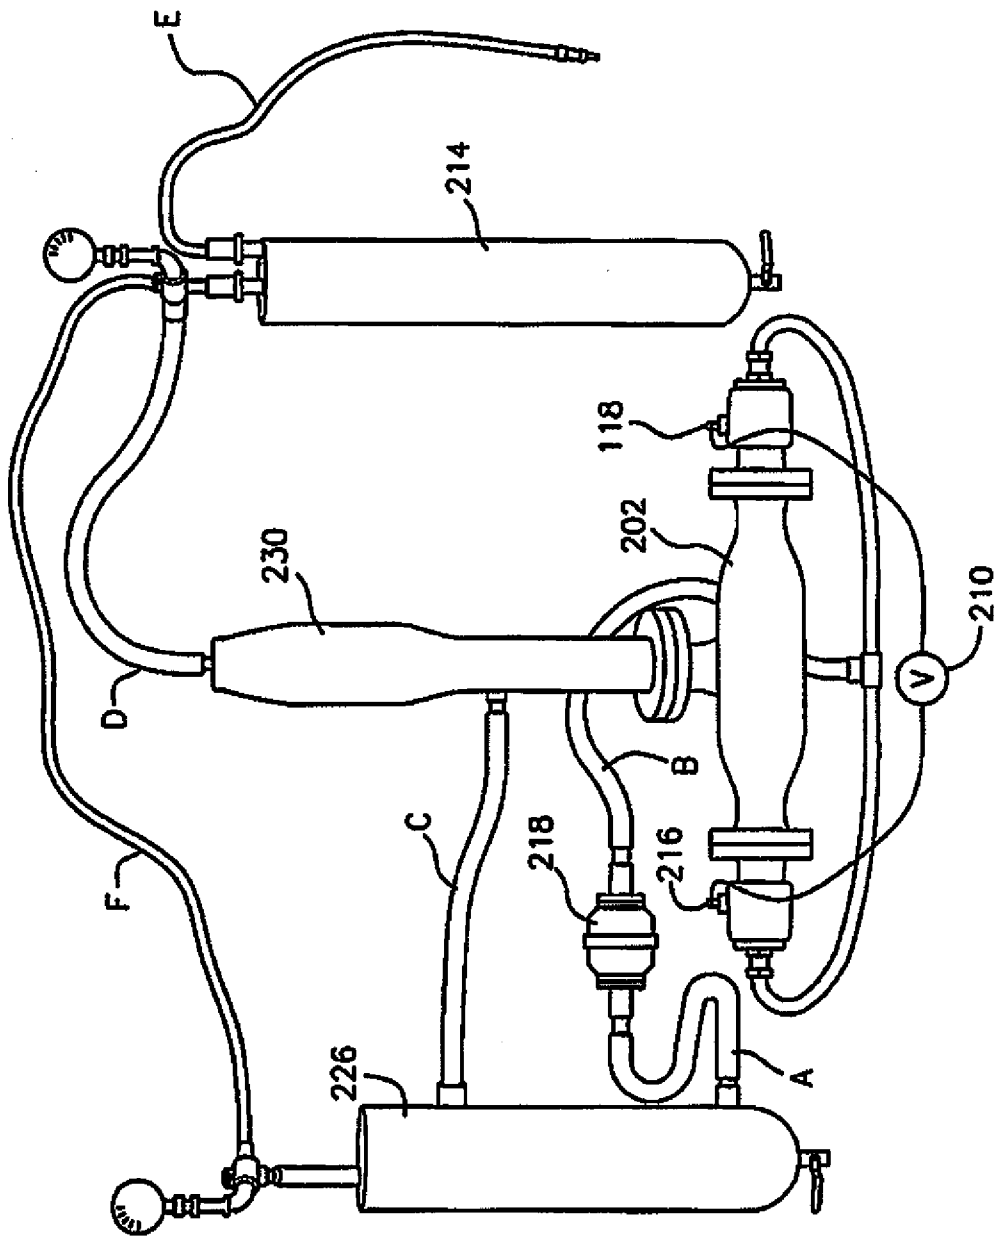


FIG. 2

3/20

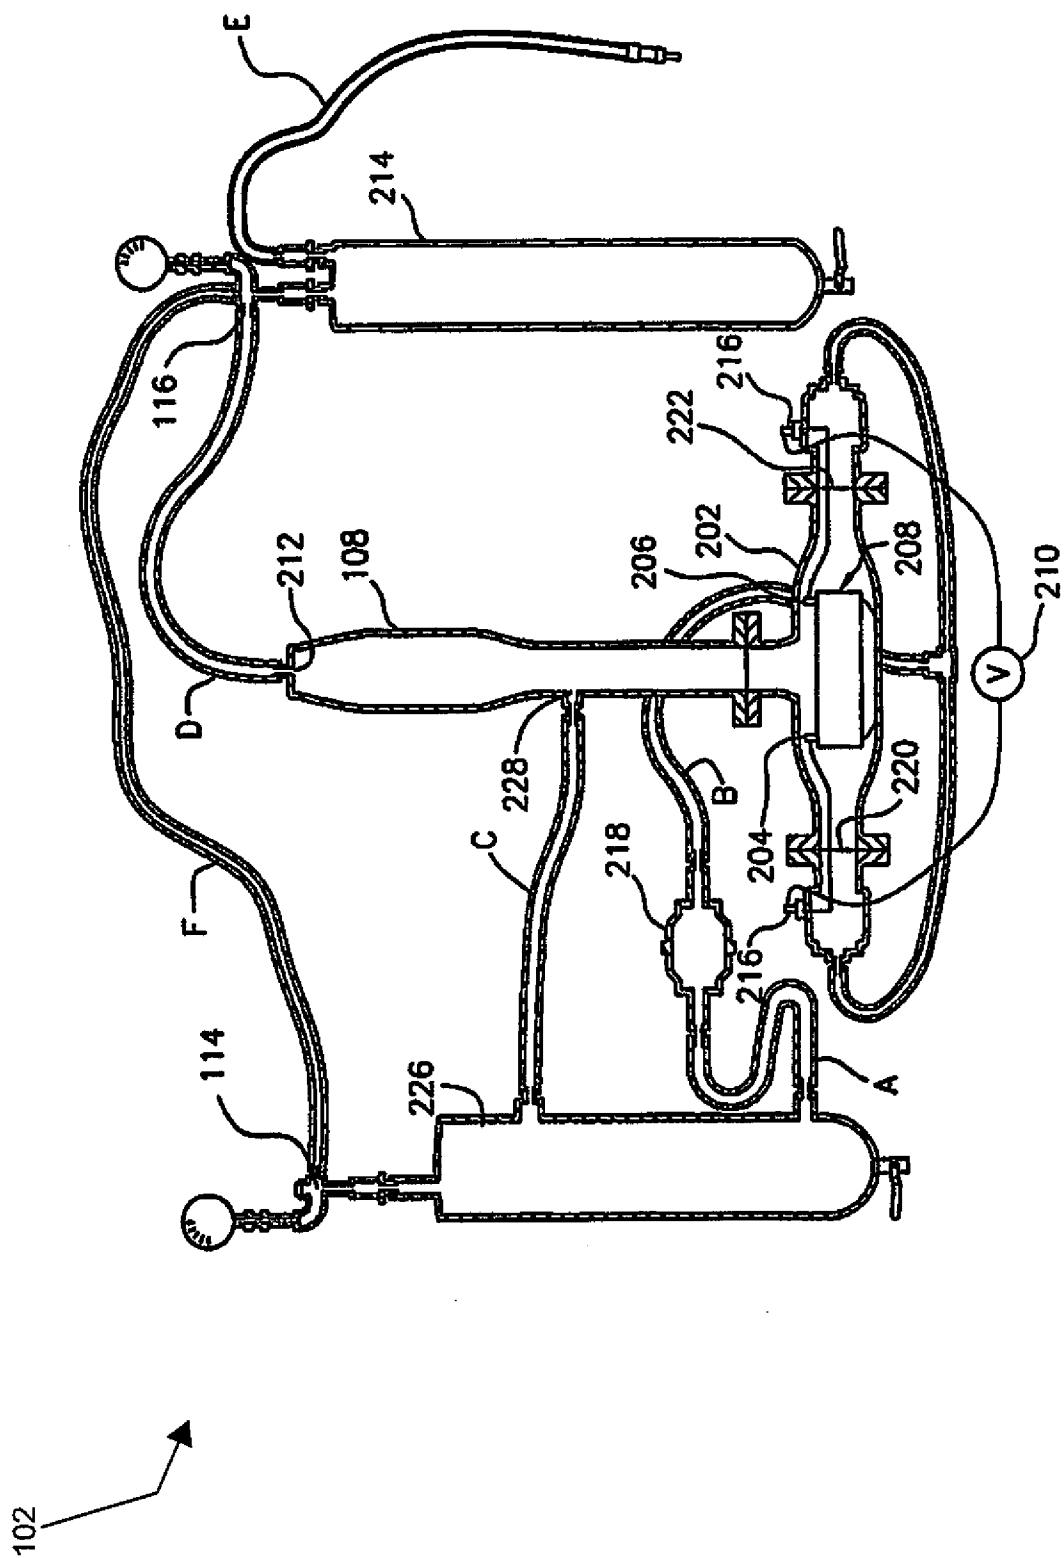


FIG. 3

4/20

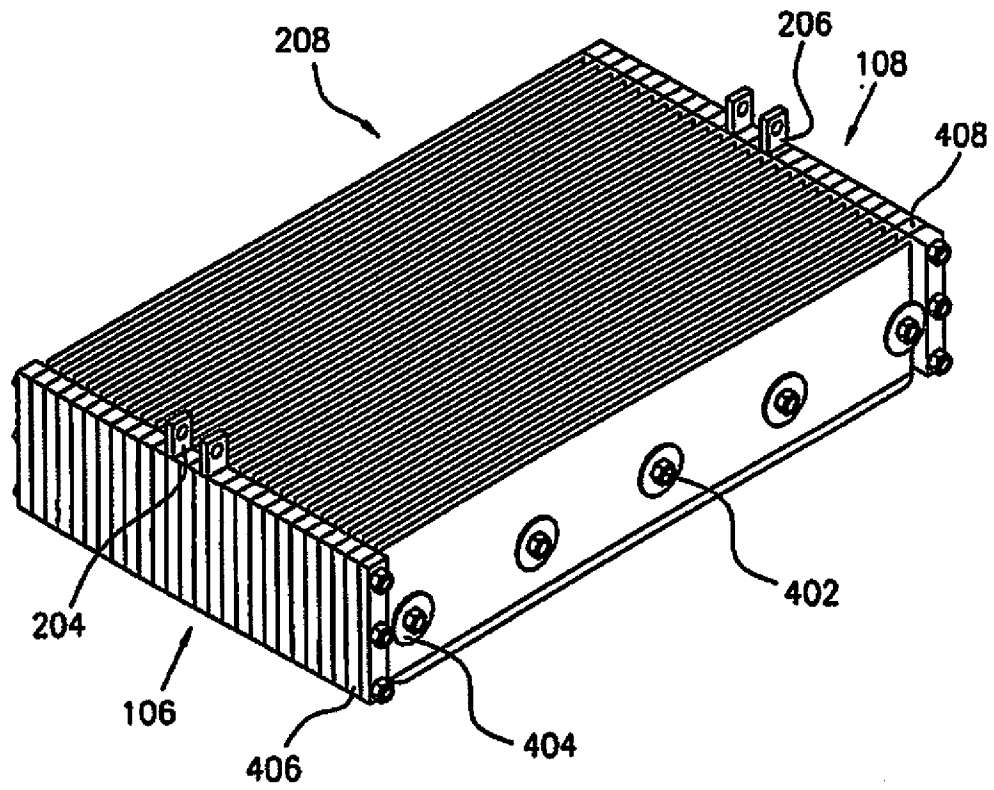


FIG. 4

5/20

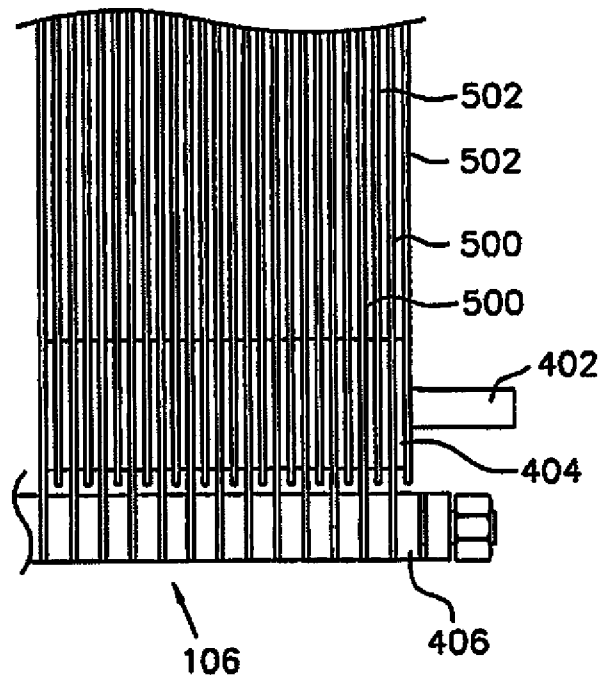


FIG. 5

6/20

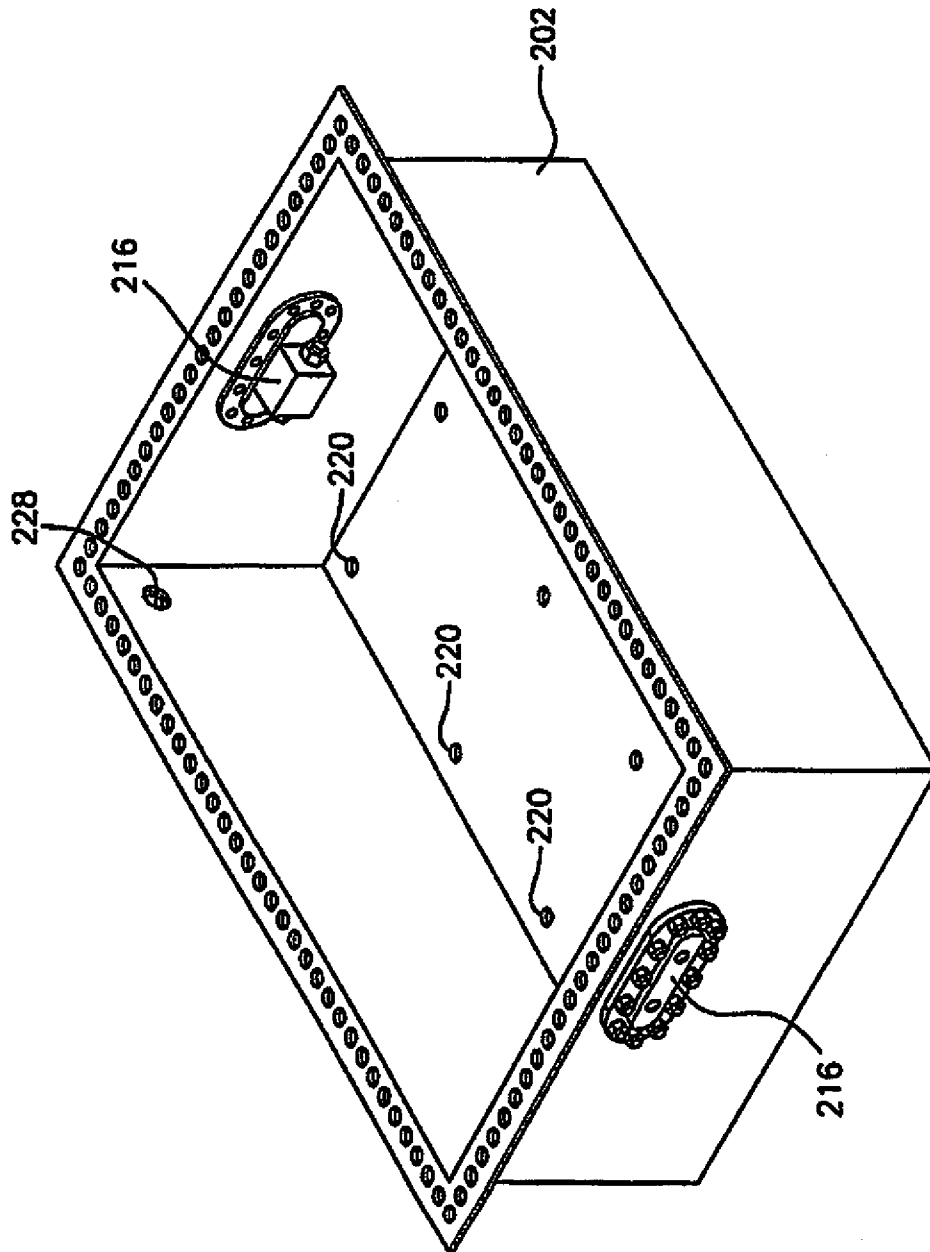


FIG. 6

7/20

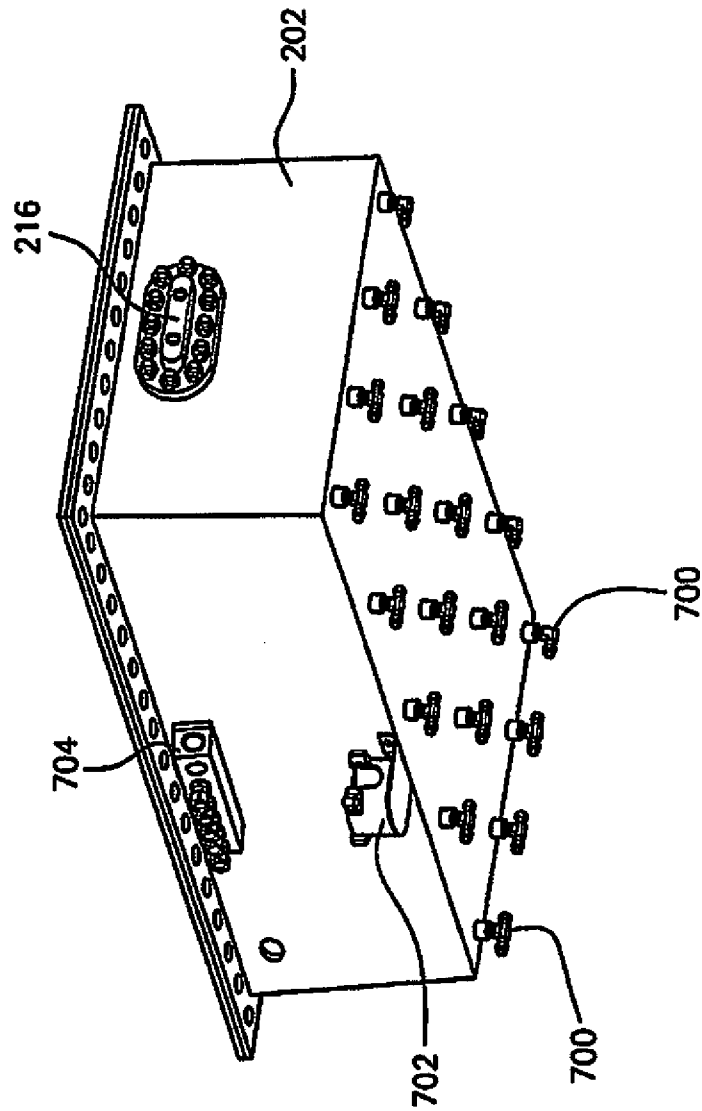


FIG. 7

8/20

102

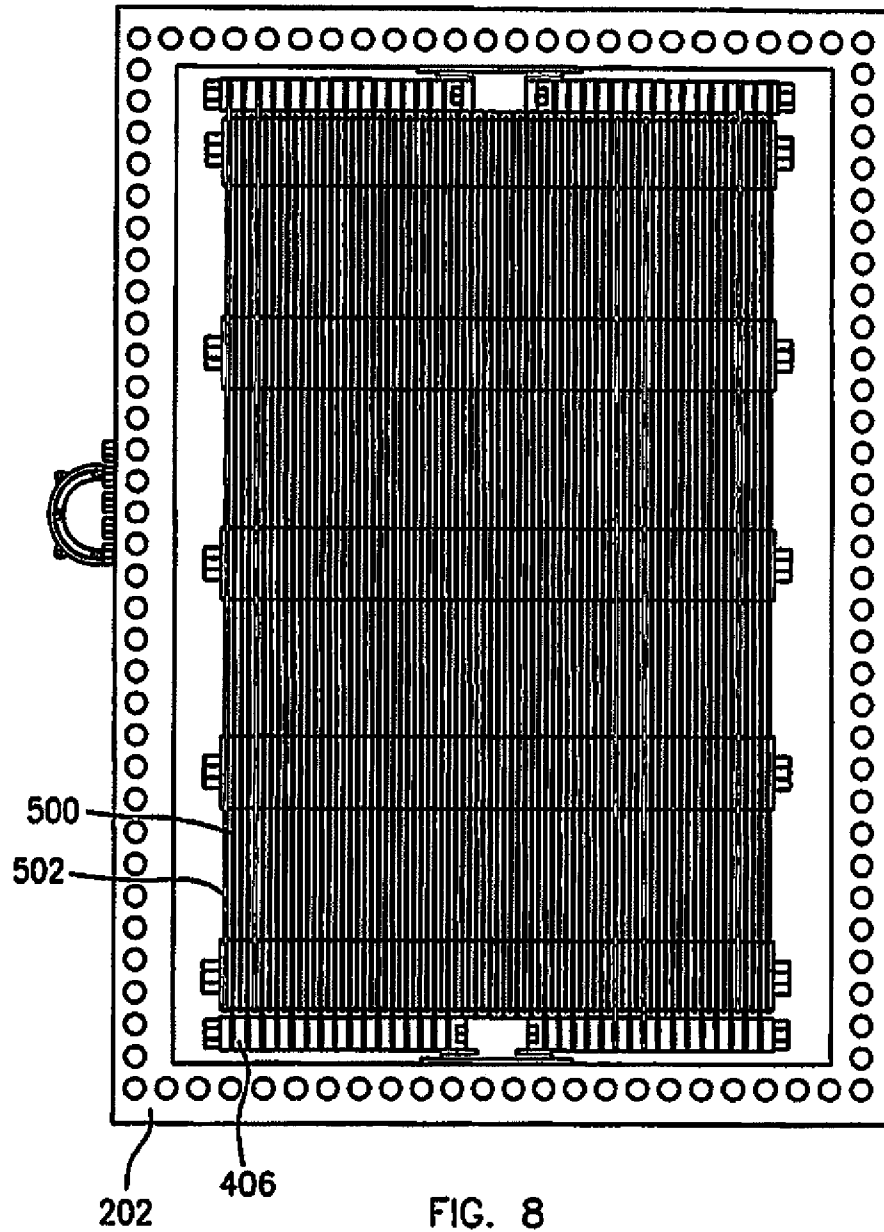



FIG. 8

9/20

102

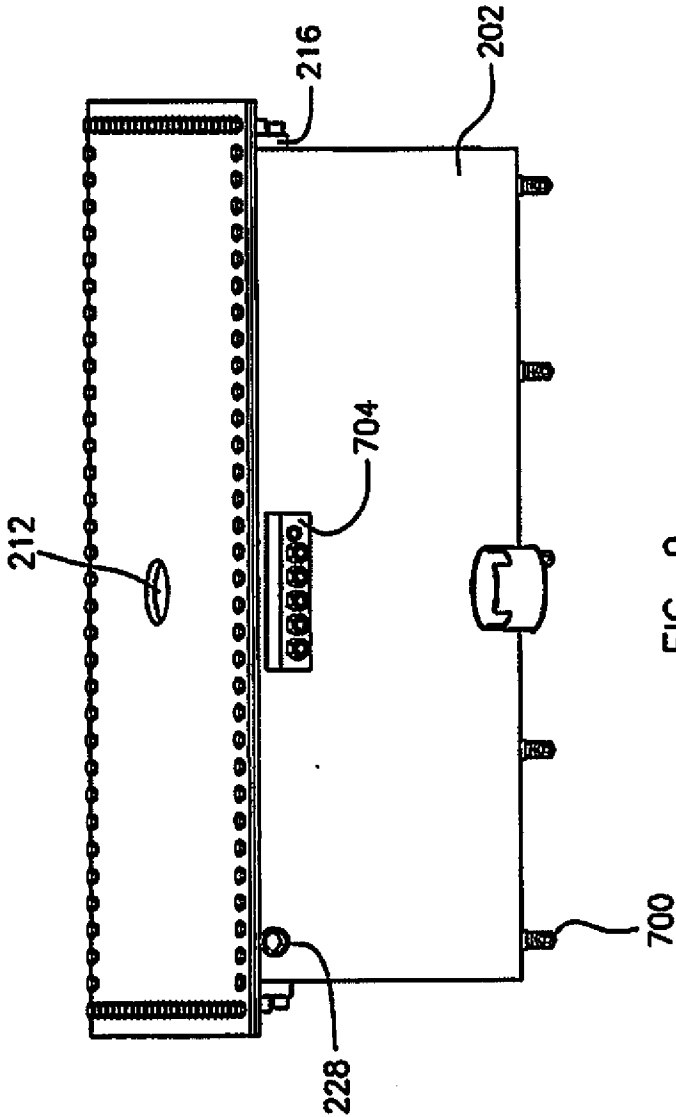


FIG. 9

10/20

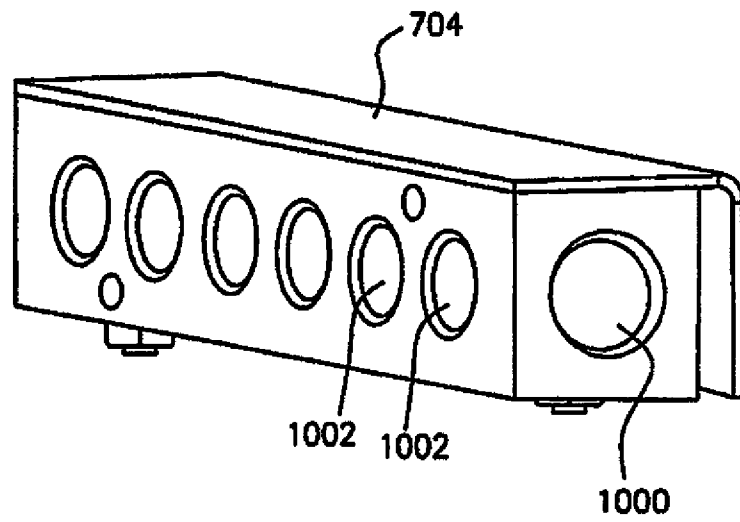


FIG. 10

11/20

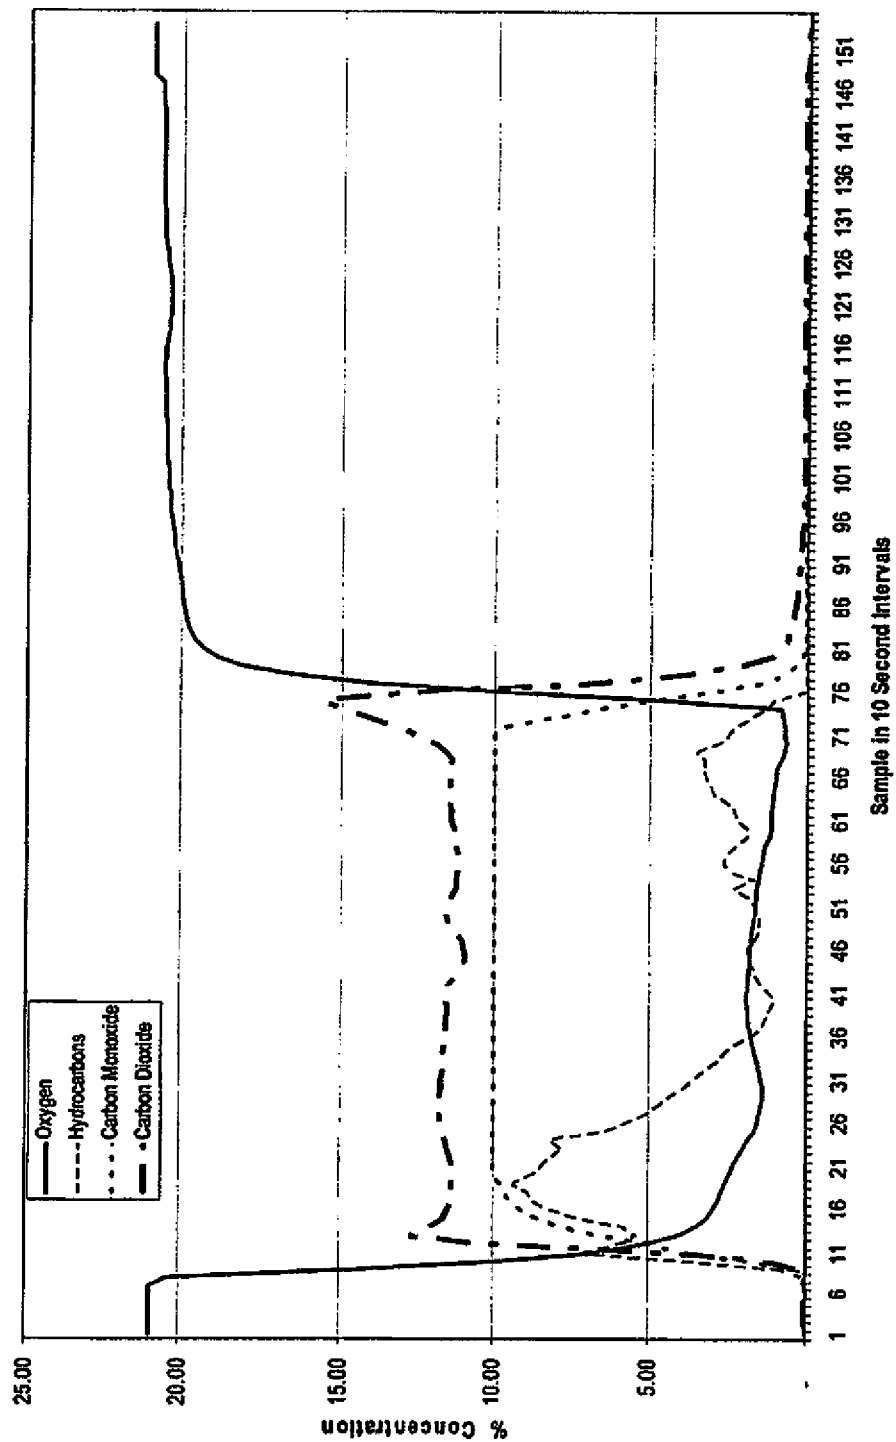


FIG. 11

12/20

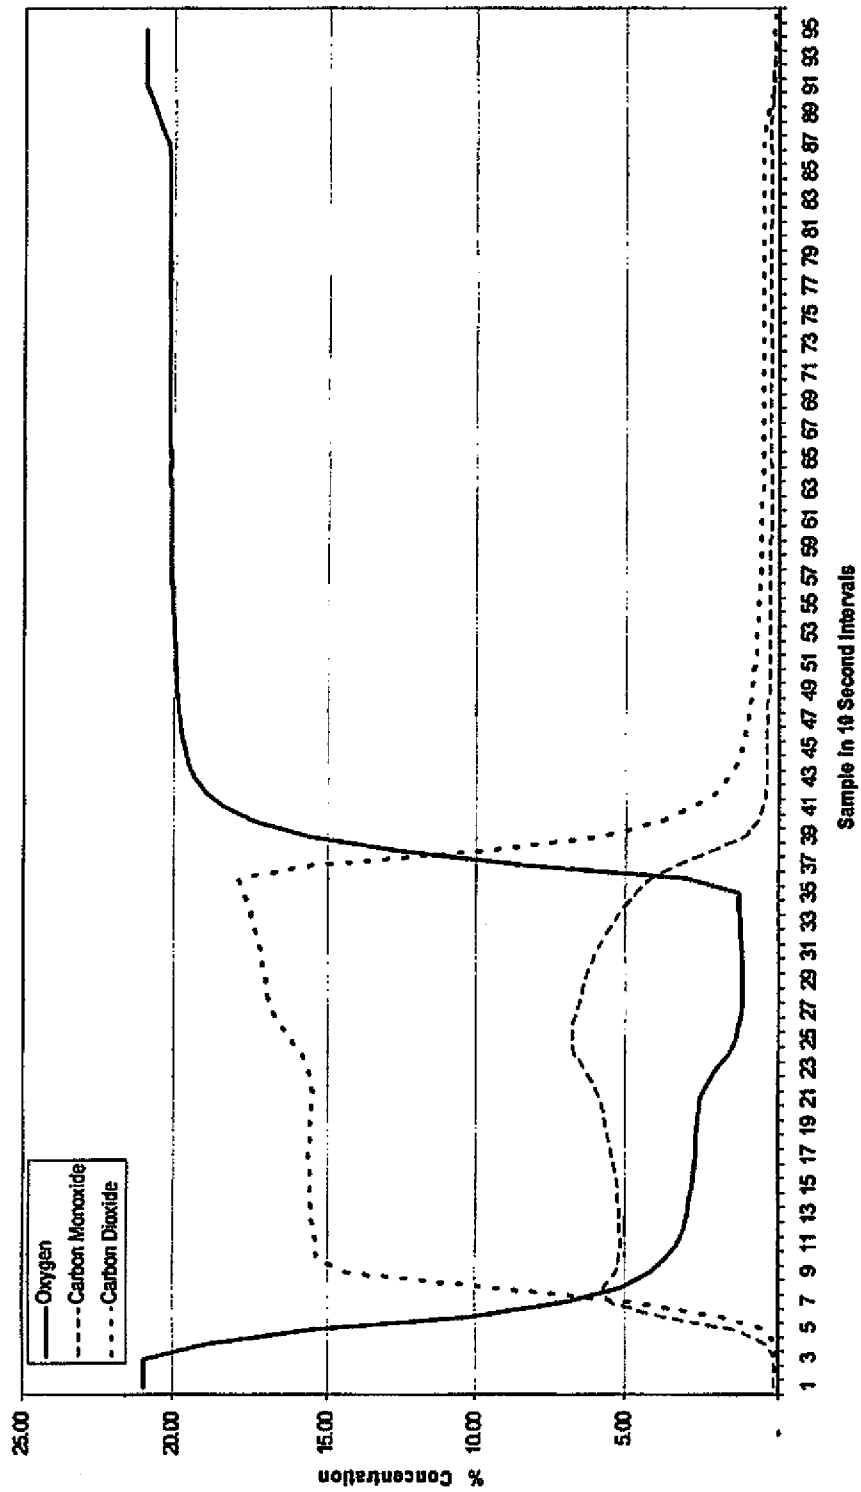


FIG. 12

13/20

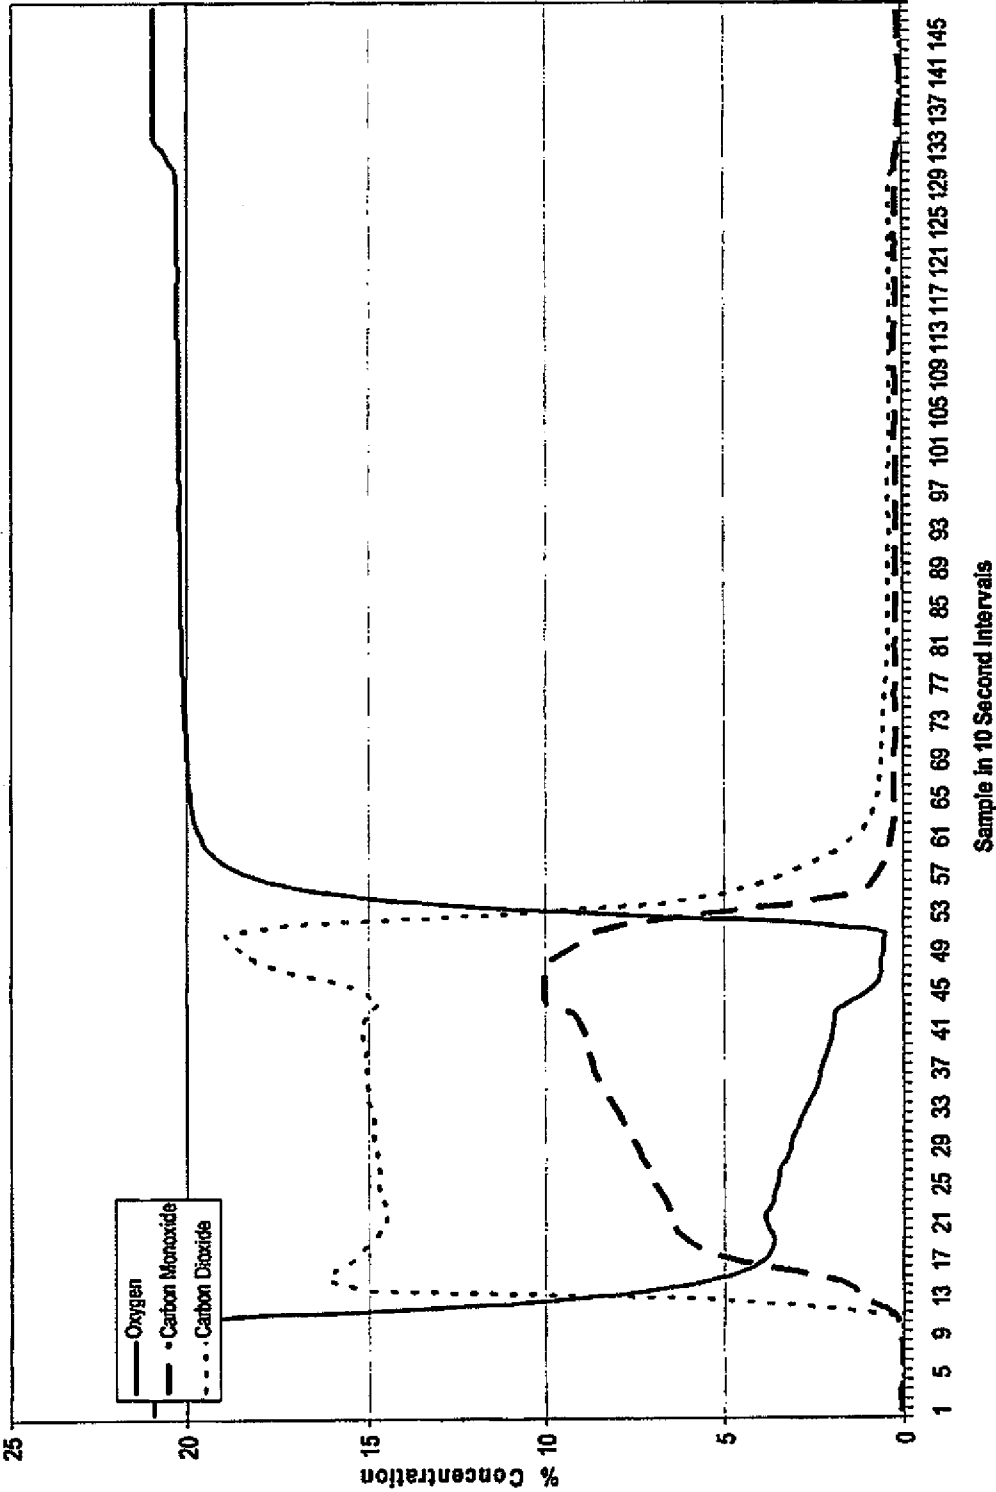


FIG. 13

14/20

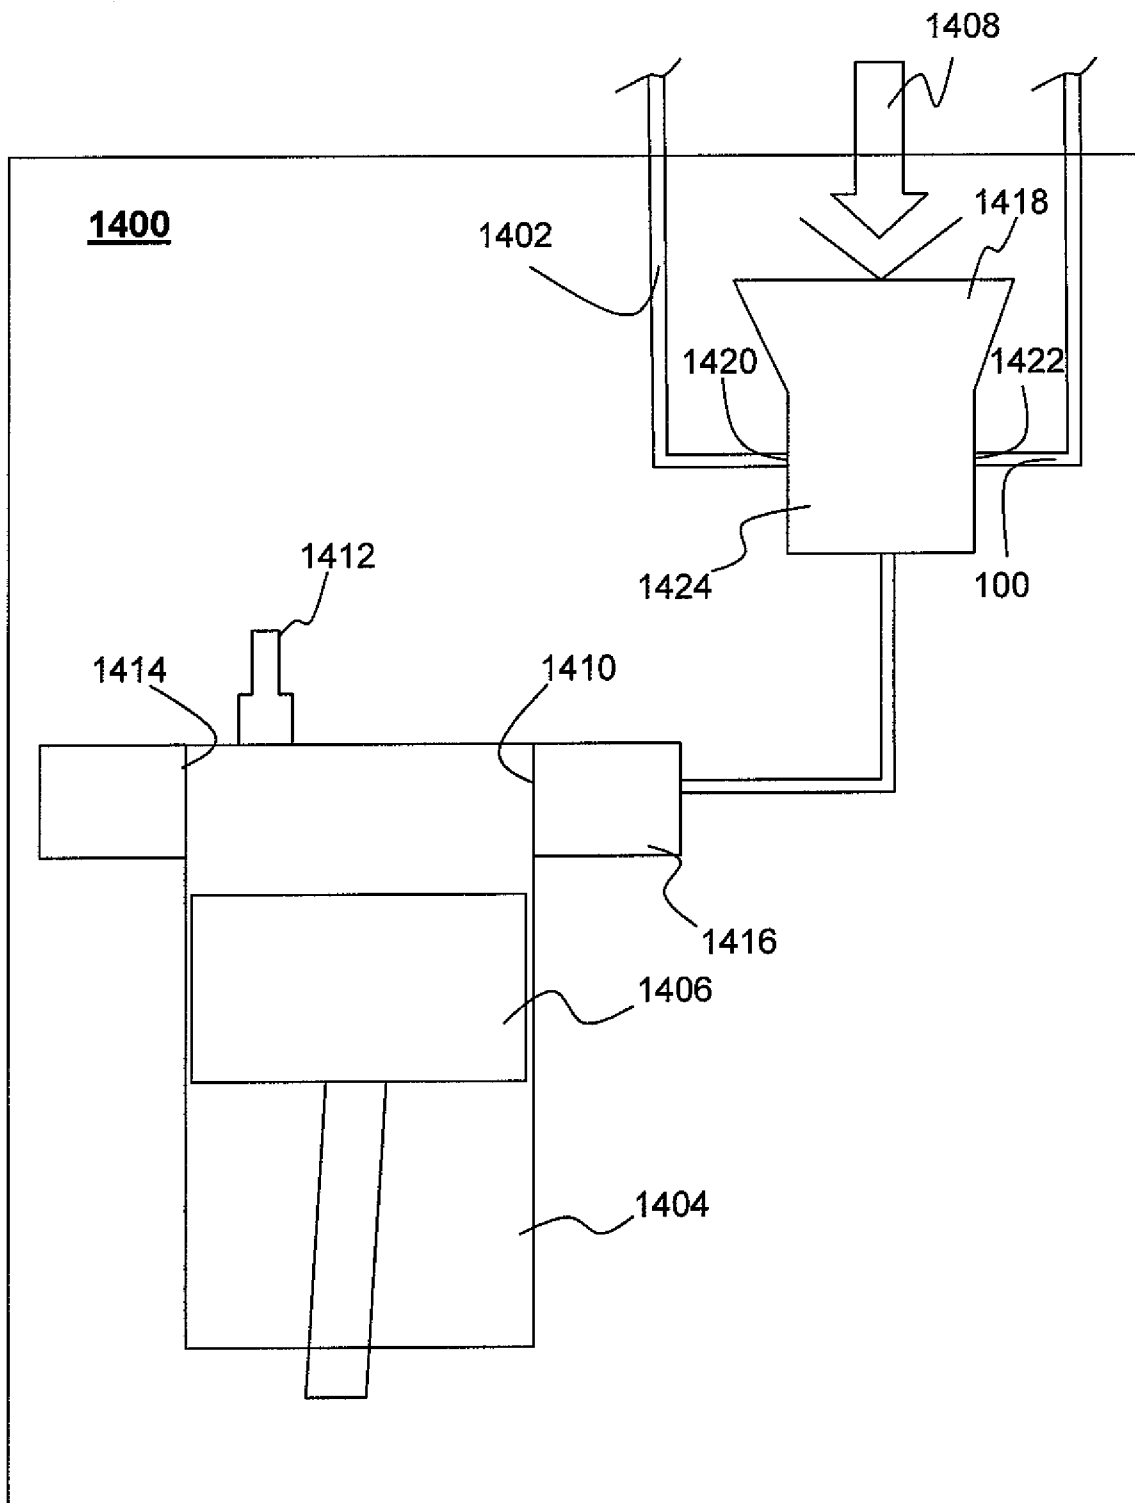


FIG. 14

15/20

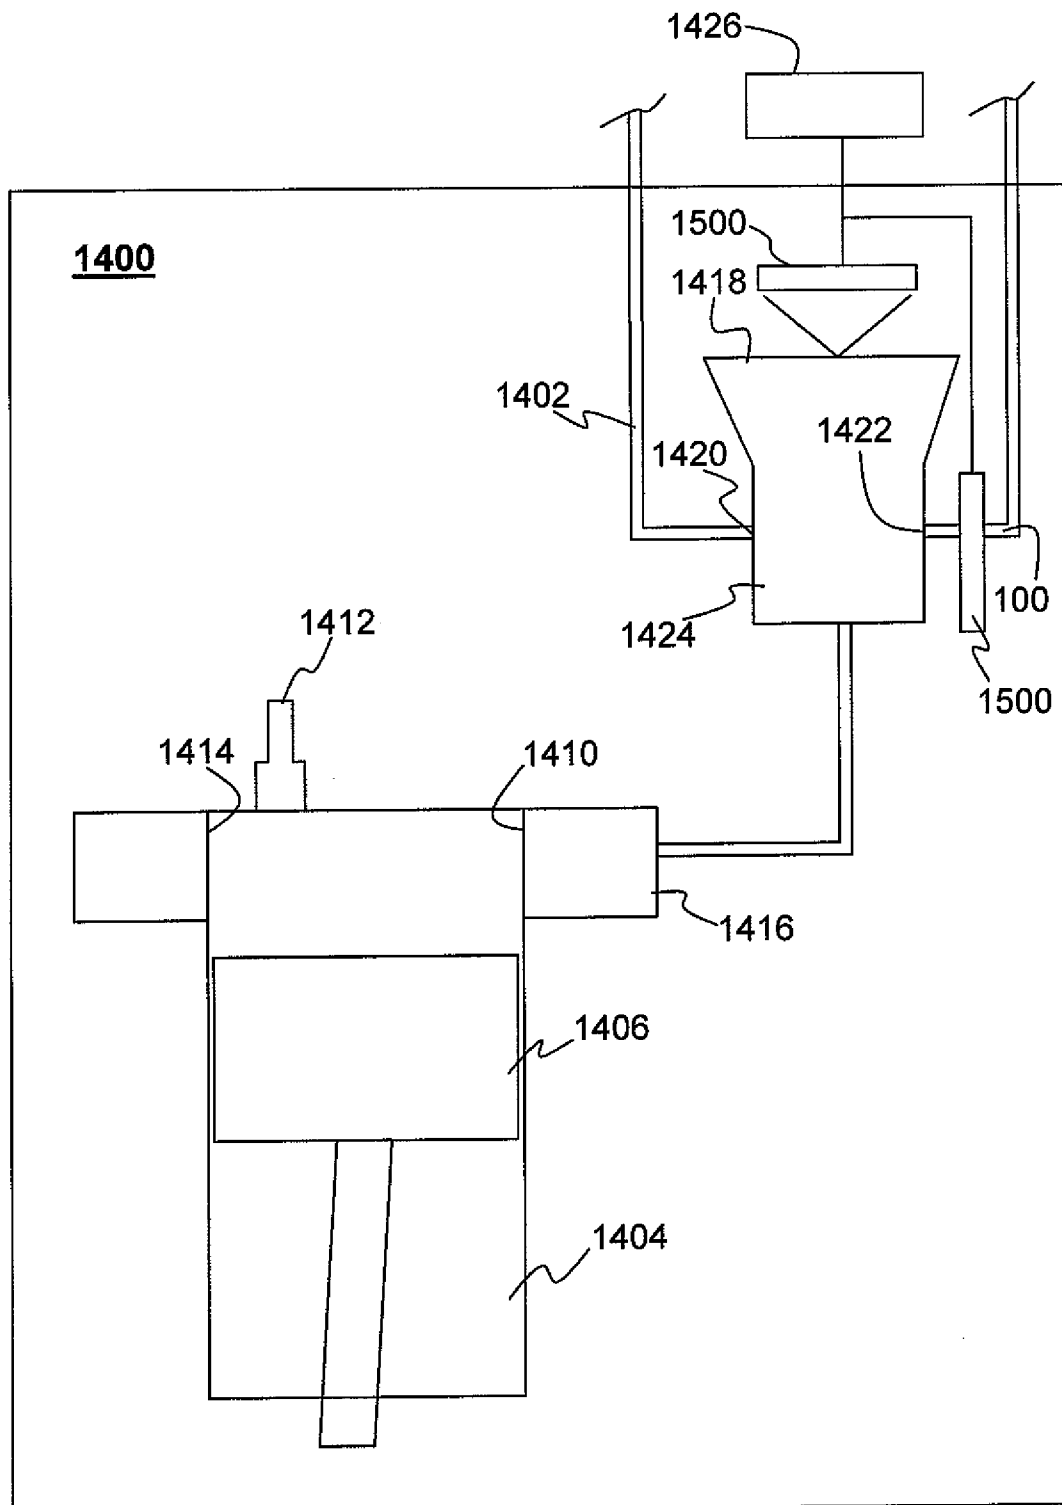


FIG. 15

16/20

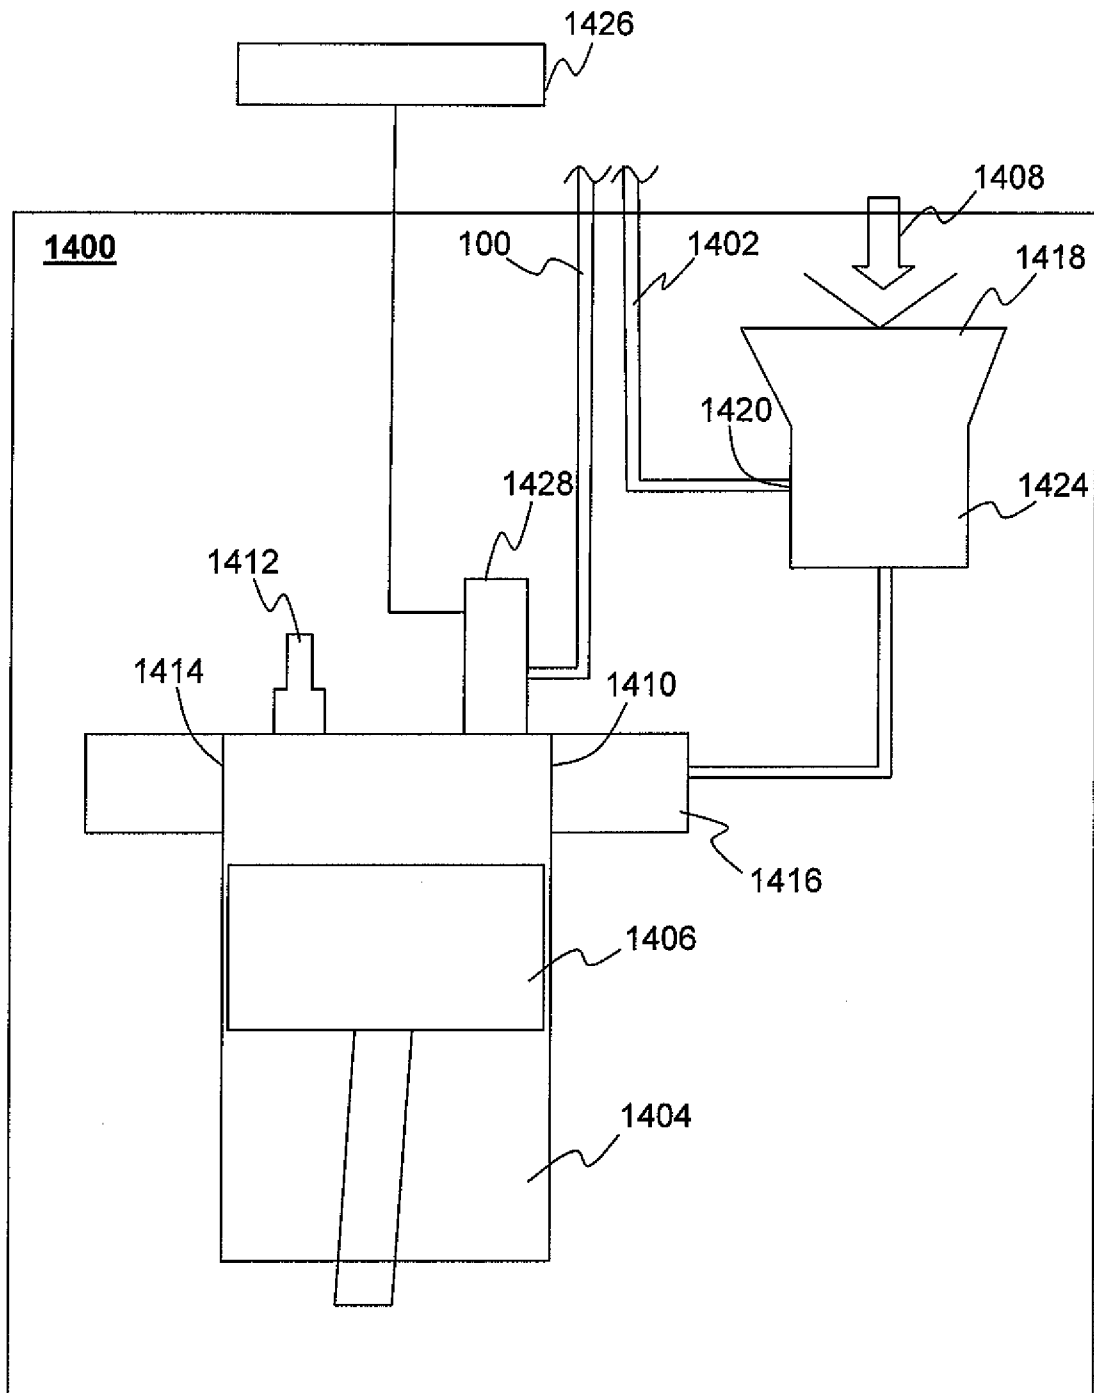


FIG. 16

17/20

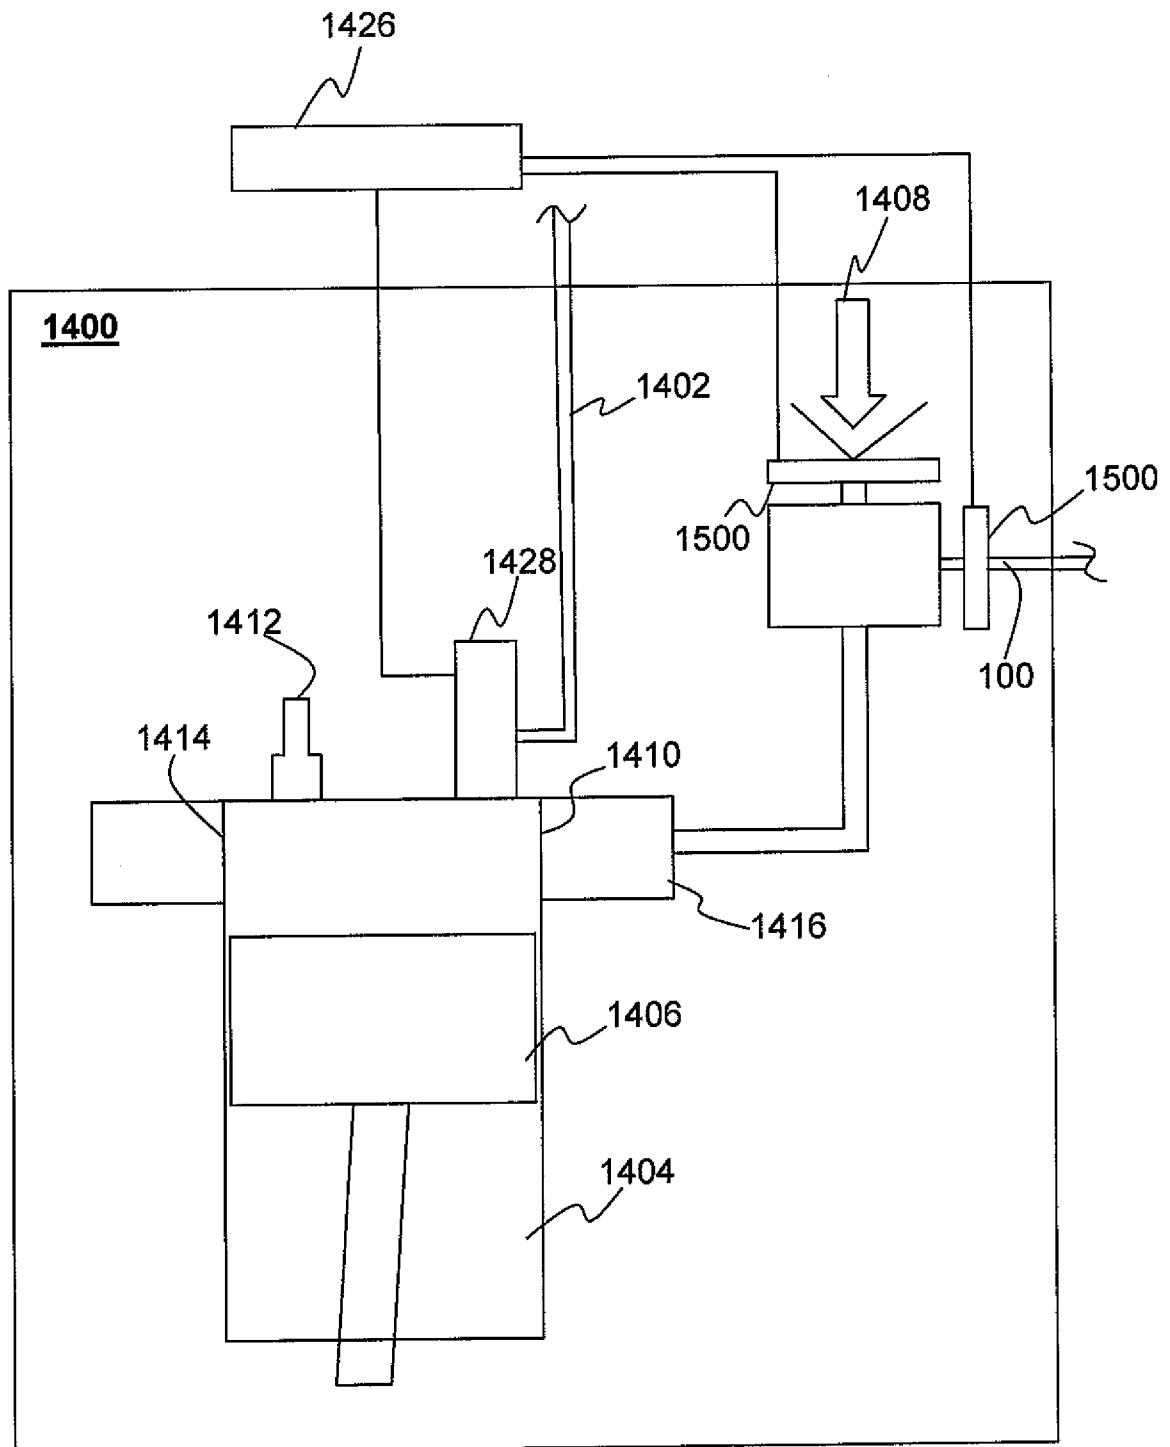


FIG. 17

18/20

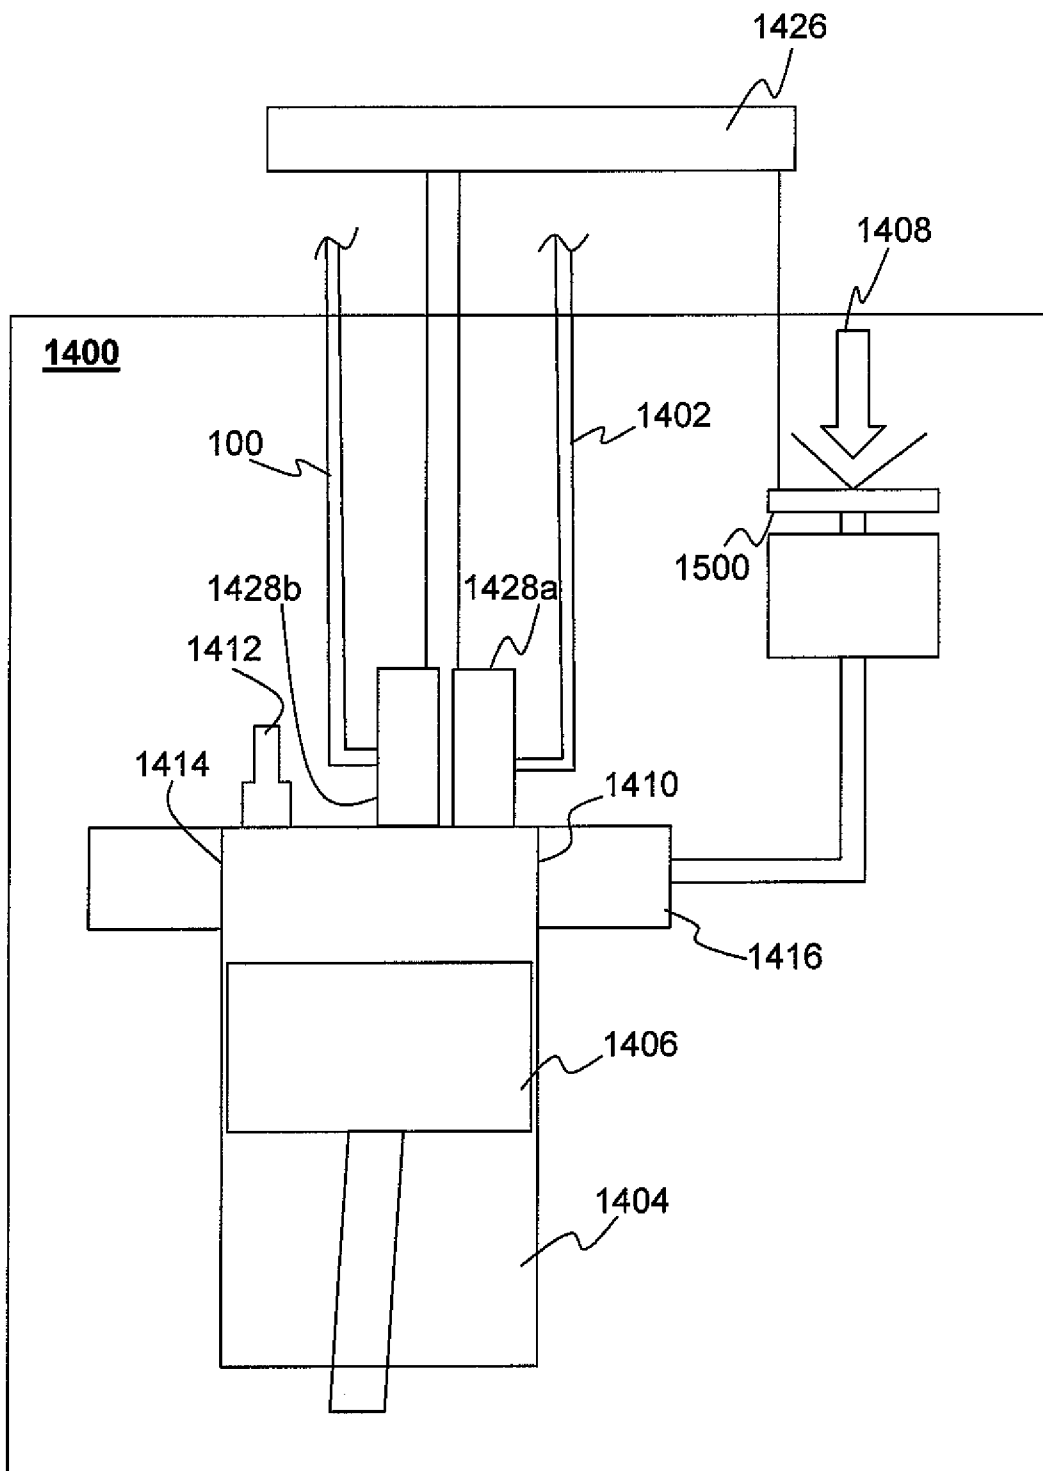


FIG. 18

19/20

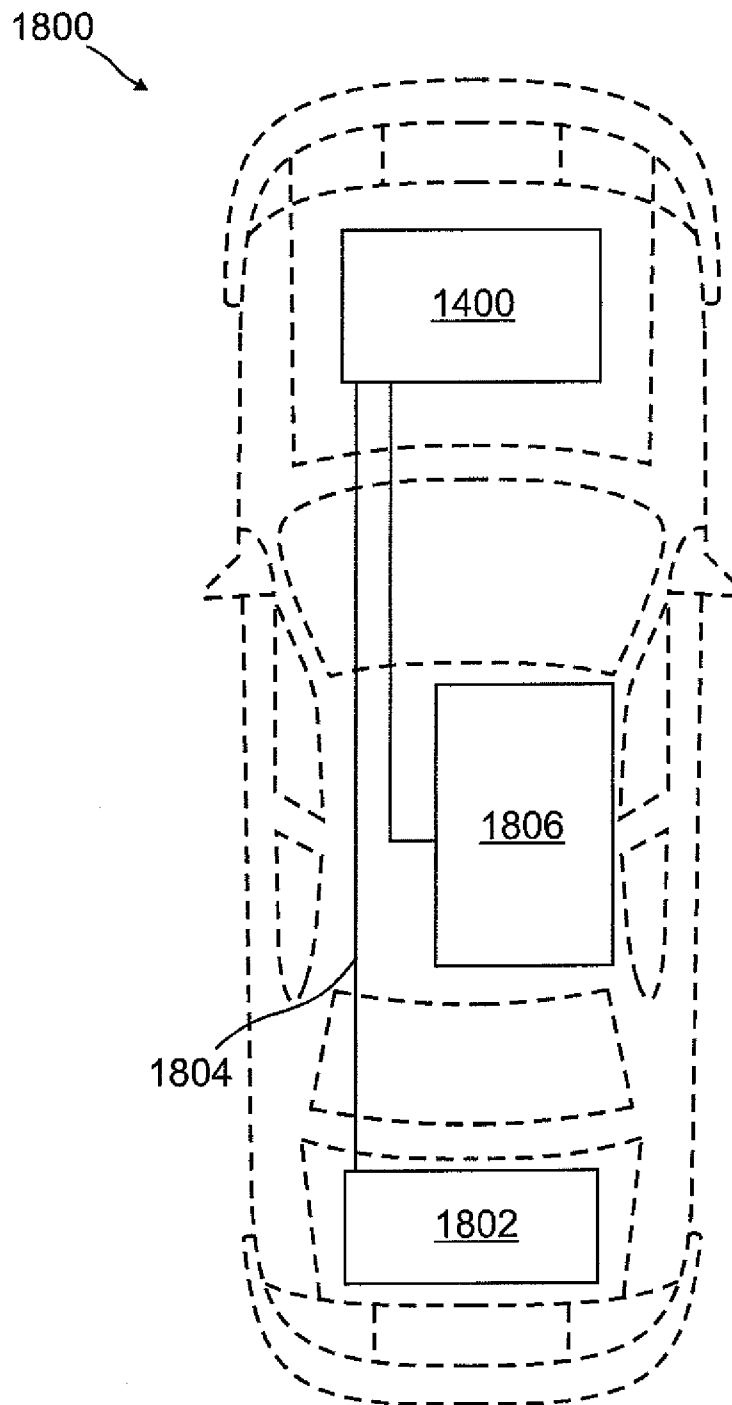


FIG. 19

20/20

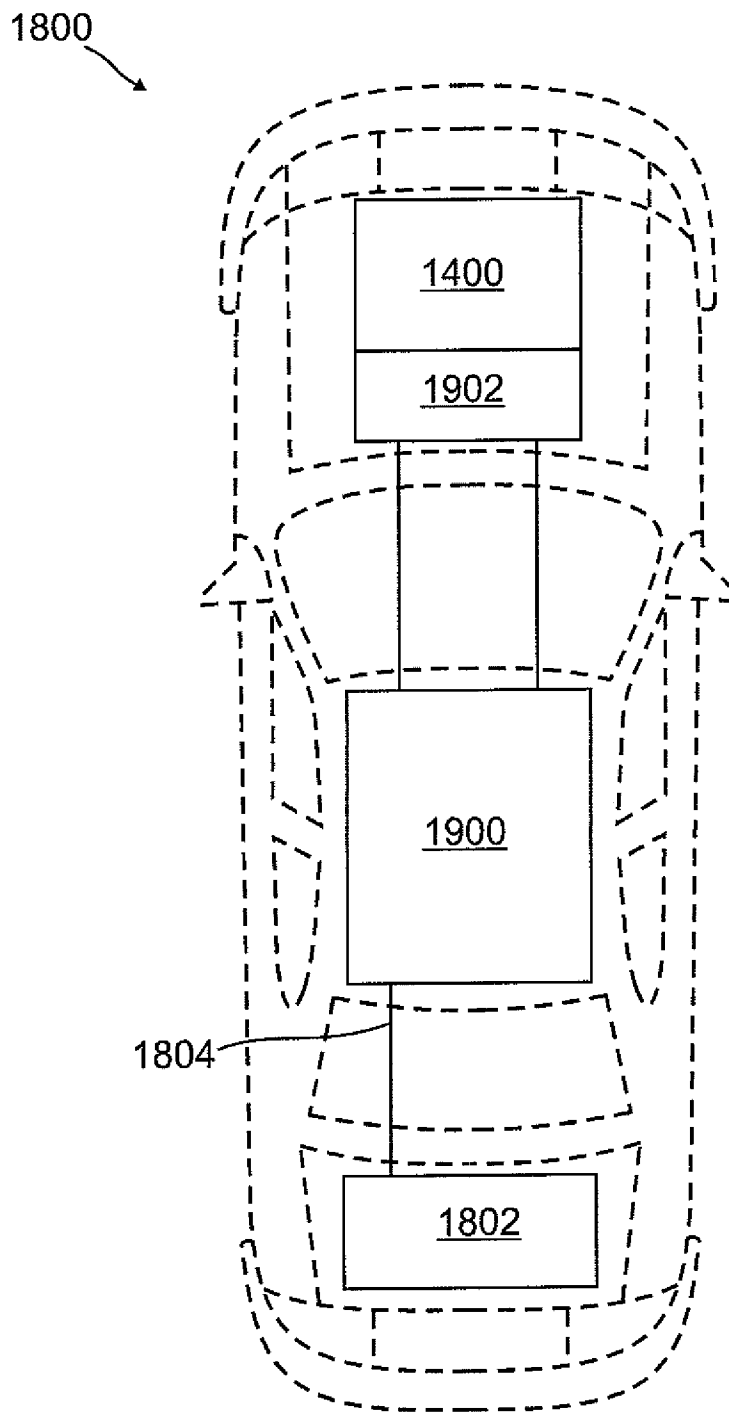


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/78825

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B01J 19/12 (2009.01)

USPC - 204/157.4, 164

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC - 204/157.4, 164

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Electronic Databases Searched: PubWest(PGPB,USPT,EPAB,JPAB), GoogleScholar

Search Terms Used: ignite, ignition, water, frequency, wavelength, alternative, fuel, automobile, piston, engine, vehicle, bond, angle, vapor, blow, torch, blowtorch, carburetor, throttle, plate, body, resonating, square, wave, cathode, anode, capac

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	Balbuena et al., "Molecular Dynamics Simulation of Electrolyte Solutions in Ambient and Supercritical Water. 1. Ion Solvation", J. Phys. Chem., Vol. 100, No. 7, 1996, [online, retrieved on 23 January 2009], Internet URL: <http://www.icpf.cas.cz/ivonez/KOPIE/ElytesCut/jp952194.pdf> Table 1; page 2708, col 2, para [0001]; page 2706, col 1, para [0001]	23-27 ----- 1-2, 12-13, 22 and 32-54
Y	US 2005/0178710 A1 (Kitada) 18 August 2005 (18.08.2005) Figs. 1A, 1B and 4B, para [0048], [0049], [0051], [0050], [0053], [0077], [0087], [0088], [0090], [0094], [0098], [0112] and [0122]	1-2, 12-13, 22 and 32-42
Y	US 2007/0181083 A1 (Fulton et al.) 09 August 2007 (09.08.2007) Figs. 2B, 2C, 4 and 5, para [0002], [0028], [0056], [0062], [0079], [0085], [0096] and [0120]	2 and 32-54
Y	US 4,074,101 A (Kiuchi et al.) 14 February 1978 (14.02.1978) Figs. 2, 7A, 7D and 7F, col 1, ln 12-39; col 4, ln 52-56; col 5, ln 45-48; col 6, ln 1-2	1
Y	US 5,450,832 A (Graf) 19 September 1995 (19.09.1995) Fig. 1, abstract, col 2, ln 44-46; col 5, ln 67 to col 6, ln 13	47
A	US 4,394,230 A (Puharich) 19 July 1983 (19.07.1983) entire document	1-30
A	US 4,798,661 A (Meyer) 17 January 1989 (17.01.1989) entire document	1-30

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 January 2009 (28.01.2009)

Date of mailing of the international search report

23 FEB 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/78825

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

(please see supplemental box)

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/US 08/78825

Lack of Unity (from box III):

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: claims 1-11, having independent claims 1-2, are directed to an apparatus for generating a water vapor molecule comprising voltage source, plurality of anode plates and a plurality of cathode plates, water supply to provide the flow of the water across the plurality of anode plates and the plurality of cathode plates.

Group II: claims 12-22, having independent claim 12, are directed to a method of modifying a bond angle of a molecule comprising providing first and second frequency.

Group III: claims 23-31, having independent claims 23 and 28, are directed to a method of using a molecule with an unnatural bond angle as an energy source providing the molecule with the unnatural bond angle in a pressurized vessel, igniting the molecule with the unnatural bond angle, wherein ignition of the molecule with the unnatural bond angle reverts the unnatural bond angle back to a natural bond angle state.

Group IV: claims 32-54, having independent claims 32, 43-44 and 52, are directed to method of powering a motorized vehicle comprising generating vapor molecules, metering vapor molecules, mixing the vapor molecules, air, and a fuel in a compartment of the engine.

The inventions listed as Groups I - IV do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I does not include the inventive concept of a method of using modifying a bond angle of a molecule as required by Group II or the method of using a molecule with an unnatural bond angle as an energy source as required by Group III or the method of powering a motorized vehicle as required by Group IV.

Group II does not include the inventive concept of a method using an apparatus for generating a water vapor molecule as required by Group I or the method of using a molecule with an unnatural bond angle as an energy source as required by Group III or the method of powering a motorized vehicle as required by Group IV.

Group III does not include the inventive concept of using an apparatus for generating a water vapor molecule as required by Group I or the method of modifying a bond angle of a molecule as required by Group II or the method of powering a motorized vehicle as required by Group IV.

Group IV does not include the inventive concept of using an apparatus for generating a water vapor molecule as required by Group I or the method of modifying a bond angle of a molecule as required by Group II or the method of using a molecule with an unnatural bond angle as an energy source as required by Group III