




- (51) **International Patent Classification:**
H01L 33/48 (2010.01) *H01L 33/62* (2010.01)
H01L 33/60 (2010.01)
- (21) **International Application Number:**
PCT/US2012/036110
- (22) **International Filing Date:**
2 May 2012 (02.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/482,088 3 May 2011 (03.05.2011) US
- (71) **Applicant (for all designated States except US):** CREE, INC. [US/US]; 4600 Silicon Drive, Durham, NC 27703-8475 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** JOO, Sung, Chul [KR/US]; 253 Seymour Place, Cary, NC 27519 (US). HUSSELL, Christopher, P. [US/US]; 101 Glenmore Road, Cary, NC 27519 (US).
- (74) **Agent:** WILSON, Jeffrey, L.; Jenkins, Wilson, Taylor & Hunt, P.A., Suite 1200, University Tower, 3100 Tower Boulevard, Durham, NC 27707 (US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** LIGHT EMITTING DIODE (LED) PACKAGES, SYSTEMS, DEVICES AND RELATED METHODS

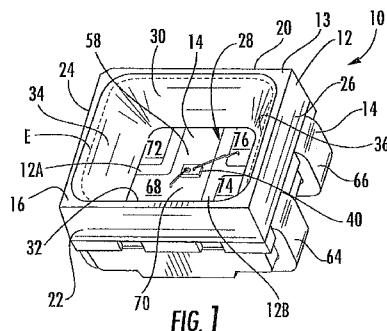

(57) **Abstract:** Packages, systems, and devices for light emitting diodes (LEDs) and related methods are provided. The packages can include a lead frame with an electrically conductive chip carrier comprising an upper surface. An LED can be placed on the upper surface of the electrically conductive chip carrier. A casing can be disposed on the lead frame covering at least a portion of the lead frame. A reflector cavity can be in the casing surrounding the LED. The reflector cavity can have angled side wall portions and angled end wall portions with an angle at which the side wall portions are angled that is different from an angle at which the end wall portions are angled.

LIGHT EMITTING DIODE (LED) PACKAGES, SYSTEMS, DEVICES AND RELATED METHODS

DESCRIPTION

5 CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application Serial No. 61/482,088 filed May 3, 2011, the disclosure of which is incorporated herein by reference in its entirety.

10 TECHNICAL FIELD

The subject matter disclosed herein relates generally to light emitting diodes (LED) packages and, more particularly, to LED packages having a reflector cavity with angled wall portions for housing LED devices and reflecting light therefrom.

15 BACKGROUND

Solid state light sources, such as light emitting diodes (LEDs), are widely used in lighting products for commercial and personal use, including, for example, indoor and outdoor lighting applications and backlighting
20 displays for monitors and televisions. Incandescent and fluorescent bulbs and tubes have long been the standard in the lighting industry. Incandescent and fluorescent bulbs and tubes can be inefficient in the use of energy, can have short lifespans, and/or can cause disposal problems. For example, compact fluorescent lamps (CFL), while having longer life spans
25 than incandescent lamps, have a relatively short lifespan. Due to the chemicals, for example, Mercury, used inside such lamps, these lamps cannot be disposed of after use in the normal course of garbage disposal. Disposal of such CFL lamps for large facilities is expensive and can be time consuming due to the procedures that should be followed.

30 LEDs can be used in the design of compact, thin, energy-saving products having longer lifetimes than conventional lighting products on the market. Products using LEDs require less power to meet the brightness

specifications for a given lighting application, thereby significantly reducing energy consumption and the need for active cooling systems. A current trend in packaging LEDs is the use of thinner molded packages for fitting into thin, possibly flat, panel display systems. Thinner packages can, for example, have increased cavity angles to assist in exceeding or maintaining brightness specifications. As cavity angles increase, package material can incompletely mold about package components. For example, package material can incompletely mold about portions of a leadframe. This can lead to gaps, voids, incomplete resin filling, and low adhesion between components within a given package.

In recent years, there have been dramatic improvements in light emitting diode (LED) technology such that LEDs of increased brightness and color fidelity have been introduced. LED efficiencies are set to exceed those of fluorescent tubes, with dimming and controllable color rendering readily achievable. Multichip LED lamps can be mounted and used in fluorescent fittings, with ballast replaced by driver electronics. Spatial distribution, intensity and spectrum of light output from LED lamps in fluorescent fittings can be comparable to those produced by a fluorescent tube with the same or less power input. LED lamps in such fluorescent fittings, however, can be relatively expensive to manufacture. Smaller LEDs are desirable in such applications. Also, the LEDs can also create heat levels that, if they became excessive and/or the heat is not properly dissipated, can lead to LED and/or circuitry failure.

Additionally, due to these improved LEDs and improved image processing technology, large format, full color LED video screens have become available and are now in common use. Large format LED displays typically comprise a combination of individual LED panels providing image resolutions determined by the distance between adjacent pixels or "pixel pitch."

Outdoor displays, which are intended for viewing from greater distances, have relatively large pixel pitches and usually comprise discrete LED arrays. In the discrete LED arrays, a cluster of individually mounted

red, green, and blue LEDs are driven to form what appears to the viewer as a full color pixel. On the other hand, indoor screens, which require shorter pixel pitches such as 3 mm or less, typically comprise panels carrying red, green, and blue LEDs mounted on a single electronic package such as a surface mount device (SMD) package. Each SMD usually defines a pixel.
5 The relatively small SMDs are attached to a driver printed circuit board (PCB) that controls the output of each SMD.

Although both indoor and outdoor displays are viewable across a substantial range of off-axis angles, there is often a perceptible loss of color fidelity with increasing viewing angle. Additionally, the material of each LED
10 package and/or the material used to mount each of the LEDs may have reflective characteristics, which can further decrease color fidelity by creating unwanted light reflection and/or glare.

It is well-known that SMDs and many other types of electronic packages, whether containing integrated circuits or discrete components
15 such as diodes or power transistors, dissipate sufficient heat to require thermal management. Also, excessive heat may cause LEDs failures. Thus, one of the considerations for designing an LED system is effective thermal management. One of the objectives of effective thermal management in the design of electronic packaging is to maintain the
20 operating temperature of the LEDs and other active circuit components at an appropriately low level to prevent premature component failure. Various cooling strategies including conduction heat transfer are in common use. One conventional way of implementing conduction heat transfer for
25 dissipating heat in an electronic package is to allow the heat to conduct away along the leads of the device. However, the leads often do not have sufficient mass or exposed surface area to provide effective heat dissipation. For example, high intensity LEDs that emit light principally in the visible part of the electromagnetic spectrum can generate a significant amount of heat
30 that is difficult to dissipate using such conventional techniques.

The designing objectives of increasing the view angle, maintaining a relatively low operating temperature, and decreasing the size of an LED

package are to some extent competitive with each other. There is a need therefore to develop an LED package that addresses all these designing objectives with lower cost.

5

SUMMARY

In accordance with this disclosure, LED packages, systems, devices and methods are provided. It is, therefore, an object of the present disclosure herein to provide novel LED packages, systems and methods as described for example in further detail hereinbelow.

10

These and other objects as can become apparent from the disclosure herein are achieved, at least in whole or in part, by the subject matter described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

15

A full and enabling disclosure of the present subject matter including the best mode thereof to one of ordinary skill in the art is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, in which:

20

Figure 1 is a top perspective view illustrating an embodiment of a light emitting diode (LED) package according to the subject matter disclosed herein;

Figure 2 is a top plan view illustrating the embodiment of the LED package according to Figure 1;

25

Figure 3A is a cross-sectional view illustrating the embodiment of the LED package taken along line 3A-3A in Figure 2;

Figure 3B is a cross-sectional view illustrating the embodiment of the LED package taken along line 3B-3B in Figure 2;

Figure 4 is a bottom perspective view illustrating the embodiment of the LED package according to Figure 1;

30

Figure 5 is a perspective view illustrating a lead frame in accordance with one embodiment that may be used in an LED package according to the subject matter herein;

Figure 6 is a top plan view illustrating another embodiment of an LED package according to the subject matter disclosed herein;

Figures 7A and 7B are cross-sectional side views illustrating a portion of an embodiment of a LED package according to the subject matter herein;

5 Figures 8A-8C are cross-sectional schematic side views illustrating portions of embodiments of LED packages according to the subject matter herein;

Figure 9 is a top plan view illustrating a further embodiment of an LED package according to the subject matter herein;

10 Figure 10 is a top plan view illustrating an embodiment of a display
screen using embodiments of LED packages according to the subject matter
herein;

Figure 11 is a partial cross-sectional side view illustrating an embodiment of a lighting device using embodiments of LED packages according to the subject matter herein; and

Figure 12 is a top perspective view illustrating another embodiment of a lighting device using embodiments of LED packages according to the subject matter herein.

20 DETAILED DESCRIPTION

Reference will now be made in detail to possible aspects or embodiments of the subject matter herein, one or more examples of which are shown in the figures. Each example is provided to explain the subject matter and not as a limitation. In fact, features illustrated or described as part of one embodiment can be used in another embodiment to yield still a further embodiment. It is intended that the subject matter disclosed and envisioned herein covers such modifications and variations.

As illustrated in the various figures, some sizes of structures or portions are exaggerated relative to other structures or portions for illustrative purposes and, thus, are provided to illustrate the general structures of the present subject matter. Furthermore, various aspects of the present subject matter are described with reference to a structure or a

portion being formed on other structures, portions, or both. As will be appreciated by those of skill in the art, references to a structure being formed "on" or "above" another structure or portion contemplates that additional structure, portion, or both may intervene. References to a structure or a portion being formed "on" another structure or portion without an intervening structure or portion may be described herein as being formed "directly on" the structure or portion. Similarly, it will be understood that when an element is referred to as being "connected", "attached", or "coupled" to another element, it can be directly connected, attached, or coupled to the other element, or intervening elements may be present. In contrast, an element may be referred to as being "directly connected", "directly attached", or "directly coupled" to another element when no intervening elements are present.

Furthermore, relative terms such as "on", "above", "upper", "top", "lower", or "bottom" are used herein to describe one structure's or portion's relationship to another structure or portion as illustrated in the figures. It will be understood that relative terms such as "on", "above", "upper", "top", "lower" or "bottom" are intended to encompass different orientations of the device in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, structure or portion described as "above" other structures or portions would now be oriented "below" the other structures or portions. Likewise, if devices in the figures are rotated along an axis, structure or portion described as "above", other structures or portions would now be oriented "next to" or "left of" the other structures or portions. Like numbers refer to like elements throughout.

Light emitting devices according to embodiments described herein may comprise group III-V nitride (e.g., gallium nitride) based light emitting diodes (LEDs) or lasers fabricated on a growth substrate, for example, silicon carbide substrate, such as those devices manufactured and sold by Cree, Inc. of Durham, North Carolina. For example, Silicon carbide (SiC) substrates/layers discussed herein may be 4H polytype silicon carbide substrates/layers. Other silicon carbide candidate polytypes, such as 3C,

6H, and 15R polytypes, however, may be used. Appropriate SiC substrates are available from Cree, Inc., of Durham, N.C., the assignee of the present subject matter, and the methods for producing such substrates are set forth in the scientific literature as well as in a number of commonly assigned U.S. patents, including but not limited to U.S. Patent No. Re. 34,861; U.S. Patent No. 4,946,547; and U.S. Patent No. 5,200,022, the disclosures of which are incorporated by reference herein in their entireties.

As used herein, the term "Group III nitride" refers to those semiconducting compounds formed between nitrogen and one or more elements in Group III of the periodic table, usually aluminum (Al), gallium (Ga), and indium (In). The term also refers to binary, ternary, and quaternary compounds such as GaN, AlGa_N and AlInGa_N. The Group III elements can combine with nitrogen to form binary (e.g., GaN), ternary (e.g., AlGa_N), and quaternary (e.g., AlInGa_N) compounds. These compounds may have empirical formulas in which one mole of nitrogen is combined with a total of one mole of the Group III elements. Accordingly, formulas such as Al_xGa_{1-x}N where 1>x>0 are often used to describe these compounds. Techniques for epitaxial growth of Group III nitrides have become reasonably well developed and reported in the appropriate scientific literature, and in commonly assigned U.S. Patent No. 5,210,051, U.S. Patent No. 5,393,993, and U.S. Patent No. 5,523,589, the disclosures of which are hereby incorporated by reference herein in their entireties.

Although various embodiments of LEDs disclosed herein comprise a growth substrate, it will be understood by those skilled in the art that the crystalline epitaxial growth substrate on which the epitaxial layers comprising an LED are grown may be removed, and the freestanding epitaxial layers may be mounted on a substitute carrier substrate or submount which may have better thermal, electrical, structural and/or optical characteristics than the original substrate. The subject matter described herein is not limited to structures having crystalline epitaxial growth substrates and may be used in connection with structures in which the epitaxial layers have been removed

from their original growth substrates and bonded to substitute carrier substrates.

Group III nitride based LEDs according to some embodiments of the present subject matter, for example, may be fabricated on growth substrates (such as a silicon carbide substrates) to provide horizontal devices (with both electrical contacts on a same side of the LED) or vertical devices (with electrical contacts on opposite sides of the LED). Moreover, the growth substrate may be maintained on the LED after fabrication or removed (e.g., by etching, grinding, polishing, etc.). The growth substrate may be removed, for example, to reduce a thickness of the resulting LED and/or to reduce a forward voltage through a vertical LED. A horizontal device (with or without the growth substrate), for example, may be flip chip bonded (e.g., using solder) to a carrier substrate or printed circuit board (PCB), or wire bonded. A vertical device (without or without the growth substrate) may have a first terminal solder bonded to a carrier substrate, mounting pad, or PCB and a second terminal wire bonded to the carrier substrate, electrical element, or PCB. Examples of vertical and horizontal LED chip structures are discussed by way of example in U.S. Publication No. 2008/0258130 to Bergmann et al. and in U.S. Publication No. 2006/0186418 to Edmond et al., the disclosures of which are hereby incorporated by reference herein in their entireties.

Solid state light LEDs may be used individually or in combinations, optionally together with one or more luminescent materials (e.g., phosphors, scintillators, lumiphoric inks) and/or filters, to generate light of desired perceived colors (including combinations of colors that may be perceived as white). Inclusion of luminescent (also called 'lumiphoric') materials in LED devices may be accomplished by adding such materials to encapsulants, adding such materials to lenses, or by direct coating onto LEDs. Other materials, such as dispersers and/or index matching materials may be disposed in such encapsulants.

The LED can be coated, at least partially, with one or more phosphors with the phosphors absorbing at least a portion of the LED light and emitting a different wavelength of light such that the LED emits a combination of light

from the LED and the phosphor. In one embodiment, the LED emits a white light combination of LED and phosphor light. The LED can be coated and fabricated using many different methods, with one suitable method being described in U.S. Patent Application Serial Nos. 11/656,759 and 11/899,790, both entitled "Wafer Level Phosphor Coating Method and Devices Fabricated Utilizing Method", and both of which are incorporated herein by reference. In the alternative, LEDs can be coated using other methods such as electrophoretic deposition (EPD), with a suitable EPD method described in U.S. patent application Ser. No. 11/473,089 entitled "Close Loop Electrophoretic Deposition of Semiconductor Devices", which is also incorporated herein by reference. It is understood that LED devices and methods according to the present subject matter can also have multiple LEDs of different colors, one or more of which may be white emitting.

Figures 1-8C depict a light-emitting diode (LED) package, generally designated **10** that can be, for example, a surface-mount device (SMD) and parts thereof according to specific, exemplary embodiments for use in LED displays such as indoor and/or outdoor LED screens. LED package **10** can comprise a casing **12** that forms a body **13** for carrying a lead frame **14**, an embodiment of which is described in more detail below and to which one or more LEDs **40** can be electrically connected. For example, one or more LEDs **40** can be electrically connected by electrical connections such as wire leads **40A**, **40B** (see, for example, Figure 2) to lead frame **14**. Other suitable electrical connections can also be used to electrically connect one or more LEDs **40** to lead frame **14** as are known within the art.

Casing **12** can be at least generally rectangular, including opposed, first and second main (or upper and lower) surfaces **16** and **18**, respectively, opposing respective side surfaces **20** and **22**, and end surfaces **24** and **26**. Casing **12** and lead frame **14** can help define the outer dimension of LED package **10**. In one embodiment, distance **T** (as seen in Figure 3B) between upper surface **16** of casing **12**, or body **12**, and lower surfaces **90**, **92** of lead frame **14**, or the package profile height or thickness can be less than about, or approximately, 2.0 mm. For example, distance **T** between upper surface

16 and and a lower surface **92** of lead frame **14** can be approximately 1.70 mm to approximately 1.95 mm. For instance, distance **T** between upper and lower main surfaces **16** and **18** can be approximately 1.90 mm. Distance **W** between side surfaces **20** and **22** can be less than approximately 3.0 mm.

5 For example, distance **W** between side surfaces **20** and **22** can be approximately 2.7 mm to approximately 3.0 mm. For instance, distance **W** between side surfaces **20** and **22** can be approximately 2.8 mm. Distance **L** between end surfaces **24** and **26** can be less than approximately 3.5 mm. For example, distance **L** between end surfaces **24** and **26** also can range
10 between approximately 3.1 mm to approximately 3.5 mm. For instance, distance **L** between end surfaces **24** and **26** can be approximately 3.2 mm.

Casing **12** can be fabricated from materials that are both electrically insulating and thermally conductive. In some embodiments, the casing can be a thermoplastic polycondensate. For example, in one aspect a
15 thermoplastic polycondensate that can be used is polyphthalamide (PPA). In some embodiments, casing **12** can be formed of black PPA or white PPA. It has been found that the use of black material in image generation LED packages, such as with LED packages employed in video displays, improves contrast. Other casing materials that can be used can comprise ceramics,
20 resins, epoxies, and glass.

In some embodiments, casing **12** can comprise a white plastic material, more specifically, a molded white plastic material. In one aspect, casing **12** can comprise any suitable moldable material. In another aspect, casing **12** can comprise a plastic material having quantitative and qualitative
25 properties optimized for solid state device package applications. The plastic material can in one aspect comprise, for example, any suitable organic polymer, such as for example a heat resistant resin such as a polyamide resin. The plastic material can be filled with glass or mineral material for strength and something like titanium dioxide for reflectivity.

30 Utilizing a plastic material such as described herein for casing **12** can allow for an advantageous softness for casing **12** at operating temperatures as hardness can depend upon temperature. This softness can allow casing

12 to have improved reliability and useful lifetime. The plastic material can in one aspect be a liquid crystal polymer (LCP). An optimized plastic material in accordance herewith can comprise a glass transition temperature (T_g) that can, for example, be greater than approximately 110 degrees Celsius ($^{\circ}\text{C}$).

5 The glass transition temperature (T_g) can, for example, be greater than approximately 115 $^{\circ}\text{C}$ or greater than approximately 120 $^{\circ}\text{C}$. In one aspect, the glass transition temperature (T_g) can be greater than approximately 123 $^{\circ}\text{C}$. The optimized plastic material in accordance herewith can also comprise a melting point temperature (T_m) that can be less than

10 approximately 315 $^{\circ}\text{C}$. The melting point temperature (T_m) can, for example, be less than approximately 310 $^{\circ}\text{C}$. The melting point temperature (T_m) can, for example, be less than approximately 300 $^{\circ}\text{C}$. In one aspect, the melting point temperature (T_m) can be approximately 307 $^{\circ}\text{C}$. A plastic material with a T_g of approximately 123 $^{\circ}\text{C}$ is higher than many plastics conventionally

15 used and can allow the package to have increased stability at elevated temperatures. A plastic material with a lower T_m of approximately 307 $^{\circ}\text{C}$ can allow better flowability because the melting temperature is lower than that of plastics conventionally used and the plastic body is easier to mold. The plastic selected for casing **12** can also comprise optimized qualitative

20 properties. For example, a white plastic material can be chosen which exhibits a better reflectivity retention value while also exhibiting fewer tendencies to discolor, degrade, and/or yellow when subjected to heat and/or light exposure. The reflectivity of the plastic material can in one aspect be greater than 90% for example, and that level or another level of

25 high reflectivity can be maintained over time, heat, moisture, and blue light exposure.

Other characteristics or features of the plastic material for casing **12** can comprise an elongation value (mechanical property) of approximately 1.4% or greater, or an elongation value of 1.6% or greater. In one aspect,

30 the elongation value can be approximately 1.5% or greater. Also as a mechanical property, the flexural strength of the plastic material of casing **12** as measured by ASTM D790 standards can be approximately 150 MPa or

lower, approximately 130 MPa or lower, or approximately 120 MPa or lower. In one aspect, the flexural strength of the plastic material of casing **12** can be approximately 140 MPa or lower as measured by ASTM D790 standards. Also as a mechanical property, the flexural modulus of the plastic material of casing **12** can be approximately 6.9 GPa or lower, or approximately 6.5 GPa or lower. In one aspect, the flexural modulus of the plastic material of casing **12** can be approximately 6.0 GPa or lower. As yet another mechanical property, the tensile strength of the plastic material of casing **12** can be approximately 100 MPa or lower as measured by ASTM D638 standards, approximately 90 MPa or lower, or approximately 80 MPa or lower. In one aspect, the tensile strength of the plastic material of casing **12** can be less than approximately 75 MPa as measured by ASTM D638 standards.

Casing **12** can further define a reflector recess or cavity **28** that can be disposed at least partially within casing **12**. In one aspect, cavity **28** can extend from upper surface **16** into the body of casing **12**. The effectiveness of the reflectivity of reflector cavity **28** can be enhanced by the tapering of reflector cavity **28** inwardly toward the interior of the casing. Thus, reflector cavity **28** can have angled wall portions **30**, **32**, **34**, **36** that can form at least generally a rectangular shape. For example, angled side wall portions **30**, **32** extend approximately parallel to each other, while angled end wall portions **34**, **36** extend approximately parallel to each other with angled side wall portions **30**, **32** being approximately perpendicular to angled end wall portions **34**, **36**. Angled side wall portions **30**, **32** can be angled at a different angle from angled end wall portions **34**, **36** as described further below. A transition wall portion **39A**, **39B**, **39C**, **39D** can reside between angled side wall portions **30**, **32** and angled end wall portions **34**, **36** that provide a transitioning of respective angles of the respective wall portions **30**, **32**, **34**, **36**. As illustrated in Figures 1-3B, angled side wall portions **30**, **32** can be longer than angled end wall portions **34**, **36**. Thus, in accordance with an aspect of the disclosure, the size of the cavity is increased compared to, for example, circular shaped cavities. The ratio of the area of the cavity floor over the area of the main surface can be at least 35%. In some

embodiments, it is greater than 40%. In still other embodiments, the ratio is greater than 50%.

Reflector cavity **28** can optionally be coated with a reflecting substance and/or filled to a desired level with an encapsulant **E** (as shown, for example, in dotted lines in Figure 1). In Figure 1, the dotted line illustrates a first level to which encapsulant **E** can be filled within reflector cavity **28**. That is, encapsulant **E** can be filled to a level substantially flush with upper main surface **16**, or in the alternative it may be filled to any suitable level within reflector cavity **28** and can comprise a concave or convex surface and even exceed or extend above upper main surface **16**. Encapsulant **E** can protect and positionally stabilize lead frame **14** and the one or more LEDs **40** carried thereby. In some instances, encapsulant **E** may cover the one or more LEDs **40**, the portions of lead frame **14** exposed through reflector cavity **28**, and the LEDs' electrical connections. Encapsulant **E** can be selected to have predetermined optical properties so as to enhance the projection of light from the LEDs. Encapsulant **E** can comprise any suitable material known in the art. For example, encapsulant **E** can be formed from a resin, an epoxy, a thermoplastic polycondensate, glass, and/or other suitable materials or combinations of materials. In some embodiments, materials can be added to encapsulant **E** to enhance the emission, absorption and/or dispersion of light to and/or from the LEDs. For instance, encapsulant **E** can optionally comprise a phosphor or a lumiphor to interact with light emitted by one or more LEDs **40** and responsively emit light of a different wavelength spectrum. In some embodiments, a reflective insert or ring can be positioned and secured along at least a portion of angled wall portions **30**, **32**, **34**, **36** of reflector cavity **28**. Also, the reflective insert or ring can be integral with casing **12** and may be made from the same material as casing **12**. As described further relating to possible dimensions and cavity wall angles for an LED package in accordance with the subject matter herein, the total volume within cavity **28** can be larger than other similar LED packages, such as for instance those where the cavity or recess is circular.

As shown in Figures 3A and 3B, angled side wall portions **30, 32** can have a length W_{AS} and angled end wall portions **34, 36** can have a length W_{AE} . Length W_{AE} of angled end wall portions **34, 36** can be greater than length W_{AE} of angled side wall portions **30, 32**. By having length W_{AE} of angled end wall portions **34, 36** greater than length W_{AE} of angled side wall portions **30, 32**, the angle of angled side wall portions **30, 32** (and between angled side wall portions **30, 32**) can be greater than the angle of angled end wall portions **34, 36** (and between angled end wall portions **34, 36**) as described further below.

Figure 6 illustrates a top view of LED package **10**. LED package **10** is shown with one LED **40** schematically illustrated therein, but there can be one or more LEDs **40**. LED package **10** is generic and included herein to illustrate possible further dimensions. LED **40** can comprise a width **1** and a length **2** which can be any suitable dimensions. LED package **10** illustrates various dimensions of the package itself. For example, typical dimensions, for instance, lengths, widths, thicknesses, and areas can be such as those illustrated in Figure 6 and disclosed in Table 1 below.

Table 1		
<u>Reference Character</u>	<u>Description of Dimension</u>	<u>Approximate Measurement</u> <u>(in mm)</u>
L1	Overall package length, including portions of electrical leads	3.5
L2	Length of package body	3.2
L3	Length of reflector cavity measured at upper surface of body	2.9
L4	Length of cavity floor	1.74

L5	Length of upper surface of body disposed outside of reflector cavity	0.15
L6	Corner length	0.3
W1	Width of overall package body	2.7 to 3
W2	Width of reflector cavity measured at upper surface of body	2.4 to 2.5
W3	Width of cavity floor	1.74
*T	Overall thickness of package	1.9
* designates the thickness dimension as illustrated in Figure 3B		

Table 1 illustrates, without limitation, possible length and width dimensions for LED package **10**. In one aspect, the overall package area (**L1** x **W1**) can be approximately 9.4 mm² to approximately 10 mm². Any shape, dimension, and structure of LED chip such as LED **40** can be used in LED package **10**. As described earlier, more than one LED **40** can be disposed in LED package **10**. LED **40** can have various lengths and widths. Any suitable dimension of LED **40** can be used. Distances **L5** and **L6** can be large enough to create a lip to hold encapsulant in cavity **28**. Thus, distances **L5** and **L6** can be minimized to allow holding of encapsulant, while creating larger angled wall portions **30**, **32**, **34**, **36**. Thereby, reflective surfaces of reflector cavity **28** can be maximized and the wasted space on upper surface **24** can be minimized. Such an arrangement can result in at least about a 10% bright output of illumination.

Further, it is noted that, as shown in Figure 1, the opening of reflector cavity **28** at upper surface **16** can be a larger rectangular shape and the opening of reflector cavity **28** at a cavity floor **70** (see Figures 7A and 7B) can be a smaller rectangular shape. The larger rectangular shape of the opening of reflector cavity **28** at upper surface **16** may be or may not be proportional to the smaller rectangular shape of the opening of reflector

cavity **28** at cavity floor **70**. For example, in some embodiments, the larger rectangular shape of the opening at upper surface **16** can be defined by longer side wall portions and shorter end wall portions, while the smaller rectangular shape at cavity floor **70** can be a square with the side wall portions and end wall portions that define that opening being substantially the same length.

Figure 5 illustrates one possible embodiment for a lead frame **14** with a slightly different orientation from the lead frame illustrated in Figures 1-4. Therefore, the same reference numeral is used. Lead frame **14** can comprise an electrically conductive chip carrier generally designated **50** and first, second, and third electrically conductive connection parts, respectively generally designated **52**, **54**, and **56**, separate from the electrically conductive chip carrier. Electrically conductive chip carrier **50** and first, second, and third electrically conductive connection parts **52**, **54**, and **56** can form leads **60**, **62**, **64**, and **66**. Electrically conductive chip carrier **50** can have an upper surface **80** including a connection pad **68**. Connection pad **68** can be exposed from casing **12**. First electrically conductive connection part **52** can be at least partially surrounded by electrically conductive chip carrier **50**. Each of the first, second and third electrically conductive connection parts can have an upper surface, a lower surface or terminal, and a connection pad on the upper surface. For example, in Figure 5, first electrically conductive connection part **52** can have an upper surface **82**, a lower surface **92**, and a connection pad **72** on upper surface **82**. Second electrically conductive connection part **54** can have an upper surface **84**, a lower surface **94**, and a connection pad **74** on upper surface **84**. Third electrically conductive connection part **56** can have an upper surface **86**, a lower surface **96**, and a connection pad **76** on upper surface **86**. Thus, first, second, and third electrically conductive connection parts **52**, **54**, and **56** can each have connection pads **72**, **74**, **76** respectively. As with connection pad **68**, connection pads **72**, **74**, **76** can have at least a portion exposed from casing **12** as well as shown in Figures 1 and 2. A surface area of upper surface **82** of first electrically conductive connection part **52** can be less than

an upper surface area of upper surface **84** or **86** of second and third electrically conductive connection parts **54** and **56**.

Connection pad **68** can have opposing sides. One of the opposing sides, which can be close to connection pads **74** and **76**, can be at least as
5 long as end wall portions **34**, **36** of reflector cavity **28** as shown in Figures 1 and 2. The other side, which is close to connection pad **72**, is greater than approximately one half of the length of the adjacent end wall portion **34** of reflector cavity **28**. One or more LEDs are disposed on upper surface **80** of electrically conductive chip carrier **50**. For example, in Figures 1 and 2, LED
10 **40** can be disposed on connection pad **68** of upper surface **80**.

In some embodiments, solder pads are included on the bottom of the end portions such that no solder is visible when viewing each individual LED package from the top. This can be advantageous as it helps to prevent glare and improve contrast, particularly during daylight viewing. As best seen in
15 Figures 1 and 2, reflector cavity **28** can extend into the casing interior a sufficient depth to expose the connection pads **60** and **72**, **74**, **76**.

The particular dimensions of lower surfaces **90**, **92**, **94**, and **96** of leads **60**, **62**, **64**, and **66** that extend inwardly from end surfaces **32** and **34** of the casing can depend on the intended implementation of the surface
20 mount LED package, the LEDs to be utilized, the material of casing **12**, the size of the LED package and/or other such factors and/or combinations of factors. In some embodiments, electrically conductive chip carrier **50** and first, second, and third electrically conductive connection parts **52**, **54**, and **56** that form leads **60**, **62**, **64**, and **66**, respectively, may be separated by
25 gaps **98** among connection pads **68** and connection pads **72**, **74**, **76**, to electrically isolate connection parts **52**, **54**, and **56** from each other and from electrically conductive chip carrier **50**. As shown in Figures 1-3A, in LED package **10**, gaps **98** between connection pads **68** and connection pads **72**, **74**, **76** can be filled with casing material to form body portions **12A**, **12B** that
30 isolate connection pads **68** and connection pads **72**, **74**, **76** from each other.

Referring to Figure 5, enhanced heat dissipation can be realized by a surface area of upper surface **82** of first electrically conductive connection

part 52 that is minimized to only have enough space to hold a connection pad 72. The surface area of upper surface 82 can be less than a surface area of either upper surface 84 or 86 of second and third electrically conductive connection parts 54 and 56. Electrically conductive connection parts 52, 54, and 56 can comprise enlarged electrical connection pads 72, 74, 76, respectively, positioned around a central region 58 (see Figures 1 and 2) adjacent to, but spaced apart from, the component carrying upper surface 80 of chip carrier 50. For example, as described above, gaps 98 can separate connection parts 52, 54, and 56 from each other and from electrically conductive chip carrier 50. In some embodiments of surface mount LED package 10, leads 60, 62, 64, and 66 can be bent to extend outside of and along their respective end surfaces 24 and 26 of the casing, then bent again so that lower surfaces 90, 92, 94, and 96 of leads 60, 62, 64, and 66 extend along lower surface 26 of casing 12. Lower surfaces 90, 92, 94, and 96 may also be referred to as pin pads. The outwardly facing surfaces of lower surfaces 90, 92, 94, and 96 of leads 60, 62, 64, and 66 and the bottom surface of a thermal conductive body can be substantially flush to facilitate connection to an underlying substrate. Lower surfaces 90, 92, 94, and 96 of the leads are electrically connected or bonded to traces or pads on the substrate using any of a number of well-known connection techniques, including soldering.

Electrically conductive chip carrier 50 and electrically conductive connection parts 52, 54, 56 can be made from an electrically conductive metal or metal alloy, such as copper, a copper alloy, other suitable low resistivity, corrosion resistant materials, or combinations of these materials. Because all the LED chips are disposed on electrically conductive chip carrier 50, a large surface area of upper surface 80 may help heat dissipation.

Referring to Figures 1, 2, 3A and 3B, reflector cavity 28 can be bounded from below by a floor 70 (including portions of connection pads 68, 72, 74, 76, and casing or body portions 12A, 12B), and bounded along edges by angled side wall portions 30, 32, angled end wall portions 34, 36,

and transition wall portions **39A-39D**. A transition wall portion **39A-39D** is disposed between each respective angled side wall portions **30, 32** and angled end wall portions **34, 36**. Each side wall portion **30, 32** and each end wall portion **34, 36** can comprise a substantially straight upper edge, and
5 each transition wall portion **39A-39D** can comprise a curved or segmented upper edge transitioning from the upper edge of a side wall portion **30, 32** to the upper edge of end wall portion **34, 36**.

Figures 7A and 7B illustrate schematic drawings of cavity angles that LED packages, such as LED package **10** and other packages described
10 herein, can have. Points **P** in Figures 7A and 7B can comprise an intersection area of where one or more cavity, or angled, wall portions **30, 32, 34**, and/or **36** extends towards and intersects cavity floor **70**. In one aspect, one or more cavities can comprise a cavity angle measured between walls of reflector cavity **28**. In one aspect, cavity angles of packages
15 described herein can comprise 90° or more. In another aspect, cavity angles of packages described herein can comprise 90° or less.

For example, Figure 7A illustrates a portion of cavity floor **70** disposed between exterior lateral end walls **24** and **26**. That is, Figure 7A illustrates the longer measurement **L4** of cavity floor. In one aspect for example, the
20 cavity angle β between the cavity end wall portions **34** and **36** of the reflector cavity **28** can be approximately 72°. In one aspect, cavity angle β between the cavity end wall portions **34, 36** of the reflector cavity **28** (as measured between the end wall portions) can be at least approximately 70° or more depending on the thickness **T** (see Figure 3B) of the LED package. Thinner,
25 optimized packages with thinner dimensions can comprise larger cavity angles which can allow the reflection level within the package to maintain or exceed the amount of reflected light. Such reflected light can maintain or exceed, for example, current brightness standards for similar packages. As cavity angles increase, the area beneath the point formed by the cavity wall
30 and cavity floor can become so small that viscous material cannot mold therein, forming voids. The packages described herein can reduce and/or eliminate the voids by providing larger areas below the point where the

cavity wall meets the cavity floor, and/or displacing electrical leads at least a distance away from the point, or edge of the cavity floor.

Figure 7B illustrates a portion of cavity floor **70** disposed between exterior lateral side walls **20** and **22**. That is, Figure 7B illustrates the shorter width measurement **W3** of cavity floor **70**. In one aspect, the cavity angle α between cavity, or angled, side wall portions **30**, **32** of reflector cavity **28** (as measured between the side wall portions) can be approximately 50° or more, for example, approximately 51°. In one aspect, the cavity angle α between cavity side wall portions **30**, **32** of reflector cavity **28** can be at least approximately 45° or more depending on thickness **T** (see Figure 3B) of the LED package. Again, thinner, optimized packages with thinner dimensions can comprise larger cavity angles which can allow the reflection level within the package to maintain or exceed the amount of reflected light, such that the reflected light can maintain or exceed current brightness standards.

Each transition wall portion **39A-39D** can be inclined at a larger average angle, relative to a plane perpendicular to the floor of the reflector cavity, than each side wall portion **30**, **32** and each end wall portion **34**, **36**. For example, Figure 8A provides a simplified schematic cross-sectional view of a body portion, illustrating an angle θ of a side wall portion thereof relative to a plane perpendicular to the floor of the body cavity, while Figure 8B provides a simplified schematic cross-sectional view of a body portion, illustrating an angle ϕ of an end wall portion thereof relative to a plane perpendicular to the floor of the body cavity. Similarly, Figure 8C provides a simplified schematic cross-sectional view of a body portion, illustrating an angle ρ of a transition wall portion relative to a plane perpendicular to the floor of the body cavity.

In some embodiments, each side wall portion can be inclined at an angle θ of at least approximately 25° or greater. In further embodiments, angle θ may be at least approximately 30°, or at least approximately 35°. In some embodiments, each side wall portion can be inclined at an angle ϕ of at least approximately 30°. In further embodiments, angle ϕ can be at least approximately 35°, or at least approximately 40°. In some embodiments,

each transition wall portion is inclined at an angle ρ of at least approximately 35°. In further embodiments, angle ρ can be at least approximately 40°, or at least approximately 45°. Such angles of side wall portions **30**, **32**, end wall portions **34**, **36**, and transition wall portions **39A-39D** are greater than typically employed in solid state emitter devices. Although the side wall/end wall portions and transition wall portions are illustrated in Figures 8A-8B as being angular from the floor of the cavity to the upper edge of the package, in an alternative embodiment any one or more (or all) of these wall portions can be characterized by a segmented and/or curved cross-section, that is, with the wall extending from the floor to the upper edge of the package being non-linear along at least a portion thereof. If such walls are curved or segmented, then the inclination angles mentioned above can correspond to an average angle of a curved or segmented wall, or an angle between endpoints of such a wall. Use of side wall portions **30**, **32**/end wall portions **34**, **36** and transition wall portions **39A-39D** of alternating angles enables frontal area of reflector cavity **28** to be maximized relative to shaped upper surface **16**, while providing desirably diffused output beam characteristics, particularly when multiple emitters, such as multiple LEDs, are disposed in cavity **28**.

In the illustrative embodiment of Figure 9, an LED package **110** is provided can comprises a casing **112** carrying a lead frame **114** that can be as described above. Thus, the same reference numerals indicate the same or similar elements. LED package **110** can further comprise one or more LEDs. In the embodiment shown in Figure 9, for example, LED package **110** comprises three LEDs **44**, **46**, **48** that can emit red, green and blue colors, respectively, so that when appropriately energized the LEDs produce in combination a substantially full range of colors. The LED chips can have a square-like size or rectangular size. For example, the square-like LED chip can have a profile height less than about 0.11 mm, or in the range of approximately 0.09 mm to approximately 0.11 mm, or less than approximately 0.1 mm, or in the range of approximately 0.08 to approximately 0.10 mm. The square-like LED chip can have a profile width

of less than approximately 0.32 mm, or in the range of 0.265 mm to 0.315 mm. The square-like LED chip can have a profile width of less than approximately 0.38 mm, or in the range of approximately 0.33 mm to approximately 0.38 mm. The rectangular LED chip can have a profile height
5 of less than approximately 0.13 mm, or in the range of approximately 0.10 mm to approximately 0.13 mm. The rectangular LED chip can have a profile width of less than approximately 0.28 mm, or in the range of approximately 0.20 mm to approximately 0.28 mm. The rectangular LED chip can have a profile width of less than approximately 0.36 mm, or in the range of
10 approximately 0.28 mm to approximately 0.36 mm.

As above, lead frame **114** can comprise electrically conductive chip carrier **50** and electrically conductive connection parts **52**, **54**, and **56** that provide connection pads **72**, **74**, and **76**. Electrically conductive chip carrier **50** and electrically conductive connection parts **52**, **54**, and **56** form leads **60**,
15 **62**, **64**, and **66**. Electrically conductive chip carrier **50** can have an upper surface **80** comprising a connection pad **68**. Connection pad **68** can be exposed from casing **112**. Connection pad **68** has opposing sides. One of the opposing sides, which is close to connection pads **74** and **76**, can be at least as long as a side of cavity **128**. The other side of connection pad **68**,
20 which is close to connection pad **72**, can be greater than approximately 1/2 of the length of the adjacent side of cavity **128**. A plurality of LEDs can be disposed on upper surface **80** of the electrically conductive chip carrier **50**. For example, in Figure 9, three LEDs **44**, **46**, and **48** are disposed on connection pad **68** of upper surface **80**. The three LEDs usually emit lights
25 in different color. For example, LED **44** can emit red light, LED **46** can emit green light, and LED **48** can emit blue light. Two or more of the LEDs may emit the same color, including white. For example, LED **44** and LED **46** can both emit red light. Each LED has a first electrical terminal and a second electrical terminal. The first electrical terminal can be called an anode. For
30 example, first LED **44** can have an anode electrically coupled to connection pad **74** of electrically conductive connection part **54**. Second LED **46** can have an anode electrically coupled to connection pad **76** of electrically

conductive connection part **56**. Similarly, Third LED **48** can have an anode electrically coupled to connection pad **72** of electrically conductive connection part **52**. As above, chip carrier **50** also works as a heat sink to dissipate heat from the plurality of LEDs.

5 The dimensions of the blue and green LEDs can be a width of approximately 205 microns to approximately 275 microns and a length of approximately 285 microns to approximately 355 microns. In one embodiment, the blue and green LEDs can have a width of approximately 240 microns and a length of approximately 320 microns. The thickness of
10 the blue and green LEDs can vary from approximately 100 microns to approximately 130 microns, for example, approximately 115 microns.

 The red LEDs can have various sizes. In some embodiments, the red LEDs can have a width and length of approximately 355 microns, but the widths and lengths can range in size from approximately 330 microns to
15 approximately 380 microns. The thicknesses of the red LEDs in such embodiments can be approximately 70 microns to approximately 125 microns, for example, approximately 100 microns. In such embodiments, the red LEDs have bonding pads ranging in size from approximately 90 microns to approximately 110 microns, for example, approximately 100
20 microns.

 In some embodiments, the red LEDs can have a width and length of approximately 290 microns, but the widths and lengths can range from approximately 265 microns to approximately 315 microns. The thicknesses of the red LEDs in such embodiments can be approximately 100 microns,
25 but the thicknesses can range from approximately 85 microns to approximately 115 microns. In such embodiments, the red LEDs can have bonding pads ranging in size from approximately 80 microns to approximately 100 microns, for example, approximately 90 microns.

 Figure 10 schematically illustrates a portion of an LED display screen
30 generally designated **200**. LED display screen **200** can be, for example, an indoor or an outdoor screen comprising, in general terms, a driver printed circuit board (PCB) **202** carrying a large number of LED packages **204**

arranged in rows and columns, each LED package is attached or is integral to the other LED packages **204** to form a single screen. LED packages **204** can be electrically connected to traces or pads on PCB **202**. In some embodiments, PCB **202** can be connected to an appropriate electrical signal processing and driver circuitry.

LED packages **204** can comprise, for example, LED packages **10**, **110** as described above. Each LED package **204** can comprise a lead frame with a casing disposed on at least a portion of the lead frame. The casing can have a reflector cavity therein that forms a rectangular shaped opening around one or more LEDs **206** on the lead frame with the reflector cavity having angled end and side wall portions surrounding the one or more LEDs. As with the LED packages **10**, **110** described above, the angle of each end wall portion of the reflector cavity can be at a different angle from the angle of each side wall portion. As shown in Figure **10**, each LED package **204** can have multiple LEDs **206** therein. For example, each of the LED packages **204** can carry a vertically oriented, linear array of red, green and blue LEDs **206** as described above. Such a linear orientation of the LEDs can improve color fidelity over a wide range of viewing angles. Alternatively, a single LED can be provided in each LED package as with package **10** from Figures 1-5.

Each LED package **204** can define a pixel **210**. Each pixel **210** of the display can have a size of approximately 3.0 mm or less by approximately 3.5 mm or less. LED packages **204** can comprise devices such as those described above and illustrated in Figures 1-9. As stated above, LED packages **204** can be electrically connected to traces or pads on PCB **202** that are interconnected to provide appropriate electrical signal processing circuitry and driver circuitry (not shown). Through-holes **208** can also be provided to allow for better and shorter contact for the plastic casing body to the PCB. Through-holes **208** also allow for improved thermal dissipation.

LEDs for use in backlighting or other panel display systems can comprise an arrangement or planar arrays of red, green, and blue LED devices configured to emit light that appears as a pixel of white light in

operation. Sizes of red, green, and blue LEDs can be selected to meet a desired brightness and/or intensity balancing level. Any configuration of the red, green, and blue LEDs can be used. LED packages and/or LEDs utilizing metal-to-metal die attach methods as described herein can be used in backlighting systems and any suitable display panel system **200**. For example and without limitation, LED packages and/or LEDs used in backlighting and display panel systems can offer light output of up to 122 lumens at 300 mA in cool white (CW), and up to 100 lumens at 300 mA in warm white (WW) color points. For example, LED packages and/or LEDs disclosed herein can be used in lighting fixtures comprising fixtures used in display panel systems offering a minimum CRI for CW color points of 65 CRI. LED packages and/or LEDs disclosed herein can be used in lighting fixtures comprising fixtures used in display panel systems offering a minimum CRI for CW color points of 75 CRI which corresponds to a range of 5,000 K to 8,300 K CCT. LED packages and/or LEDs disclosed herein for use in display panel systems can also offer, for example, a minimum CRI for CW color points of 80 CRI which corresponds to a range of 2,600K to 3,700K CCT. Such LED packages and/or LEDs can be used for both standard and high voltage configurations.

Further, the LED packages described herein can be used in other general lighting areas such as in tube lighting or strip lighting devices. For example, as shown in Figure 11, a lighting device **300** can comprise a tube **302** and LED packages **310** similar to LED packages **10**, **110** described above with reference to Figures 1-4 that can be placed or attached in a single row. LED packages **310** can be integral with each other or can be separately attached to a substrate. LED packages **310** can be properly attached to a driver PCB **306** as shown Figure 11. PCB **306** can be connected to appropriate electrical signal processing and driver circuitry such as an electrical connector **308**. Tube **302** can be generally transparent or translucent. In some embodiments, a portion of tube **302**, which LED packages **310** face, can be generally transparent or translucent, while a portion of tube **302** that PCB **304** faces can be opaque. The row or strip

LED packages **310** can be inserted into a tube **302** that can be bigger, smaller or comparable to the dimensions of a fluorescent lighting tube, or CFL lamp, in a manner known in the art as the LED packages herein can replace fluorescent tube lights.

5 Arrays of LED packages can also be used in the lighting devices. Backlighting devices can be made in strips on the side (one row, no columns), or an array. An array of LED packages can be used in backlighting devices and other lighting devices, for example and without limitation, as shown in Figure 12. In particular, Figure 12 illustrates portions
10 of a front side **330A** and back side **330B** of a lighting device **330**. Such a lighting device **330** can be used in lighting fixtures that traditionally used CFL lamps, or fluorescent tubes. Thus, for example, lighting device **330** can be used in place of CFL lamps.

As in Figure 12, lighting device **330** can comprise a tube **332** having a
15 front side **332A** and a back side **332B**. Lighting device **330** can also comprise a PCB **334** disposed within tube **332** and an electrical connector **336** on either end of tube **332**. Lighting device **330** can further comprise LED packages **340** similar to LED packages **10**, **110** described above with reference to Figures 1-4 that can be electrically and operatively attached to a
20 driver PCB **334** in an array **342**. As shown in Figure 12, array **342** can be in a checkerboard pattern. Such a checkerboard pattern array **342** can facilitate the creation of uniform lighting by lighting device **330**.

As shown in Figure 12, array **342** of LED packages **340** can be attached so that they face front side **332A** of tube **332**. Front side **332A** can
25 permit light generated by array **342** of LED packages **340** to shine therethrough. For example, front side **332A** can be generally transparent or translucent. When lighting device **330** is placed in a lighting fixture, such as for example a lighting fixture that traditionally houses CFL lamps, back side **332B** of tube **332** can face the lighting fixture while front side **332A** of tube
30 **332** faces outward so that light generated by array **342** of LED packages **340** shines outward into the area to be lighted. In embodiments such as these, back side **332B** of tube **332** can be opaque. Tube **332** can be a single

unitary tube so that front side **332A** and back side **332B** of tube **332** are a single integral piece. In such embodiments, back side **332B** of tube **332** can be painted or coated with a generally opaque material. Alternatively, in some embodiments, front side **332A** of tube **332** and back side **332A** of tube **332**
5 can comprise two different components that can be fitted together to form tube **332**.

In some embodiments, back side **332A** of tube **332** can be generally transparent or translucent. In such embodiments, a second PCB with LED packages, such as an array of LED packages, can be disposed in the tube
10 so that the LED packages face back side **332A** of tube **332** so that light generated by the LED packages shines therethrough. Such embodiments can be used in lighting fixtures where it is desirable to have light shining in opposite directions so that light from a single lighting device can shine in a more full range of area. For example, such lighting devices can create a
15 light output that covers a large radius and portion of a circumference on either side of the lighting device. In this manner, a generally full radius of light can be generated.

Embodiments of the present disclosure shown in the drawings and described above are exemplary of numerous embodiments that can be
20 made within the scope of the appended claims. It is contemplated that the configurations of LED packages, systems, and related methods can comprise numerous configurations other than those specifically disclosed herein.

CLAIMS

What is claimed is:

- 5 1. A package for a light emitting diode (LED) comprising:
a lead frame comprising an electrically conductive chip carrier
comprising an upper surface for attachment of one or more LED;
a casing covering at least a portion of the lead frame; and
a reflector cavity disposed at least partially within the casing, the
10 cavity having angled side wall portions and angled end wall portions
surrounding at least a portion of the upper surface of the chip carrier, the
side wall portions extending at an angle that is different from an angle at
which the end wall portions extend.
- 15 2. The package of claim 1 wherein the lead frame is bent and
comprises a profile thickness less than approximately 0.5 mm.
3. The package of claim 1 wherein the lead frame is bent and
comprises a profile thickness between approximately 0.42 mm to
20 approximately 0.48 mm.
4. The package of claim 1, wherein a height distance between a
lower surface of the package and a upper surface of the package is less
than approximately 2.0 mm.
- 25 5. The package of claim 4, wherein the height distance is from
approximately 1.7 mm to approximately 2.0 mm.
6. The package of claim 5, wherein the height distance is
30 approximately 1.9 mm.

7. The package of claim 1, wherein the casing forms outer side walls and outer end walls, with the outer side walls approximately perpendicular to the outer end walls.

5 8. The package of claim 7, wherein a width distance of the package as measured between outer side walls of the package is less than approximately 3.0 mm.

9. The package of claim 8, wherein the width distance is between
10 approximately 2.7 mm to approximately 3.0 mm.

10. The package of claim 8, wherein the width distance is approximately 2.8 mm.

15 11. The package of claim 7, wherein a length distance of the LED package as measured between outer end walls of the LED package is less than approximately 3.5 mm.

12. The package of claim 11, wherein the length distance is between
20 approximately 3.0 mm to approximately 3.5 mm.

13. The package of claim 12, wherein the length distance is approximately 3.2 mm.

25 14. The package of claim 1, wherein the angled side wall portions and angled end wall portions of the reflector cavity have transition wall portions disposed therebetween.

15. The package of claim 14, wherein the transition wall portions are
30 disposed along at least one angle that is different from the angle of the side walls and the angle of the end walls.

16. The package of claim 15, wherein the angle of the transition wall portions is greater than the angle of the side walls and the angle of the end walls.

5 17. The package of claim 1, wherein the angled side wall portions of the reflector cavity are disposed along an angle of approximately 50° or more.

10 18. The package of claim 17, wherein the angled end wall portions of the reflector cavity are disposed along an angle of approximately 70° or more.

15 19. A light emitting diode (LED) package comprising:
a lead frame comprising an electrically conductive chip carrier comprising an upper surface;
at least one LED on the upper surface of the electrically conductive chip carrier;
a casing disposed on and covering at least a portion of the lead frame;
20 a reflector cavity in the casing, the cavity having angled side wall portions and angled end wall portions surrounding the LED, the angled side wall portions of the reflector cavity being disposed along an angle of approximately 50° or more, and the angled end wall portions of the reflector cavity being disposed along an angle of approximately 70° or more; and
25 the LED package having a width distance as measured between outer side walls of the LED package of less than approximately 3.0 mm, and the LED package having a length distance as measured between outer end walls of the LED package of less than approximately 3.5 mm.

30 20. A method of providing a light emitting device, the method comprising:

providing a lead frame comprising an electrically conductive chip carrier comprising an upper surface;

securing a casing covering at least a portion of the lead frame; and

forming a reflector cavity in the casing surrounding at least a portion
5 of the upper surface, the reflector cavity having angled side wall portions and angled end wall portions with an angle at which the side wall portions are angled that is different from an angle at which the end wall portions are angled.

10 21. The method of claim 20, further comprising disposing an LED on the upper surface of the electrically conductive chip carrier.

22. The method of claim 20, wherein the lead frame is bent and comprises a profile thickness less than approximately 0.5 mm.

15 23. The method of claim 20, wherein a height distance between a lower surface of the LED package and an upper surface of the LED package is less than approximately 2.0 mm.

20 24. The method of claim 20, wherein the casing forms outer side walls and outer end walls, with the outer side walls approximately perpendicular to the outer end walls.

25 25. The method of claim 24, wherein a width distance of the LED package as measured between outer side walls of the LED package is less than approximately 3.0 mm.

30 26. The method of claim 24, wherein a length distance of the LED package as measured between outer end walls of the LED package is less than approximately 3.5 mm.

27. The method of claim 20, wherein the angled side wall portions and angled end wall portions of the reflector cavity have transition wall portions disposed therebetween.

5 28. The method of claim 27, wherein the transition wall portions are disposed along an angle different from the angle of the side walls and the angle of the end walls.

29. The method of claim 28, wherein the angle of the transition wall
10 portions are greater than the angle of the side walls and the angle of the end walls.

30. The method of claim 20, wherein the angled side wall portions of the reflector cavity are disposed along an angle different from an angle of
15 the end wall portions of the reflector cavity.

31. The method of claim 30, wherein the angle of the end wall portions is approximately 70° or more.

20 32. The method of claim 30, wherein the angle of the side wall portions is approximately 50° or more.

33. An LED display comprising:
a printed circuit board (PCB); and
25 an array of LED packages arranged in vertical columns and horizontal rows and electrically connected to the PCB, each of LED packages comprising:

a lead frame comprising an electrically conductive
chip carrier comprising an upper surface;
30 an LED on the upper surface of the electrically
conductive chip carrier;

a casing disposed on the lead frame and covering at least a portion of the lead frame; and

a reflector cavity in the casing having angled side wall portions and angled end wall portions surrounding the LED, the side wall portions extending at an angle that is different from an angle at which the end wall portions extend.

34. An LED backlighting device comprising:

a printed circuit board (PCB); and

an array of LED packages arranged in vertical columns and horizontal rows and electrically connected to the PCB, each of LED packages comprising:

a lead frame comprising an electrically conductive chip carrier comprising an upper surface;

an LED on the upper surface of the electrically conductive chip carrier;

a casing disposed on the lead frame and covering at least a portion of the lead frame; and

a reflector cavity in the casing having angled side wall portions and angled end wall portions surrounding the LED, the side wall portions extending at an angle that is different from an angle at which the end wall portions extend.

35. The LED backlighting device of claim 34, wherein the vertical columns and horizontal rows are in a checkerboard pattern.

36. An LED lighting device comprising:

a printed circuit board (PCB); and

a strip of LED packages arranged in a row and electrically connected to the PCB, each of LED packages comprising:

a lead frame comprising an electrically conductive chip carrier comprising an upper surface;

an LED on the upper surface of the electrically conductive chip carrier;

5 a casing disposed on the lead frame and covering at least a portion of the lead frame; and

a reflector cavity in the casing having angled side wall portions and angled end wall portions surrounding the LED, the side wall portions extending at an angle that is
10 different from an angle at which the end wall portions extend.

37. The LED lighting device of claim 36 or any of the other claims above wherein the LEDs are arranged in a tube device.

15

1/10

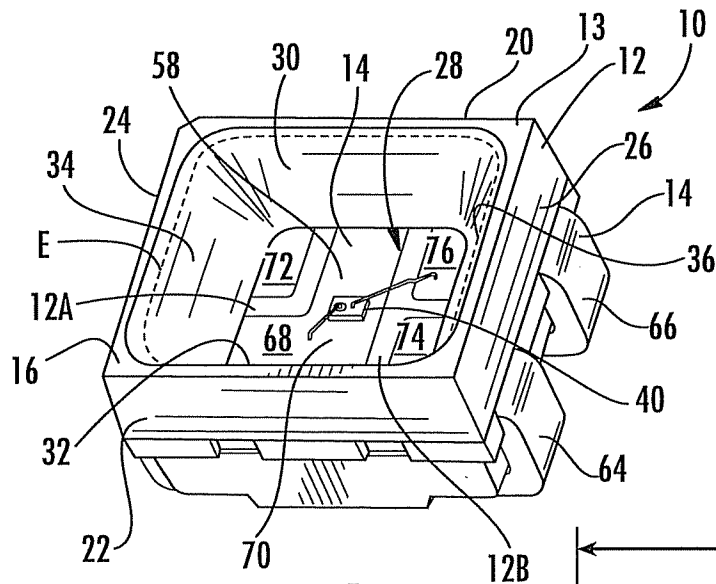


FIG. 1

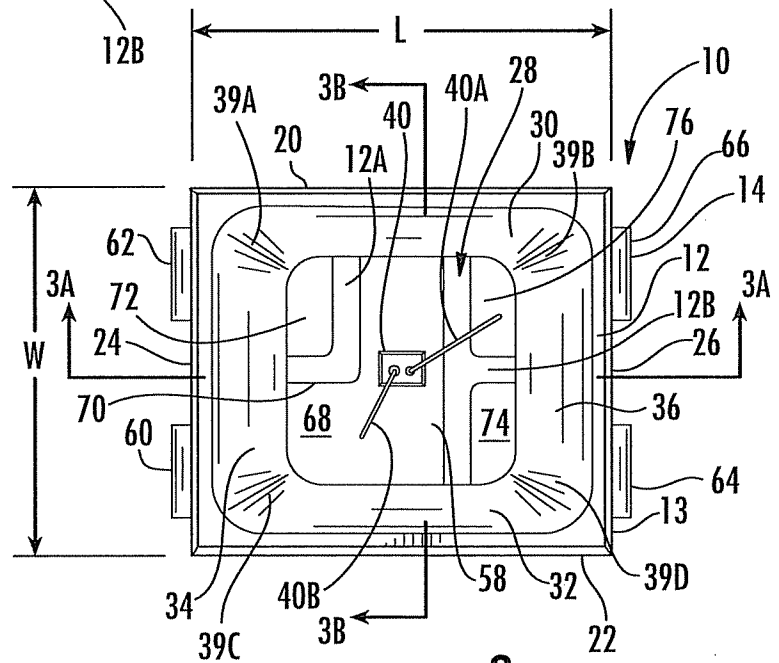


FIG. 2

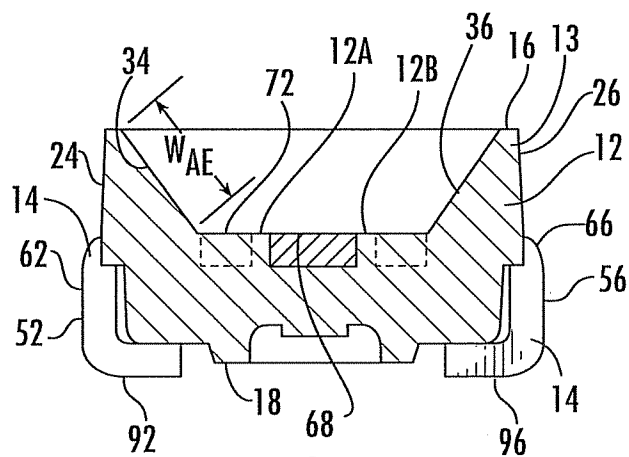


FIG. 3A

2/10

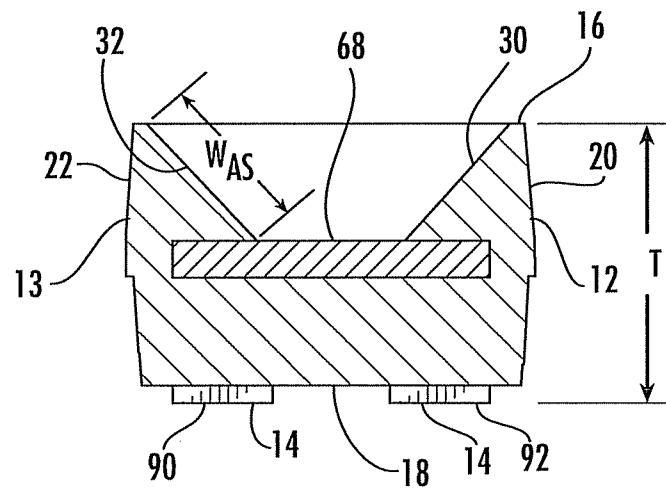


FIG. 3B

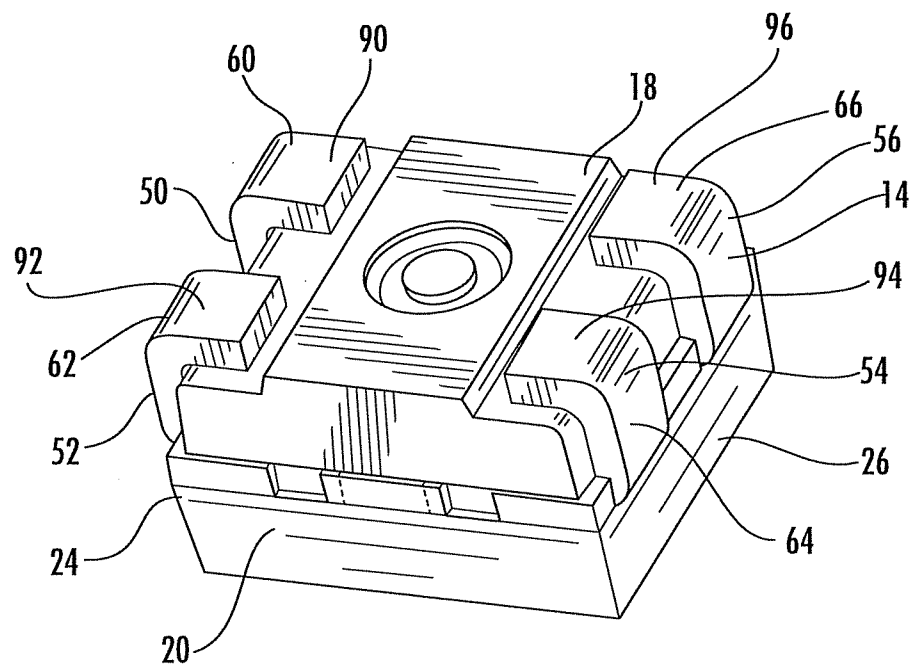


FIG. 4

3/10

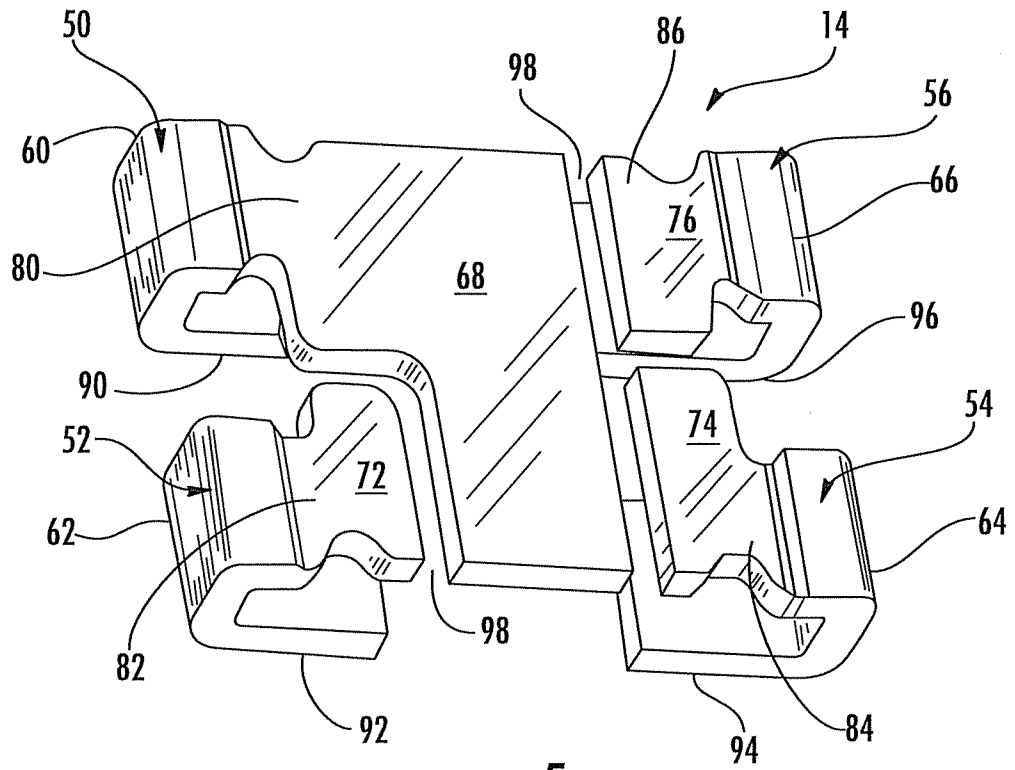


FIG. 5

4/10

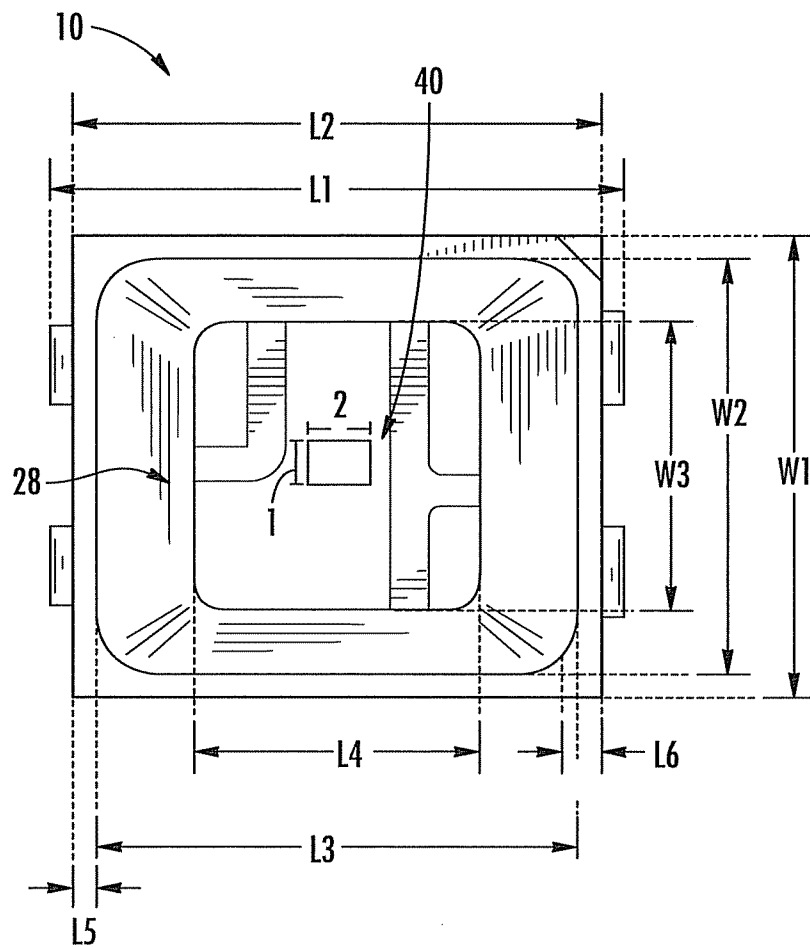


FIG. 6

5/10

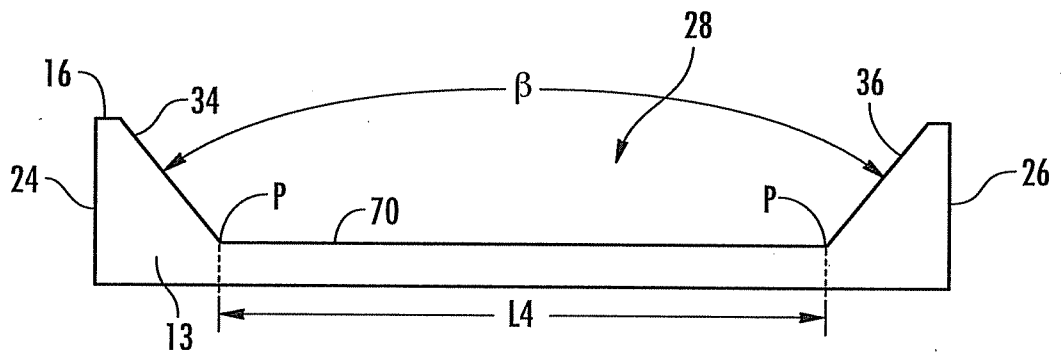


FIG. 7A

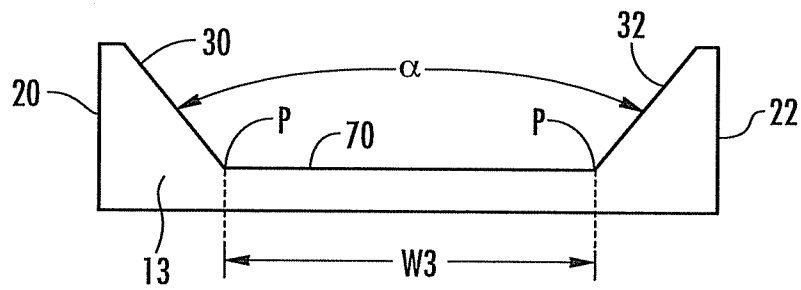


FIG. 7B

6/10

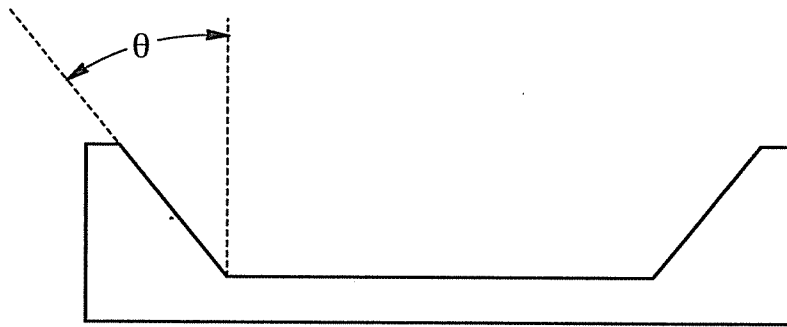


FIG. 8A

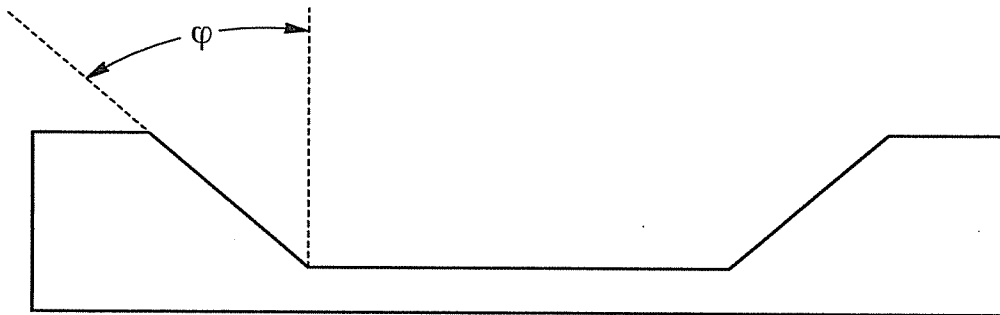


FIG. 8B

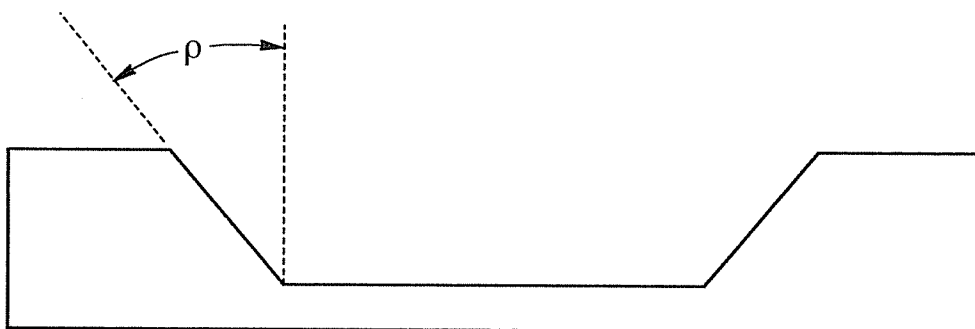


FIG. 8C

7/10

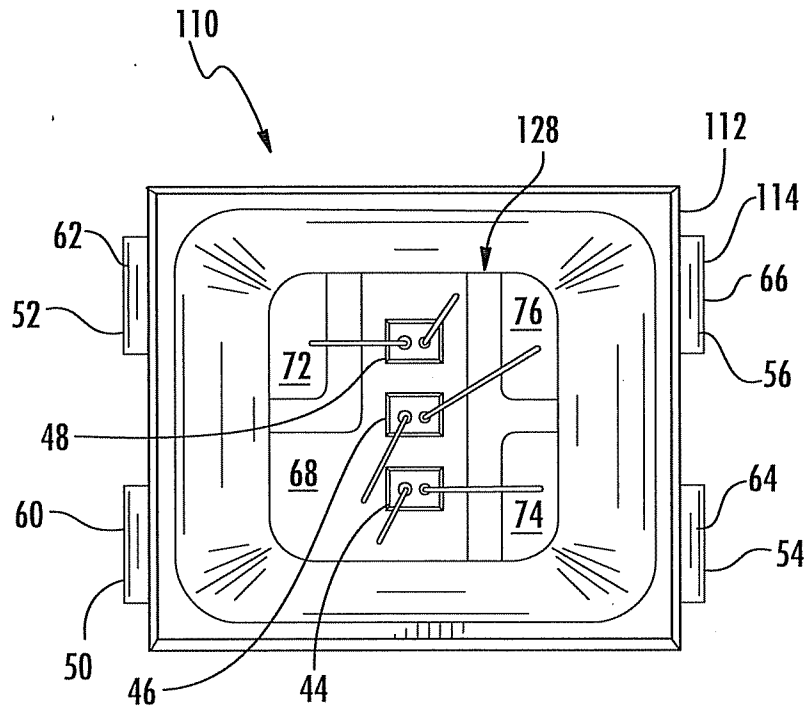


FIG. 9

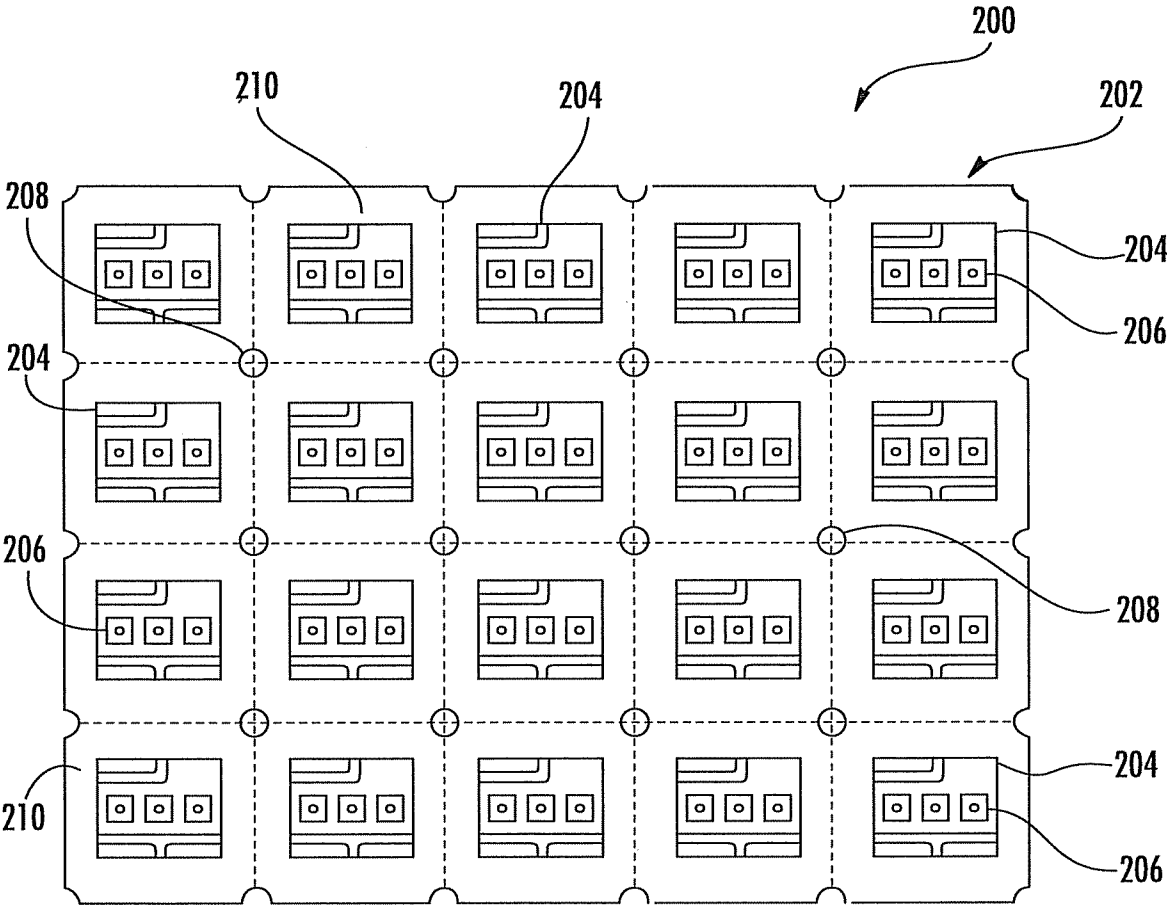


FIG. 10

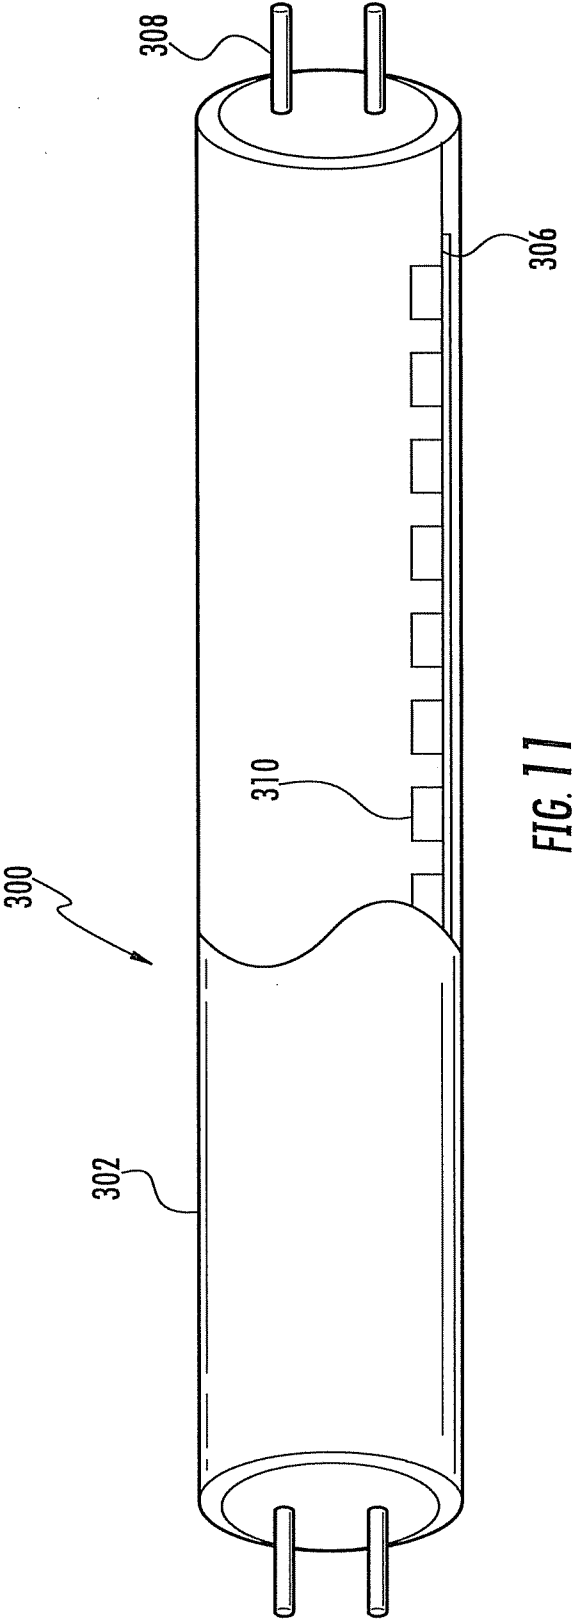


FIG. 11

10/10

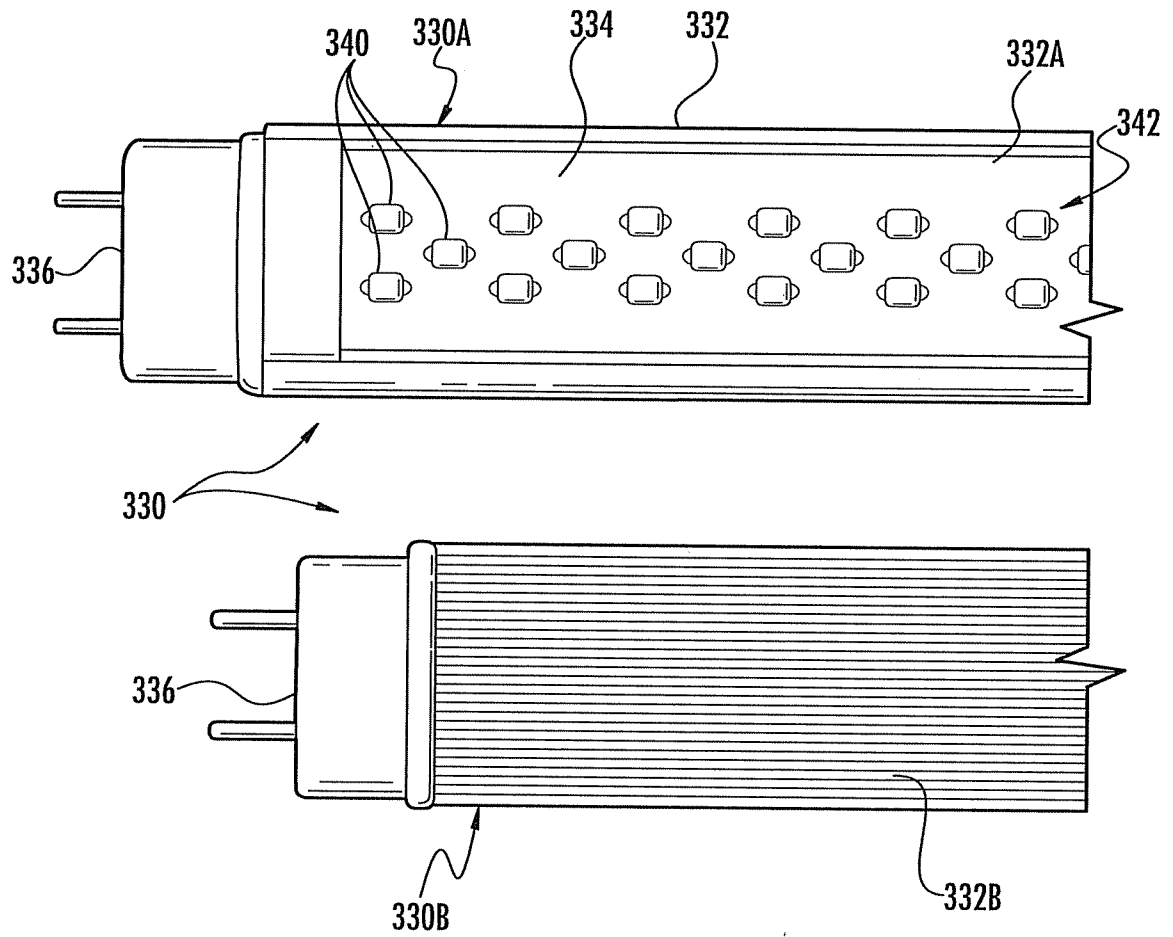


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2012/036110**A. CLASSIFICATION OF SUBJECT MATTER*****H01L 33/48(2010.01)i, H01L 33/60(2010.01)i, H01L 33/62(2010.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 33/48; H01L 21/50; H01L 33/00; H01L 23/495

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: LED, package, reflector, cavity, angle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010-0133554 A1 (CHRISTOPHER P. HUSSELL) 03 June 2010 See abstract; paragraphs [0040],[0042]; claim 1; and figures 1,8A	1-37
A	US 2010-0155748 A1 (CHI KEUNG ALEX CHAN et al.) 24 June 2010 See abstract; paragraphs [0031],[0040],[0063]; and figure 1	1-37
A	KR 10-0845856 B1 (LG ELECTRONICS INC. et al.) 14 July 2008 See abstract; paragraphs [0043],[0076]; claims 1,2; and figures 2,4	1-37
A	US 2008-0185605 A1 (TAKAHIRO WADA et al.) 07 August 2008 See abstract; paragraphs [0008],[0013]; and figures 1,2	1-37



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 SEPTEMBER 2012 (28.09.2012)

Date of mailing of the international search report

04 OCTOBER 2012 (04.10.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

PARK, Hye Lyun

Telephone No. 82-42-481-8362



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/036110

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0133554 A1	03.06.2010	CN 102460751 A	16.05.2012
		EP 2438631 A2	11.04.2012
		KR 10-2012-0015362 A	21.02.2012
		US 2011-0031865 A1	10.02.2011
		US 2011-180827 A1	28.07.2011
		US 7923739 B2	12.04.2011
		WO 2010-141215 A2	09.12.2010
		WO 2010-141215 A3	03.03.2011
		WO 2010-141215 A3	09.12.2010
US 2010-0155748 A1	24.06.2010	CN 102084509 A	01.06.2011
		CN 102386307 A	21.03.2012
		EP 2377173 A1	19.10.2011
		JP 2012-515440 A	05.07.2012
		KR 10-2011-0096601 A	30.08.2011
		US 2011-0037083 A1	17.02.2011
		WO 2010-081403 A1	22.07.2010
		WO 2012-027871 A1	08.03.2012
KR 10-0845856 B1	14.07.2008	CN 101207050 A0	25.06.2008
		EP 1936704 A2	25.06.2008
		EP 1936704 A3	04.08.2010
		JP 2008-160046 A	10.07.2008
		TW 200828633 A	01.07.2008
		US 2008-0149962 A1	26.06.2008
		US 2011-0278626 A1	17.11.2011
		US 2011-0278627 A1	17.11.2011
		US 8097896 B2	17.01.2012
US 2008-0185605 A1	07.08.2008	JP 2008-172125 A	24.07.2008
		US 7888178 B2	15.02.2011