



(51) International Patent Classification:

G06Q 10/00 (2012.01)

(21) International Application Number:

PCT/US2019/022214

(22) International Filing Date:

14 March 2019 (14.03.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/643,448

15 March 2018 (15.03.2018)

US

(71) Applicant: WALMART APOLLO, LLC [US/US]; 702

Southwest 8th Street, Bentonville, AR 72716 (US).

(72) Inventors: TAYLOR, Robert, James; 1735 South 41st

Street, Rogers, AR 72758 (US). SCOBNEY, Leigh, Ann

Marie; 2903 Southwest Greensprings Road, Bentonville, AR 72712 (US). ALEXANDER, Matthew, D.; 6203 S. 28th Street, Rogers, AR 72758 (US). CRUZ, Jeffrey, Scott; 3403 NW Park Hill Boulevard, Bentonville, AR 72712 (US). BILLINGS, Lacreia, Lynn; 403 N 14th Place, Rogers, AR 72756 (US). HENDRICKS, Joseph, Wayne; 3100 SW Satinwood Avenue, Bentonville, AR 72713 (US).

(74) Agent: BURNS, David, R. et al.; McCarter & English, LLP, 265 Franklin Street, Boston, MA 02110 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: SYSTEM AND METHOD FOR DYNAMIC PERISHABLE ITEM REPLENISHMENT

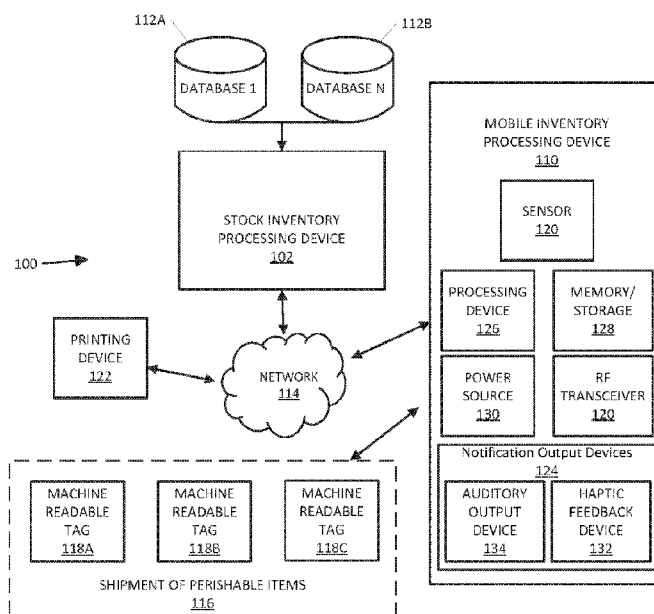


FIG. 1

(57) Abstract: System and methods for dynamic replenishment in a facility are disclosed. A mobile inventory processing device reads a machine readable tag affixed to a perishable item and transmits an indication of the perishable item to a stock inventory processing device. The stock inventory processing device retrieves a stock inventory value corresponding to the perishable item and a historic daily sales value for the perishable item from a database. The stock inventory processing device determines a restocking value based on whether the historic daily sales value exceeds the stock inventory value. The stock inventory processing device transmits a second indication to the mobile inventory processing device. The second indication correspond to insufficient shelf stock of the perishable item. The mobile inventory processing device receives the second indication and outputs an auditory alert in response to the second indication.

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

SYSTEM AND METHOD FOR DYNAMIC PERISHABLE ITEM REPLENISHMENT

RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of U.S. Provisional Application No. 62/643,448, filed on March 15, 2018, which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] Supply chain systems facilitate the movement of perishable items to a store. Determinations as to when to move the perishable items from supply rooms to shelf stock is often inconsistent.

BRIEF DESCRIPTION OF DRAWINGS

[0003] Illustrative embodiments are shown by way of example in the accompanying drawings and should not be considered as a limitation of the present disclosure:

[0004] **FIG. 1** is a block diagram illustrating a system for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment.

[0005] **FIG. 2** is a flow diagram illustrating a process for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment.

[0006] **FIG. 3** is a flow diagram illustrating a process for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment.

[0007] **FIG. 4** depicts a block diagram an exemplary computing device in accordance with an exemplary embodiment.

DETAILED DESCRIPTION

[0008] Described in detail herein is a system for dynamic perishable item replenishment in a retail facility. The system reads machine readable tags associated with perishable items that have been delivered to the facility. The system transmits first indications of the perishable items to a stock inventory processing device. The stock inventory processing device retrieves stock inventory values corresponding to the perishable items. A historic daily sales value for

each perishable item can be retrieved from a database. The stock inventory processing device determines a restocking value based on whether the historic daily sales value exceeds the stock inventory value for each item. The stock inventory processing device transmits second indications to one or more mobile inventory processing devices. The second indications can correspond to insufficient shelf stock of one or more perishable items. The second indications can cause the mobile inventory processing devices to generate an audible indication.

[0009] FIG. 1 is a block diagram illustrating a system for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment. The system includes a shipment of perishable items 116, one or more machine readable tags 118A, 118B, 118C attached to or otherwise associated with the perishable items in the shipment. The system also includes a user-facing mobile inventory processing device 110 which has an included sensor 120. Network 114 infrastructure connects the mobile inventory processing device 110 and the stock inventory processing device 102. The stock inventory processing device 102 can selectively interface with one or more databases 112A, 112B.

[0010] A retail environment can receive many shipments of perishable items 116 in any day. Shipments can vary in size. Perishable items can include food items with a short shelf life which will spoil and become either unfit for sale or unfit for consumption. Examples of perishable items include but are not limited to produce, meats, dairy, produce, and bakery goods. The perishable items can be independently packaged or bulk packaged.

[0011] Machine readable tags 118A, 118B, 118C can be affixed to or otherwise associated with the packaging of the perishable items. The machine readable tags 118A, 118B, 118C can include but are not limited to machine readable bar codes or quick response (QR) codes. Additionally, the machine readable tags can include radio frequency (RF) implementations such as near field communications (NFC) and Bluetooth low energy (LE) tags. One non-limiting example of a RF implementation can be an RFID tag. The machine readable tags 118A, 118B, 118C are unique to their associated perishable items. The machine readable tags 118A, 118B, 118C are encoded with information identifying the perishable items stored in the databases 112A, 112B. For example, a bar code and QR code can be encoded with numeric information identifying the perishable item to which the barcode or QR code is attached. The databases 112A, 112B can contain entries indexed based on the encoded numeric information corresponding to the perishable items to which they are attached. In the

radio frequency tag embodiment, the machine readable tags 118A, 118B, 118C may include additional information corresponding to the shipment of perishable items 116 including, but not limited to, historical location information of the shipment of perishable items 116 that may affect a manner in which the perishable items are processed.

[0012] The mobile inventory processing device 110 can be a handheld user device. The mobile inventory processing device 110 can include a mobile device with at least one sensor 120. The mobile inventory processing device 110 can be a smartphone, tablet, subnotebook, laptop, personal digital assistant (PDA), handheld device, such as a Symbol ® MC18 or MC40, and/or any other suitable mobile device that can be programmed and/or configured to implement and/or interact with embodiments of the system via wireless communication. For example, the mobile device 110 can be a Symbol ® MC18. The MC18 can be a handheld mobile computer configured to execute the Android and/or Windows operating system. The MC18 can include 1D and 2D scanner, Wi-Fi (802.11a/b/g/n), a camera, a display, Android 2.3 and/or Windows 7, 1GB RAM/8GB flash, and a battery. The mobile inventory processing device 110 can include a processing device 126, such as a digital signal processor (DSP) or microprocessor, memory/storage 128 in the form a non-transitory computer-readable medium, a power source 130, and a radio frequency transceiver 132. The sensor 120 can include an optical reading device operable to read a bar code such as a universal product code (UPC) label. Additionally, the sensor 120 can be configured to read QR codes utilizing the network connection provided by the network 114 and the network's underlying infrastructure. The sensor 120 can also be configured to respond to Bluetooth LE beacons or tags. Additionally, the mobile inventory processing device 110 can include one or more notification output devices 124. In some embodiments, the notification output device(s) 124 can include, for example, an auditory output device 134, such as a speaker or headphone connection. The speaker or headphone connection (with accompanying headphones) can provide the user with auditory alerts and messages during inventory activities. Additionally, or in the alternative, the notification output device(s) 124 can include a haptic feedback device 132 which can provide the user of the mobile inventory processing device 110 notifications in environments where auditory alerts are inappropriate or difficult to discern. The mobile inventory processing device 110 can include a display. The display on the mobile inventory processing device 110 can visually provide indications and information to the user relating to inventory status and locations of perishable items in need of stocking or moving.

[0013] The mobile inventory processing device 110 can communicate to the stock inventory processing device 102 through the network 114. The network 114 can be a wide area network (WAN) or the Internet. The network 114 can be operable to transport data packets compatible with mobile inventory processing device 110 and the stock inventory processing device 102. In one embodiment, compatible data packets can include data packets with transmission control protocol (TCP) or user datagram protocol (UDP) routing information, as well as an accessible application layer. The network 114 can interface with other networks or servers. The network 114 can be a combination of wired and wireless connection inclusively.

[0014] The stock inventory processing device 102 provides the central data processing required for dynamic perishable item replenishment. The stock inventory processing device 102 can be communicatively coupled to one or more mobile inventory processing devices 110 through the network 114. The stock inventory processing device 102 can be a physical dedicated computing device for inventory processing, or, alternatively, a virtualized computing device for inventory processing. In the virtualized embodiment, the stock inventory processing device 102 can be a virtualized instance running in a shared computing environment. Alternatively, or in addition, the stock inventory processing device 102 can be virtualized functions executing across multiple physical hosts. The stock inventory processing device 102 can contain logic to determine stock inventory levels, historic daily sales volumes, sales of items through point of sale terminals, and locations of stock throughout at retail facility.

[0015] Databases 112A, 112B catalog and index stock inventories. The databases 112A, 112B can be locally attached storage or area attached storage. The databases 112A, 112B can contain inventory related metrics including current shelf stock, back room stock, as well as historical information utilized to identify historic daily sales volumes and values.

[0016] A printing device 122 can be communicatively attached to the network 114. The printing device 122 can be utilized in conjunction with the stock inventory processing device 102 and the mobile inventory processing device 110 for stock or backroom management. The printing device 122 can receive instructions from the stock inventory processing device 102 to print labels corresponding to the inventorying of the received shipment of perishable items 116 when items in the shipment are not needed for shelf stock. The printing device 122 can utilize the instructions to print a label to be affixed to a bin to contain the identified perishable items of the shipment that are not needed for shelf stock in the backroom.

Additionally, the printing device 122 can be utilized to print a shelving label for perishable items that are being transferred from the shipment or the backroom to the sales floor.

[0017] FIG. 2 is a flow diagram illustrating a process for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment.

[0018] At step 202, a retail facility receives a shipment of perishable items. Perishable items can be received periodically throughout a day. The shipment of perishable items can be unloaded from a delivery truck and brought to a receiving area of the facility for processing. Perishable items received in a shipment can be homogenous or heterogeneous based on their type. For example, a shipment including perishable items such as carrots and lettuce would be heterogeneous and a shipment including perishable items only of celery would be homogenous.

[0019] At step 204, the perishable items in the shipment are scanned. For example, machine readable tags on the packaging of the perishable items can be read by a mobile inventory processing device. The mobile inventory processing device utilizes a sensor to read the machine readable tag. The sensor can take the form of an appropriate sensor based on the type of machine readable tag. Upon the scanning of each machine readable tag, the mobile inventory processing device encodes the information present in each tag, and transmits that encoded information across a network 114 to the stock inventory processing device.

[0020] At step 206, the stock inventory processing device identifies available shelf stock of the identified received perishable items. The stock processing device queries one or more databases 112A, 112B for available stock in the retail facility. Available shelf stock can include stock marketed at the traditional location within the retail environment, as well as stock marketed in promotional areas. The available shelf stock can be updated in real time as purchases of the perishable items are communicated to the stock inventory processing device by one or more point of sale terminals. As the stock is sold, the current shelf stock entries in the databases 112A, 112B are correspondingly updated to reflect an accurate accounting of the shelf stock in a retail facility.

[0021] At step 208, the stock inventory processing device evaluates whether a historical daily sales volume exceed the current shelf stock. Historic aggregation of sales across time periods are stored in the one or more databases 112A, 112B. Periodically, the stock inventory

processing device aggregates sales for different time periods and recalculates a historic daily sales volume. For example, the databases 112A, 112B can keep a historic daily sales volume for each day of the week, specific holidays, as well as weeks prior to holidays. The stock inventory processing device can periodically recalculate these historic daily sales as to keep them accurate with recent sales. The stock inventory processing device compares the current shelf stock availability with the historic daily sales volume for that period. If the historic daily sales volume is greater than the shelf stock availability, the system can identify an anticipated shelf stock deficiency. Historic daily sales can factor in data related to regional sales and store demographics.

[0022] At step 210, upon the stock inventory processing device determining that the historic daily sales volume does not exceed current shelf stock for a scanned item, the system determines that the scanned perishable item in the shipment should be stored/binning in the backroom or staging area. The stock inventory processing device can encode an indication to bin the perishable item in the shipment. The indication can be transmitted through the network to the mobile inventory processing device, where the indication can be translated into an auditory output and/or display information. Alternatively, or in addition, the stock inventory processing device can transmit an indication to the printing device 122 to print a label for the storage of the scanned perishable item in the shipment. The printing device 122 can print a label to be affixed to a bin which can contain the scanned perishable item for storage. The label can include a machine readable tag that the sensor 120 on the mobile inventory processing device 110 can read. After the label is affixed to the bin, the label can be utilized in the same manner as the machine readable tags 118A, 118B, 118C for the dynamic replenishment of perishable items.

[0023] At step 212, the stock inventory processing device then determines if additional stock should be processed first in, first out (FIFO) when the historic daily sales volume exceeds current shelf stock. The stock inventory processing device queries the one or more databases 112A, 112B to determine if there is stock already available in the retail facility. The availability can include shelf stock at different locations throughout the retail facility, including backroom binned stock of the perishable item. In the event that there is already binned perishable items in the backroom or at a different location within the retail facility, the stock inventory processing device encodes an indication with the containing bin and location information corresponding to old stock for the perishable items.

[0024] At step 214, the stock inventory processing device encodes an indication to stock the perishable items in the shipment on the sales floor when it is determined that no FIFO processing is available. In the event that there is no binned backroom stock or shelf stock available at other locations within the retail facility, the stock inventory processing device includes an auditory alert when transmitting an indication to the mobile inventory processing device. The auditory alert can be encoded and transmitted with the indication to the mobile inventory processing device. The auditory alert can be output by a speaker as a double beep, or distinct indication different from an auditory alert of a machine readable tag being scanned. Alternatively, the auditory alert can be a voice notification indicating action with the perishable item can be taken. The voice notification can be human or machine generated. The voice notification can indicate a need for stocking of the perishable items, a lack of need for stocking, an amount for restocking, and/or a location for the perishable item to be stocked. The auditory indication can be perceived by the user immediately after the scan of the machine readable tag. The auditory alert can prompt the user of the mobile inventory processing device to transfer the perishable items to follow instructions rendered on the display of the mobile inventory processing device, e.g., instructions to move the perishable items to the shelf stock on the sales floor. Alternatively haptic feedback can produce a vibration of the mobile inventory processing device to notify the user.

[0025] At step 216, the stock inventory processing device determines whether to retrieve old stock if FIFO processing is needed. In the event that there is already binned perishable items in the backroom, the stock inventory processing device encodes an indication with the containing bin and location information corresponding to old stock for the perishable items. The stock inventory processing device transmits the indication to the mobile inventory stock processing device which can decode the indication as a visual indication to be rendered on a display on the mobile inventory processing device. The display can present information related to the correct bin and the location of the bin containing the perishable items to be processed FIFO. Additionally, the display can present information regarding the location of the shelf stock and where to relocate the binned perishable items on the sales floor.

[0026] At step 218, the stock inventory processing device can provide an indication to bin the scanned perishable items in the shipment in the backroom, when old or previously binned stock of the perishable item is transferred to the shelf stock on the sales floor. Upon receiving the indication with step 216, an notification to bin the received perishable items in

the shipment can additionally be encoded and transmitted to indicate to the user of the mobile inventory processing device to bin the received perishable items. Additional information including location to store the newly binned perishable items may be included as well as an indication to retrieve a new binning label from the printer. Concurrently, the stock inventory processing device can transmit an instruction for printing a new label to the printer.

[0027] At step 220, once the old previously binned stock has been retrieved and the received perishable items in the shipment has been binned, the old previously binned stock can be transferred from to the shelf stock on the sales floor.

[0028] **FIG. 3** is a flow diagram illustrating a process for dynamic perishable item replenishment in a retail facility according to an exemplary embodiment.

[0029] At step 302, the mobile inventory processing device reads a machine readable tag affixed to a perishable item. As discussed above, the machine readable tag can include but is not limited to a UPC barcode, QR code, NFC tag, or Bluetooth LE beacon or tag. The reader includes but is not limited to a sensor capable of reading the aforementioned machine readable tags.

[0030] At step 304, the mobile inventory processing device transmits an indication identifying a perishable item. The indication corresponds to information extracted from the reading of the machine readable tag. The mobile inventory processing device encodes the information as a digital indication and transmits that indication over a network 112 to the stock information processing device.

[0031] At step 306, the stock inventory processing device receives the first indication. The stock inventory processing device utilizes listener objects to bound to ports of the network 112 for the receipt of indications from one or more mobile inventory processing devices. The stock inventory processing device can process the indications in a queue where first received is first processed. Alternatively, or in addition, priorities based on the originating mobile inventory processing device can provide order in processing.

[0032] At step 308, the stock inventory processing device receives a stock inventory value corresponding to the perishable item from the database. The stock inventory processing device builds a database query based on the received indication corresponding to the

perishable item. The database query requests available stock on the sales from the one or more databases 112A, 112B for the perishable item.

[0033] At step 310, the stock inventory processing device receives a historic daily sales value for the perishable item from the database. A second query can include a request for the historic daily sales value for the perishable item. As discussed, the historic daily sales value can be a dynamic value, calculated periodically by the stock inventory processing device. Alternatively some database implementations allow for the automatic updating of values based on events (e.g. table updates) where the databases 112A, 112B can update the historic daily sales value.

[0034] At step 312, the stock inventory processing device determines a restocking value based on whether the historic daily sales value exceeds the stock inventory value. Additionally, the stock inventory processing device can retrieve from the databases 112A, 112B, a location of stock of the perishable item, and transmit the location of the corresponding stock. The database 112A, 112B can be a relational database where tables have interrelated fields tying stock table to a location table.

[0035] At step 314, the stock inventory processing device, transmits a second indication corresponding to insufficient shelf stock of the perishable item. Upon the determination of insufficient stock, the stock inventory processing device notifies a user of the mobile inventory processing device of the stock deficiency through a data transmission.

[0036] At step 316, the mobile inventory processing device, receives the second indication where the second indication is an audible indication. The audible indication can be output by the mobile inventory processing device as a double beep or another distinct sound, such as a voice notification, to alert the user of a stock outage on the sales floor, thereby indicating that the just scanned item needs to be moved to the sales floor. Alternatively, a vibration from the haptic feedback device 132 can provide notification to the user of the mobile inventory processing device.

[0037] **FIG. 4** is a block diagram of an example computing device for implementing exemplary embodiments of the present disclosure. Embodiments of the computing device 400 can implement embodiments of the system for dynamic perishable item replenishment in a retail facility. For example, the computing device can be embodied as a portion of the mobile

inventory processing device, stock inventory processing device, and the printing device. The computing device 400 includes one or more non-transitory computer-readable media for storing one or more computer-executable instructions or software for implementing exemplary embodiments. The non-transitory computer-readable media may include, but are not limited to, one or more types of hardware memory, non-transitory tangible media (for example, one or more magnetic storage disks, one or more optical disks, one or more flash drives, one or more solid state disks), and the like. For example, memory 406 included in the computing device 400 may store computer-readable and computer-executable instructions or software for implementing exemplary operations of the computing device 400. The computing device 400 also includes configurable and/or programmable processor 402 and associated core(s) 404, and optionally, one or more additional configurable and/or programmable processor(s) 402' and associated core(s) 404' (for example, in the case of computer systems having multiple processors/cores), for executing computer-readable and computer-executable instructions or software stored in the memory 406 and other programs for implementing exemplary embodiments of the present disclosure. Processor 402 and processor(s) 402' may each be a single core processor or multiple core (404 and 404') processor. Either or both of processor 402 and processor(s) 402' may be configured to execute one or more of the instructions described in connection with computing device 400.

[0038] Virtualization may be employed in the computing device 400 so that infrastructure and resources in the computing device 400 may be shared dynamically. A virtual machine 412 may be provided to handle a process running on multiple processors so that the process appears to be using only one computing resource rather than multiple computing resources. Multiple virtual machines may also be used with one processor.

[0039] Memory 406 may include a computer system memory or random access memory, such as DRAM, SRAM, EDO RAM, and the like. Memory 406 may include other types of memory as well, or combinations thereof. The computing device 400 can receive data from input/output devices. A user may interact with the computing device 400 through a visual display device 414, such as a computer monitor, which may display one or more graphical user interfaces 416, sensor interface 420 and a input device 418.

[0040] The computing device 400 may also include one or more storage devices 426, such as a hard-drive, CD-ROM, or other computer readable media, for storing data and computer-readable instructions and/or software that implement exemplary embodiments of the present

disclosure (e.g., GUI 118). For example, exemplary storage device 426 can include one or more databases 428 for storing information associated sensor reading and perishable item stock levels. The databases 428 may be updated manually or automatically at any suitable time to add, delete, and/or update one or more data items in the databases.

[0041] The computing device 400 can include a network interface 408 configured to interface via one or more network devices 424 with one or more networks, for example, Local Area Network (LAN), Wide Area Network (WAN) or the Internet through a variety of connections including, but not limited to, standard telephone lines, LAN or WAN links (for example, 802.11, T1, T3, 56kb, X.25), broadband connections (for example, ISDN, Frame Relay, ATM), wireless connections, controller area network (CAN), or some combination of any or all of the above. In exemplary embodiments, the computing system can include one or more antennas 422 to facilitate wireless communication (e.g., via the network interface) between the computing device 400 and a network and/or between the computing device 400 and other computing devices. The network interface 408 may include a built-in network adapter, network interface card, PCMCIA network card, card bus network adapter, wireless network adapter, USB network adapter, modem or any other device suitable for interfacing the computing device 400 to any type of network capable of communication and performing the operations described herein.

[0042] The computing device 400 may run any operating system 410, such as any of the versions of the Microsoft® Windows® operating systems, the different releases of the Unix and Linux operating systems, any version of the MacOS® for Macintosh computers, any embedded operating system, any real-time operating system, any open source operating system, any proprietary operating system, or any other operating system capable of running on the computing device 400 and performing the operations described herein. In exemplary embodiments, the operating system 410 may be run in native mode or emulated mode. In an exemplary embodiment, the operating system 410 may be run on one or more cloud machine instances.

[0043] In describing exemplary embodiments, specific terminology is used for the sake of clarity. For purposes of description, each specific term is intended to at least include all technical and functional equivalents that operate in a similar manner to accomplish a similar purpose. Additionally, in some instances where a particular exemplary embodiment includes multiple system elements, device components or method steps, those elements, components,

or steps can be replaced with a single element, component, or step. Likewise, a single element, component, or step can be replaced with multiple elements, components, or steps that serve the same purpose. Moreover, while exemplary embodiments have been shown and described with references to particular embodiments thereof, those of ordinary skill in the art will understand that various substitutions and alterations in form and detail can be made therein without departing from the scope of the present disclosure. Further, still, other aspects, functions, and advantages are also within the scope of the present disclosure.

[0044] Exemplary flowcharts are provided herein for illustrative purposes and are non-limiting examples of methods. One of ordinary skill in the art will recognize that exemplary methods can include more or fewer steps than those illustrated in the exemplary flowcharts and that the steps in the exemplary flowcharts can be performed in a different order than the order shown in the illustrative flowcharts.

We claim:

1. A system for dynamic replenishment in a facility comprising:
a mobile inventory processing device, wherein the mobile inventory processing device comprises one or more sensors, and a notification output device, the mobile inventory processing device configured to:
 - read a machine readable tag affixed to packaging of a perishable item via the one or more sensors;
 - transmit a first indication to a stock inventory processing device based on identifying the perishable item using the machine readable tag;
 - receive, from the stock inventory processing device, a second indication of an insufficient shelf stock corresponding to the perishable item, wherein the second indication comprises a notification indication;the stock inventory processing device, configured to:
 - receive the first indication from the mobile inventory processing device;
 - retrieve a stock inventory value corresponding to the perishable item of the first indication from a database;
 - retrieve a historic daily sales value corresponding to the perishable item from the database;
 - determine a restocking value based on whether historic daily sales value exceeds the stock inventory value; and
 - transmit the second indication to the mobile inventory processing device, wherein the second indication corresponds to the insufficient shelf stock associated with the perishable item.
2. The system of claim 1, wherein the notification output device is one selected from a group of an auditory output device and a haptic feedback device
3. The system of claim 2, wherein the auditory output device is a speaker and the audible indication comprises a double beep.
4. The system of claim 1, wherein the stock inventory processing device is further configured to:

retrieve, from the database, a location of a stock of the perishable item corresponding to the stock inventory value; and

transmit, to the mobile inventory processing device, a third indication corresponding to the location of the stock.

5. The system of claim 4, wherein the mobile inventory processing device further comprises a display device configured to display the location of stock of the perishable item.

6. The system of claim 1, wherein the stock inventory processing device is further configured to:

retrieve, from the database, a fourth indication corresponding to a second machine readable tag and the restocking value;

transmit, to a printing device, a fourth indication based on the restocking value, wherein the fourth indication corresponds to information associated with sale parameters of the shipment of perishable items; and

the printing device configured to:

receive, from the stock inventory processing device, the fourth indication; and

print the second machine readable tag corresponding to the fourth indication.

7. The system of claim 1, wherein stock inventory value is based at least in part on an aggregate of point of sale transactions for the perishable item.

8. A method for dynamic replenishment in a facility comprising:

reading, by a mobile inventory processing device, a machine readable tag affixed to packaging of a perishable item, wherein the mobile inventory processing device comprises one or more sensors, and a notification output device;

transmitting a first indication identifying the perishable item based on the machine readable tag;

receiving, from the mobile inventory processing device, the first indication at a stock inventory processing device;

retrieving, from a database, stock inventory value corresponding to the perishable item of the first indication;

retrieving, from the database, a historic daily sales value corresponding to the perishable item;

determining a restocking value based on whether historic daily sales value exceeds the stock inventory value;

transmitting a second indication to the mobile inventory processing device, wherein the second indication corresponds to an insufficient shelf stock associated with the perishable item; and

receiving the second indication corresponding to the insufficient shelf stock associated with the perishable item, wherein the second indication comprises an notification indication.

9. The method of claim 8, wherein the notification output device is one selected from a group of an auditory output device and a haptic feedback device.

10. The method of claim 9, wherein the auditory output device is a speaker and the audible indication comprises a double beep.

11. The method of claim 8, further comprising:

retrieving, from the database, a location of a stock of the perishable item corresponding to the stock inventory value; and

transmitting, to the mobile inventory processing device, a third indication corresponding to the location of the stock.

12. The method of claim 11, wherein the mobile computing device further comprises a display device configured to display the location of stock of the perishable item.

13. The method of claim 8, further comprising:

retrieving, from the database, a fourth indication corresponding to a second machine readable tag and the restocking value;

transmitting, to a printing device, the fourth indication based on the restocking value, wherein the fourth indication corresponds to information associated with sale parameters of the shipment of perishable items; and

receiving, by a printing device from the stock inventory processing device, the fourth indication; and

printing, by the printing device, the second machine readable tag corresponding to the fourth indication.

14. The method of claim 8, wherein the stock inventory value is based at least in part on an aggregate of point of sale transactions for the perishable item.

15. A non-transitory computer readable medium for dynamic replenishment in a facility, having stored thereon, instructions that when executed in a computing system, cause the computing system to perform operations comprising:

reading, by a mobile inventory processing device, a machine readable tag affixed to packaging of a perishable item via the one or more sensors, wherein the mobile inventory processing device comprises one or more sensors, and a notification output device;

transmitting a first indication, to a stock inventory processing device based on identifying the perishable item using machine readable tag, identifying the perishable item;

receiving the first indication from the mobile inventory processing device;

retrieving a stock inventory value corresponding to the perishable item of the first indication;

retrieving, from a database, a historic daily sales value corresponding to the perishable item from the database;

determining a restocking value based on whether historic daily sales value exceeds the stock inventory value;

transmitting a second indication to the mobile inventory processing device, wherein the second indication corresponds to the insufficient shelf stock associated with to the perishable item; and

receiving the second indication of an insufficient shelf stock corresponding to the perishable item, wherein the second indication comprises a notification indication.

16. The medium of claim 15, wherein the notification output device is one selected from a group of an auditory output device and a haptic feedback device.

17. The medium of claim 16, wherein the auditory output device is a speaker and the audible indication comprises a double beep.
18. The medium of claim 15, wherein the instructions further comprise:
retrieving, from the database, a location of a stock of the perishable item corresponding to the stock inventory value; and
transmitting, to the mobile inventory processing device, a third indication corresponding to the location of the stock.
19. The medium of claim 18, wherein the mobile inventory processing device further comprises a display device configured to display the location of stock of the perishable item.
20. The medium of claim 15, wherein the instructions further comprise:
retrieving, from the database, a fourth indication corresponding to a second machine readable tag and the restocking value;
transmitting, to a printing device, a fourth indication based on the restocking value, wherein the fourth indication corresponds to information associated with sale parameters of the shipment of perishable items; and
receiving, by a printing device, from the stock inventory processing device, the fourth indication; and
printing, by the printing device, the second machine readable tag corresponding to the fourth indication.

1/4

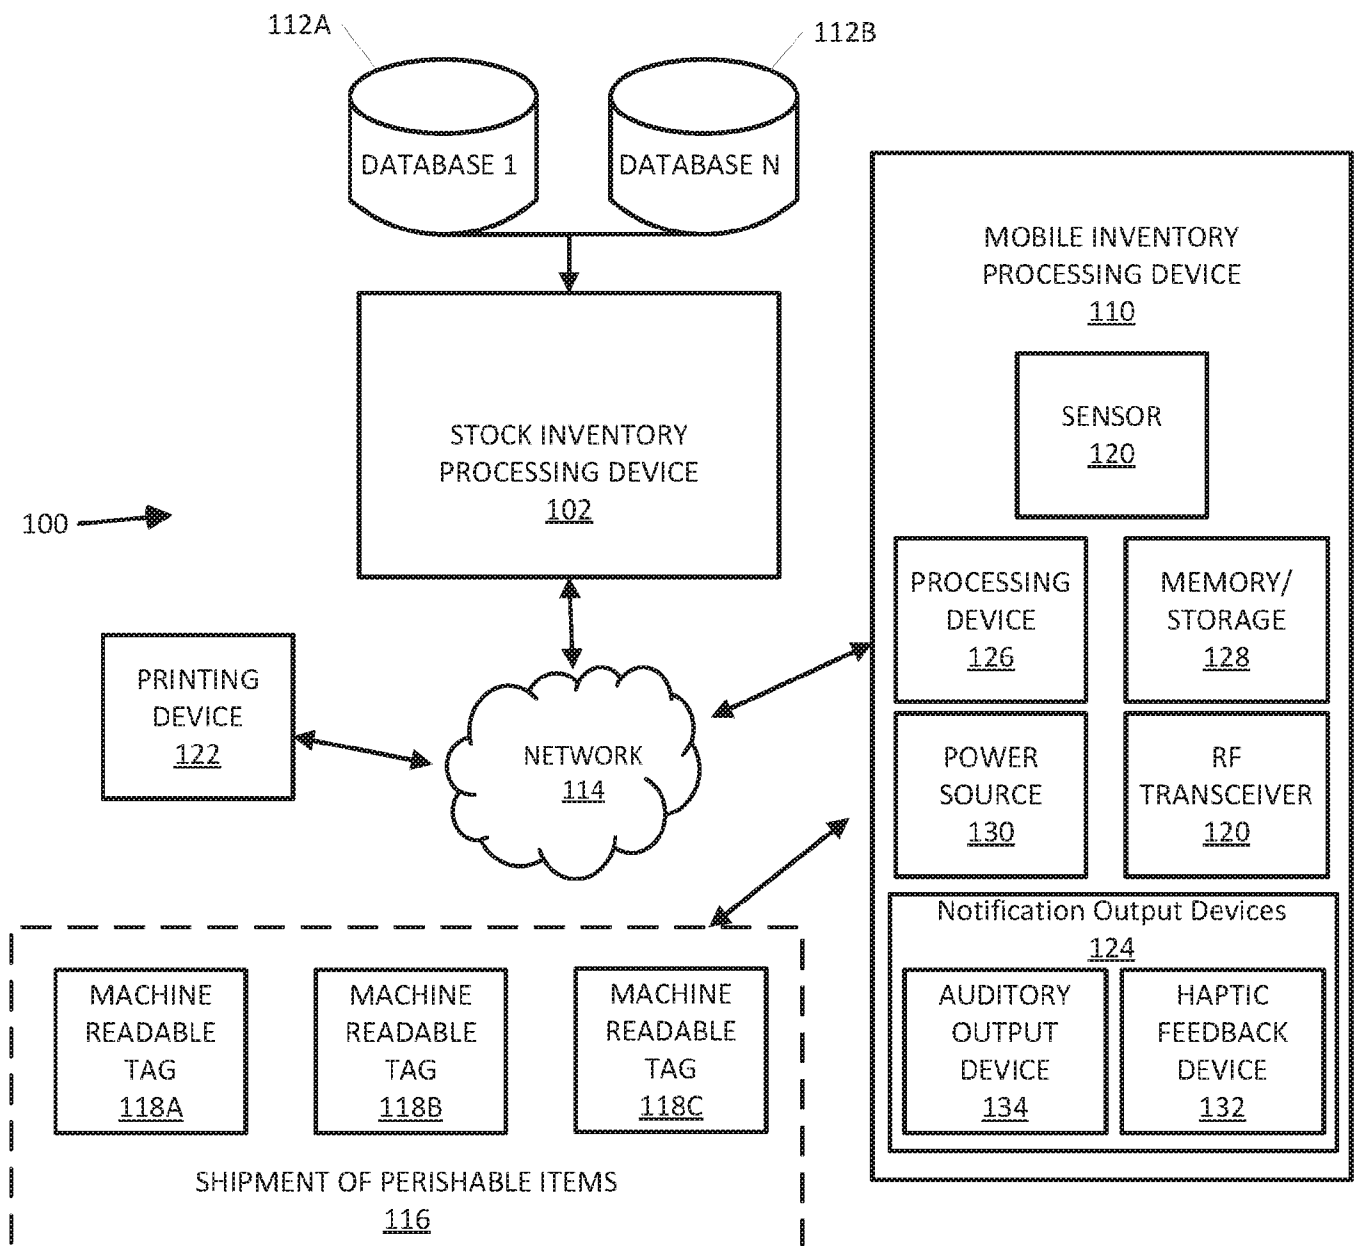


FIG. 1

2/4

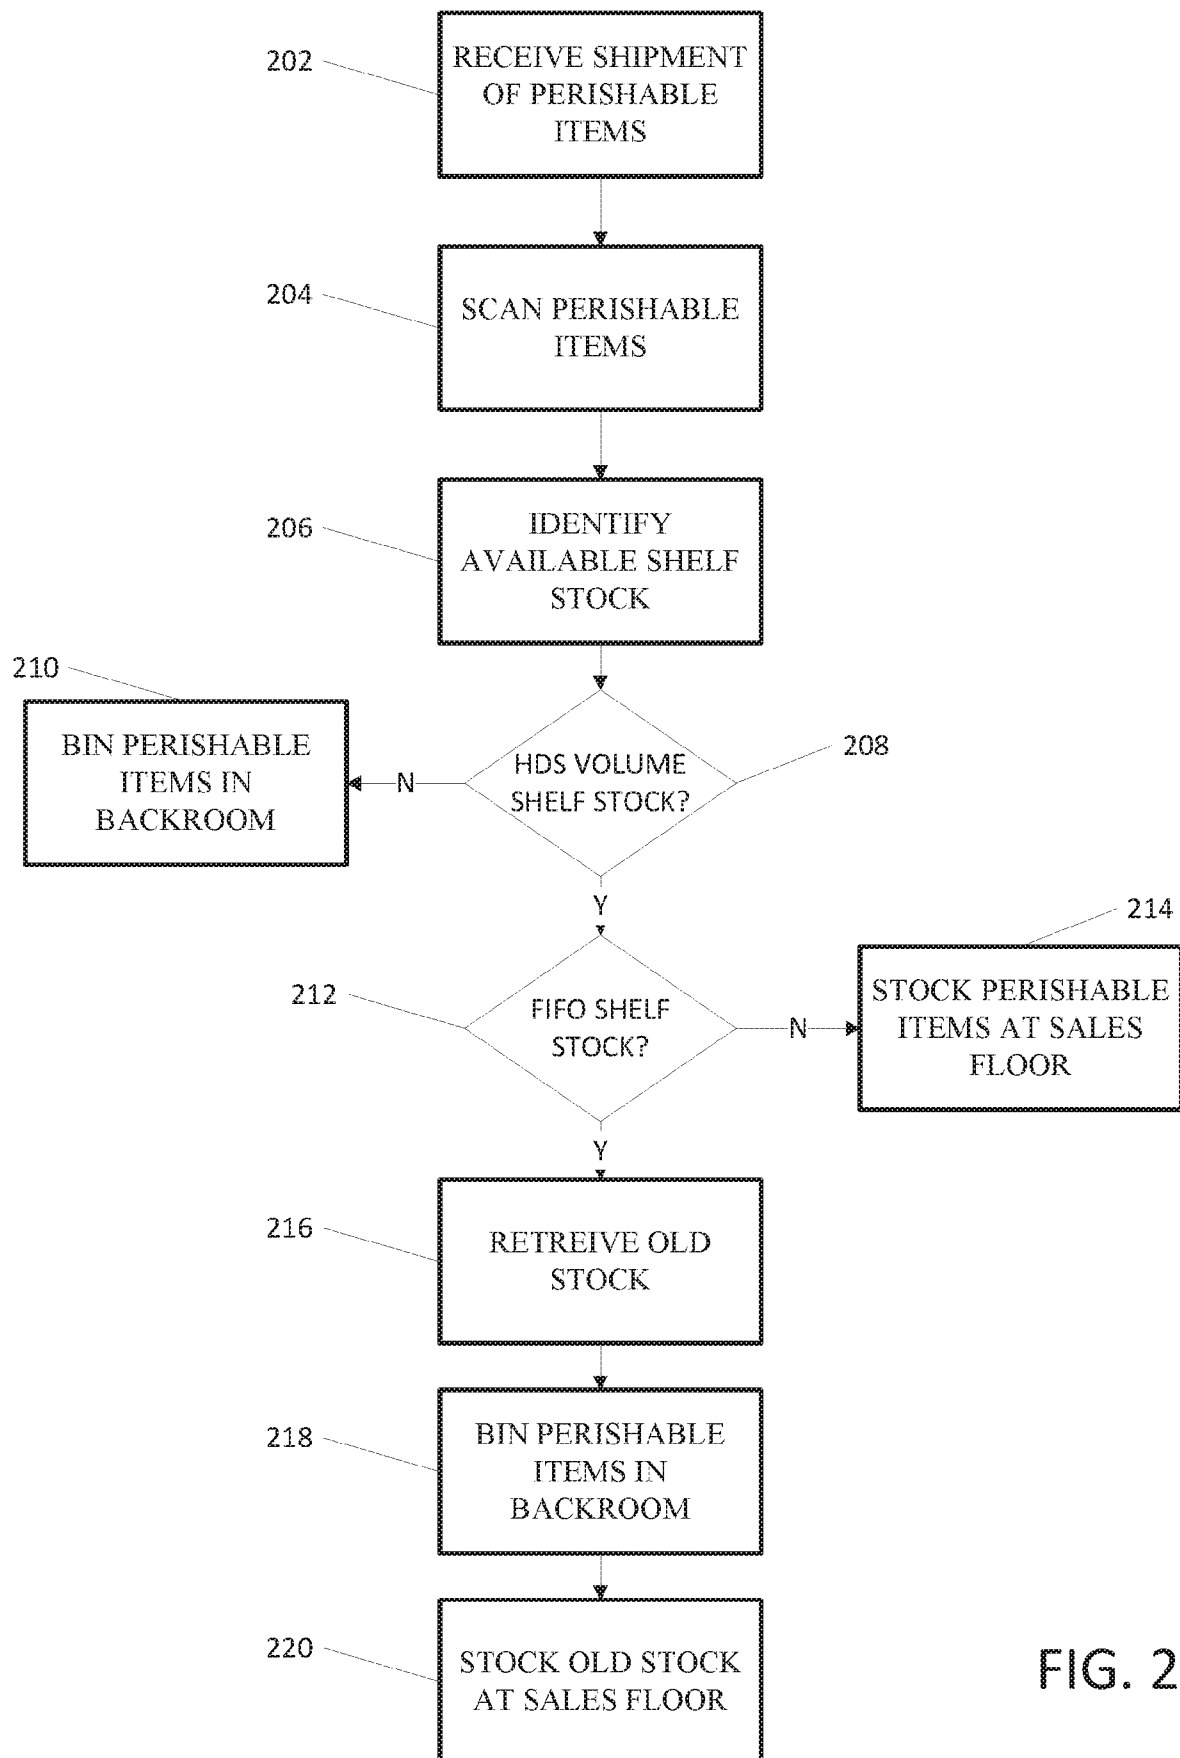


FIG. 2

3/4

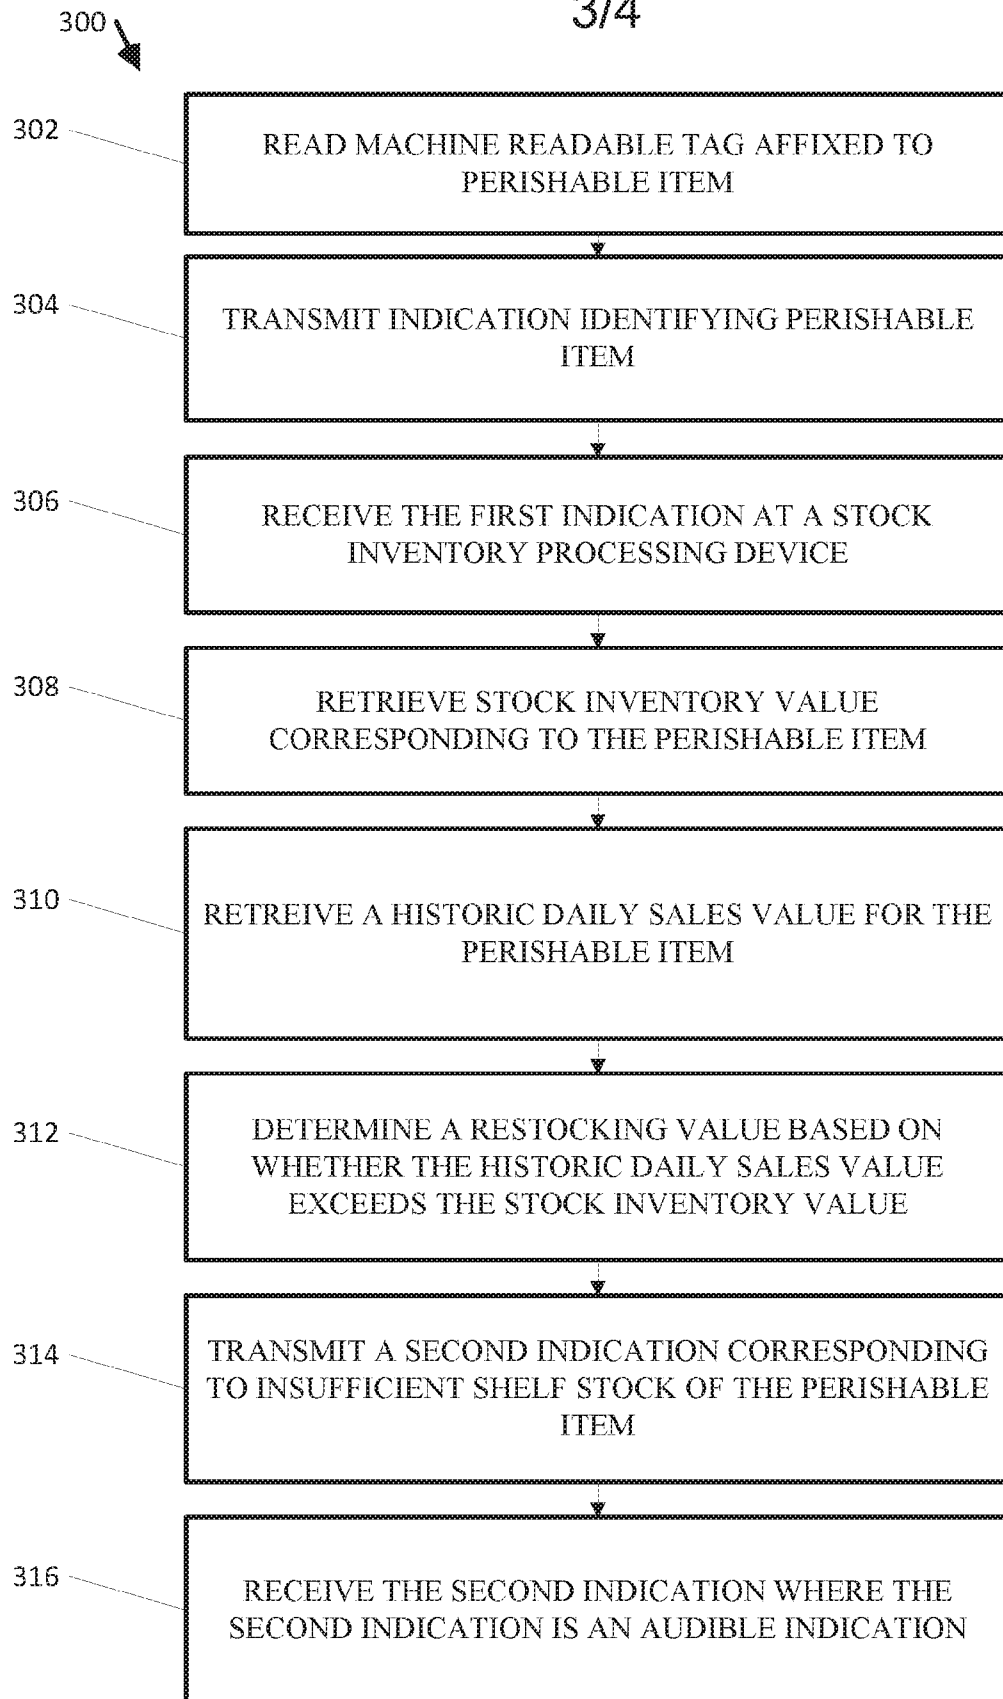


FIG. 3

4/4

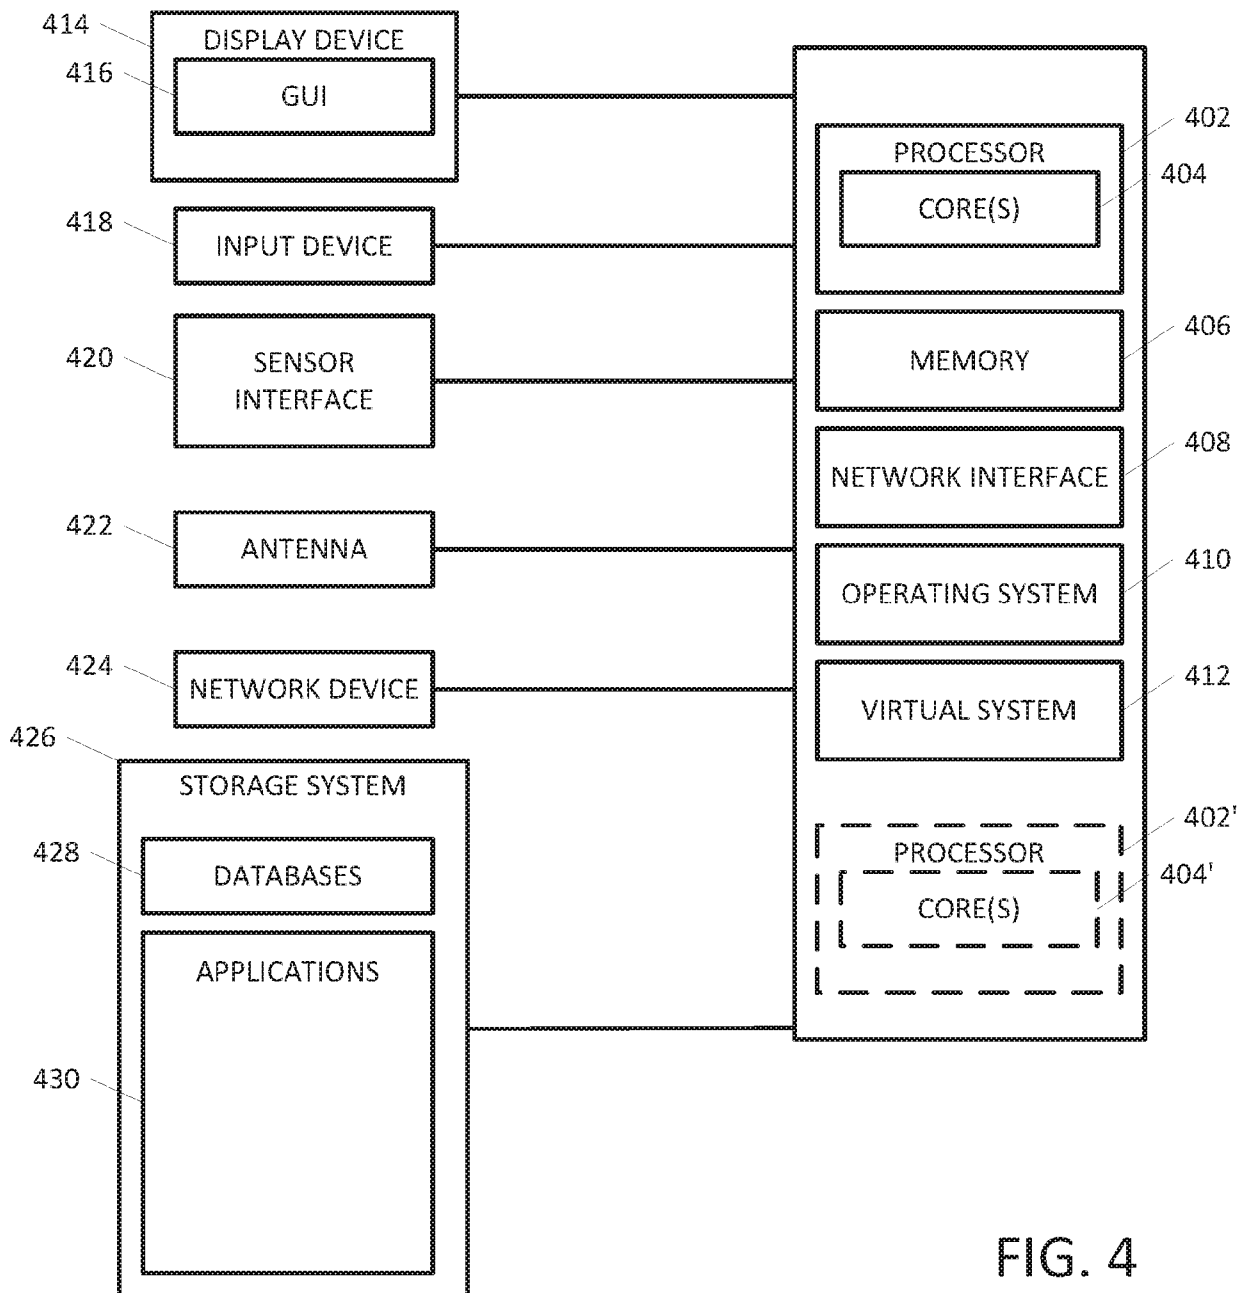


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 19/22214

A. CLASSIFICATION OF SUBJECT MATTER
IPC(8) - G06Q 10/00 (2019.01)
CPC - G06Q 10/087, G06Q 20/203, G06Q 10/08, G06Q 10/0875, G06Q 10/06, G06Q 30/06, G06Q 20/202, G06Q 10/0875, G06Q 30/04, G06Q 40/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005/0149414 A1 (Schrodt et al.) 07 July 2005 (07.07.2005) entire document (especially Abstract & para [0010]-[0013], [0058], [0059], [0069], [0070], [0083], [0093], [0094], [0101], [0107], Claim 42).	1-20
Y	US 2003/0216969 A1 (Bauer et al.) 20 November 2003 (20.11.2003) entire document (especially para [0041], [0059], [0090], [0094], [0096], [0098], [0111], [0193]).	1-20
A	US 2010/0049616 A1 (Hipsher) 25 February 2010 (25.02.2010) entire document.	1-20

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 2019 (25.04.2019)

Date of mailing of the international search report

29 MAY 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774