(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 March 2017 (16.03.2017)

WIPO | PCT

(10) International Publication Number
WO 2017/042800 A1

(51) International Patent Classification:
G08G 1/01 (2006.01) *G08G 1/095* (2006.01)
G08G 1/07 (2006.01) *G08G 1/0967* (2006.01)
G08G 1/08 (2006.01) *G08G 1/16* (2006.01)
G08G 1/09 (2006.01)

(21) International Application Number:
PCT/IL2016/050940

(22) International Filing Date:
28 August 2016 (28.08.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/215,320 8 September 2015 (08.09.2015) US

(71) Applicant: **OFER HOFMAN HOLDINGS LTD** [IL/IL]; P. O. Box 328, 3657600 Timrat (IL).

(72) Inventor: **HOFMAN, Ofer**; P. O. Box 328, 3657600 Timrat (IL).

(74) Agent: **BRONSTEIN, Rafi**; P. O. Box 1146, 4411000 Kfar Saba (IL).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: METHOD FOR TRAFFIC CONTROL

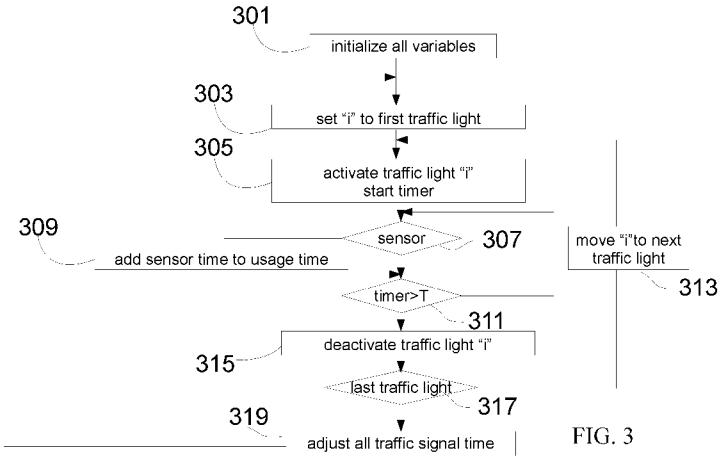


FIG. 3

(57) Abstract: Described is a method to optimize traffic light activity and minimize traffic congestion. Traffic conditions are monitored by sensors and a controller dynamically controls the green light time to account for traffic conditions and enhance the traffic flow. In one example, the green light time of each lane is reduced or increased according to traffic flow in the lane.

WO 2017/042800 A1

METHOD FOR TRAFFIC CONTROL

TECHNOLOGY FIELD

[001] The present method relates to the field of traffic control and in particular to dynamic algorithms for determining traffic lights sequences to reduce traffic congestion.

BACKGROUND

[002] Traffic light control is the most important and efficient method for controlling traffic in urban areas. There are three categories of traffic light control strategies: fixed-time control, traffic actuated control and traffic adaptive control. In fixed time control each traffic light has a predefined duration for allowing traffic to flow. The controller cycles between all the traffic signals. In this manner each lane gets a predefined duration of a green light and flow of traffic. As the rate of flow of traffic increases, the fixed time control may not provide the optimal division of time between the different lanes and traffic congestion may arise.

[003] A remedy to the inefficiencies of fixed time traffic light control is to measure the traffic flow and change the traffic light duration according to measured traffic flow. Examples of measuring traffic flow include; wire loops embedded in the road which generates a current when a car passes over them; pressure sensitive devices embedded in the road; acoustic devices to measure traffic flow; and image based systems to measure traffic flow. Examples of existing algorithms are given in CYBERNETICS AND INFORMATION TECHNOLOGIES, Volume 13, No 3 DOI: 10.2478/cait-2013-0029 and Self-Algorithm Traffic Light Controllers for Heavily Congested Urban Route, WSEAS TRANSACTIONS on CIRCUITS and SYSTEMS, Issue 4, Volume 11, April 2012.

[004] Existing solutions focus on the static measure of traffic. For example, a green traffic light is provided if the traffic sensor indicates the existence of a car in the relevant lane. To assess the amount of traffic in the lane these solutions require additional sensors which increases the cost of deployment and significantly increases

the cost of operation. The required computing resources for some algorithms are not supported by existing traffic light controllers, so a deployment of some systems requires an overhaul of the existing infrastructure. Furthermore, the cited examples which dynamically change the traffic light duration based on static measurements also change the cycle of the traffic signal. Changing the cycle of the traffic light disrupts the flow of traffic and induces congestion across the road system. In some examples of state of art solutions, the applied methods can only reduce the preplanned maximum time for each light. In one example, if 20 seconds are allocated for a green light than the state of art method will reduce the allocated time from 20 seconds to a smaller number. Hence this will shorten the allocated green time to a specific lane, without an increase in green light time to other lanes. The inability to increase the allocated green light time to more than 20 seconds results in traffic congestion as demonstrated in this example. Assuming traffic is congested and requires 23 seconds to pass through the junction. If only 20 seconds are allocated than the remaining 3 seconds of traffic would be stopped for next green light cycle. In the next green light cycle, there will now be 23 seconds of traffic plus the 3 seconds from the previous cycle. Thus the traffic flow is impeded and congestion arises rapidly.

[005] Hence an alternative algorithm is required. The desired algorithm should provide the following features:

[006] Can be implemented in the existing infrastructure of controllers and single sensor per lane.

[007] Maintains the traffic flow cycle to prevent disruption to traffic.

[008] In some examples, the proposed algorithm can also increase the allocated green time beyond the static allocated green time.

DESCRIPTION OF THE DRAWINGS

[009] FIG. 1 is an example of a road intersection with traffic signals and lane sensors;

[0010] FIG. 2. is an example of a graph of sensor signal over time;

[0011] FIG. 3 is an example of an algorithm for optimizing traffic light duration.

[0012] FIG. 4 is a block diagram of a circuit of the embodiment.

DESCRIPTION

[0013] This document describes an algorithm and method for optimizing traffic light duration in a desired direction/lane and which overcomes the deficiencies of existing algorithms and methods. FIG. 1 is an example of a traffic intersection. The intersection is the area where two or more roads intersect. Road (105) and road (107) are examples of roads which intersect. In one example the traffic flow through the intersection is controlled by traffic lights (101). The traffic light (101) directs the traffic through the use of pre-designated signals such as light colors, or light shape. The traffic light (101) lighting pattern is designed so that at any given time, the traffic emanating from one lane would not intersect with traffic emanating from another lane. In a further example, traffic sensors (103) register the passage of an automobile over the sensor. Examples of traffic sensors (103) include; induction loops which generate current when a metal body such as an automobile passes over the sensor; Pressure or shear sensors which measure the weight of deformation caused by the passage of an automobile; Acoustic sensors which sense the passage of an automobile; Or image sensors which record and analyze the flow of traffic.

[0014] FIG. 2 is an example of a graph of sensor signal over time. The “x” axis depicts the time, while the “y” axis depicts the sensor signal. In one example, when an automobile traverses the sensor, the sensor will emit a signal event (201) which corresponds to the time of traversal. The period of a green signal, the green light

time (203) is depicted as a dashed line. During the time the traffic light is green, several cars may traverse the sensor, hence FIG. 2 depicts several signal events (201), each signal event (201) corresponding to one automobile traversing the sensor. The "usage time" is defined as the sum of all signal events (201) in a lane. The "usage percentage" is defined as the "usage time" divided by the green light time (203).

[0015] FIG. 3 is an example of an algorithm for optimizing the traffic flow and which does not suffer from the deficiencies of state of art algorithms. Block (301) of the algorithm initializes all the variables required for the algorithm. Examples of variables include; a counter for the traffic lights (e.g. "i"); a timer; a green light time (203 in FIG. 2) for each traffic light. Block (303) sets the traffic light counter (e.g. "i") to the first traffic light. This facilitates the main loop to start the traffic light cycle. Block (305) activates the designated traffic light (e.g. traffic light "i"). In one example, the activation is composed of a sequence of lights leading from a red light to a green light. In addition block (305) starts a timer circuit 403 (FIG. 4). The timer circuit or timer is used to limit the green light in the traffic light to the green light time (203 in FIG. 2). Block (307) measures the traffic through the sensor which is relevant for the designated traffic light (e.g. traffic light "i"). If the sensor measurement is positive then block (309) adds the time the sensor is positive to the usage time. If the sensor measurement is zero, then no time is added to the usage time. Block (311) compares the timer time to the green light time (e.g., time on, 203 in FIG. 2) of the designated traffic light (e.g. traffic light "i"). If the elapsed time is shorter than the green light time (203 in FIG. 2), block (307) is executed and the sensor is measured. If the elapsed time is greater than the green light time (203 in FIG. 2) the designated traffic light (e.g. traffic light "i") is deactivated (block 315). In one example, the deactivation is a sequence of light signals starting with green light and ending with a red light. Block (317) checks if the active traffic light is the last of the traffic lights. If the active traffic light is not the last, the traffic light counter (e.g. "i") is changed to reflect the next designated traffic light (e.g. traffic light "i+1") (block 313). The

algorithm then executes the loop again for the next designated traffic light (e.g. traffic light "i+1"). If the active traffic light is the last traffic light in the sequence than block (319) is executed and the green light time (203 in FIG. 2) duration for each traffic light, is amended based on the usage time measurements.

[0016] In one example the usage time is changed by the following procedure. For the traffic light with the maximum usage percentage increase the green light time (203 in FIG. 2) by one unit. If there is more than one traffic light with the same usage percentage as the maximum usage percentage, than randomly choose one of the traffic lights with the maximum usage percentage. For the traffic light with the minimum usage percentage decrease the green light time (203 in FIG. 2) by one unit. If there is more than one traffic light with the same usage percentage as the minimum usage percentage, than randomly choose one of the traffic lights with the minimum usage percentage. The above described procedure ensures that the total green light time of all the traffic lights is constant, which maintains traffic flow across multiple intersections. One example of a time unit is one second. Another example of a time unit is 5 seconds.

[0017] In an additional example the usage time is changed by the following procedure. If the total duration of all green light is smaller than a predefined maximum total green light time than for the traffic light with the maximum usage percentage increase the green light time (203 in FIG. 2) by one unit. If there is more than one traffic light with the same usage percentage as the maximum usage percentage, than randomly choose one of the traffic lights with the maximum usage percentage. If the total duration of all green light is larger than a predefined minimum total green light time than for the traffic light with the minimum usage percentage decrease the green light time (203 in FIG. 2) by one unit. If there is more than one traffic light with the same usage percentage as the minimum usage percentage, than randomly choose one of the traffic lights with the minimum usage percentage. The above described procedure ensures that the total green light time of all the traffic lights is kept within the bounds defined by minimum total green light time and

maximum green light time. One example of a time unit is one second. Another example of a time unit is 2 seconds. One example of minimum total green light is 40 seconds. An example of maximum green light time is 120 seconds.

[0018] Hence one example is a method for controlling traffic signals comprising: a green light time for each traffic light; measuring usage percentage for each traffic light; increasing the green light time of the traffic light with maximum usage percentage; and reducing the green light time of the traffic light with minimum usage percentage. In another example above method is continuously repeated. In another example the increase in green light time is a fixed duration. In a further example the fixed duration is one second. In an alternative example the fixed duration is between one second to five seconds. In another example the reduction in green light time is a fixed duration. In an additional example the increase and reduction in green light time are equal and of a fixed duration. Another example is a method for controlling traffic signals comprising of; a total green light time; a maximal total green light time; a minimal total green light time; a green light time for each traffic light; measuring usage percentage for each traffic light; if the total green light time is smaller than the maximal green light time than increasing the green light time of the traffic light with maximum usage percentage; and if the total green light time is smaller than the maximal green light time than reducing the green light time of the traffic light with minimum usage percentage. In another example the method is continuously repeated. In another example the increase in green light time is a fixed duration. In another example the reduction in green light time is a fixed duration. In an additional example the increase and reduction in green light time are equal and of a fixed duration. In these examples a change in the green light time in one direction changes the ratio of green light time between the lanes.

[0019] In another example the traffic sensor is adapted to provide traffic usage. State of art traffic sensors provide an indication of traffic presence. For example an induction sensor will provide an electrical signal when a vehicle is above the induction loop. In this example, a timer or clock is added to the readout electronics

and the electrical output provides an indication of the ratio of the time that vehicles where present above the induction loop to the time that no vehicle was above the induction loop. In additional examples the inductor loop sensor can be replaced with any of; video sensor; acoustic sensor; pressure sensor; vibration sensor. In another example the electronic output is generated by an analog electronic circuit. In one example the output of the induction loop reading is connected to a capacitor and the output increases over time. A clock periodically samples the capacitor and resets the capacitor voltage. The sample output is the required traffic usage signal. In another example the electronic output can be implemented using a digital electronic circuit. The digital electronic circuit receives the sampled output of the induction loop sensor and the timer or clock signal and calculates the ratio of time the vehicles are over the induction loop compared to the time the sensors are not over the induction loop.

[0020] In another example the device for measuring traffic usage comprising of; a traffic sensor; wherein said sensor provides a signal when a vehicle is present in the vicinity of the sensor; a timer device; wherein said timer device provides an electrical signal at a fixed interval; and wherein the output signal of the device is proportional to the duration that a vehicle was present in the vicinity of the traffic sensor to the duration that no vehicle was present in the vicinity of the sensor. In a further example the device output is an analog signal. In a further example the device output is a digital signal.

[0021] In another example the method for controlling traffic signals comprises of; a total green light time; a maximal total green light time; a minimal total green light time; a green light time for each traffic light; measuring usage percentage for each traffic light; if the total green light time is smaller than the maximal green light time than increasing the green light time of the traffic light with maximum usage percentage; and if the total green light time is larger than the minimal green light time than reducing the green light time of the traffic light with minimum usage percentage.

[0022] The algorithm balances the usage for each green light by passing time units from the minimum used direction to the maximum used direction. The algorithm

changes only the green light duration plan of a traffic light junction, and does not change any other aspect of the junction control, thus do not impair safety of passengers in the junction. Common Traffic Light Junctions have one or more predefined green light duration plan which can change according to the time of the day. This algorithm manages and changes the plan continuously to find the plan that optimizes the traffic flow for any predefined green light duration.

[0023] The above described method can be implemented in a traffic intersection. In one example a traffic intersection comprising; two or more intersecting roads; two or more traffic lights; a traffic light controller executing a method for controlling traffic signals comprising: a green light time for each traffic light; measuring usage percentage for each traffic light; increasing the green light time of the traffic light with maximum usage percentage; and reducing the green light time of the traffic light with minimum usage percentage. In a further example the method for controlling traffic signals is continuously repeated. In a further example the increase in green light time is a fixed duration. In a further example the reduction in green light time is a fixed duration. In a further example the increase and reduction in green light time are equal and of a fixed duration.

[0024] The described algorithm expands on the state of art and resolves the deficiencies of existing solutions namely; the algorithm can be implemented in the existing infrastructure of controllers and single sensor per lane, and the algorithm maintains the traffic flow cycle to prevent disruption to traffic. It is clear that in the implementation of the apparatus and method, many modifications could be made to the system that carries out the described algorithm. It should be considered that all modifications and alterations of the system and algorithm are falling within the scope of this document.

[0025] With reference to FiG. 4, the operations and algorithms described herein can be implemented as executable code within a micro-controller 400 or control device having processor circuit 401, or stored on a standalone computer or machine readable non-transitory tangible storage medium that are completed based on execution of the

code by a processor circuit implemented using one or more integrated circuits. Example implementations of the disclosed circuits include hardware logic that is implemented in a logic array such as a programmable logic array (PLA), a field programmable gate array (FPGA), or by mask programming of integrated circuits such as an application-specific integrated circuit (ASIC). Any of these circuits also can be implemented using a software-based executable resource that is executed by a corresponding internal processor circuit such as a micro-processor circuit (not shown) and implemented using one or more integrated circuits, where execution of executable code stored in an internal memory circuit causes the integrated circuit(s) implementing the processor circuit to store application state variables in processor memory, creating an executable application resource (e.g., an application instance) that performs the operations of the circuit as described herein. Hence, use of the term "circuit" in this specification refers to both a hardware-based circuit implemented using one or more integrated circuits and that includes logic for performing the described operations, or a software-based circuit that includes a processor circuit (implemented using one or more integrated circuits), the processor circuit including a reserved portion of processor memory for storage of application state data and application variables that are modified by execution of the executable code by a processor circuit. A memory circuit 402 can be implemented, for example, using a non-volatile memory such as a programmable read only memory (PROM) or an EPROM, and/or a volatile memory such as a DRAM, etc. The micro-controller 400 can be considered to be part of the traffic light controller noted above that is operatively connected with the sensors 103 and the traffic lights 101.

What is claimed is:

1. A method for controlling traffic signals of traffic lights, each traffic light having a green light time, the method comprising the steps of:

measuring usage percentage for each traffic light;

increasing the green light time of the traffic light with maximum usage percentage;

reducing the green light time of the traffic light with minimum usage percentage; and

wherein the method is continuously repeated.

2. The method of claim 1, wherein the increasing the green light time is conducted with a fixed duration.

3. The method of claim 1, wherein the decreasing the green light time is conducted with a fixed duration.

4. The method of claim 1, wherein the increasing or reducing the green light time is conducted with equal and fixed duration.

5. A method for controlling traffic signals with traffic lights each having a green light time, a maximal total green light time; and a minimal total green light time, the method comprising the steps of:

measuring usage percentage for each traffic light;

if the total green light time is smaller than the maximal green light time than increasing the green light time of the traffic light with maximum usage percentage;

if the total green light time is larger than the minimal green light time than reducing the green light time of the traffic light with minimum usage percentage; and

wherein the method is continuously repeated.

6. The method of claim 5, wherein the increasing the green light time is conducted with a fixed duration.

7. The method of claim 5, wherein the decreasing the green light time is conducted with a fixed duration.

8. The method of claim 5, where the increasing or reducing the green light time is conducted with equal and fixed duration.

9. A device for measuring traffic usage comprising:

a traffic sensor constructed and arranged to provide a signal when a vehicle is present in a vicinity of the traffic sensor; and

a timer circuit constructed and arranged to provide an electrical signal at a fixed interval;

wherein an output signal of the timer circuit is proportional to duration that a vehicle was present in the vicinity of the traffic sensor to duration that no vehicle was present in the vicinity of the sensor.

10. The device of claim 9, wherein the output signal of the timer circuit is an analog signal.

11. The device of claim 9, wherein the output signal of the timer device is a digital signal.

12. A traffic intersection comprising;

two or more intersecting roads;

two or more traffic lights each having a green light time;

a traffic light controller constructed and arranged to control traffic signals by measuring usage percentage for each traffic light; increasing the green light time of the traffic light with maximum usage percentage; and reducing the green light time of the traffic light with minimum usage percentage.

13. The traffic intersection of claim 12, wherein the controller is constructed and arranged to conduct the increasing the green light time with a fixed duration.

14. The traffic intersection of claim 12, wherein the controller is constructed and arranged to conduct the decreasing the green light time with a fixed duration.

15. The traffic intersection of claim 12, wherein the controller is constructed and arranged to conduct the increasing or reducing the green light time with equal and fixed duration.

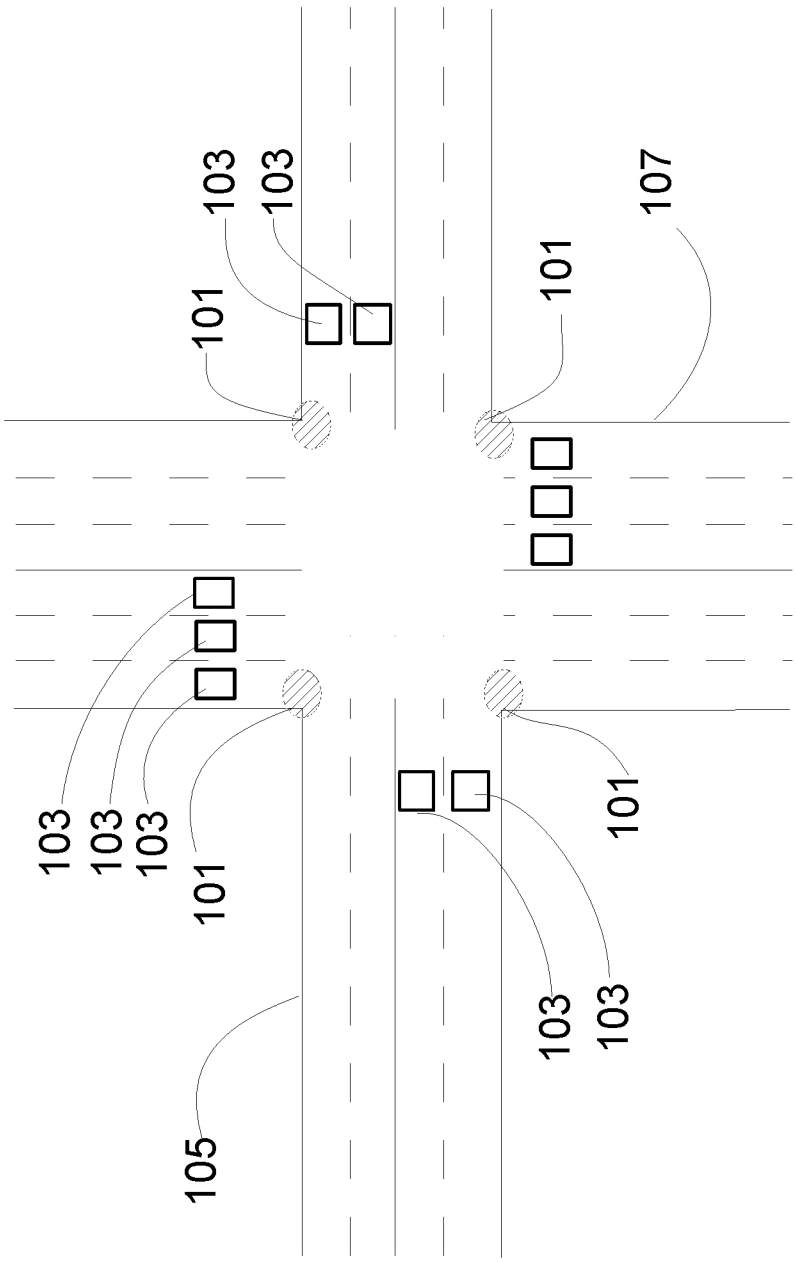


FIG. 1

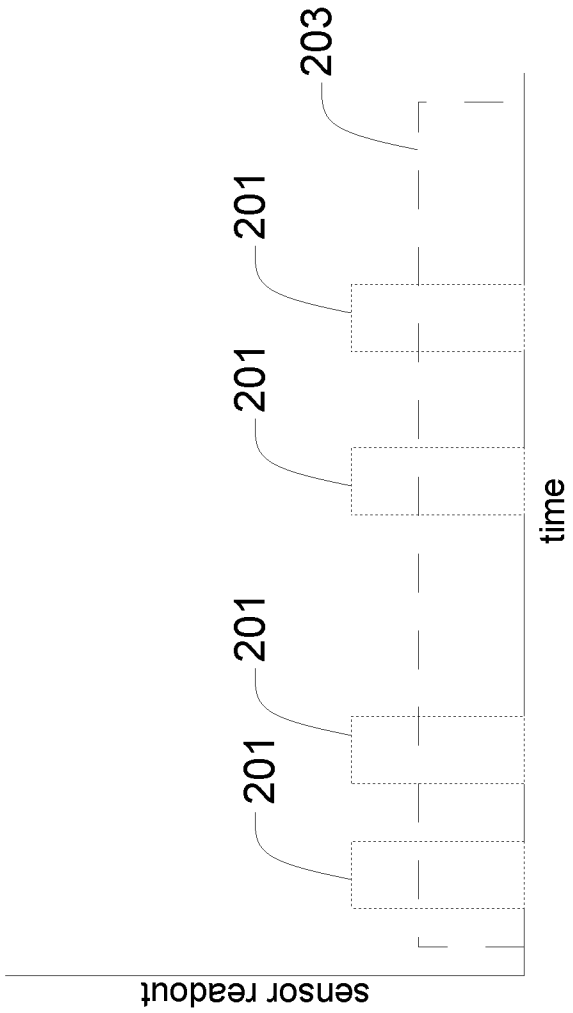


FIG. 2

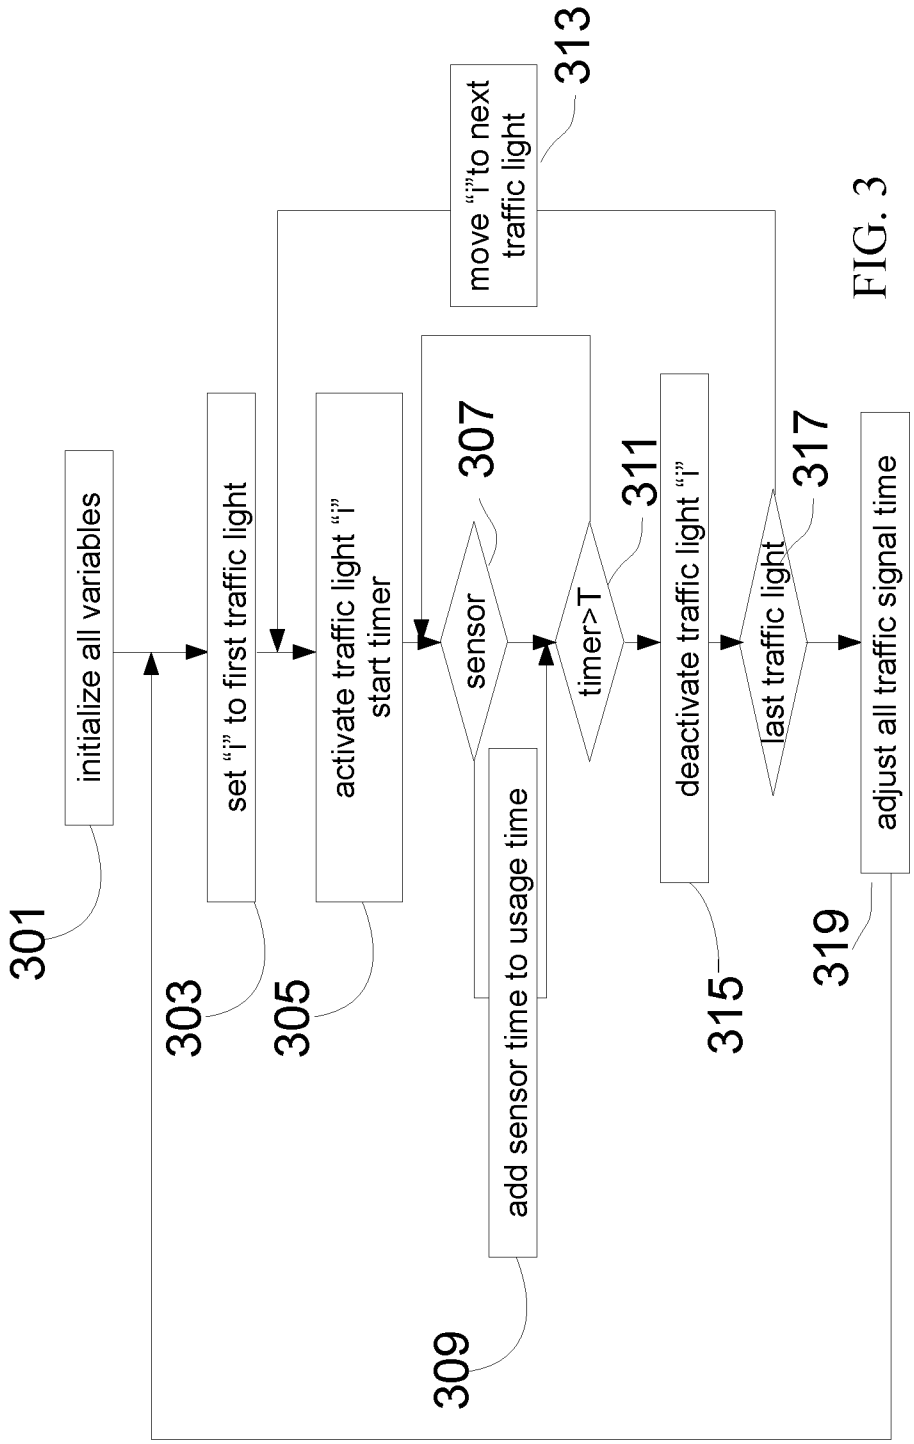

initialize all variables
301
set "i" to first traffic light
303
activate traffic light "i"
start timer
305
sensor
307
add sensor time to usage time
309
timer>T
311
deactivate traffic light "i"
315
last traffic light
317
move "i"to next traffic light
313
adjust all traffic signal time
319

FIG. 3

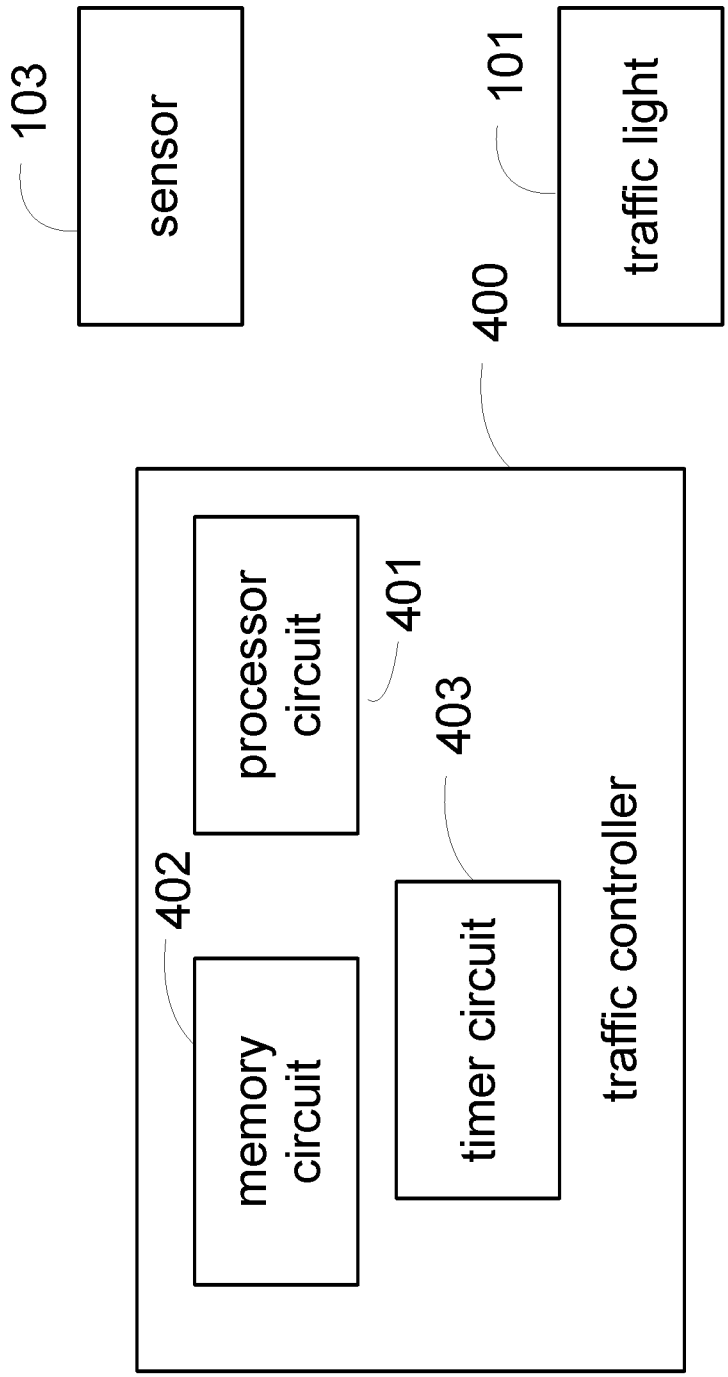

103
sensor
101
traffic light
400
processor circuit
401
403
402
memory circuit
timer circuit
traffic controller

FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IL16/50940

A. CLASSIFICATION OF SUBJECT MATTER
IPC(8) - G08G 1/01, 1/07, 1/08, 1/09, 1/095, 1/0967, 1/16 (2016.01)
CPC - G08G 1/01, 1/0104, 1/0125, 1/0183, 1/02, 1/096
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC(8): G08G 1/01, 1/07, 1/08, 1/09, 1/095, 1/0967, 1/16 (2016.01); CPC: G08G 1/01, 1/0104, 1/0125, 1/0183, 1/02, 1/04, 1/042, 1/07, 1/08, 1/081, 1/087, 1/095, 1/096, 1/096716, 1/096725, 1/096741, 1/096758, 1/096775, 1/096783, 1/096791, 1/164, 1/166

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, Other Countries (INPADOC), RU, AT, CH, TH, BR, PH);
Google/Google Scholar; IEEE/IEEEXplore; EBSCO Non-Patent Prior Art Source
KEYWORDS: traffic signal, traffic light, control, monitor, green, stop, duration, percent utilization, intersection, sensor, induction loop

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 2013/0300583 A1 (WIGNOT, L et al.) 14 November 2013; abstract; paragraphs [0016]-[0017], [0019]-[0024], [0026]-[0027], [0033], [0082], [0088]	1, 5, 9, 12 --- 2-4, 6-8, 10, 11, 13-15
Y	US 2005/0046597 A1 (HUTCHISON, M et al.) 03 March 2005; abstract; paragraphs [0016], [0055]-[0056], [0073], [0075]-[0076]	2-4, 6-8, 10, 11, 13-15
A	US 2011/0288758 A1 (PAOLINI, M et al.) 24 November 2011; entire document	1-15

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
06 December 2016 (06.12.2016)	29 DEC 2016
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-8300	Authorized officer Shane Thomas PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774