



(22) Date de dépôt/Filing Date: 2004/02/09

(41) Mise à la disp. pub./Open to Public Insp.: 2005/06/09

(30) Priorité/Priority: 2003/12/09 (2003-88951) KR

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> B24D 18/00, B24D 13/00, B24D 11/00


(71) Demandeur/Applicant:  
SUNTEK INDUSTRIES LTD., KR

(72) Inventeur/Inventor:  
KIM, YONG BUM, KR

(74) Agent: CASSAN MACLEAN

(54) Titre : METHODE DE PREPARATION DE DISQUES A ABRASIF APPLIQUE

(54) Title: PREPARATION OF COATED ABRASIVE DISK

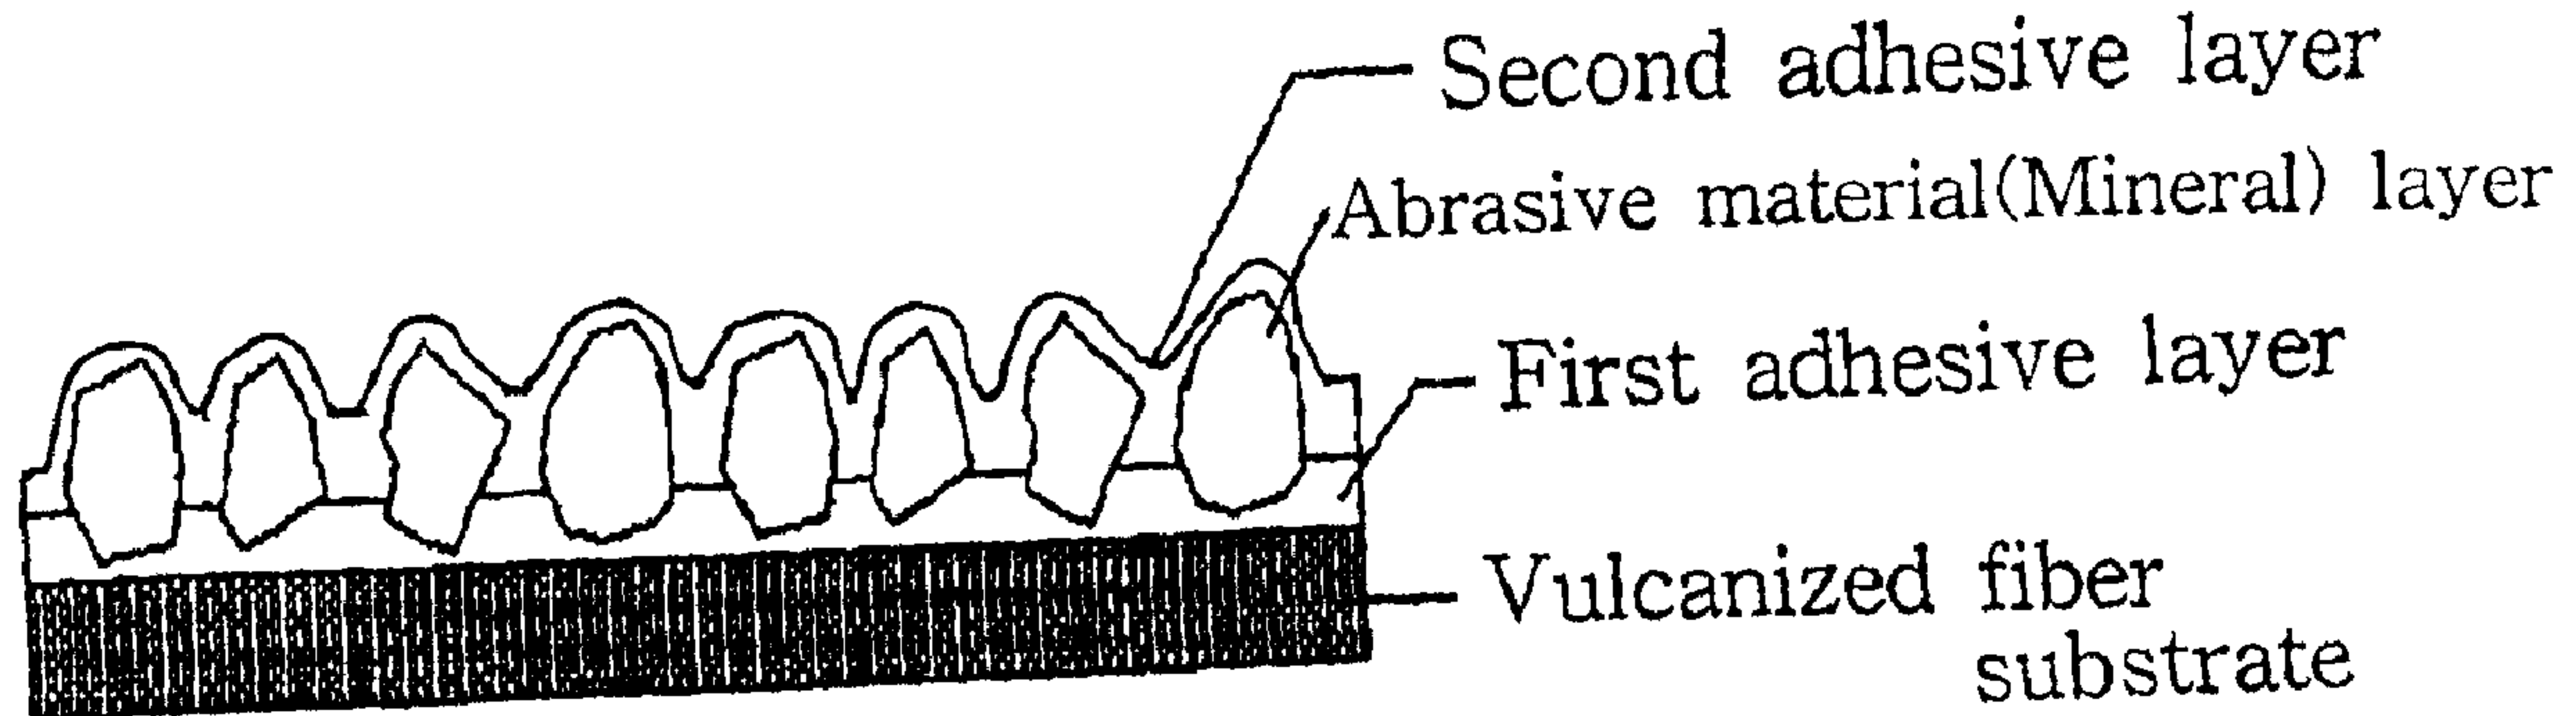

(57) Abrégé/Abstract:

A coated abrasive disk having an improved dimensional stability and high breaking strength is prepared by combining a supporting substrate and a coated abrasive body comprised of a backsheet and a layer of a coated abrasive material thereon.



## **ABSTRACT**

A coated abrasive disk having an improved dimensional stability and high breaking strength is prepared by combining a supporting substrate and a coated abrasive body comprised of a backsheet and a layer of a coated abrasive material thereon.

## PREPARATION OF COATED ABRASIVE DISK

### FIELD OF THE INVENTION

5           The present invention relates to a method for preparing a coated abrasive disk having an improved dimensional stability and high breaking strength.

### BACKGROUND OF THE INVENTION

10

Conventional coated abrasive disks comprising a vulcanized fiber substrate shown in FIG. 1 are prepared by coating an adhesive resin on the vulcanized fiber substrate to form a first adhesive layer, spreading a layer of an abrasive material thereon, pre-drying, coating the abrasive layer with a  
15 second layer of an adhesive resin and drying the coated layer.

Such a method to form directly on a substrate an abrasive body comprised of a first adhesive layer, an abrasive material layer and a second adhesive layer, however, has a problem in that the shape of the substrate may become distorted by heat during the drying process of the abrasive layer,  
20 resulting in a poor product quality. In addition, this method requires a post-treatment, i.e., humidification, step to impart dimensional stability to the final abrasive disk.

### SUMMARY OF THE INVENTION

25

Accordingly, it is a primary object of the present invention to provide a simple method for preparing a coated abrasive disk that obviates a

humidification treatment of the final product; and a coated abrasive disk prepared by said method, which has an improved dimensional stability, high elasticity and high breaking strength.

In accordance with the present invention, there are provided a  
5 method for preparing a coated abrasive disk which comprises preparing a disk form of a supporting substrate; preparing a disk form of a coated abrasive body comprised of a backsheet and a layer of an abrasive material thereon; and combining the supporting substrate and the coated abrasive  
10 body such that the backsheet of the coated abrasive body is bonded to the substrate by using an adhesive; and a coated abrasive disk which has a structure comprising a supporting substrate, an adhesive layer, a backsheet and a coated abrasive layer which are sequentially stacked.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

15

The above and other objects and features of the present invention will become apparent from the following description of the invention, when taken in conjunction with the accompanying drawings, which respectively show:

FIG. 1: a schematic diagram of a conventional coated abrasive disk;

20 FIG. 2: a schematic diagram of a coated abrasive disk in accordance with the present invention;

FIG. 3: a schematic diagram of a roll coater for coating an adhesive on a substrate; and

25 FIG. 4: a longitudinal cross-sectional view of a textile layer composed of a laminate of glass and carbon fiber textiles.

## **DETAILED DESCRIPTION OF THE INVENTION**

The inventive method for preparing a coated abrasive disk employs a laminating technique of binding a coated abrasive body comprised of a  
5 backsheet and a coated abrasive layer to a supporting substrate; and the resulting coated abrasive disk is further illustrated in FIG. 2.

The supporting substrates which may be employed in the present invention include engineering plastics, bakelite (cotton fibers impregnation-treated with a phenol resin) plates, and a laminate of a nonwoven fabric and  
10 at least one textile selected from the group consisting of glass fiber, carbon fiber, polyester and nylon textile, which are commercially available.

The laminate of a nonwoven fabric and at least one textile may be prepared by placing the nonwoven fabric and said at least one textile in order into a mold heated at a temperature ranging from 120 to 170°C, and then  
15 applying a pressure of 5 to 7 kgf/cm<sup>2</sup> thereto for 6 to 10 hrs. The respective nonwoven fabric and textile may be pre-cut in the form of a disk.

The textile may be made of fibers impregnation-treated with a phenol resin, an acrylonitrile-butadiene-rubber latex or a mixture thereof. Preferably, the carbon fiber and glass fiber textiles are made of fibers  
20 impregnation-treated with a phenol resin, and the polyester and nylon textiles are made of fibers impregnation-treated with a mixture of a phenol resin and an acrylonitrile-butadiene-rubber latex, e.g., fibers obtained by impregnating polyester or nylon with a mixture of 70 to 90 weight% of a phenol resin and 10 to 30 weight% of an acrylonitrile-butadiene-rubber latex, and drying the  
25 impregnated polyester or nylon.

The carbon fiber textile and the reticular glass fiber textile are made of 48~70s/yarn × 25~30s/yarn (Warp × Fill) and 5~16s/yarn × 5~16s/yarn

(Warp×Fill) fibers, respectively. In addition, the polyester and nylon textiles are both made of 5~16s/yarn ×5~16s/yarn (Warp×Fill) fibers.

Engineering plastics and bakelite plates may be prepared by conventional methods known in the art.

5 The supporting substrate has a thickness ranging from 1.0 to 1.5mm. In case of employing a laminate of nonwoven fabric and textile layers, it is preferred that the nonwoven fabric and textile layers have the respective thickness of 0.1 to 0.3mm and 0.9 to 1.2mm.

The coated abrasive disk in accordance with the present invention is  
10 manufactured by coating an adhesive on a disk form of the supporting substrate (in case of employing a laminate of nonwoven fabric and textile layers, on the textile layer), adhering thereto a disk form of a coated abrasive body comprised of a backsheet and a layer of a coated abrasive material thereon, and aging at a temperature ranging from 20 to 40°C for 1 to 2 days.

15 Suitable for the adhesive used for combining the supporting substrate and the coated abrasive body are epoxy resins, polyurethane resins, synthetic rubber and degenerated heat-curable resins.

The coated abrasive body which may be employed in the present invention is prepared by a method described below. First, a backsheet may  
20 be prepared by coating an adhesive, e.g., a phenol resin, an acrylonitrile-butadiene-rubber latex and a mixture thereof, on both sides of a material selected from the group consisting of polyester textile, cotton textile, polyester/cotton mixed textile (e.g., polyester yarn:cotton yarn=65:35, 50:50), polyester/nylon mixed textile (e.g., polyester yarn:nylon=50:50), polyester  
25 film (PET film) and cylinder paper. Then, a coated abrasive body may be prepared by coating a first adhesive mixture on the prepared backsheet, spreading an abrasive material thereon, drying at a temperature ranging from

60 to 110°C for 1 to 3 hrs, coating and drying a second adhesive mixture thereon at a temperature ranging from 70 to 120°C for 150 to 240 min to form a second adhesive layer, and cutting the coated abrasive body in a desired disk form.

5           The first and second adhesive mixtures are mixtures of an adhesive and a filler having a weight mix ratio of 50:50 and 40:60, respectively, and may be coated by a conventional method and, if necessary, roll-coated. The adhesive may be a conventional adhesive such as a phenol resin; and a conventional inorganic filler such as CaCO<sub>3</sub> may be employed.

10           Representative abrasive materials which may be employed in the present invention include alumina (Al<sub>2</sub>O<sub>3</sub>), silicon carbide (SiC), alumina zirconia (AZ), ceramics, diamond, CBN (cubic boron nitrile) and a mixture thereof. Such an abrasive material preferably has a particle size of 16 to 180 mesh and may be dispersed on the first adhesive layer by a conventional  
15 electric or dropping coating method.

The inventive abrasive disk may be made in a commercially desirable disk form, e.g., 4", 4+1/2", 5" and 7".

The following Examples and Comparative Example are given for the purpose of illustration only, and are not intended to limit the scope of the  
20 invention.

#### Example 1

Cut into a disk form having an outer diameter of 180mm and an inner diameter of 23mm were a 20 to 30 g/m<sup>2</sup> nonwoven fabric (polyester  
25 nonfabric commercially available from Kolon); two carbon fiber textiles (commercially available from Korea Fiber Company) composed of 58s/yarn × 30s/yarn (Warp × Fill) fibers impregnation-treated with Novolak phenol

resin; and two reticular glass fiber textiles (commercially available from Korea Fiber Company) composed of 8s/yarn  $\times$  8s/yarn (Warp  $\times$  Fill) fibers impregnation-treated with Novolak phenol resin. The nonwoven fabric, carbon fiber textile and glass fiber textile disks were sequentially stacked from the bottom in a mold heated to 150°C, while a steel holder for fixing a disk to a tool was inserted within the inner diameter, and pressed at a force of 6.0 kgf/cm<sup>2</sup>, to prepare a supporting substrate.

Then, a backsheet was prepared by processing a polyester film (PET film) and coating a phenol resin adhesive compounded with rubber on the both sides thereof. On the backsheet, a 50:50 (weight ratio) mixture of a phenol resin and CaCO<sub>3</sub> was coated in an amount of 250 g/m<sup>2</sup>, alumina particles having a particle size of 24 mesh were spread in an amount of 900 g/m<sup>2</sup>, and dried at a temperature of 90 to 95°C for 2 hrs to form a first adhesive layer having the abrasive material dispersed therein. A 40:60 (weight ratio) mixture of a phenol resin and CaCO<sub>3</sub> was coated thereon in an amount of 500 g/m<sup>2</sup>, and dried at a temperature of 90 to 95°C for 4 hrs to form a second adhesive layer. The coating of the first and second adhesive layers was performed by a roll coater shown in FIG. 3.

The prepared coated abrasive body was cut into a disk form having an outer diameter of 180mm and an inner diameter of 23mm. A polyurethane resin having a molecular weight of 15,000 to 20,000 and a viscosity of 3,000 to 5,000 cps was coated in an amount of 90 to 125 g/m<sup>2</sup> on the glass fiber textile layer surface of the substrate, left for 5 min, and the substrate was combined with the backsheet of the cut coated abrasive body. The combined unit was aged and hardened at a room temperature for 2 days to thereby yield the coated abrasive disk in accordance with the present invention. No separate post-treatment of humidification was performed.

A longitudinal cross-sectional view of the textile layer, a laminate of two carbon fiber textiles and two glass fiber textiles is shown in FIG. 4.

### Example 2

5 Cut into a disk form having an outer diameter of 180mm and an inner diameter of 23mm were a 20 to 30 g/m<sup>2</sup> nonwoven fabric (polyester nonfabric commercially available from Kolon) and five carbon fiber textiles (commercially available from Korea Fiber Company) composed of 48s/yarn × 25s/yarn (Warp × Fill) fibers impregnation-treated with Novolak phenol  
10 resin. The nonwoven fabric and carbon fiber textile disks were sequentially stacked from the bottom into a mold heated to 150 °C, while a steel holder for fixing a disk to a tool was inserted within the inner diameter, and pressed at a force of 6.0 kgf/cm<sup>2</sup>, to prepare a supporting substrate. Thereafter, the procedure of Example 1 was repeated to prepare the inventive coated  
15 abrasive disk.

### Example 3

Cut into a disk form having an outer diameter of 180mm and an inner diameter of 23mm were a 20 to 30 g/m<sup>2</sup> nonwoven fabric (polyester  
20 nonfabric commercially available from Kolon) and six reticular glass fiber textiles (commercially available from Korea Fiber Company) composed of 10s/yarn × 10s/yarn (Warp × Fill) fibers impregnation-treated with Novolak phenol resin. The nonwoven fabric and glass fiber textile disks were sequentially stacked from the bottom into a mold heated to 150 °C, while a  
25 steel holder for fixing a disk to a tool was inserted within the inner diameter, and pressed at a force of 6.0 kgf/cm<sup>2</sup>, to prepare a supporting substrate. Thereafter, the procedure of Example 1 was repeated to prepare the inventive

coated abrasive disk.

#### Example 4

A 1.5mm thick injection-molded engineering plastic (Type LUPOS  
5 GP-2200H, commercially available from LG Chem.) was cut into a disk  
form having an outer diameter of 180mm and an inner diameter of 23mm,  
which was used as a supporting substrate. Thereafter, the procedure of  
Example 1 was repeated to prepare the inventive coated abrasive disk.

#### 10 Example 5

A 1.5mm thick bakelite plate (commercially available from Korea  
Fiber Company) was cut into a disk form having an outer diameter of  
180mm and an inner diameter of 23mm, which was used as a supporting  
substrate. Thereafter, the procedure of Example 1 was repeated to prepare  
15 the inventive coated abrasive disk.

#### Comparative Example

A 0.85mm thick vulcanized fiber substrate (GBR 0.85mm,  
commercially available from Toyo Fiber Company, Japan) was cut into a  
20 disk form having an outer diameter of 180mm and an inner diameter of  
23mm. A first adhesive layer having an abrasive material dispersed therein  
and a second adhesive layer were formed directly on the cut substrate in  
accordance with the same method as in Example 1. Then, water was spread  
on the substrate surface with a brush and left for 7 days within an aging room  
25 kept at a temperature ranging from 25 to 30°C and a relative humidity  
ranging from 70 to 80%, to prepare the conventional coated abrasive disk.



specific embodiments, it should be recognized that various modifications and changes may be made to the invention by those skilled in the art which also fall within the scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS :**

1. A method for preparing a coated abrasive disk which comprises preparing a disk form of a supporting substrate; preparing a disk form of a  
5 coated abrasive body comprised of a backsheet and a layer of an abrasive material thereon; and combining the supporting substrate and the coated abrasive body such that the backsheet of the coated abrasive body is bonded to the substrate by using an adhesive.
- 10 2. The method of claim 1, wherein the coated abrasive body is prepared by coating a first adhesive mixture on the backsheet, spreading an abrasive material thereon, drying the first adhesive layer having the abrasive material dispersed therein, coating a second adhesive mixture thereon and drying the second adhesive layer.
- 15 3. The method of claim 1, wherein the backsheet is a processed material selected from the group consisting of polyester textile, cotton textile, polyester/cotton mixed textile, polyester/nylon mixed textile, polyester film (PET film) and cylinder paper.
- 20 4. The method of claim 1, wherein the abrasive material is selected from the group consisting of alumina ( $Al_2O_3$ ), silicon carbide (SiC), alumina zirconia (AZ), ceramics, diamond, CBN (cubic boron nitrile) and a mixture thereof.
- 25 5. The method of claim 1, wherein the adhesive is selected from the group consisting of epoxy resin, polyurethane resin, synthetic rubber, degenerated

heat-curable resin and a mixture thereof.

6. The method of claim 1, wherein the supporting substrate is selected from the group consisting of an engineering plastic, bakelite plate, and a laminate  
5 of a nonwoven fabric and at least one textile selected from the group consisting of glass fiber, carbon fiber, polyester and nylon textile.

7. The method of claim 6, wherein the laminate of a nonwoven fabric and at least one textile is prepared by placing a disk form of said at least one  
10 textile on a disk form of the nonwoven fabric and applying a pressure of 5 to 7 kgf/cm<sup>2</sup> thereto at a temperature ranging from 120 to 170 °C.

8. The method of claim 6, wherein the textile is made of fibers impregnation-treated with a phenol resin, an acrylonitrile-butadiene-rubber  
15 latex or a mixture thereof.

9. The method of claim 6, wherein the textile is a laminate of carbon and glass fiber textiles prepared by stacking at least one carbon fiber textile and at least one glass fiber textile in order.

20

10. A coated abrasive disk which is prepared by the method of claim 1.

FIG. 1

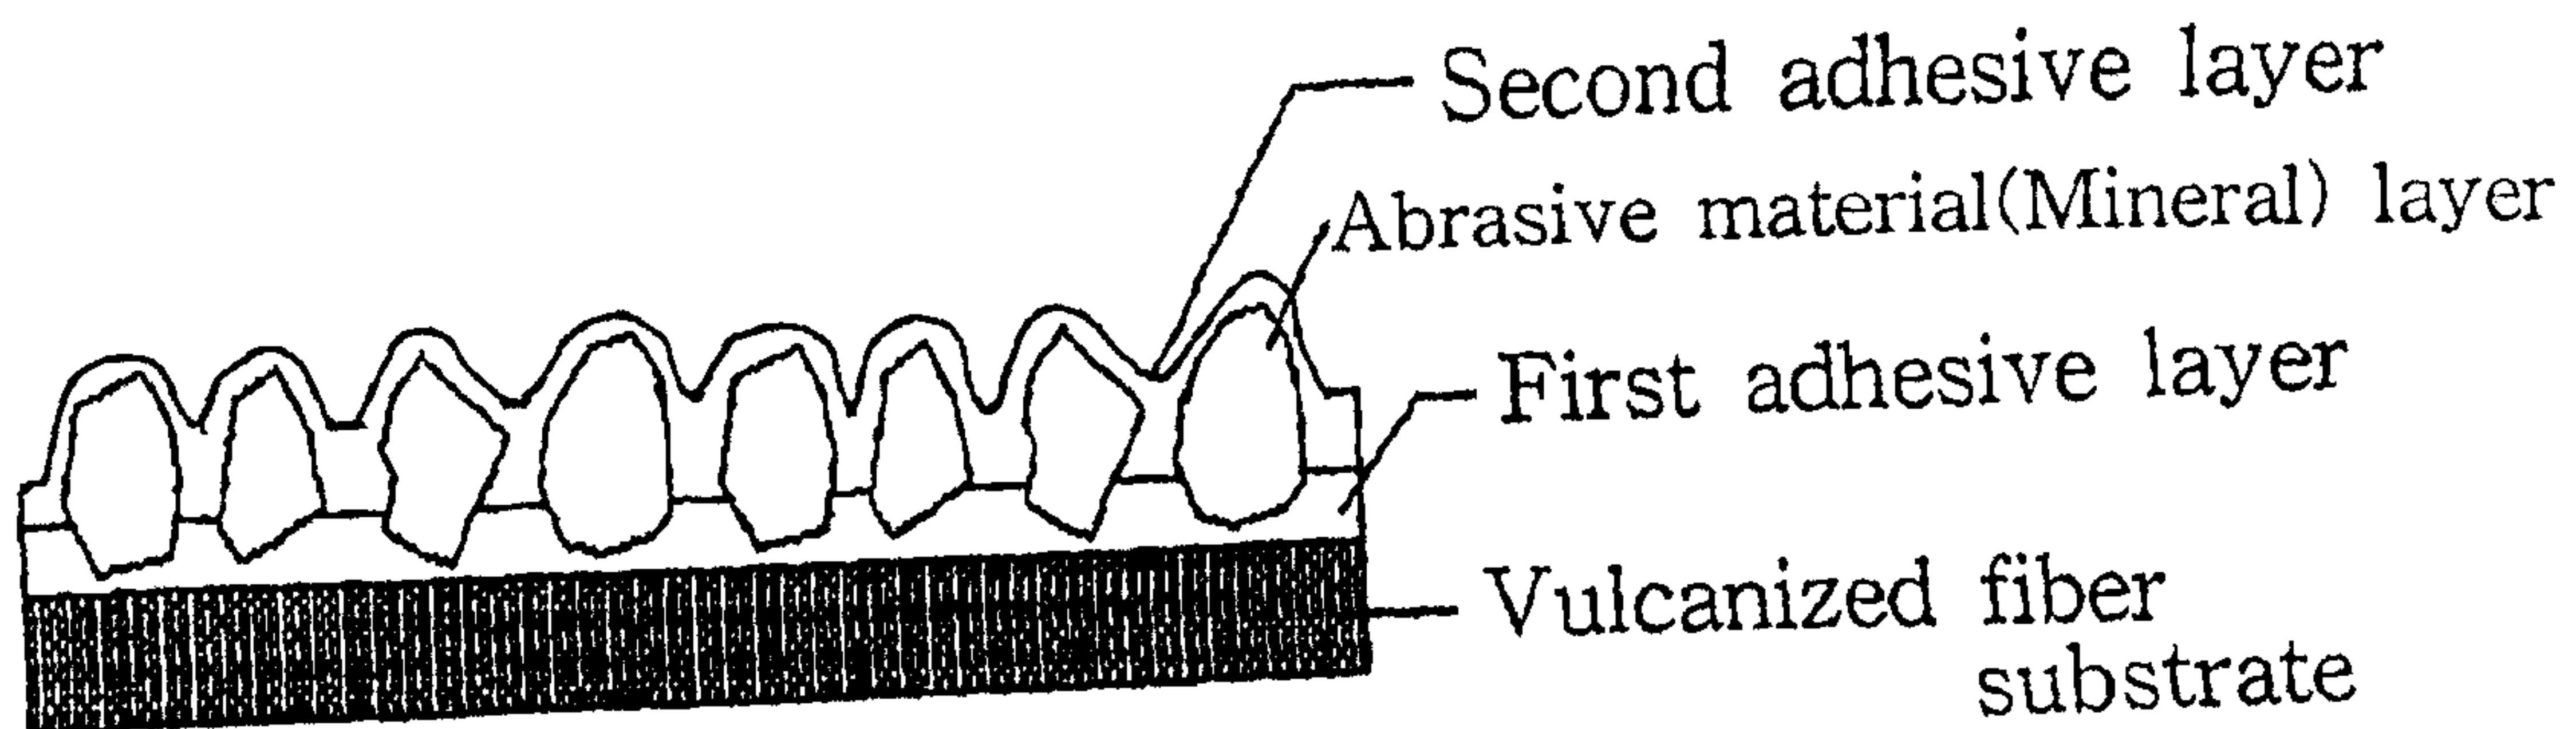


FIG. 2

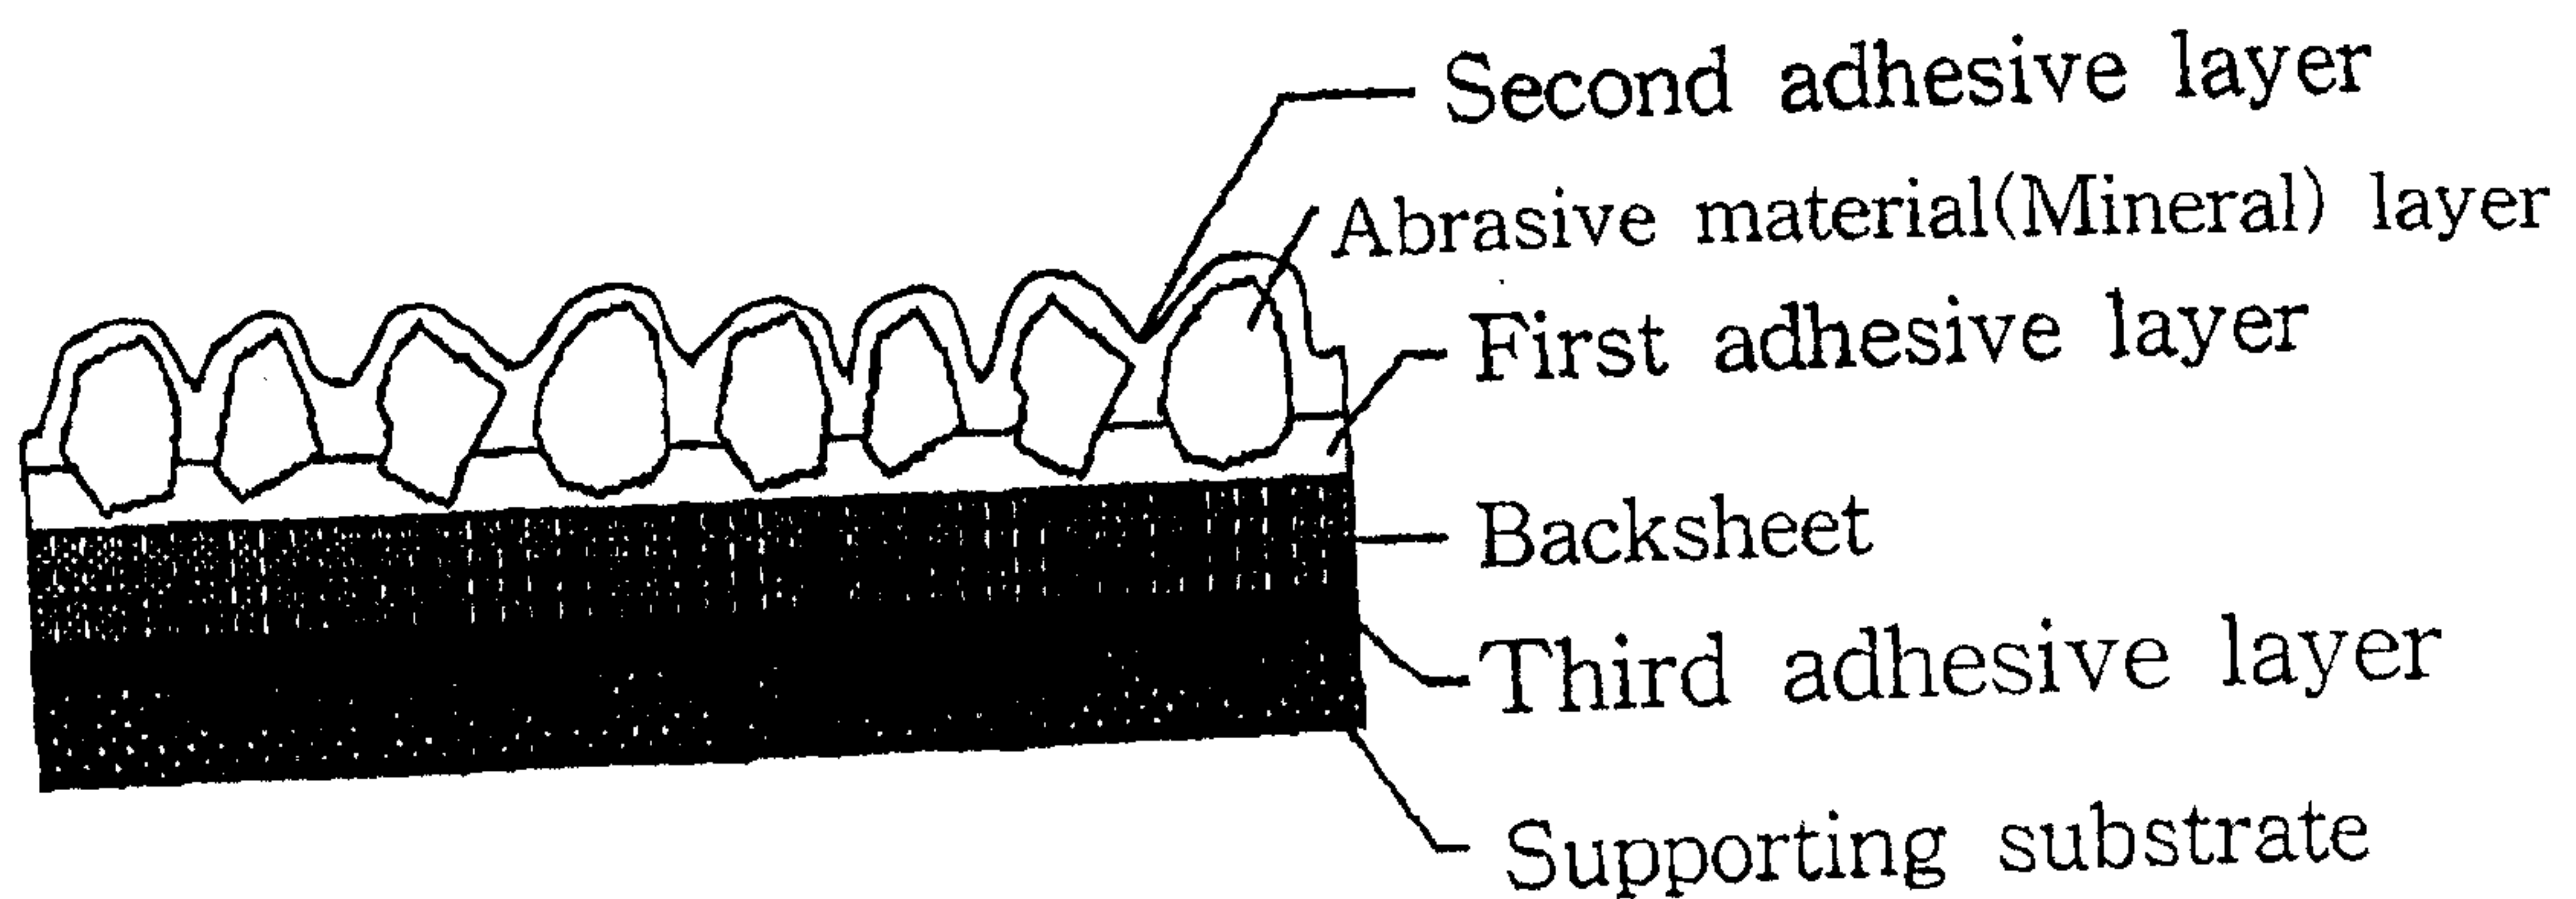


FIG. 3

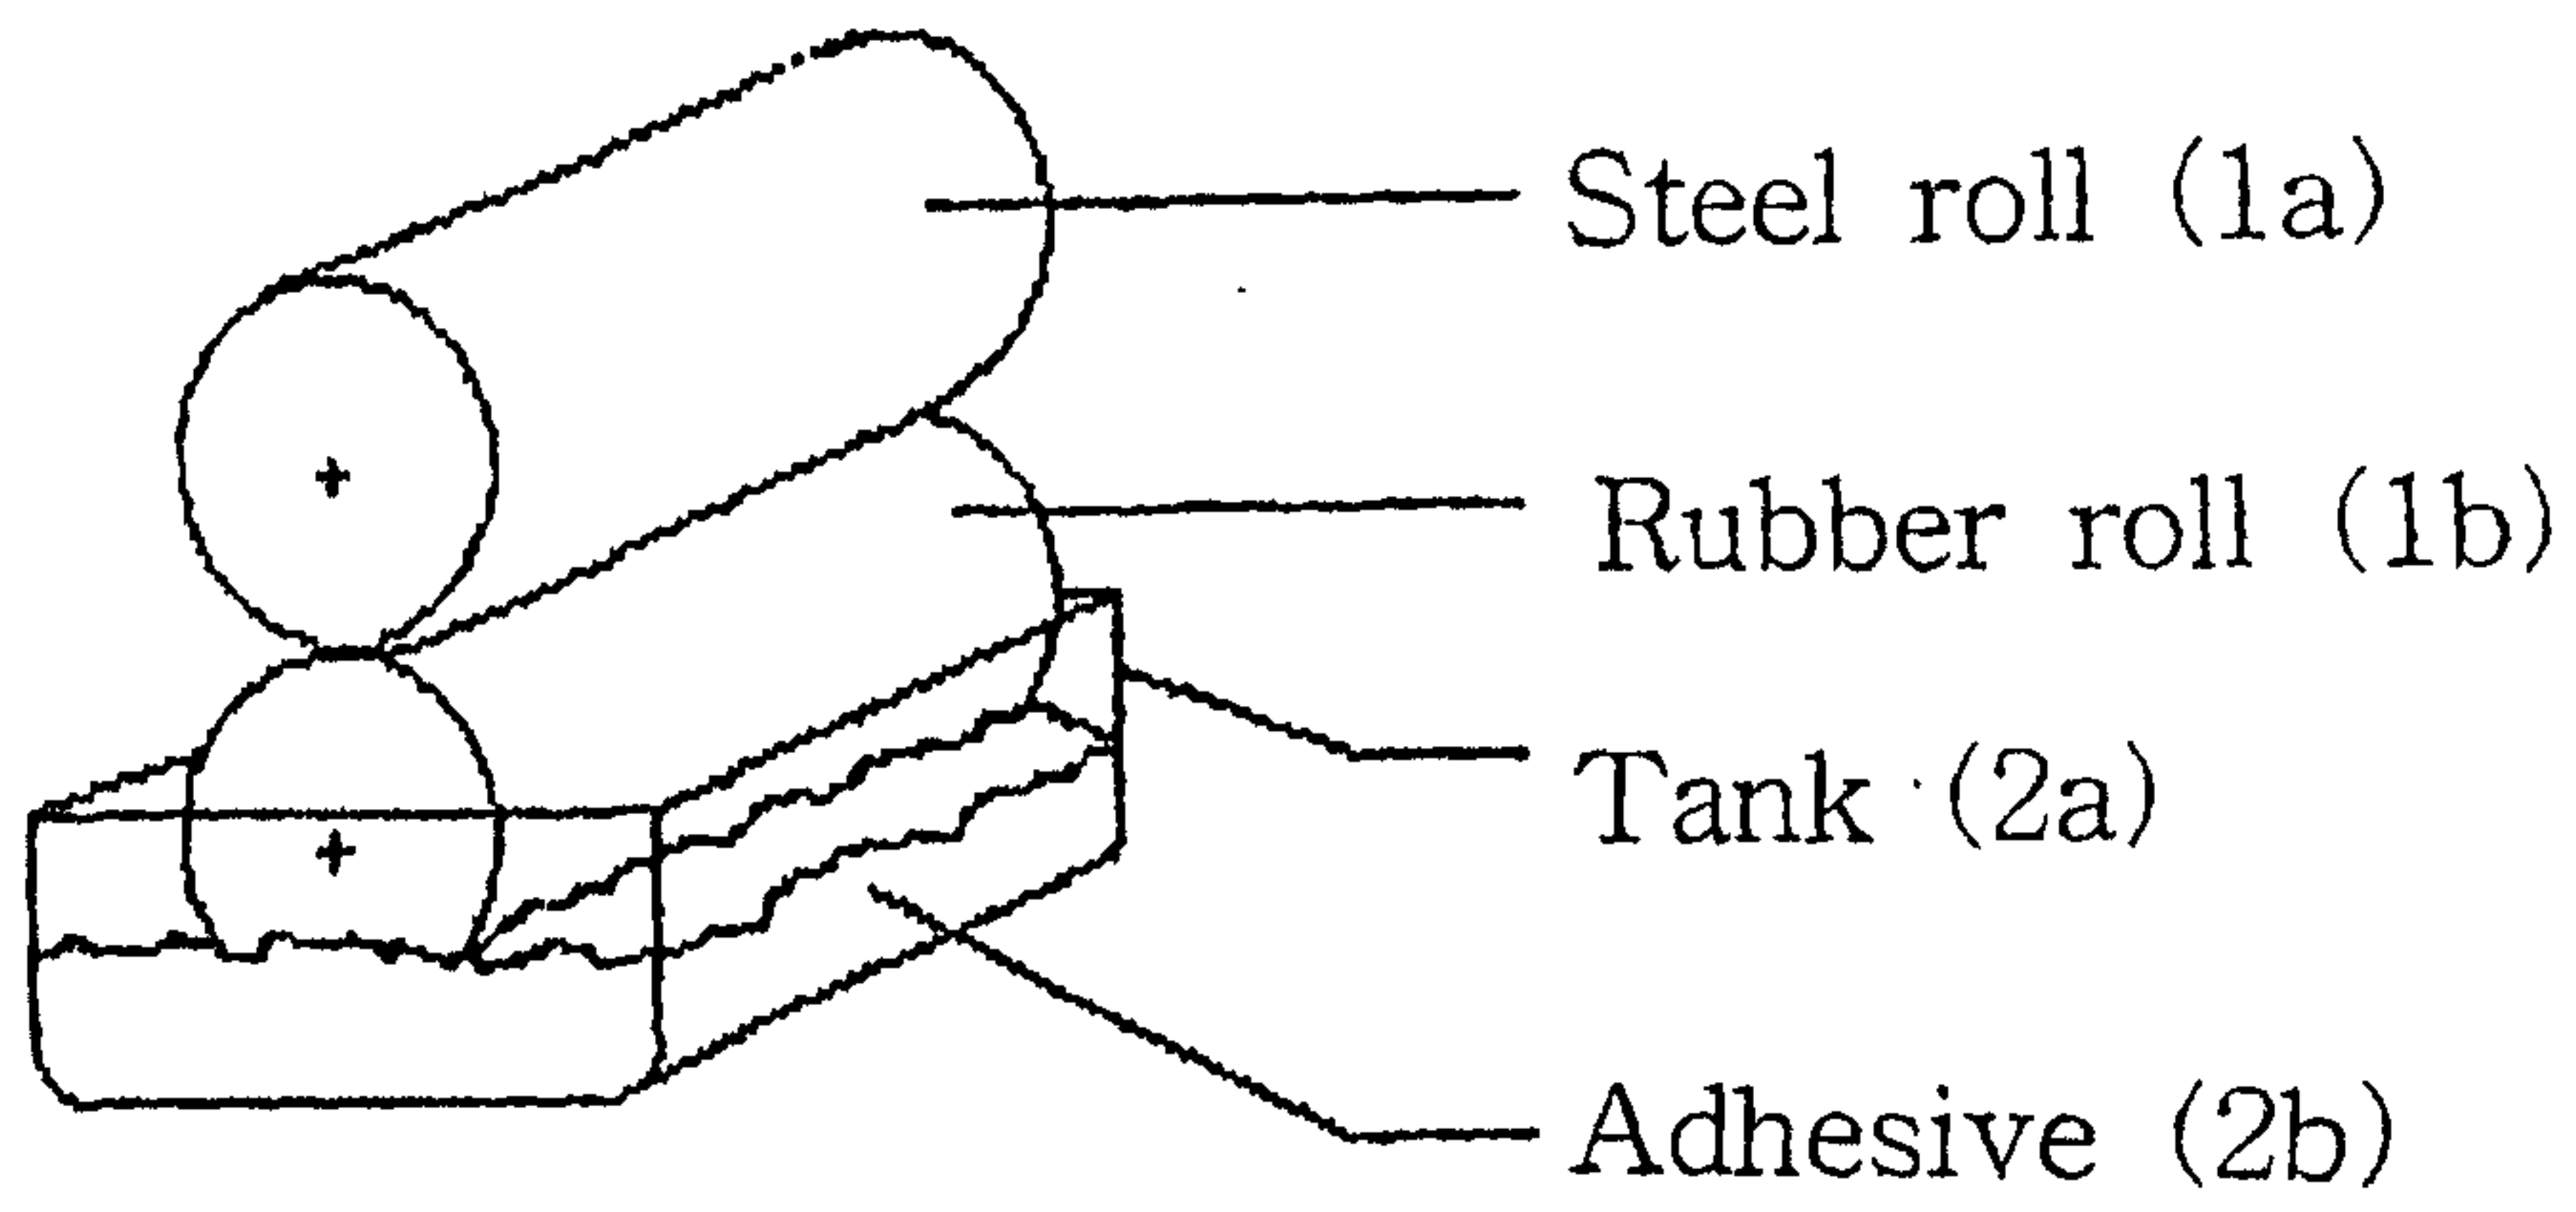


FIG. 4

