

(51) International Patent Classification:
H01L 31/042 (2006.01)(21) International Application Number:
PCT/US2009/044060(22) International Filing Date:
15 May 2009 (15.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

12/122,228	16 May 2008 (16.05.2008)	US
12/143,624	20 June 2008 (20.06.2008)	US
PCT/US2008/071414	29 July 2008 (29.07.2008)	US
12/255,178	21 October 2008 (21.10.2008)	US
12/466,331	14 May 2009 (14.05.2009)	US

(71) Applicant (for all designated States except US): **TEN-SOL POWER, LLC** [US/US]; 417-a Main Street, Carbondale, CO 81623 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CONGER, Steven, J.** [US/US]; 337 Lamprecht Drive, Carbondale, CO 81623 (US).(74) Agent: **JOHNSON, Brent, P.**; Sheridan Ross P.C., 1560 Broadway, Suite 1200, Denver, CO 80202 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SOLAR ARRAY SUPPORT METHODS AND SYSTEMS

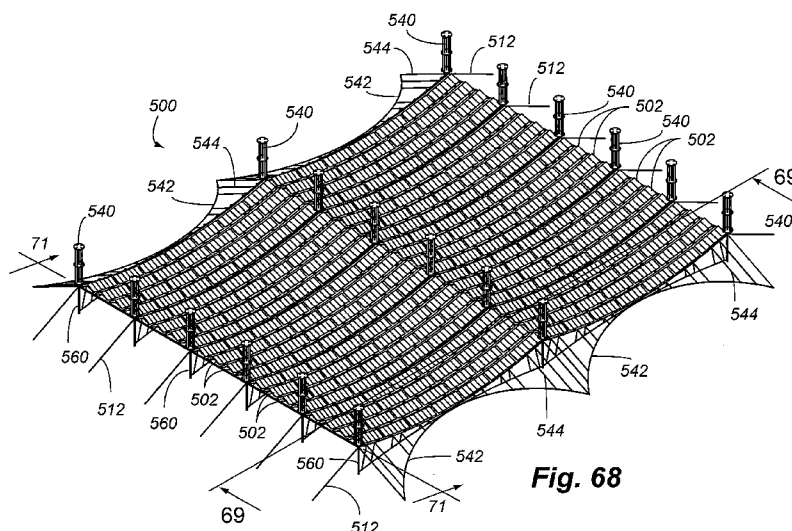**Fig. 68**

(57) Abstract: Systems and methods for disposing and supporting a solar panel array are disclosed. The embodiments comprise various combinations of cables, support columns, and pod constructions in which to support solar panels. The solar panels can incorporate single or dual tracking capabilities to enhance sunlight capture. The embodiments encourage dual land use in which installation of the systems minimizes disruption of the underlying ground. Supplemental power may be provided by vertical axis windmills integrated with the columns. Special installations of the system can include systems mounted over structures such as parking lots, roads and aqueducts.

SOLAR ARRAY SUPPORT METHODS AND SYSTEMS

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. Application Serial No. 12/255,178, filed on October 21, 2008 entitled "Solar Array Support Methods and Systems, which is a continuation-in-part application of U.S. Application Serial No. 12/143,624, filed on June 20, 2008 entitled, "Solar Array Support Methods and Systems", which is a continuation-in-part application of U.S. Application Serial No. 12/122,228, filed on May 16, 2008, entitled "Solar Array Support Methods and Systems", which is a continuation-in-part of U.S. application Serial No. 11/856,521, filed on September 17, 2007, entitled "Solar Array Support Methods and Systems", which is a continuation application of U.S. application Serial No. 10/606,204, filed June 25, 2003, now the U.S. Patent No. 7,285,719, entitled "Solar Array Support Methods and Systems", which claims priority from Provisional Application Serial No. 60/459,711, filed April 2, 2003, entitled "Solar Sculpture Energy and Utility Array", each prior application being incorporated herein by reference.

FIELD OF THE INVENTION

The present invention is related to the field of solar energy capture, and more particularly, to devices, systems, and methods relating to solar energy capture including photovoltaic (PV) solar panels supported by a system of cables and columns.

BACKGROUND OF THE INVENTION

Present systems for supporting solar panels tend to be bulky and expensive. Given the size and weight of such systems, implementation of solar panel arrays in remote locations is difficult and expensive. When large equipment is required, installation of a solar panel array in an environmentally sensitive area without significantly impacting the surrounding habitat becomes very difficult. Typically, such support systems do not allow for secondary uses of the solar panel arrays.

Photovoltaic technology continues to advance not only in the efficiency of a PV cell's capability to convert solar energy to electrical power, but also in the basic construction of PV panels used in varying installations. One advance in PV panels includes tube or cylindrical shaped PV elements. These types of PV elements have the capability to capture sunlight across greater angles and also to provide an increased surface area for capturing sunlight when the elements are packed closely together.

Despite the advances in PV technology, there are still needs for solar panel systems in which fewer and less expensive materials are used for supporting the panels. There are also developing needs for solar panel systems to provide electrical power in locations that traditionally could not employ solar panel systems because of rough terrain or because of an inadequate amount of land available for installation.

SUMMARY OF THE INVENTION

The present invention, in one preferred embodiment, includes a system for supporting a solar panel array. The system includes at least two pairs of vertical columns, where each pair includes a tall column and a short column. The pairs of vertical columns are placed some distance apart. A first support cable is secured between the short columns and a second support cable is secured between the tall columns. A guy wire or other anchoring devices may be attached to the columns to provide lateral support to the columns against the tension created by suspending the support cables between the spaced columns. The system further includes solar panel receivers or pods secured to the two support cables. The solar panel receivers or pods are used to support solar panels. The receivers/pods may include a maintenance catwalk or another element that provides access to individual receivers/pods for maintenance.

In another illustrative embodiment, the present invention includes a system for providing both shelter and electricity. The system may include columns, support cables, and one or more solar panel receivers that support solar panels as in the solar panel array support system noted above. The columns may be sized to allow an activity to occur beneath the solar panel receivers. For example, if the desired activity is to provide a shaded parking lot, the columns may have a height allowing vehicles to be parked beneath the solar panel receivers, and the columns may be spaced apart to create a sheltered area sized to correspond to the desired area of the parking lot.

In yet another illustrative embodiment, the present invention includes a system for supporting a solar panel array, the system comprising at least four anchor points, with a first support cable suspended between a first pair of anchor points, and a second support cable suspended between a second pair of anchor points. The system further includes the solar panel receivers supported by the first and second support cables, the solar panel receivers also adapted to receive one or more solar panels.

In a further embodiment, the present invention includes methods of supporting a solar panel array. The methods include the step of using cables to support solar panel receivers adapted to receive one or more solar panels. In yet another embodiment, the

present invention includes a method of creating a sheltered spaced that makes use of a solar panel array that creates electricity, where the method also includes using the electricity to cool an area beneath the array. For example, the electricity produced from the array can be used to power a water pump that delivers water to a water-misting device secured to the array. A network of water lines and misting-nozzles can be distributed throughout the array to provide cooling under the array which when coupled with the shade, produced by the overhead array, can be used to effectively cool the area under the array.

In further embodiments, various combinations of curved shaped and planar shaped panel receivers are used in solar arrays sized to meet specific installation requirements.

In other embodiments, the present invention includes systems comprising various combinations of support cables, anchor lines, anchors, and support columns.

The systems and methods for supporting the solar panel arrays can be configured such that the panel arrays are supported by members that are in tension, compression, or combinations of both. To support the solar panels by tension, the main supporting cables are suspended from columns or other stationary supports, and the cables are allowed to hang with a curvature determined by the amount of tension placed on the cables between opposing columns/stationary supports. These main cables include an upper cable and a lower cable positioned vertically below the upper cable. Vertically oriented interconnecting cables interconnect the upper and lower cables. The combination of the upper cable, lower cable, and interconnecting cables can be defined as a truss. Multiple trusses can be used to support a solar panel array in which the trusses can be spaced at some distance from one another and extend substantially parallel to one another. The pods or receivers are then arranged such that they extend transversely between adjacent trusses. When cables are used for all of the elements of the truss, the truss can be further characterized as a tension truss. It is also contemplated that rigid interconnecting members can be used between the upper and lower cables to produce a truss that places the interconnecting members in compression, and therefore the truss can be further characterized as a compression truss.

The pods or receivers may be curved shaped or planer such that the solar panels either conform to a general curvature or extend in a flat, planar configuration. One manner in which to mount the pods is to create a generally convex pod mounting that follows the convex curvature of an upper or main cable. Another manner in which to mount the pods is to create a generally concave pod mounting that follows the concave

curvature of a lower main cable. Combinations of both convex and concave mountings are also contemplated. The systems of the present invention are also well adapted for creating a solar panel array that may have a complex curved shape. In this complex curved shape aspect of the invention, shims can be used where the struts connect to the main cables therefore allowing the pod to maintain an irregular orientation with respect to the cables, which may or may not extend parallel to one another. Alternatively, ball joint connections may be used where the struts connect to the main cables allowing the pod to maintain an irregular orientation with respect to the cables.

In some embodiments of the invention, the solar panel arrays can be free standing structures in which the arrays are solely supported by the system of cables and columns. In other embodiments, the solar panel arrays of the present invention may be directly supported in part by existing structures, such as buildings. In other embodiments, the columns and cables can be used to create both portable and permanent structures wherein the trusses are not only used to support the solar panel arrays, but also to support a roof of the structure.

Due to advantageous wind deflecting characteristics that can be achieved by airfoils placed at selected ends of the solar panel arrays, the solar panel arrays are ideal for incorporating windmills to supplement power generation. In one preferred form, the windmills can be vertical axis windmills that are mounted directly to the columns or other supports of the solar panel arrays. Aerodynamic characteristics of the solar panel array can be controlled to cause an increase in airflow speed as the airflow passes over the solar panels which are captured as effective wind energy for powering the windmills.

In other systems and methods of the present invention, the pods or receivers may be mounted such that the pods may be rotated along a single axis or multiple axes so that the panels can better track the movement of the sun, thereby enhancing power output. Accordingly, the invention may incorporate single and dual tracker devices that are used to selectively rotate the orientation of the solar panels.

The present invention also provides a means to selectively adjust the tensioning in the interconnecting cables by tensioning devices mounted directly to the cable trusses. For example, the tensioning devices can be mounted on the adjacent upper or lower main cables, and the diagonally or vertically extending interconnecting cables pass through a pulley mechanism of each of the tensioning devices.

In yet another aspect of the present invention, the type and arrangement of the pods/receivers and the types of PV cells are selected based upon the particular intended

use of the invention, such as whether the invention is intended solely for producing power, or to also achieve a secondary function such as providing shade, serving as a structure with a roof, and others. For example, the solar panels can be conventional planar solar panels that are mounted on the receivers/pods in a desired arrangement. In another example, the solar panels may include cylindrical shaped PV cells such as those manufactured by SolyndraTM of Fremont California. As mentioned, one advantage of tubular/cylindrical shaped PV elements is that they provide an increased surface area for the photoaltaic cells as compared to planar arranged PV cells, and the tube shaped cells are self-tracking in that a portion of the outer surface of the tubes can be more easily oriented in a direct relationship with sunlight as sunlight angles change during the course of a day.

Because of the many different arrangements of solar panels that can be produced with the cable and column combinations, the present invention has the capability to be employed in many different land uses. The systems of the present invention are easily constructed in wide open spaces, but also are adaptable for installation within urban environments subject to land spaced constraints as well as sloping terrain. The systems of the present invention can also be easily integrated with a number of secondary use purposes such as production of shade, support for an underlying structure, supplemental power generation by incorporation of windmills, among others.

Further advantages and features of the systems and methods of the present invention will become apparent from a review of the following figures, along with the detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a solar panel array supported in accordance to an illustrative embodiment;

Figure 2 is a longitudinal section view of a solar panel array supported in accordance to an illustrative embodiment;

Figure 3 is a horizontal section view of a solar panel array supported in accordance to an illustrative embodiment;

Figure 4 is a perspective rear view of an illustrative solar panel array;

Figure 5 is a perspective side view of an illustrative solar panel array;

Figure 6 is a rear perspective view of an illustrative pod showing the use of several struts and cords to create a rigid member;

Figure 7 is a section view of an illustrative pod including several optional features;

Figure 8 is a front perspective view of several solar panel receivers linked together;

Figure 9 is a front elevation view of several solar panel receivers linked together;

Figure 10 is a front and side perspective view of an illustrative solar panel array including a center support member;

Figure 11 is a section view showing an illustrative solar panel array including a center support member;

Figure 12 is a front elevation view of an illustrative solar panel array suspended across a valley;

Figure 13 is an overhead plan view of an illustrative solar panel array suspended across a valley;

Figure 14 is a perspective view of a solar panel array in accordance with another embodiment of the present invention;

Figure 15 is a rear elevation view of the solar panel array illustrated in Figure 14;

Figure 16 is a side view of the solar panel array of Figure 14;

Figure 17 is a perspective view of a solar panel array in yet another embodiment of the present invention;

Figure 18 is a rear elevation view of the embodiment of Figure 17;

Figure 19 is a perspective view of yet another solar panel array embodiment in accordance with the present invention;

Figure 20 is a rear elevation view of the embodiment of Figure 19;

Figure 21 is an enlarged side view of the embodiment of Figure 19;

Figure 22 illustrates yet another solar panel array embodiment in accordance with the present invention;

Figure 23 is a perspective view of a plurality of rows of solar panel arrays;

Figure 24 is another perspective view of a plurality of rows of solar panel arrays;

Figure 25 is a side view of a solar panel array in yet another embodiment of the present invention; and

Figure 26 is an enlarged perspective view of another illustrative pod used to support a plurality of solar panels in the present invention

Figure 27 is a perspective view of another embodiment of the present invention showing three rows of panel receivers/pods with both convex and concave curvatures when viewed from above;

Figure 28 is an elevation view of the embodiment of Figure 27;

Figure 29 is an overhead plan view of the embodiment of Figure 27;

Figure 30 is a bottom plan view of the embodiment of Figure 27;

Figure 31 is a side view of the embodiment of Figure 27;

Figure 32 is an enlarged fragmentary perspective view of the embodiment of Figure 27 illustrating details of the pod constructions, cable connections, and the manner in which the solar panels are mounted to the curved struts of the panel receiver/pod rows;

Figure 32A is a greatly enlarged section of Figure 32 illustrating the intersection of four panel receivers/pods and showing the gaps between each pod and the cable arrangement providing support;

Figure 33 is another enlarged fragmentary perspective view of the embodiment of Figure 27, but illustrating an alternative construction for the curved struts that extend continuously across the rows of pods;

Figure 34 is a perspective view of another embodiment of the present invention showing three rows of panel receivers/pods with convex curvatures when viewed from above;

Figure 35 is a perspective view of another embodiment of the present invention showing three rows of panel receivers/pods with concave curvatures when viewed from above;

Figure 36 is a perspective view of another embodiment of the present invention showing a plurality of three row configurations joined to form an array with three primary spans;

Figure 37 is a perspective view of yet another embodiment of the present invention showing a plurality of three row configurations joined to form an array with three primary spans;

Figure 38 is a perspective view of yet another embodiment of the present invention showing a plurality of three row configurations joined to form an array with three primary spans and a plurality of openings formed in the array by removing selected panel receivers/pods;

Figure 39 is a perspective view of another embodiment of the present invention showing three groups of three row pod configurations spaced apart from one another;

Figure 40 is a perspective view of yet another embodiment of the present invention showing a plurality of three row configurations joined to form an array with three primary spans and incorporating different columns;

Figure 41 is a perspective view of yet another embodiment of the present invention showing a plurality of three row configurations joined to form an array with three primary spans similar to the embodiment in Figure 41, but incorporating exterior columns extending at an angle.

Figure 42 is a perspective view of yet another embodiment especially adapted for installation over an aqueduct.

Figure 43 is a plan view of the embodiment of Figure 42;

Figure 44 is an elevation view taken along line 44-44 of Figure 42;

Figure 45 is another elevation view taken along line 45-45 of Figure 4;

Figure 46 is a perspective view of the embodiment of Figure 42 illustrating the solar panels and receivers removed to better illustrate the arrangement of the cables;

Figure 47 is another perspective view as shown in Figure 46, but further illustrating the protective membrane that is mounted to the lower support cables;

Figure 48 is another perspective view of yet another embodiment of the present invention;

Figure 49 is a plan view of the embodiment of Figure 48;

Figure 50 is a perspective view of another pod or receiver construction in accordance with another embodiment of the present invention;

Figure 51 is a perspective view of the receiver of Figure 50 with the solar panels mounted thereon;

Figure 52 is a reverse perspective view of the receiver/pod and solar panels of the embodiment of Figures 50 and 51;

Figure 53 is an elevation view taken along line 53-53 of Figure 51;

Figure 54 is another elevation view taken along line 54-54 of Figure 51;

Figure 55 is a plan view of yet another pod or receiver construction in accordance with another embodiment of the present invention;

Figure 56 is a perspective view of the embodiment of Figure 55 illustrating the pod/receiver construction;

Figure 57 is a perspective view of an array incorporating the triangular shaped pod/receivers shown in the embodiment of Figures 55 and 56;

Figure 58 is a perspective view of yet another embodiment in accordance with the present invention;

Figure 59 is a side elevation view taken along line 59-59 of Figure 58 illustrating further details of this embodiment;

Figure 60 is a perspective view of yet another embodiment of the present invention incorporating a pair of airfoils at each end of the array;

Figure 60A is an enlarged fragmentary perspective view of one of the airfoils and specifically illustrating an example pod/receiver construction;

Figure 61 is a side elevation view of one of the arrays of the present invention and specifically showing pressure patterns that are exerted upon the array based upon air flow traveling over and through the array;

Figure 62 is another elevation view of the array illustrated in Figure 61 but further incorporating airfoils that change the resulting airflow pattern as air contacts the array;

Figure 63 is a perspective view of the embodiment illustrated in Figure 14 but further incorporating flexible sealing brackets between the receivers;

Figure 64 is an enlarged fragmentary perspective view taken along line 64-64 of Figure 63 illustrating details of a sealing bracket;

Figure 65 is an elevation view of another preferred embodiment of the present invention including an adjustable tensioning device;

Figure 66 is an enlarged view of a portion of Figure 65 illustrating the adjustable tensioning device;

Figure 67 is a cross sectional view taken along line 67/67 of Figure 66 illustrating further details of the adjustable tensioning device;

Figure 68 is a perspective view of another embodiment of the present invention including a plurality of vertical axis windmills mounted to columns of the solar panel array;

Figure 69 is an elevation view of the embodiment of Figure 68 taken along line 69-69 further including airfoils connected to opposing ends of the array for modifying airflow over the array and thereby enhancing the ability of the windmills to produce power;

Figure 70 is a plan view of the embodiment of Figure 68;

Figure 71 is a cross-sectional view taken along line 71/71 of Figure 68 illustrating further details of the embodiment of Figure 68;

Figure 72 is an elevation view of another embodiment of the present invention incorporating a combination of tension and compression members in a truss enabling a convex and concave mounting of solar panels;

Figure 73 is an elevation view of the embodiment of Figure 72 showing an additional span of pods and vertical axis windmills incorporated in an installation of the solar panel array with a building;

Figure 74 is a perspective view of a solar panel array as shown in the embodiment of Figure 73, with the vertical axis windmills and the underlying roof structure removed for clarity to show the arrangement of the array;

Figure 75 is an elevation view of yet another embodiment of the present invention illustrating a compression truss with solar panels mounted on the lower main cable producing a concave arrangement of the solar panels;

Figure 76 is an elevation view of another embodiment of the present invention illustrating a compression truss for supporting a solar panel array disposed in a horizontal plane, and the truss also used to support a roof or covering incorporated in the array;

Figure 77 is another elevation view of another embodiment of the present invention illustrating a compression truss for supporting a solar panel array, and the truss also used to support a roof or covering incorporated in the array in which the array follows the contour of the roof/covering;

Figure 78 is another elevation view illustrating a compression truss for supporting solar panels and a building roof or covering disposed below the solar panels;

Figure 79 is a perspective view of an embodiment showing two spans of a compression truss arrangement;

Figure 80 is an elevation view taken along line 80-80 of Figure 79;

Figure 81 is a perspective view of a panel receiver or pod supporting a plurality of solar panels arranged to form a complex shape in which the solar panels extend at different angles as supported between pairs of adjacent cables;

Figure 82 is a perspective view of the embodiment of Figure 81 in which the solar panels have been removed to expose the receiver/pod construction;

Figure 83 is a greatly enlarged fragmentary elevation view of a connection between the upper support cable and a main support beam of the pod utilizing a ball joint construction;

Figure 84 is another greatly enlarged fragmentary elevation view of the connection between a support cable and a main support beam of the pod utilizing shims or wedges to achieve the desired offset orientation between the cables and the main support beams of the pod;

Figure 85 is an elevation view illustrating the orientation of the pod elements and supporting cables without the solar panels mounted as taken along line 85-85 of Figure 82;

Figure 86 is an elevation view taken along line 86-86 of Figure 82 illustrating the solar panels mounted to the receiver;

Figure 87 is a perspective view of another embodiment having two spans of convex mounted pods incorporating compression trusses;

Figure 88 is an elevation view taken along line 88-88 of Figure 87;

Figure 89 is the perspective view of Figure 87 with the solar panels removed to expose the pod constructions;

Figure 90 is an enlarged fragmentary perspective view of a pod in the embodiment of Figure 89 with the solar panels removed to expose the particular construction of the pod elements;

Figure 91 is a perspective view of another embodiment of the present invention that may incorporate a dual tracking capability with respect to orientation of the pods in two separate adjustments in order that the pods may track the sun by rotation in two separate axes;

Figure 92 is an elevation view taken along line 92-92 of Figure 91;

Figure 93 is an elevation view taken along line 93-93 of Figure 91;

Figure 94 is a plan view of Figure 91;

Figure 95 is an enlarged fragmentary perspective view of a dual axis tracking mechanism provided in connection with the present invention and incorporated by way of example in the embodiment of Figure 91;

Figure 96 is an enlarged fragmentary perspective view of a single axis tracking mechanism provided in connection with the present invention and incorporated by way of example in the embodiment of Figure 91;

Figure 97 is an elevation view of weights that can be used to stabilize a truss during construction of the array in accordance with another aspect of the present invention;

Figure 98 is an elevation view of another type of truss in which weights can be used to stabilize the truss during construction of the array;

Figure 99 is an enlarged fragmentary elevation view of a temporary truss support assembly that can be used during construction of a truss;

Figure 99A is an enlarged view of a portion of Figure 99 detailing the construction of the connection between the temporary truss support and a cable of the truss;

Figure 100 is an elevation view of a type of temporary or permanent truss support feature enabling truss components such as two compression members of the truss to extend on opposing sides of a cable;

Figure 101 is a perspective view of another preferred embodiment of the solar panel array in accordance with the present invention in which a single tracking capability is provided for linear extending rows of solar panels;

Figure 102 is an elevation view taken along line 102-102 of Figure 101;

Figure 103 is an elevation view taken along line 103-103 of Figure 101;

Figure 104 is a plan view of the embodiment of Figure 101;

Figure 105 is a perspective view of another embodiment of the present invention in which a single tracking capability is provided for solar panels that are individually controllable with respect to the tracking function;

Figure 106 is an elevation view taken along line 106/106 of Figure 105;

Figure 107 is a plan view of the embodiment of Figure 105;

Figure 108 is an enlarged fragmentary perspective view of a pod in the embodiment of Figure 105 with the solar panels removed to expose the construction of the pod elements;

Figure 109 is a perspective view of yet another embodiment of the present invention showing two spans of convex mounted pods with single axis tracking capability and pods mounted to follow the counter of the upper cables;

Figure 110 is a side elevation view as taken along lines 110-110 of Figure 109;

Figure 111 is a plan view of the embodiment of Figure 109;

Figure 112 is a perspective view of yet another embodiment of the present invention showing two spans of convex mounted pods with single axis tracking capability and pods mounted to achieve a planar configuration;

Figure 113 is a side elevation view as taken along lines 113-113 of Figure 112;

Figure 114 is a perspective view of yet another embodiment of the present invention showing two spans of convex mounted pods with single axis tracking capability and pods mounted to achieve a planar configuration in which the pods are located midway between the upper and lower cables of the trusses;

Figure 115 is a side elevation view as taken along lines 115-115 of Figure 114;

Figure 116 is a side elevation view illustrating the a single tracking capability of the present invention to reverse orient pods in order to handle shading conditions produced by the array;

Figure 117 is an enlarged fragmentary perspective view of a representative embodiment of the present invention incorporating tube or cylindrical shaped PV elements;

Figure 118 is a schematic view of another single axis tracking mechanism in accordance with the present invention in which a biasing capability is provided to allow for some range of allowable rotation of the pods in response to high winds; and

Figure 119 is a schematic diagram of a control system in connection with another aspect of the present invention.

DETAILED DESCRIPTION

The following detailed description should be read with reference to the drawings. The drawings, which are not necessarily to scale, depict illustrative embodiments and are not intended to limit the scope of the invention.

Figure 1 is a perspective view of a solar panel array supported in accordance with an illustrative embodiment. A solar panel array 10 is illustrated as including a number of solar panel receivers or pods 12. Pairs of short columns 14a, 14b and tall columns 16a, 16b are aligned with one another. The pairs of columns 14a, 16a and 14b, 16b may also be connected by a stability cable 18 that runs along the edges of the array 10. The solar panel receivers 12 are held above a surface 20 at a height 22 defined by the columns 14a, 14b, 16a, 16b. A first main cable 24 is suspended between the short columns 14a, 14b, and a second main cable 26 is suspended between the tall columns 16a, 16b. The solar panel receivers 12 are designed to be supported by the cables 24, 26, so that the overall design is a lightweight, flexible and strong solar panel array 10 that leaves plenty of usable, sheltered spaced below. Anchor lines 28 and anchors 30 may be used to provide further support and to enable the use of lightweight columns 14a, 14b, 16a, 16b. Anchor lines 28 may be cables or steel rods.

The surface 20 may be, for example, a generally flat area of ground, a picnic area in a park, a parking lot, or a playground. The height 22 may be chosen to allow for a desired activity to occur beneath the array 10. For example, if a parking lot is beneath the array 10, the height 22 may be sufficient to allow typical cars and light trucks to be parked underneath the array 10, or the height may be higher to allow commercial trucks to be parked beneath the array 10. If a playground is beneath the array 10, the array 10 may have a height 22 chosen to allow installation of desired playground equipment.

Any suitable material and/or structure may be used for the columns 14a, 14b, 16a, and 16b including, for example, concrete, metal, a simple pole, or a more complicated

trussed column. In some embodiments a footing may be placed beneath the base of each of the columns 14a, 14b, 16a, and 16b to provide stability on relatively soft ground. The cables 18, 24, and 26 and anchor lines 28 may be made of any material and design include, for example, metals, composites, and/or polymeric fibers. In one embodiment the primary material used in the columns 14a, 14b, 16a, and 16b, the cables 24 and 26 and the anchor lines 28 are steel. Because the primary support technology for the array 10 are cables 24 and 26 under tension, the design is both visually and literally lightweight.

While Figure 1 illustrates an embodiment wherein the columns 14a, 14b, 16a, and 16b are either "short" or "tall", in other embodiments all the columns may be the same height. No particular angle of elevation is required by the present invention; however, it is contemplated that, depending upon the latitude, time of year, and perhaps other factors, certain angles may be more effective in capturing incident sunlight.

Figure 2 is a longitudinal section view of a solar panel array supported in accordance with an illustrative embodiment. The array 10 illustrates the relative spacing of the rows of the array 10, and helps show how the stability cable 18 connects the columns 14 and 16 of the array 10. The stability cable 18 may be coupled to an anchor member as well, though this is not shown in Figure 2. It can be seen that the relative heights of the columns 14 and 16 help to define the angle the solar panel receivers 12 have with respect to the incident sunlight. In some embodiments, the columns 14 and 16 or the solar panel receivers 12 may include a mechanism allowing for adjustment of the angle of the solar panel receivers 12. To do so, for example, the length of the columns 14, 16 may be adjusted, or the solar panel receivers 12 may include a mechanism for changing the angle of individual panels or entire receivers 12. For example, as the season changes, the height of the sun in the sky may vary sufficiently to affect the efficiency of the solar panel receivers 12, and so it may be desirable to vary the angle of the receivers 12. Also, as the sun moves throughout the day it may be desirable to change the angle of the receivers 12 to improve light reception.

Figure 3 is a horizontal section view of a solar panel array supported in accordance with an illustrative embodiment. As illustrated, the array 10 is supported by short columns 14a and 14b, tall columns 16a and 16b, and cables 24 and 26. Anchor lines 28 and anchors 30 are provided to improve stability and allow the use of lightweight columns 14a, 14b, 16a, and 16b. The solar panel receivers 12 are illustrated as pairs of individual units 32 having gaps 34 between each unit 32. The gaps 34 allow for air movement, reducing the amount of wind resistance of the array 10. The gaps 34 also allow for relative movement

of the units 32 since the cables 24 and 26 are somewhat flexible.

Figure 4 is a perspective rear view of an illustrative solar panel array. It can be seen that the stability cables 18 are coupled in various configurations along the length of the array 10, linking the short columns 14 and tall columns 16 to create a linked structure. The array 10 also includes various anchor cables 28 and anchor points 30, including at the end of the array 10 that may help anchor the stability cables 18.

Figure 5 is a perspective side view of an illustrative solar panel array 10 that is similar to that shown in Figures 1-4. It can be appreciated from the several views of FIGS. 1-5 that the illustrative array 10 provides a readily usable shelter that is amenable to a variety of activities.

Figures 6 and 7 illustrate a pod that may be used as a solar panel receiver. The "pods" illustrated herein are intended to provide an example of a solar panel receiver that may be used with the present invention. The solar panel receiver may, of course, have a variety of other structures to perform its function of holding one or more solar panels while being adapted to couple to support cables as illustrated herein.

Figure 6 is a rear perspective view of an illustrative pod showing the use of several struts and cords to create a rigid member. The pod 40 is shown with several solar panels 42 which may be, for example, photovoltaic panels. A maintenance walkway 44 is included as an optional feature of the pod 40. Several curved struts 46 extend vertically along the back of the pod 40, with several horizontal struts 48 coupled by moment connections to the curved struts 46. By using moment connections, the overall structure becomes a rigid yet lightweight frame for receiving the solar panels 42. A center strut 50 extends out of the back of the pod 40, and is connected to a truss cable 52 which provides another lightweight yet highly supportive aspect of the structure. The center strut 50 and truss cable 52 allow a lightweight curved strut 46 to be used, lending support to the center of the curved strut 46.

In another embodiment, rather than creating electricity with photovoltaic panels, the present invention may also be used to support solar panels that collect solar thermal energy. The solar thermal collectors could be mounted on the solar panel receivers illustrated herein, and thermal energy could be collected by the use of a heat transfer medium pumped through flexible tubing. In one such embodiment, glycol may be used as a mobile heat transfer medium, though any suitable material may be used.

Figure 7 is a section view of an illustrative pod including several optional features. The pod 40 is shown with solar panels 42 in place. The optional maintenance walkway 44

is again shown on the lower portion of the curved member 46. The center strut 50 and truss cable 52 again provide support to the curved member 46. The pod 40 may include, for example, a mister 54 that can be used to provide evaporative cooling to the sheltered area beneath a solar array using the pod 40. The pod 40 may also include a light 56 or security camera, for example. In one embodiment, a solar array may be used to provide a parking shelter, with the solar array storing electricity during the day using, for example, fuel cells or batteries, and then discharging the stored electricity by lighting the shelter during the evening.

Two cable receivers 58 and 60 are also illustrated. While shown in the form of a simple opening that a cable may pass through, the cable receivers 58 and 60 may take on a number of other forms. For example, the cable receivers 58 and 60 may include a mechanism for releasably locking onto a cable. It can be appreciated from Figures 6 and 7 that the illustrative pod 40 is designed so that rain is readily directed off of the solar panels, as the water will run down the curve of the pod 40. In other embodiments, the pod 40 may be more or less flat, rather than having the curvature shown, or may have a different curvature than that shown.

Figure 8 is a perspective front view of several solar panel receivers linked together. A first solar panel receiver 70, a second solar panel receiver 72, and a third solar panel receiver 74 are supported by a main upper support cable 76 and a main lower support cable 78. An optional maintenance walkway 80 is illustrated as well. Also included is a flexible electric cable 82 that allows for transmission of electrical power from each of the solar panel receivers 70, 72 and 74 when solar energy is captured. The flexible electric cable 82 may also serve to distribute power to devices such as security cameras or lighting that may be provided beneath the solar panel receivers 70, 72 and 74.

Figure 9 is a front elevation view of several solar panel receivers linked together. Again, the solar panel receivers 70, 72 and 74 are shown supported by an upper support cable 76 and a lower support cable 78, and include an optional maintenance walkway 80. Two flexible electric cables 82a and 82b are illustrated in Figure 9, and may serve the same purposes as that noted above with respect to Figure 8. It is clearly shown in Figure 9 that there is a gap 84 between the solar panel receivers 70, 72 and 74. The gap 84 allows the solar panel receivers 70, 72 and 74 to move independently, rendering the overall array less rigid and more likely to withstand high winds. The gap 84 also prevents neighboring solar panel receivers (i.e. 70 and 72 or 72 and 74) from damaging one another in windy conditions.

Depending on the desired output of the array, the flexible electric cables 82a and 82b may be coupled to a substation for gathering produced power and providing an output. For example, the electricity gathered is inherently direct current power; an array as illustrated herein may be easily used to charge batteries or fuel cells. The power may also be used with an electrolyzer to produce hydrogen and oxygen, with the hydrogen available for use as a fuel.

Figure 10 is a perspective front and side view of an illustrative solar panel array including a center support member. The illustrative array 100 includes a number of alternating short columns 102 and tall columns 104, with main lower and upper support cables 106 and 108 suspended from the columns 102 and 104. Anchor lines 110 and anchors 112 provide additional support, and the array 100 supports a number of solar panel receivers 114. The further addition in Figure 10 is the inclusion of a center support 116, which allows for a longer span to be covered between the columns 102 and 104, reducing the need to place additional anchors 112. Further, because the center support 116 does not have to provide stability against lateral movement, and only needs to provide vertical support, the center support 116 may be of an even lighter weight construction than the outer columns 102 and 104.

Figure 11 is a section view showing an illustrative solar panel array including a center support member. Again, the array 100 is supported by the use of a short column 102, a tall column 104, a lower support cable 106 and an upper support cable 108. The array 100 is stabilized in part by the use of anchor lines 110 and anchors 112, and a number of solar panel receivers 114 are supported. The center column 116 provides a central support, but is not required to add to the lateral stability of the array 100, because there are portions of the array pulling equally on both sides of the center column 116.

Figure 12 is a front elevation view of an illustrative solar panel array suspended across a valley. An array 120 is suspended across a valley 122 by the use of four anchors 124 that enable two main support cables 126 and 128 to be suspended across the valley 122. A number of solar panel receivers 130 are supported by the support cables 126 and 128. By suspending the array 120 across the valley 122, a desired height 132 above the valley floor can be achieved by the array. The height 132 may be sufficient to allow wildlife to pass below.

A number of potential environmental benefits from this type of structure can be identified, including that the structure provides a quiet and safe energy production array, the structure provides shade and/or shelter, and the structure can be installed without

requiring a large amount of heavy machinery. The use of an array over eroding ground may encourage foliage growth in highly exposed locations and thus slow erosion.

Figure 13 is an overhead plan view of an illustrative solar panel array suspended across a valley. It can be seen that the array 120 is designed to match the shape of the valley 122. In particular, the array 120 includes a number of individual lines of solar panel receivers 130. By varying the number of solar panel receivers 130 suspended by each pair of support cables, a relatively short line 134 can match a relatively narrow place in the valley 122, while longer lines 136 and 138 span a wider portion of the valley 122.

Figures 14-16 illustrate yet another preferred embodiment of the present invention, in the form of a solar panel array 200 comprising a plurality of receivers or pods 214 supported by another arrangement of cables and columns. More specifically, Figures 14 and 15 illustrate a plurality of spaced pods 214 each containing a number of solar panels 216, a first main lower cable 206 supporting one end of the pods, and a second main upper cable 208 supporting an opposite end of the pods. First cable 206 is strung between short columns 204, while second cable 208 is strung between tall columns 202. A pair of complementary support cables is also provided to further support the pods 214, namely, a front complementary support cable 210 and a rear complementary support cable 211. Cables 210 and 211 are particularly useful in resisting upward forces generated by wind loads. A number of vertically oriented connecting cables 212 interconnect the complementary support cables 210 and 211 to their corresponding first and second cables 206 and 208. The embodiment of Figures 14-16 also includes cross-supports 220 that extend between the columns 202 and 204. Members 202, 204, and 220 may be metallic and made of material such as steel or aluminum; and these members may be configured as I-beams, channels, tubular members, and others. The gaps 222 provided between the pods 214 allow wind to pass between the pods and therefore prevent damage to the system during high wind conditions. Anchor lines 224 extend from each of the columns to respective anchors 218. It shall be understood that additional anchor lines 224 can be added to provide the necessary support to the columns. Figure 15 is a rear elevation of the embodiment of Figure 14, better illustrating the complementary support cables 210 and 211.

The side view of Figure 16 also illustrates that the anchor lines 224 may be placed in-line with the columns to minimize the side profile of the system. Figures 14-16 also show a number of other geometrical features defining the construction and overall appearance of the system. For example, the complementary support cables 210 and 211

are coplanar with their corresponding first/second cables 206 and 208. The panel receivers or pods 214 have a first end residing at a first height, and a second end residing at a second lower height. The panel receivers or pods 214 are substantially rectangular shaped and evenly spaced from one another along the first and second cables 206 and 208. The first cable 206 defines a first curvature, the second cable 208 defines a second curvature extending substantially parallel to the first curvature. The complementary support cables 210 and 211 have a generally opposite curvature as compared to the first and second cables 206 and 208, and the complementary support cables 210 and 211 also extend substantially parallel to one another. The gaps 222 between each panel 216 may be substantially triangular shaped such that the portions of the gaps located adjacent to the second cable 208 are smaller than the portions of the gaps located adjacent to the first cable 206. As also shown in Figures 15 and 16, the columns 202 and 204 extend at an angle from the mounting surface such that the upper ends of the columns 202 and 204 are further apart from one another as compared to the lower ends of the columns 202 and 204. Angling the columns towards the outside of the structure in this manner increases the structure's efficiency to resist horizontal forces such as wind or seismic loads; and thus enables a reduction in the required size of the anchor lines 224 and anchors 218.

Depending upon the location where the solar panel array is to be installed, it may be necessary to adjust the location of the columns in order to take advantage of available ground spaced and to maximize the area to be covered by the solar panel array. For example, if the solar panel array is used to cover a parking lot, it may be necessary to adjust the location of the columns based upon available spaced in the parking lot, in order to maximize the overall area covered by the solar panels by the non-vertical columns. Thus, in the embodiment of Figures 14-16, non-vertical columns allow the group of pods to extend over a greater overall area as opposed to use of vertical columns anchored at the same column locations. Additionally, there may also be some aesthetic benefits achieved in arranging the columns in various combinations of both vertical and angular extensions from the mounting surface.

Figure 17 illustrates yet another embodiment of the present invention. In this embodiment, an intermediate support 230 is provided that extends vertically from the ground, while the outside or exterior columns extend at an angle, like those illustrated in Figure 15. In this embodiment, the receivers or pods 214 can also be defined as corresponding to a first group 226 and a second group 228. In the first group 226, the pods 214 extend between one of the exterior column pairs and the intermediate support

230, while the second group 228 of pods extends between the opposite exterior column pair and the intermediate support 230. Figure 18 is a rear elevation view of the embodiment of Figure 17, further disclosing particular details of this embodiment to include the complementary support cables 210 and 211.

Figure 19 illustrates yet another preferred embodiment of the present invention. In this embodiment, in lieu of single columns that are secured to the mounting surface, the columns 240 and 242 are arranged in a V-shaped configuration. The lower ends of the columns 240 and 242 are anchored at the same location while the upper ends of the columns 240 and 242 diverge from one another. As with each of the previous embodiments, the V-configured columns 240 and 242 may be made of tubular members or other types of metallic members. As also shown, the anchor lines 224 for each pair of the V-configured columns may be oriented so that there is a single anchor point 218 from which the anchor lines extend. The V-shaped columns minimize the number of anchors 218 required for the array structure.

Referring to Figure 20, a rear elevation view is provided of the embodiment of Figure 19. This Figure also shows the manner in which the various anchor lines 224 for each column pair terminate at a common anchor point 218. Figure 21 illustrates the manner in which the anchor lines 224 may extend in a V-shaped configuration to match the columns 240 and 242 and thus minimize the side profile of the system. Additionally, in this embodiment a stabilizing cable 244 may be provided that extends between the upper ends of the column pairs.

Figure 22 illustrates yet another preferred embodiment of the present invention, wherein the V-shaped column supports 240 and 242 are utilized in an extended row of pods 214. More specifically, a pair of outside or end columns 246 are provided along with a pair of intermediate columns 248. Based upon the required length of the solar panel array, the necessary combination of intermediate column supports can be provided for adequate structural support.

Referring to Figure 23, yet another embodiment of the present invention is illustrated comprising a plurality of rows 250 of solar panel arrays and wherein the column supports 202 and 204 extend substantially vertically from the mounting surface. In this embodiment, it is noted that the anchor lines 224 for each column pair extend to a common anchor point 218. The rows 250 may be selectively spaced from one another to provide the optimal area coverage for the solar panel arrays, as well as optimal shade in the event the arrays are used to cover a structure such as a parking lot. Thus, it shall be

understood that the rows 250 may be either spaced more closely to one another, or farther apart depending upon the particular purpose of installation.

Figure 24 illustrates yet another preferred embodiment of the present invention, showing a plurality of rows 252 of solar panel arrays wherein the V-column configuration is used with column supports 240 and 242. As with the embodiment shown in Figure 23, the rows 252 may be either spaced more closely to one another, or farther apart depending upon the particular purpose of installation. Figure 24 also illustrates some additional anchor lines 225 that are used to further stabilize the rows 252 of solar panel arrays. These anchor lines 225 are particularly advantageous in handling laterally directed forces, such as wind.

With each of the embodiments of the present invention, it shall be understood that the particular height at which the solar panels are located can be selectively adjusted for the particular purpose of installation.

Figure 25 illustrates yet another preferred embodiment of the present invention, wherein each of the solar panels 216 may be rotatably mounted to their corresponding supporting pod or receiver. As shown, the embodiment of Figure 25 incorporates curved struts 260 and pivot mounts 262 that enable each of the solar panels 216 to be disposed at a desired angle with respect to the sun. The pivot mounts 262 can take a number of forms. For example, a pivot mount 262 could include a continuous member such as a steel rod or square tubular member that extends horizontally across the corresponding receiver or pod and which is secured to an overlying solar panel 216. The rod is then rotatably mounted within the receiver or pod such that the solar panels 216 can be grasped and rotated to the desired inclination with respect to an optimal sun-capturing orientation. This configuration of mounting the solar panels on a round or square tube provides additional strength and rigidity to the pod structures, and reduces torsional and in-plane forces exerted on the solar panels from wind loads that cause the pods to move in the wind.

Figure 26 illustrates a receiver or pod 214 that may incorporate a group of linear or straight struts. As shown, a plurality of first struts 270, and a plurality of second orthogonally oriented struts 272 are provided to support the solar panels 216 mounted to the pod. The receiver or pod shown in Figure 26 supports a group of ten solar panels 216 arranged in a 2 by 5 matrix. A width of the pod may be defined as the distance between the most outer or exterior first struts 270, and a height of the pod may be defined as the distance between the most outer or exterior second struts 272. The height of the pod can be increased by extending the length of the first struts 270 but not requiring the cables 206

and 208 to be secured at the opposite ends of the pod which would require the cables 206 and 208 to be spread further apart and therefore widening the overall size of the array. For this extended pod length, the cables 206 remain attached at their normal spacing and the extended ends of the struts 270 simply extend beyond the cables in a cantilevered arrangement. In this alternate pod construction, additional solar panels can be added to increase the power producing capability of the array without adjusting other design parameters. The spacing of the pods when mounted to the cables depends on a number of factors to such as the weight of the pods and panels, wind conditions, snow loading conditions and others. In one aspect of the invention, spacing the pods with gaps between the pods that does not exceed the widths of the pods is acceptable for some installations.

For the illustrative pod shown in Figure 26, cable receivers 58 and 60 (such as shown in Figure 7) may be incorporated thereon to allow the pod attach to the cables 206 and 208. As previously mentioned, while the cable receivers may be simply openings formed in the ends of the pods, the cable receivers may take another form such as a mechanism which selectively locks the pod onto the cable and therefore allows a pod to be removed for maintenance or replacement. Accordingly, it shall be understood that the pods can be removed from the cables as necessary to either generate another different combination of pod arrangements or to selectively replace/repair defective solar panels.

Figure 27 illustrates another embodiment of the present invention shown as solar array 300 comprising three rows, or linear extending groups of panel receivers/pods, 302, 304, and 306. Exterior rows 302 and 306 are of the same construction, and are supported at their ends by corresponding columns 316. Thus, the columns 316 are located at the corners of the rectangular shaped solar array. In this embodiment, the columns 316 are v-shaped with their lower ends received in a common anchor/footer, and their upper ends diverging away from one another and being curved as shown. The cables used to support the pods 322 in this embodiment are similar to what is illustrated in the embodiment of Figure 14; however, in the embodiment of Figure 27, the pods 322 are oriented so as to extend more parallel with respect to the surface of the ground as explained in more detail below with reference to Figures 32 and 33. Row 304 is suspended between rows 302 and 306, and there are no end supporting columns that directly support row 304; rather, row 304 is supported only by the upper main cables 308 extending on opposite lateral sides of row 304, and which also support the respective lateral sides of the adjacent rows 302 and 306. As shown in Figure 28, complementary lower main cables 310 are disposed below the upper cables 308, and have an opposite curvature as compared to cable 308. Vertically

oriented interconnecting cables 312 connect upper cables 308 and lower cables 310. An upper cable 308, a lower cable 310, and cables 312 that interconnect the upper and lower cables can be collectively referred to as a truss. In the example of Figure 28, the truss members are each in tension and thus the truss can be further defined as a tensioning truss or tension truss. A cross-support cable or bar 314 (shown in Figure 32) is provided between the upper diverging ends of the column members 316. A plurality of anchor cables 318 interconnects the columns 316 and anchor points 320 as also shown in Figure 28.

As also shown in Figure 27, the pods 322 in row 302 and the pods 322 in row 306 have a convex curvature when viewing the array from above, while row 304 has a concave curvature when viewed from above. This compound curvature arrangement of rows 302, 304, and 306 provides a wave-like appearance, and may offer certain benefits such as limiting wind and snow loading conditions, as well as providing greater options in terms of how the array may be oriented to best capture direct sunlight.

Referring to Figure 29, it is shown that the rows 302, 304, and 306 extend straight or linearly, and parallel to one another. The embodiment of Figure 27 provides an array of pods in a 3 x 11 configuration; however, it shall be understood that the length of the array may be modified to best fit the particular installation needs and therefore the rows of pods may incorporate less or more pods as needed. If the length of the pod is to be increased, then interior columns may be provided between spans as explained below with reference to embodiments such as shown in Figures 36-41.

The bottom plan view of Figure 30 further illustrates the particular arrangement of cables to include how complementary lower cables 310 are secured to the respective column members 316, and then extend in an arc or curve along the length of the respective rows. Figure 31 further illustrates the convex and concave compound curvatures of the array when viewed from a side view of the array.

Referring to Figure 32, this enlarged fragmentary perspective view illustrates the manner in which the solar panels 334 may be mounted to the panel receivers/pods. The solar panels 334 are mounted to the collection of curved struts 330 and perpendicularly oriented and straight/linear struts 332. Specifically, each pod 322 is shown as having a group of three curved struts 330, and three straight struts 332; however depending upon loading conditions, enough structural support may be provided by the use of two curved struts 330 and two straight struts 332. The spacing of such a 2 x 2 strut arrangement can be designed to provide maximum support to the overlying solar panels. For example, it

may be desirable to space the 2 x 2 arrangement of struts so that there is some overhang of the solar panels beyond the outside edges of the struts. For rows 302 and 306, the curved struts are placed in an orientation such that the ends curve downward and the middle portion or area of the curved struts extend above the ends. For row 304, the curved struts are reversed so that the ends curve upward and the middle area of the struts are disposed below the ends. The curvature of struts 330 in rows 302 and 306 provides the overhead convex appearance, while the curvature of struts 330 in row 304 provides the overhead concave appearance.

Referring to Figure 32A, a greatly enlarged plan view of a section of Figure 32 is shown. This view shows the intersection of four panel receivers/pods wherein a longitudinal gap 309 separates the pods between rows, and a transverse gap 313 separates the transverse group of three pods across the width of the array. The upper cable 308 bisects the longitudinal gap 309 between the facing struts 332. Interconnecting members 311 span the gap 309 and interconnect the facing ends of struts 332. Interconnecting members 311 may be, for example small sections of cable, or could be more rigid members such as rods or plates. In the event more rigid members such as rods or plates are used, a moment connection can be incorporated where the members 311 attach to the respective ends of the struts 332. It is also contemplated that in order to increase array rigidity or stability, additional members 311 may be placed to span the gaps 313 and therefore interconnect the facing curved struts 330.

Now referring to Figure 33, a different arrangement of struts is illustrated wherein curved struts 330 are continuous across the entire width or transverse section of the array. In this embodiment, the array is more rigid since there is no gap or separation 309 between row 304 and the exterior rows 302 and 306. The array still maintains the same wave-like shape, but has greater rigidity in the transverse or lateral direction. Thus, this strut arrangement can increase the structure's resistance to horizontal loading from wind or seismic events especially when cables 308 are sized to handle such anticipated loads.

Referring now to Figure 34, another embodiment of a solar array 300 is illustrated wherein the intermediate or interior row 304 has a convex configuration as opposed to the concave configuration illustrated in Figure 27. Therefore, the curved struts 330 for row 304 are oriented in the same manner as the curved struts used in rows 302 and 306 so that the opposite ends of the struts curve downward. This particular arrangement of the pods may also provide benefits with respect to managing wind or snow loading conditions, maximizing direct sunlight exposure, as well as to provide a different aesthetic

appearance. Additionally, more complete water drainage is achieved by providing the convex shaped upper surface and therefore this pod arrangement is especially suited for those climates that may experience heavy precipitation.

Referring to Figure 35, yet another configuration of an array 300 is provided wherein each of the rows 302, 304 and 306 have a concave configuration, like the configuration of row 304 in Figure 27. Thus, the struts 330 are each oriented so that the opposite ends curve upward. This embodiment too may offer some benefits with respect to loading, maximizing sunlight capture, and a different aesthetic appearance.

Referring to Figure 36, another embodiment of the present invention is shown in a larger solar array system 340 comprising three primary spans 342, 344, and 346. The spans are defined as running transversely in relation to the rows of pods. This embodiment includes a plurality of sets of the three-row configuration of Figure 27 as well as interconnecting rows 304 between the sets. Accordingly, Figure 36 shows the rows of pods 302, 304, and 306 connected to one another in series. Figure 36 also illustrates gaps 347 between the spans 342, 344, and 346 that accommodate mounting of intermediate columns 316. The embodiment of Figure 36 is ideal for those installations when it is desired to maximize coverage of solar panels in a defined spaced, for example, to maximize electricity production and/or to provide a shaded area under the solar panels.

Figure 37 illustrates yet another embodiment of the present invention showing an array 350 comprising three transversely oriented spans 352, 354, and 356. This embodiment also incorporates the sets of three row configurations of pods 302, 304, and 306 arranged in series to one another and including an interconnecting row 304 between each three-row grouping. The columns 316 are shown as v-shaped members and without curvature as compared to the columns 316 of Figure 36. Gaps 357 are provided to allow mounting of the intermediate columns 316. Figure 37 also represents that the pods incorporate continuous struts in the lateral or transverse direction thus eliminating gaps 309 if viewing Figure 32A, but maintaining gaps 313.

Figure 38 illustrates yet another embodiment of the present invention illustrating an array 360 similar to the array 350 of Figure 37, but the array of Figure 38 further incorporates a plurality of gaps or open spaced 368 that are formed by removing selected pods from a selected row/span. Gaps 367 enable mounting of the intermediate columns 316. Three spans 362, 364 and 366 are shown in this embodiment. The removal of the pods in this manner may be useful for achieving one of many purposes, such as to modify wind/snow-loading conditions, to provide additional sunlight under the array, or to provide

a desired visual impression. The increased amount of sunlight under the array will also facilitate better plant growth that may be desirable in some installations where landscaping under the array incorporates selected vegetation.

Referring to Figure 39, yet another preferred embodiment of the present invention is illustrated showing three spaced arrays 370, and each array 370 having three primary spans 372, 374, and 376, as well as the three row configuration of rows 302, 304, and 306. In the embodiment of Figure 39, instead of providing an interconnecting row 304 of pods, there is complete separation among the arrays 370. Gaps 377 provide mounting spaced for the intermediate columns 316. This embodiment may be used in an installation where it may be necessary to provide gaps between the arrays due to the presence of interfering structures or natural obstacles, such as trees, lighting poles, etc. Safety requirements may also be accommodated by the gaps so that emergency vehicles with large heights are able to more easily access the areas between and under the arrays. Alternatively, it may be desirable for the installation to have a greater amount of sunlight between pod groups that is achieved by the spaced arrays.

Figure 40 illustrates yet another embodiment of the present invention shown as array 380 comprising three primary spans 382, 384, and 386. This embodiment also incorporates the three-row configuration of rows 302, 304, and 306 and the interconnecting rows 304 between each three-row grouping. Gap 387 provides mounting spaced for the intermediate columns 388. In this embodiment, the columns 388 are pairs of spaced vertical members, with an interconnecting and horizontally oriented cross support 389.

Figure 41 illustrates yet another preferred embodiment of the present invention, showing an array 390 comprising three primary spans 392, 394, and 396, as well as the repeating arrangement of the three row configuration of rows 302, 304, and 306 and the interconnecting rows 304 between each three row grouping. Cross-support cables or bars 399 are provided between the upper ends of the columns. In this embodiment, the most outward or end group of columns 400 extends at an angle from the ground, while the interior columns 398 extend substantially perpendicular from the ground. Gaps 397 provide mounting spaced for the interior column 398.

The embodiments of Figures 27-41, are particularly suited as ground mount solar arrays, meaning that the height of the columns extends a shorter distance above the ground, such as eight to fifteen feet. The primary purpose of the ground mount solar arrays is to produce electricity. These ground mounts can be located in an area that may

not be suitable for other construction purposes or may be used to fill in unusable spaced within a commercial or industrial area to produce power. Because of the lower height at which the solar panels are mounted, there is less of a safety concern as compared to overhead mounted solar panels. Accordingly, in the design of the ground mount fewer supporting materials are required, resulting in significant cost savings. For example, row 304 is suspended between rows 302 and 306 thus eliminating the need for additional column supports for that particular row of pods.

For the embodiments of Figures 27-41 as mentioned, the cable arrangement is similar to what is disclosed with respect to the embodiment of Figure 14. Cables 308 extend substantially parallel to one another and have substantially the same curvature. Cables 310 are disposed below cables 308 and also extend substantially parallel to one another. Cables 310 have generally opposite curvatures as compared to cables 308. Cables 312 extend substantially perpendicular between cables 308 and 310. The gaps 309 between adjacent rows of pods, as well as the gaps 313 between adjacent pods in a row can be modified to best match the particular purpose of installation, as well as to provide the necessary support and airflow through the gaps in order to best handle wind and snow loading conditions.

Figure 42 illustrates another preferred embodiment of the present invention in a solar panel array 400 that is especially designed to be installed over a linear extending ground feature, such as a road or aqueduct. In the southwest region of the United States, aqueducts are used to transport large quantities of water from reservoirs to municipalities. The aqueducts are typically concrete-lined waterways that carry water within a bed 404 of the aqueduct. The sides of the aqueduct are defined by banks 406 that extend above the liquid level 424 of the waterway. In the case of array 400, it is designed to span the width of the aqueduct wherein the end of columns 420 are positioned outside or exterior of the sloping banks 406. The array 400 provides an effective way in which to shade the aqueduct, thereby reducing evaporation that naturally occurs in the aqueduct. Preferably, the array is mounted closely over the aqueduct in order to also disrupt or block wind which would normally freely flow over the aqueduct, thus, the solar panel also acts as a wind break to further prevent evaporation. Because of the remote location of many portions of various aqueducts, the solar arrays can be easily installed over the aqueducts without concern for interfering with other manmade structures.

Figure 42 also illustrates an optional power substation 450 that is placed near the array 400, in which power is downloaded from the array 400 through power transfer line

452. Particularly in remote locations, one or more power stations 450 may be required in order to most efficiently store energy produced by the array 400, or to transmit the power to another substation.

Referring also to Figure 43 and 44, the array 400 comprises a plurality of upper main support cables 408 that are secured to upper ends of the respective end columns 420. A complementary lower main support cable 410 spans between lower ends of the respective end columns 420. A plurality of anchor cables 414 provide additional support for the end columns 420. The anchors in Figures 42 and 43 have been omitted for clarity. As with the previous embodiments, a plurality of interconnecting cables 412 connect the respective upper and lower support cables 408 and 410. The upper cables, lower cables, and interconnecting cables can again be defined as respective cable trusses. On each longitudinal end of the array 400, a catenary cable 416 spans the aqueduct, and has a center portion connected at the longitudinal center 419 of the array. At this longitudinal center 419, the upper cable 408, lower cable 410, and catenary cable 416 intersect. A plurality of interconnecting catenary cables 418 extend longitudinally and interconnect the catenary cable 416 to the upper support cable 408. The array 400 comprises a plurality of pods/receivers 430 each containing a number of solar panels. The pods 430 can be selectively spaced from one another thus forming gaps 422. The columns 420 are placed exteriorly of the banks 406 so that the array 408 effectively covers the entire width of the aqueduct.

In order to provide maintenance for the array, a walkway 431 may be incorporated on various portions of the array so a person can walk to locations on the array to replace damaged solar panels or other components of the system. The walkway would replace one row of solar panels in each adjacent pod. The walkway could be made of a lightweight decking material and can also include handrails (not shown). In this figure, only one walkway is shown that extends transversely across the aqueduct; however additional walkways can be provided to allow direct access to other areas of the array in both transverse and longitudinal directions.

Figure 45 is a longitudinal elevation view taken along line 45-45 further illustrating details of the construction. Figure 45 also illustrates the way in which the catenary cables 416 and the interconnecting cables 418 extend from the opposite longitudinal ends of the array. The catenary cables 416 are anchored at respective anchor points 417, that are also placed preferably in longitudinal alignment with the columns 420.

Figure 46 illustrates the array 400 with the pods removed to better show the arrangement of cables to include the upper cables 408, lower cables 410, catenary cables 416, anchor cables 414, and various interconnecting cables.

Referring to Figure 47, another feature of this embodiment is to provide a membrane or cover that is suspended from the lower cables 410 so that the membrane can provide additional protection to the waterway to prevent evaporation. As shown in Figure 47, the membrane 440 extends along the entire length and width of the array in order to provide cover for the aqueduct. Because of the curved arrangement of the lower cables 410, the lateral side edges 441 of the membrane 440 extend close to contacting the ground near the columns 420. Thus, the membrane effectively isolates the aqueduct from airflow in a lateral direction which also contributes in preventing evaporation.

For purposes of covering an aqueduct, the array 400 may extend for many miles and the repeating nature of panel receiver rows easily accommodates an extended length. Because of the vast amount of open spaced available for installing the array over many remote aqueducts, the array 400 can produce a tremendous amount of power, providing an effective way to prevent evaporation loss for water carried in the aqueduct.

Referring now to Figure 48, another embodiment of the present invention is illustrated in the form of an array 460 comprising three spans 462, 464, and 466. Like reference numbers used in this embodiment correspond to the same structural elements disclosed in the prior embodiment. These three spans are supported in the middle of the array by the two pairs of interior column groups 458. This embodiment also includes the catenary cable arrangement 416 on both longitudinal sides of the array to provide additional array support.

Figure 49 is a top plan view of the embodiment of Figure 48 that illustrates the manner in which the anchor cables 414 and catenary cables 416 surround the array to provide support on all sides of the array.

Figure 50 illustrates another pod or receiver construction of the present invention. This pod construction is characterized by two main support beams 470 that are spaced from one another and opposite ends of the main beams are secured to cables 408 by cable clamping means 476. A plurality of intermediate struts 472 are spaced from one another and are secured to the pair of beams 470. The intermediate struts 472 are placed transversely with respect to the main beams, and extend substantially parallel with the cables 408. A plurality of solar panel support struts or upper struts 474 are then secured

over the intermediate struts 472. The upper struts 474 extend substantially parallel with the beams 470, and extend transversely to the intermediate struts 472 and cables 408.

Referring to Figure 51, a plurality of solar panels 430 are shown mounted to the upper struts 474. As shown, each of the solar panels 430 are separated from one another by longitudinal gaps 475 that extends parallel with the cables 408, and transverse gaps 479 that extend substantially parallel to the beams 470.

Figure 52 illustrates the pod construction from a reverse perspective angle that shows in more detail the manner in which the solar panels 430 are spaced and mounted to the upper struts 474 that overlie the intermediate struts 472 and beams 470.

As also shown in Figure 52, the beams 470 each include a gusset plate 477 that extends from one end of the beam. The gusset plates 477 are used to interconnect adjacent panels in a row. Therefore, when the pods/panel receivers are placed in series with one another, the gusset plates 477 interconnect the pods. The gusset plates 477 provide additional structural rigidity for the pods as they are mounted to the cables 408.

Referring to Figure 53, a side elevation view is taken along line 53-53 of Figure 51. From this side view, it is shown that the transverse gaps 479 separate the respective pods 430 mounted upon upper struts 474. Figure 53 also shows the cable clamps 476 that comprise a pair of U bolts extending below the beams 470. The U bolts are secured to opposite side flanges of the beams 470 and compress the cables 408 in order to provide a rigid connection between the beams 470 and the cables 408.

Figure 54 is another elevation view taken along line 54-54 of Figure 51. From this side elevation view, it is also shown how the pods 430 are separated from one another by longitudinal gaps 475 and the manner in which the pods 430 are mounted to the underlying support structure.

The pod or receiver 430 shown in Figures 50-54 provide an important solution for preventing torsional forces or torques that may otherwise damage the solar panels. The solar panels are relatively stiff members that can be damaged if they are bent or twisted in an out-of-plane or non-planar fashion. More specifically, the solar panels are substantially flat and the flat upper or lower surface of the panels defines a plane. If the solar panels are twisted or torqued in an out-of-plane fashion, the solar panels can be damaged. Figure 50 shows the beams 470 connected to the cables 408 that suspend the pod 430. The cables 408 will move based upon various wind and other loading conditions because the cables 408 have some capability to flex or bend; however, adjacent pairs of cables 408 will not always translate or move in an identical fashion, which can cause torsional forces to be

transferred to the pods 430. Beams 470 that extend between the cables 408 maintain a constant or rigid planar orientation when used in combination with the intermediate struts 472. Furthermore, a rigid support is provided for the panels which prevents out of plane forces from being transmitted to the solar panels. Thus, any movement transferred to the pod results in a uniform, non-torsional displacement of the entire pod which therefore prevents damage to the panels when mounted to the pods.

Figures 55 and 56 illustrate yet another preferred pod construction in accordance with the present invention. In this pod construction, a triangular configuration is achieved for the solar panels that are mounted to the pod 430. Figure 55 is a bottom plan view that illustrates this pod construction wherein a pair of diagonal beams 490 extends from an apex connection 492. The beams 490 terminate at respective base connections 494. One cable 408 attaches to the apex 492 and the adjacent cable 408 attaches to the base connections 494. Adjustable U bolts may also be used at the apex connection 492 and the base connections 494 in order to provide a rigid connection from the cables to the beams 490. A plurality of longitudinally extending connecting struts 496 are spaced from one another and are secured to the diagonal beams 490. As shown, there are preferably two struts 496 that support each of the pods 430. The triangular shape of the pod is achieved by the selected lengths of struts 496.

Figure 56 is a perspective view illustrating how the pods 430 appear when mounted with the triangular configuration.

Figure 57 illustrates another example of an array wherein two spans 480 and 482 comprise an arrangement of solar panels that are mounted to the triangular pods 430. Like numbers in this figure also correspond to the same structure numbers as discussed above with respect to the embodiments shown in Figure 42. When the pods 430 are secured to the cables 408, the triangular shaped arrangement of the solar panels allow the pods to be mounted in an overlapping configuration wherein the apex of one pod is mounted adjacent to one base side of the adjacent pod. Gaps 484 define the spaces between the solar panels mounted to adjacent pods. Gaps 486 are present at both opposite ends of the array and which illustrates the mounting arrangement of the triangular pods. In the center portion of the array, there is also a larger shaped gap 488 which again is produced by the triangular shape of the pods as mounted to the cables 408.

Figures 58 and 59 illustrate yet another embodiment of the present invention in the form of an array 501 that is especially adapted for use in colder climates in which snow and ice are present during winter months. In this array 501, a plurality of rows 503 of

Pods are arranged in a parallel fashion and supported by respective cables and columns. Again, the same reference numbers used in this embodiment correspond to the same elements set forth above with respect to the prior embodiments. This particular embodiment shows that the pods 430 are tilted or canted at an angle. The front portion or edge of each of the pods includes heating sheets or panels 505 that extend continuously between the pods, one heating panel being located on each lateral side of the row 503. The heating panels 505 terminate or bisect at the middle 507 of each of the rows 503. Each of the heating panels or sheets 505 may incorporate a heating element 507, such as an electrical strip heater which is used to warm the panels 505 in order to melt snow or ice accumulating thereon. Referring also to Figure 59, the incident angle of the sun is shown as dashed lines 513. These lines more particularly indicate the angle of the sun during winter months in which the heating panels 505 would be shaded during a significant portion of the daylight hours. If solar panels were used in lieu of the heating panels 505, then the solar panels would continue to accumulate snow and ice during the winter months, which would eventually cause a significant reduction in the area of the solar panels exposed to sunlight. As mentioned, the heating panels 505 are used to melt snow or ice, which then facilitates drainage of liquid from the pods 430 thereby keeping the array clear from snow or ice during periods of sunlight. Referring specifically to Figure 58, the directional arrows illustrate that the melted ice/snow will travel downward to collect on panels 505. The crease or seam at the middle 507 constitutes the low point where the water will drain into a gutter 509 that is mounted to the front or facing surface of the heating panel 505. A drain line or downspout 511 is provided to collect the water from the gutter 509. As shown, the downspout 51 is secured to the lower cable 410, and traverses outward to one of the columns 420 where the water is then allowed to drain from the array. Each of the rows 503 includes the same drainage structure to drain water from each of the pods 430 in the row. Additional support may be provided between the cables 408 by cross supports 515 that interconnect the adjacent columns 420. The angle at which the pods are disposed can be modified to account for the position of the sun in the winter months. Thus, the area of the heating panels 505 can be minimized thereby increasing the available surface area for producing power from the pods 430.

Figure 60 illustrates yet another preferred embodiment of the present invention that adds an airfoil feature 520 which comprises a plurality of pods that extend from one side or end of the array to the ground. As shown in Figure 60, there are two airfoil features, one at each longitudinal end of the array 460. The airfoil 520 can utilize the same pod and

panel construction as used on the array 460. Figure 60A illustrates an alternative construction for a receiver/pod that can be used to secure the solar panels 522. As shown in Figure 60A, a frame arrangement including a plurality of vertical struts 526 and a plurality of horizontal struts 528 are used to support the solar panels 522. Strut extensions 530 can be used to secure the pods to anchors 534 set in the ground. Alternatively, in lieu of a strut extension 530 that makes direct connection with an anchor, a rod or cable may extend coterminous with one of the vertical struts 526 in order to secure the pods between the array 460 and the ground.

Because high wind conditions could damage the array 460, the purpose of adding airfoils 520 is to stabilize the array 460 during high wind conditions by making the array more aerodynamically shaped.

Although the embodiment of Figure 60 illustrates that an airfoil 520 comprises additional solar panels, it is also contemplated that the airfoil 520 could be made of a fabric, or some other material that does not act as a sun collecting unit. The benefits of providing better aerodynamics would still be achieved with such an airfoil in which a lower pressure is experienced in the area under the array, while a greater pressure exists above the array in order to stabilize the array during high wind conditions.

Referring to Figures 61 and 62, side elevation views are provided to illustrate how airflow, specifically wind, creates pressure gradients on the array 460 with and without the use of airfoils 520. Figure 61 illustrates an array 460 without airfoils. Directional arrows show an airstream that flows over and through the array. In Figure 61, the high pressure areas are indicated by the circular or curved lines, and these lines are labeled on a scale from 1 to 10, 1 being the lowest pressure and 10 being the highest pressure areas. As shown, the highest pressure areas form on the leading edge of the array. Pressure areas are also formed over the respective columns 458 and 420. These higher pressure areas over the columns 458 and 420 are generally advantageous for holding down the array during high wind conditions. That is, the higher pressures over the columns are transmitted as downward forces to the columns that help to hold the columns in place during high wind conditions. However, the particularly high pressure area located at the leading edge of the array is problematic in that this high pressure could cause damage to the front portion of the array, and can otherwise degrade the stability of the array by lifting the front portion of the array away from the ground. Furthermore, significant airflow passes through and underneath the array which can also cause additional movement and vibration of the cables and columns. Referring to Figure 62, the airfoils 520 are added to the array, and

the pressure gradients have changed such that most of the pressure is located on top of the array, and there is very little pressure underneath the array due to the airfoils 520 directing the airflow over the top of the array. A higher pressure area is created just upstream of the airfoil 520; however, because of the angled orientation of the airfoil 520, this increases the downward force of the wind which further stabilizes the array in high wind conditions. In fact, as the wind speed increases, the greater the downward force that is transmitted to the array that assists to stabilize the array. Figure 62 also shows some high pressure areas located over the columns 458 and 420 that also help in anchoring the array to the ground. With respect to the airfoil located at the trailing edge of the array, a pressure gradient also develops, but it is smaller than the pressure gradient located at the upstream or facing side of the array.

The angle 532 that is formed between the airfoil 520 and the surface upon which the system is mounted can be adjusted to best provide the desired air pressure over the system to avoid system damage during high wind conditions. This angle can be adjusted by lengthening or shortening the span of the airfoil 520 between the column 420 and the mounting surface.

For winds that contact the array in the lateral or transverse direction as opposed to the longitudinal direction, as evidenced by the elevation view of Figure 62, wind has very little effect on the array since the profile of the array is minimized with little interfering structure with the airflow. The symmetrical nature of how the pods in each row align with one another, as well as the aligned arrangement of the cables and columns provides this minimum aerodynamic profile for minimum wind interference. By provision of the airfoils 520, the array is better able to withstand high wind conditions and stability is actually increased as wind speeds increase.

Figure 63 illustrates a modification to the embodiment of Figure 14. In Figure 63, the gap or spaced 222 between the pods 214 is filled with a flexible sealing bracket 535 as shown in detail in Figure 64. In the event it is undesirable for water to pass through the gaps between the pods 214, such as when the array is used for a protective parking structure, the flexible sealing bracket 535 spans the gap 222 and interconnects the facing ends of adjacent solar panels 216. The bracket 535 is shown as an I-beam having a pair of flanges 541 interconnected by a web 545. The ends of the solar panels 216 are frictionally engaged between the upper and lower flanges 541 on each side of the web 545. The brackets 535 can be made from flexible and elastomeric material such as synthetic rubber. Because the bracket 535 is flexible, some shifting or movement is allowed between the

facing solar panels 216 in order to dampen or absorb movement of the cables which otherwise may cause a torsional force to be transmitted to the panels.

It shall be understood that the preferred embodiments of the present invention may incorporate any one of the pods/receiver constructions to best fit the particular installation needs. Thus, in some installations, it may be preferable to have curved struts as opposed to straight struts, or vice versa. The particular pod/receiver construction can also be selected based upon its structural rigidity and capability to mount a selected number of solar panels. The number of struts/beams used in any of the pods/receiver constructions can be selected to minimize required materials, but satisfy the rigidity and strength requirements for the particular installation.

Additionally, it shall be appreciated that the number of solar panels mounted to each pod can be configured for the particular installation. Thus, the pods may contain more or less solar panels as compared to what is illustrated in the preferred embodiments.

The flexible electric cables 82a and 82b may be incorporated in each of the embodiments of the present invention in order to allow each of the solar panel arrays to be coupled to a substation for gathering of produced power. As also mentioned, the solar panel arrays may be electrically coupled to sources of stored electric power such as batteries or fuel cells. Other arrangements of electrical cables may be used to most effectively transfer power from the solar panels to the power storage location or to a substation.

It will also be appreciated that due to the unique manner in which the solar panels may be supported by the modular nature of the pods, there is almost a limitless combination in the shape and size of an array that can be constructed for installation. The cables and columns can be arranged to provide the necessary support for not only very differently sized and shaped arrays, but also arrays being either ground mounted or overhead mounted.

Those skilled in the art will recognize that the present invention may be manifested in a variety of forms other than the specific embodiments described and contemplated herein. Accordingly, departures in form and detail may be made without departing from the scope and spirit of the present invention as described in the appended claims.

Figure 65 illustrates another embodiment of the present invention in which a capability is provided for selectively tensioning one or more of the cables used to support the solar panels. This embodiment shows a solar panel array 500 including a plurality of solar panels 504 mounted to respective pods/receivers 502. Vertical columns 560 are

arranged at ends of a span in which an upper main cable 508 and a lower main cable 510 extend between the columns 560. A continuous interconnecting cable 514 traverses between the upper and lower cables. Anchor lines/cables 512 connect to the upper ends of the columns 560 and extend to the ground adjacent the columns.

Continuous interconnecting cables 514 may be selectively tensioned in order to provide the adequate rigidity and support for the overhanging pods 502. Detail A in Figure 65 is enlarged in Figure 66 to illustrate a tensioning device/mechanism 516 used to selectively tension cable 514. It shall be understood that each one of the points of intersection between cable 514 and the upper cable 508 and lower cable 510 may include a respective tensioning device 516. In the event that each of the intersection points include a tensioning device, the cable 514 can therefore be conveniently tensioned along its entire length by only having to secure and manipulate the free end of the cable.

Referring specifically to Figure 66, the tensioning device 516 is shown in connection with one preferred embodiment of the present invention. Lower cable 510 acts as the mounting support in which to selectively tension the cable 514. The tensioning device 516 is characterized by a base 518 in the form of a plate, and a plurality of cable clamps 521 that are used to secure the base 518 to the lower cable 510. Alternatively, another base plate 518 (not shown in Figure 66) can be used in which the other elements of the tensioning device 516 are located between the base plates, and the base plates are secured to the cable 510 by the use of threaded bolts in lieu of the cable clamps 521.

A hub 523 is rotatably secured to an upper end of the base 518 and the hub mounts a roller 524 which receives the cable 514. Also referring to Figure 67, additional details of the tensioning device are shown. After the cable 514 has been placed under a desired amount of tension, locking members 526 engage the cable 514 and hold the cable 514 against the roller 524. The locking members 526 may be provided in pairs by use of an interconnecting adjusting rod 528 which spaces the locking members 526 at a desired distance for optimum engagement against the cable 514. Locking pins/bolts 519 lock the locking members 526 in place against the cable 514. The locking pins 519 may be routed through threaded openings (not shown) in the base 518 or may otherwise be attached to the base 518 so that one end of the locking pins can engage the locking members 526. As shown in Figure 67, a channel 530 is formed in the roller 524 to receive the cable 514. Figure 67 also shows an abutting pair of base plates 518 having a complimentary opening formed therethrough for receiving the lower cable 510. The base plates 518 are secured to one another to hold the cable 510 as by the cable clamps/bolts 521.

The tensioning device illustrated in Figures 66 and 67 may be used for selective tensioning of any of the cables in the system of the present invention. This cable tensioning capability can also be modified such that only selected tensioning devices have a locking feature for locking the cable to be tensioned, while other tensioning devices simply have rollers that allow the cable to move through the device so that the cable is locked in place at another of the tensioning devices.

Figures 68-71 illustrate yet another preferred embodiment of the present invention. Two spans of pods 502 are hung between outer rows of columns 560 and one interior row of columns 560. Catenary cables 542 are also shown along with their corresponding catenary interconnecting cables 544. In this embodiment, the solar panel array 500 is provided in which a supplementary means is provided for producing power in the form of vertical axis windmills 540 that are selectively mounted to the columns 560. A vertical axis windmill in the present invention includes those power producing windmills that rotate about an axis that extends vertically. Vertical axis windmills of the type shown in Figure 68 have a number of advantages in terms of spaced savings, efficiency in producing power, and minimizing materials. One example of a vertical axis windmill includes a Ropatec™ windmill. As shown, the same columns 560 which support the pods 502 can also be used as the central support which remains stationary in the windmill, and about which rotate the blades or fins of the windmill. As best seen in Figures 69 and 71, the vertical axis windmill 540 has blades or vanes that are configured in a circular cage 561 about the column 560. The cage 561 rotates about the column 560 as powered by wind that strikes the blades of the cage. Thus, the vertical axis windmills 540 incorporate the columns 560 which are extended in length to provide a central support for the surrounding cage 561. Figure 69 also illustrates airfoils 534 that can be used to modify the airflow over the array. As discussed above with respect to Figure 62, varying pressure gradients may be established by including or not including airfoils. Also, whether airfoils are used or not, there is a tendency for air traveling over and around the array to have a higher pressure at the locations of the columns 560. Therefore, mounting the vertical axis windmills about the locations of the columns provides increased airflow speed which in turn, increases wind energy that can be used to drive the windmills. This unique aspect of the present invention in terms of creating optimal pressure gradient conditions around the vertical axis windmills can greatly enhance the overall power production of the system. Figure 70 is a plan view of the embodiment of Figure 68, illustrating the locations of the vertical axis windmills. Figure 71 shows how the vertical axis windmills 540 are formed

as part of the columns 560, and wherein the vertical axis windmills extend above the level of the solar panels thereby ensuring that the desired arrangement and spacing of the solar panels is not disrupted.

Figure 72 illustrates another preferred embodiment of the present invention in which a compression truss structure is utilized to support an overlying convex arrangement of pods 502 with solar panels 504. More specifically, Figure 72 illustrates an upper main support member 552 and a plurality of pods/receivers 502 mounted on the upper support member 552. The upper member 552 can be a cable, or can be a rigid member such as a tube in which the upper support member can also function as the roof top or roof support for an underlying structure (not shown) located beneath the solar panel arrays. A lower main support cable 554 is also provided along with a plurality of interconnecting compression members 556 that interconnect the upper support member/cable 552 to the lower support cable 554. The interconnecting compression members 556 may be standard pipe, structural tubes, or other rigid supports. The convex mounted solar panels 504 on the pods 502 therefore produce a compression force against the truss formed by the combination of the upper and lower cables and the interconnecting compression members. Figure 72 also provides a unique arrangement in which the pods mounted closest to the columns 560 are reverse or concave mounted. In this reverse mounting, the reverse or concave mounted pods 565 are mounted on the lower cables 554 that extend above the upper cable/support 552 since the lower cable 554 continues in an upward arc as shown. The points where the cables/supports 552 and 554 intersect are shown as inflection or intersection points 558. The cables 552 and 554 may be secured to one another at these inflection points 558 by pivot connections.

Figure 73 illustrates a modification to the embodiment of Figure 72 in which two spans are provided along with vertical axis windmills 540 located at the columns 560. The embodiment of Figure 73 illustrates that the solar panel arrays 500 are used to cover a structure such as a building having a roof 566, and one or more skylights or openings 568 formed in the roof 566. Also in Figure 73, the upper main support is shown as a cable 570 in which compression trusses are defined by pairs of upper and lower cables 570 and 554, and interconnecting vertical compression members 556. The embodiment of Figure 73 also provides the crossing arrangement of the upper and lower cables in which the reverse mounted end pods 565 are located adjacent to the columns. The embodiment of Figure 73 is ideally suited for incorporation within a building structure. The columns 560 may be vertical columns of the building or load bearing walls of the building. As mentioned, the

vertical axis windmills 540 provide supplementary power and the combination of the windmills and the solar panels may provide adequate power for most of the operating requirements for the underlying building.

In lieu of element 566 denoting a roof with openings, element 566 may also denote some other type of protective covering such as a an impermeable membrane made of plastic or a permeable membrane of cloth to provide shelter under the array of solar panels. For example, if the solar array is intended to cover crops, the element 566 may denote a covering of a particular density/porosity allowing a desired amount of sunlight passage best suited for the particular crop chosen. The covering can also be used to protect the crop from hail damage thus the covering can also be constructed to strength specifications to withstand potential hail damage.

Figure 74 is a perspective view of the embodiment of Figure 73 with the windmills 540 and the roof 566 removed for clarity. As shown, the reverse mounted pods 565 form humps 547 at the center area of the array as well as at the opposing ends of the array. This reverse mounting of the pods 565 may be useful in preventing inadvertent shading of the end mounted pods by the convex pattern of pods 502 located interiorly of the outer pods.

Referring to Figure 75, a further alternative arrangement is provided with respect to a compression truss, and the manner in which pods 502 may be mounted to the compression truss. In the example of Figure 75, the pods 502 are all mounted on the lower main cable 554. This embodiment may also be incorporated over a building structure in which the building has a roof defined by member 582, and the columns 560 could be vertical column supports of the building structure and/or load bearing outer walls of the building. The roof/member 582 may extend outwardly from the building and beyond the most outer or peripheral vertical supports 560. Roof extensions or overhangs 584 may be used to secure cables 586 or tensioning rods to produce the necessary lateral anchoring for the solar panel array. Thus, the overhangs 584 eliminate the need to anchor the columns with anchor lines that extend to the ground. Also in the example of Figure 75, it is noted that the vertical interconnecting members 557 underlying the outermost pods 502 are in compression, while the members 556 are in tension. Thus, in this embodiment, the members 556 could be cables in lieu of rigid members and the members 557 could be rigid members.

Referring to Figure 76, yet another embodiment is provided in which a compression truss is used to support a solar panel array. The upper member 552 in this embodiment can either be the roof of the structure, or an upper chord defining the upper

main support of the compression truss defined, and the pods 502 are mounted above the roof. Specifically, the pods 502 can be mounted on a horizontally extending rigid support member 590 which in turn, rests on the upper member 552 along an apex or upper ridge 592.

Referring to Figure 77, yet another embodiment is shown in which the pods 502 are mounted upon upper support 552, which again may be the roof of the structure or a separate support. In this configuration, the pods 502 follow the contour of the roof and thus present a wedge shaped configuration in the view according to this figure.

Referring to Figure 78, yet another arrangement shown with respect to a compression truss in which the pods 502 are mounted to the upper main cable 570, and the truss with the solar panel array is disposed above the roof 566 of the structure.

Figure 79 illustrates a double span of the embodiment of Figure 78 in which the upper main cables 570 directly receive each of the pods/receivers 502. Figure 80 is an elevation view of the embodiment of Figure 79.

Referring to Figure 81, in yet another embodiment of the present invention, it is contemplated that the solar panels may be arranged to have complex curved or irregular shapes. It may be necessary for the solar panels to cover a structure or object that has an irregular shape, or it may be necessary for the array to avoid an underlying structure having an irregular shape. In lieu of simply eliminating solar panels at that particular location, the present invention provides a means by which the solar panels may remain in a continuous extension creating a complex shaped solar panel array. As shown in Figure 81, each of the adjacent groups of panels 504 within the pod 502 extend at different angles producing a complex shaped pod. As also shown, the groups of panels 504 extend at these differing angles based upon the orientation of the cables 570 that extend in a non-parallel manner.

This rotated/irregular arrangement of the pod 502 can be achieved by angularly adjustable connections between the pod members and the cables as discussed with respect to Figures 83 and 84.

Figure 82 illustrates the embodiment of Figure 81 with the panels 504 removed thus exposing the components of the pod 502. The construction of the pod in Figure 82 is similar to what is shown in the embodiment of Figure 50, and the same reference numbers used in Figure 82 are used to denote the same structural members as shown in Figure 50. The difference between Figures 50 and 82 is that the supports 474 in Figure 82 are not shown as extending continuously between the cables 570 and rather, are separated and

individually mounted to the supports 472. The individual mounting of supports 472 allows adjacent groups of panels 504 to separate from one another in the desired irregular configuration.

Figure 83 is an enlarged fragmentary elevation view of the connection details between a beam 470 and a cable 570 utilizing an angularly adjustable connection in the form of a ball and socket combination. Specifically, this figure illustrates a clamping block 687 used to support the connection. Bolts 688 secure the block 687 to the cable 570. A socket 689 is integrally formed with the block 687 and receives a ball extension 684 extending from the beam 470. A rotation control pin 686 is used to limit or otherwise define the rotational capability of the beam 470 with respect to the cable 570. As shown, the beam 470 can therefore be secured to the cable 570 and yet can be oriented in a desired angular orientation to produce a pod having the complex shape. It is also contemplated that the pin 686 can be removed therefore allowing the beam 470 to freely rotate within the geometric limits of the ball joint connection.

Figure 84 is another enlarged fragmentary elevation view of the connection details between a beam 470 and a cable 570 in which the desired orientation of the beam to the cable is achieved by use of another type of angularly adjustable connection in the form of shims 690 that are inserted between the block 687 and the beam 470. The shim 690 is simply bolted between the exposed surface of the block 687 facing the beam and the facing surface of the beam flange. The shims 690 can be a single piece or a plurality of shim elements stacked on one another to provide the desired orientation of the beam to the cable.

Figure 85 is an elevation view taken along line 85-85 of Figure 82 showing how the intermediate struts 472 are placed in their unique angular orientations with respect to the cables 570. In the example of Figure 85, the orientation of the struts 472 result in the appearance of the struts being progressively rotated about an axis 691.

Figure 86 is an elevation view taken along line 86-86 of Figure 82 showing the panels 504 mounted to the pods. The beams 470 connect to the cables 570 that extend out of plane with one another therefore resulting in the irregular shaped group of panels 504 on the pod.

Figure 87 is a perspective view of another embodiment of the present invention in which compression struts are utilized for mounting of pods 502 in a convex arrangement of two spans of pods. Referring also to the elevation view of Figure 88, the convex arrangement of the spans results in a trough or lowered area 594 that extends between

spans. This embodiment therefore differs from the embodiments shown in Figure 72-74 in that the upper cable 570 and lower cable 554 do not cross one another between the columns 560, therefore there is no inflection point and no reverse mounting of the pods such as those pods 565 shown in Figure 72.

Figure 89 is another perspective view of the embodiment of Figure 87 but showing the array with the panels removed thus exposing the pods.

Figure 90 is an enlarged perspective view of a pod detailing the construction of the pod to include the various supports and struts. Specifically, Figure 90 shows a pod construction including a pair of main beams 470 that extend between cables 570 and a group of four elevated strut assemblies that result in the panels being oriented at a desired angle with respect to a plane defined as extending along the beams 470 and between the cables 570. Each of the strut assemblies includes a riser 623 extending above the beams 470, a cross strut 622 extending orthogonally and interconnecting the beams 470, and panel support struts 624 that directly mount the solar panels. The angled connection between the upper ends of the risers 623 and the cross struts 622 may be selectively adjusted by the use of replaceable shims such as the one shown in Figure 83 in a bolted arrangement in which the shims are fixedly mounted between the upper ends of the risers and the facing surfaces of the struts.

Figure 91 illustrates another preferred embodiment of the present invention in a solar panel array 610 that provides pods 502 with a dual axis tracking capability. More specifically, the pods 502 may be rotated in two distinct axes to allow the panels to track the location of the sun as the earth rotates as described in more detail with respect to Figure 95. One axis of rotation is about the vertical supports 618, and the other axis of rotation is about a horizontal plane thereby enabling the pods to be canted or tilted at a desired angular orientation.

The embodiment of Figure 91 is especially adapted for large open areas in which the solar panels can be disposed in a very large array for maximum power production and the minimum disruption of the ground under the array invites a dual land use application. The spacing of the pods is generally greater as compared to the previous embodiments resulting in less shade produced by the array. The increased amount of passing sunlight between the pods enables a great variety of crops that can be grown directly under the array. The overall support structure for the pods 502 requires minimum materials thereby minimizing disruption of the soil under the array. The only required columns 560 are

those that extend around the periphery of the array thereby leaving the land undisturbed that lies between the peripheral columns.

Referring also to Figures 92-94, it is shown that the exterior columns 560 and anchor lines 512 provide the peripheral support for the array 610, while a series of suspended trusses support the pods in the interior portion of the array. Rigid horizontal support members 612 interconnect the upper ends of the columns 560, and also traverse longitudinally and transversely across the array thereby tying the array together in a unitary construction. A series of trusses are provided to extend within the interior portion of the array thereby eliminating the need to provide intermediate columns in the interior of the array. The trusses are each defined by the combination of a horizontal support 612, upper main cable 614, lower main cable 616, and a plurality of interconnecting and diagonally extending cables 620. Vertical supports 618 carry the pods 502 and as shown, the supports 618 are suspended above the level of the ground with lower ends secured to lower main cable 616. The upper main cable 614 provides upper stability to the vertical supports while the horizontal supports 612 further stabilize the supports 618.

Figure 95 is an enlarged fragmentary perspective view with the solar panels removed to illustrate details of the pod construction that enables the dual tracking function. The pod construction in this embodiment includes horizontal and orthogonally oriented struts 622 and 624 respectively. This strut arrangement is similar, for example, to what is shown in the pod illustrated at Figure 26. Rotation of the pod about the vertical axis defined by vertical support 618 is achieved by a tracking mechanism defined by a rotatable cap 630 driven by a motor 632 mounted to the adjacent strut 622. The motor 632 has a drive shaft (not shown) that interfaces with a series of external gears 639 disposed on the upper periphery of the rotating cap member 630 to provide incremental rotation of the pod about this vertical axis. In order to rotate the pod about the horizontal axis A-A, a tilt mechanism 634 is provided with tilt supports 636, a hydraulic lift 640, and a pinned connection 638. The hydraulic lift 640 raises and lowers the movable upper support 636 thereby allowing the pod to be placed at the desired angular orientation. The hydraulic lift 640 may be powered itself by another motor (not shown) so that independent rotation capability is provided in the two distinct axes.

In accordance with another aspect of the present invention, in lieu of providing a dual axis tracking capability, it is also contemplated that the present invention can provide a single axis tracking capability as shown with respect to the embodiment of Figure 96 in which the pod is rotatable about axis A-A. In Figure 96, the pods are mounted on a

horizontal support 650 that can extend across the entire span of the array, or at selected locations along the span of the array in which it is desired to have a single axis tracking capability. Accordingly, in lieu of mounting the pods 502 to the vertical members 618, the pod construction can be simplified by eliminating the members 618 and providing the single horizontal support 650. In lieu of eliminating the vertical supports 618, the supports 618 can be used to support the horizontally extending support 650 at intermediate points along a span. A motor 654 is used to rotate the horizontally extending support 650 in which a series of externally mounted gears 652 mate with a drive shaft (not shown) of the motor for incremental rotation control.

Certain cable trusses may be difficult to install as they have a tendency to twist or rotate until they are connected to the transversely extending pod beams. These difficult to erect trusses are primarily those with the upper and lower main cables and compression struts used to interconnect the upper and lower main cables. To facilitate ease of construction, the present invention provides a temporary truss assembly that provides the necessary rigidity to support the truss in a stationary condition as it is assembled. Accordingly, referring to Figures 97-100, this aspect of the invention will be explained.

First referring to Figure 97, an elevation view is provided showing a construction step in the creation of an array incorporating compressions trusses. The compression trusses each include upper cable 570, lower cable 554 and interconnecting compression members 556. The compression truss may be first assembled on the ground and then placed upright in the vertical orientation as illustrated. Once a plurality of compression trusses is assembled, they may be spaced apart from one another in the orientation in which they are to accept the respective pods. When the compression trusses are oriented vertically, a plurality of weights 602 may hang from the truss by hangers 600. The weights 602 help to stabilize the truss in a desired vertical orientation once at least some of the main pod beams are connected in their transverse orientation between the trusses. The weights 602 also cause the compression trusses to be pre-stressed so that the trusses extend in the desired orientation to readily accept the pods without significant additional shifting or adjustment of the trusses or the pods. Once the pods are mounted between the parallel spaced trusses, the weights 602 can be selectively removed. Thus, use of the weights 602 can significantly reduce any undesirable shifting or misalignment of the trusses which otherwise makes mounting of the pods more difficult.

Figure 98 illustrates another example of a truss and the manner in which the weights 602 may be hung to stabilize trusses during construction. In this figure, the

weights 602 can be hung along the span so that both the upper and lower main cables receive pre-stressing forces to correctly align the truss for final positioning with respect to the pods.

Referring to Figure 99, it is also contemplated that the trusses can be constructed including the use of a plurality of temporary supports to orient each of the truss members in the desired positions. One or more of the temporary supports may remain to complete the truss assembly in which the temporary supports are compression members. The temporary supports include interconnecting tubes or posts 700 that perform the same function as the interconnecting compression members 556. Thus, the tubes/posts 700 may also remain in the final step of the truss construction as members 556, or the tubes 700 can be replaced with interconnecting cables. The tubes 700 are secured to the upper and lower cables 570 and 554 by pinned connections as detailed with respect to Figure 99A. As shown in the enlarged view of Figure 99A, each end of the tubes 700 are secured within a primary connecting bracket 702. A pin 704 connects the primary bracket 702 to a cable clamping mechanism 706. The mechanism 706 may be of two part construction as shown with bolts 708 which secure the mechanism 706 to the adjacent cable 570. The tubes 700 may rotate about the pins 704, or it is also contemplated that pin 704 can be replaced with a rigid element thereby preventing any rotation of the tube 700 with respect to the upper and lower cables when a more rigid truss construction is desired. A plurality of tubes 700 can be located along the truss to provide the necessary temporary rigidity to the truss, and the tubes 700 can be connected to one another as by adjustable rods 710. The ends of the rods 710 connect to the tubes 700 as by secondary brackets 712 that may also incorporate a pinned feature so that the ends of the rods 710 can rotate about pins 714 incorporated in the secondary brackets 712. The length of the rods 710 can be adjusted by the turnbuckle threaded arrangement of the rods in which threaded members 711 are received within threaded openings formed at each end of the rods 710.

Figure 100 is an elevation view of another feature of the temporary or permanent support features of a truss in which the primary bracket extends on both sides of the supporting cable. More specifically, Figure 100 shows a primary bracket 720 with opposing receiver ends 722 that can receive a pair of tubes 700. The bracket 720 may be in two piece construction in which the halves are joined to secure the tubes 700. A series of bolts 724 interconnect the halves as shown. This arrangement for the tubes 700 allows temporary or permanent support to a truss in which the truss may support an overhead vertical support design, such as the vertical supports 618 shown in Figures 92 and 93.

Figures 101-104 provide yet another embodiment of the present invention. Figure 101 is a perspective view showing that general support structure in this embodiment is the same as illustrated with respect to the embodiment of Figures 91-94. More specifically, the support structure for the solar panel array in this embodiment includes columns 560 that are located around the periphery of the array, horizontally extending support members 612, upper cables 614, lower cables 616, and interconnecting cables 620. The distinction in this embodiment however is that the pods 502 are not mounted for dual axis tracking capability but rather, are mounted for single axis tracking capability, such as illustrated in Figure 95. More specifically, it is shown that the vertical support 618 provides interior support for a horizontal member, such as horizontal support 650 as shown in Figure 95, to which the pods 502 are mounted. Figures 102 -104 illustrate the linear arrangement of the pods 502 and the relatively larger spacing of the pods as compared to the prior embodiments. Thus, this embodiment is also conducive to the dual land use as described with respect to the embodiment of Figures 91-94.

Figures 105-108 illustrate yet another embodiment of the present invention in which single tracking of the pods can be achieved. Figure 105-107 show that the pods 502 are mounted again in a greater spacing as compared to many of the earlier embodiments. The enlarged perspective view of Figure 108 provides yet another example of a particular pod construction that can be used for a single tracking feature of the present invention. The solar panels have been removed to illustrate the pod construction. The pod in this example comprises main beams 672 that extend between adjacent cables 570, along with stiffening supports 674 spaced between the beams 672. Additional torsional resistance can be provided with crossing cables 577. A riser 678 is connected at its lower end to one of the supports 674 and the riser 678 extends above the cables 570. Cables 680 can be used to support the vertical extension of the riser 678. Struts 622 and 624 are provided for direct mounting of the solar panels. Diagonal strut 676 supports the struts 622 and 624. The single axis tracking is achieved by the rotation of diagonal strut 676 by a motor 679 mounted adjacent to the strut 676 as shown..

Figures 109-111 illustrate yet another preferred embodiment of the present invention in the form of an array supported by compression trusses, and in which the pods 502 are disposed for single axis tracking along a horizontal rotation axis. As shown in Figures 109 and 110, the pods are disposed such that they are mounted at a height even with the upper support/cable 570. The pods are intended to have the ability to rotate about a horizontal axis and therefore, the pod construction shown in Figure 96 can be adopted

for this embodiment in which the pods are rotatable about one or more horizontally extending members 650.

Figure 112 and 113 provides another embodiment similar to the embodiment illustrated in Figures 109-11 in which a single tracking function can be realized. The distinction in the embodiment of Figure 112 and 113 is that the pods 502 are mounted at the same height across the entire solar panel array, and the pods do not follow the shape of the compression trusses. This uniform height for the pods is achieved by extending the compression members 556 beyond the upper and lower cables. This configuration is best seen in Figure 113 where the compression members 556 extend at varying heights above or at the level of the upper cable 570 to present the pods 502 in the linear orientation. The construction of Figure 100 may be adopted in which tubes 700 that extend above the cable 570 may be selected in length to provide the linear orientation of the pods 502. This particular arrangement for the pods in Figures 112 and 113 may be advantageous to prevent inadvertent shading that may occur by a convex mounted arrangement of the pods. The construction of Figure 100 may also be adopted to provide the single axis tracking capability in this embodiment.

Figures 114 and 115 illustrate yet another preferred embodiment of the present invention including a solar panel array that incorporates a single axis tracking capability for pods that are arranged in linear and horizontally extending groups/rows. Referring to Figure 115, the distinction in this embodiment is that the pods are mounted at a height between the upper cables 570 and the lower cables 554. Thus, the pods reside at a height which substantially bisects a horizontal line extending between the upper and lower cables. This arrangement of the pods may be advantageous for locations where high winds are a concern, and a lower disposition of the pods closer to the ground may reduce the wind loading on the overall structure. The construction of Figure 100 may also be adopted to provide the single axis tracking capability in this embodiment.

Figure 116 illustrates yet another embodiment in which the single tracking feature allows selected pods to be rotated at a reverse inclination to account for shading that may inadvertently occur by the overall arrangement of the pods in a convex or concave arrangement. As shown in this figure, all of the pods 502 are oriented in a right-facing orientation, while the pod 802 is oriented in a left facing orientation.

Figure 117 is a partial fragmentary perspective view of an embodiment of the present invention in which tubular shaped PV elements are provided. As mentioned, there are a number of advantages in using tubular shaped PV elements, and such PV elements

are ideally suited for use with the cable supporting systems of the present invention. The tubular PV elements 804 can be supported by any of the pod constructions illustrated in the present invention. The linear spacing of the PV elements can be chosen to allow the desired amount of sunlight to pass through the array. Alternatively, a reflecting membrane may be incorporated to allow reflected light to be used to supplement power generation. A membrane, such as a covering/membrane 440 shown in Figure 47 may be used for purposes of reflecting light back onto the PV elements. The membrane may be coated with a reflective composition, or the membrane may be constructed of a reflective material. Although Figure 117 shows one example of an embodiment that incorporates the tubular PV elements 804, it shall be understood that any of the embodiment of the present invention can be modified as shown in the Figure 117 to receive the tubular PV elements in lieu of the solar panels 504. Additionally, the tubular PV elements may be provided in combinations with the panels 504 in selected pods and selected portions of an array.

Figure 118 is a schematic elevation view of yet another embodiment of the present invention showing a single axis tracking capability in which the pods 502 are able to slightly rotate in a biased arrangement to compensate for high wind gusts or other inclement weather situations in which a rigid connection might otherwise damage the tracking hardware. More specifically, Figure 118 shows an upper cable 570 of a truss and a pair of diagonal support members 810 mounted to the upper cable. The support members 810 converge and support a horizontally extending rotational member 813 which provides rotation along a horizontal axis. Rotational member 813 may be rotated by a motor (not shown), such as the arrangement of the motor 654 that rotates horizontal member 650 shown in Figure 96. The pod 502 is mounted to the rotational member 813 at a point generally midway along the length of the pod. Figure 118 also provides a biasing cable 812 and springs/biasing elements 814 located at opposite ends of the cable 812. The cable 812 is secured at its opposite ends to the opposing ends of the pods 502. The cable 812 is routed through a roller 816 mounted to the pod truss or mounted to the cable 570. The pod 502 and other pods mounted to the rotational member 813 are angularly adjusted by the single axis tracking assembly, and the gearing of the tracking assembly is such that there is some amount of small rotational capability compensated for by the biasing elements 814. The biasing elements 814 are able to bias needed rotation of the pods to prevent damage to the tracking assembly in the event a wind force would otherwise cause undue stress on the pods or the tracking assembly. A rigid and unbiased

connection between the tracking assembly and the pods and support members is subject to greater damage in the high wind conditions.

It is contemplated within the present invention that the single and dual tracking capabilities of the pods carrying the solar panels be controlled by an automated system in which one or more controllers are programmed to provide output signals to the tracking mechanisms. The controller(s) automatically adjust the orientations of the pods based upon a computer program that most efficiently orients the pods for capture of sunlight. Accordingly, the controller(s) may be computing devices with appropriate software/firmware to generate appropriate signals/commands to the motors which control the rotation of the installed tracking mechanisms. The automated system may provide offsite control for an operator in which the controller(s) communicate with the tracking mechanisms by a wireless communications protocol. A web based solution can be provided in which the operator is provided various user interface options for controlling the tracking mechanisms. The user interfaces may also provide the user the ability to manually adjust the pods to account for other circumstances in which it may be desirable to adjust the positioning of the pods.

In connection with this automated system, Figure 119 is provided to illustrate one preferred embodiment of the control system of the present invention that is used to control various operating parameters of the solar panel arrays. Figure 119 specifically illustrates three separate and remotely located solar panel arrays, marked as Array 1, 840; Array 2, 842; and Array 3, 844. Each of the arrays has one or more control devices which control some aspect of the operation of the corresponding arrays. As illustrated, Array 1 has control device 846, Array 2 has control device 848, and Array 3 has two control devices, 852 and 854. The control devices may include motors that are used to operate tracking mechanisms to adjust the positions of the pods. The control devices could also be peripheral systems that enhance the operation of the arrays, such as an automatic cleaning system that generates a spray of water to clean the arrays. Arrays 2 and 3 are also shown as having monitoring devices 850 and 856 that may be used to monitor some aspect of the operation of the arrays. For example, the monitoring devices 850/856 could be devices to include electrical energy monitoring devices that monitor the electrical output of the arrays, temperature sensors, and/or cameras that allow an operator to view the arrays within the surrounding environmental conditions.

Each of the control and monitoring devices of the arrays communicate with at least one controller 862 through a communications link 858 such as the Internet. The controller

862 is depicted as a conventional computer with a user interface 860 in the form of a user screen. The controller 862 may include software/firmware that sets forth control parameters for adjusting the angular positions of the arrays based upon seasonal changes in which the sun traverses different paths across the sky as the earth rotates. The controller 862 generates control signals that are sent through the communication link 858, and received by the control and monitoring devices. Each of the arrays can be continually controlled in order to maximize the positioning of the arrays with respect to orientation of the individual pods for receiving maximum sunlight. It is also contemplated that a hand-held controller 864 could also operate the arrays in the same manner as the controller 862.

One clear advantage of the system shown in Figure 119 is the ability to remotely and centrally control a plurality of arrays located at different locations. Individual control parameters can be generated by the controller for each array at each separate location thereby providing great flexibility for a control system in which electrical energy output is maximized.

As described above with respect to the preferred embodiments, solar panel arrays can be supported with truss arrangements characterized as tension, compression or combined tension/compression trusses. Tension trusses include those arrangements of cables in which the upper and lower cables are interconnected with flexible cable members. Compression trusses can generally be characterized as those that have rigid compression members extending at least between the upper and lower cables. The compression trusses may further be characterized by upper and lower members that are rigid, and curved or straight to match the desired shape of the truss. The trusses have shapes to allow convex, concave, or combinations of concave and convex mounted pods. The interconnecting members may be vertically or diagonally oriented. The interconnecting members in the trusses may be a combination of compression members and/or tension members.

In addition to the varying truss configurations, the present invention also provides a number of options in terms of how to employ the columns to support the array. Columns may be interspersed throughout the array in both column and row arrangements. As mentioned with some of the embodiments, it is also contemplated that only perimeter columns are provided, and the spans are supported interiorly with truss arrangements thereby eliminating the need for interior columns.

The solar panel arrays may also be configured to cover a designated area to include areas in which irregularly shaped objects are present and the array can be modified to

cover such irregularly shaped objects without having to eliminate solar panels at that location. The individual pods therefore can adopt the unique constructions allowing groups or individual panels to be mounted in offset arrangements.

Although the embodiments primarily show single cables as primary support elements, it is also possible in the present invention to increase the overall load bearing capacity of the array by using multiple cables that span the required distances.

Vertical structural stabilization for the arrays is provided by the combination of trusses which interconnect with columns. The columns are themselves stabilized by anchor lines. Horizontal forces generated perpendicular to the cable trusses are stabilized by linking the truss members of the pods between the trusses. The mechanical linking of the pod struts between the cable trusses creates a single structural member over the entire array which can better withstand forces generated in all directions. Additionally, the manner in which the pod struts are secured to the trusses can either be by a rigid connection, or by a flexible connection.

There are a number of environmental benefits to be achieved at the various solar panel arrays of the present invention. The inherent structural efficiency of the cable trusses requires less construction material. The columns and the anchor lines are the only elements that require contact with the ground and therefore, there is a minimal foundation footprint. Installation of the arrays is therefore capable of being handled by light machinery, which also minimizes disturbance to the existing soil structure and vegetation. Because of the suspended manner of the solar panels, in many cases, the system can be installed without a requirement for grading or reshaping of the land at the installation site.

This solar panel array of the present invention also provides a number of benefits with respect to water conservation. The arrays reduce water evaporation under the arrays, which is particularly advantageous when the arrays are positioned to cover water surfaces, such as canals, aqueducts, storage ponds, small lakes, etc. Also, as contemplated by the discussed embodiments, a drainage system may be provided around the solar panels to collect rainwater/snow and this collected water may be stored for required maintenance and cleaning of the solar panels.

Because of the extremely flexible design parameters achieved with the present invention, spacing of the solar panels can be designed in almost a limitless number of patterns which therefore allows a designer to precisely determine the amount of light that may be allowed to pass through the solar panel arrays to promote ideal growing conditions for vegetation or crops covered by the arrays. In general, the partial shading effect

provided by the solar panel arrays provides ideal growing conditions for many cultivated crops. Further, suitable ground cover vegetation can be selected, such as plants that require very little water and may, therefore also reduce fire danger as compared to other vegetation which may normally cover the area.

Dual land use is also achieved by the solar panels of the present invention since the flexible designs provided by the present invention encourage a number of types of structures that may be housed underneath the arrays. For example, the arrays provide a number of options for incorporating buildings under the solar panel arrays, and also using the cables and trusses of the supports to be integrated within the buildings themselves.

The repetitive addition of cable trusses and pods allows the arrays to be built in limitless shapes and sizes which is an ideal solution for installation of the arrays over a number of other manmade structures such as parking lots, roads, and other transportation corridors.

Preassembly of the pods as well as the trusses may be achieved offsite. Therefore, for difficult to access locations in which the arrays may be installed, preassembly of the components prior to arriving at the work site greatly enhances the ability of the system to be installed at such difficult locations. Furthermore, as mentioned with respect to the embodiment of Figures 81-86, the pods may be arranged in an irregular manner to cover complex shaped obstacles, or to otherwise traverse an irregular manner based upon the underlying ground conditions.

The varying pod embodiments of the present invention also provide ideal conditions for supporting a number of types of PV panel types to include not only the traditional planar or plate shaped PV panels, but also cylindrical/tubular PV elements which incorporate a self-tracking feature. It shall therefore be understood that any of the embodiments of the present invention can take advantage of either a the planar solar panel construction, or use of the cylindrical PV elements.

With respect to durability, the solar panel arrays of the present invention are also ideal since the arrays may incorporate desired aerodynamic properties to prevent damage in high wind conditions. The use of airfoils allows an array to maintain a desired configuration for handling various wind conditions.

Also, the present invention provides a centralized control system whereby an entire array and multiple remotely located arrays can be controlled. This remote control can result in an increased energy output from the system, to protect the system from extreme

weather by rotating the panels in a desired configuration to handle wind/other environmental conditions.

The solar panel arrays of the present invention may also incorporate single and dual axis tracking capabilities in order to optimize sunlight capture. The single and dual axis capabilities may be incorporated on various types of truss arrangements to include concave and convex truss arrangements.

While the present invention has been set forth with respect to a number of differing embodiments, it shall be appreciated that other changes or modifications of the invention may be achieved in accordance with the scope of the claims appended hereto.

What Is Claimed Is

1. A solar panel system comprising:
a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;
a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between a plurality of columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables, wherein at least one of said interconnecting members is a rigid compression member.

2. A solar panel system comprising:
a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;
a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between a plurality of columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables; and
at least one tensioning mechanism for selectively tensioning said at least one interconnecting member, said tensioning mechanism having a base secured to at least one of said upper and lower cables, a roller rotatably mounted to said base, and a locking element for selectively locking the at least one interconnecting member that contacts said roller thereby locking said interconnecting member against said roller when said interconnecting member is selectively tensioned.

3. A system as claimed in Claim 2, wherein:
said at least one interconnecting member is continuous and extends continuously between said upper and lower cables and through said at least one tensioning mechanism.

4. A solar panel system comprising:
a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;
a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between a plurality of columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said

trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables; and

at least one vertical axis windmill incorporated on one of said columns, said vertical axis windmill comprising an upper end of said one of said columns, and a plurality of vanes disposed around said upper end of said column, said plurality of vanes being rotatable about said upper end of said column by wind that strikes said vanes, wherein said vertical axis windmill provides supplemental power to said solar panel system.

5. A system, as claimed in Claim 4, wherein:

said at least one vertical axis windmill comprises a plurality of vertical axis windmills incorporated at respective upper ends of said columns.

6. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;

a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between a plurality of columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables; and wherein said panel receivers are mounted over said upper cables in a convex mounting configuration.

7. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;

a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between a plurality of columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables; and wherein said panel receivers are mounted over said upper cables in a concave mounting configuration.

8. A system, as claimed in Claim 1, further including:

a roof disposed under said solar panel array and supported by said solar panel system.

9. A system, as claimed in Claim 8, wherein:

said roof includes a plurality of openings forming skylights.

10. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;

a support system for supporting the panel receivers, the support system comprising a plurality of trusses spaced from one another wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) a plurality of interconnecting members for interconnecting the upper and lower cables; and

a protective covering secured to said plurality of lower cables and extending under said array and over a substantial portion of a length and width of said array, said protective covering being selected from a group consisting of an impermeable membrane and a permeable membrane with a selected porosity enabling a selected amount of sunlight to pass through said protective covering.

11. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said plurality of panel receivers being arranged in a combination defining a solar panel array;

a plurality of columns positioned at least at exterior edges of said solar panel array;

a plurality of cables extending between respective columns, said panel receivers being supported by pairs of respective upper cables extending non-parallel to one another;

a plurality of complimentary lower cables extending between said columns;

a plurality of angularly adjustable connections that interconnect at least one of said panel receivers to said upper cables, wherein at least some of said solar panels extend at different angles as compared to other solar panels of said plurality of solar panels thereby forming at least one panel receiver having a complex non-planar shape.

12. A system, as claimed in Claim 11, wherein:

said angularly adjustable connection includes a ball and socket combination including a socket member and a ball member.

13. A system, as claimed in Claim 11, wherein:

said angularly adjustable connection includes at least one shim placed between one of said upper cables and one of said panel receivers connected to said one of said upper cables.

14. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said plurality of panel receivers being arranged in a combination defining a solar

panel array, at least one of said panel receivers including a strut support assembly including a pair of lower struts extending transversely between a pair of adjacent upper cables of the system, at least one riser extending from each of said lower struts, at least one cross strut interconnecting said lower struts, and at least one panel support strut mounted over said cross strut, and further wherein said panel support strut is oriented at a desired angle for mounting of said solar panels thereover.

15. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said plurality of panel receivers being arranged in a combination defining a solar panel array, said panel receivers being selectively spaced from one another in respective columns and rows;

a plurality of columns positioned at least at exterior edges of said solar panel array;

a plurality of cables extending between respective columns for supporting said solar panel system;

vertical supports secured to said cables for mounting said panel receivers;

a plurality of tracking mechanisms incorporated on each of said vertical supports for selectively rotating said panel receivers in at least one axis of rotation, said at least one axis of rotation including at least one of a vertical axis of rotation and a horizontal axis of rotation.

16. A system, as claimed in Claim 15, wherein:

said plurality of tracking mechanisms include a dual axis tracking mechanism having means for rotating a corresponding panel receiver about a vertical axis defined along a vertical member to which the panel receiver is mounted.

17. A system, as claimed in Claim 15, wherein:

said plurality of tracking mechanisms includes a single axis tracking mechanism having means for rotating a horizontal support to which a corresponding panel receiver is mounted.

18. A method of assembling a solar panel support structure for supporting a plurality of solar panels mounted to said support structure, said method comprising the steps of:

providing a plurality of cables including at least one upper cable, at least one lower cable, and at least one interconnecting member interconnecting said upper and lower cables, said interconnecting member being selected from the group consisting of a tension member and a compression member;

providing a plurality of temporary supports extending between selected combinations of said plurality of upper and lower cables, and said interconnecting member, said plurality of temporary supports being rigid members for maintaining said plurality of cables in a desired shape;

preassembling said plurality of cables and said at least one interconnecting member into trusses;

arranging said trusses in spaced relationships with one another and securing said trusses to columns;

attaching weights to said trusses in order to stabilize said trusses;

securing a plurality of panel receivers to said trusses, each of said panel receivers having a plurality of solar panels mounted thereto; and

removing said weights.

19. A temporary support truss especially adapted for temporarily supporting a permanent support truss in a solar panel system including a plurality of solar panels mounted within said system, comprising:

a plurality of cables and interconnecting members forming a truss of a desired shape; and

a plurality of temporary struts extending between selected combinations of said cables and said interconnecting members, wherein said temporary struts maintain said cables and said interconnecting members in a desired shape and configuration.

20. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;

a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables; and

at least one primary bracket having opposing receiver ends for receiving interconnecting members that interconnect said upper and lower cables, said primary bracket being installed such that said opposing receiver ends extend beyond opposite sides of a cable to which the primary bracket is mounted.

21. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;

a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between columns, each of the panel receivers being secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables, said plurality of panel receivers being oriented in a plurality of spaced rows, and each of said panel receivers being mounted on a corresponding horizontal rotational member in each of said rows; and

a tracking mechanism incorporated on each of said horizontal rotational members for selectively rotating said panel receivers about a horizontal axis extending through each of said horizontal rotational members.

22. A system, as claimed in Claim 21, wherein:

said panel receivers are arranged in a convex mounting over said plurality of upper cables.

23. A system, as claimed in Claim 21, wherein:

said plurality of panel receivers in each of said rows extends substantially planar with one another, and each of said rows of said panel receivers being mounted between pairs of vertical members secured to convex shaped upper cables.

24. A system, as claimed in Claim 21, wherein:

said plurality of panel receivers are disposed at a height above said upper cables or at a between said upper and lower cables.

25. A system, as claimed in Claim 21, wherein:

said plurality of panel receivers are disposed at a height between said upper cables and said lower cables.

26. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said plurality of panel receivers being arranged in a combination defining a solar panel array, said plurality of solar panels including a plurality of tubular shaped PV elements extending substantially parallel to one another and spaced from one another along corresponding panel receivers;

a plurality of columns positioned at least at exterior edges of said solar panel array;

a plurality of upper cables extending between respective columns, said panel receivers being mounted to pairs of respective upper cables;
a plurality of complimentary lower cables extending between the columns;
a plurality of interconnecting members interconnecting respective upper and lower cables.

27. A solar panel system comprising:

a plurality of panel receivers each having a plurality of solar panels mounted thereto, said panel receivers being arranged in a combination defining a solar panel array;
a support system for supporting the panel receivers, the support system comprising a plurality of trusses supported between columns, wherein each of the panel receivers are secured to the trusses at spaced locations along adjacent trusses, each of said trusses comprising (i) an upper main cable, (ii) a lower main cable and (iii) at least one interconnecting member for interconnecting the upper and lower cables;
a tracking assembly for rotating at least one of said panel receivers; and
a biasing assembly secured to at least one of said panel receivers for selectively biasing rotation of said panel receiver, said biasing assembly including at least one biasing cable extending between opposing ends of said one panel receiver, and at least one biasing element incorporated on said biasing cable.

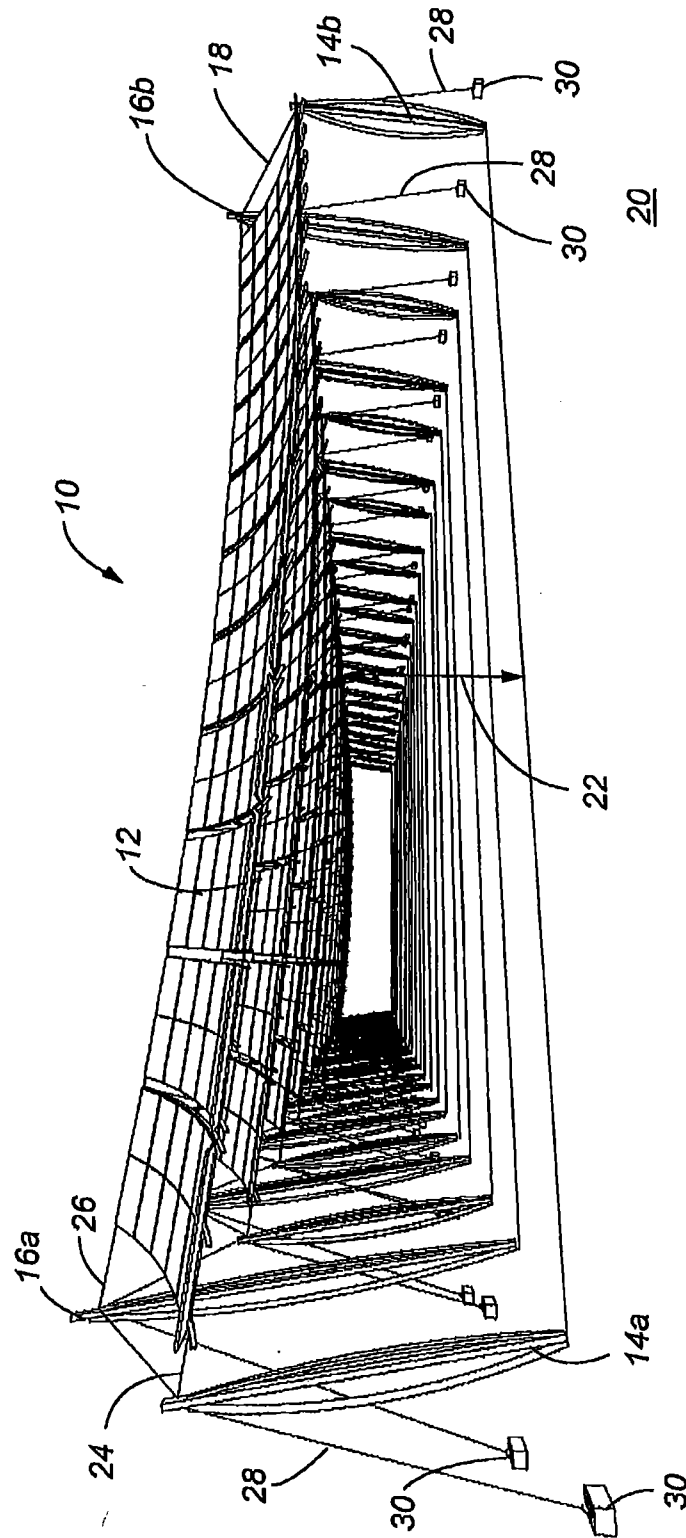


Fig. 1

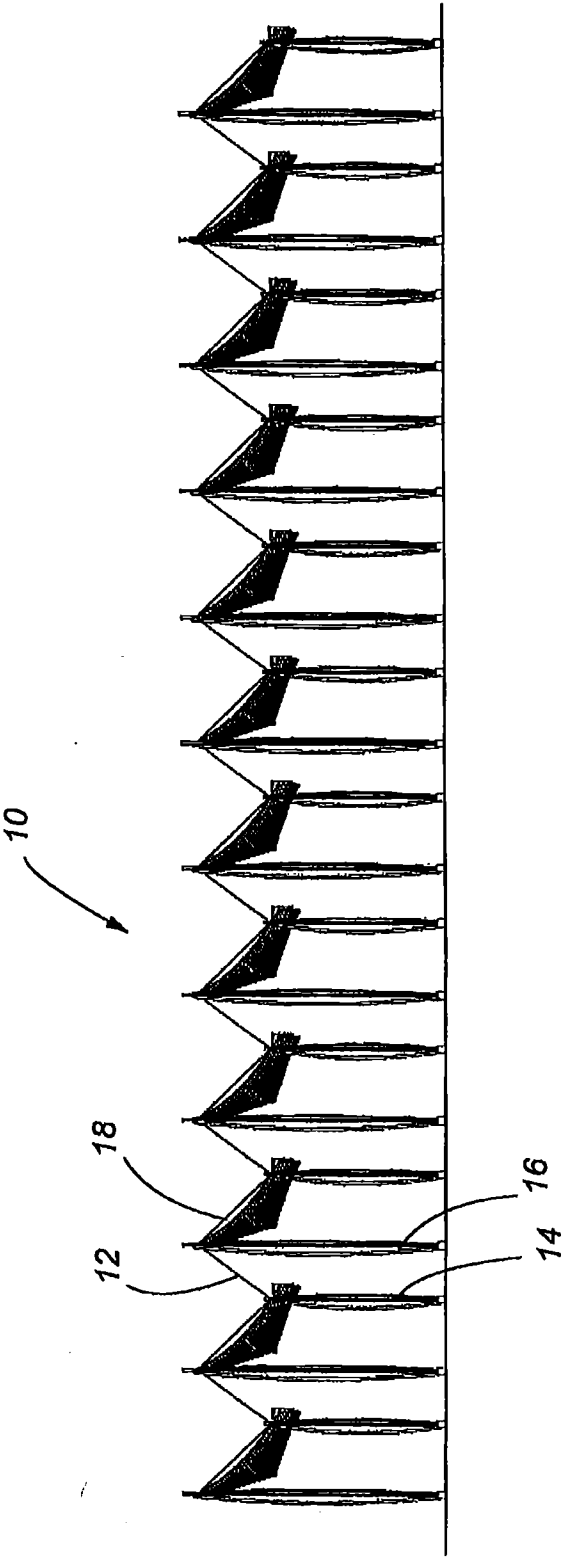


Fig. 2

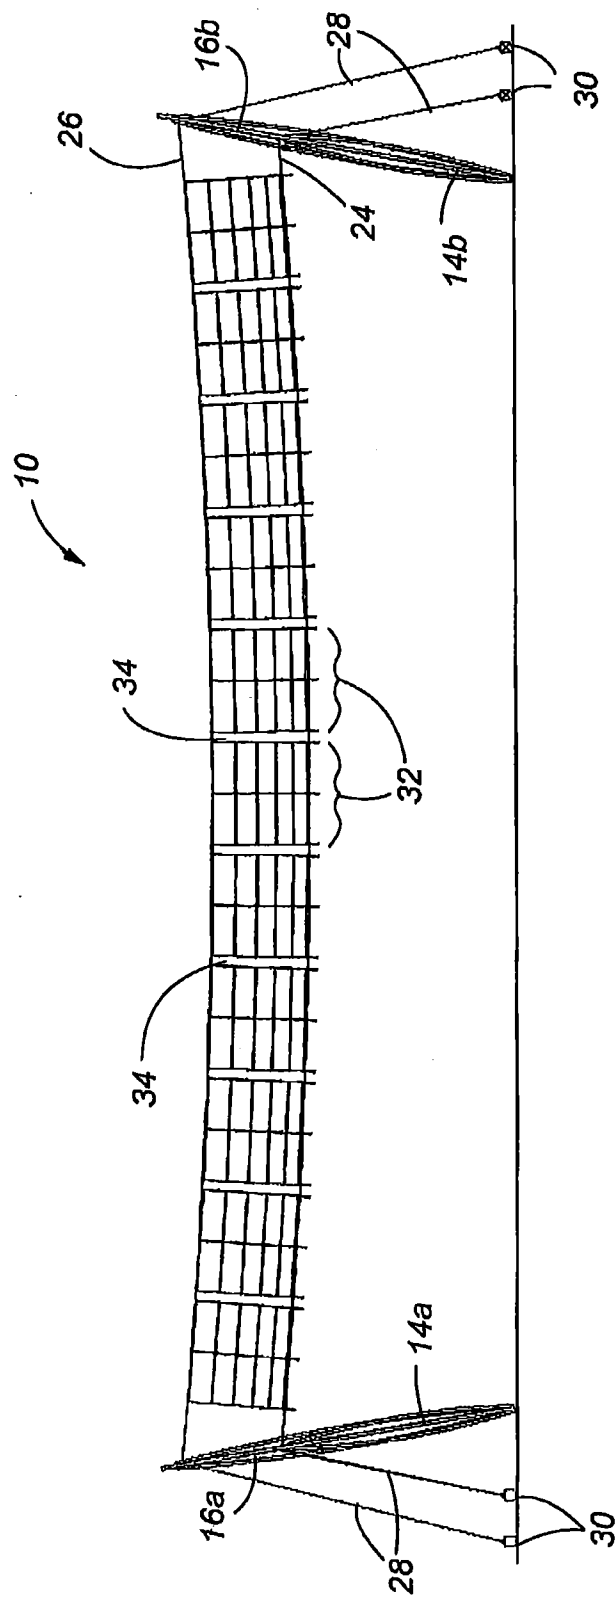


Fig. 3

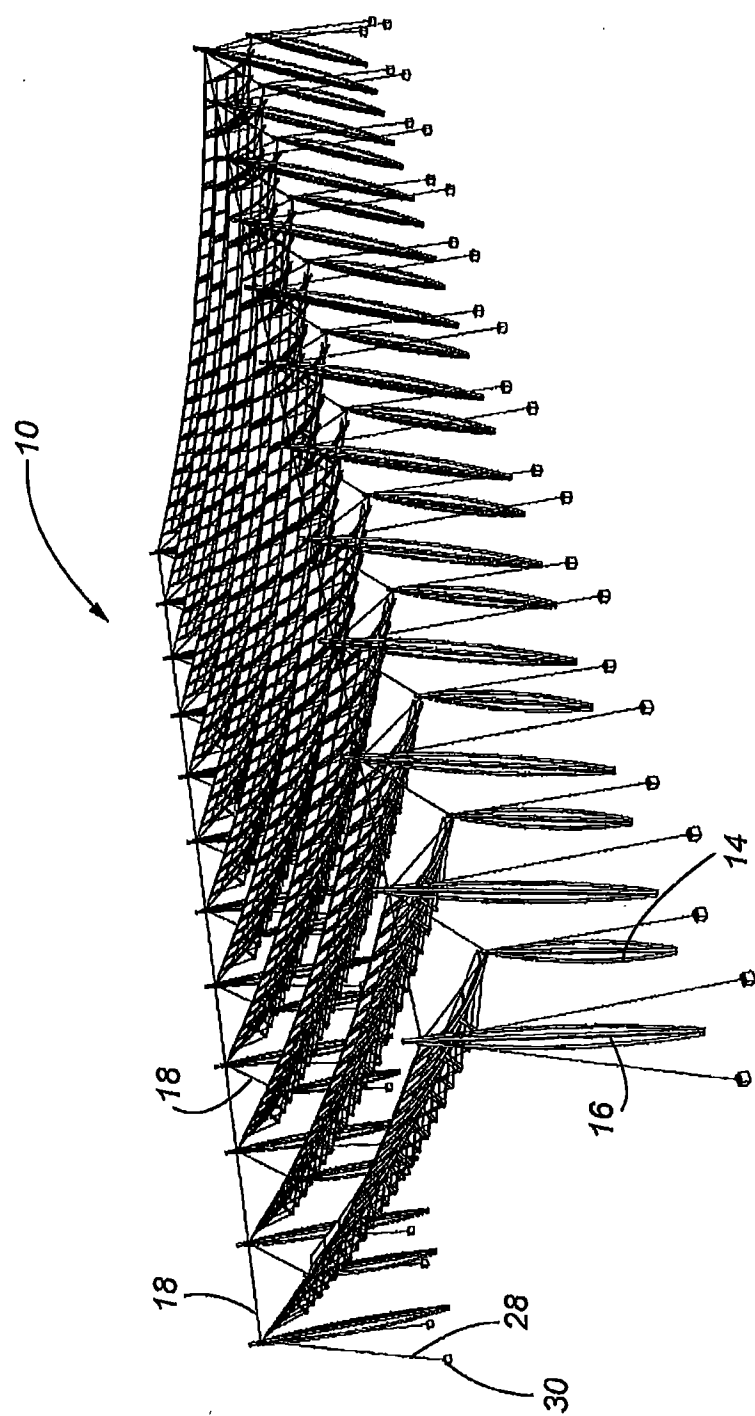


Fig. 4

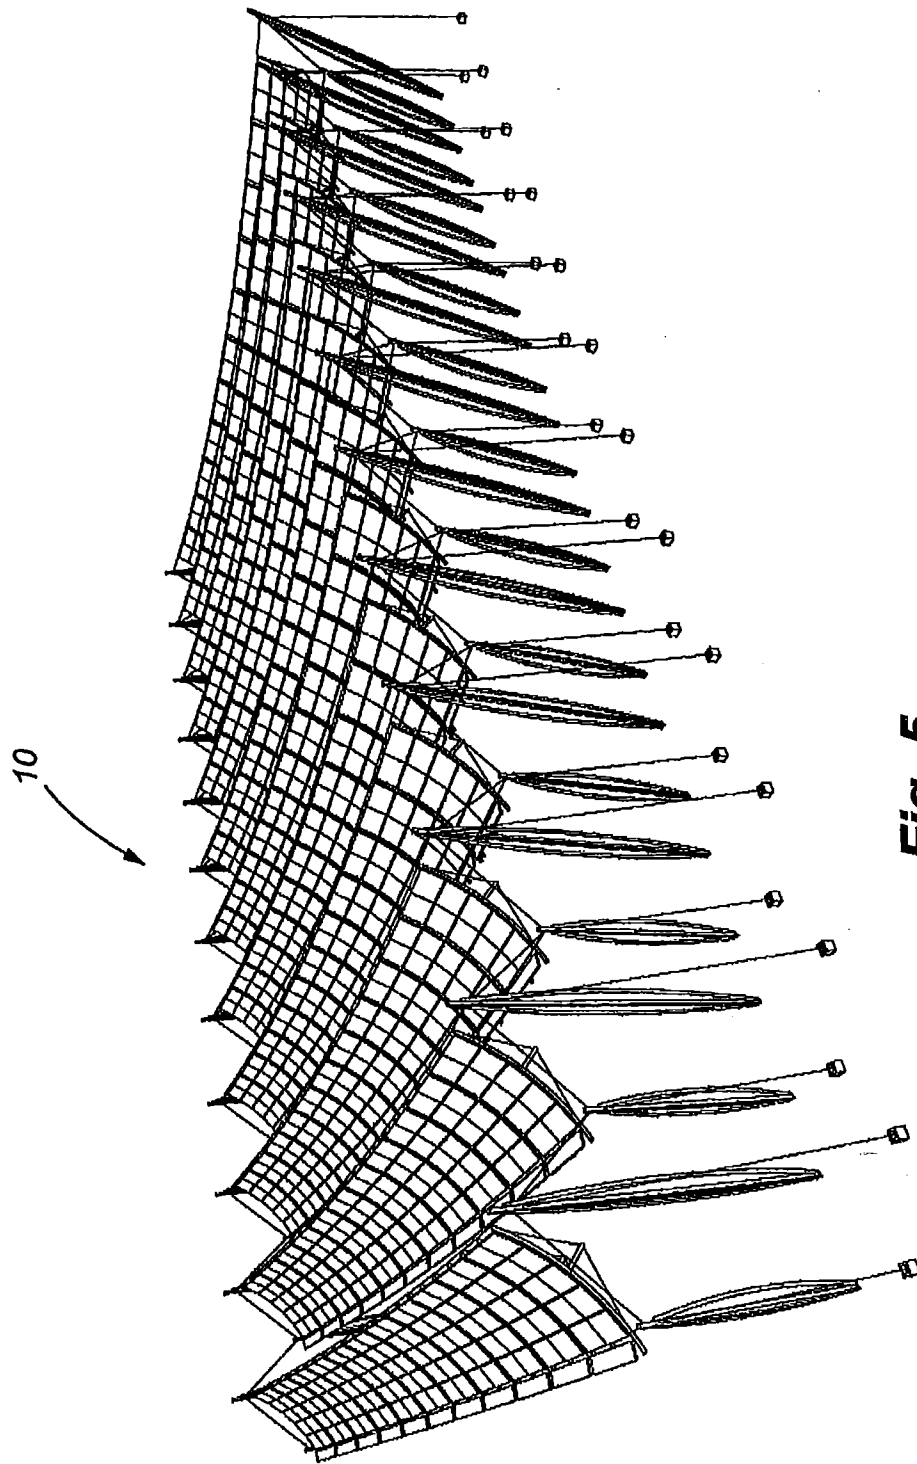


Fig. 5

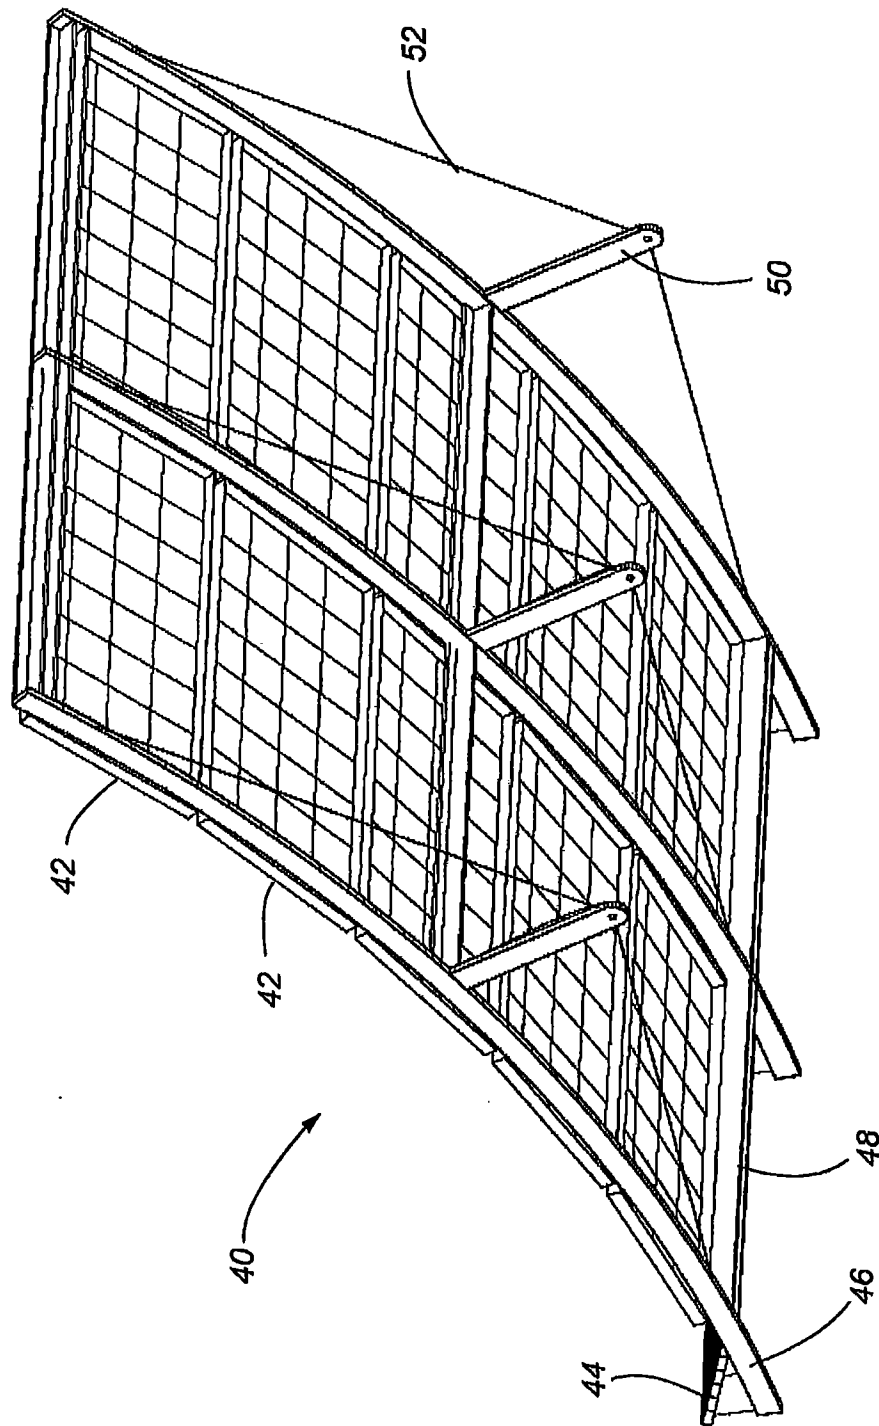
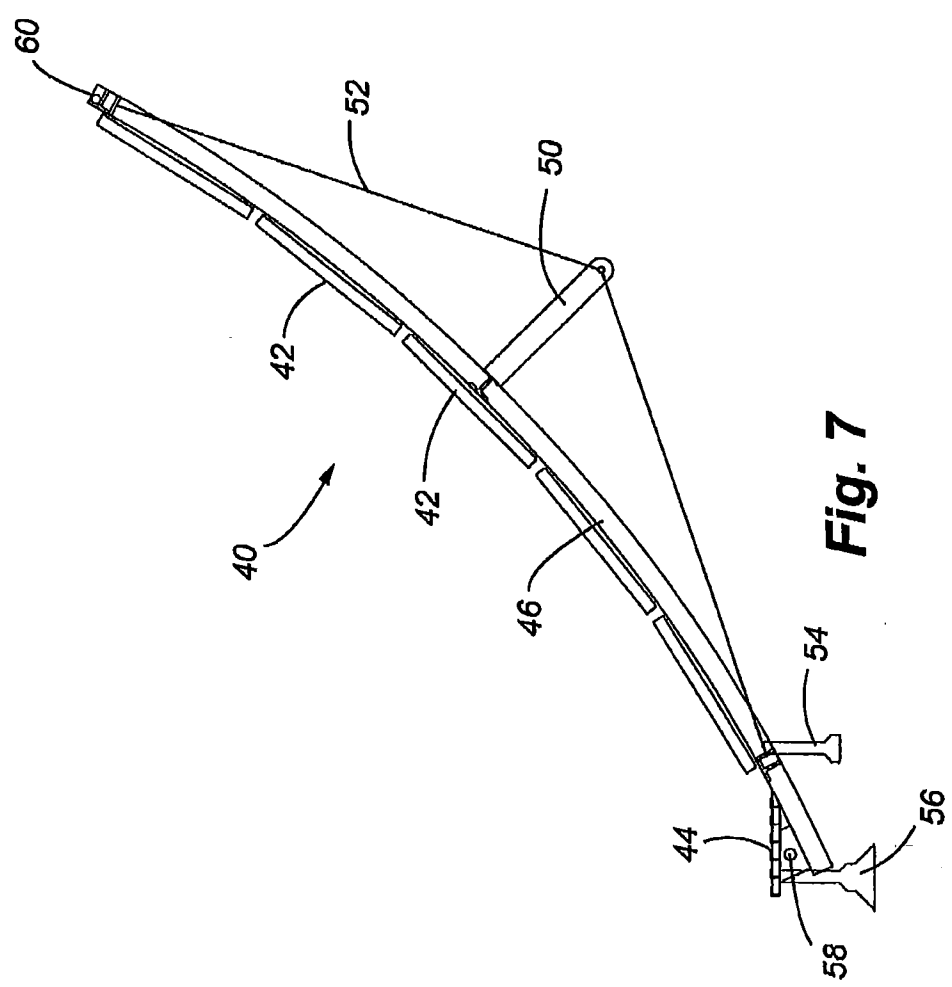


Fig. 6



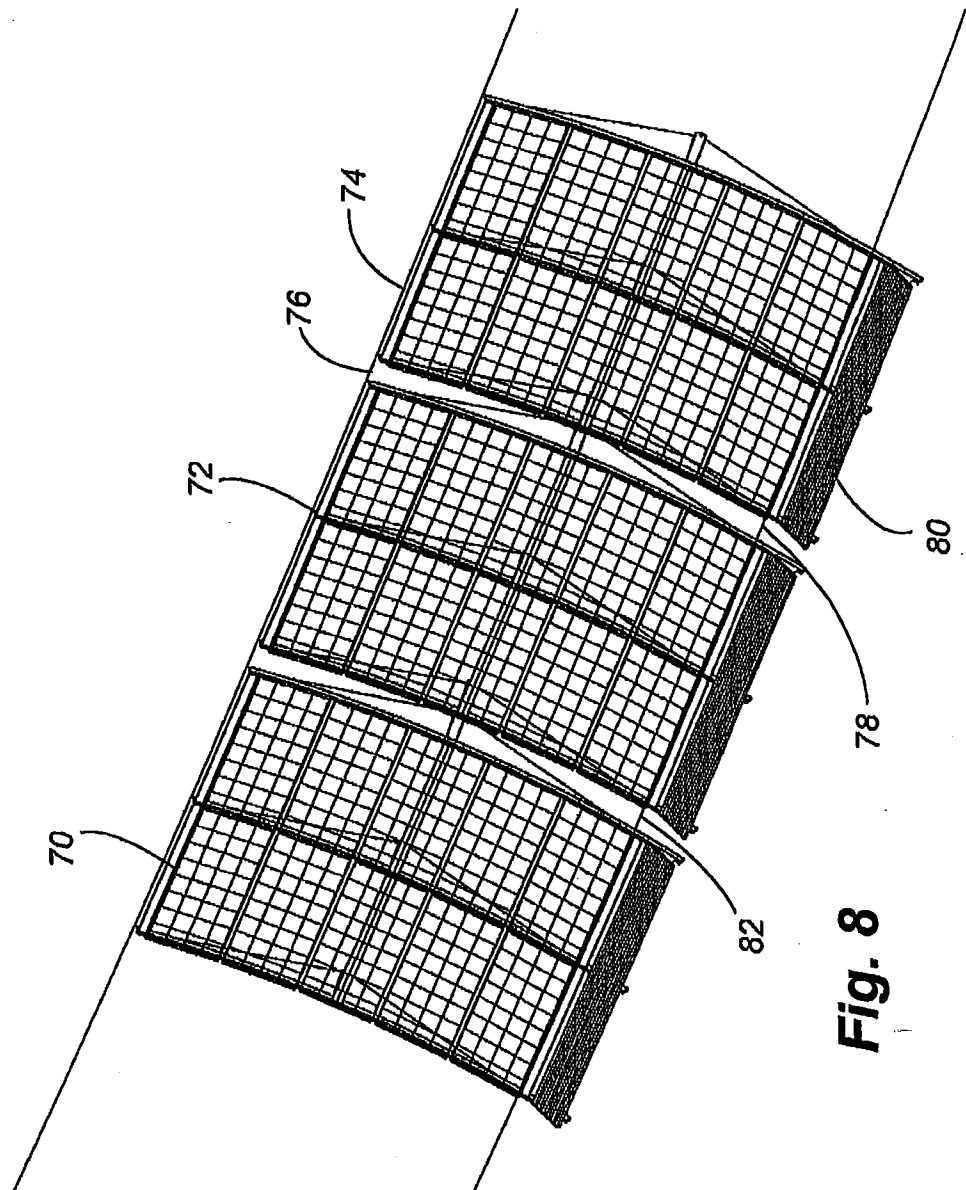
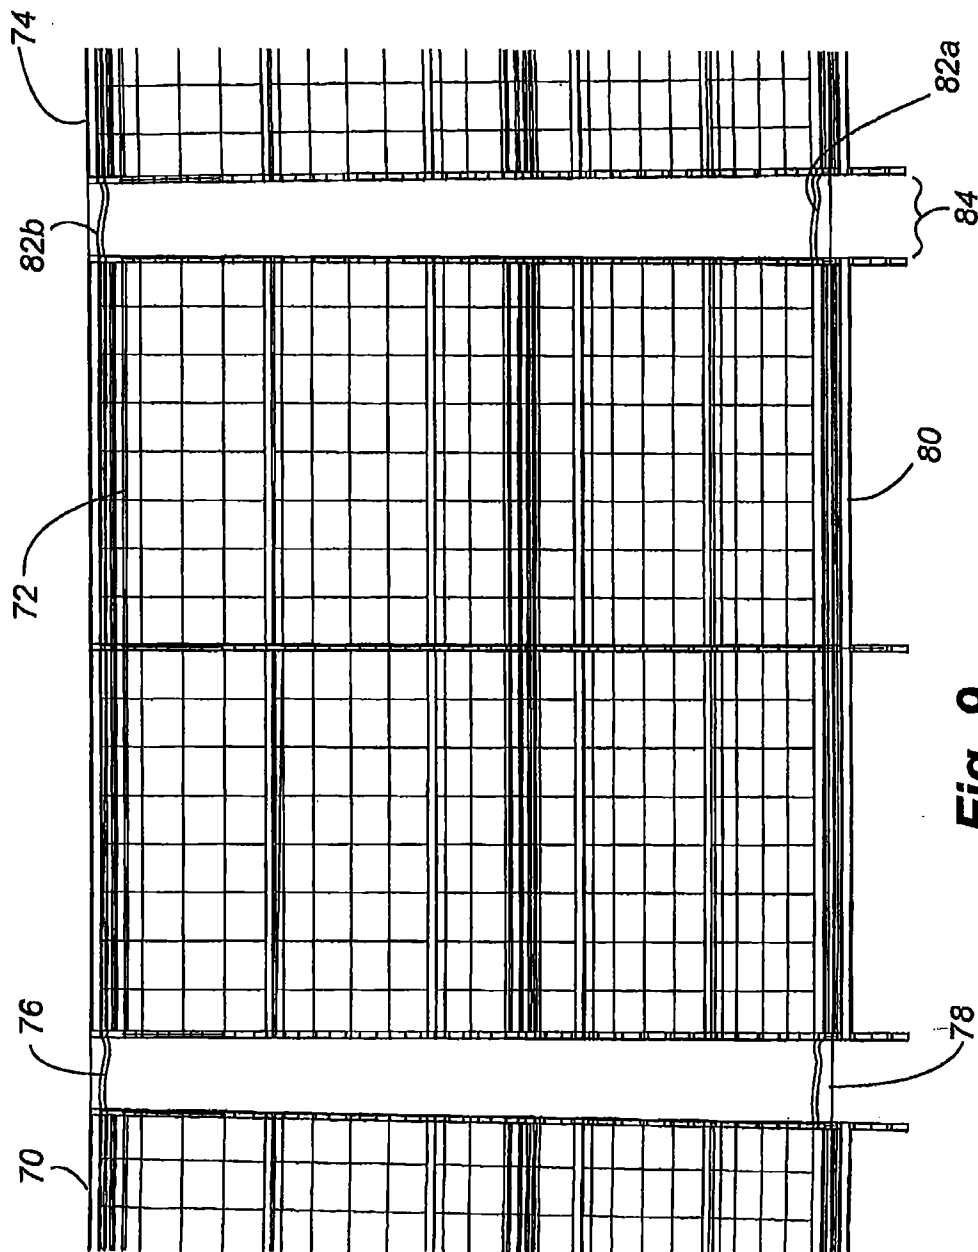


Fig. 8



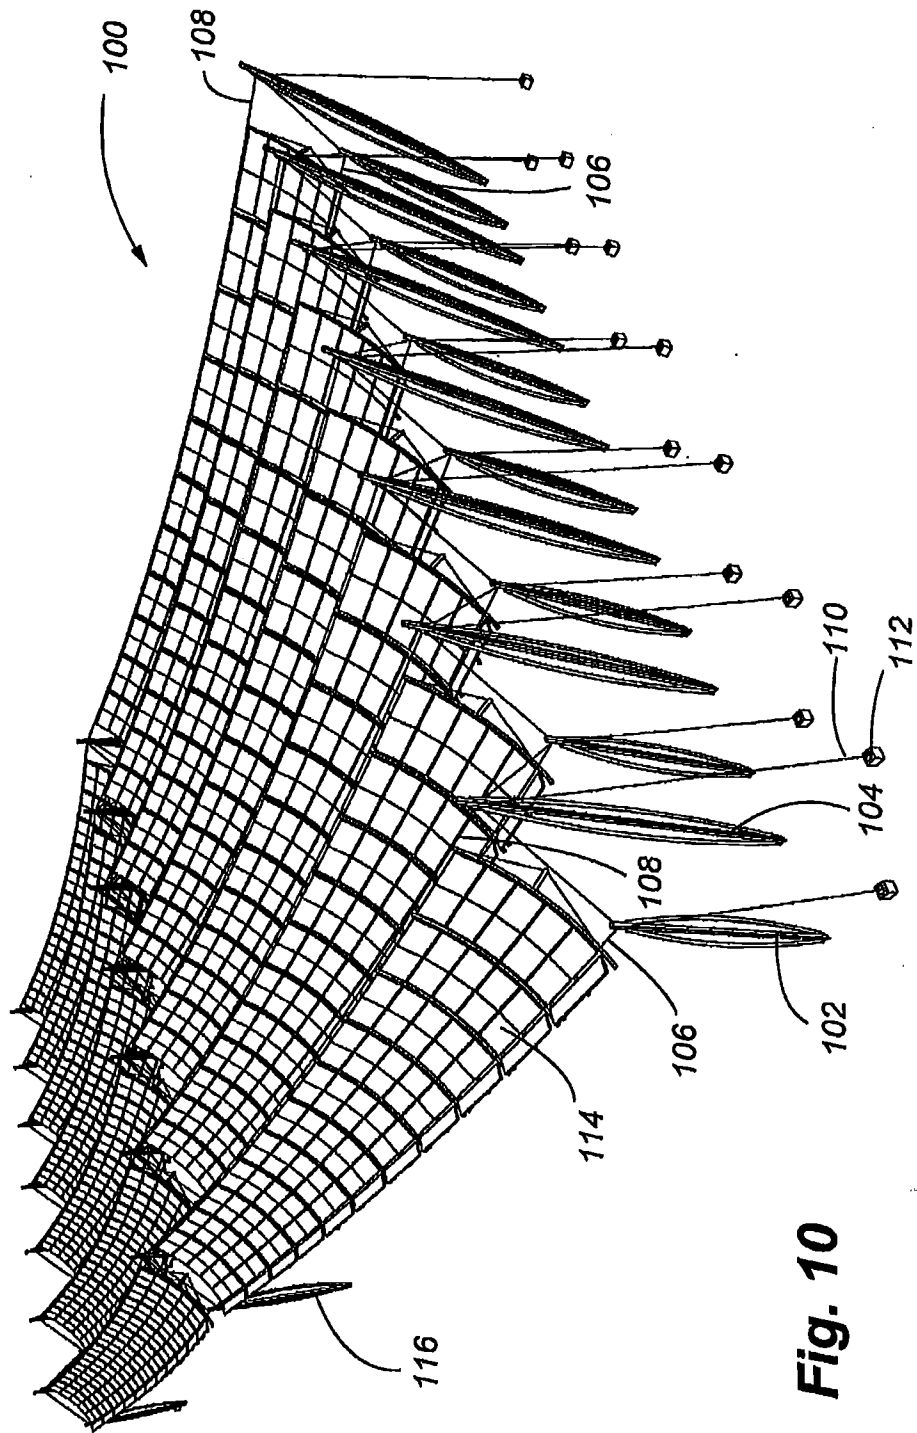


Fig. 10

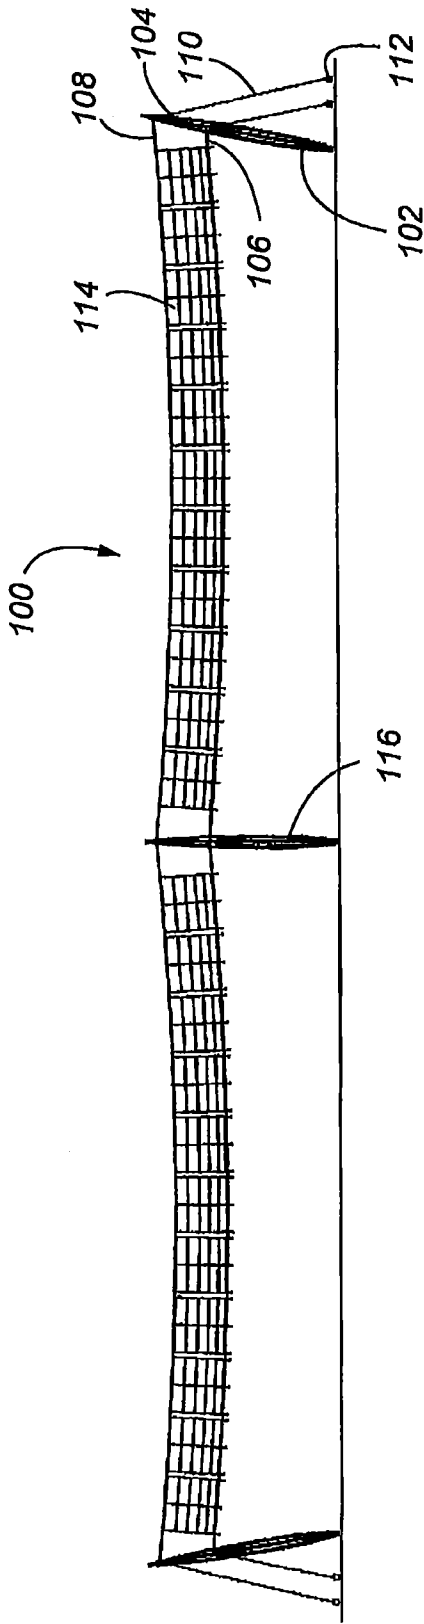
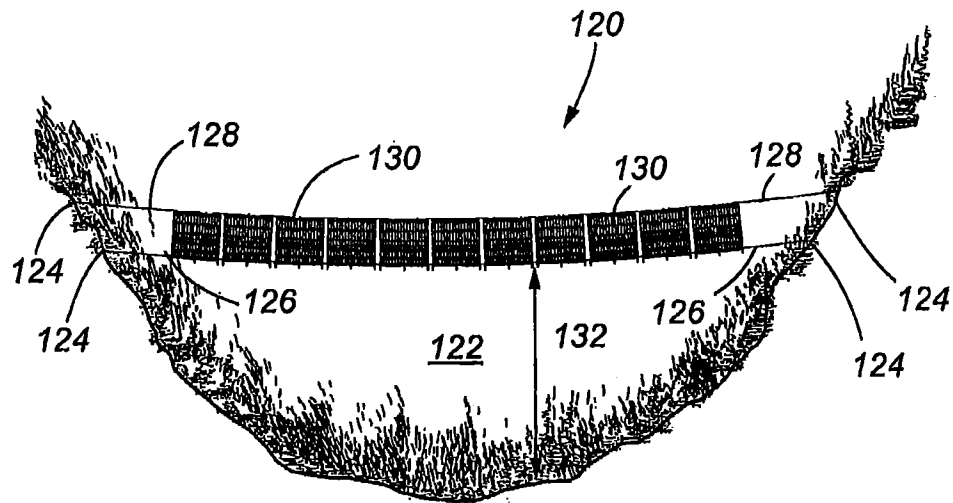
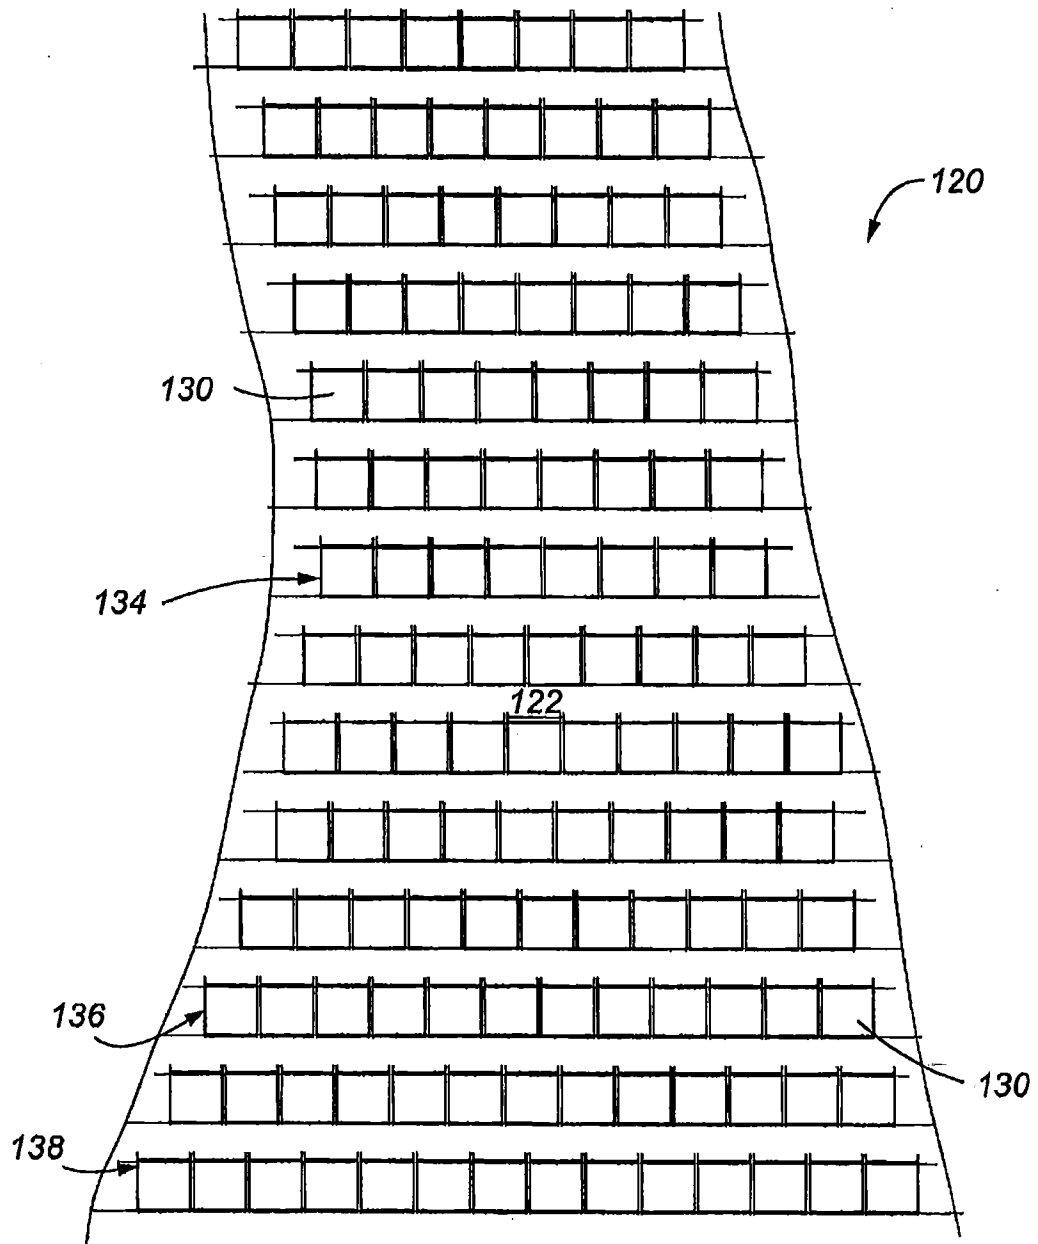


Fig. 11

**Fig. 12**

**Fig. 13**

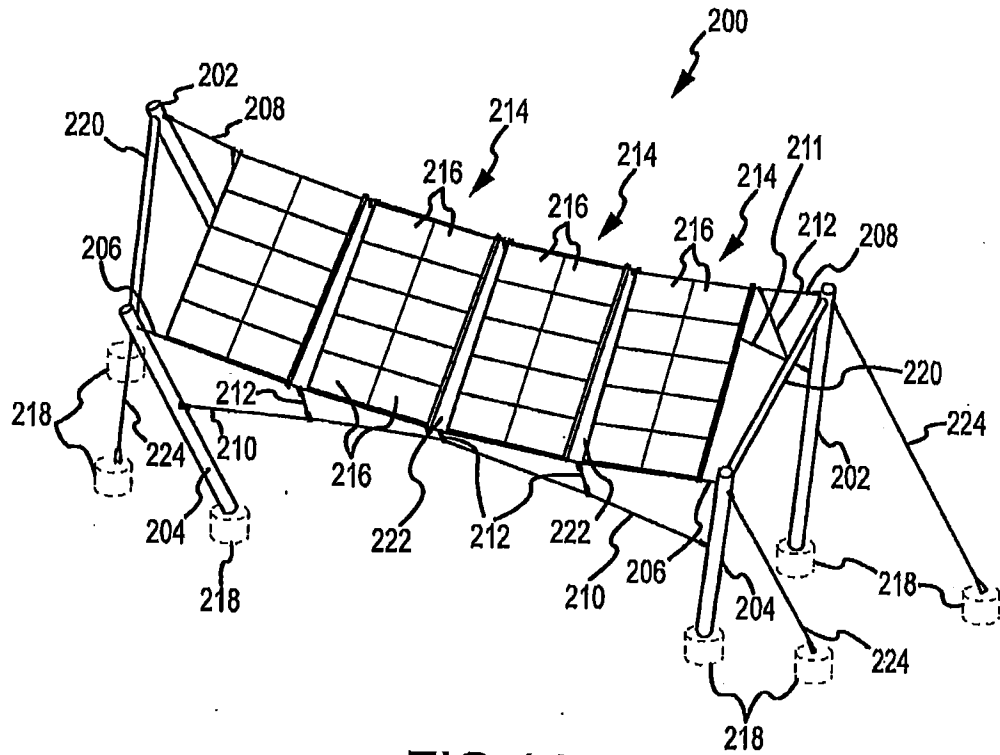


FIG.14

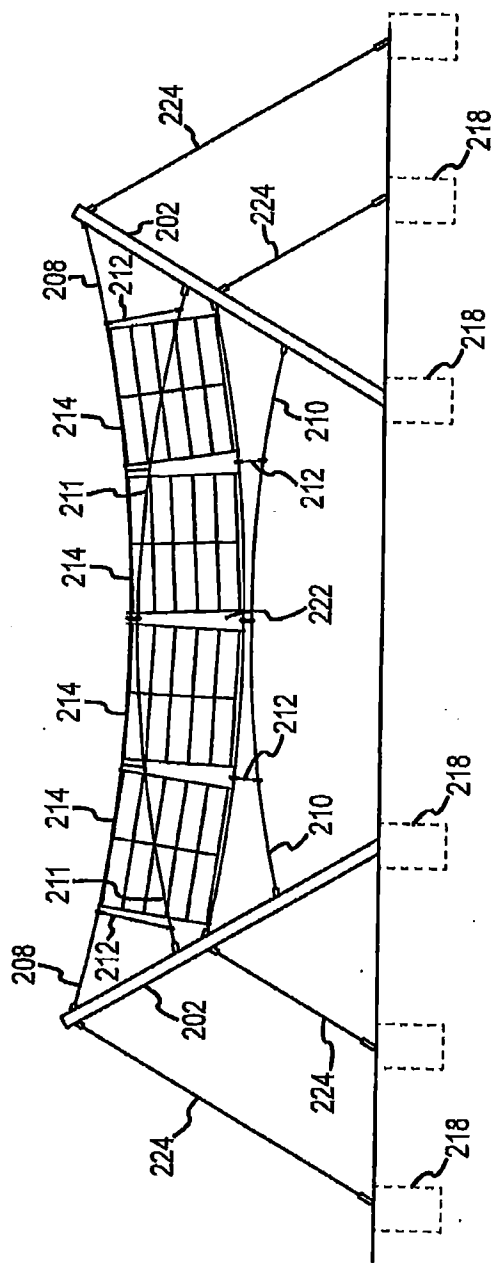


FIG. 15

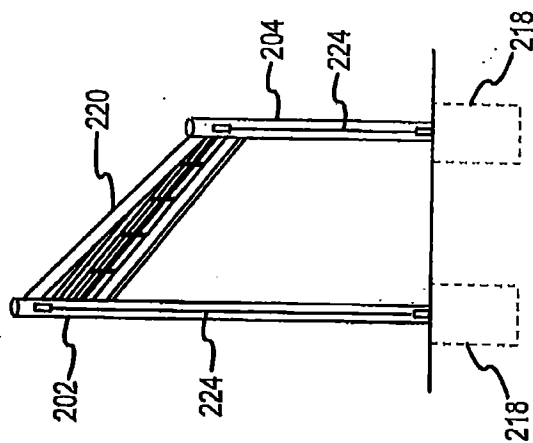


FIG. 16

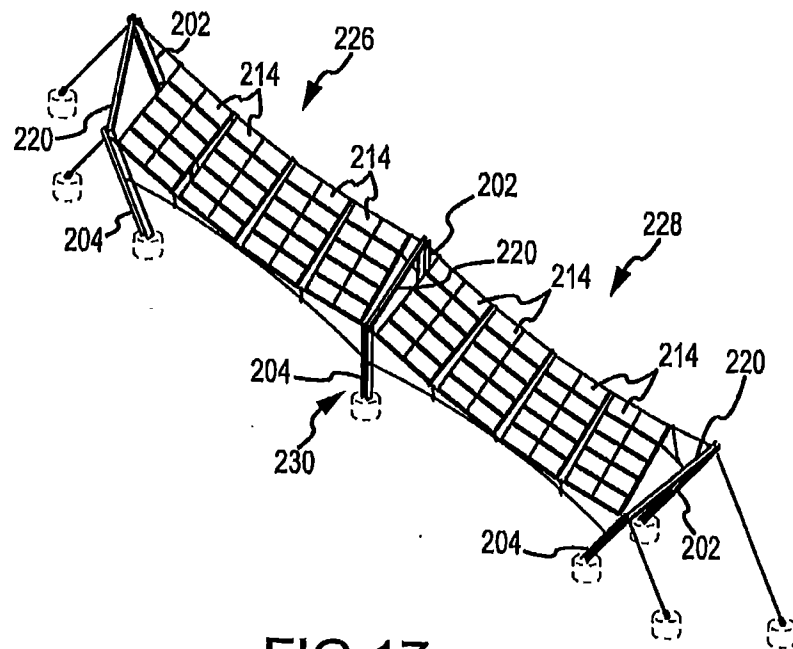


FIG. 17

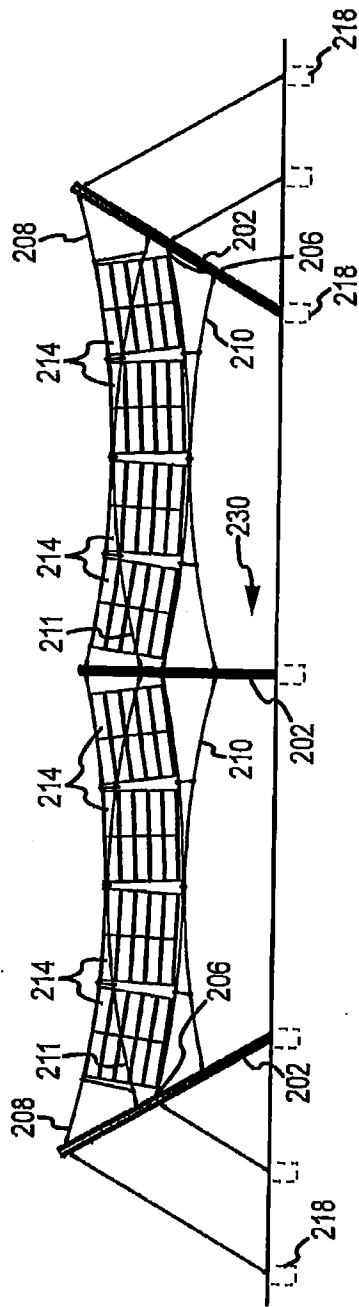


FIG.18

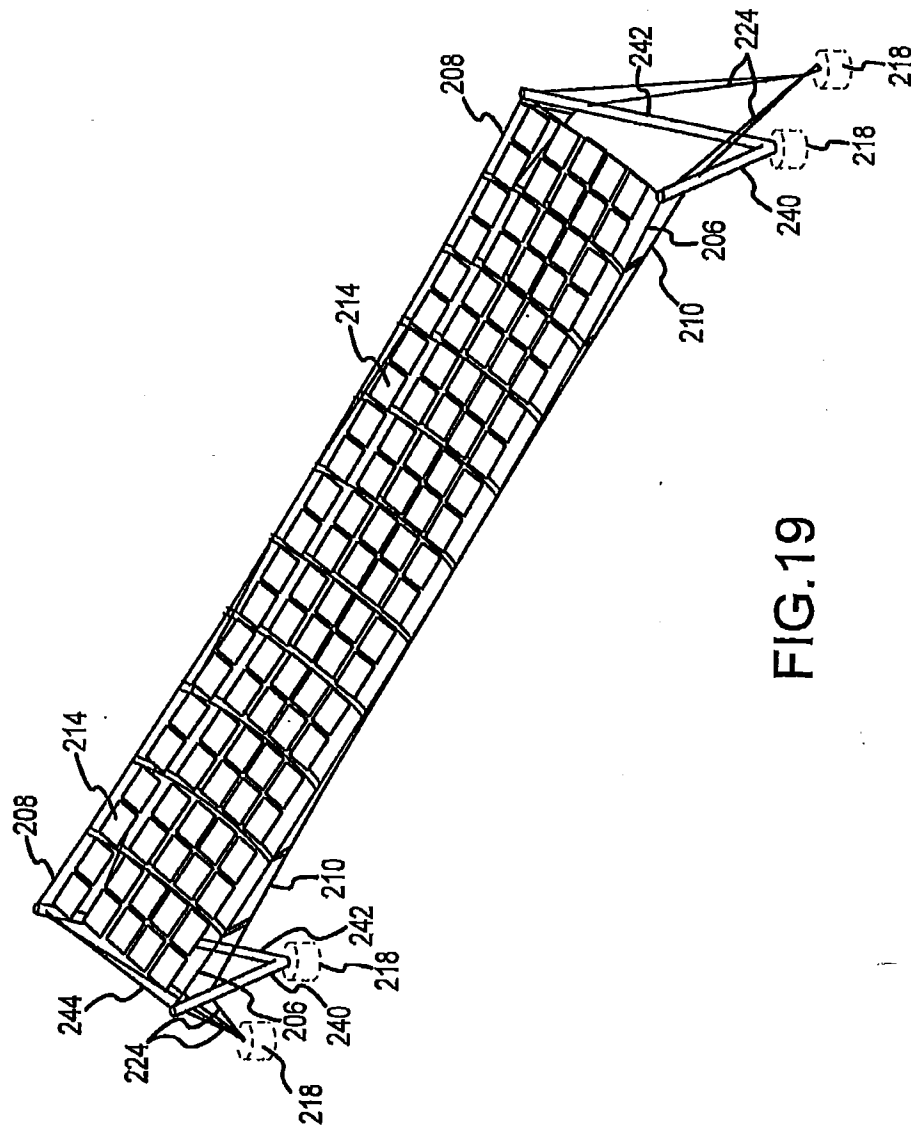


FIG. 19

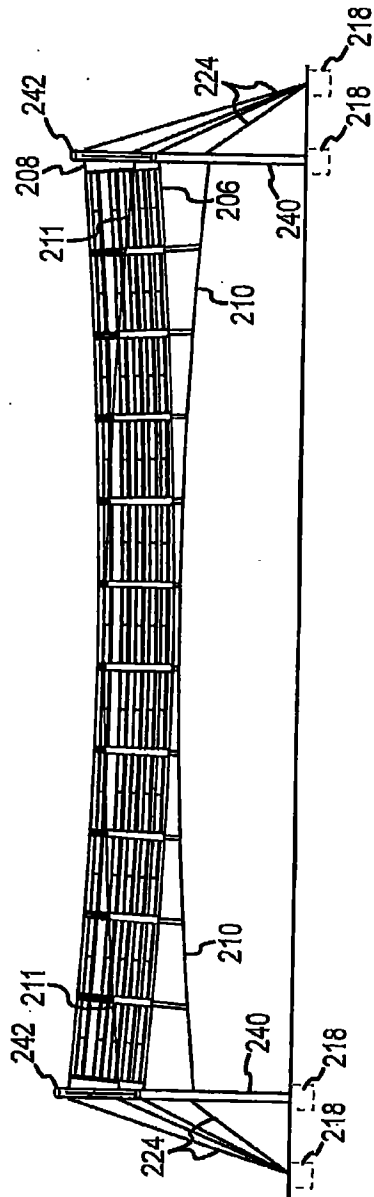


FIG. 20

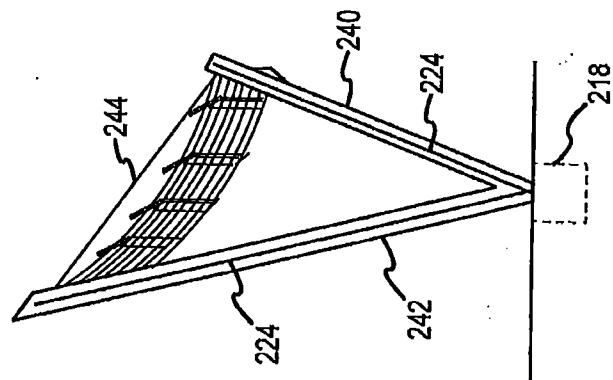


FIG. 21

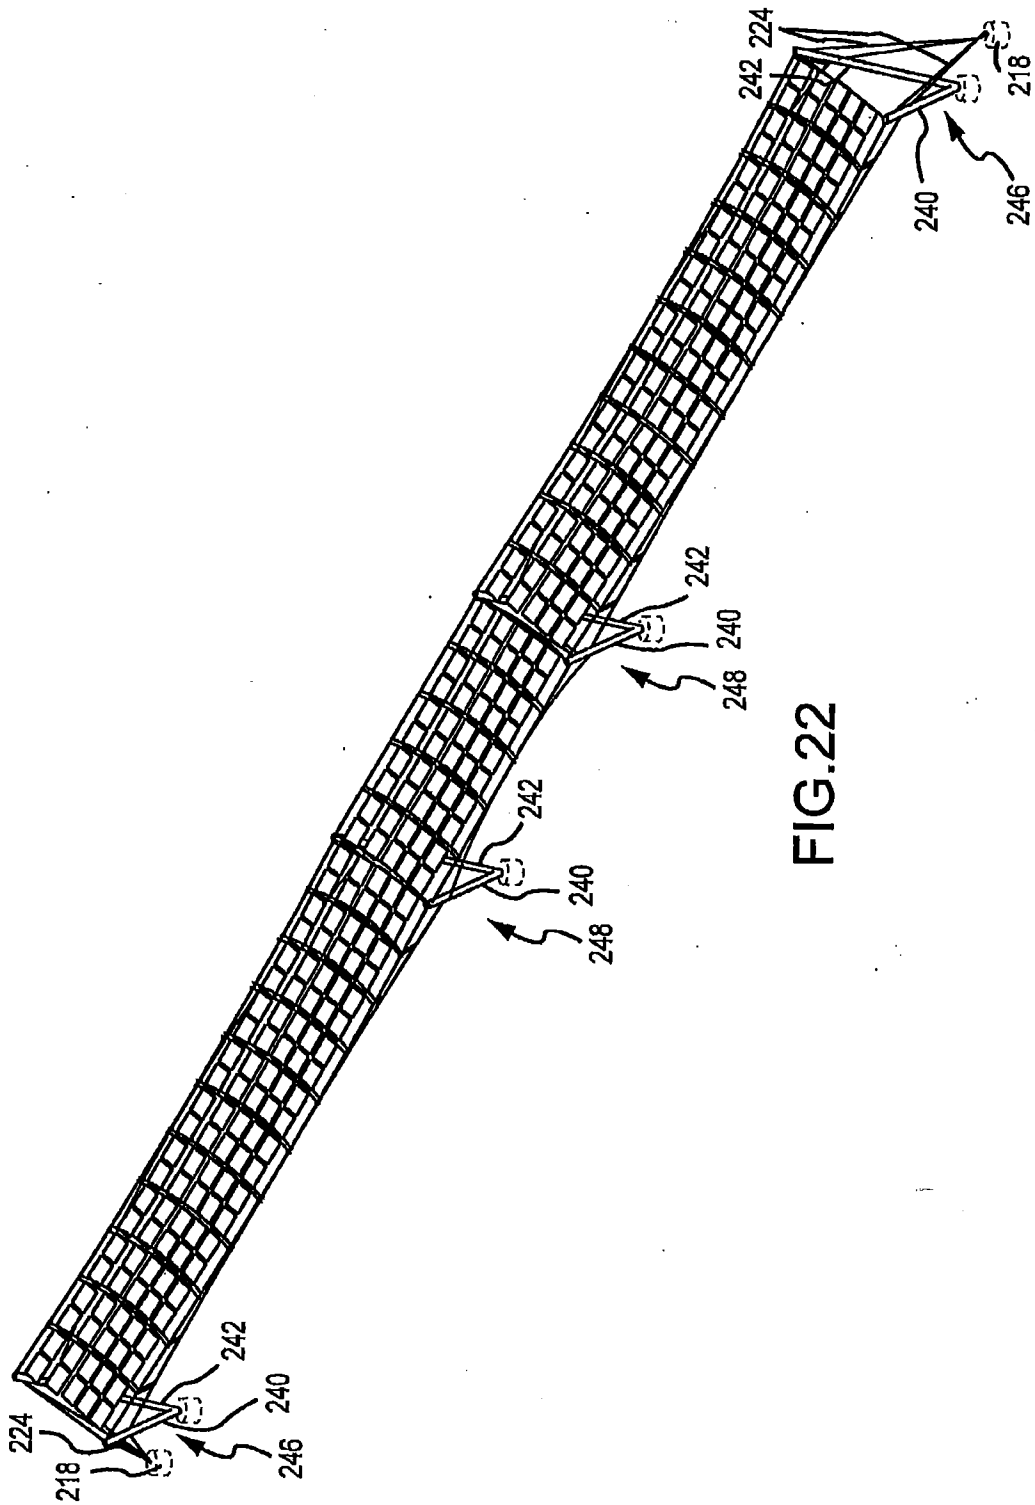


FIG. 22

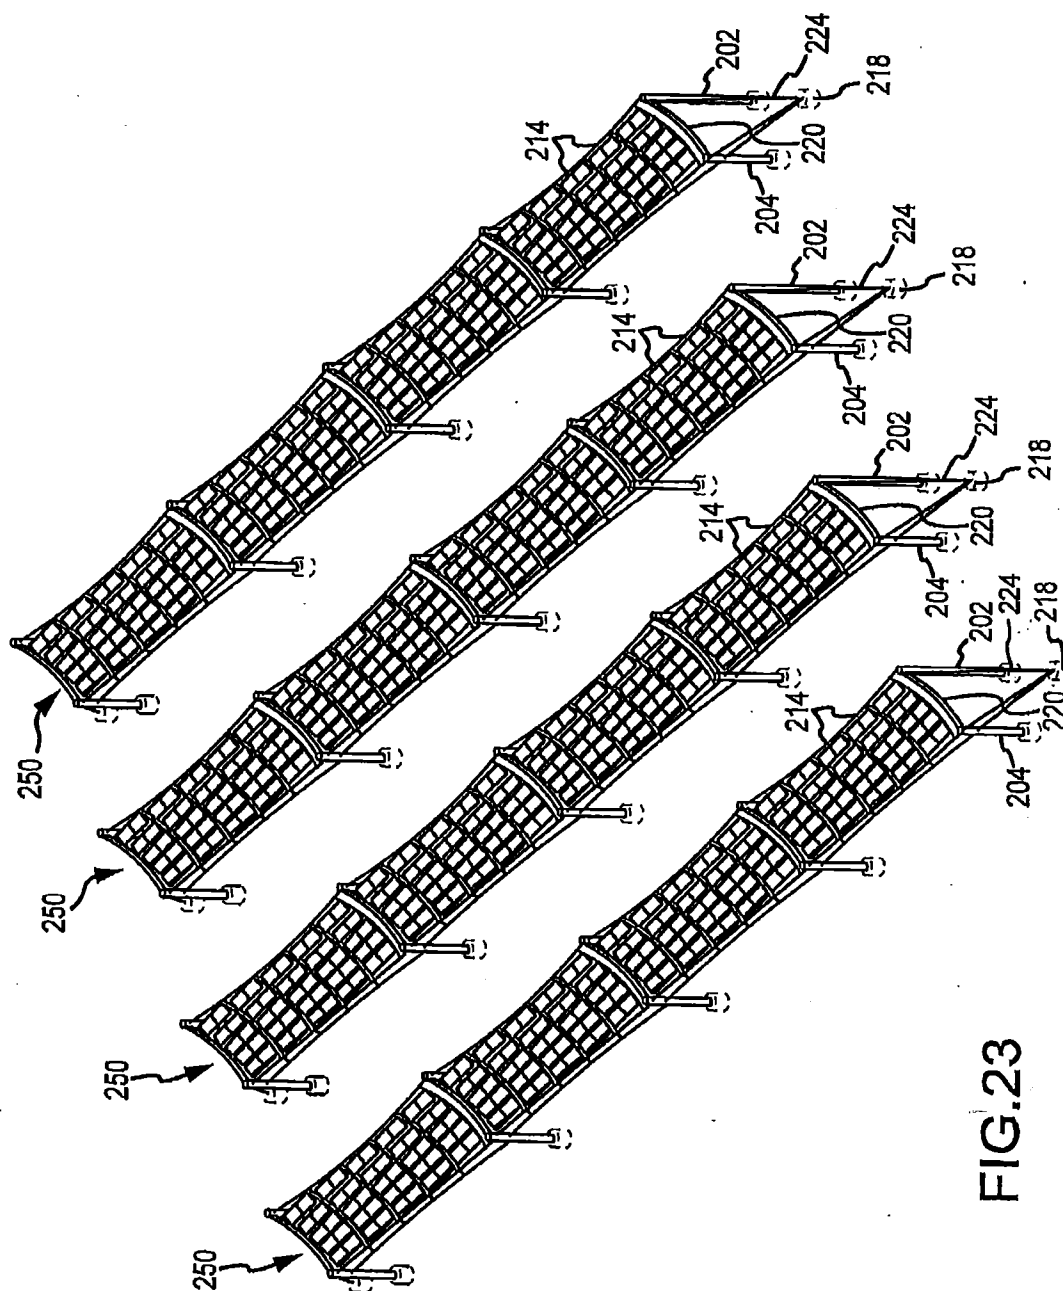


FIG. 23

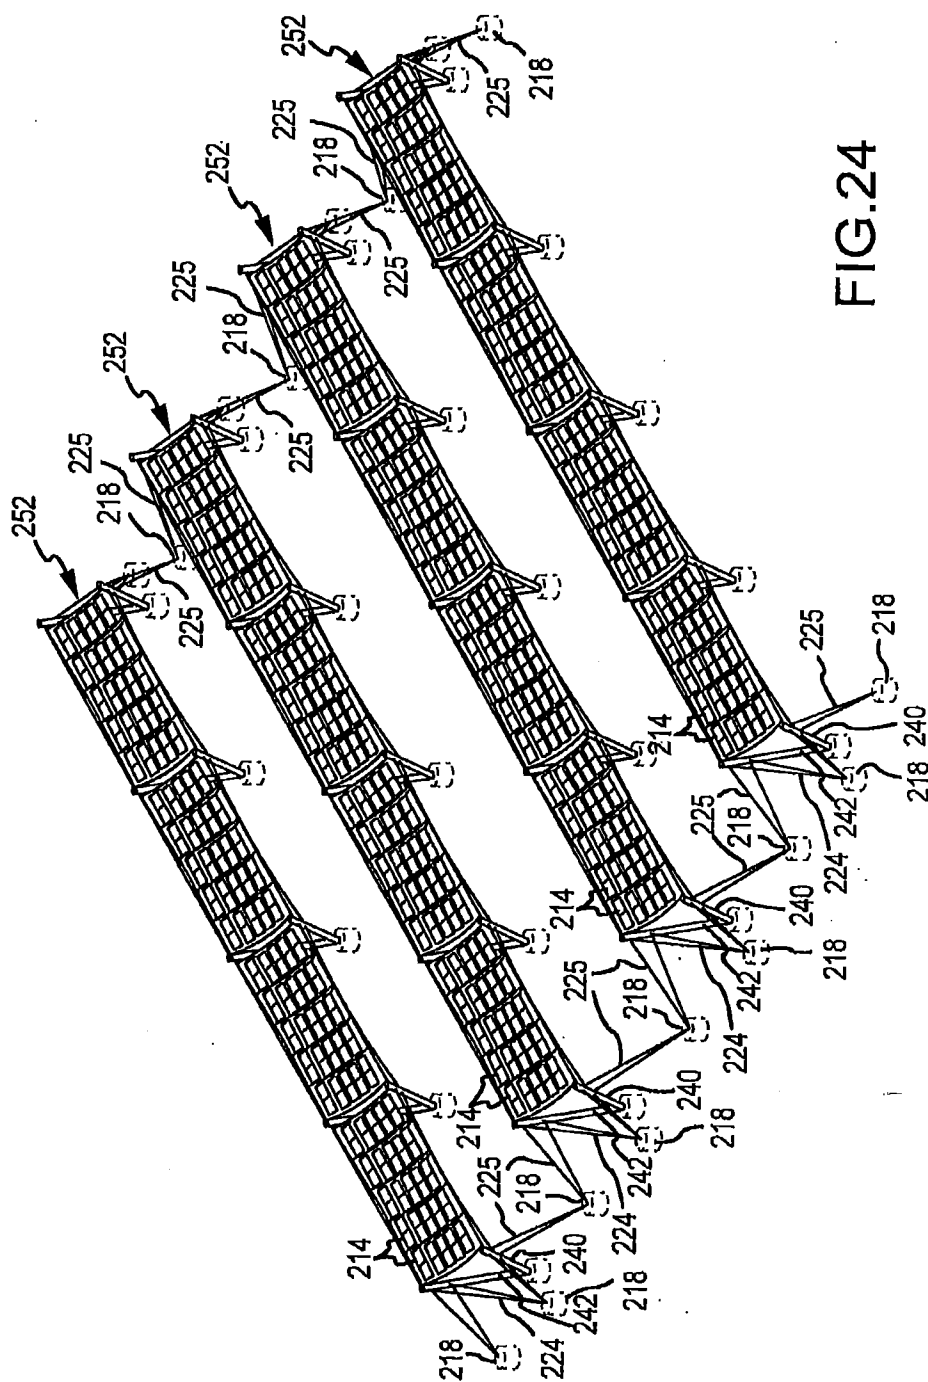


FIG. 24

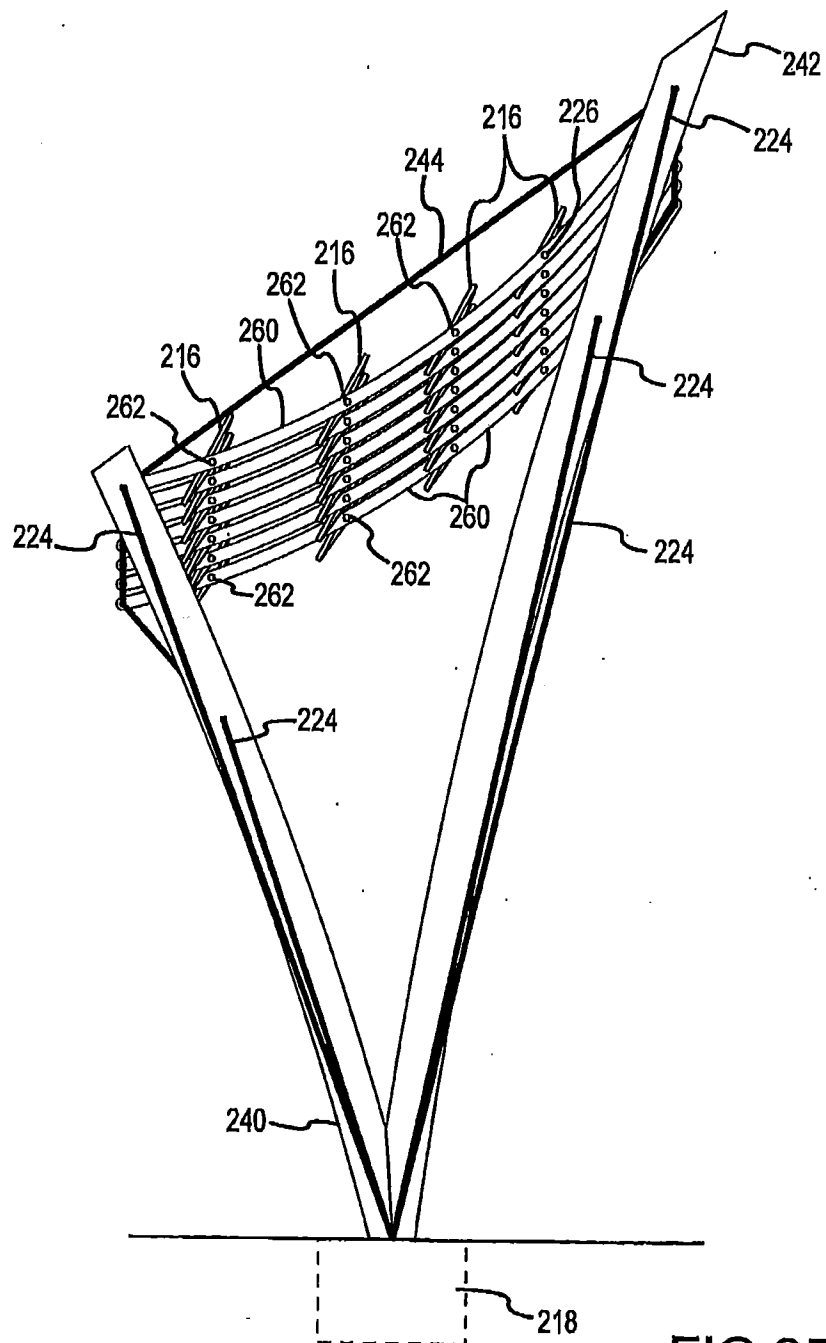


FIG. 25

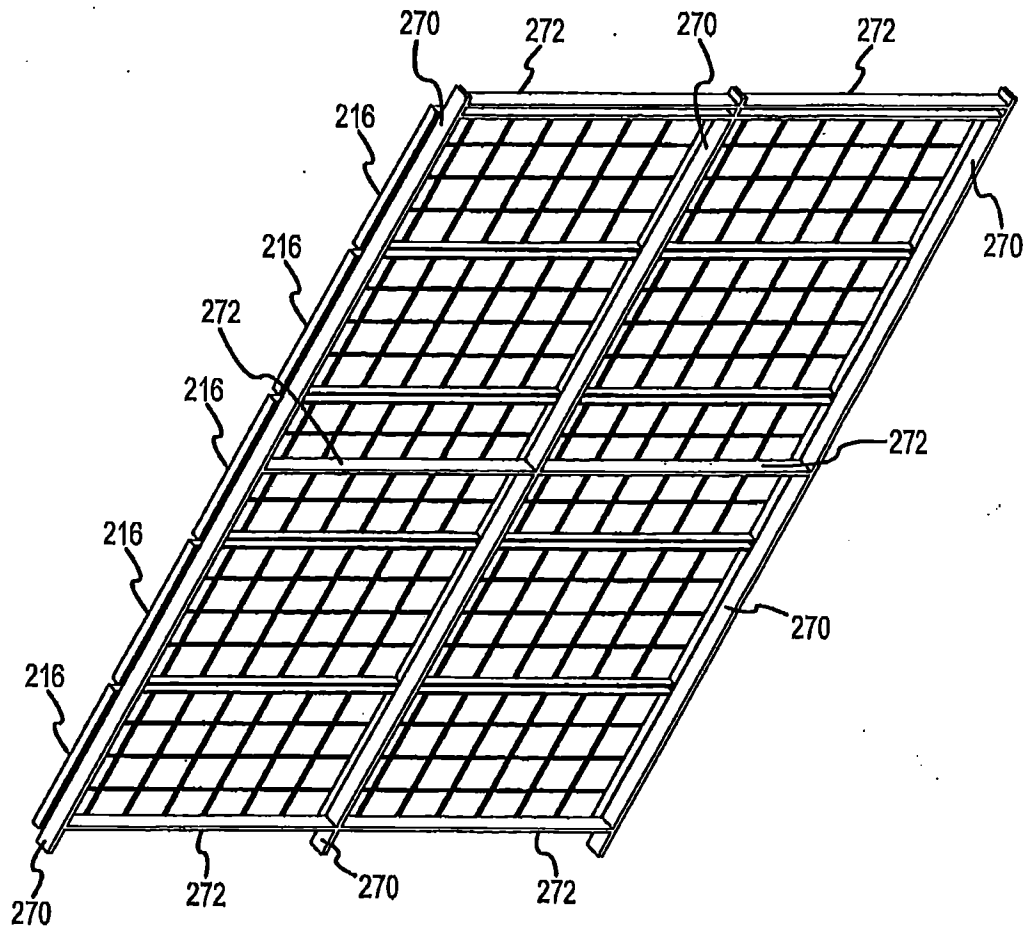
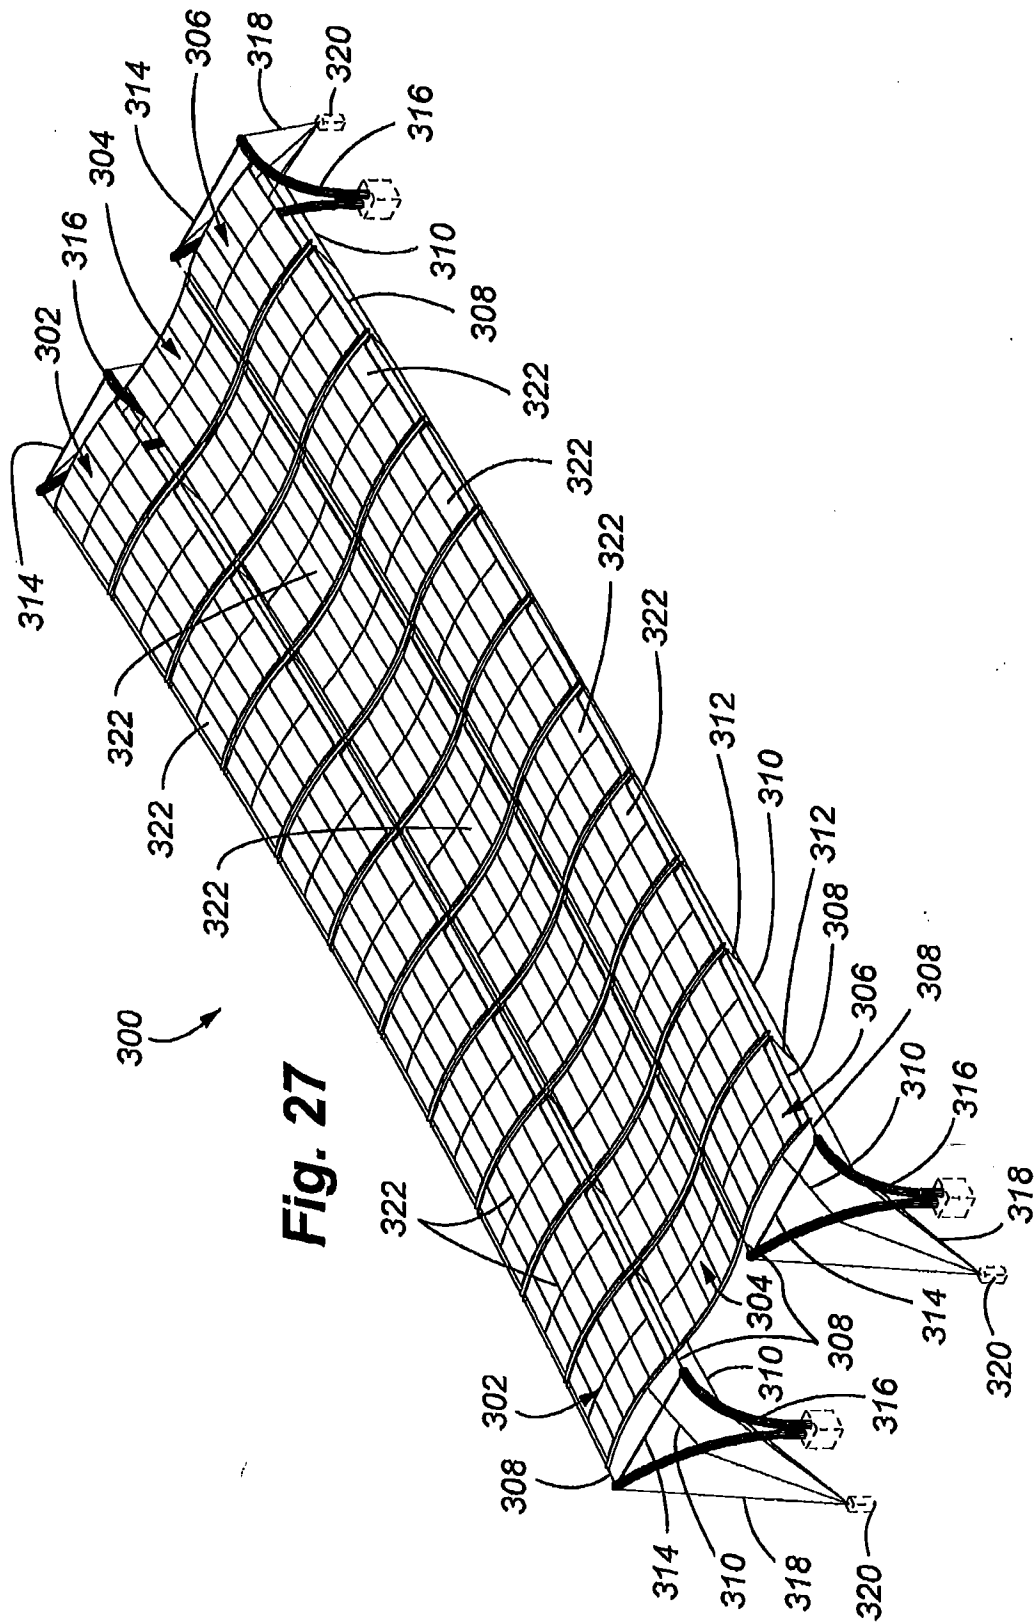


FIG. 26



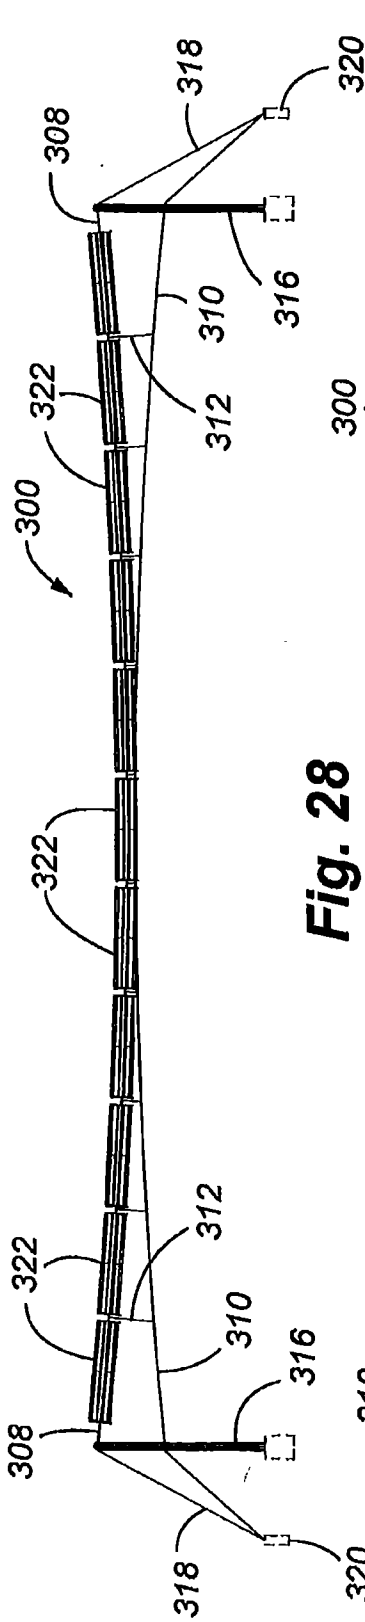


Fig. 28

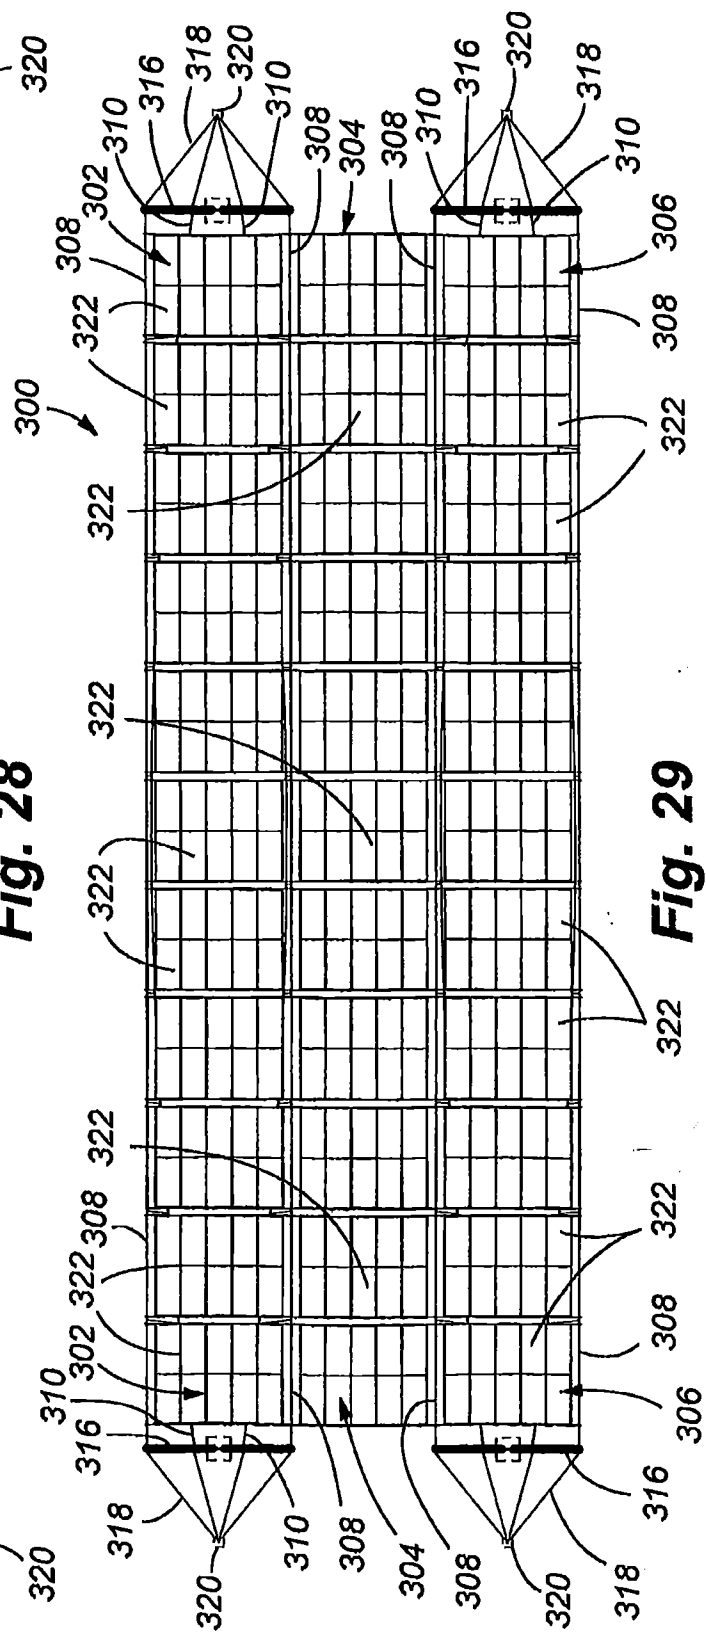


Fig. 29

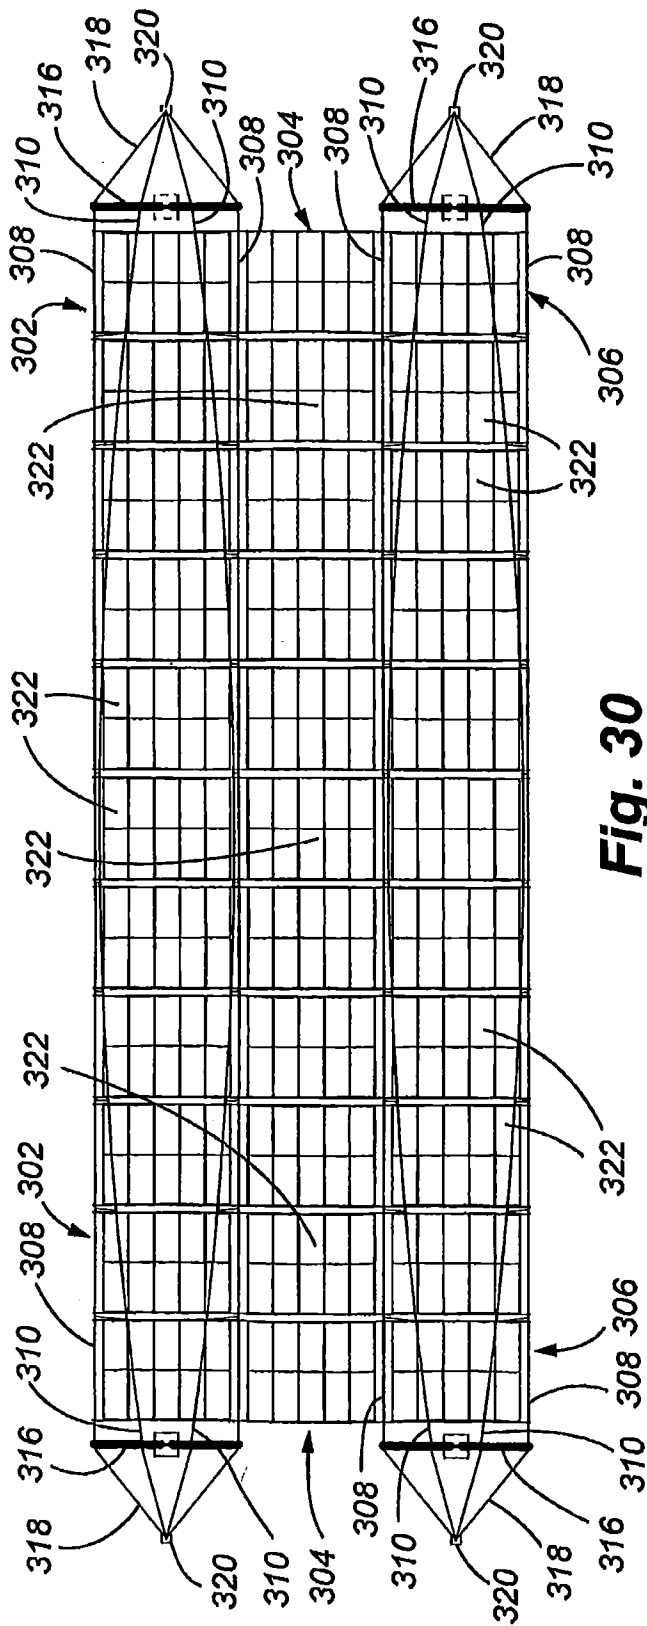


Fig. 30

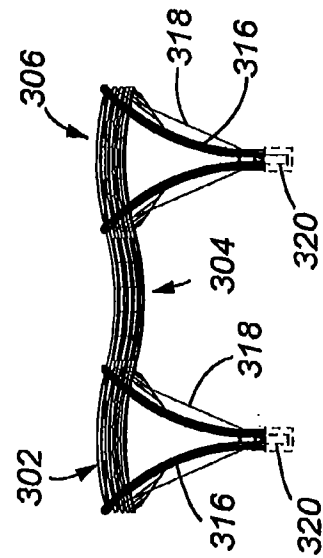


Fig. 31

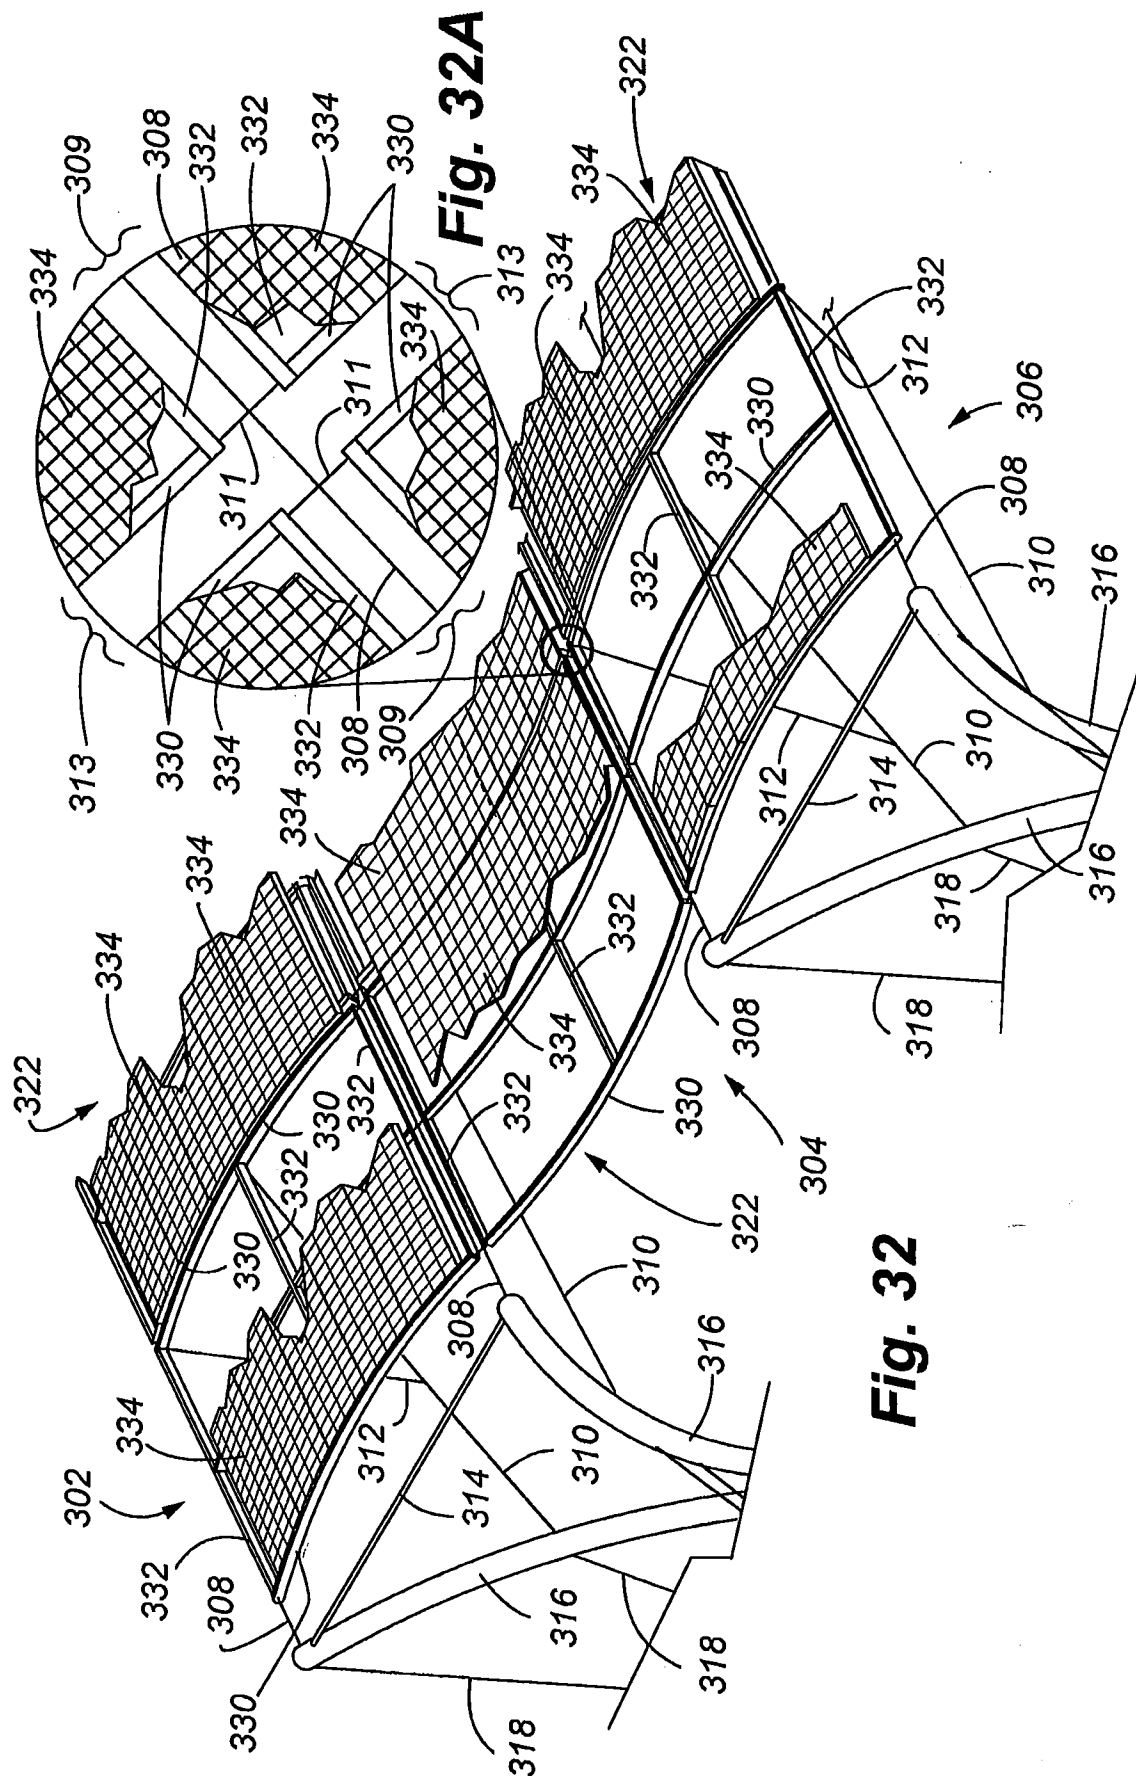


Fig. 32

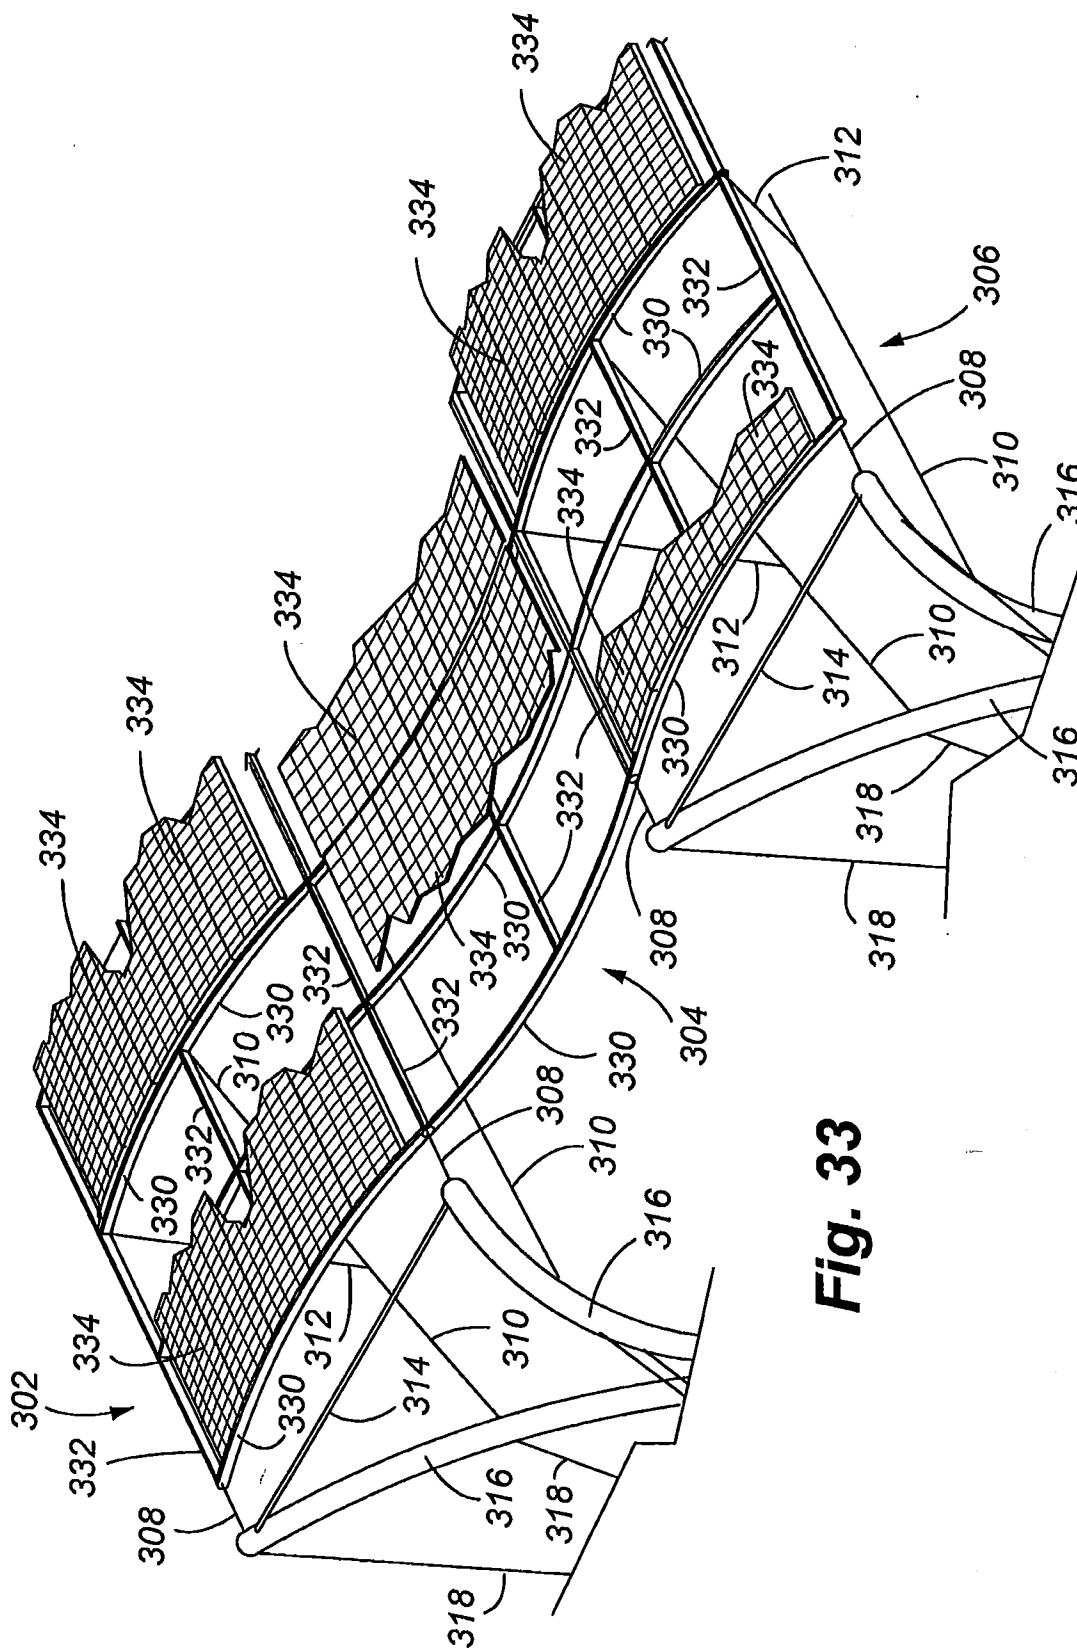
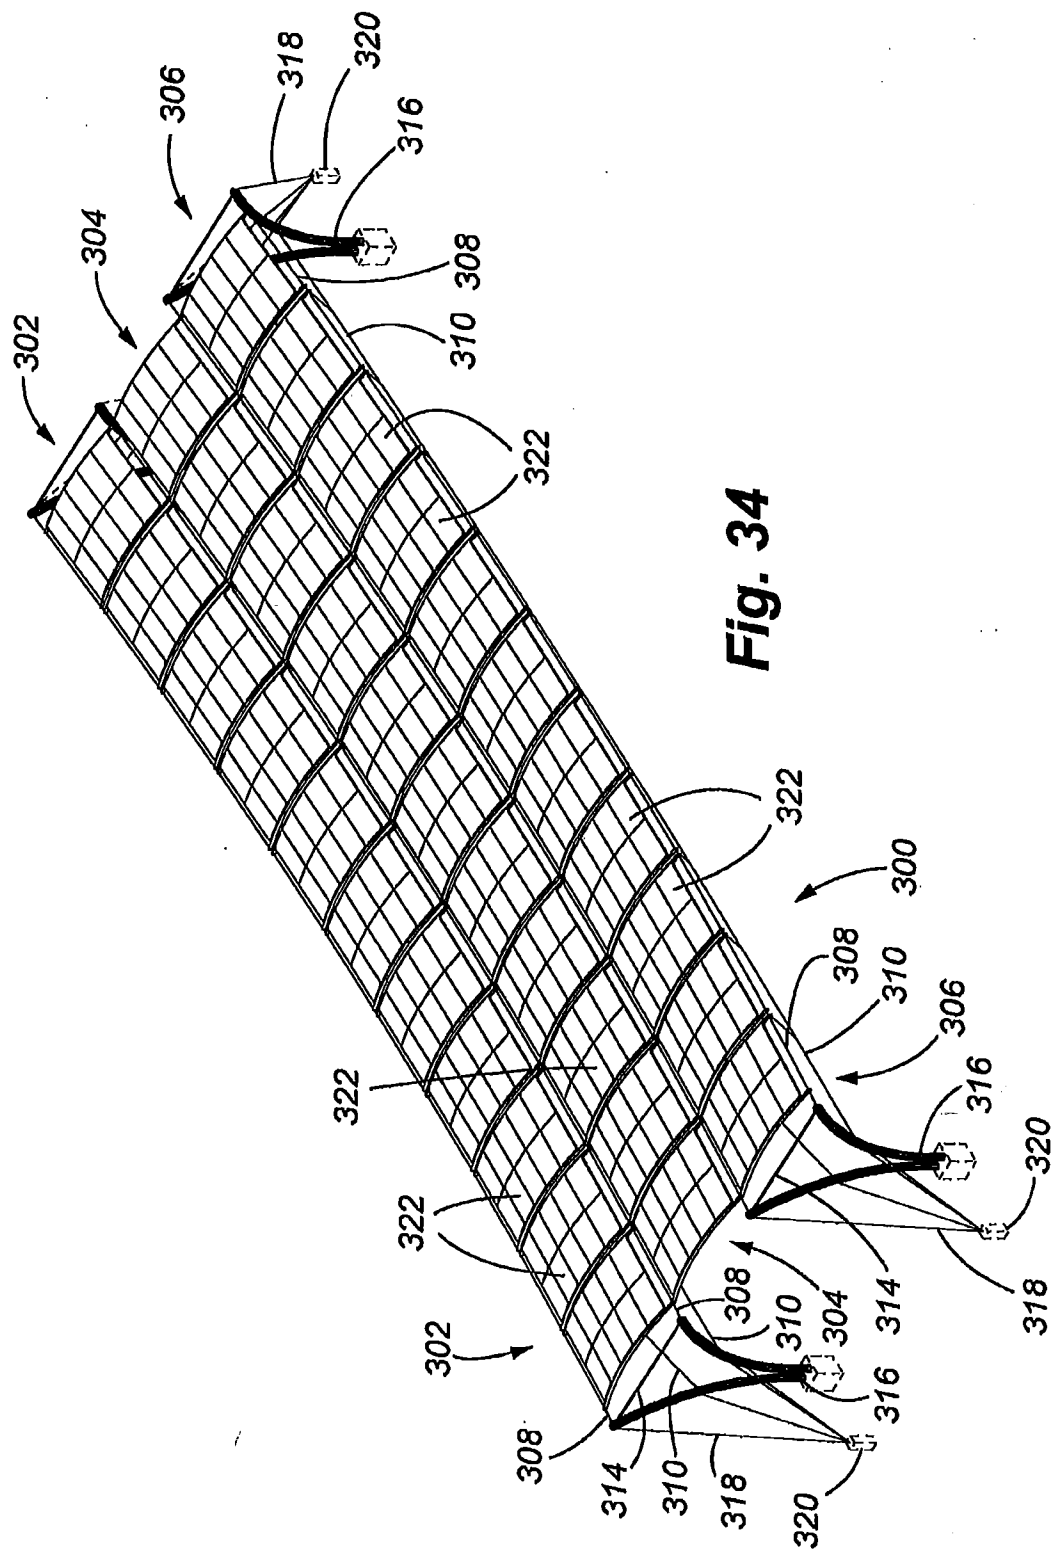
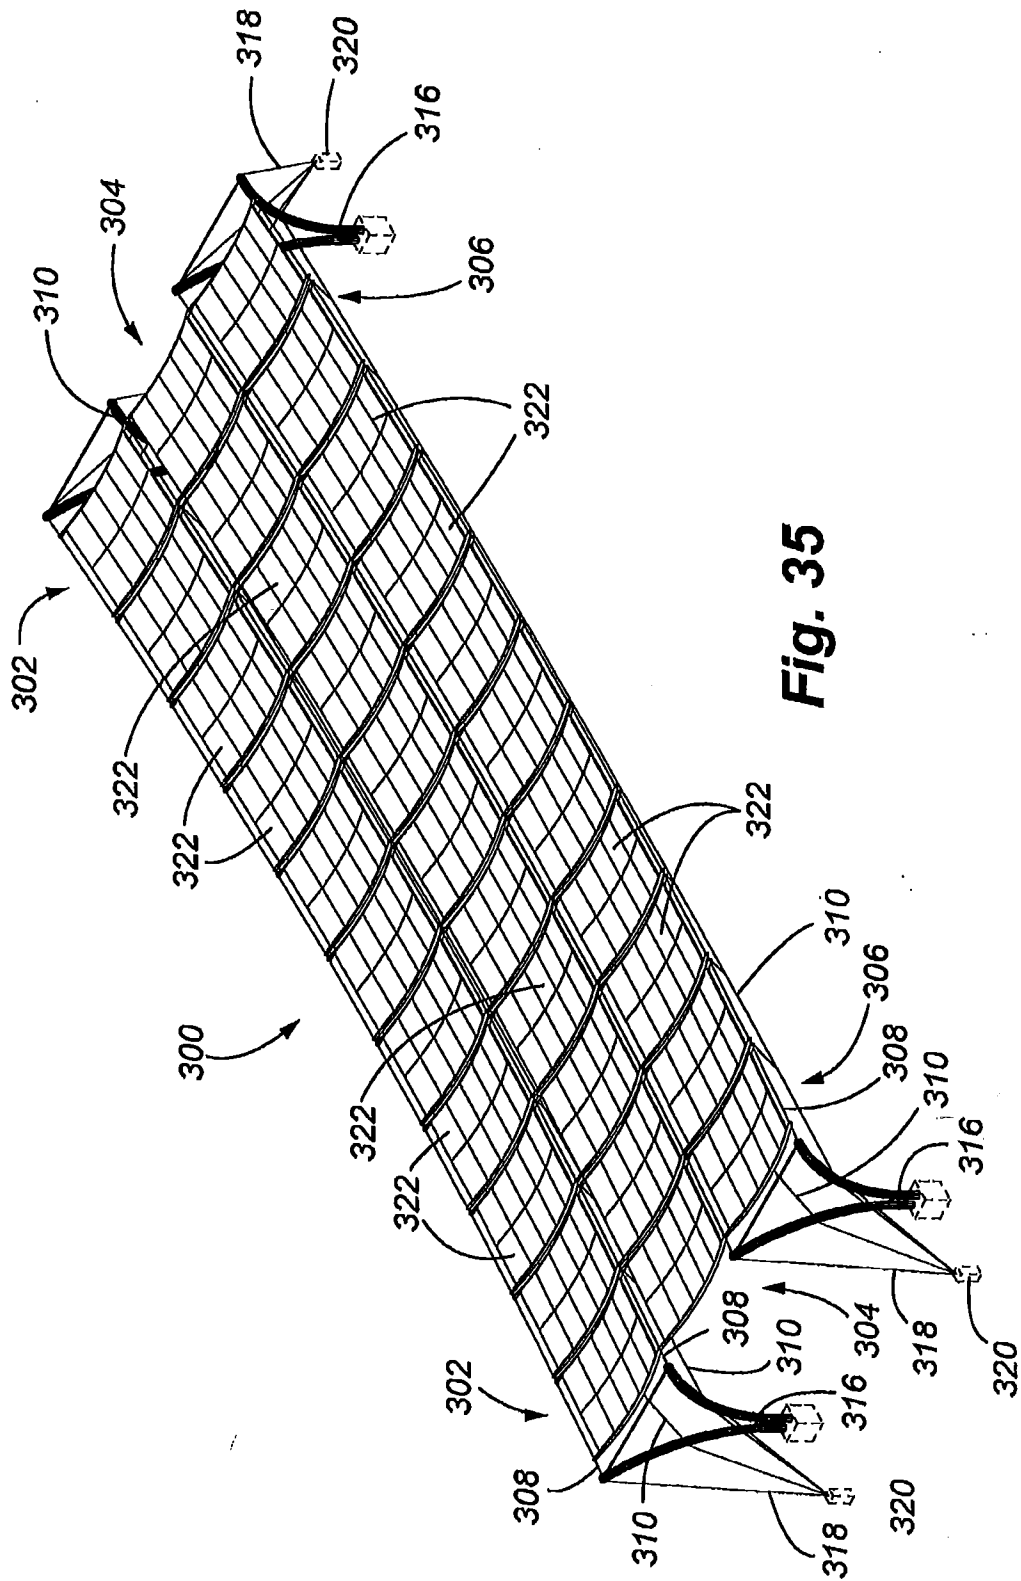


Fig. 33





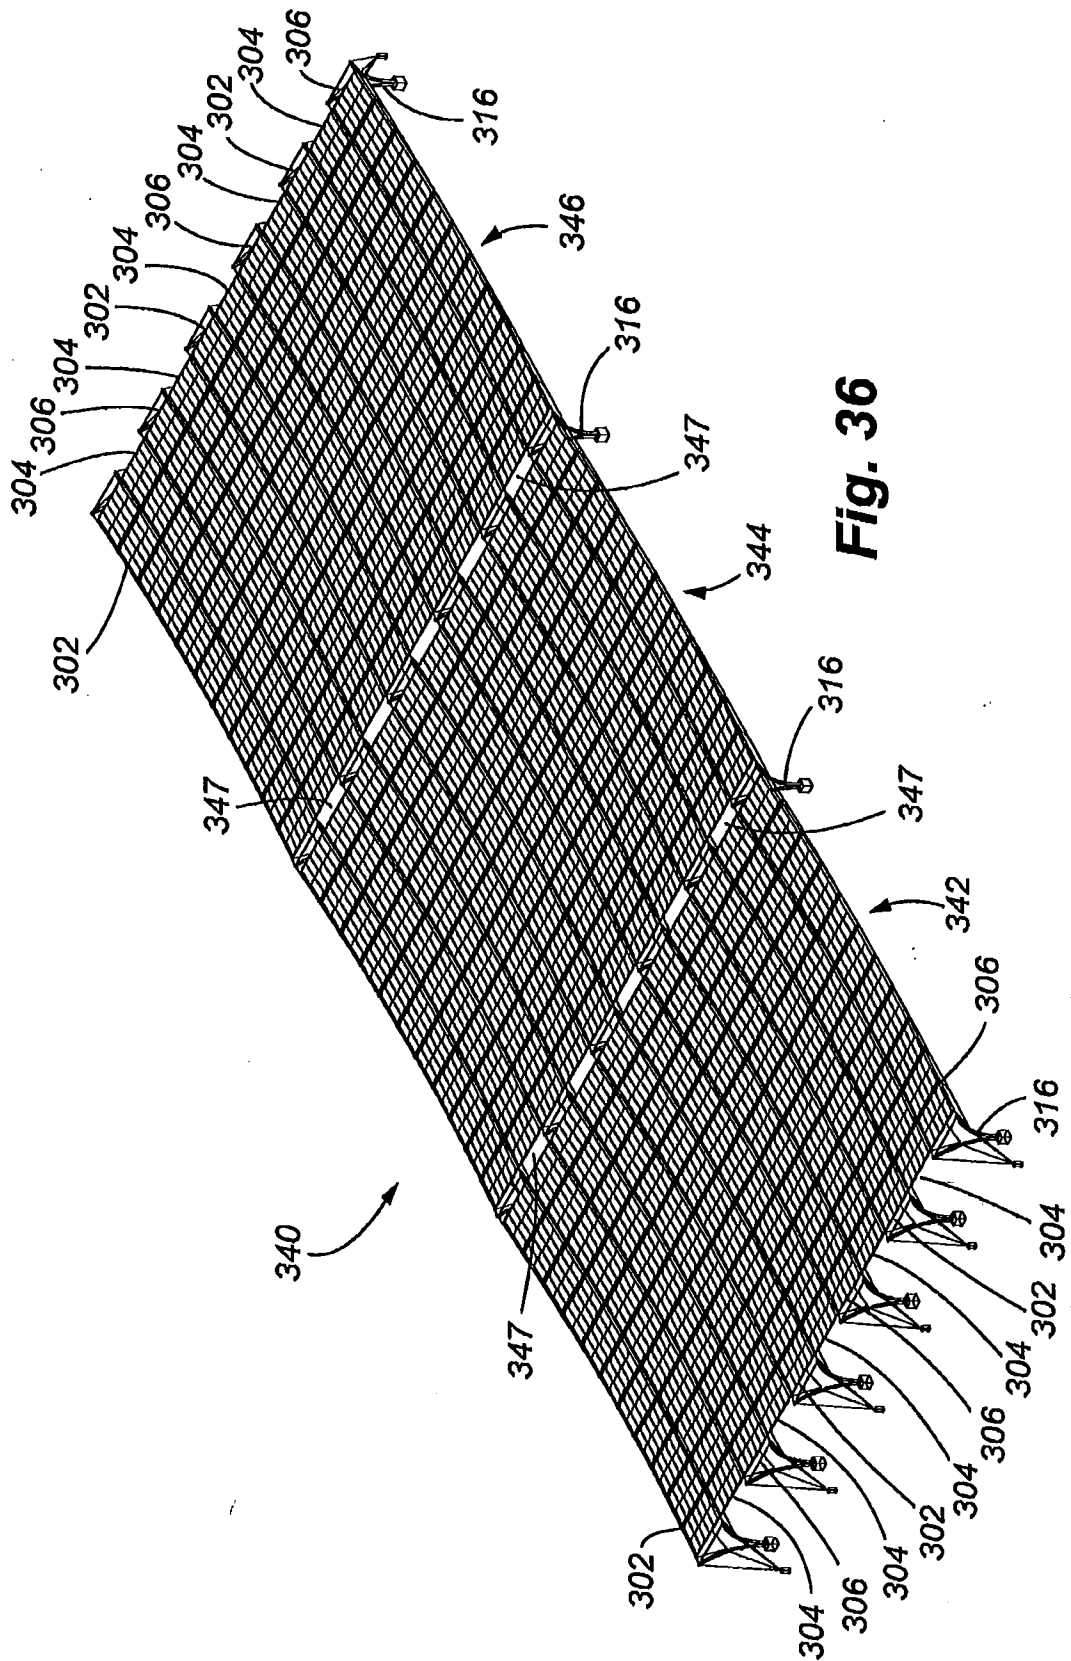
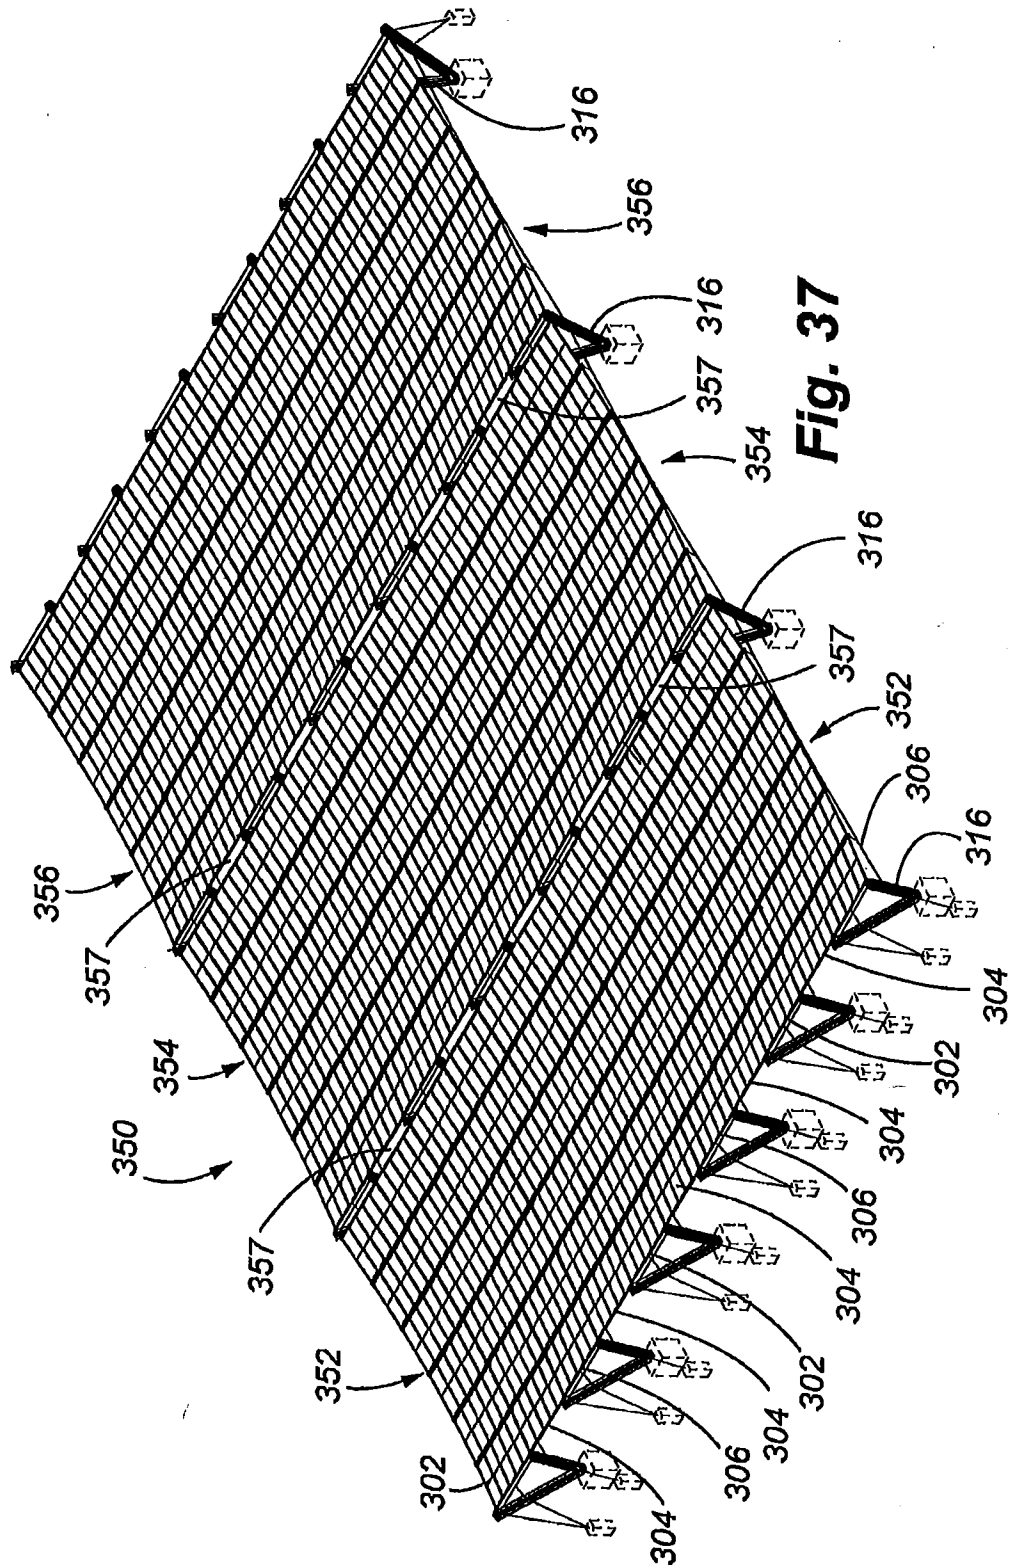


Fig. 36



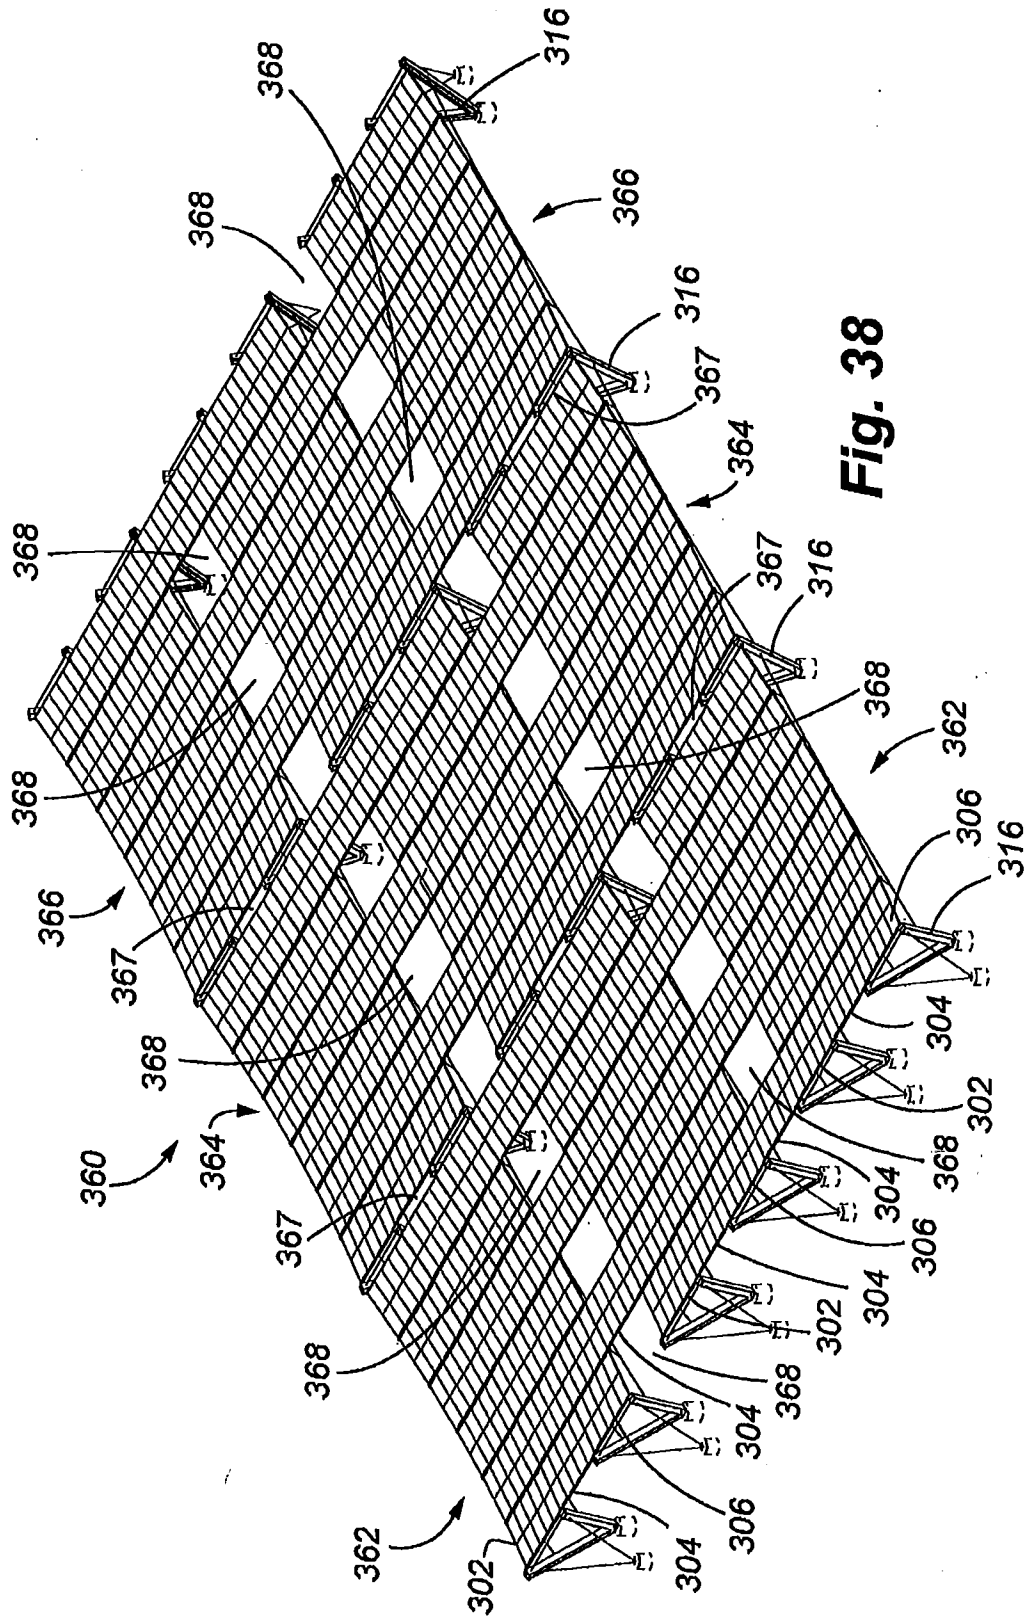
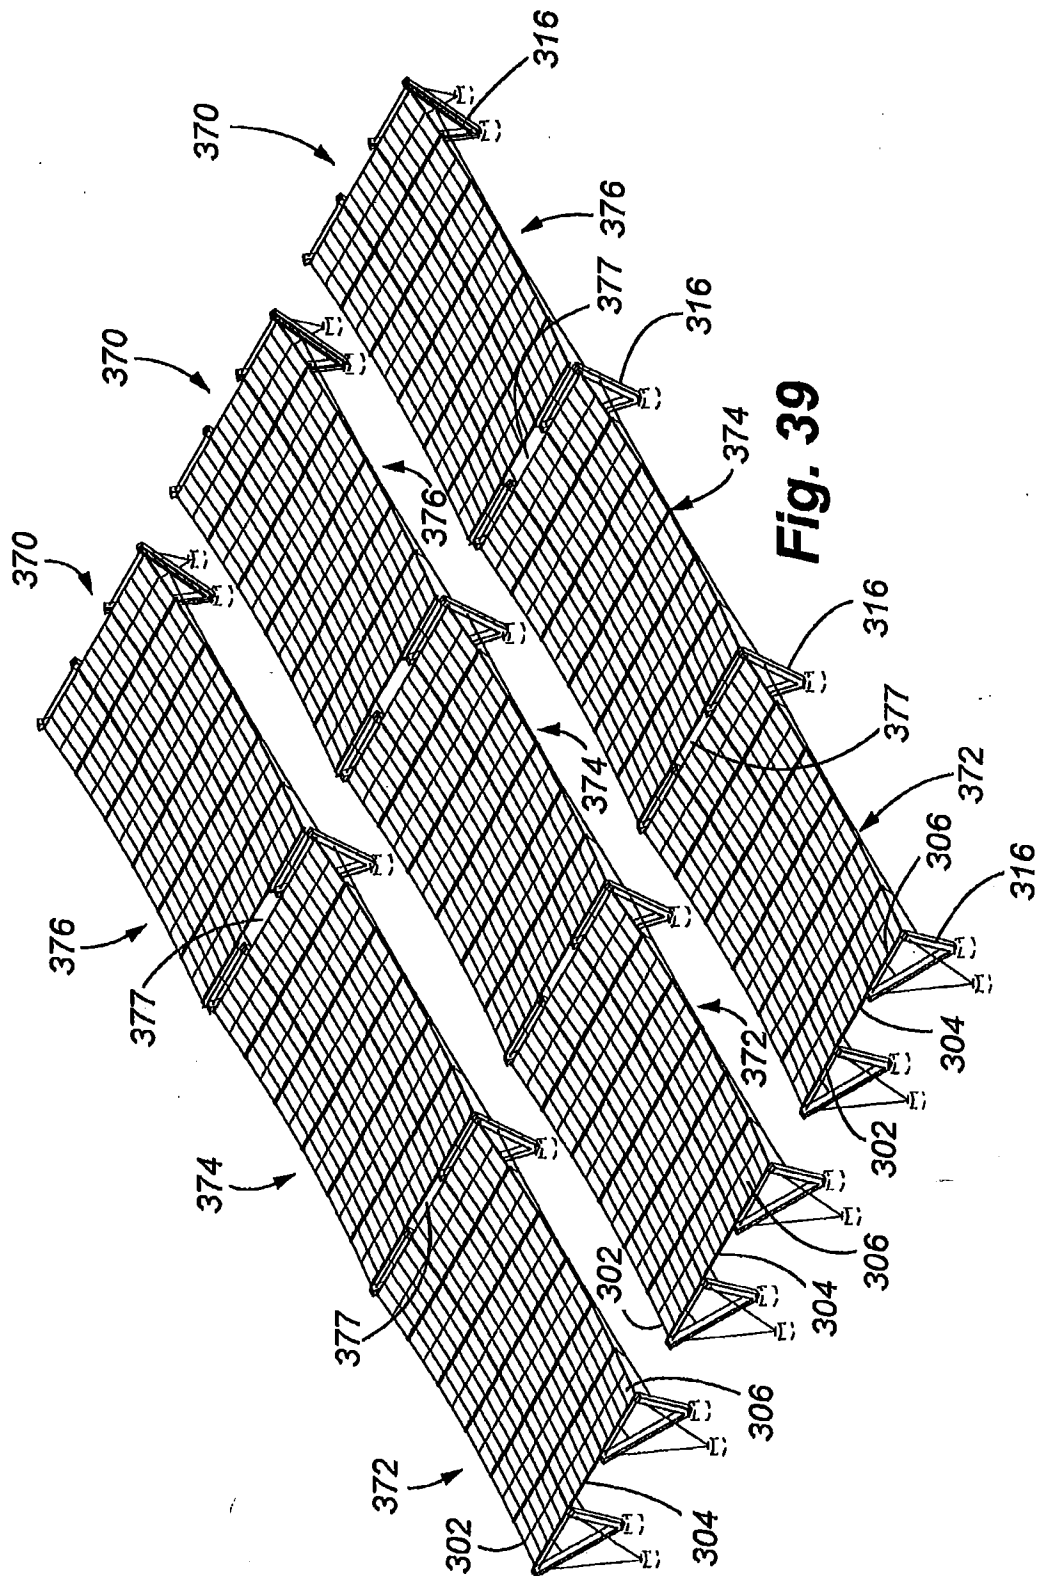


Fig. 38



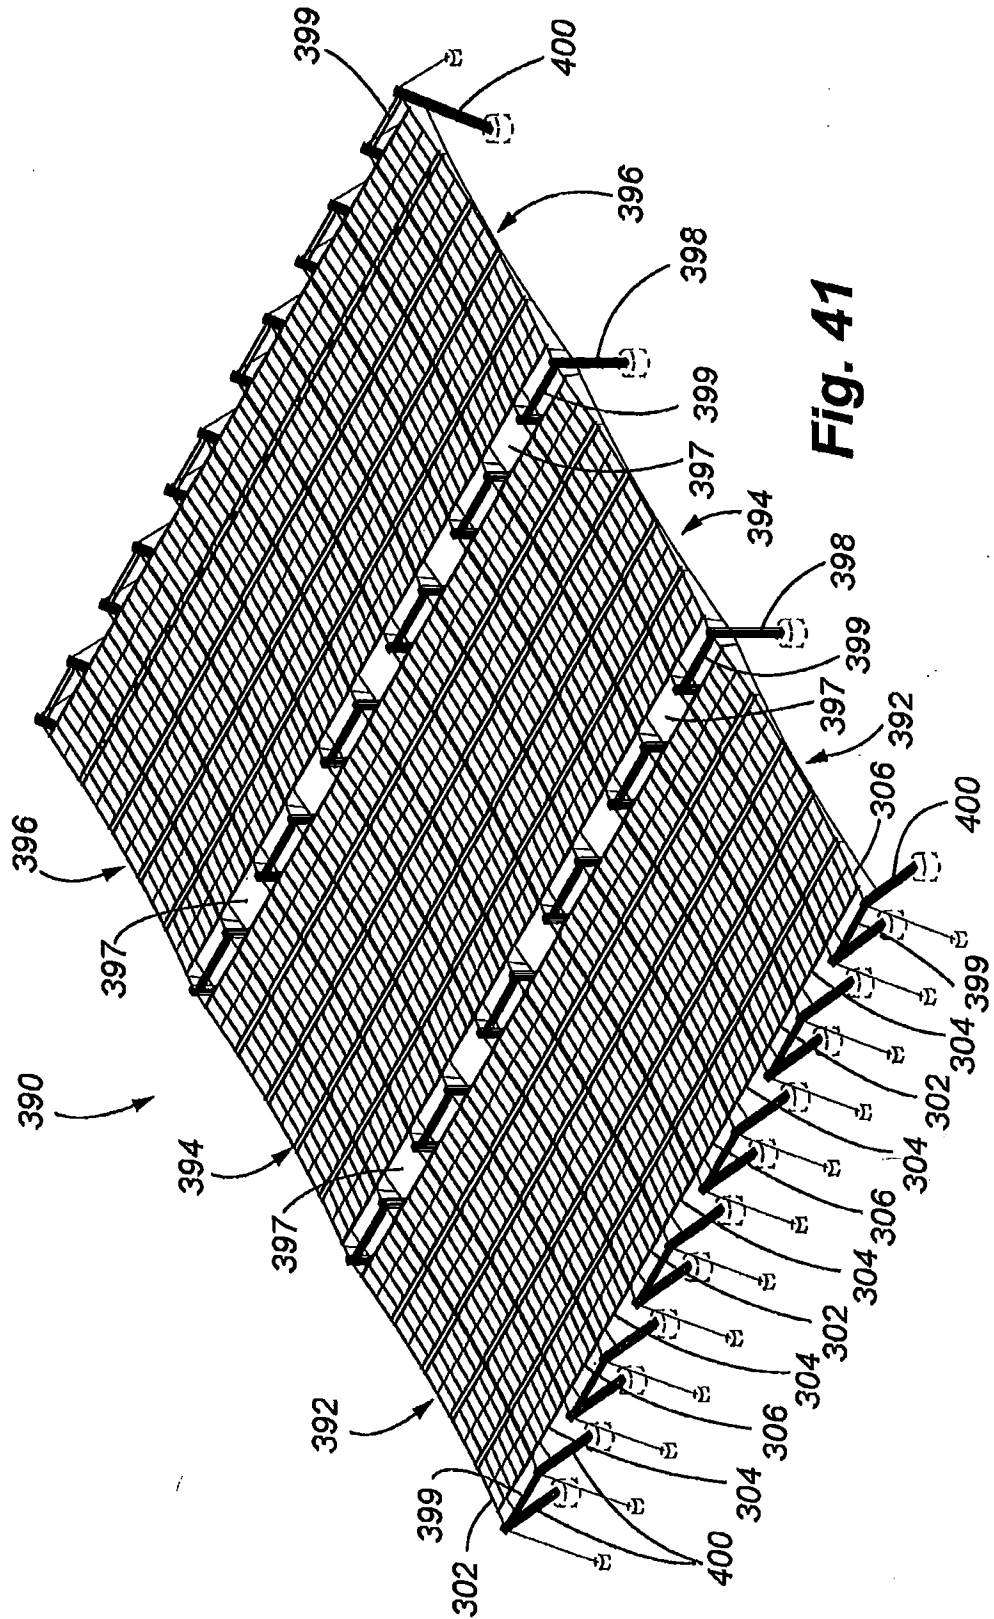


Fig. 41

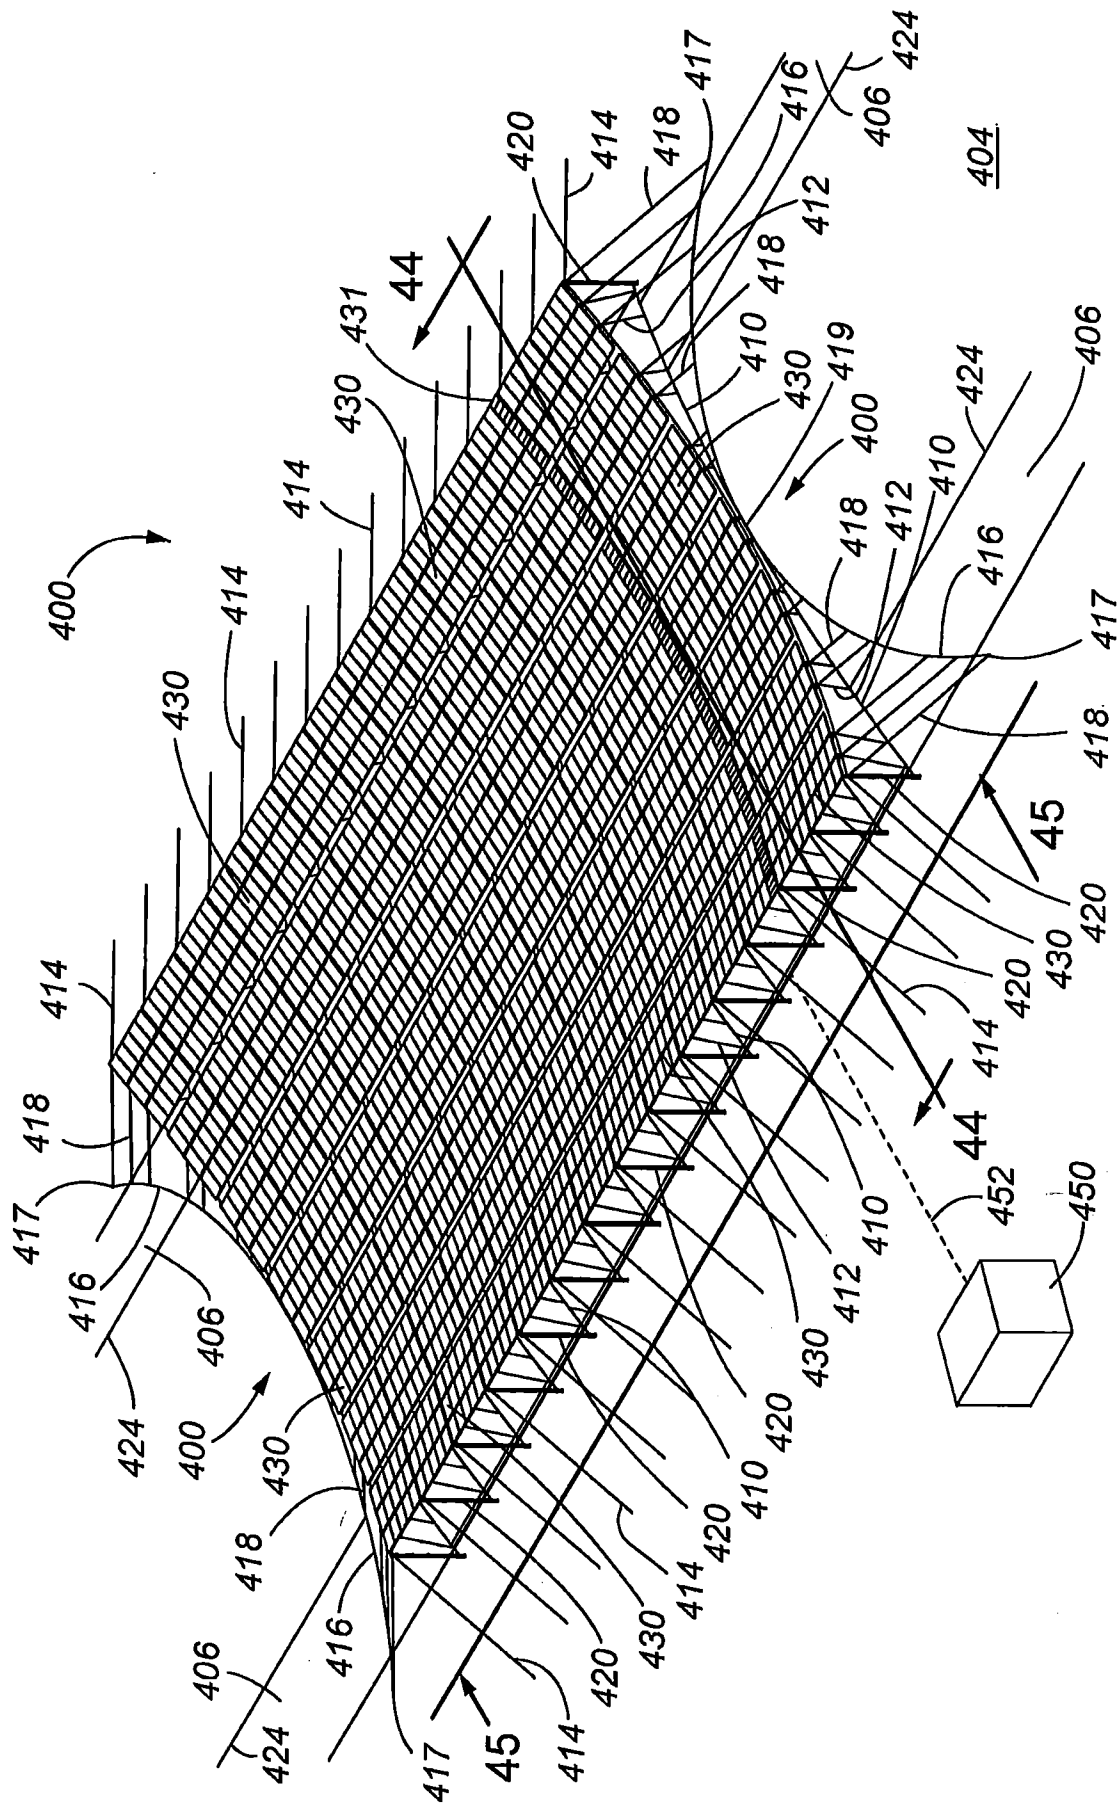


Fig. 42

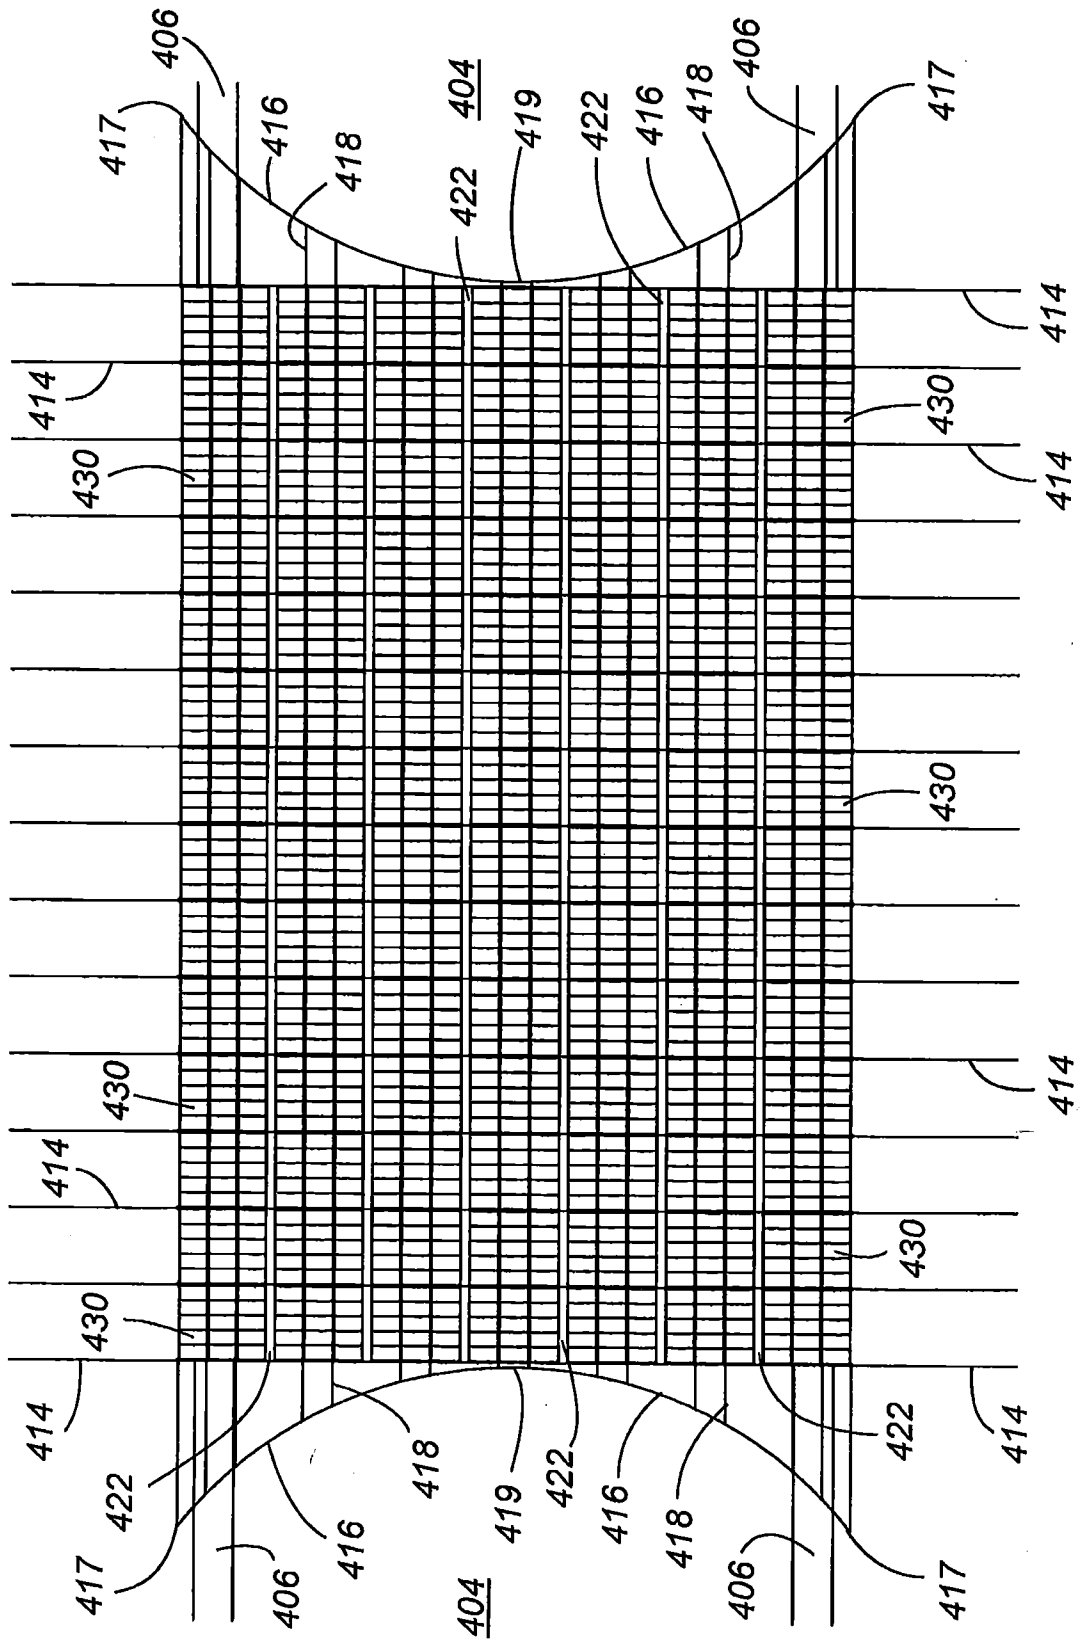


Fig. 43

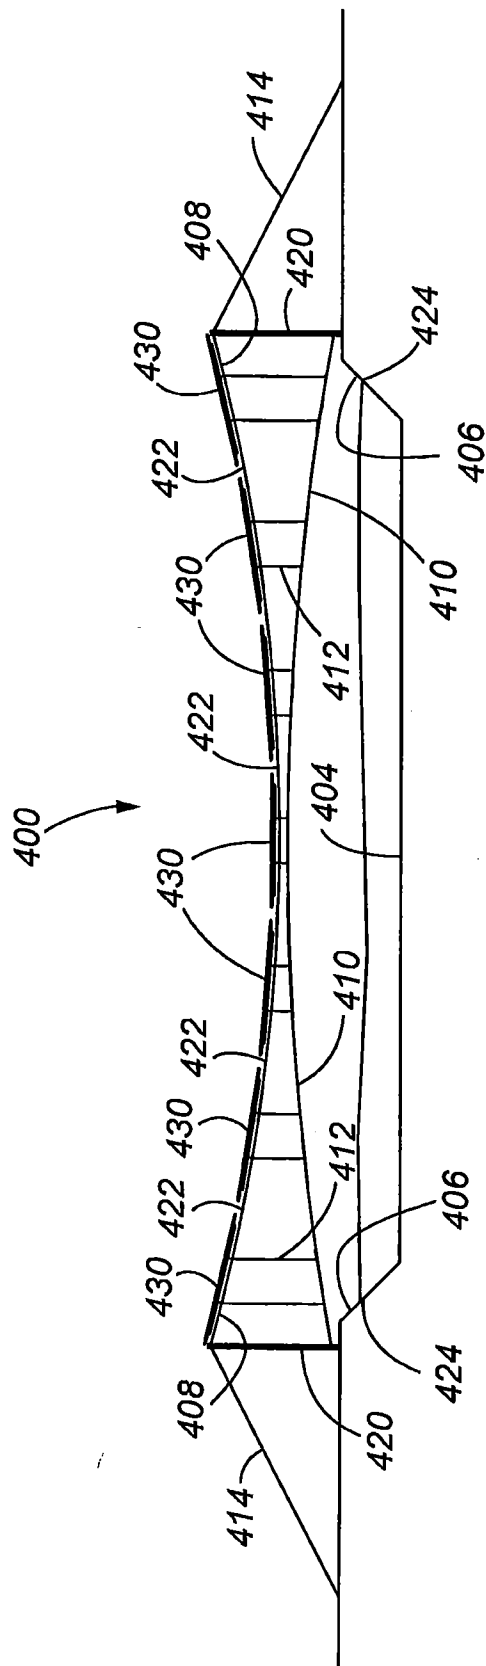


Fig. 44

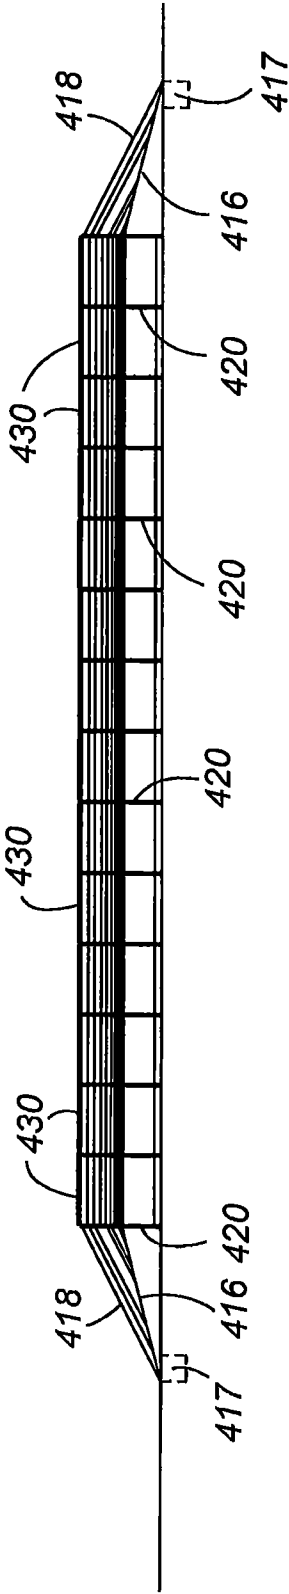


Fig. 45

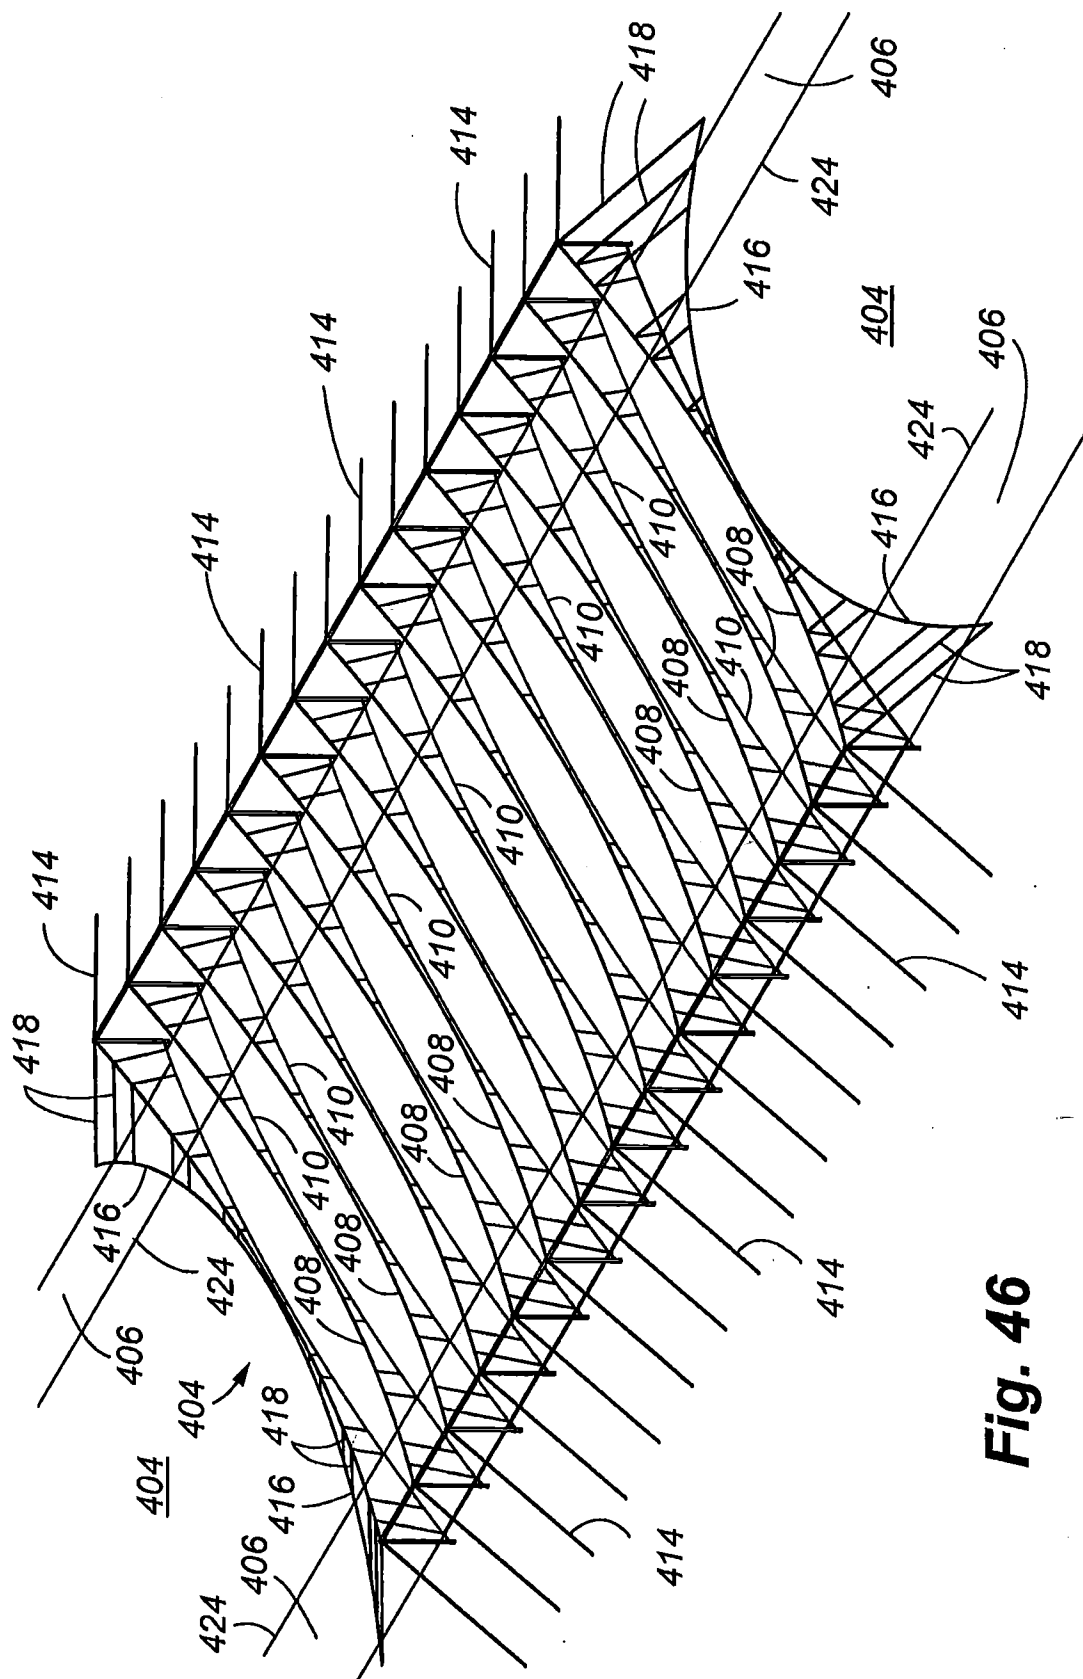


Fig. 46

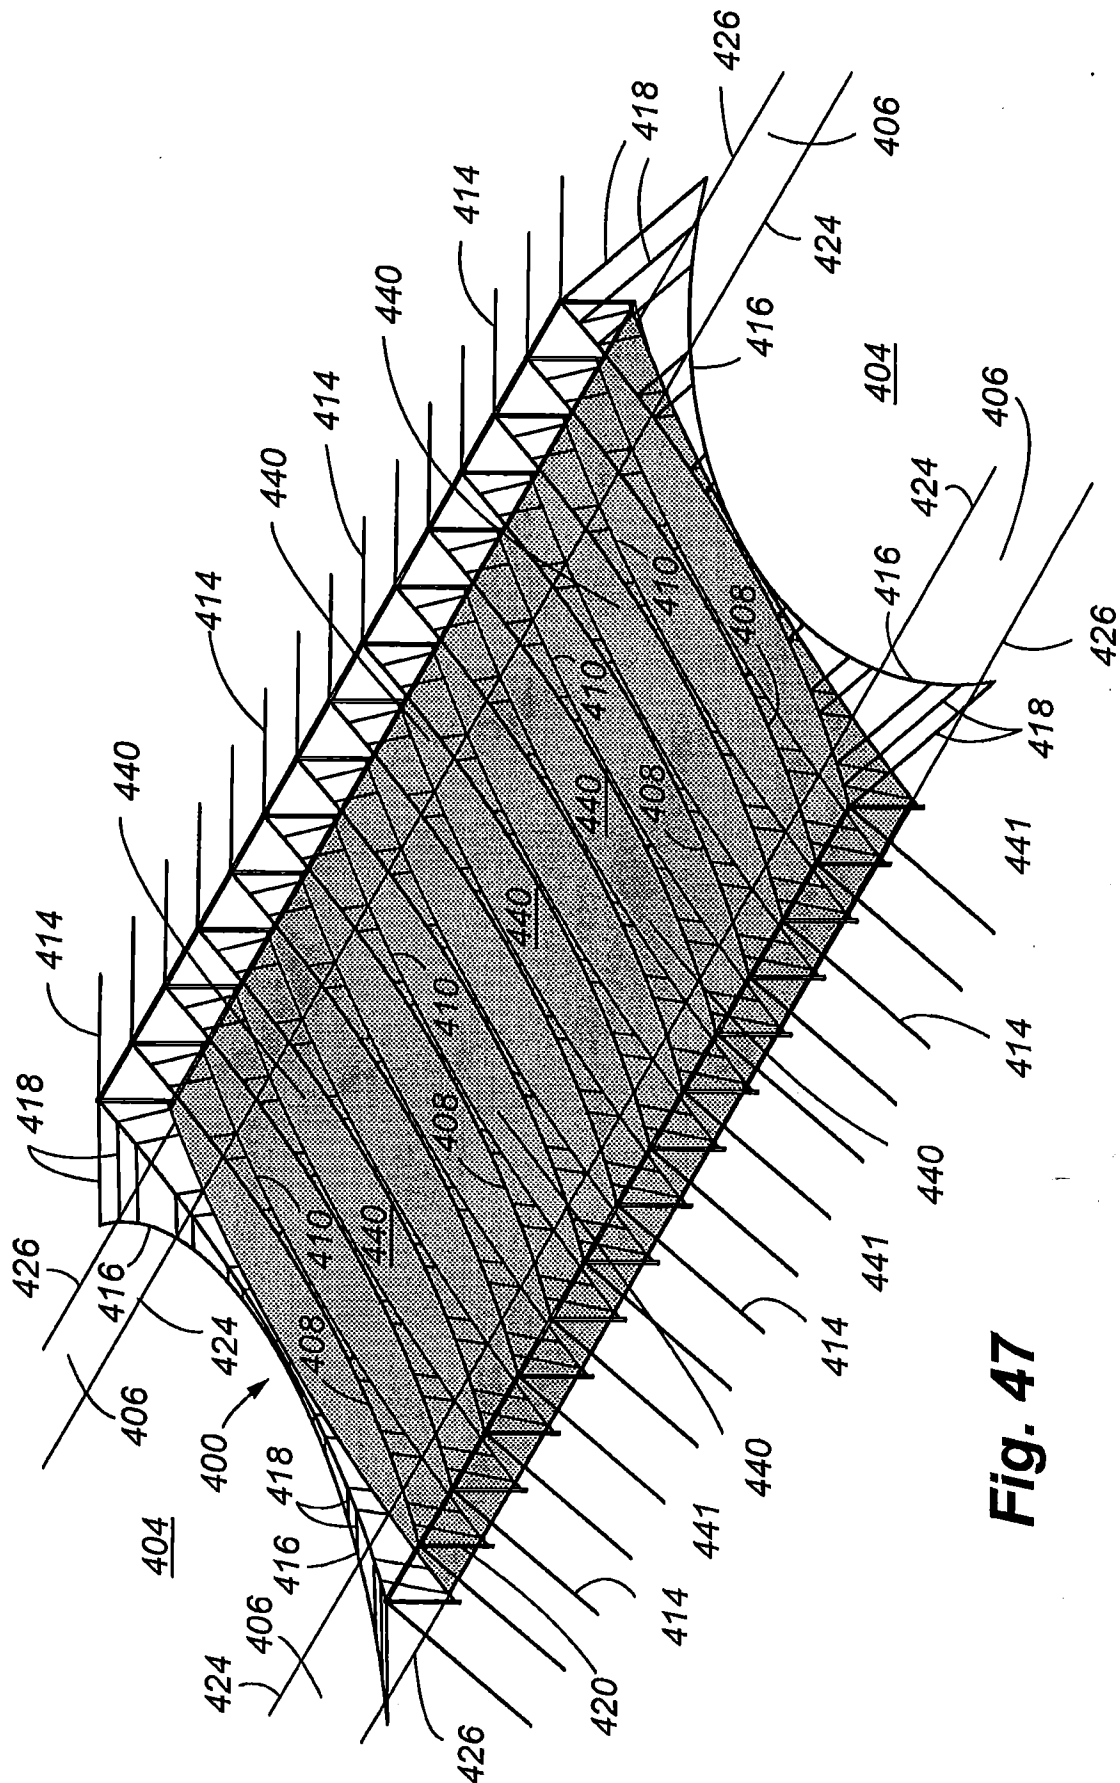


Fig. 47

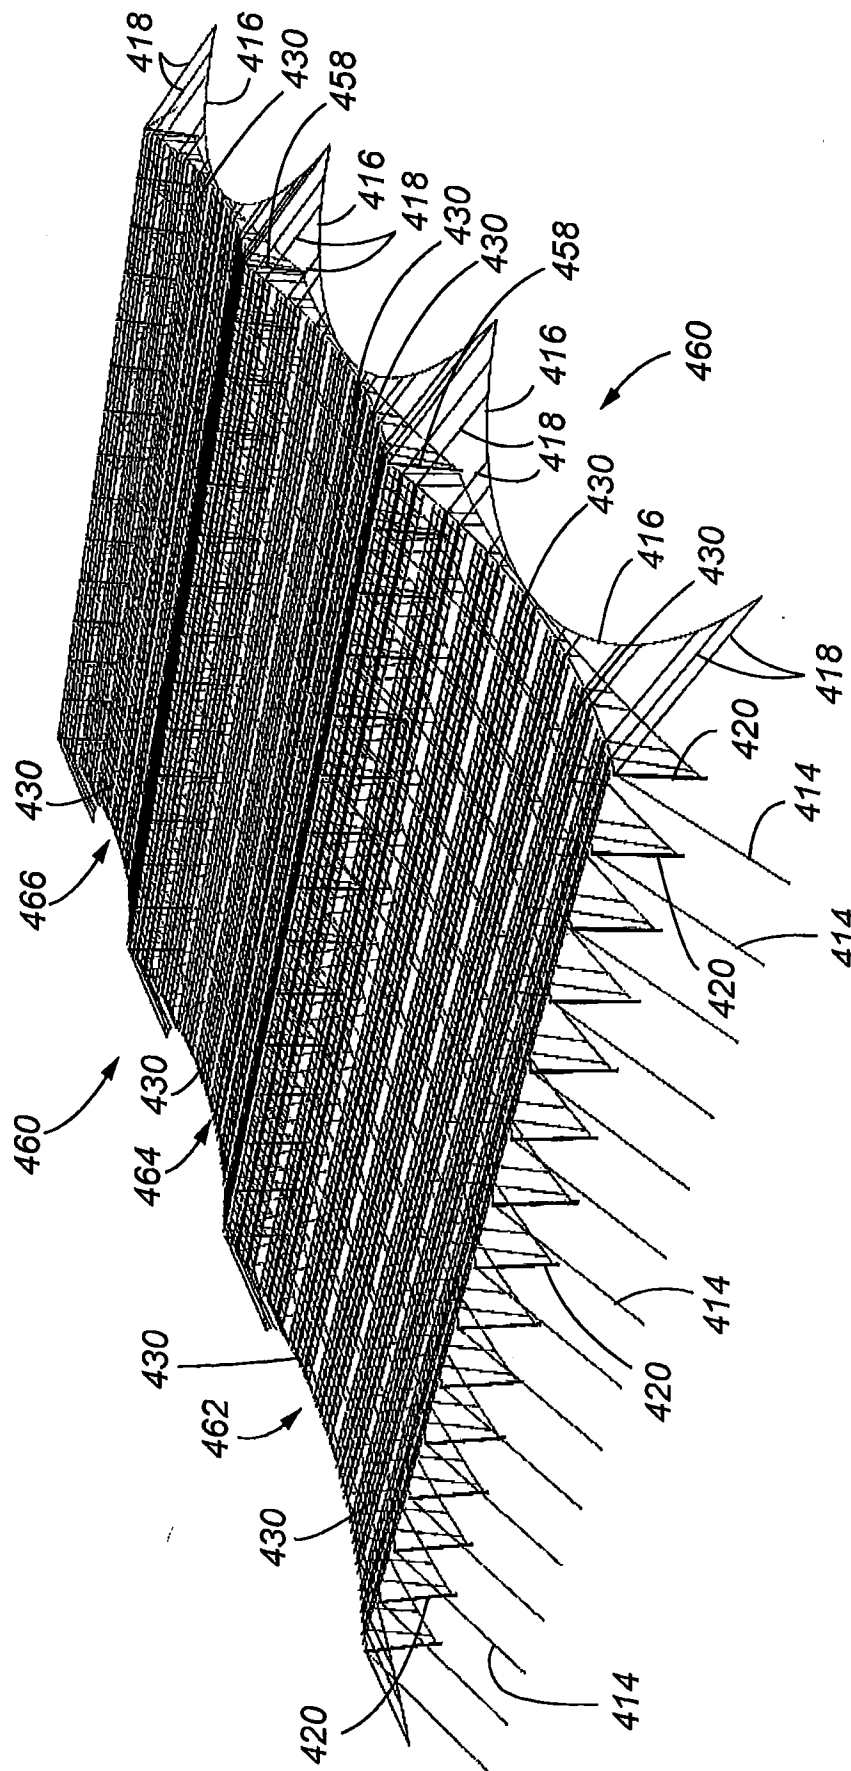


Fig. 48

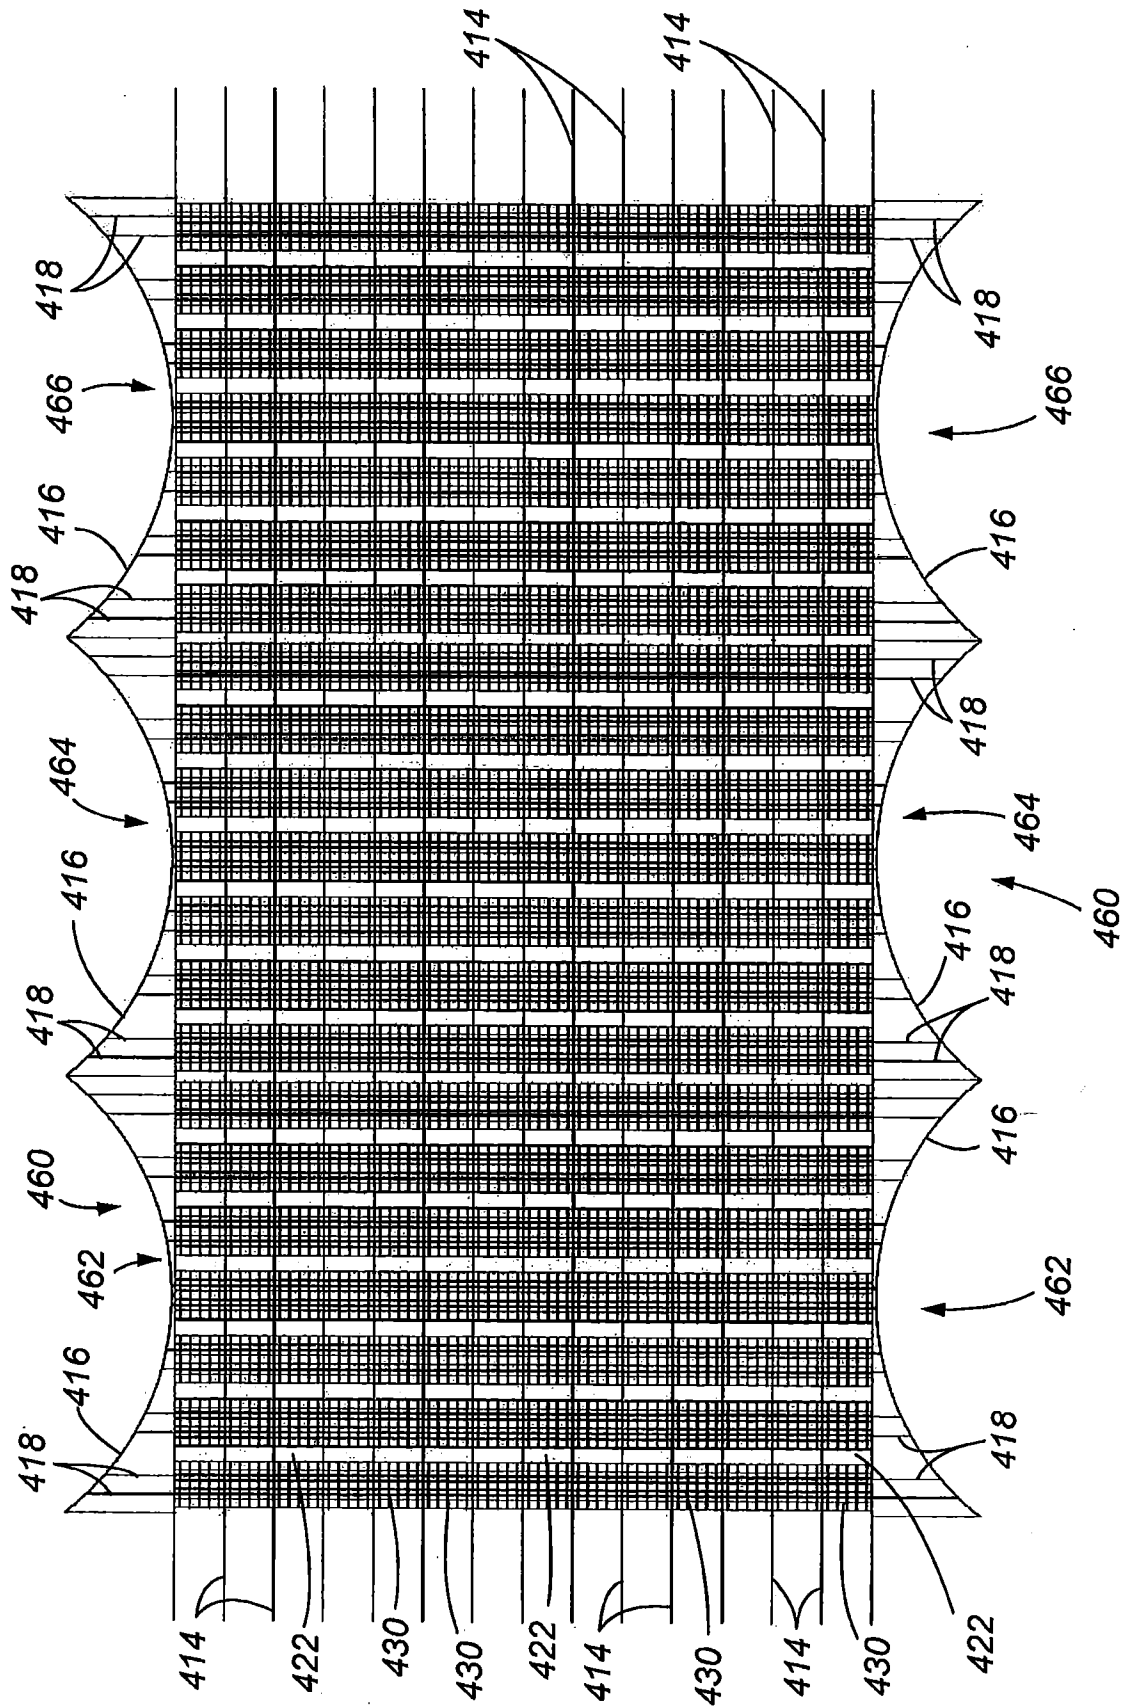
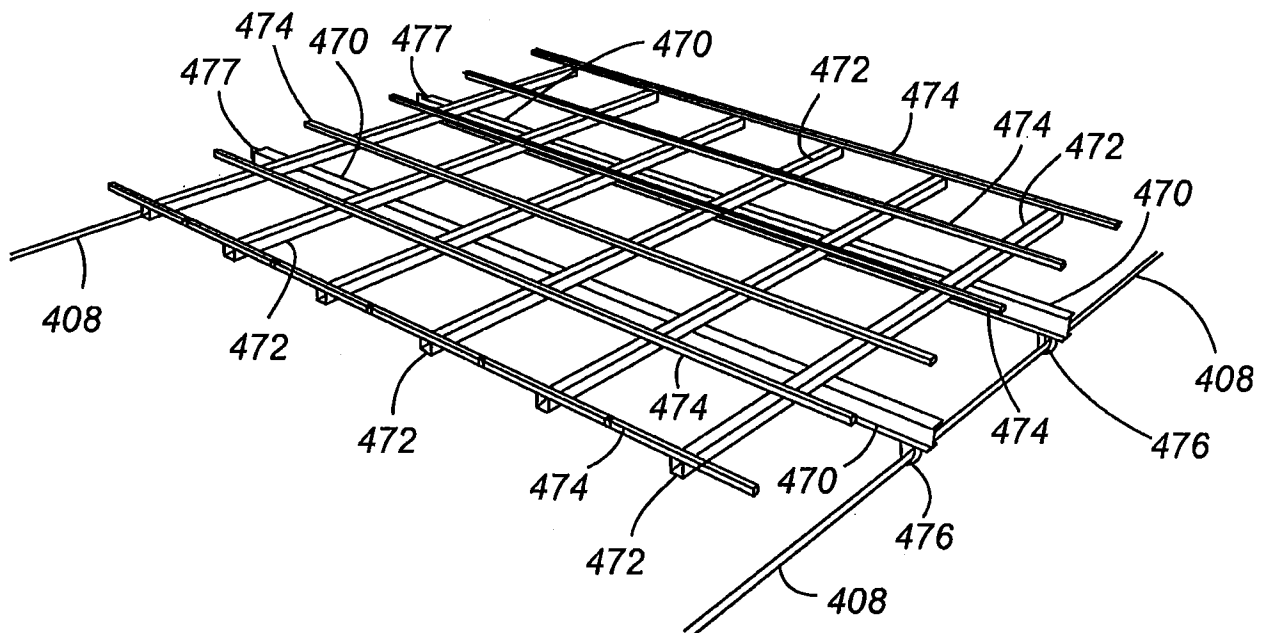
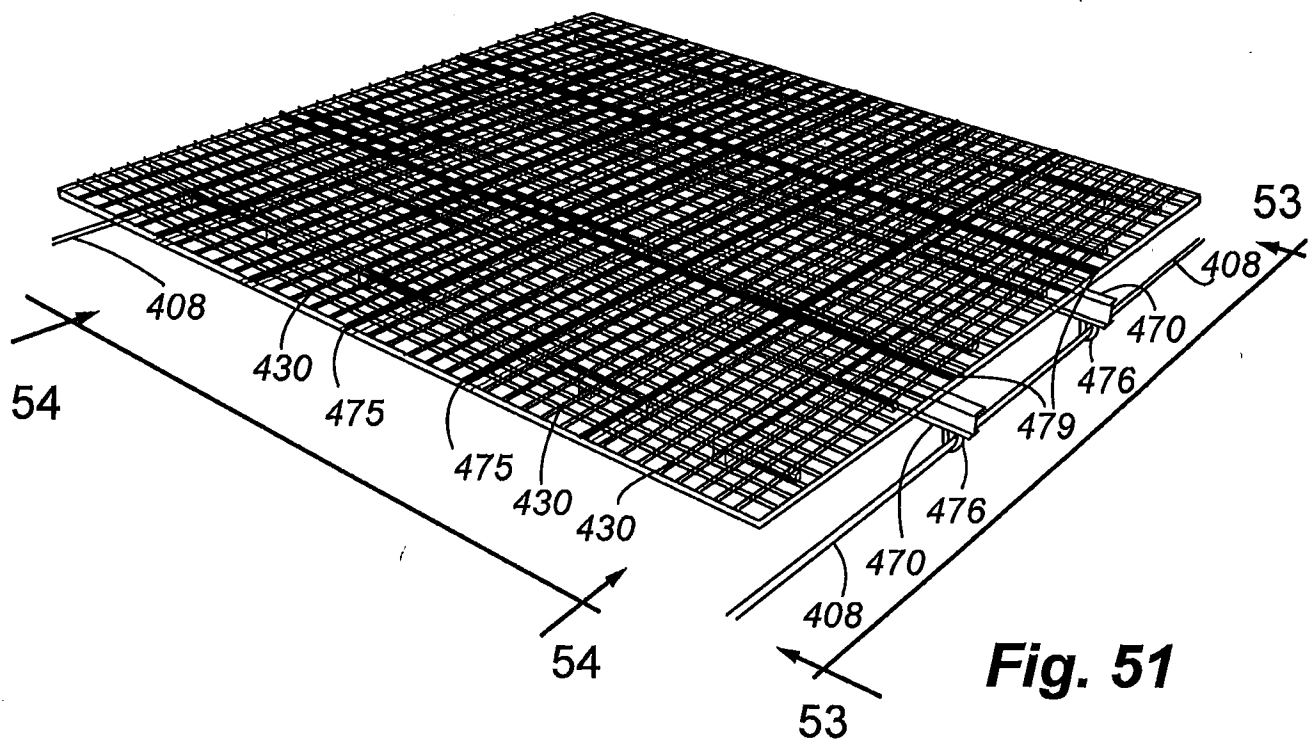


Fig. 49

**Fig. 50****Fig. 51**

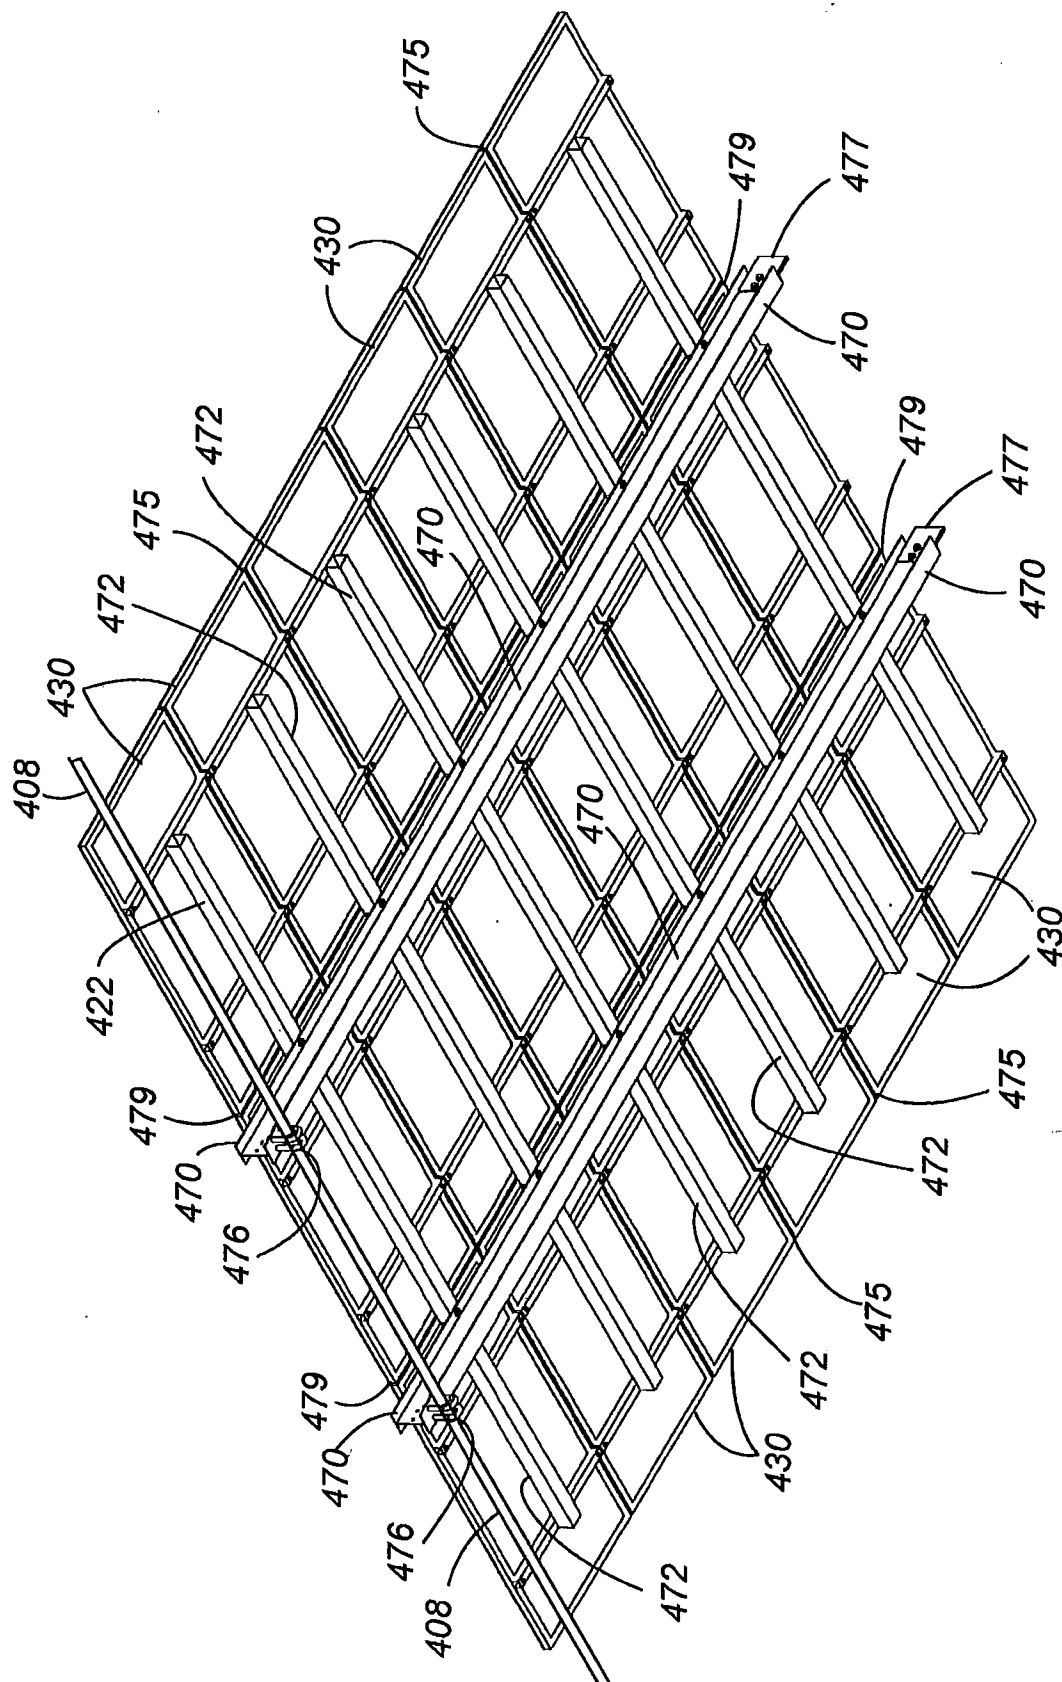


Fig. 52

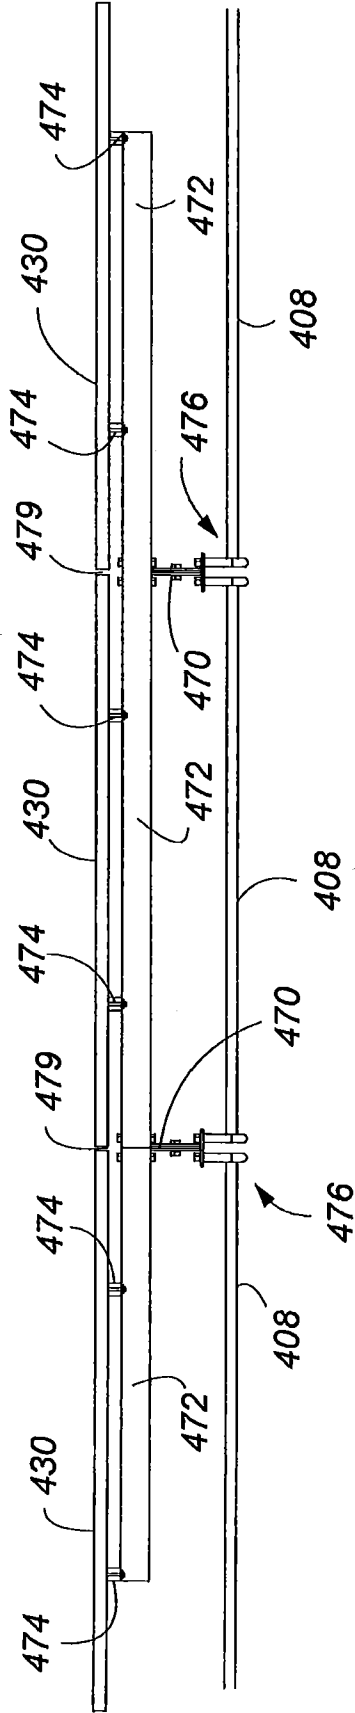


Fig. 53

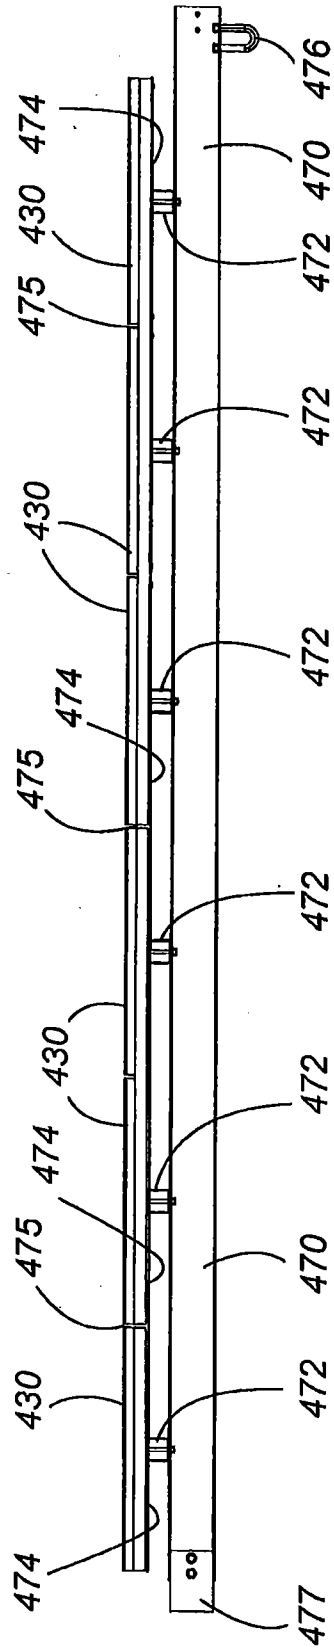


Fig. 54

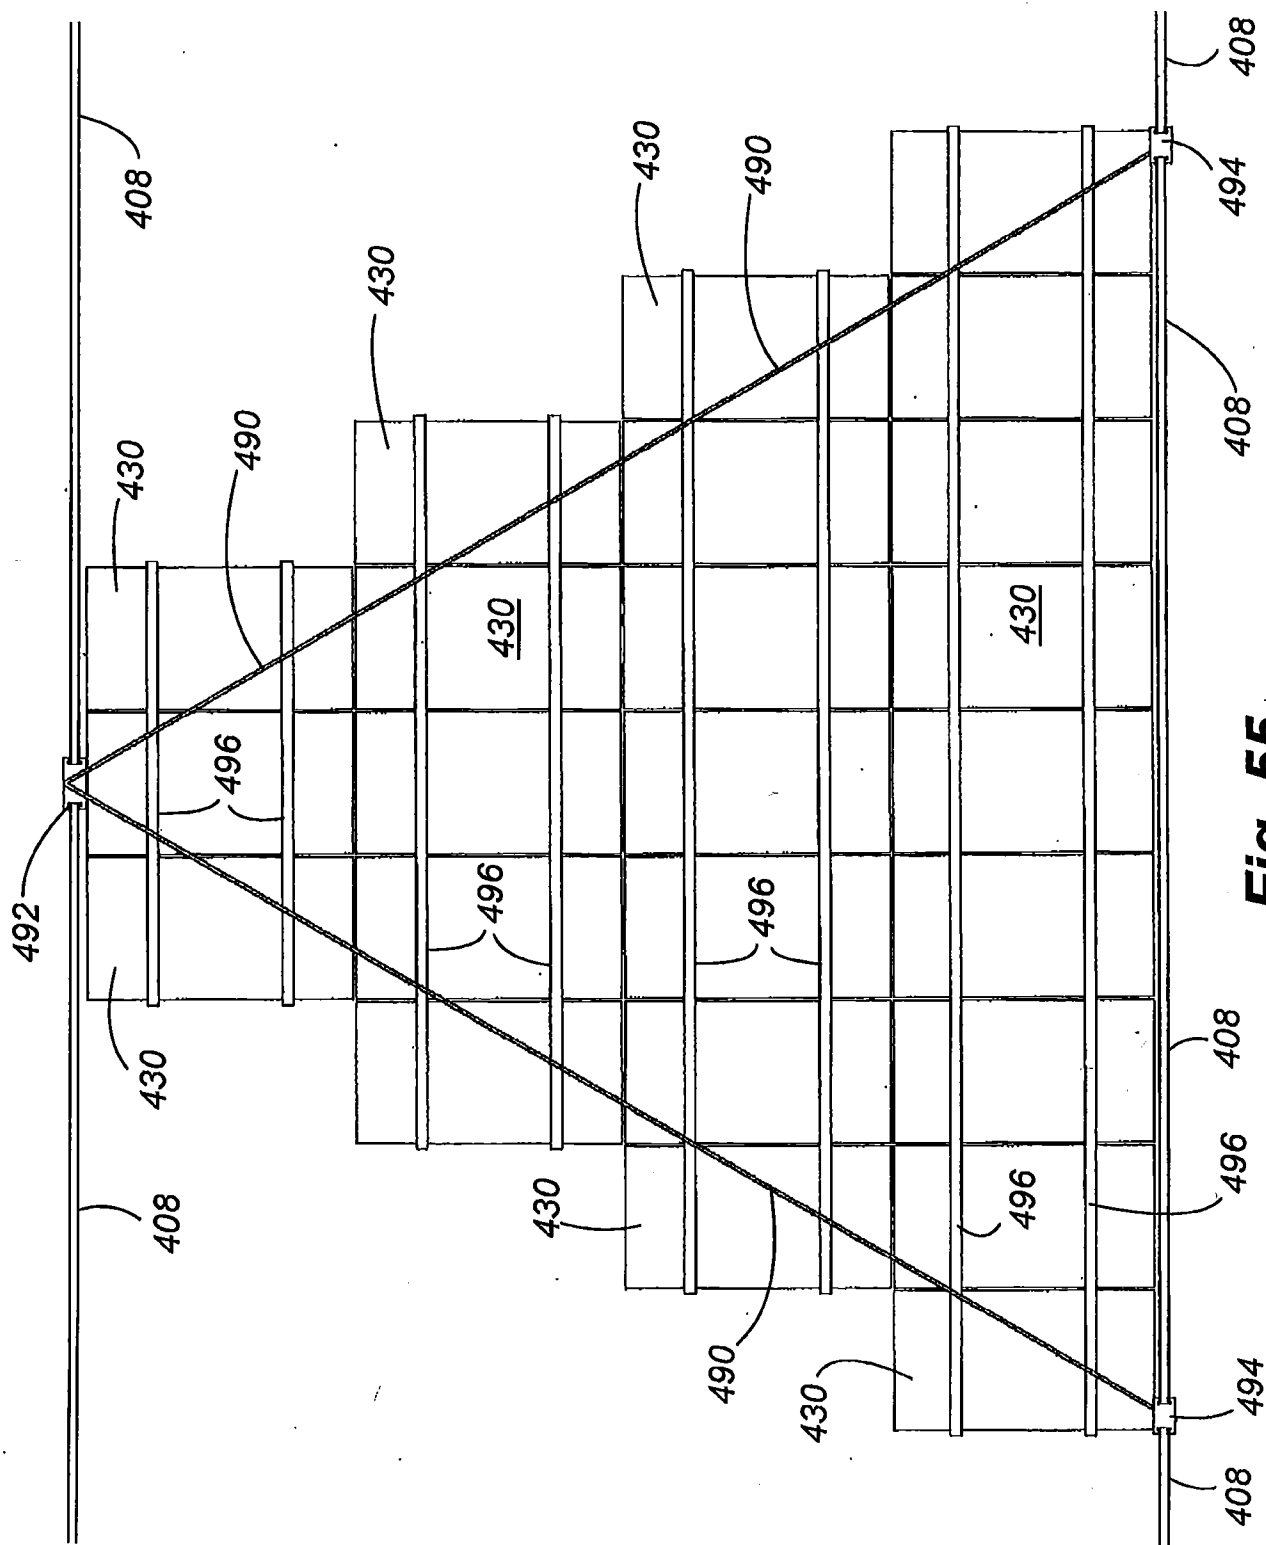


Fig. 55

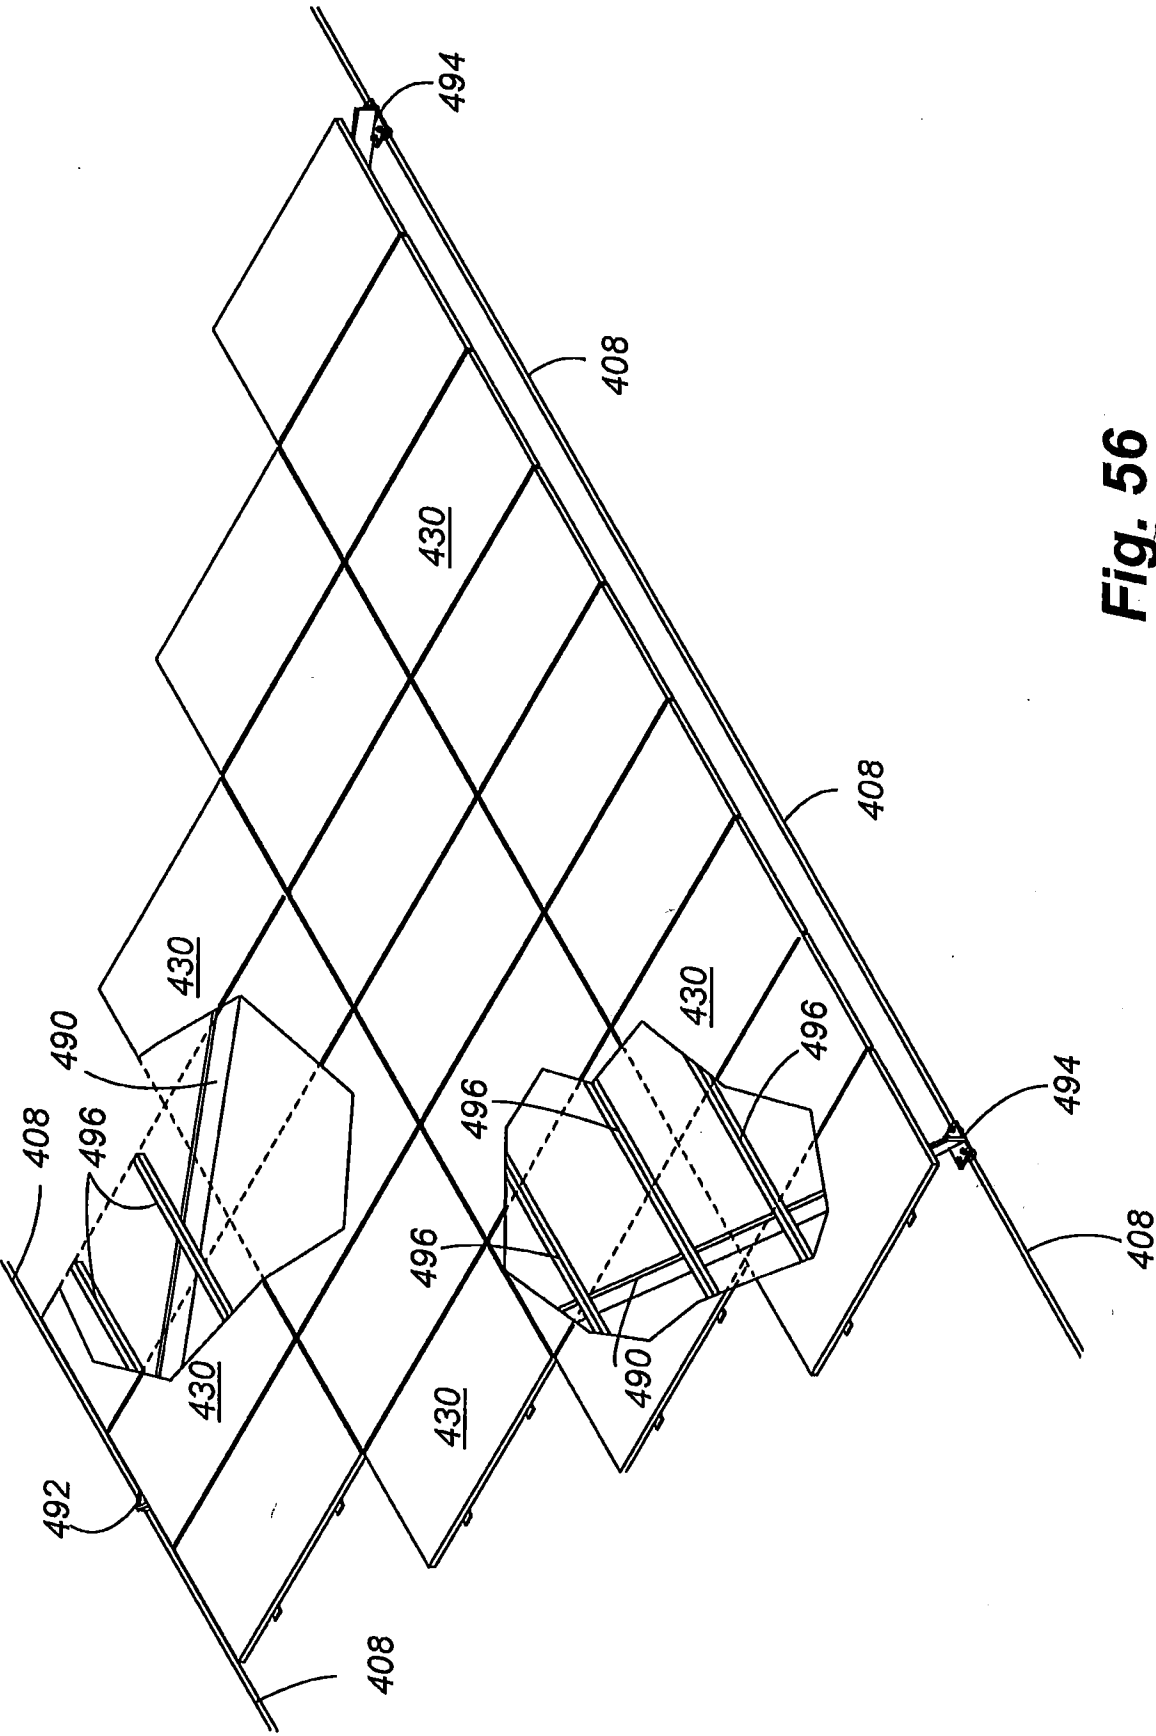


Fig. 56

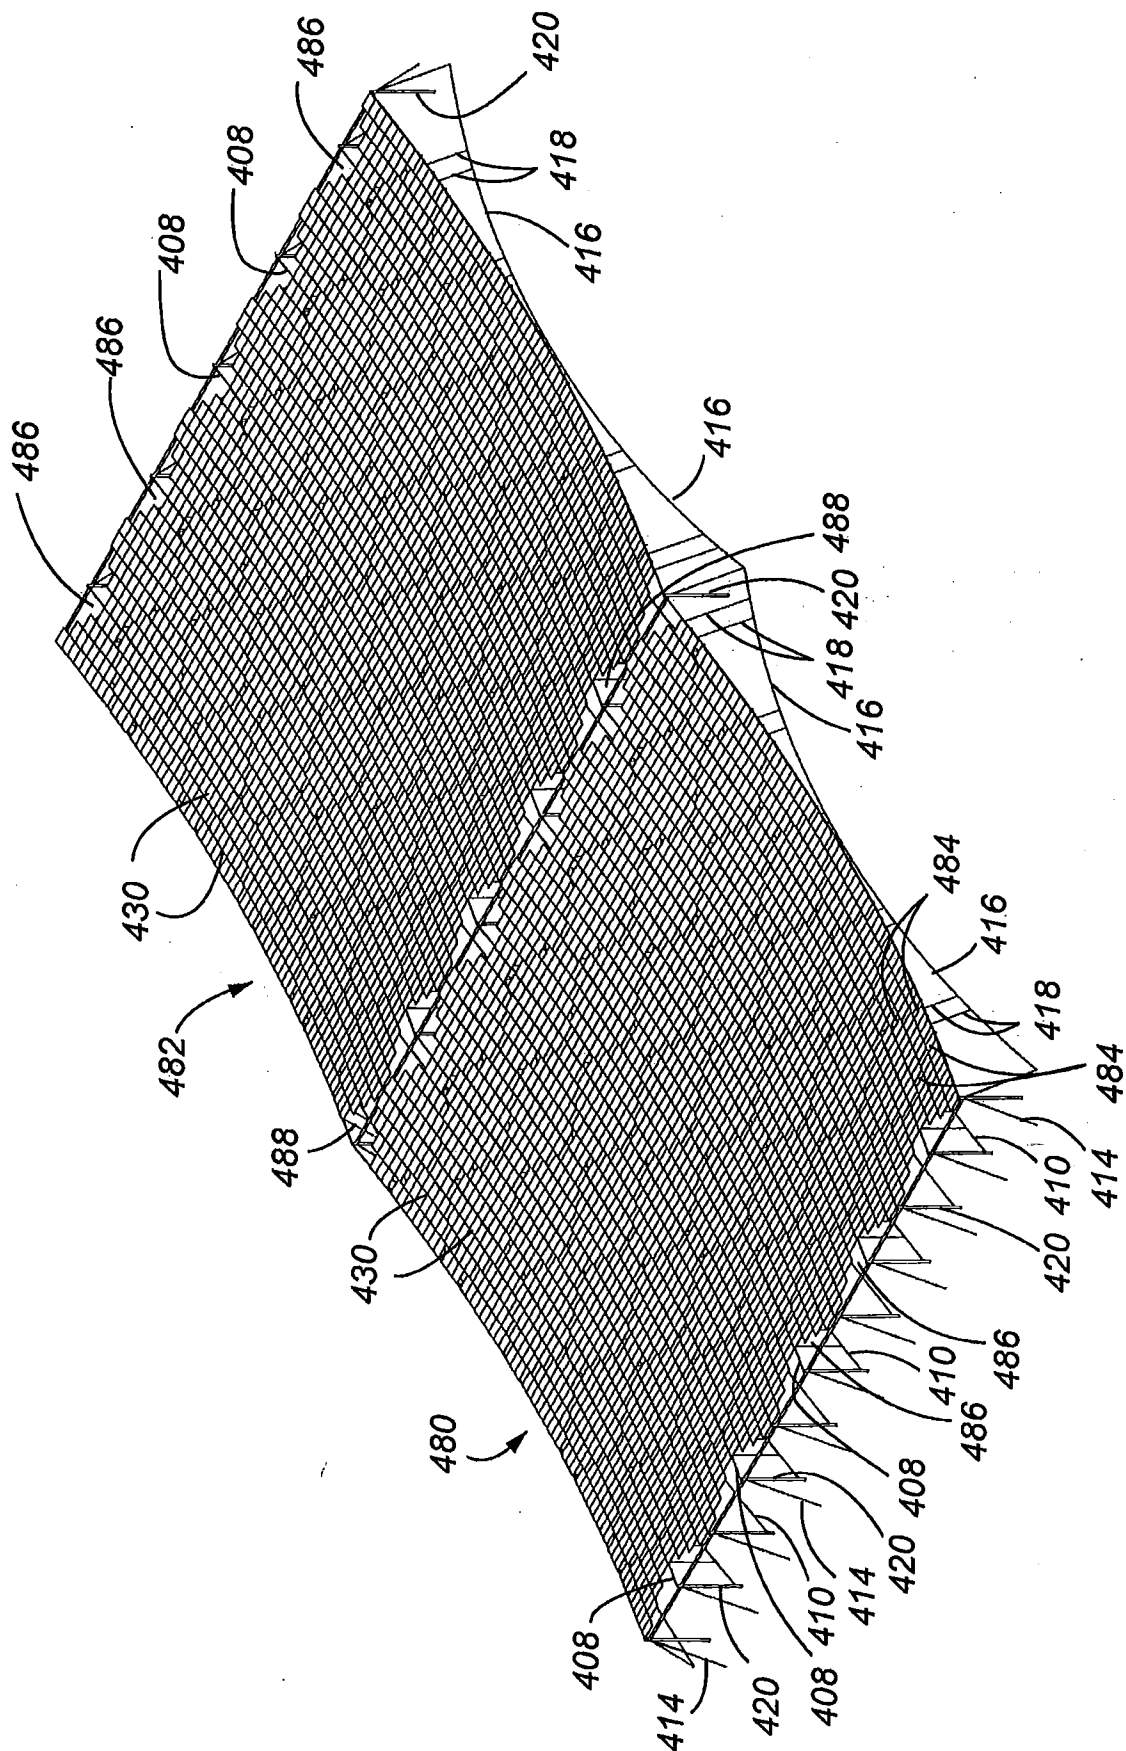


Fig. 57

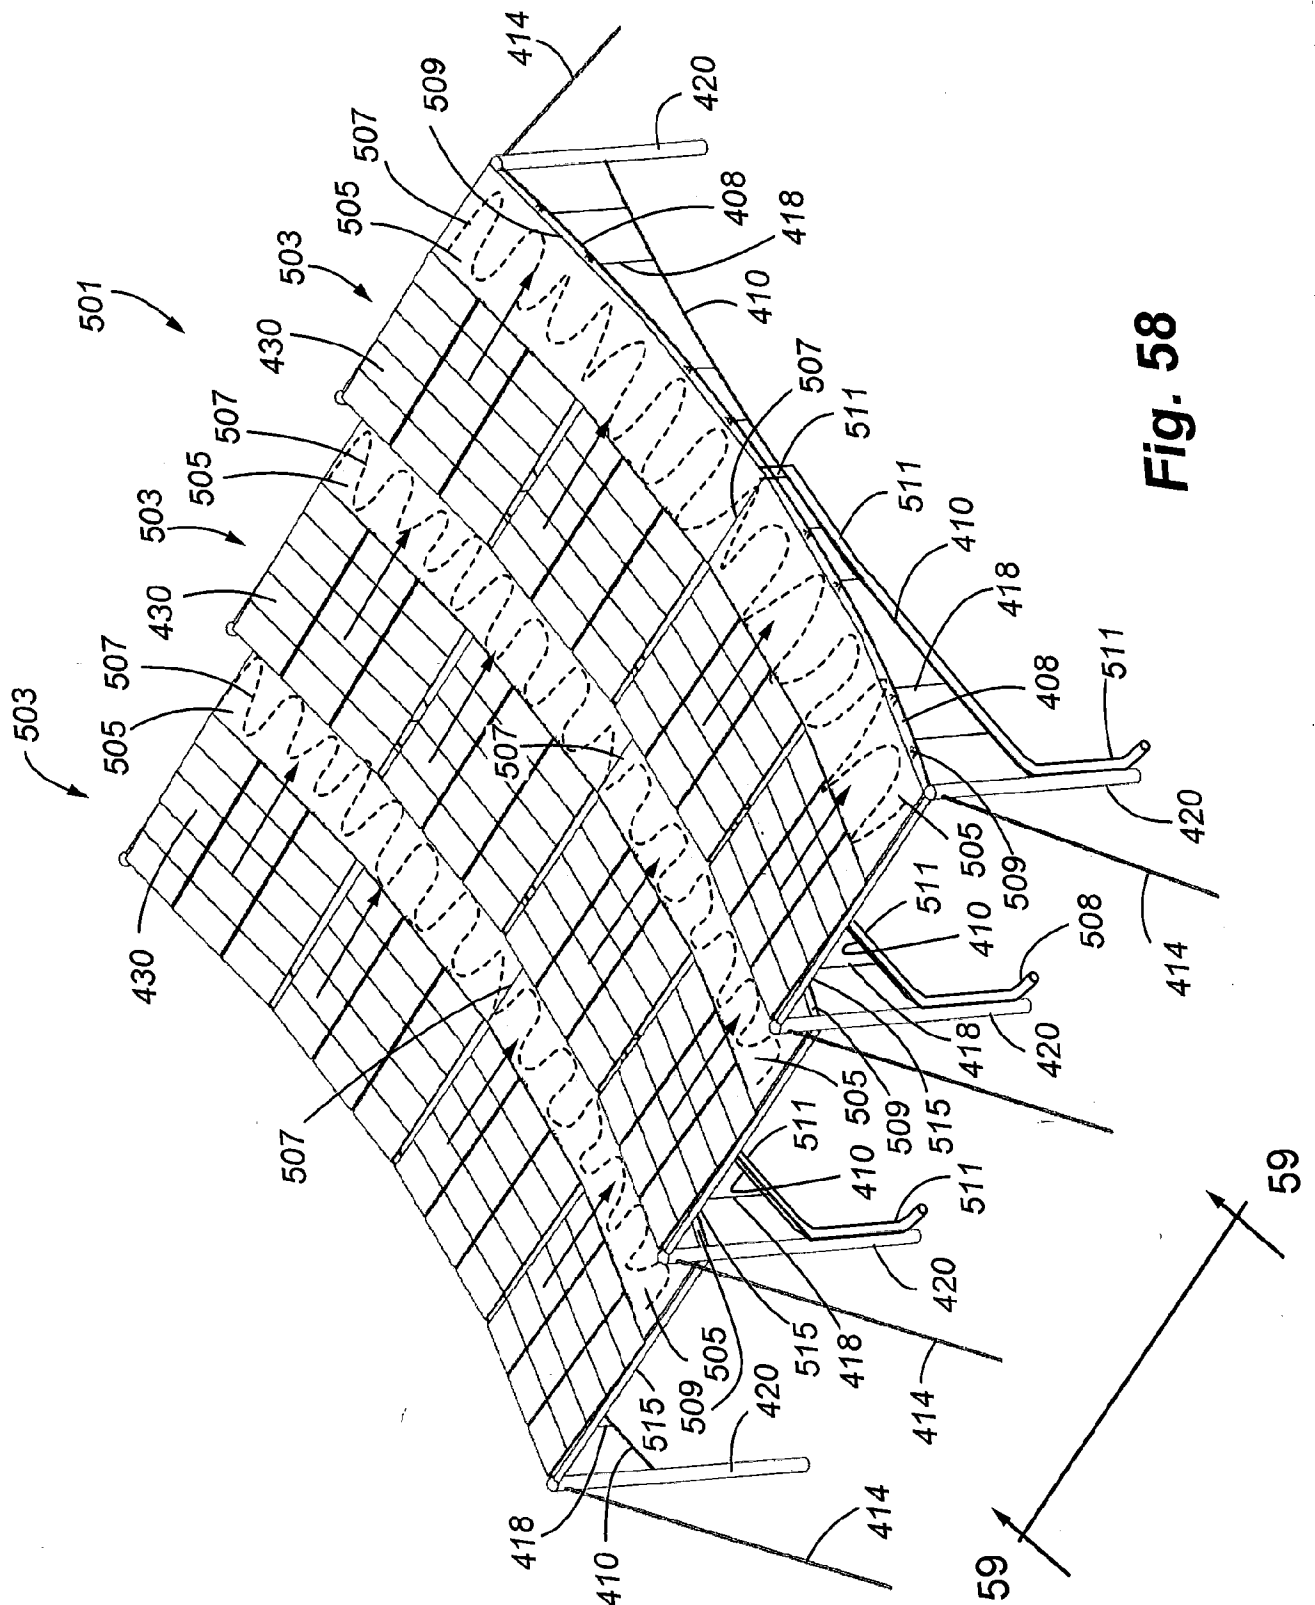


Fig. 58

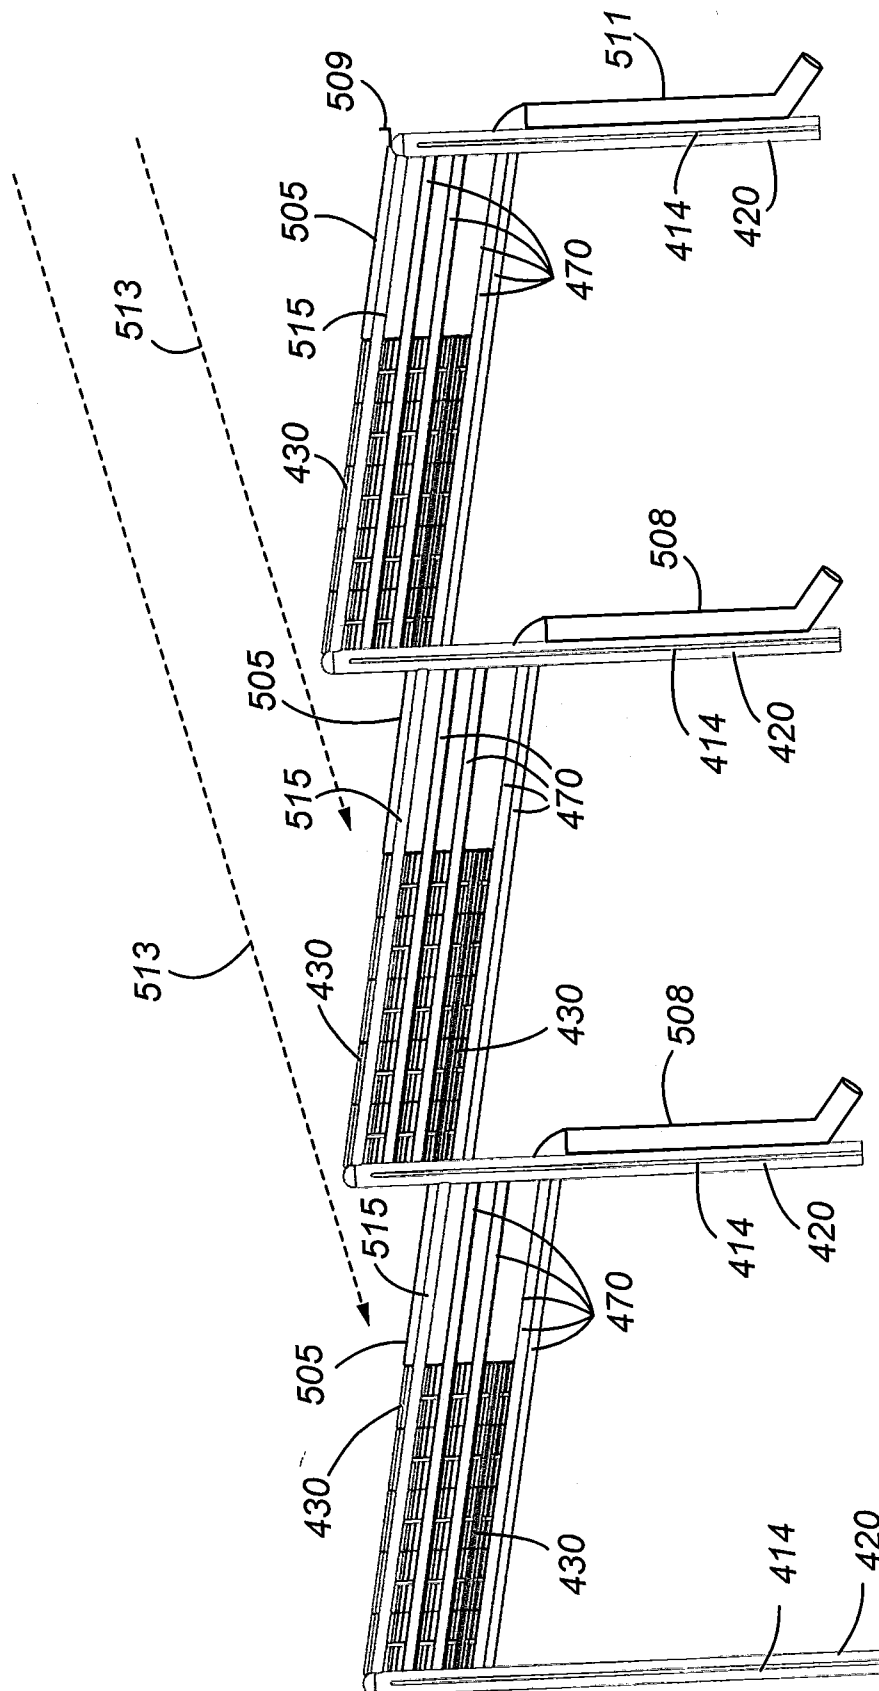


Fig. 59

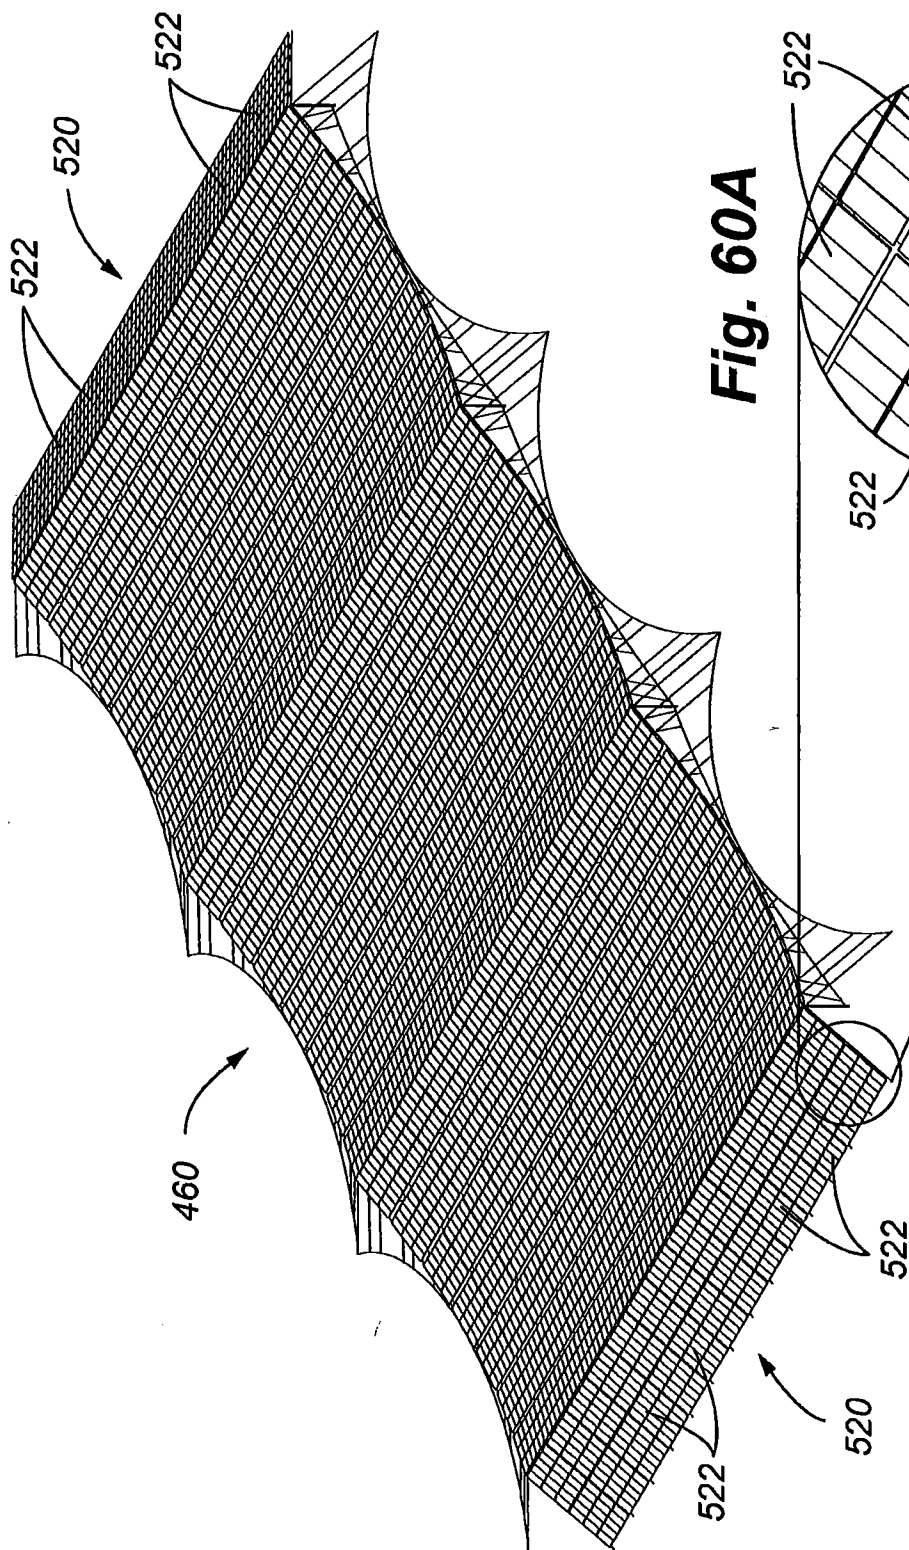


Fig. 60A

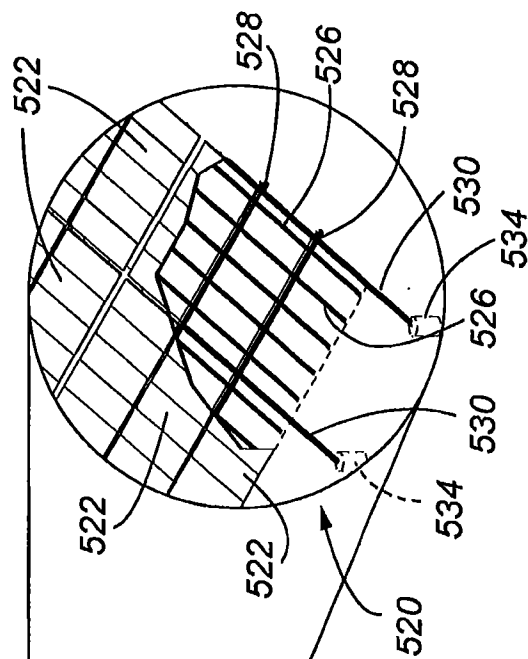


Fig. 60

Pressure Gradient
1-Lowest
10-Highest

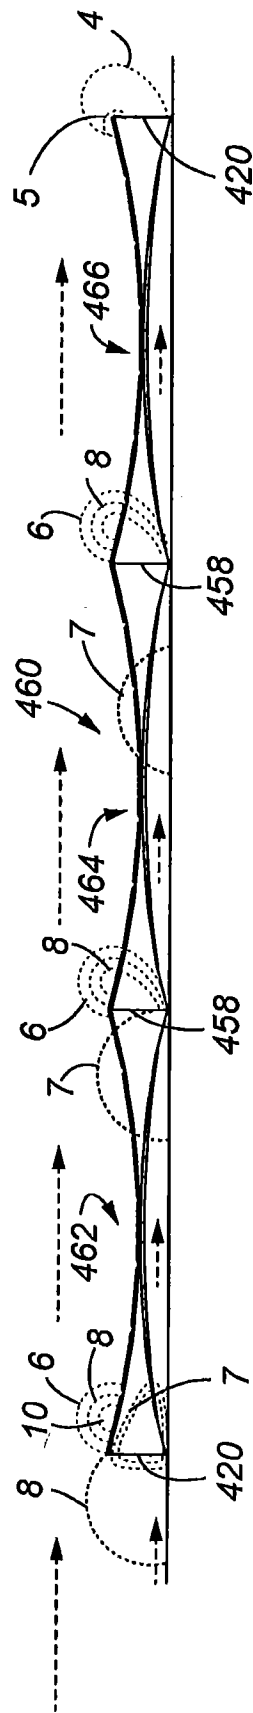


Fig. 61

Pressure Gradient
1-Lowest
10-Highest

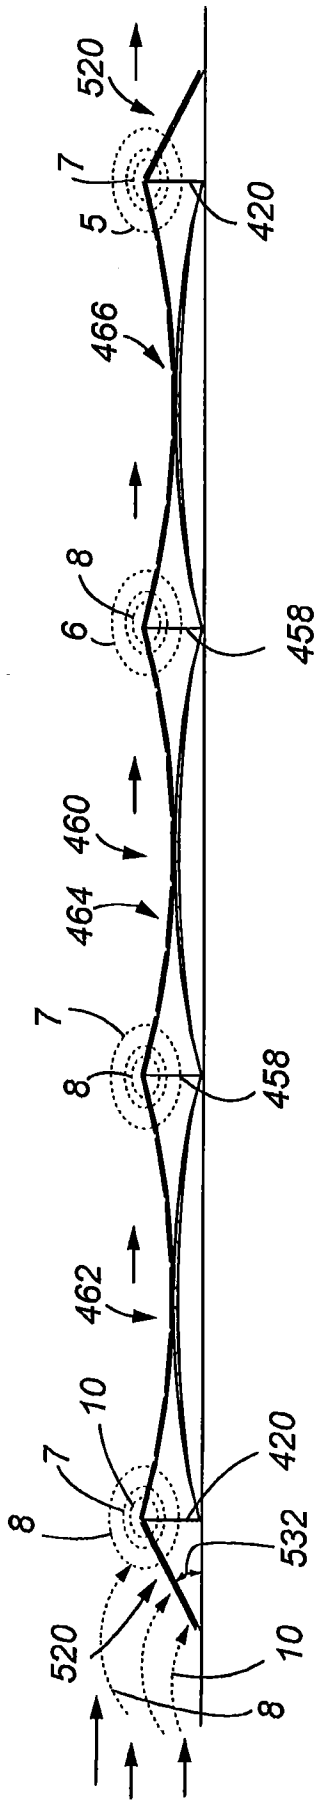
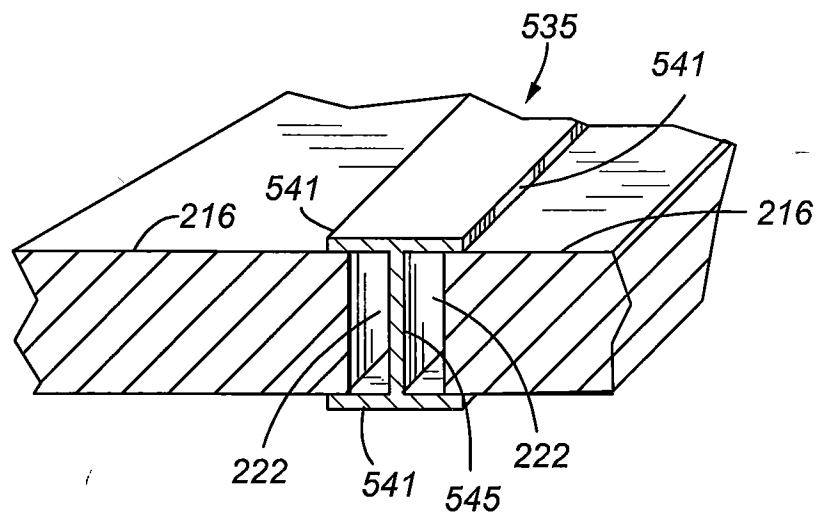
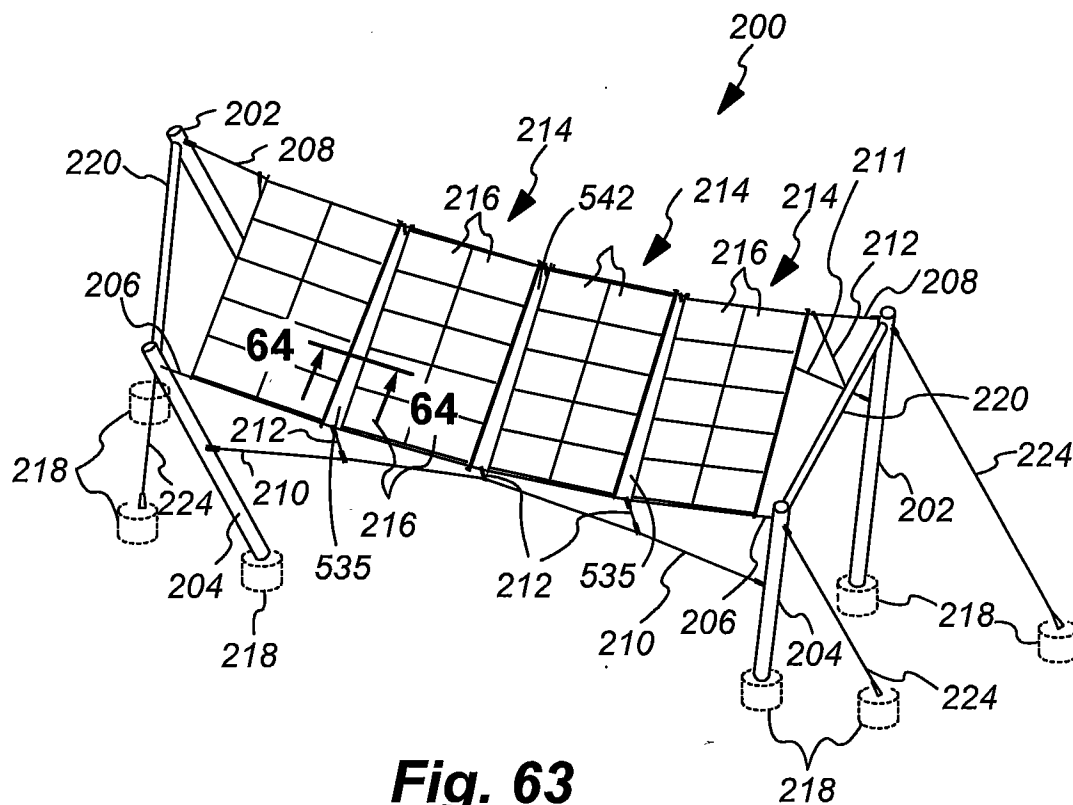


Fig. 62



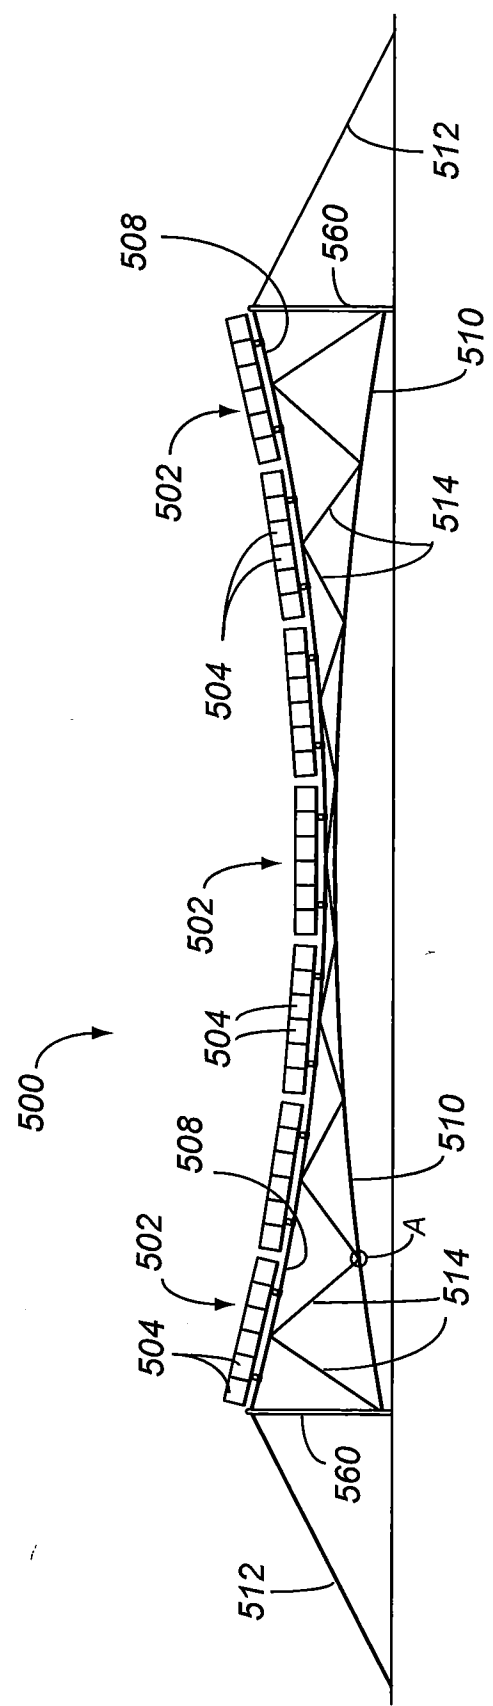


Fig. 65

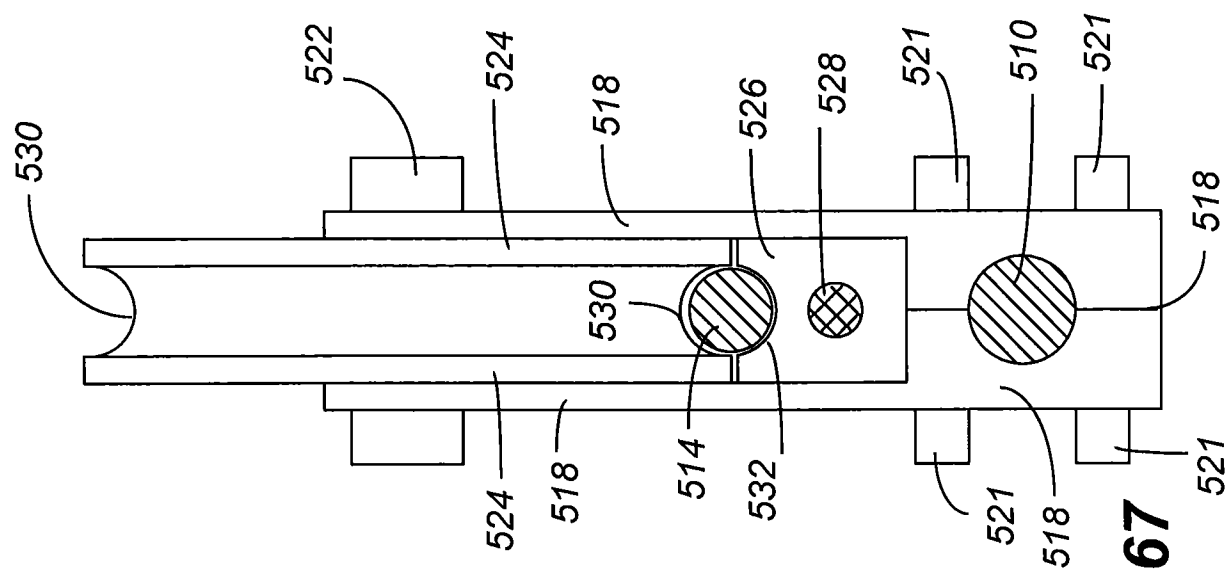


Fig. 67

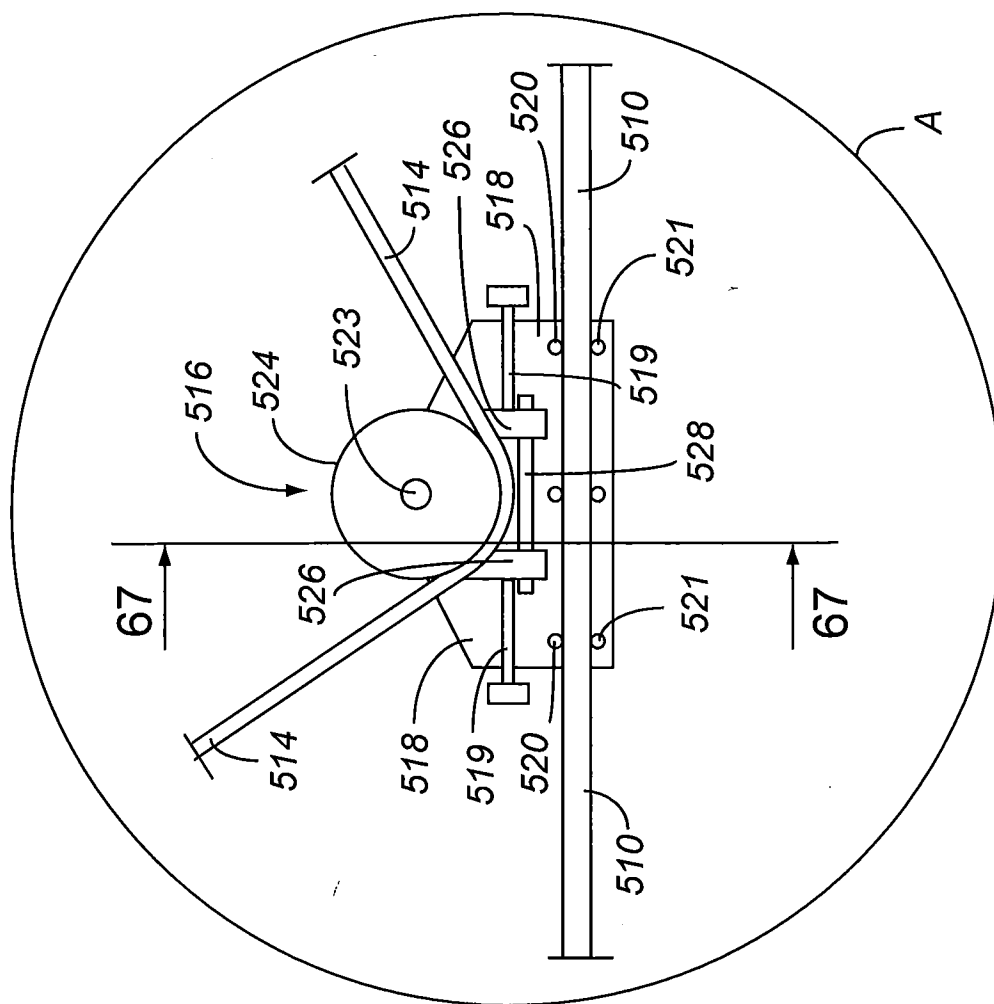


Fig. 66

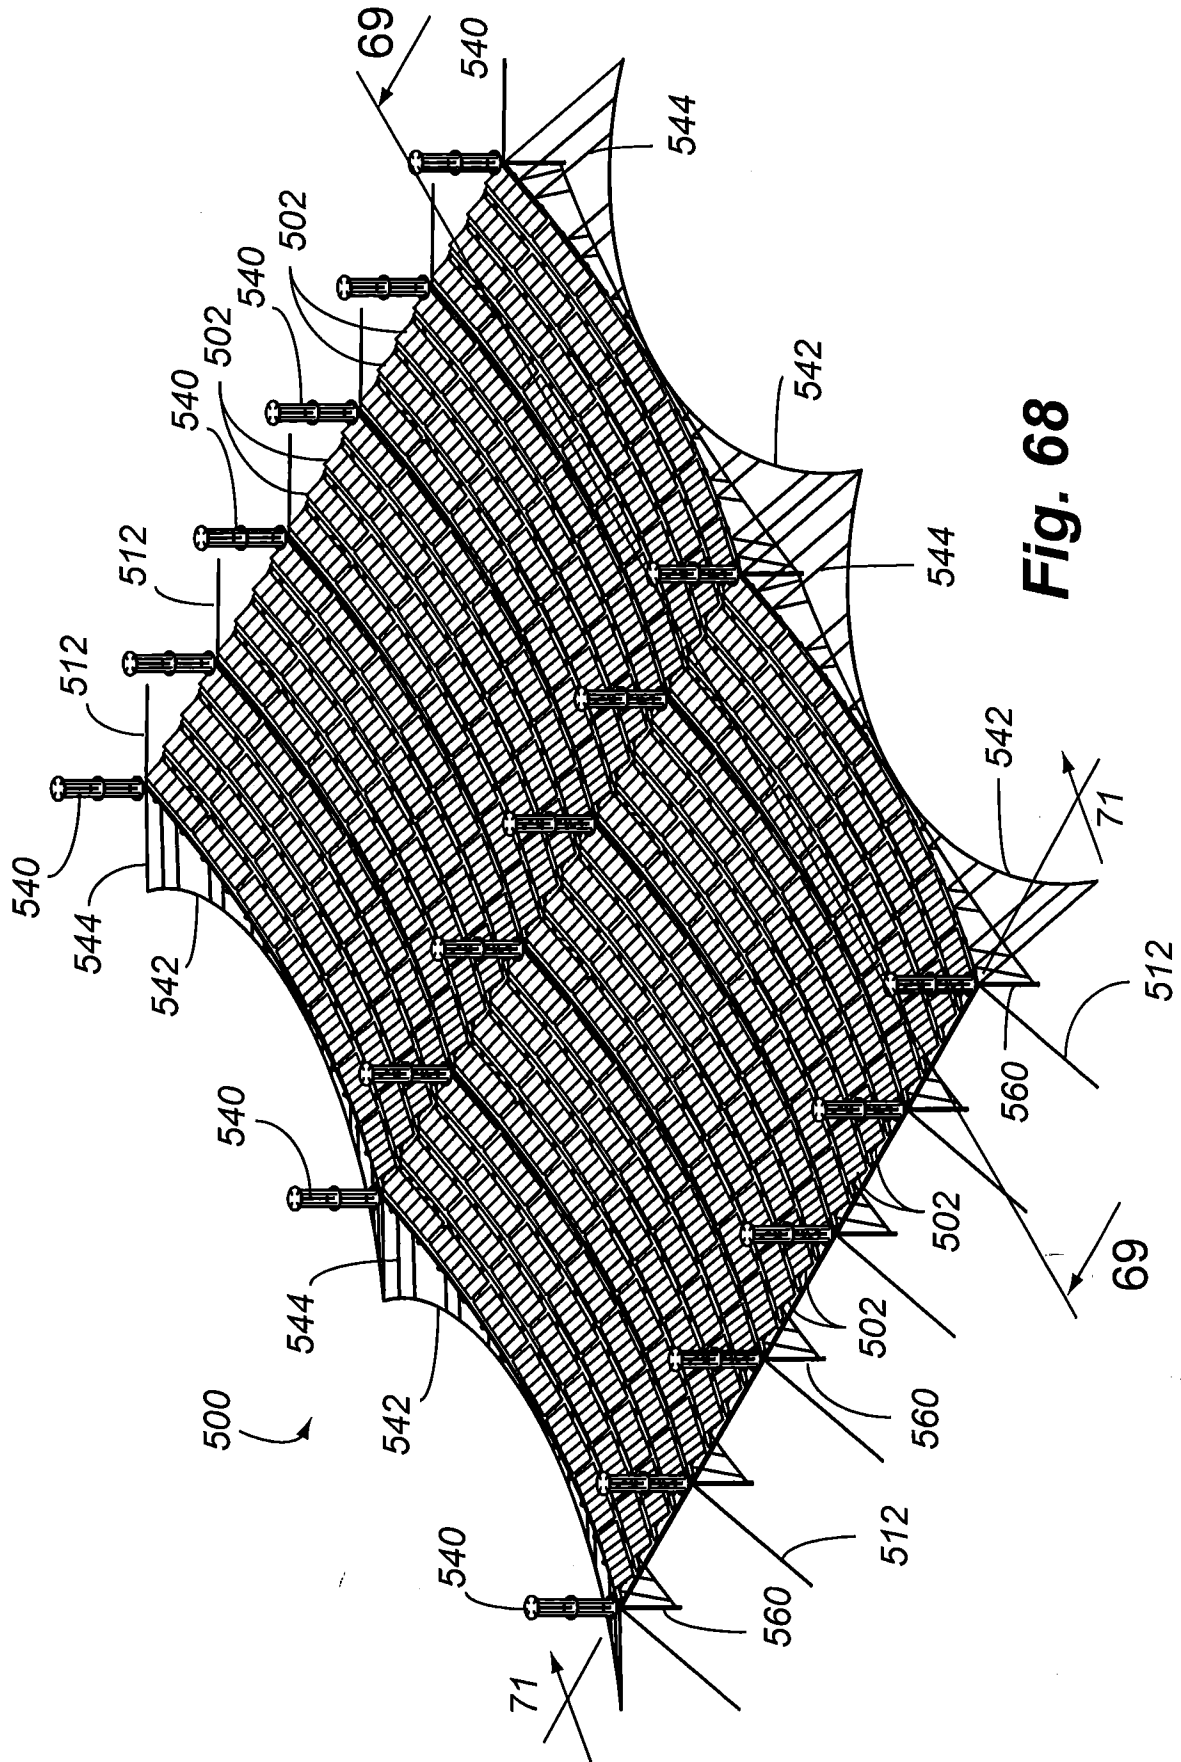


Fig. 68

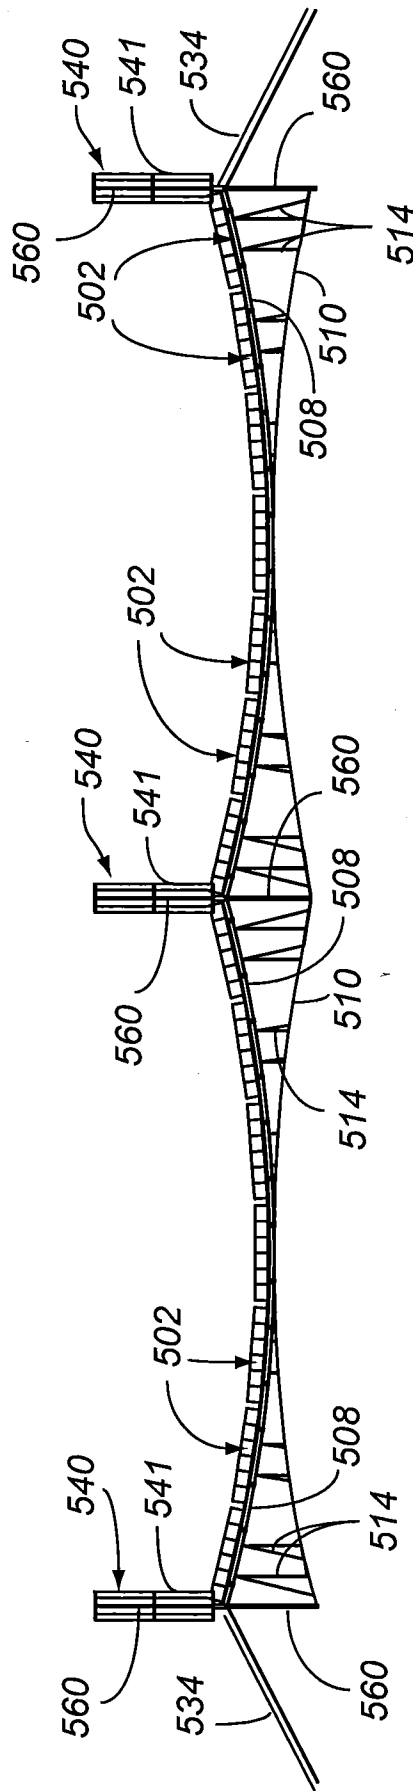


Fig. 69

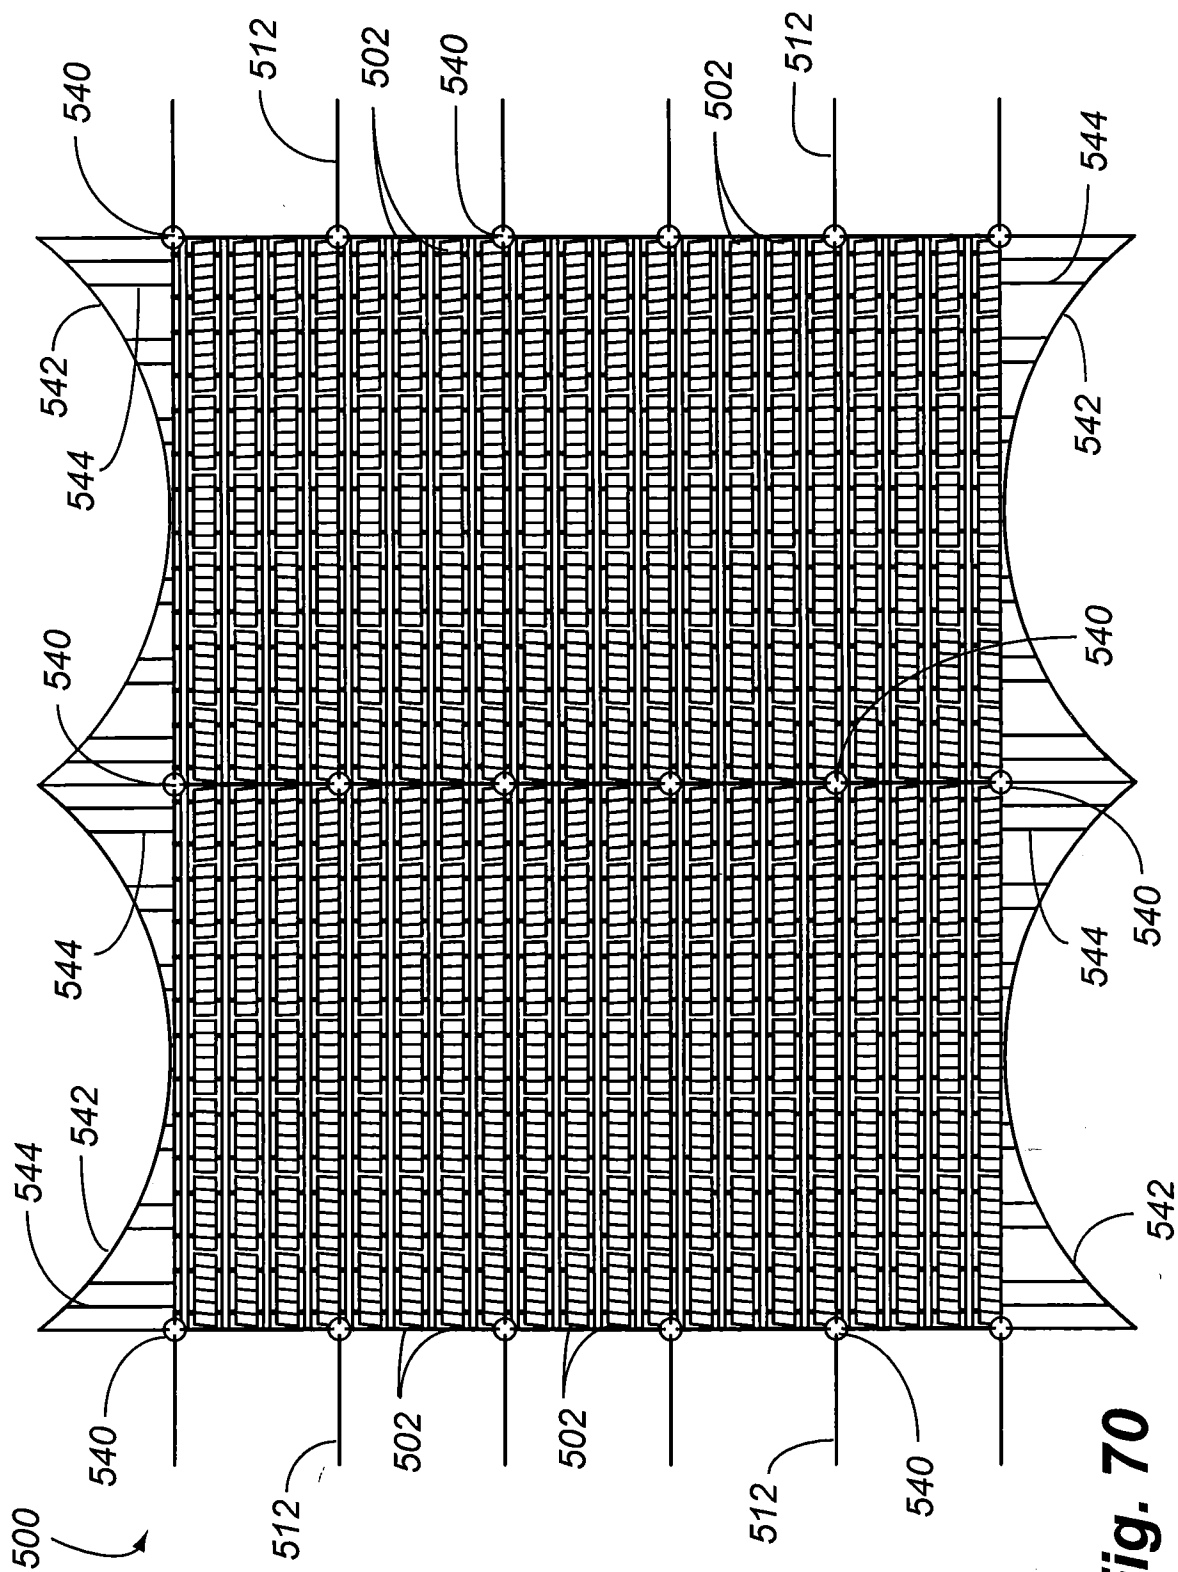


Fig. 70

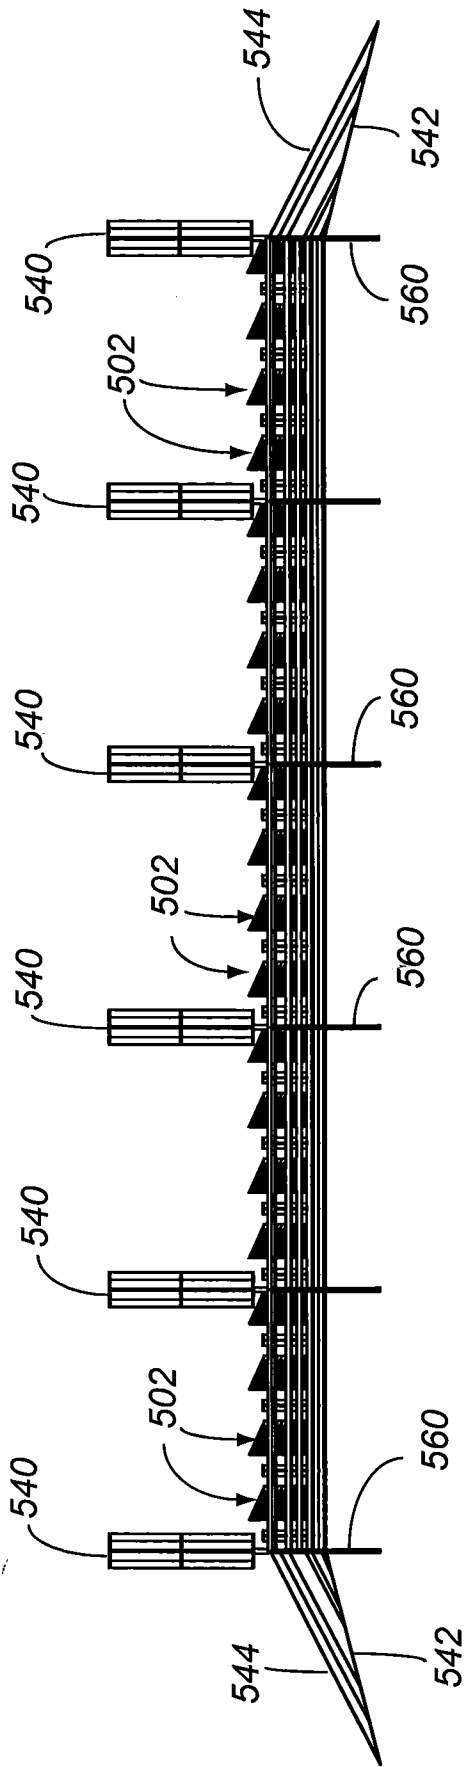


Fig. 71

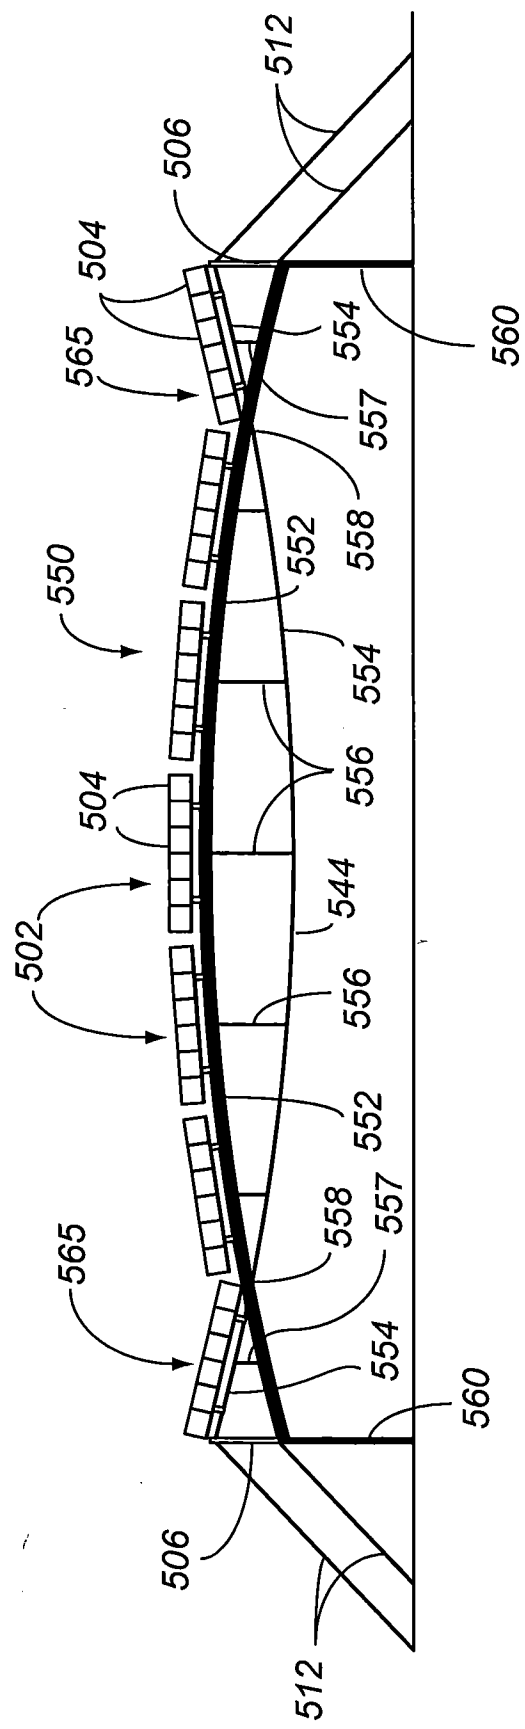


Fig. 72

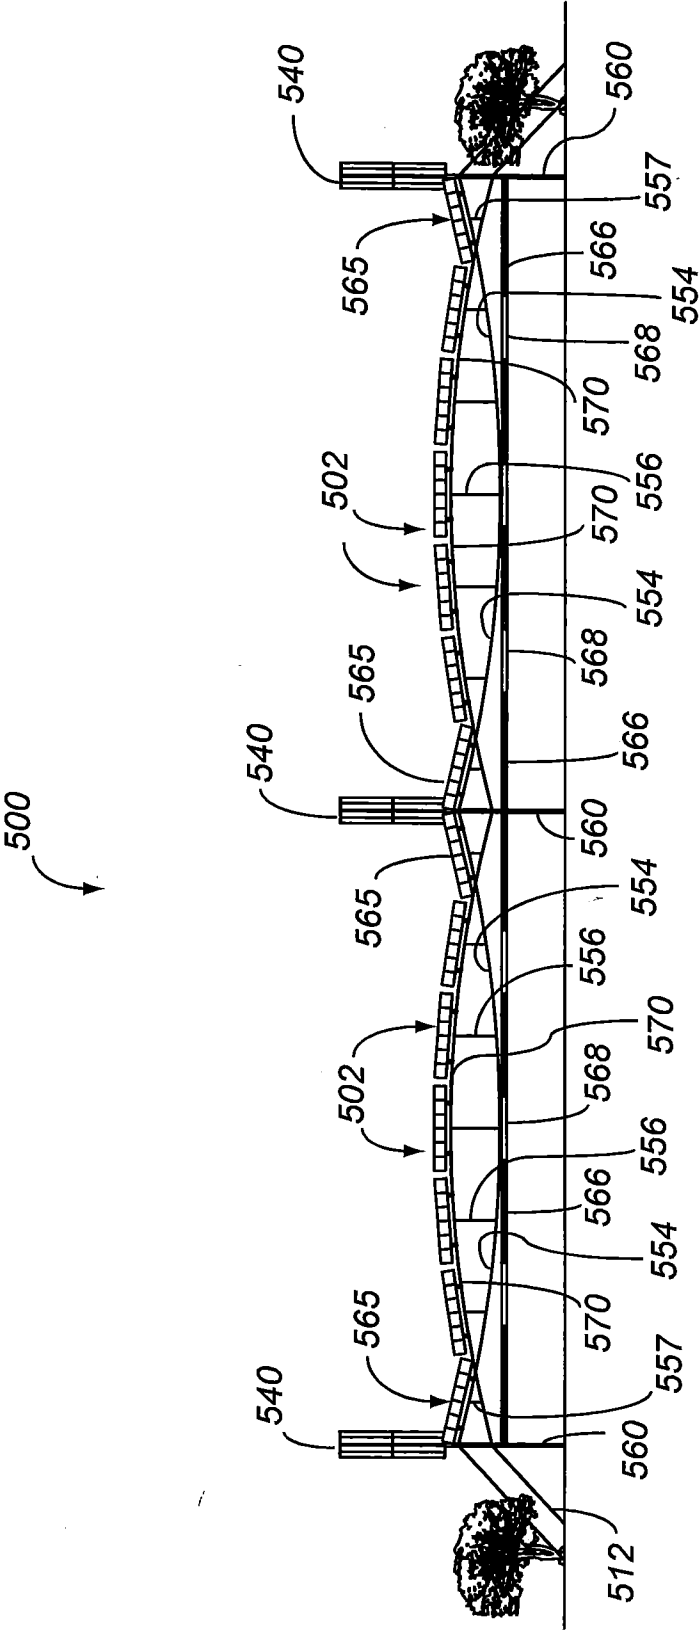


Fig. 73

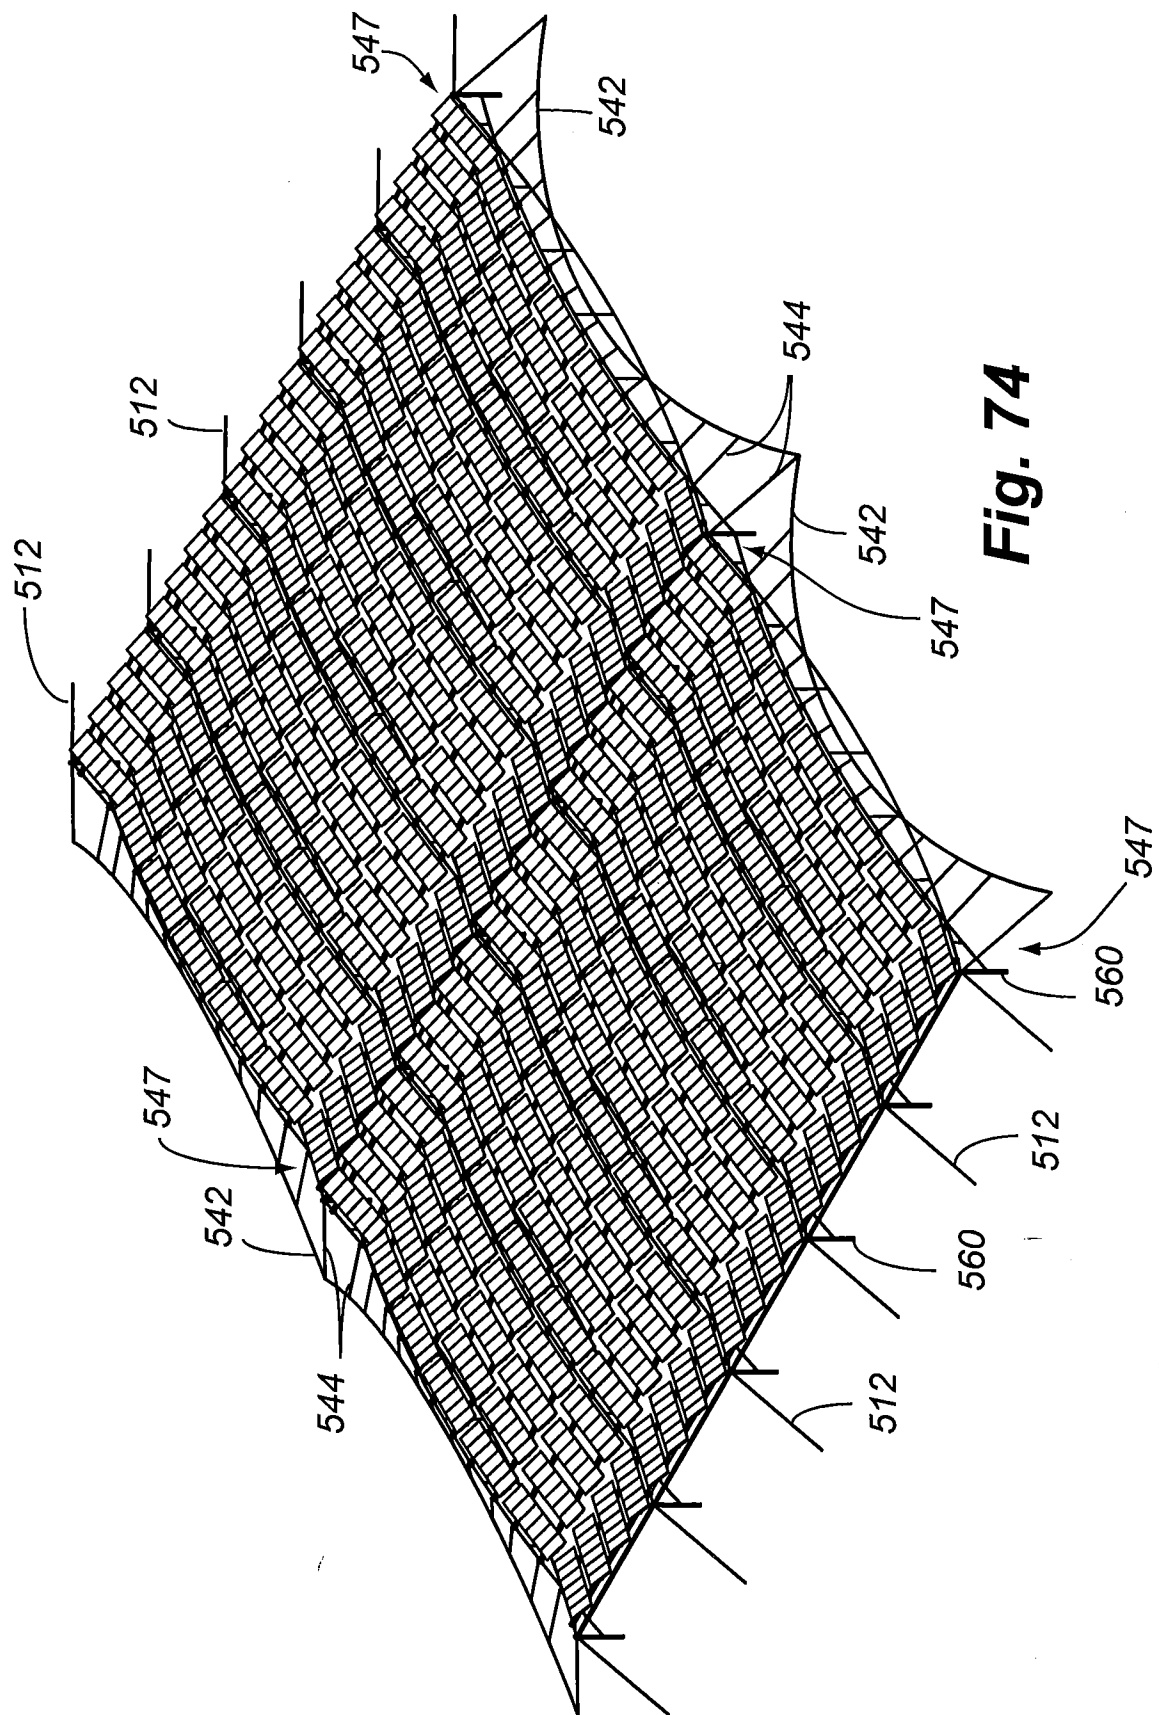


Fig. 74

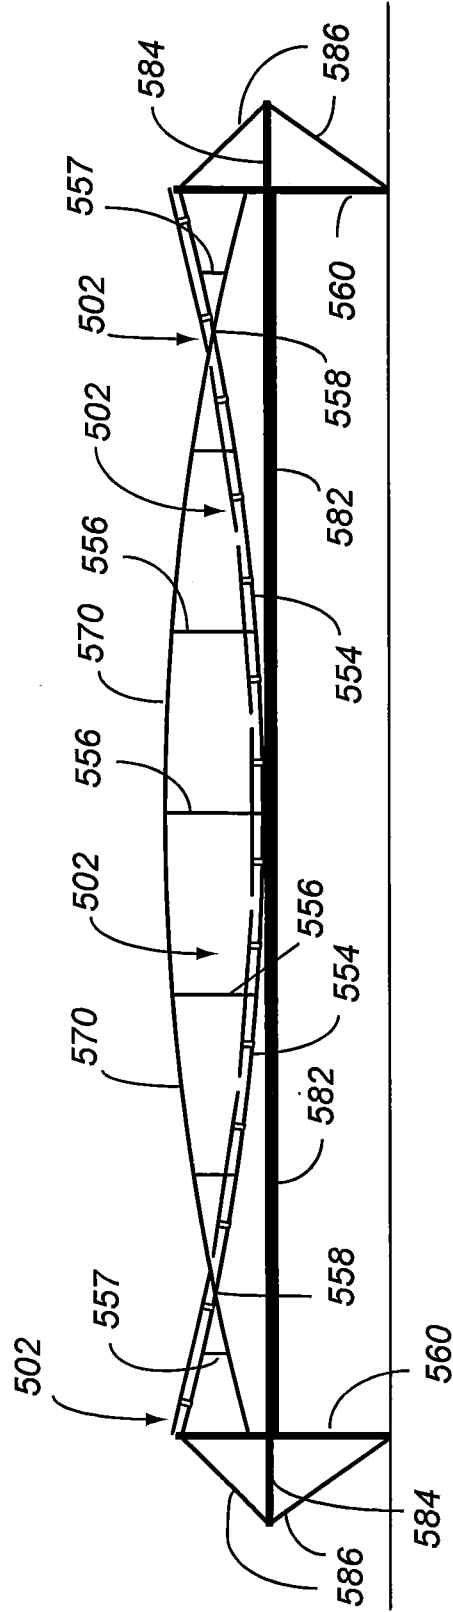


Fig. 75

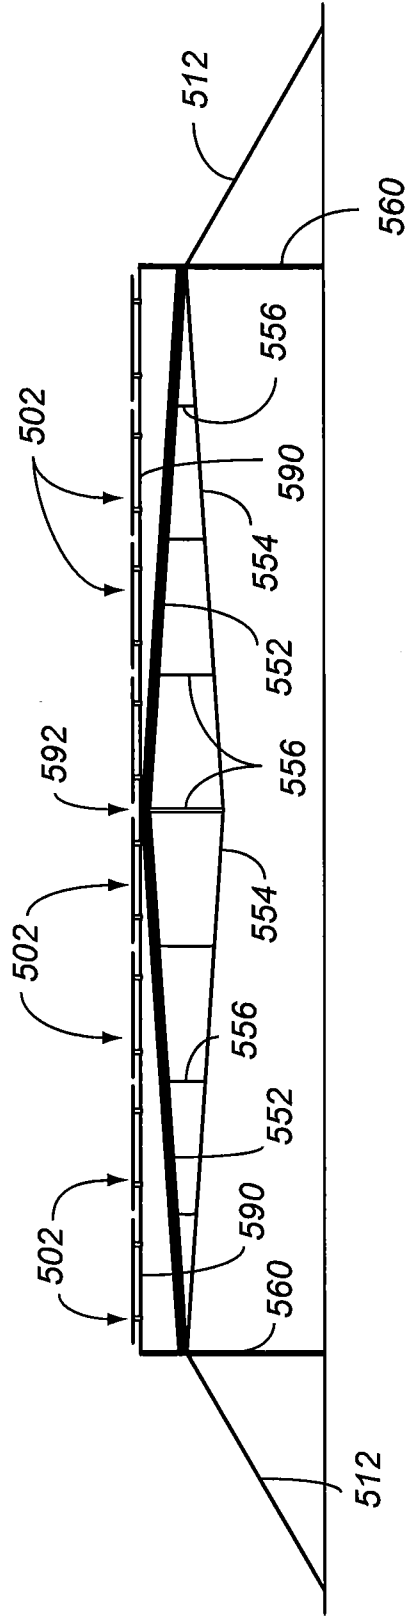


Fig. 76

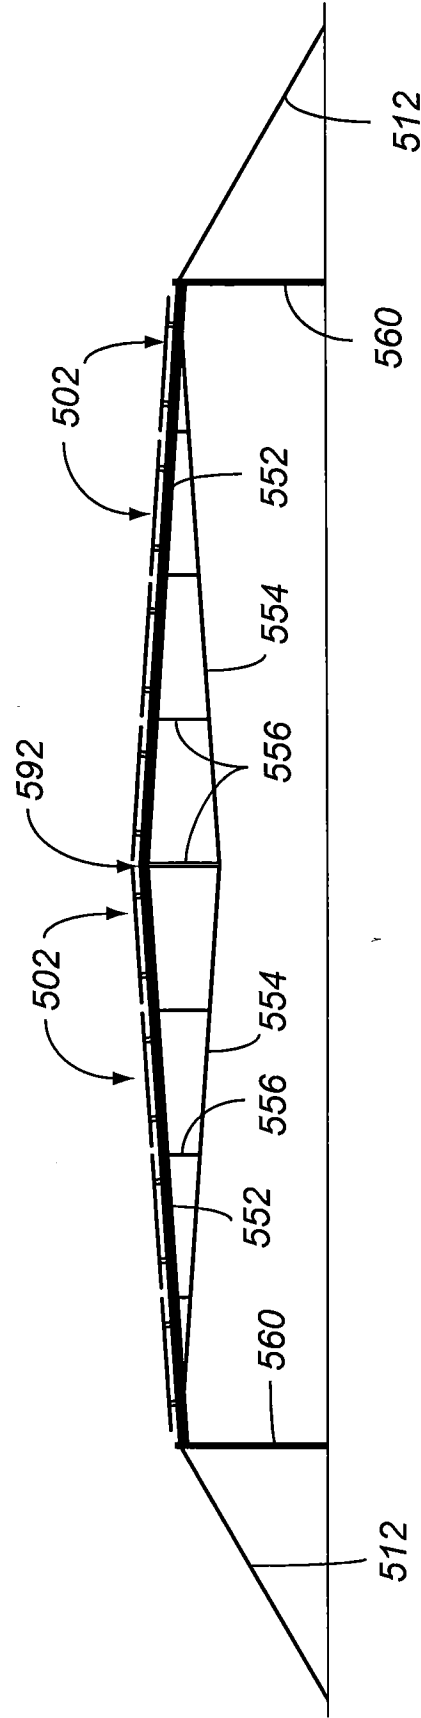


Fig. 77

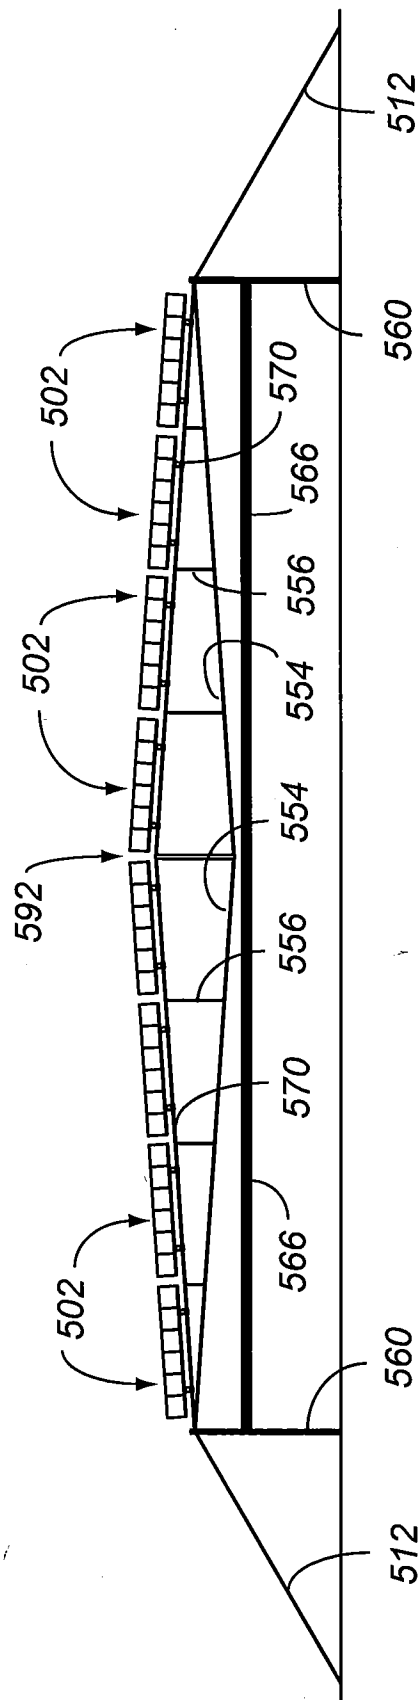


Fig. 78

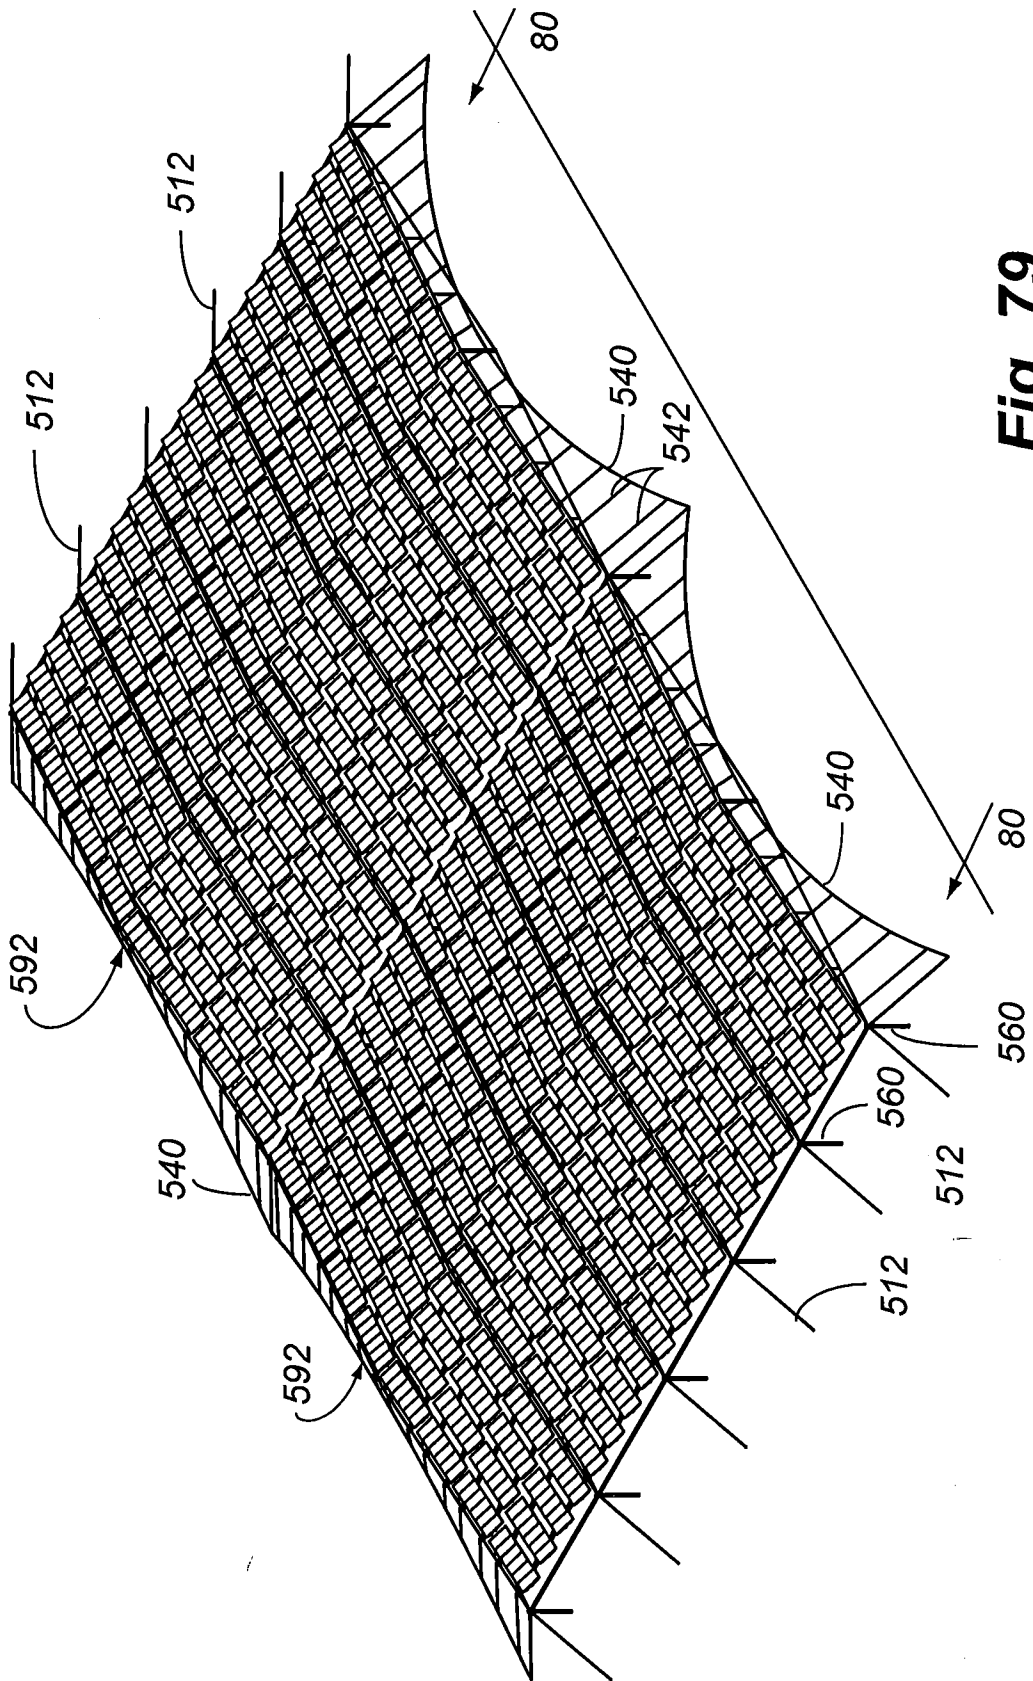


Fig. 79

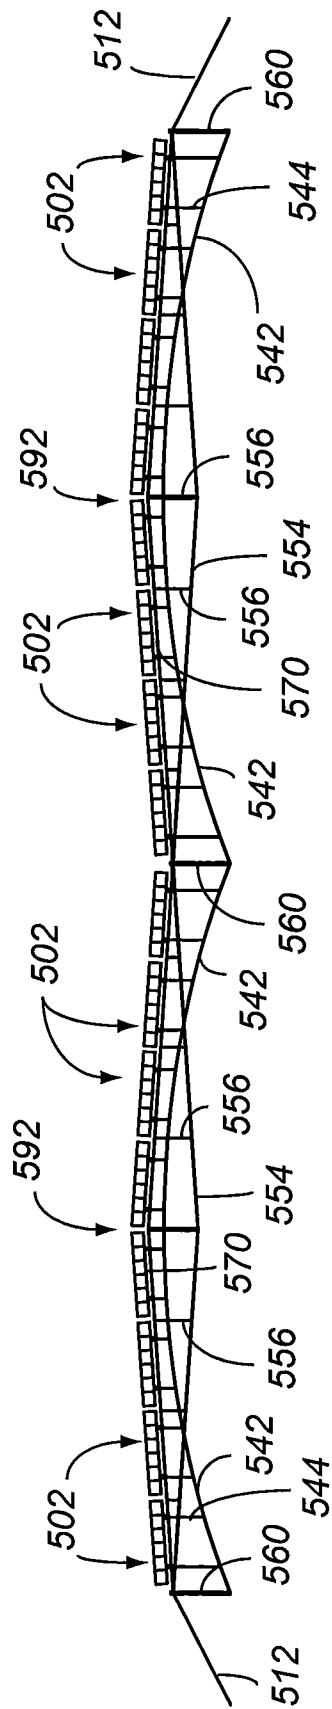


Fig. 80

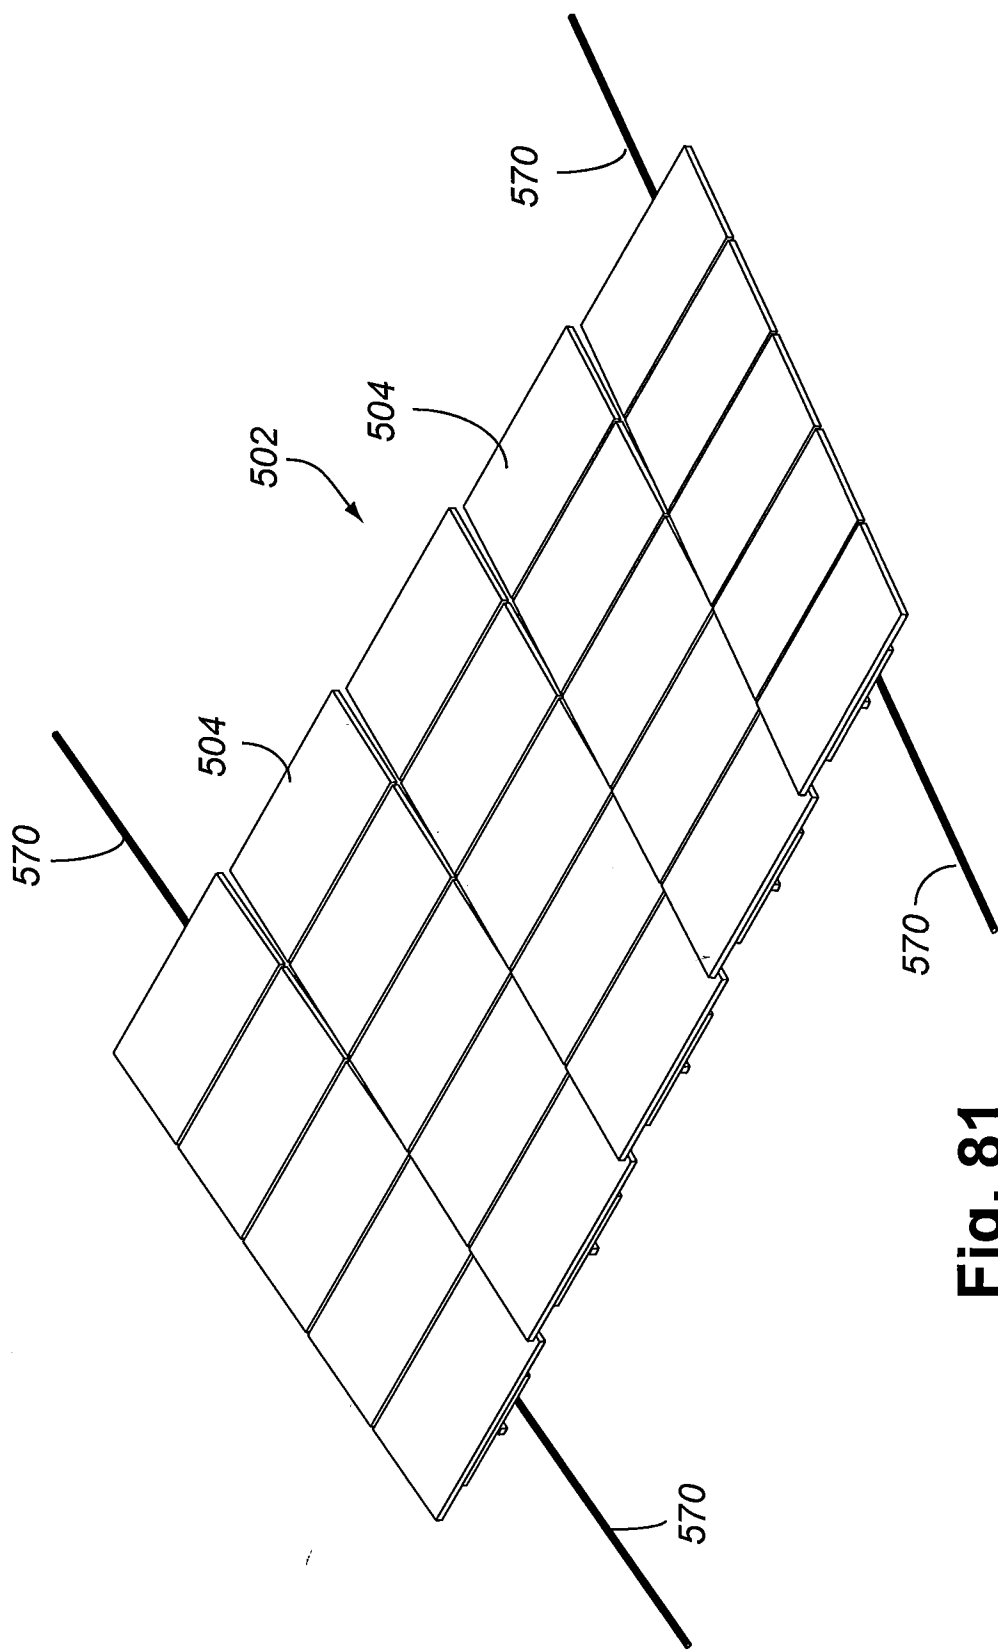


Fig. 81

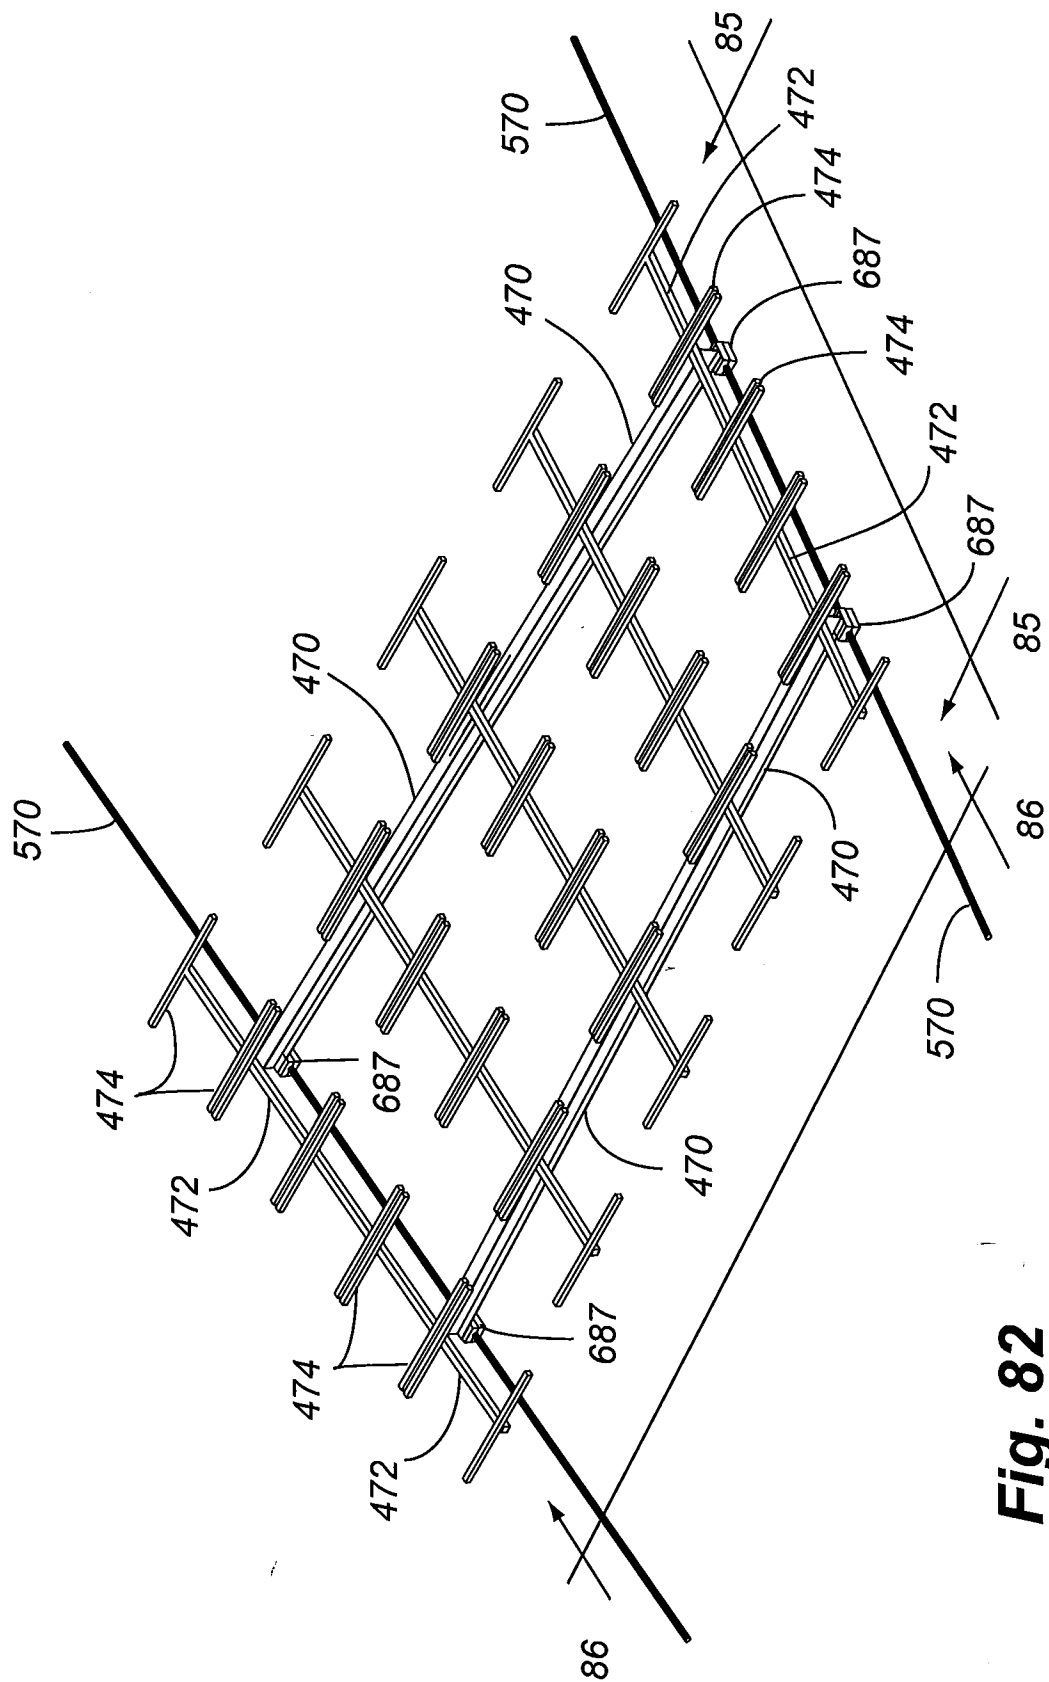


Fig. 82

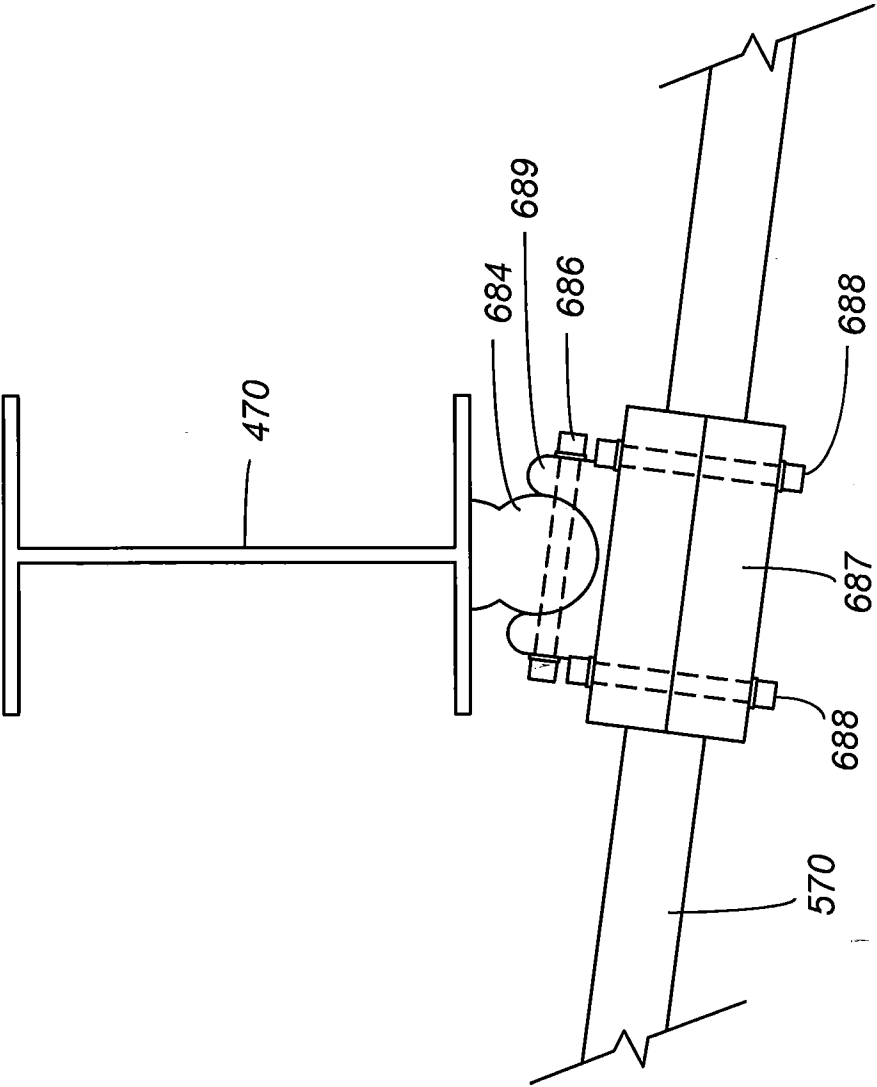


Fig. 83

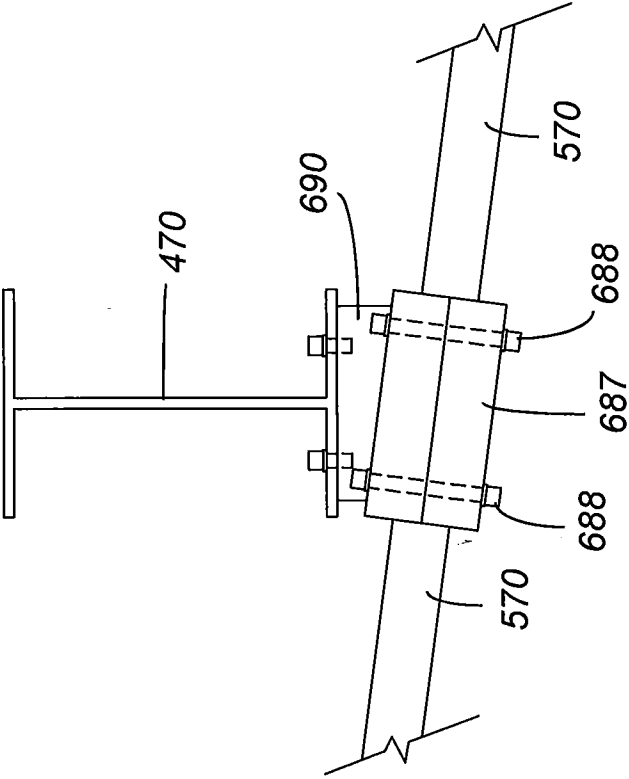


Fig. 84

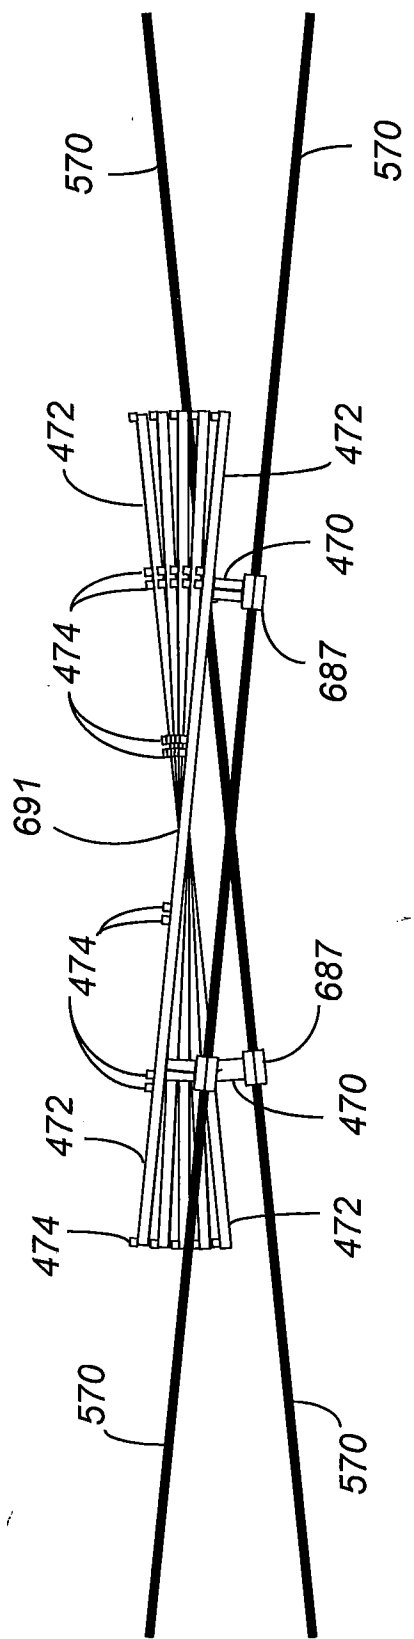


Fig. 85

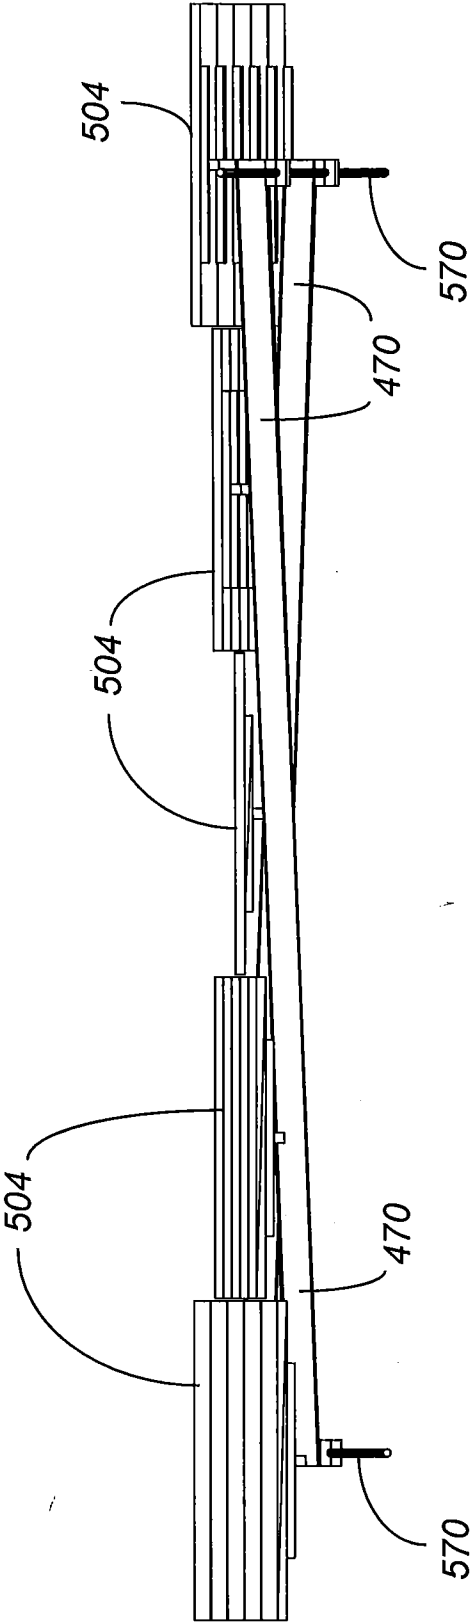


Fig. 86

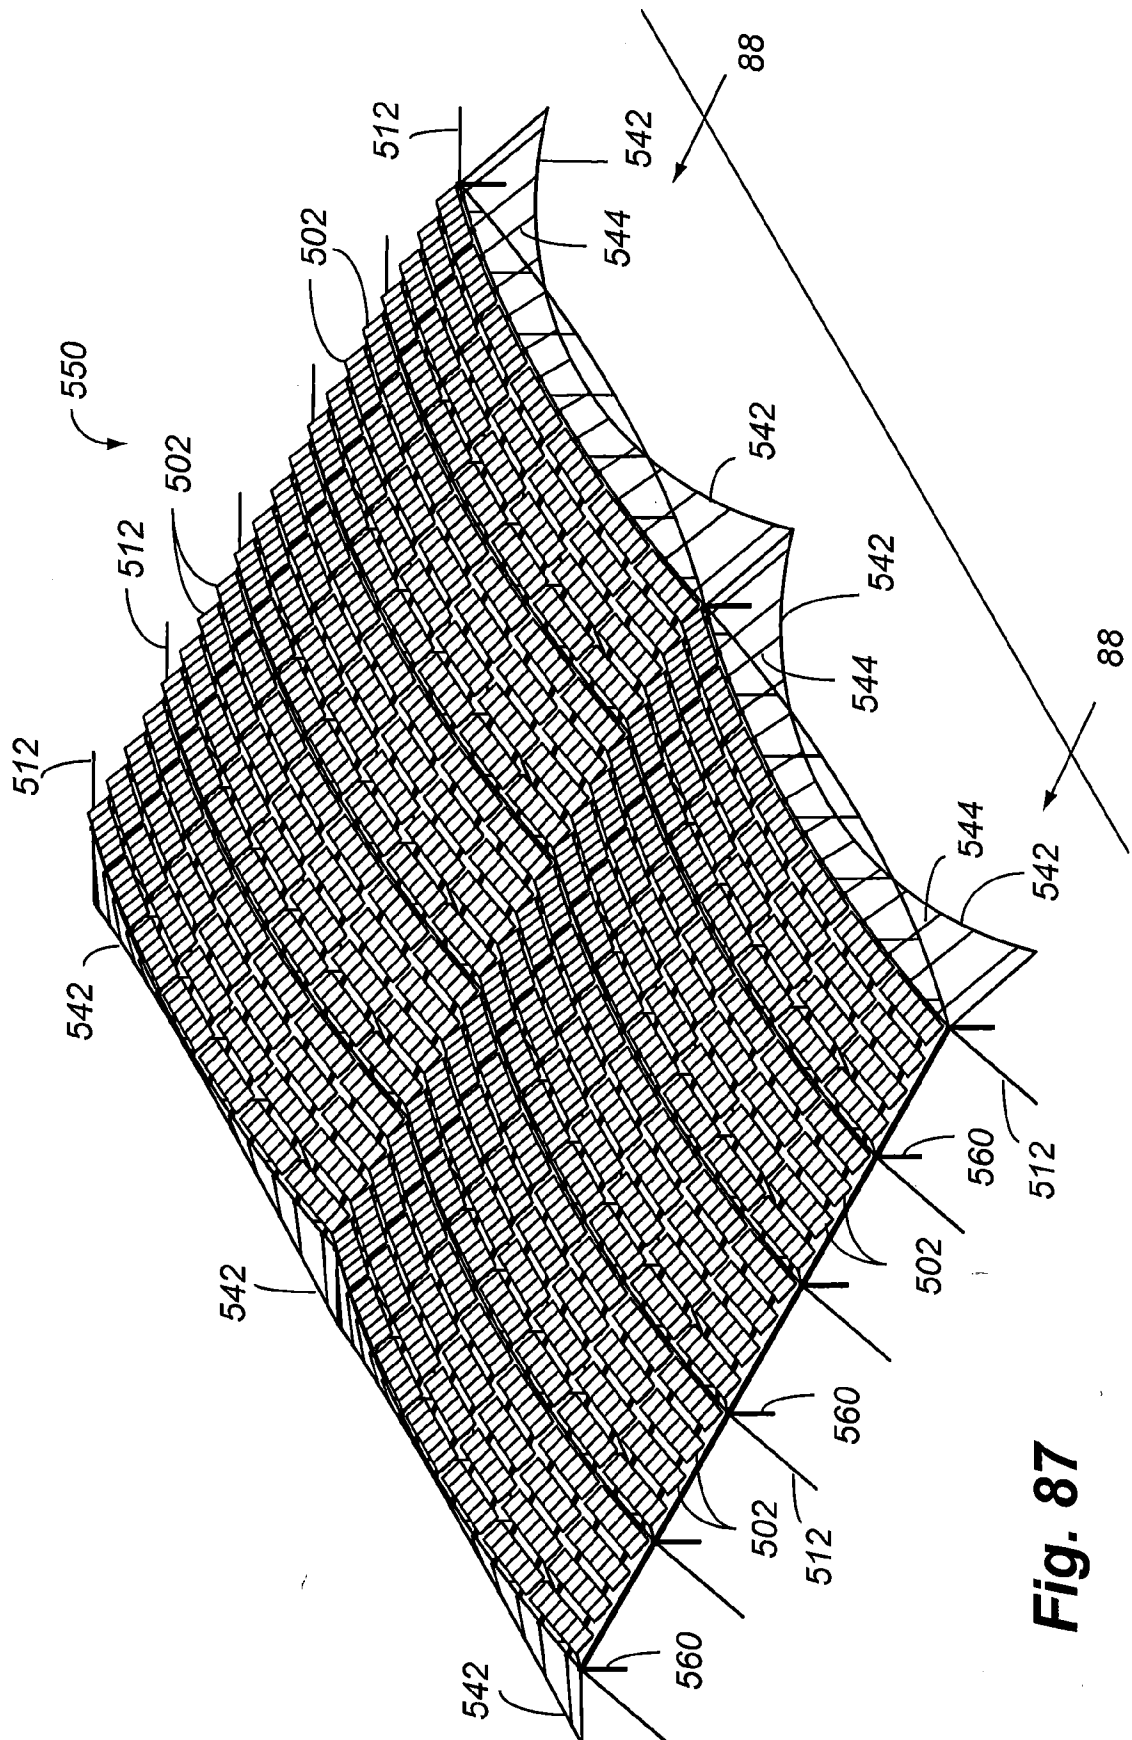


Fig. 87

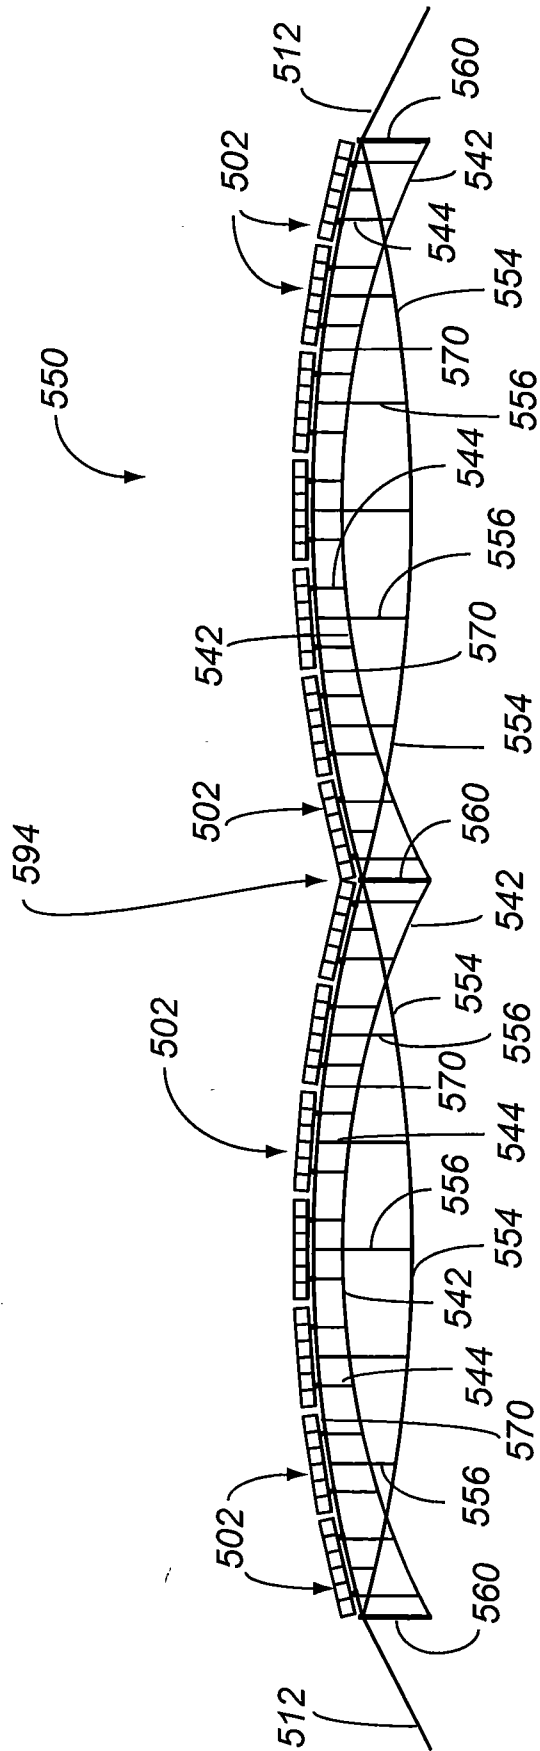


Fig. 88

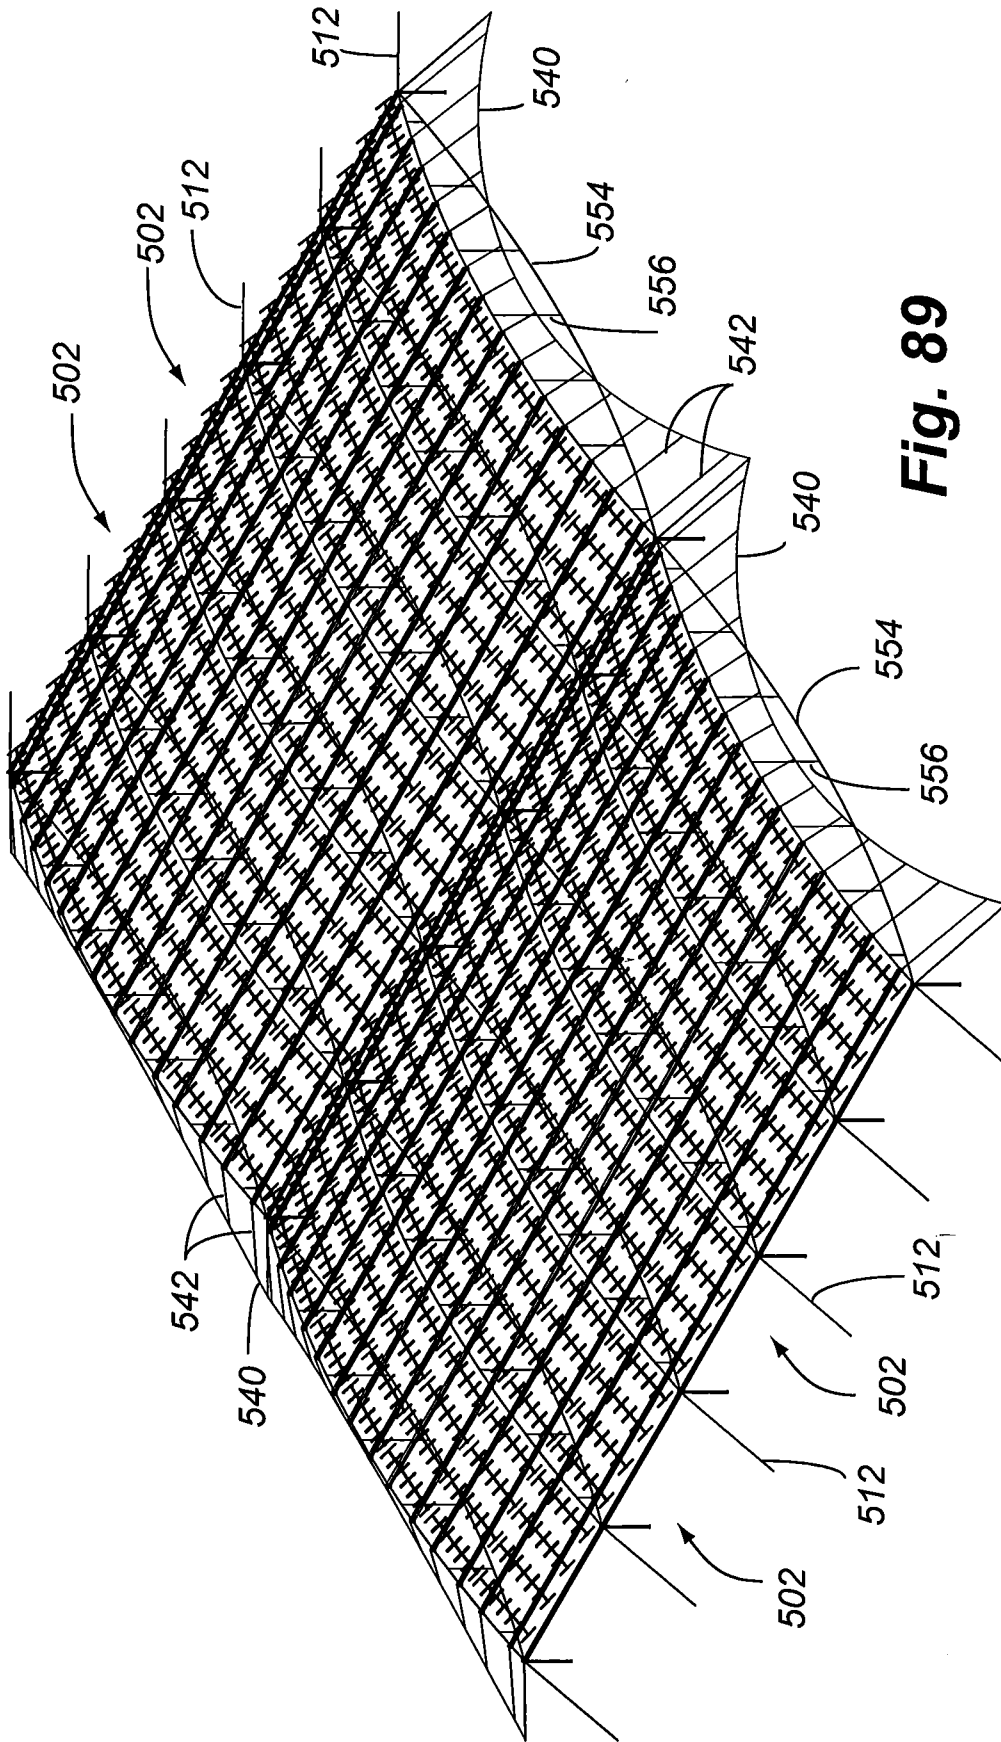


Fig. 89

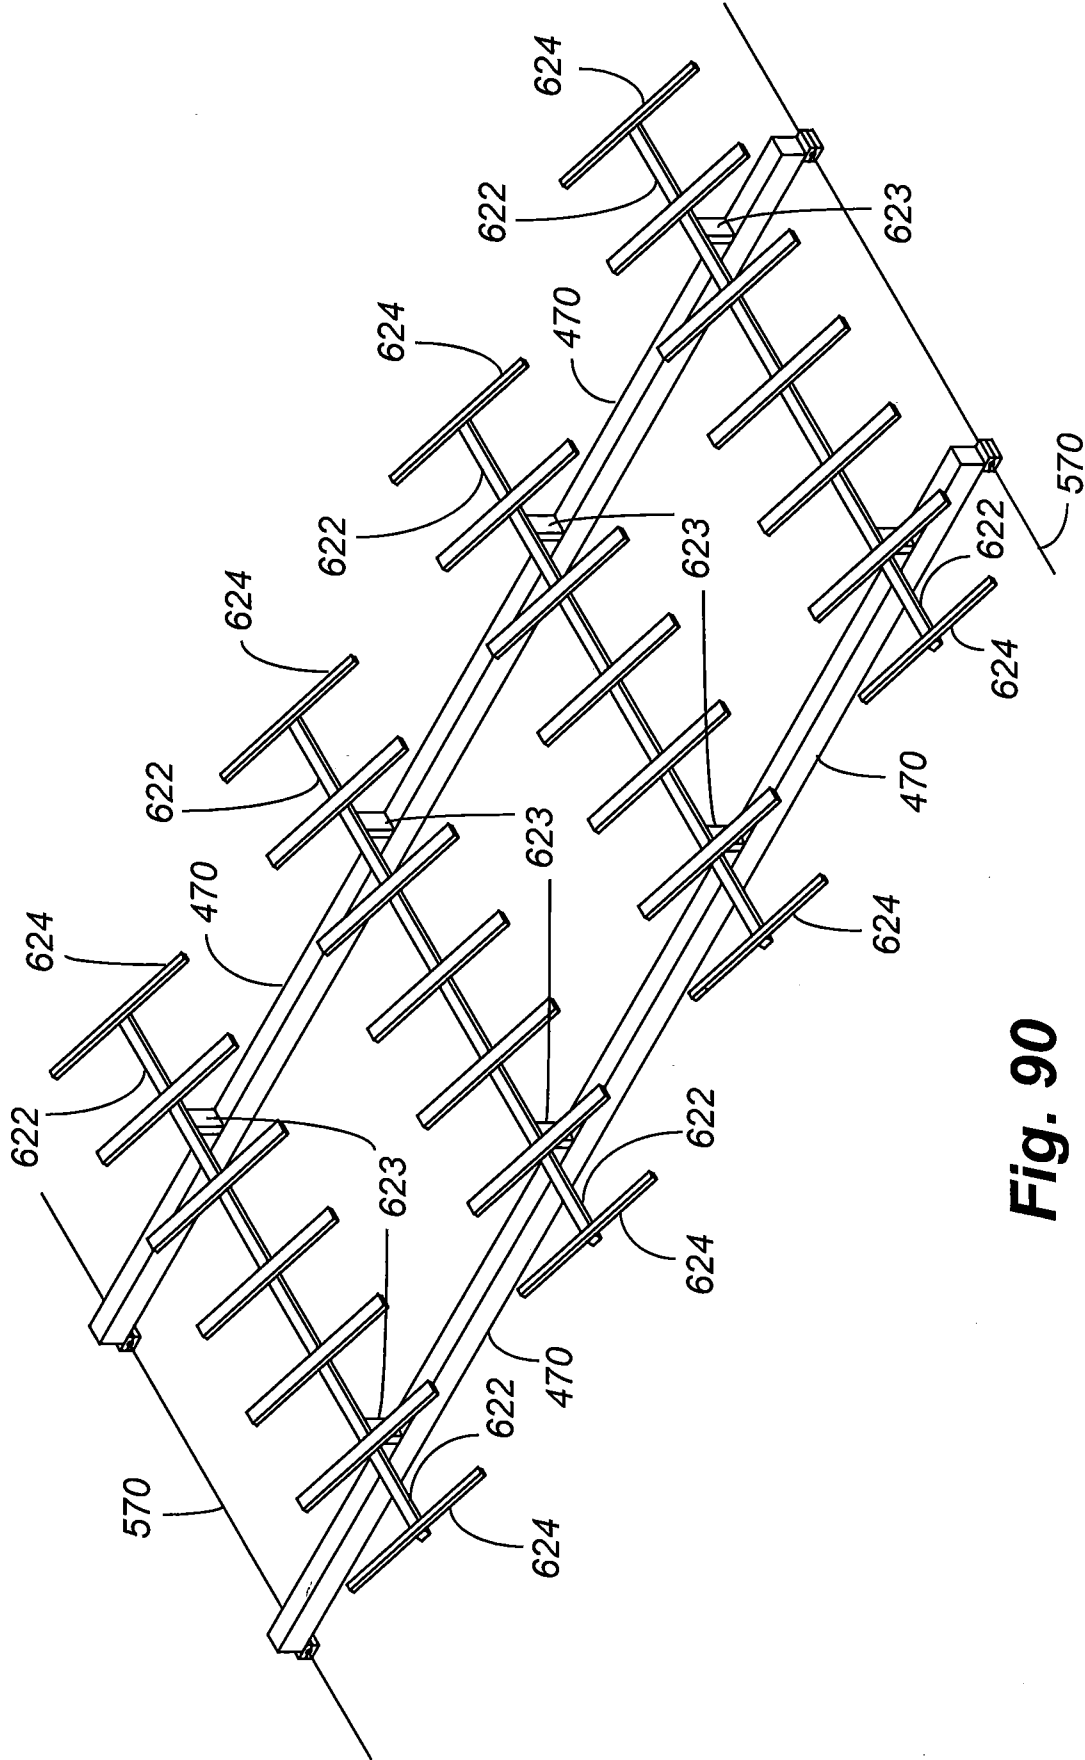


Fig. 90

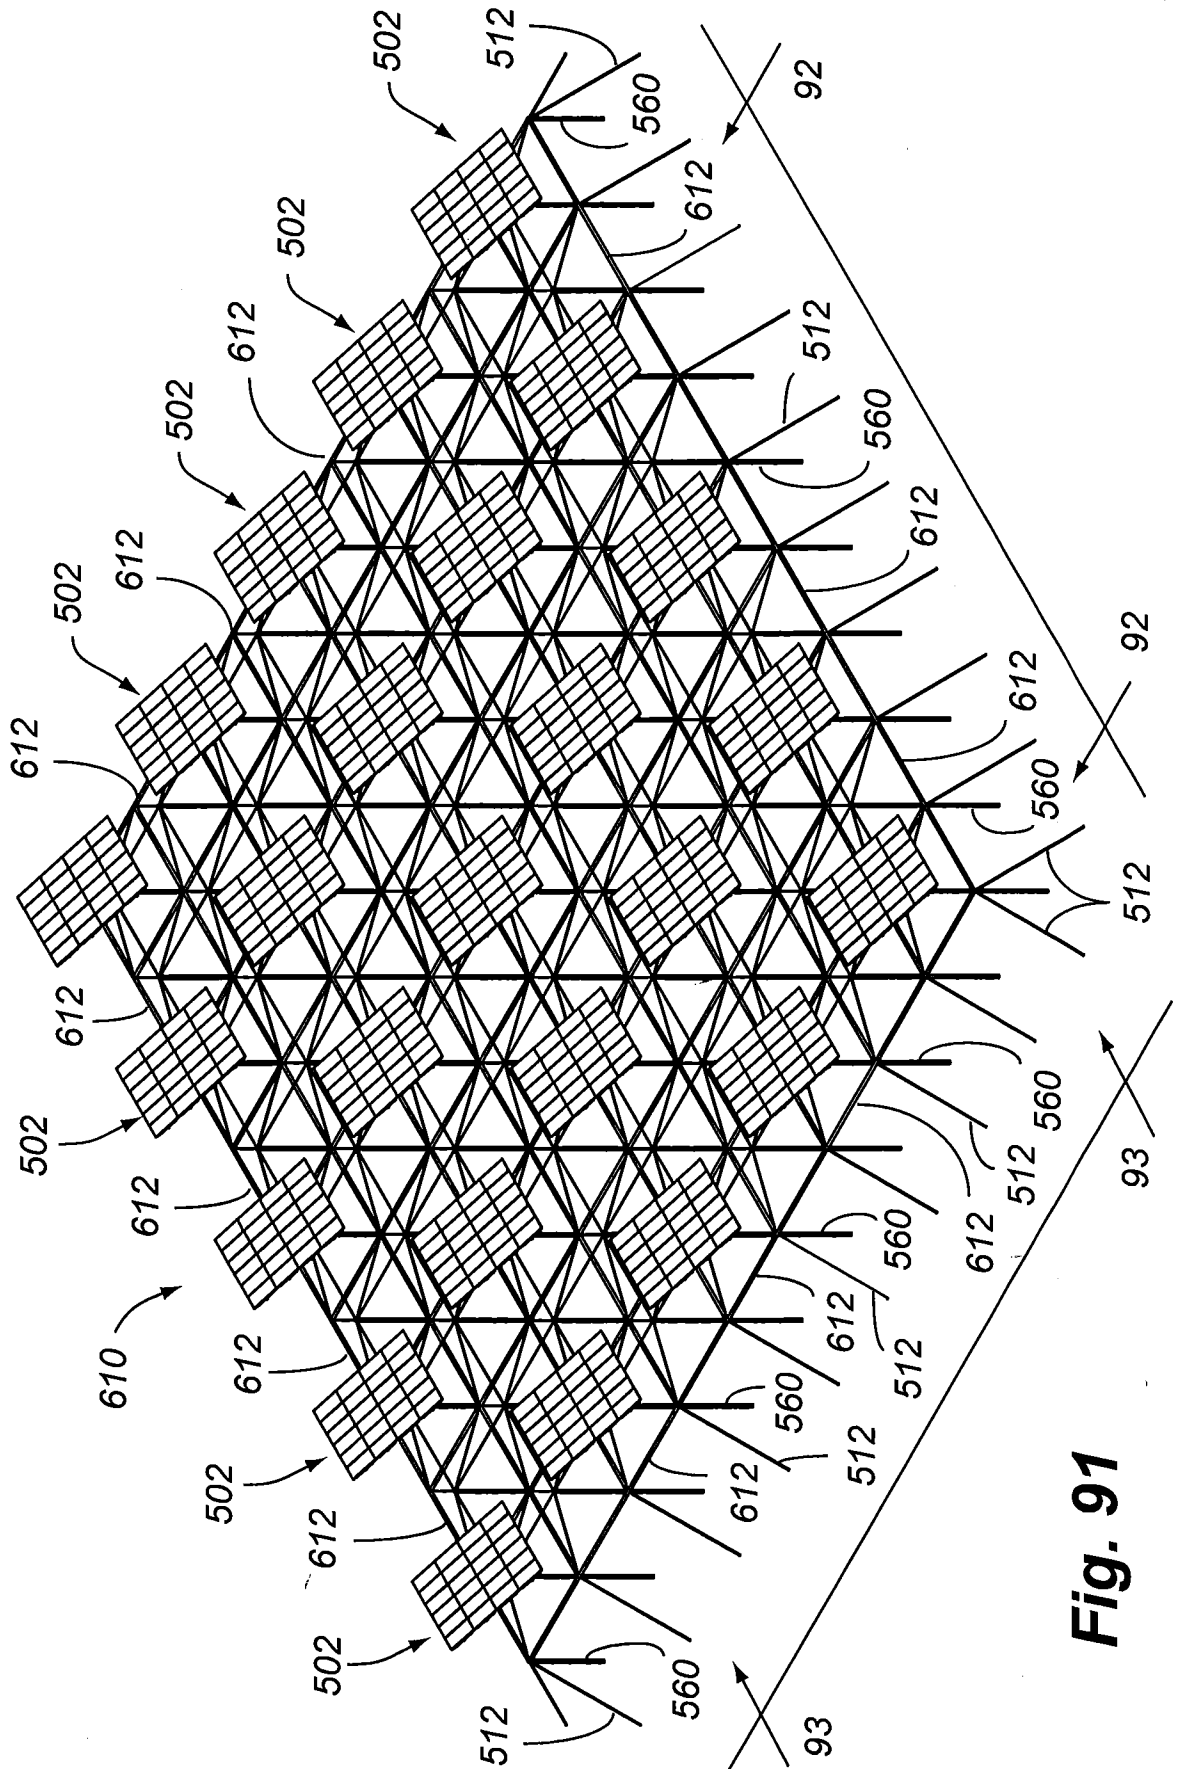


Fig. 91

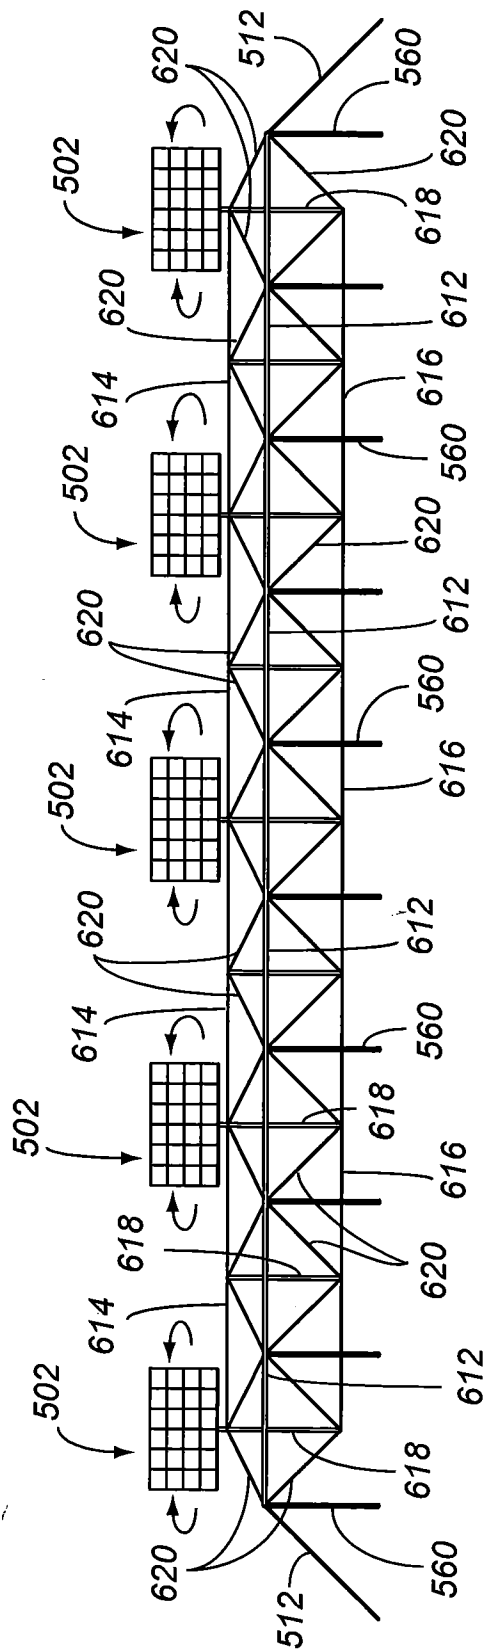


Fig. 92

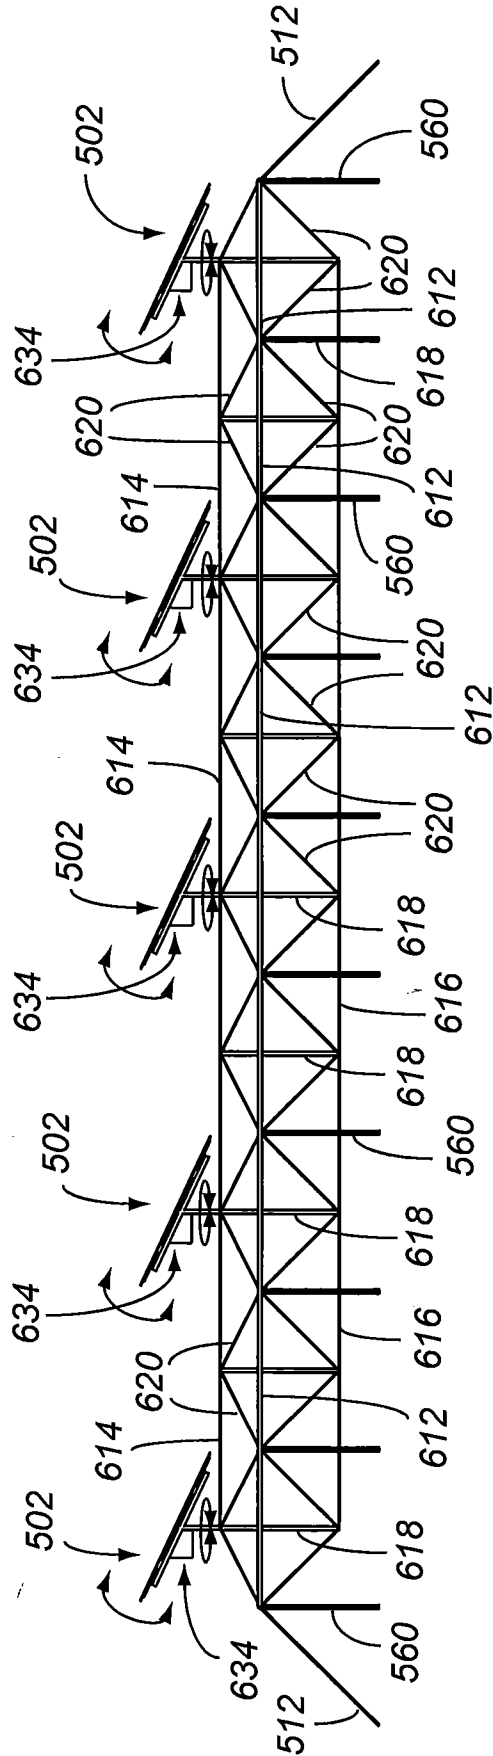


Fig. 93

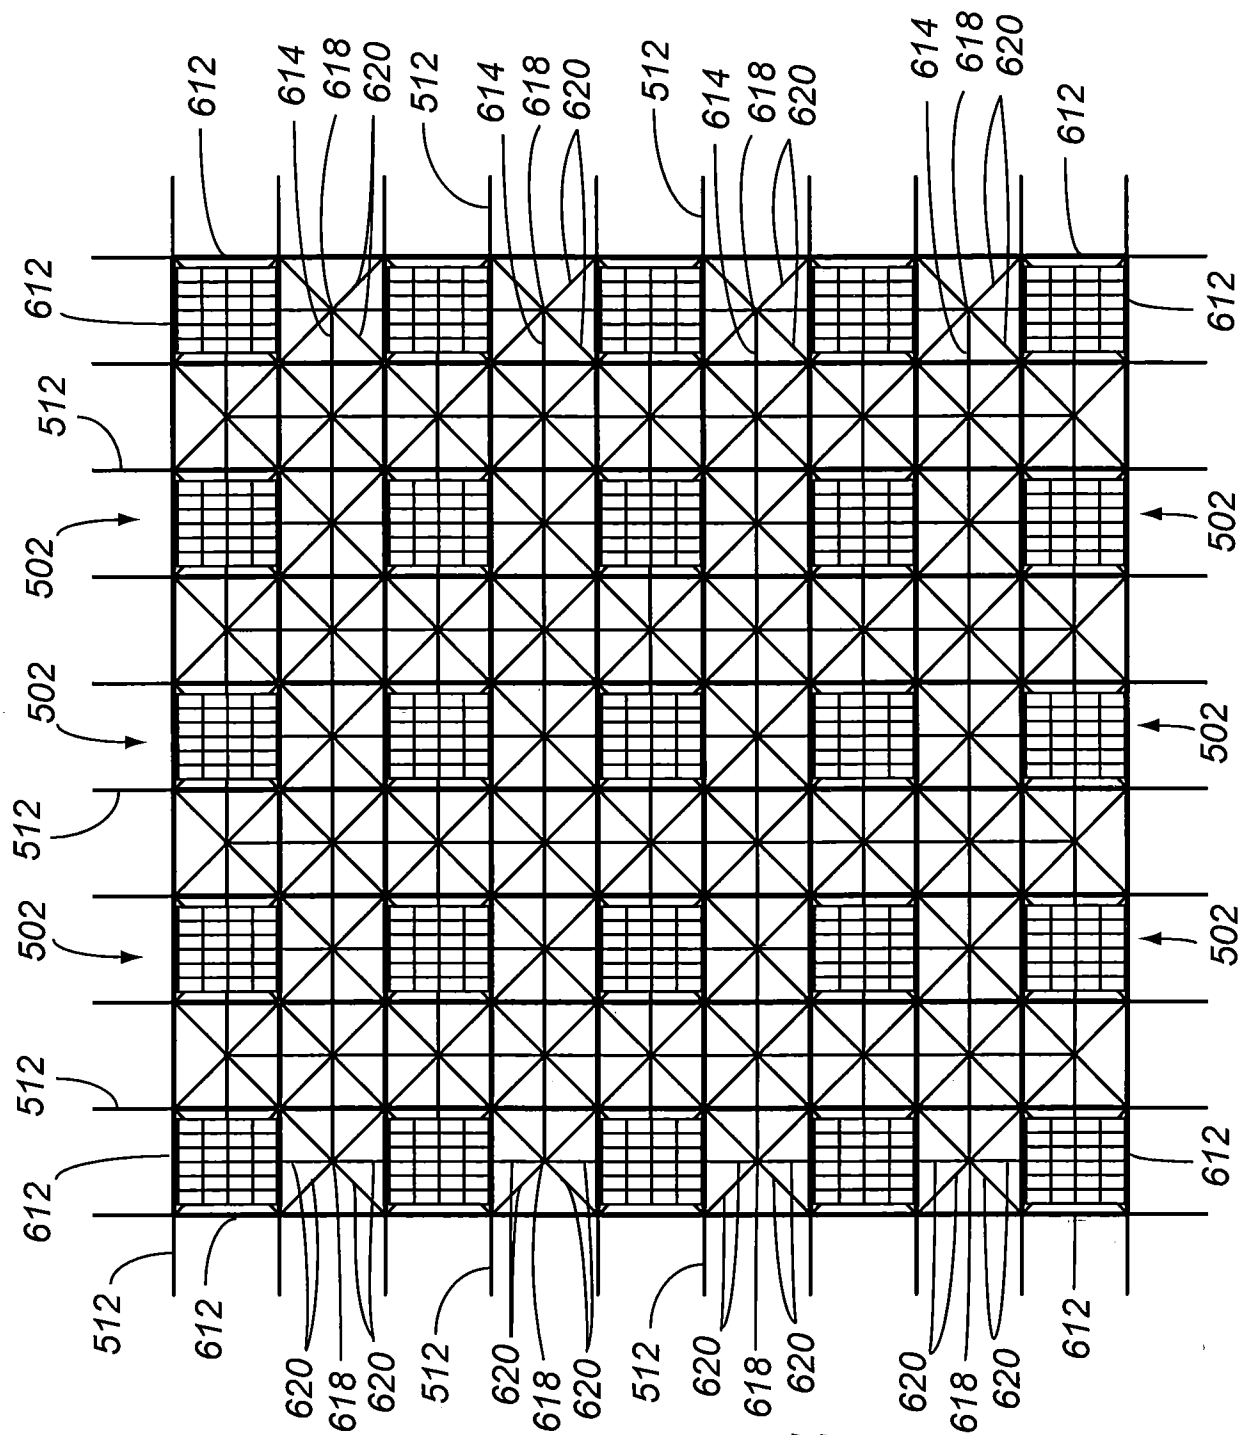


Fig. 94

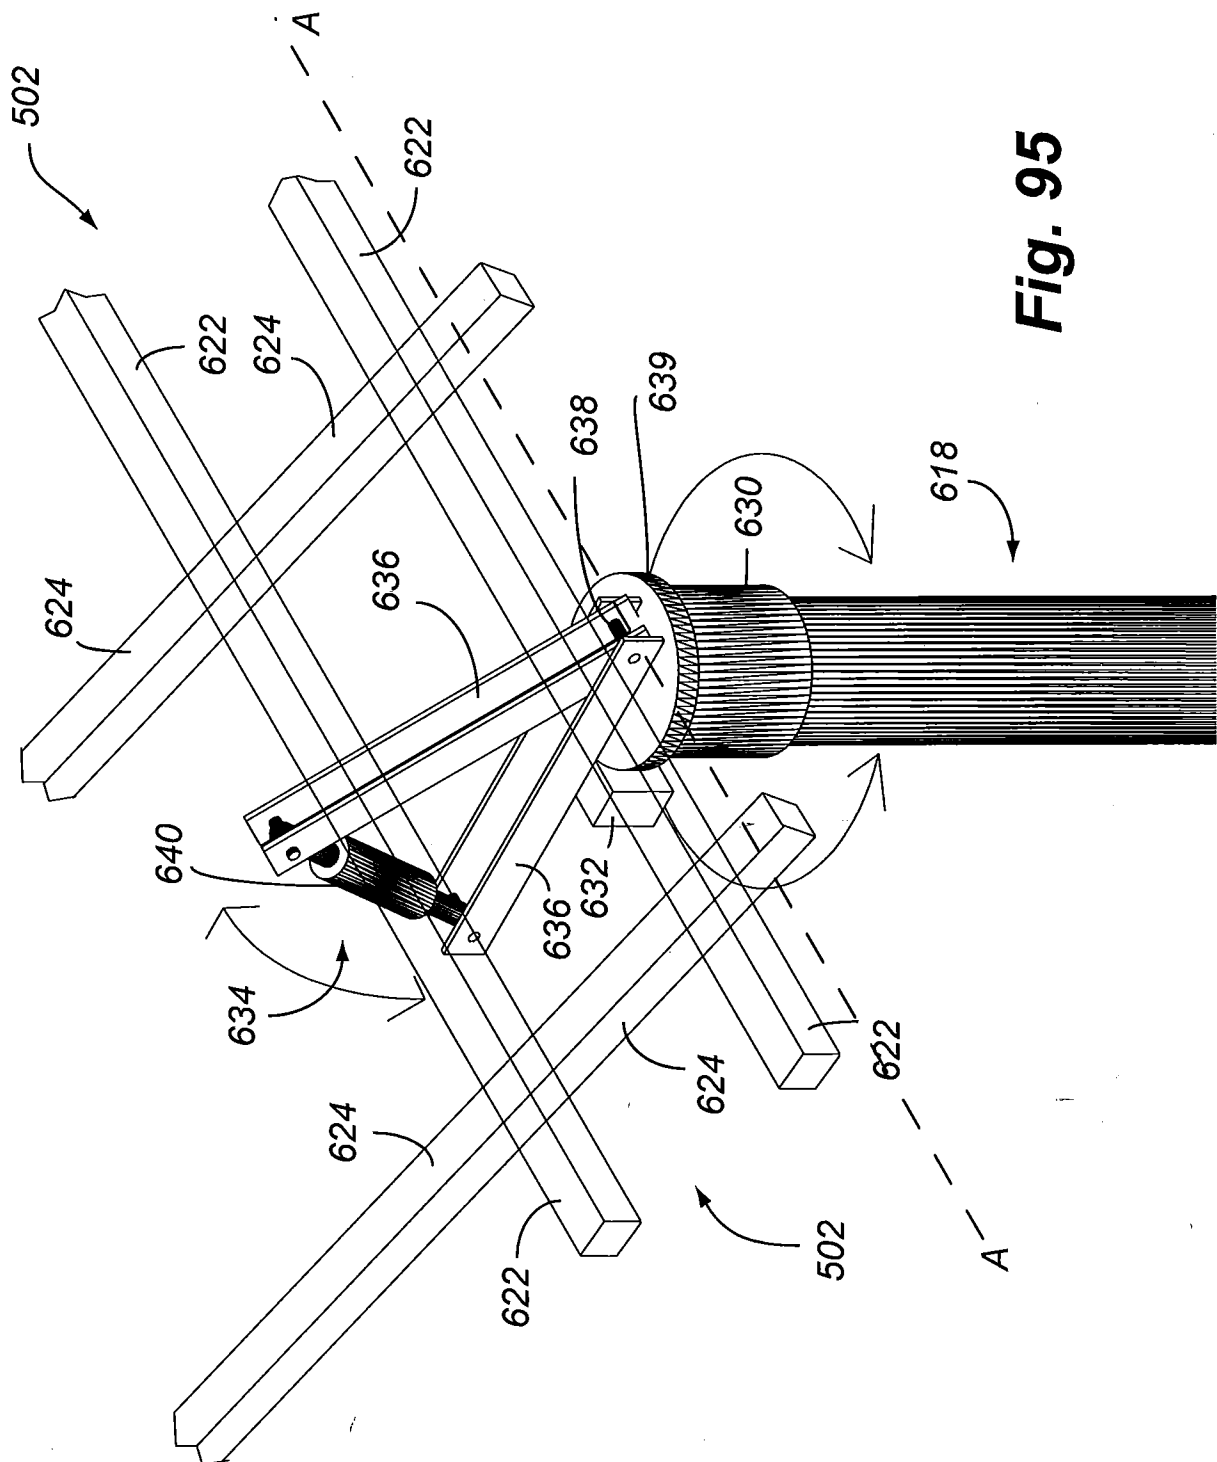


Fig. 95

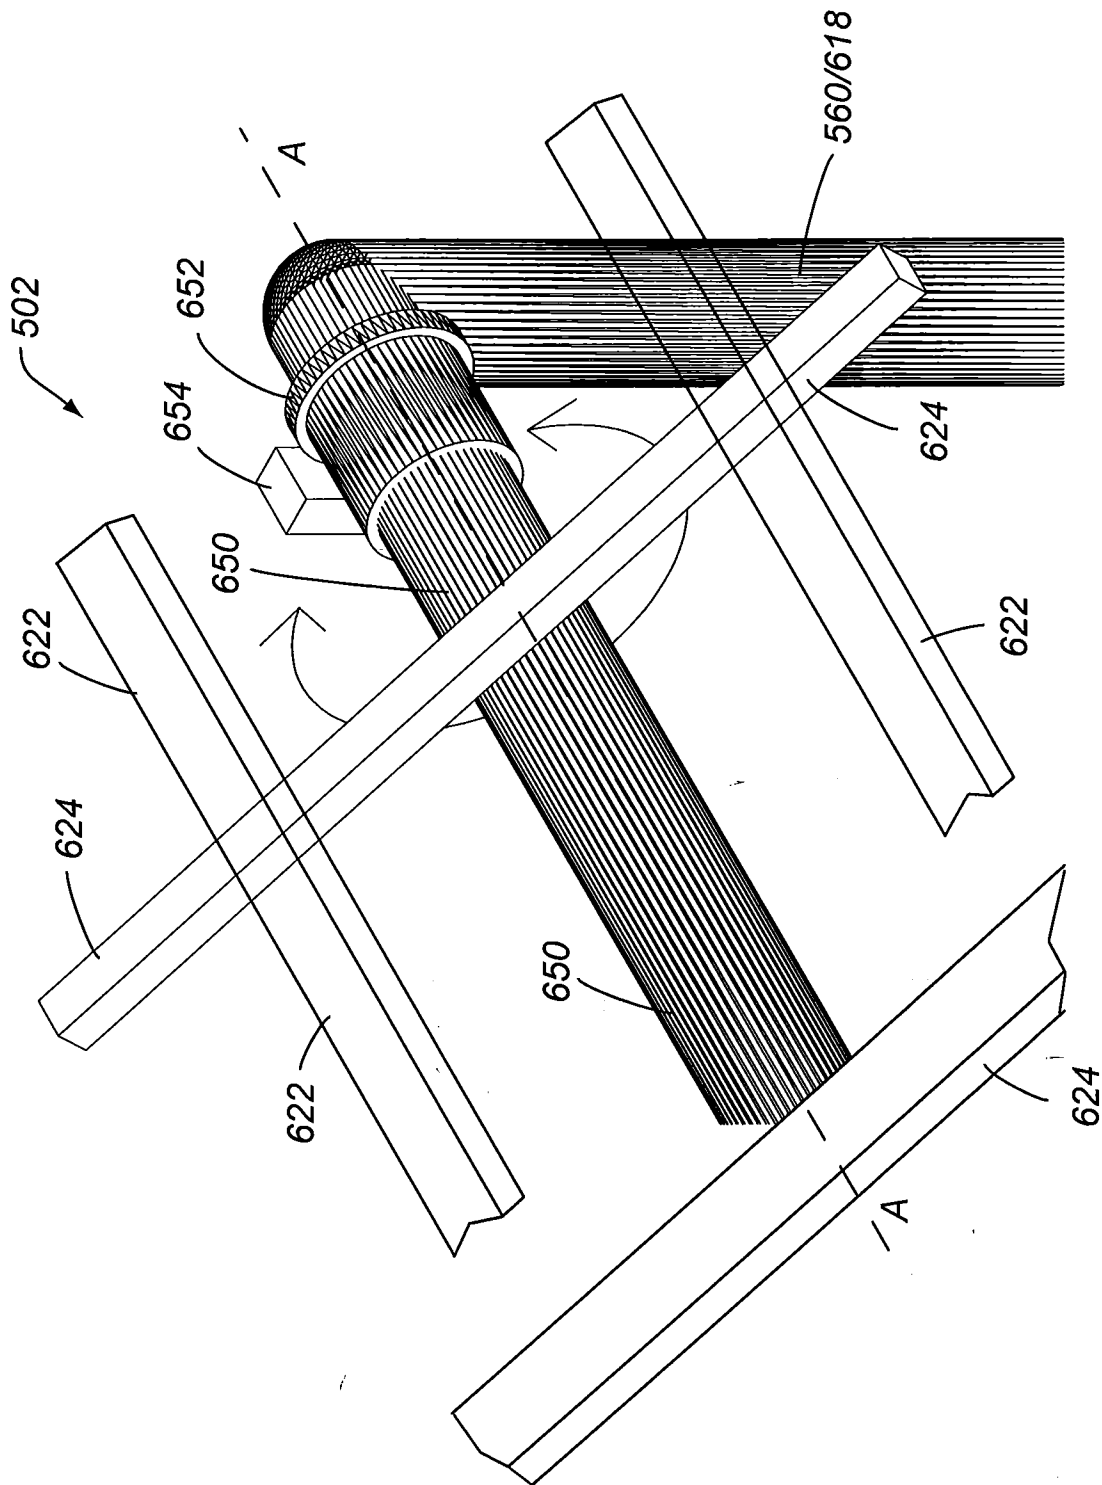


Fig. 96

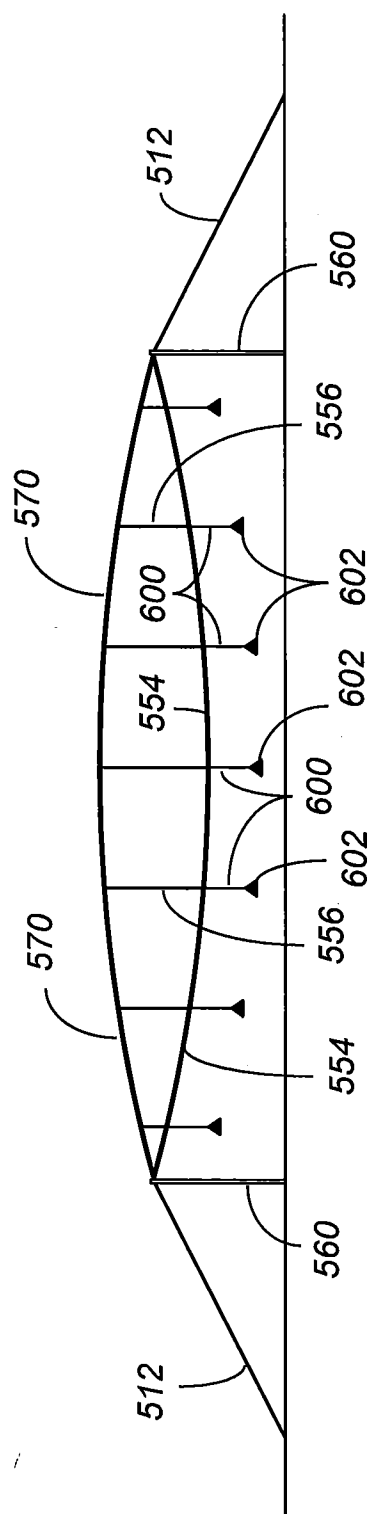


Fig. 97

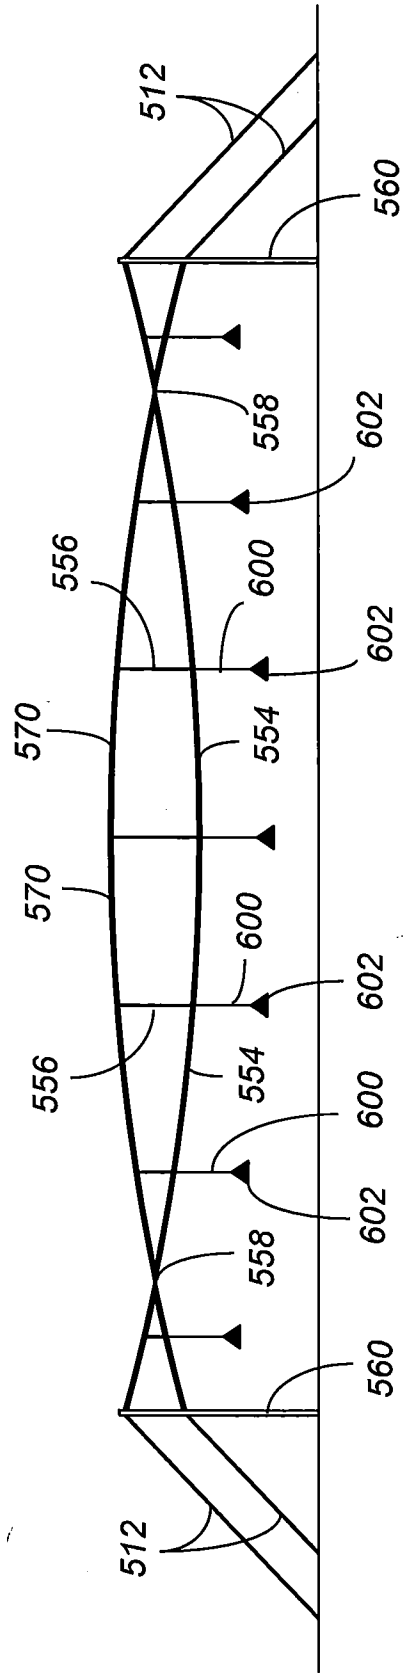


Fig. 98

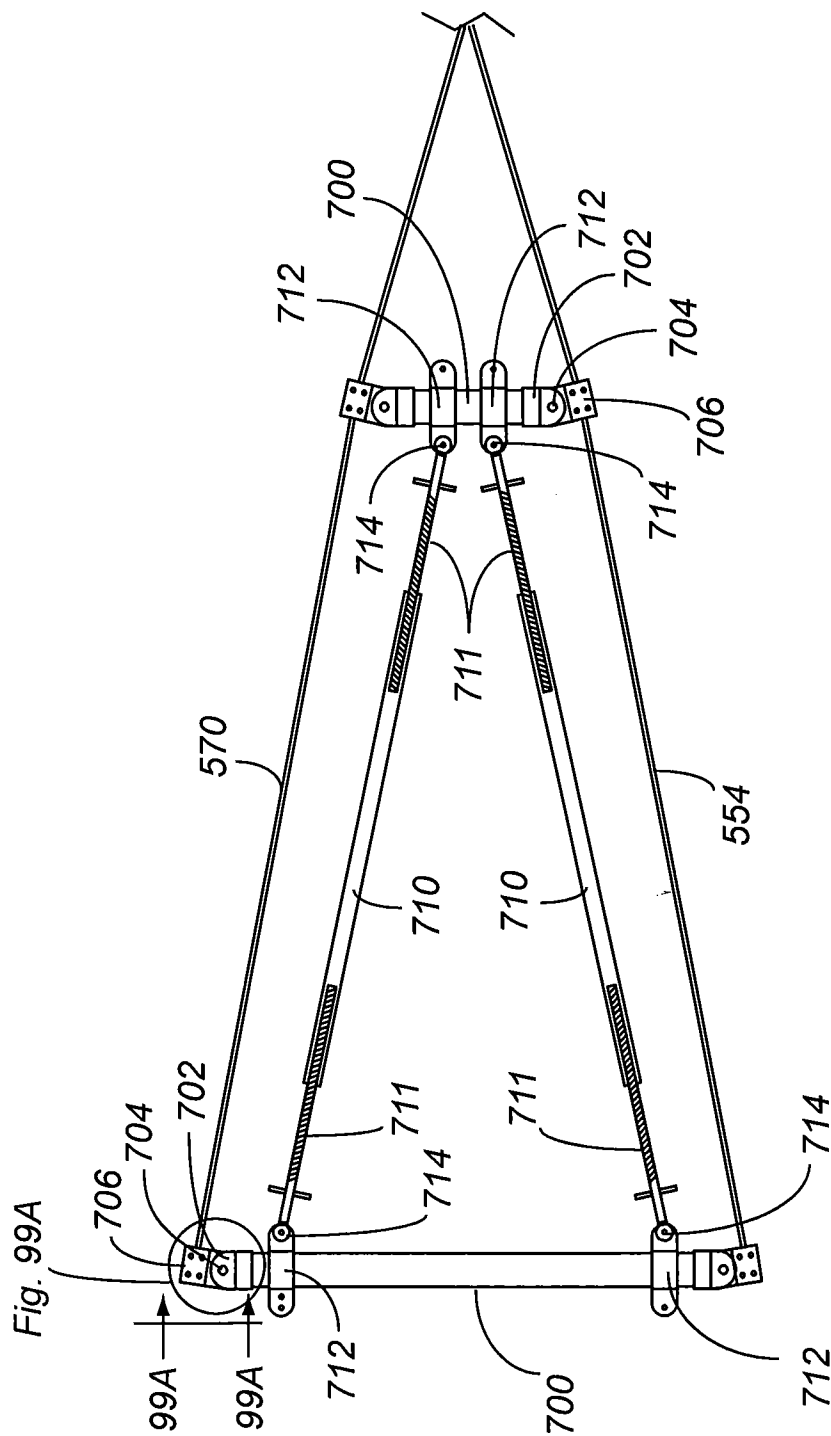


Fig. 99

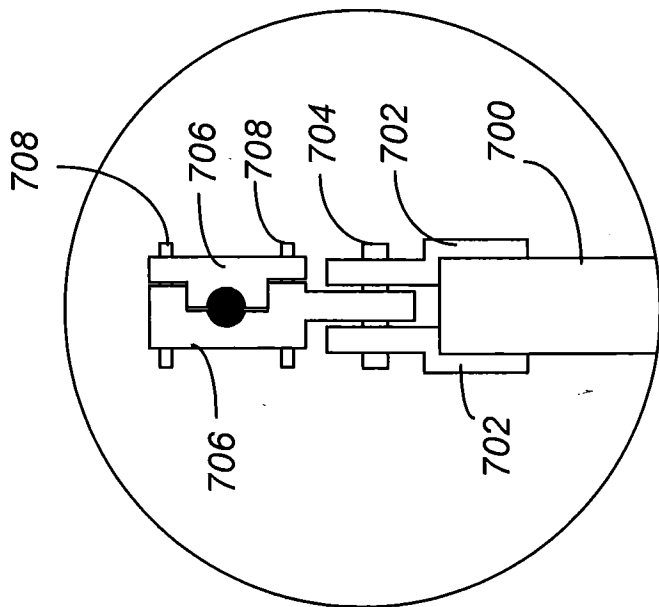


Fig. 99A

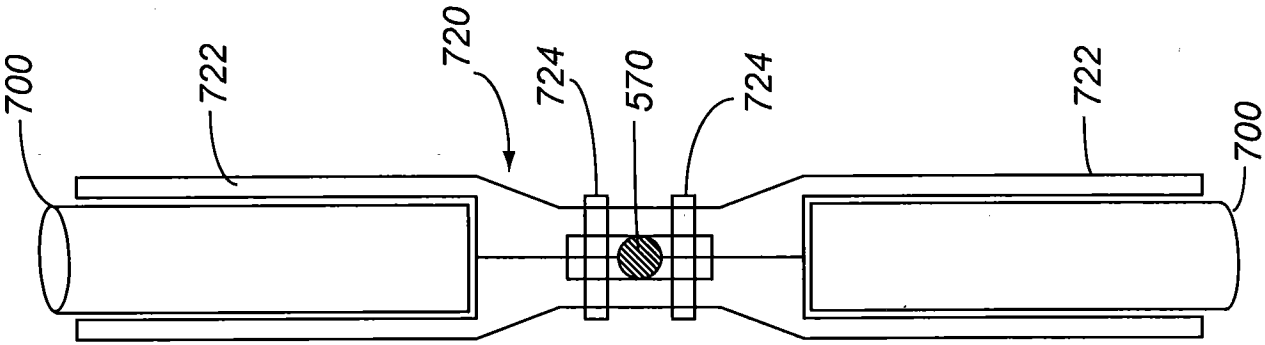


Fig. 100

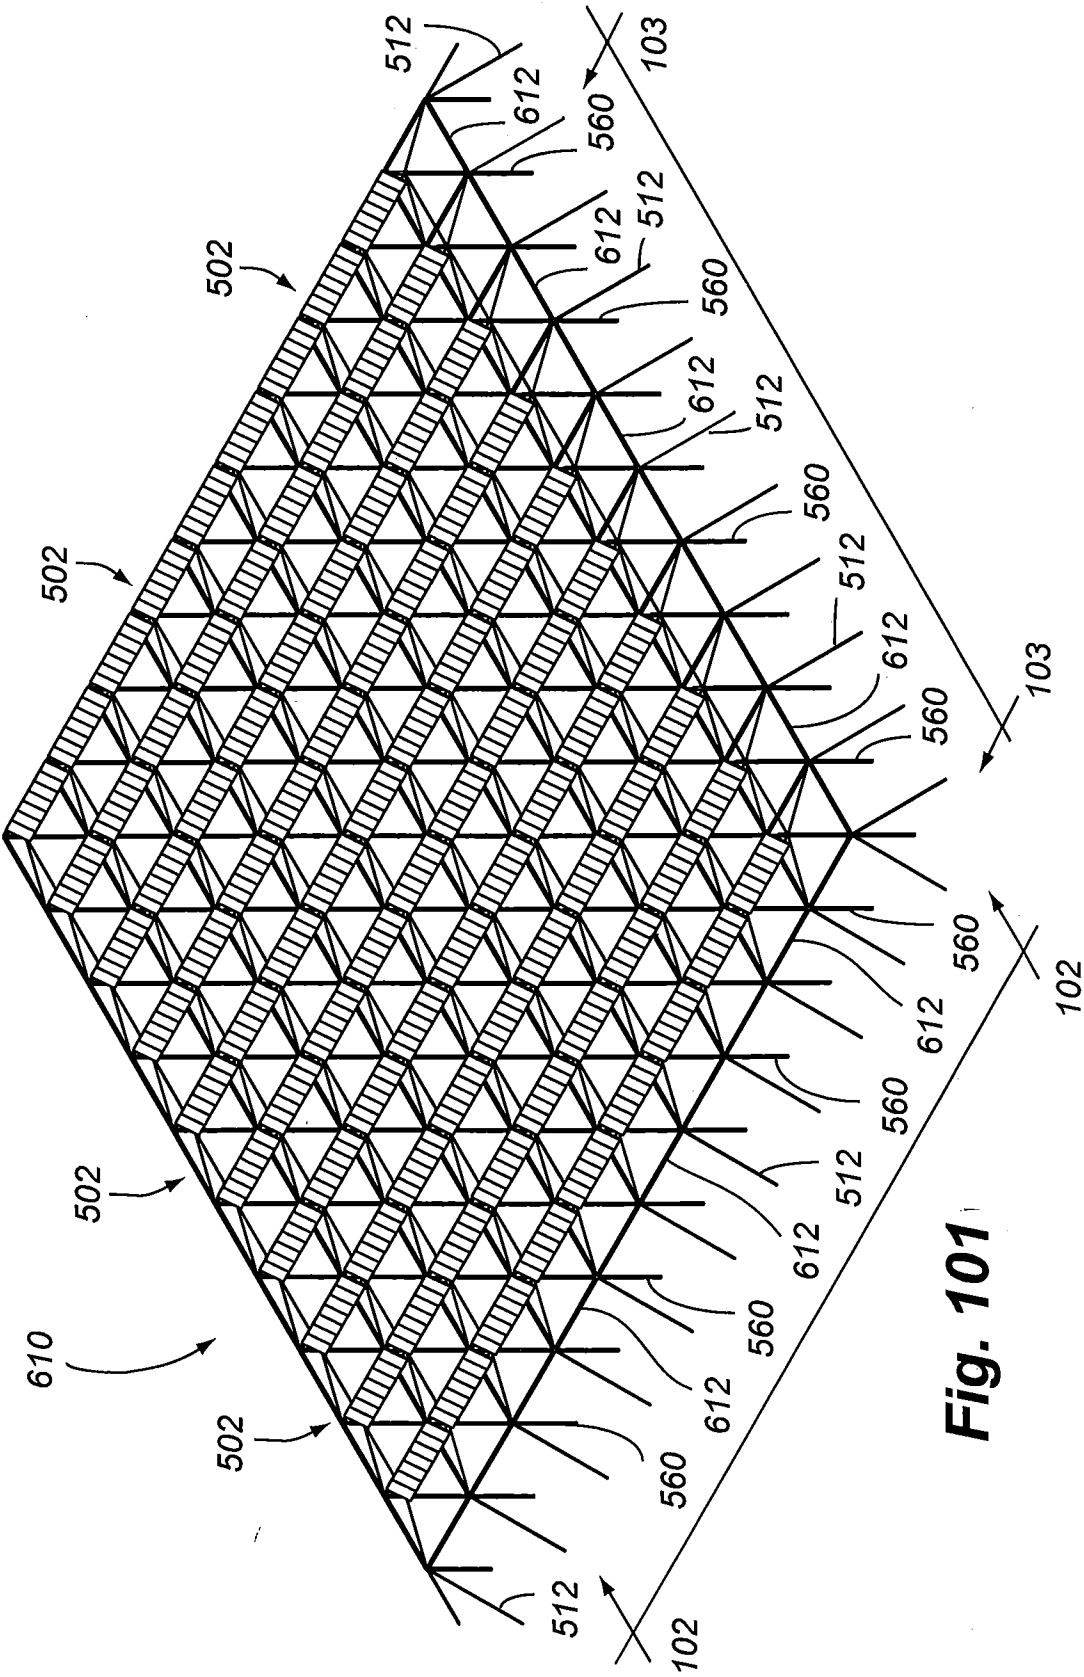


Fig. 101

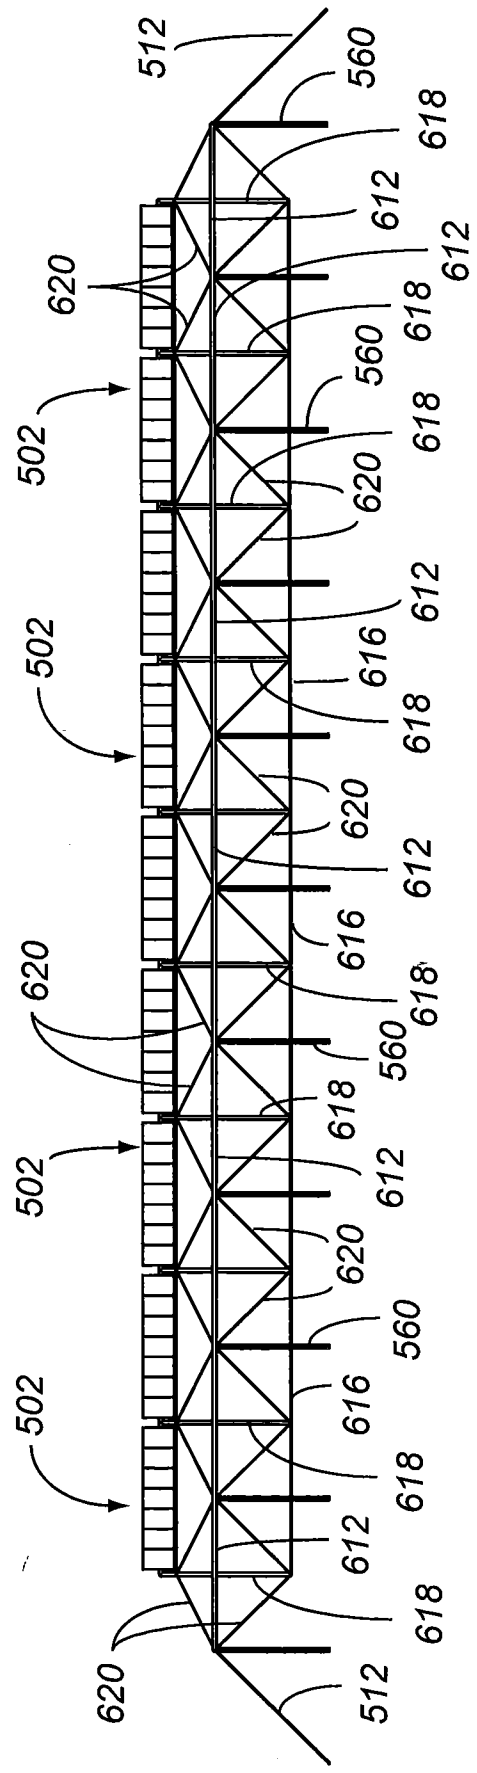


Fig. 102

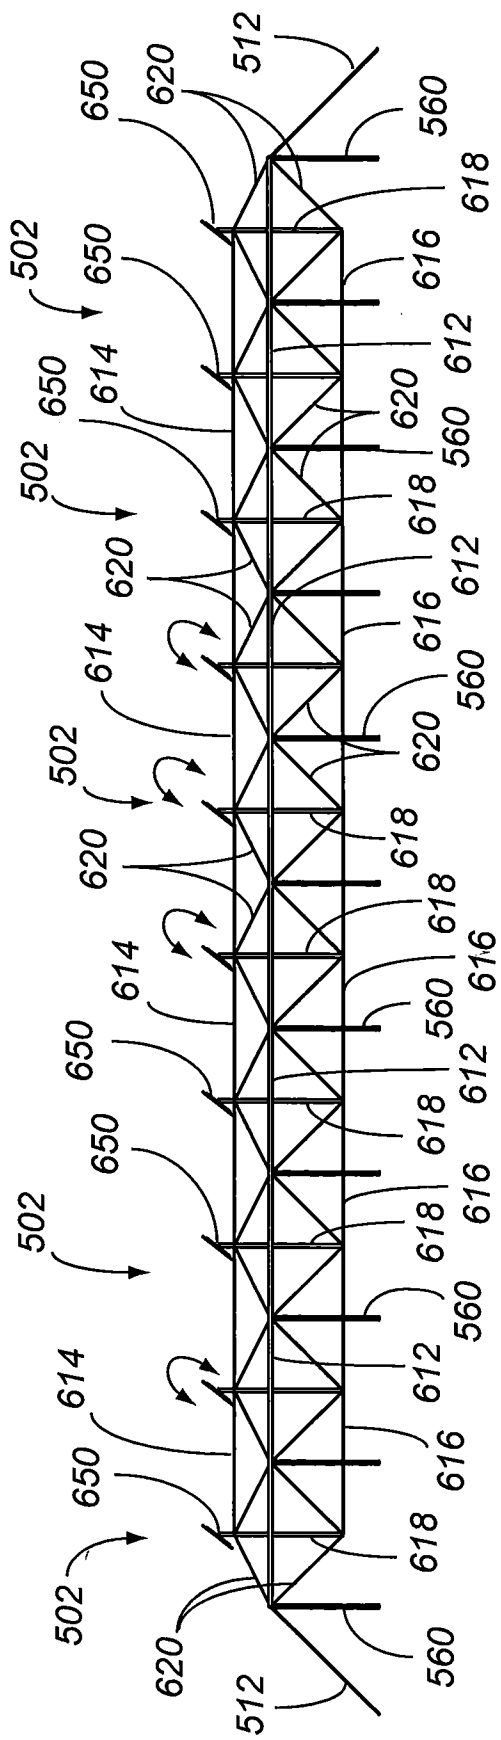


Fig. 103

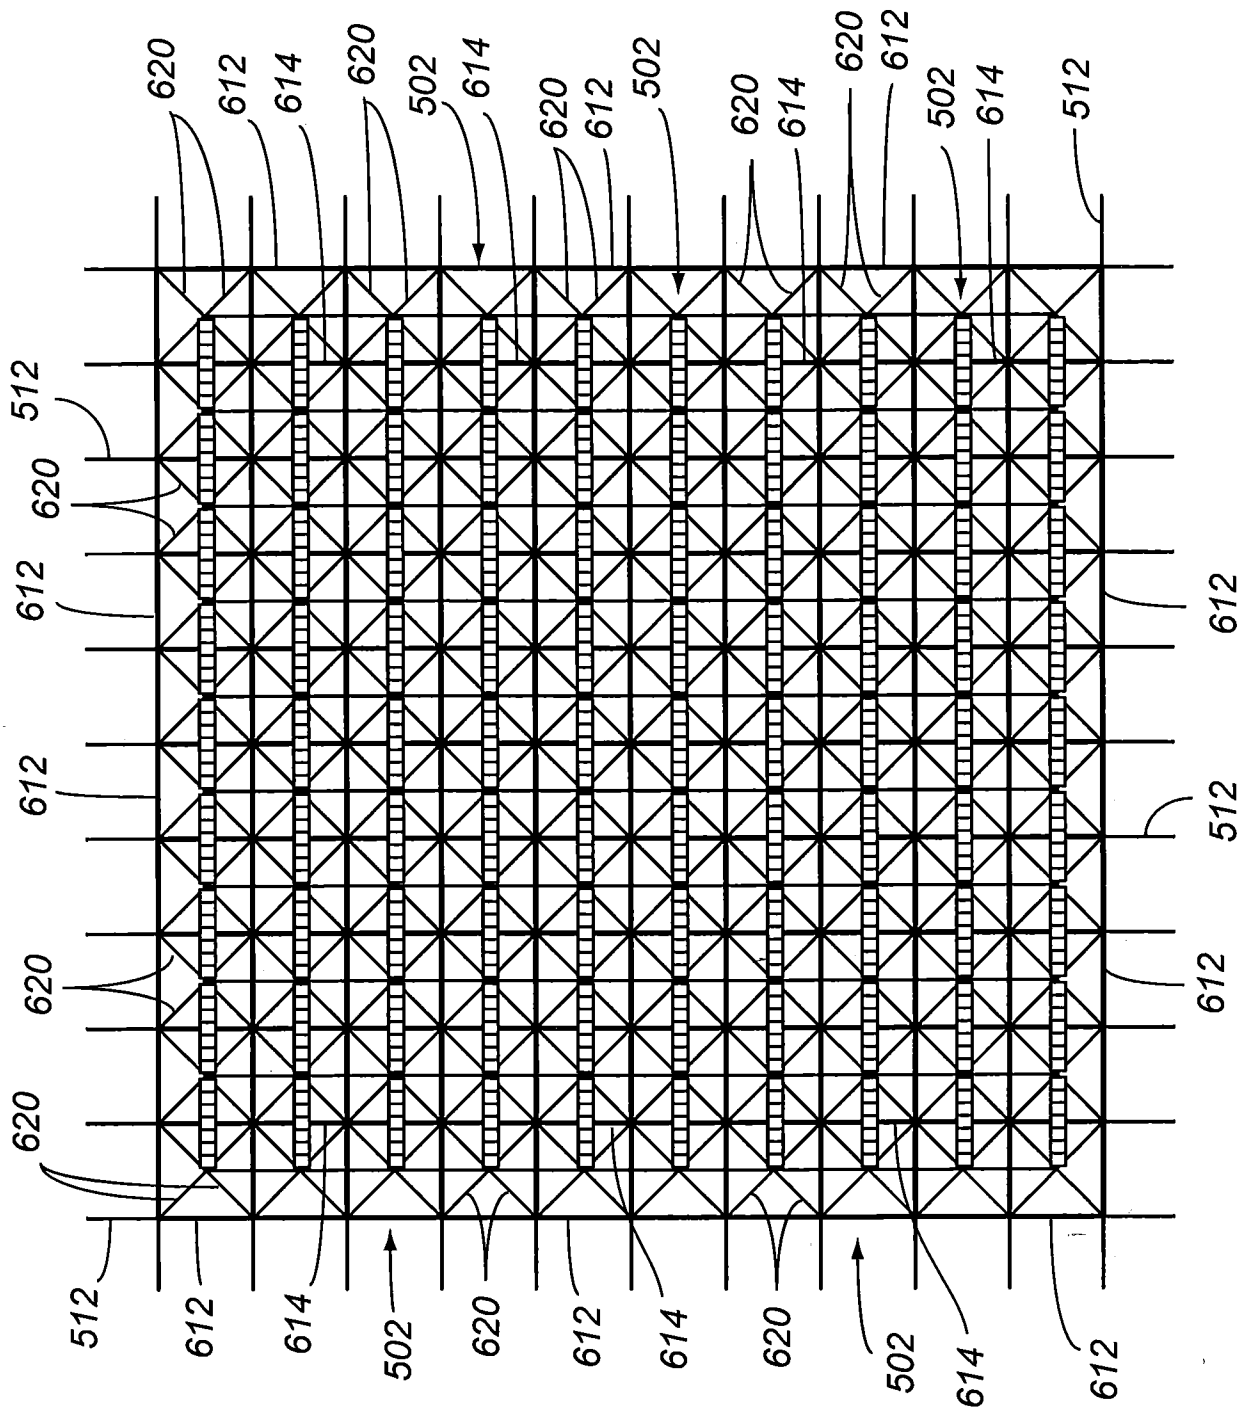
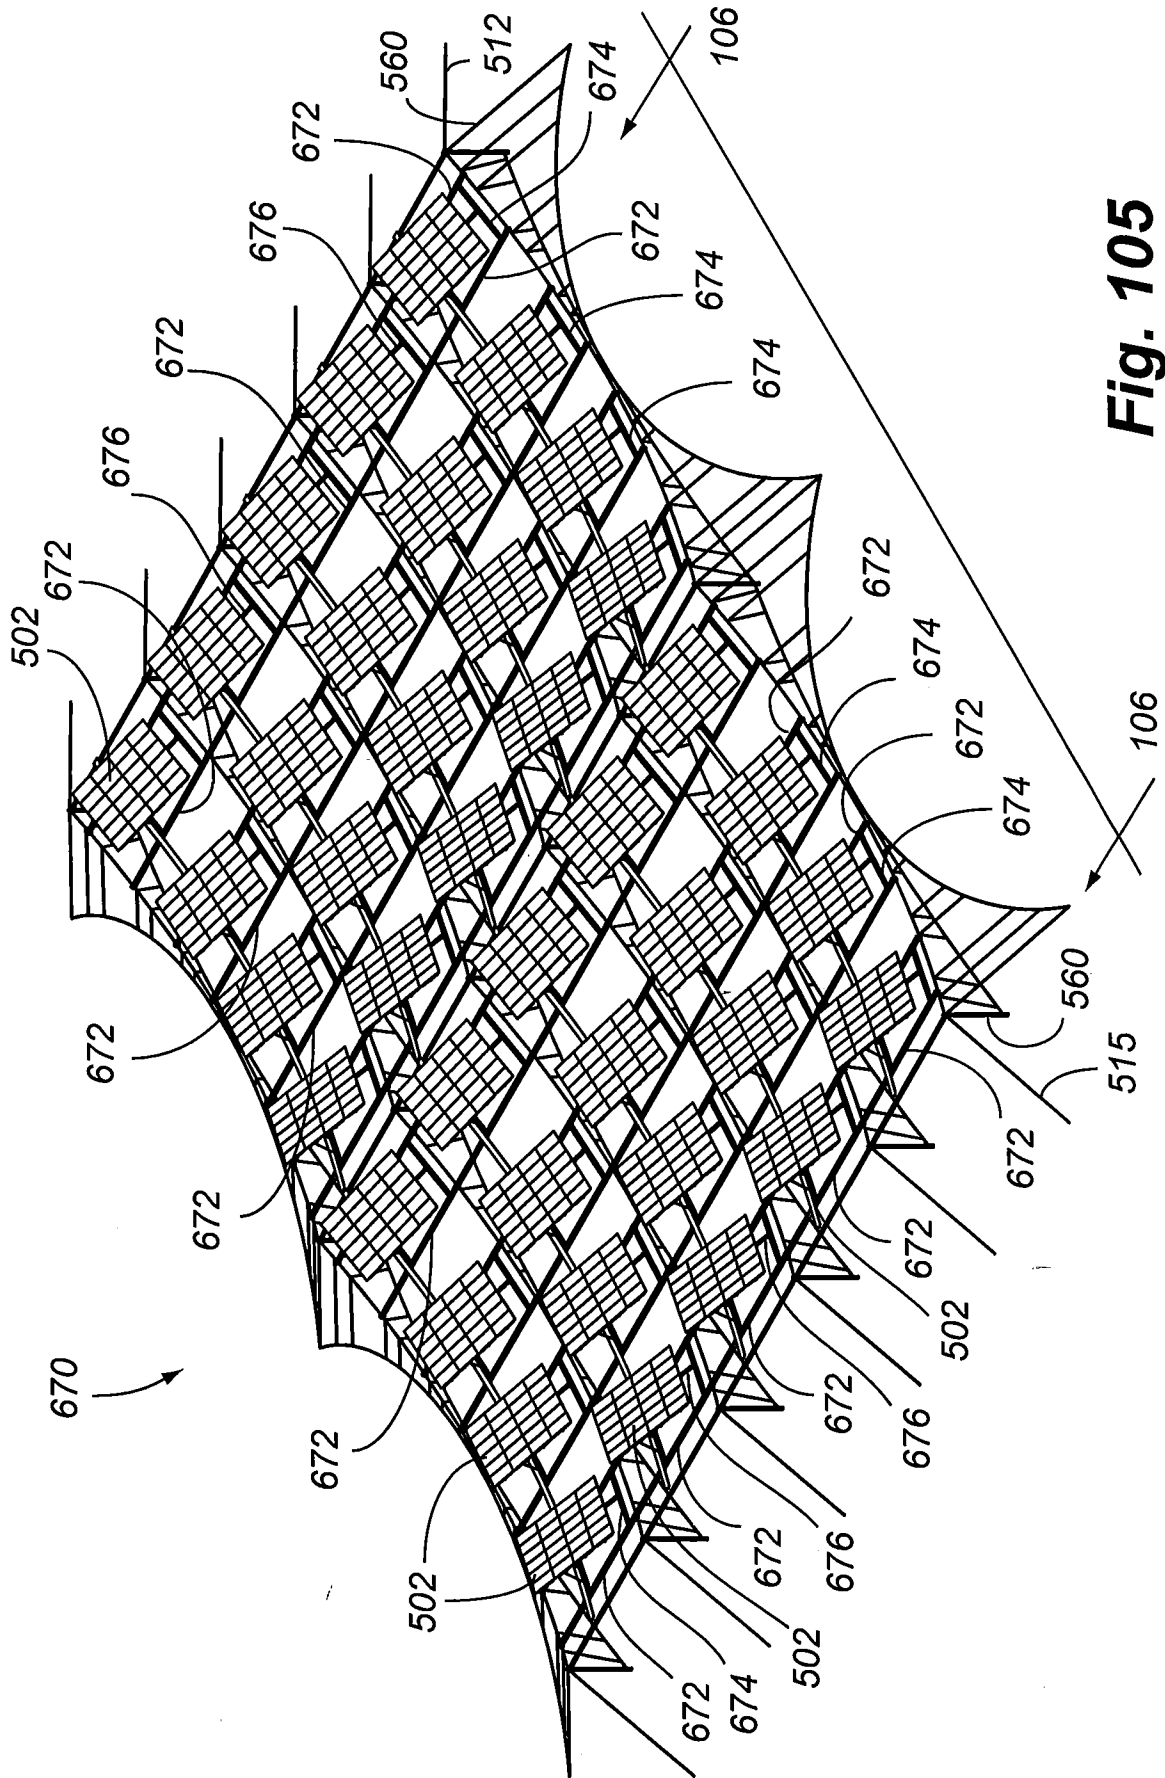


Fig. 104



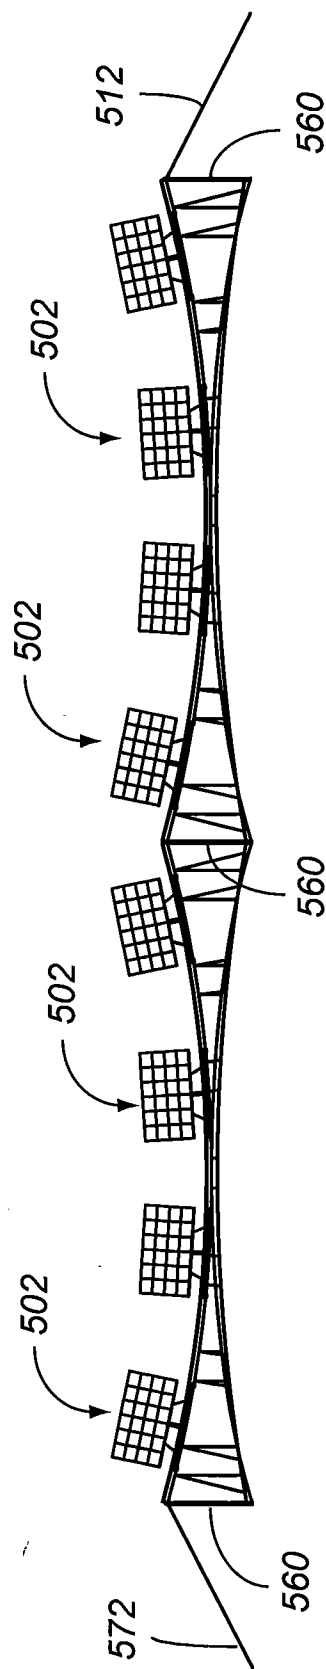


Fig. 106

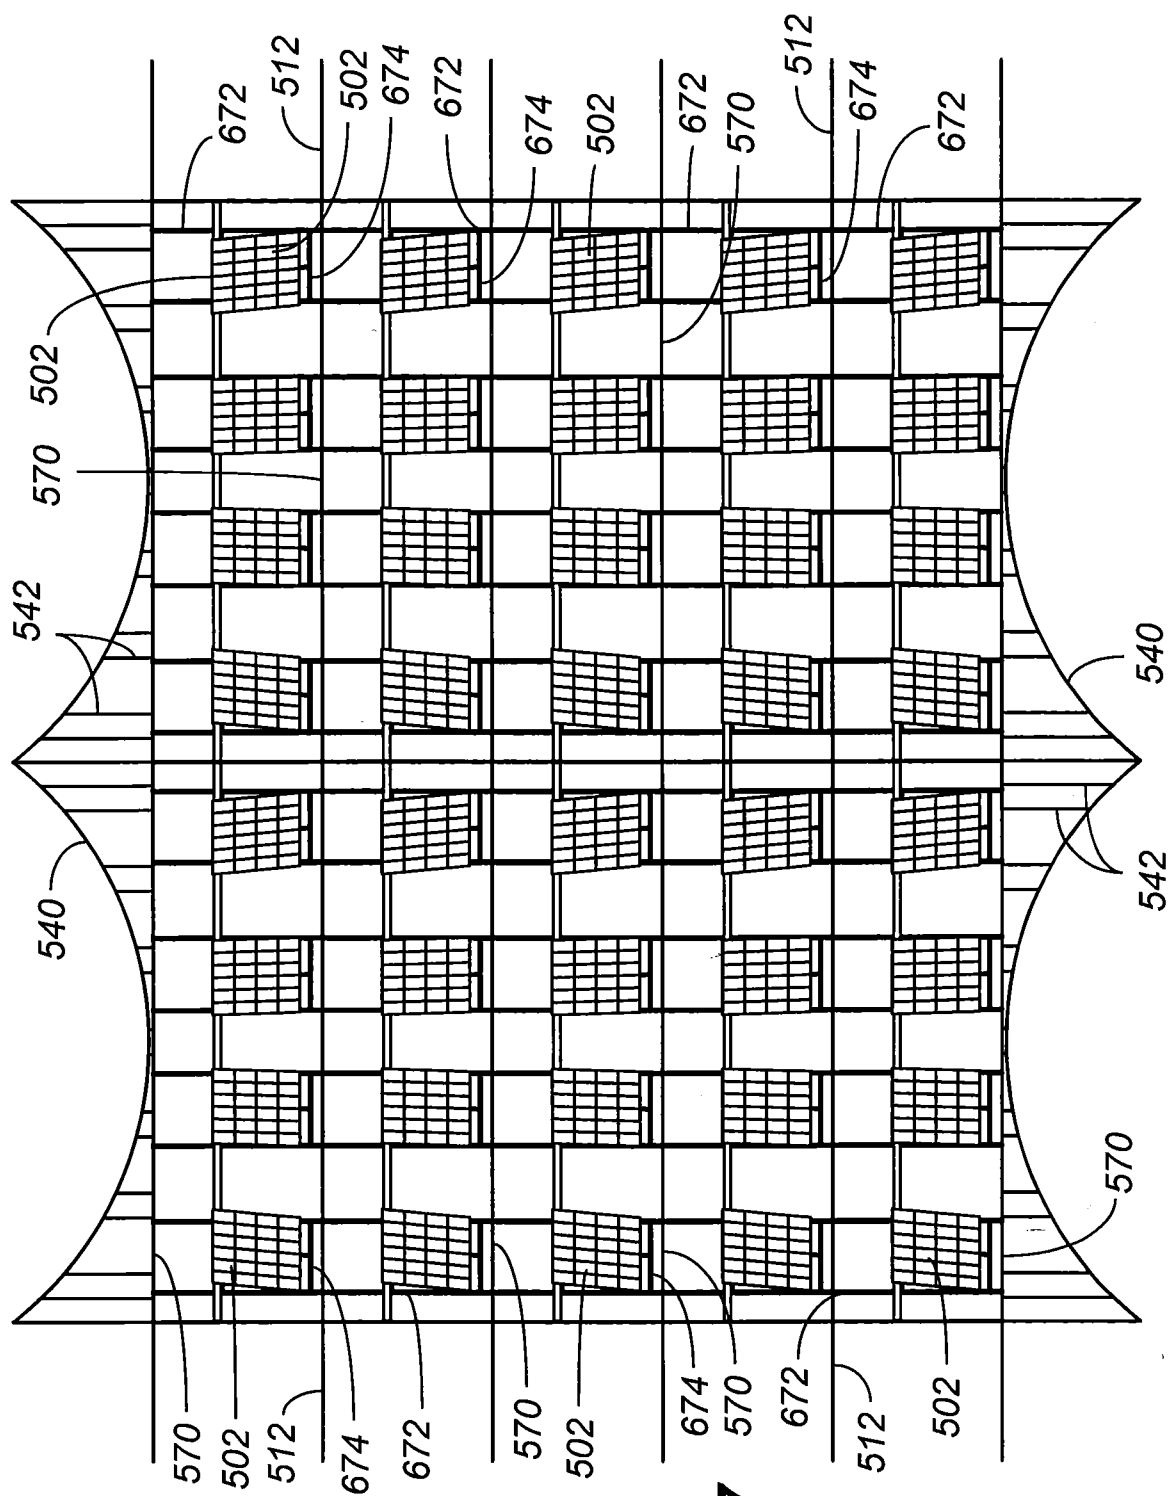


Fig. 107

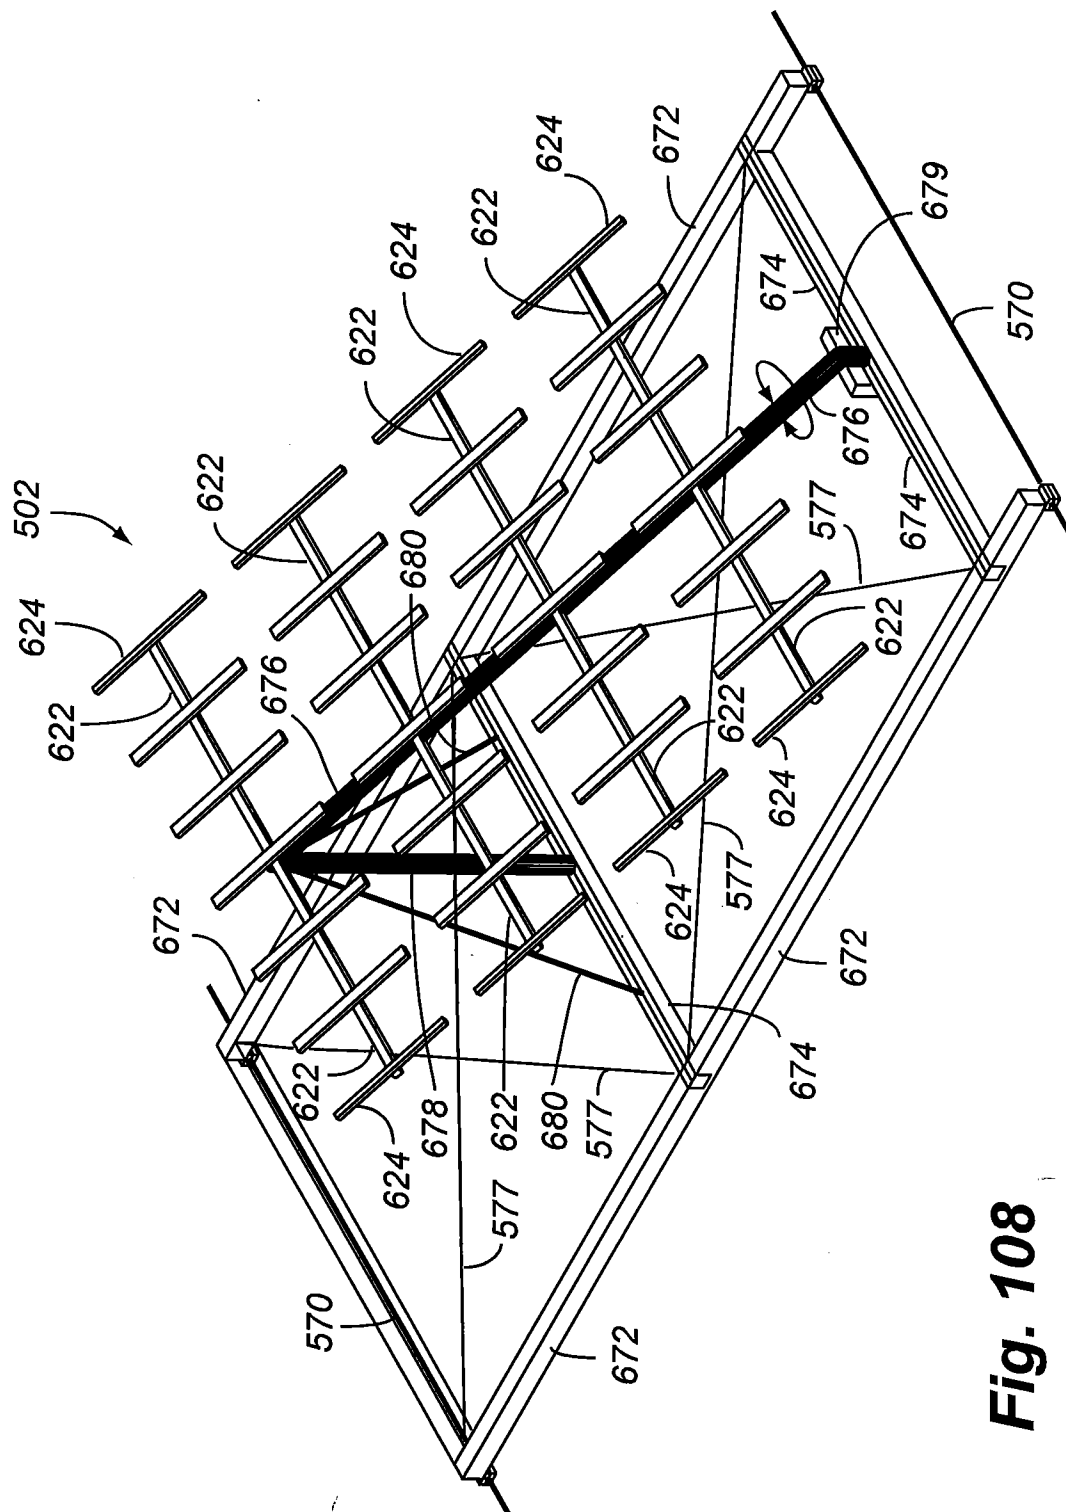


Fig. 108

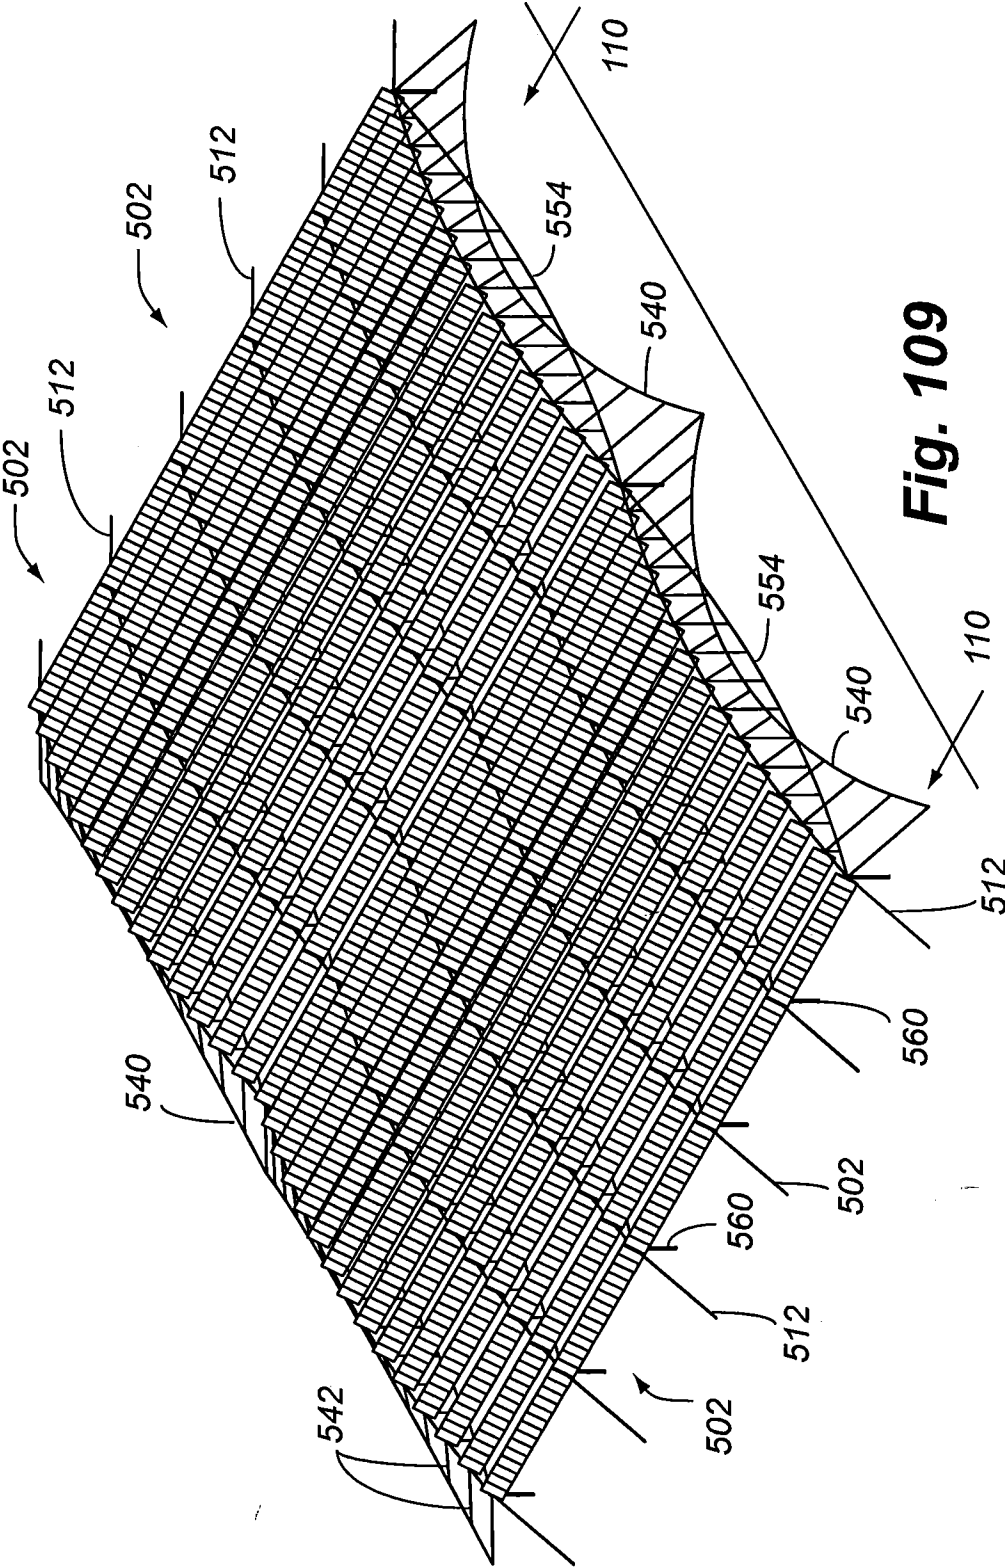


Fig. 109

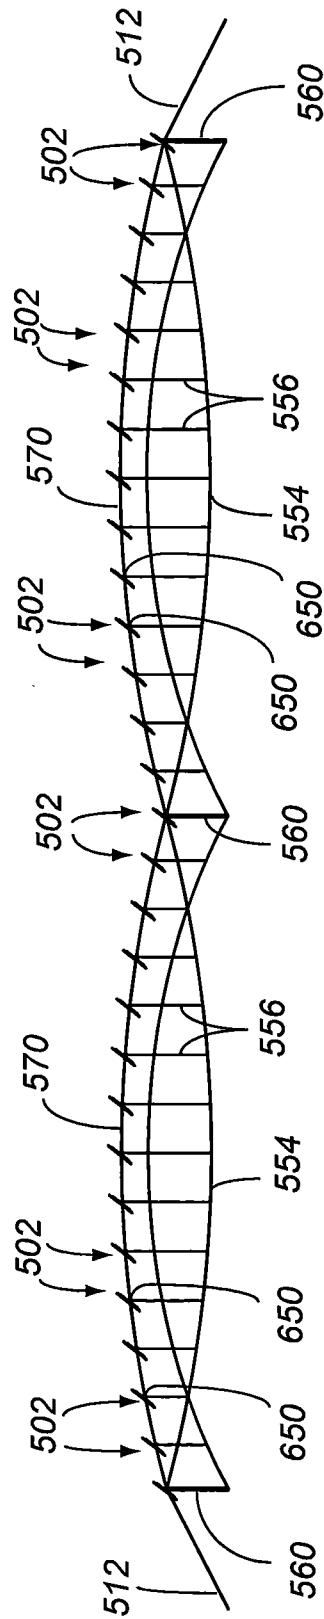


Fig. 110

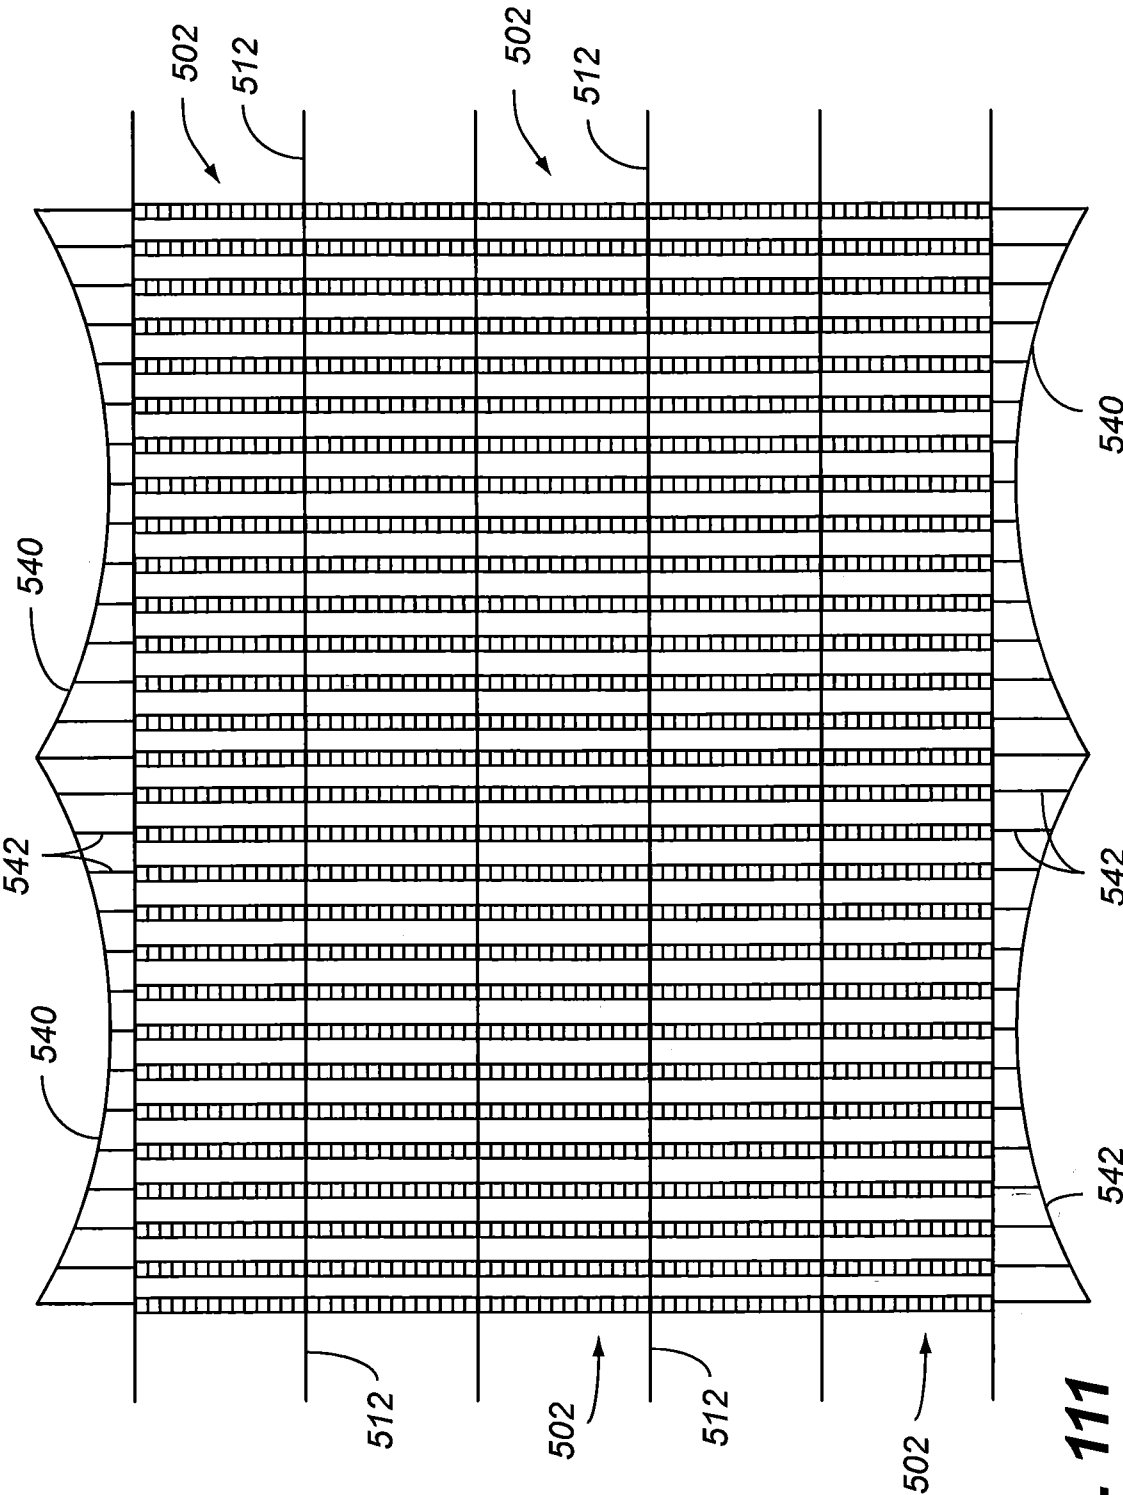


Fig. 111

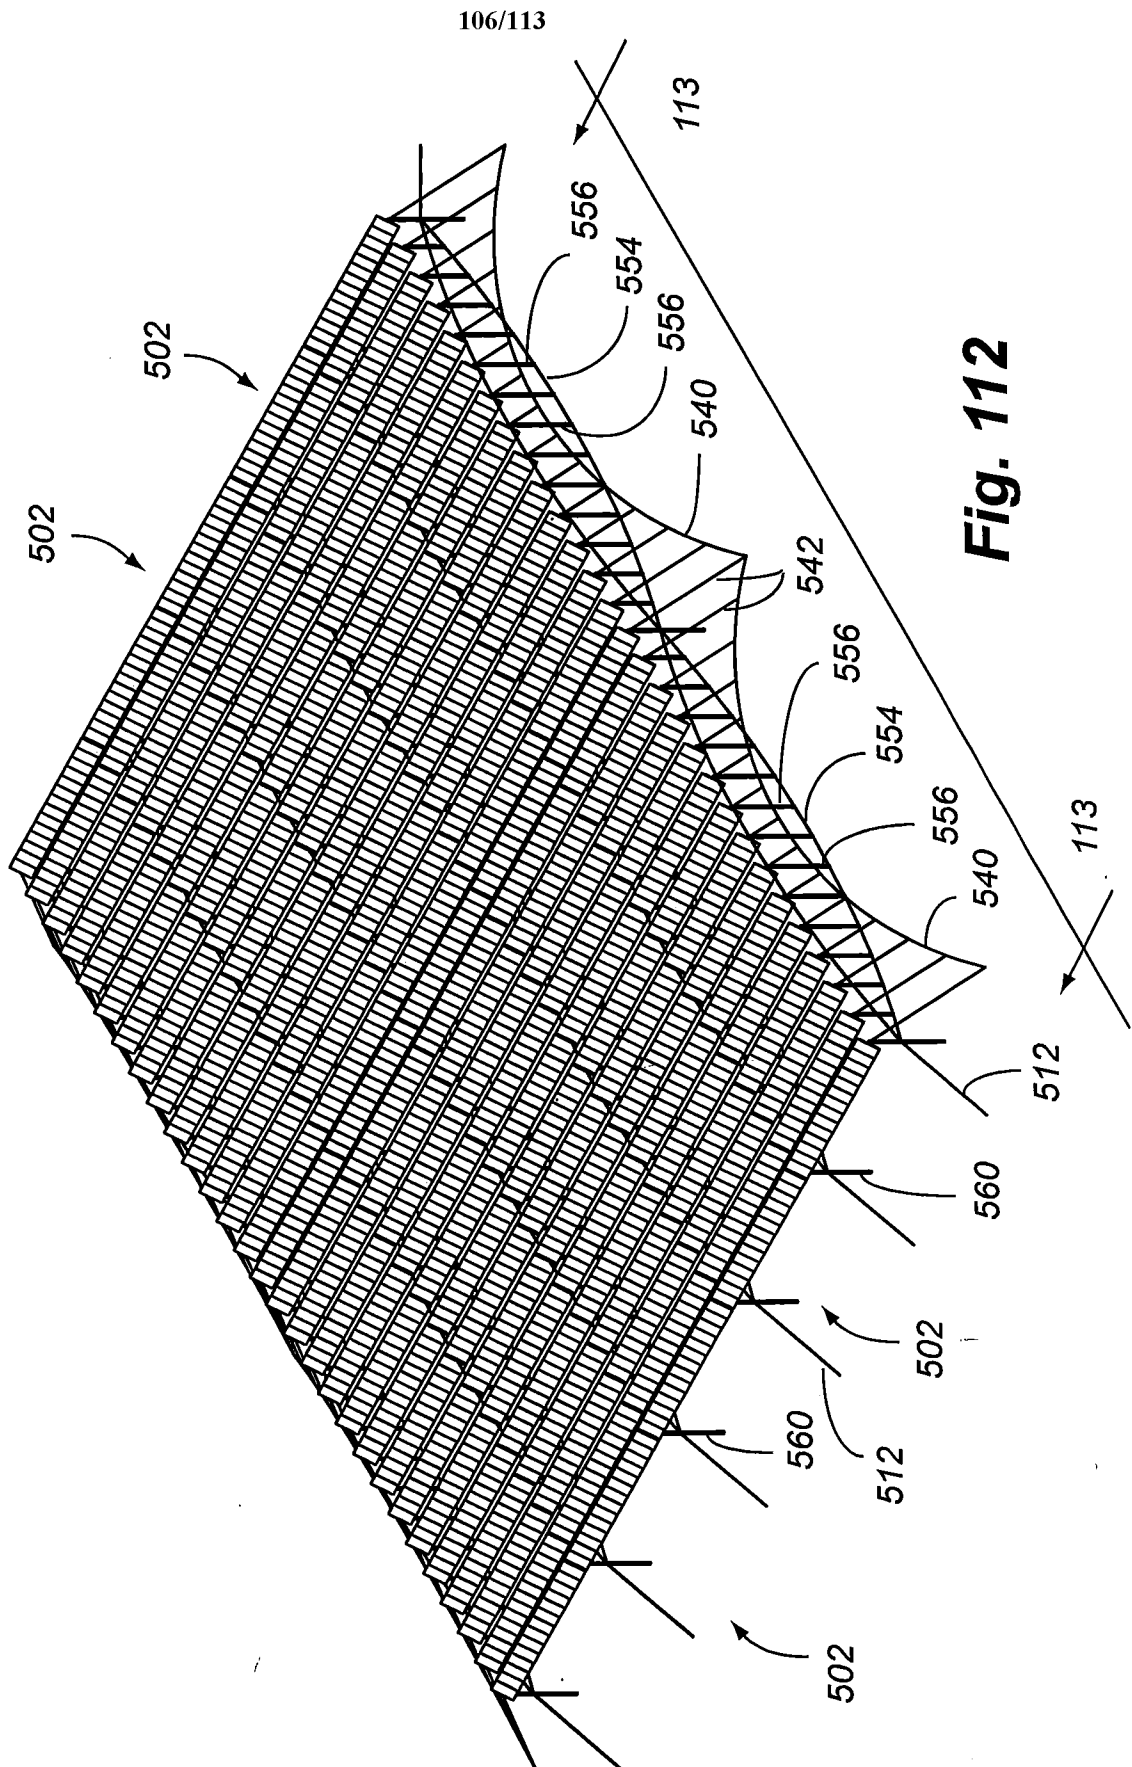


Fig. 112

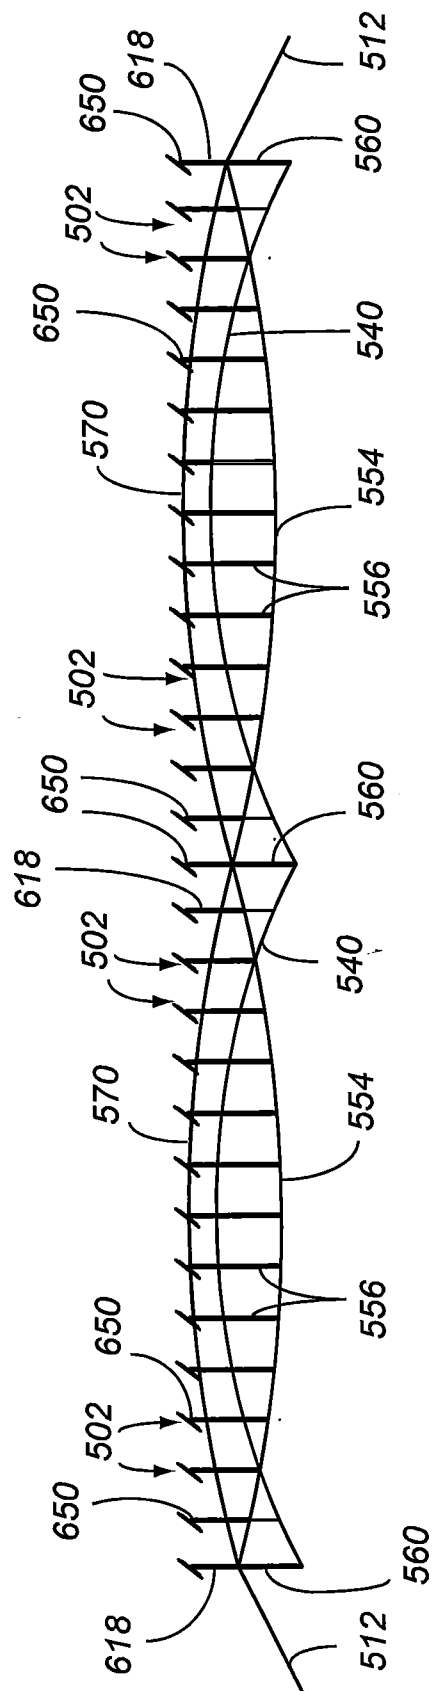


Fig. 113

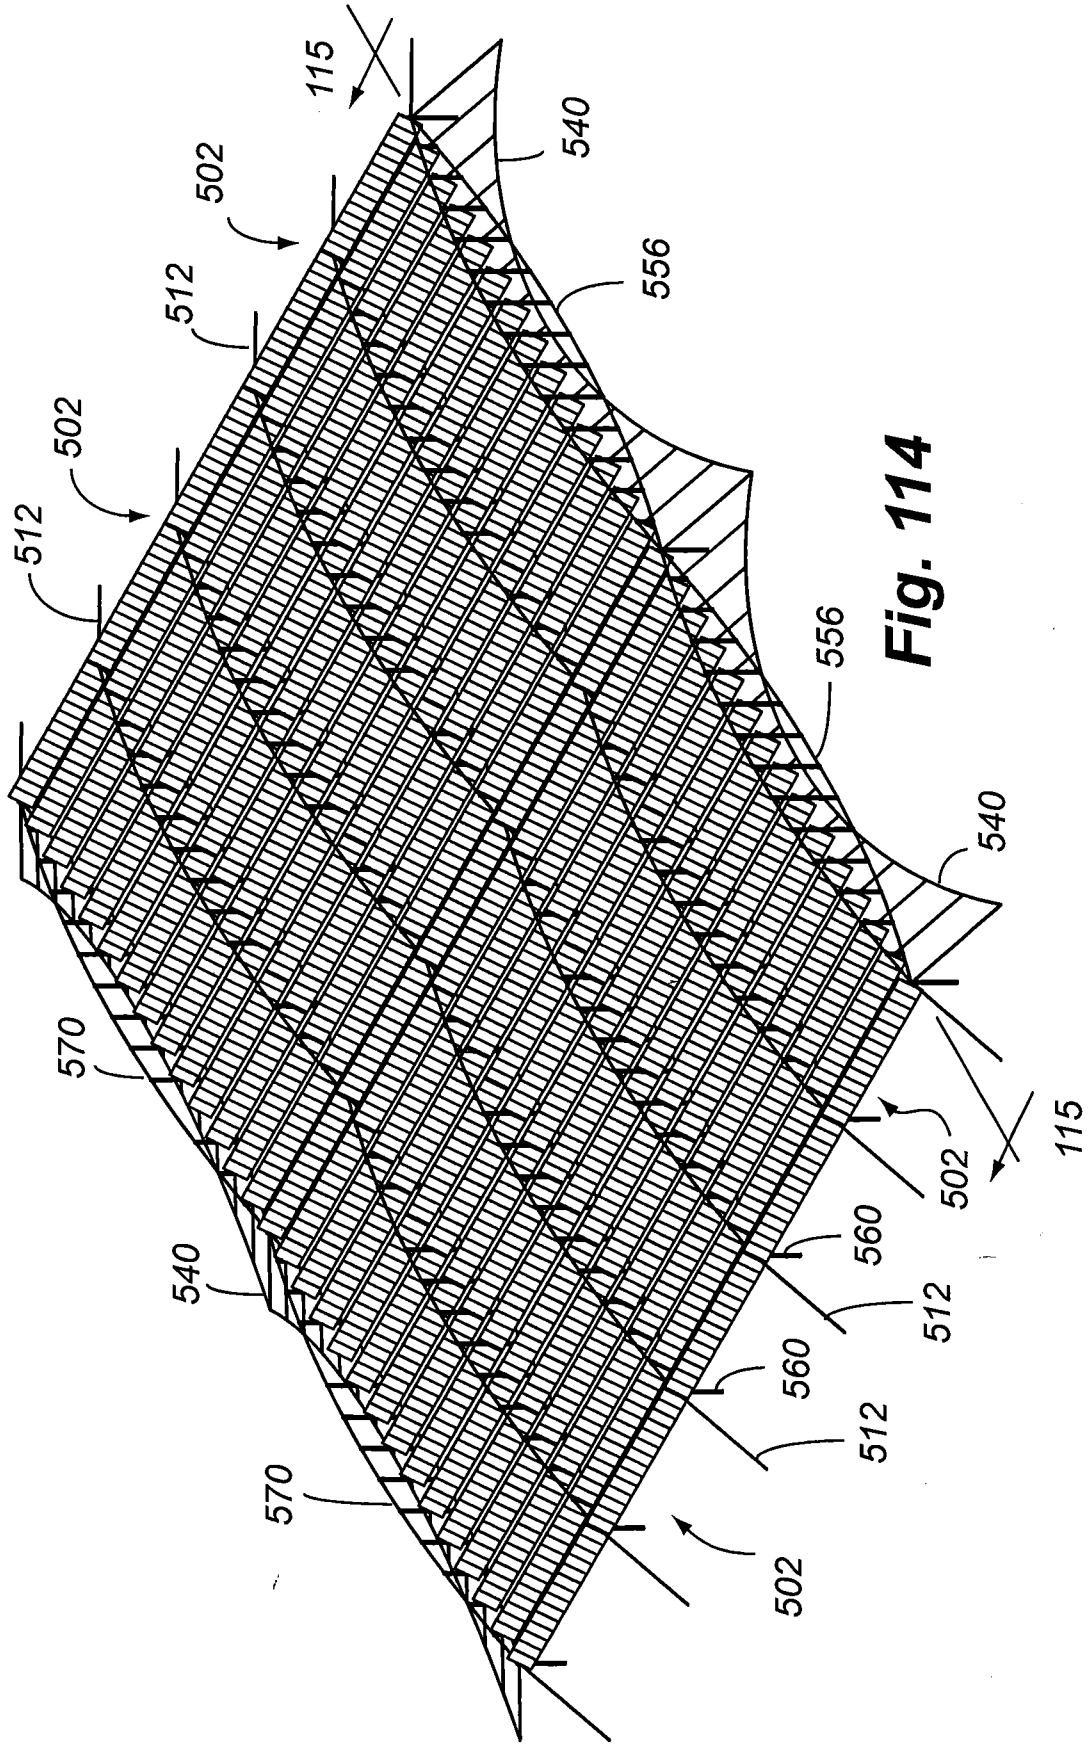


Fig. 114

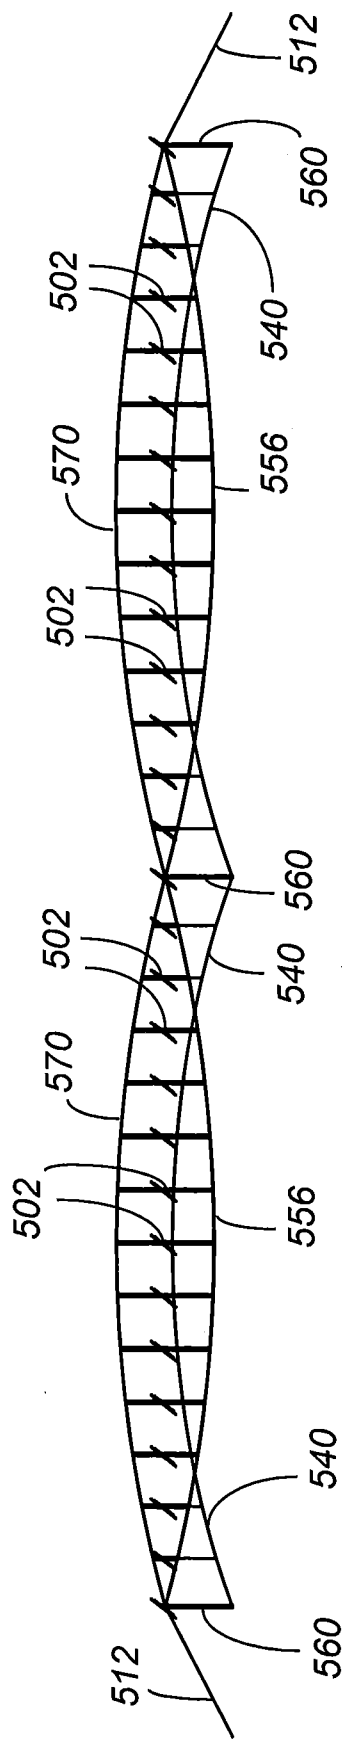


Fig. 115

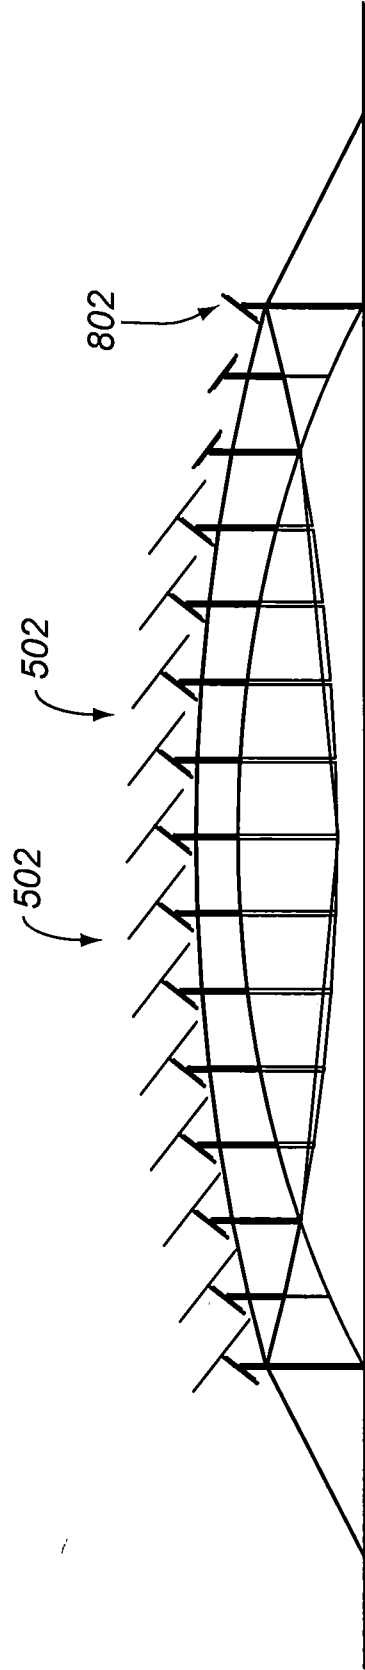


Fig. 116

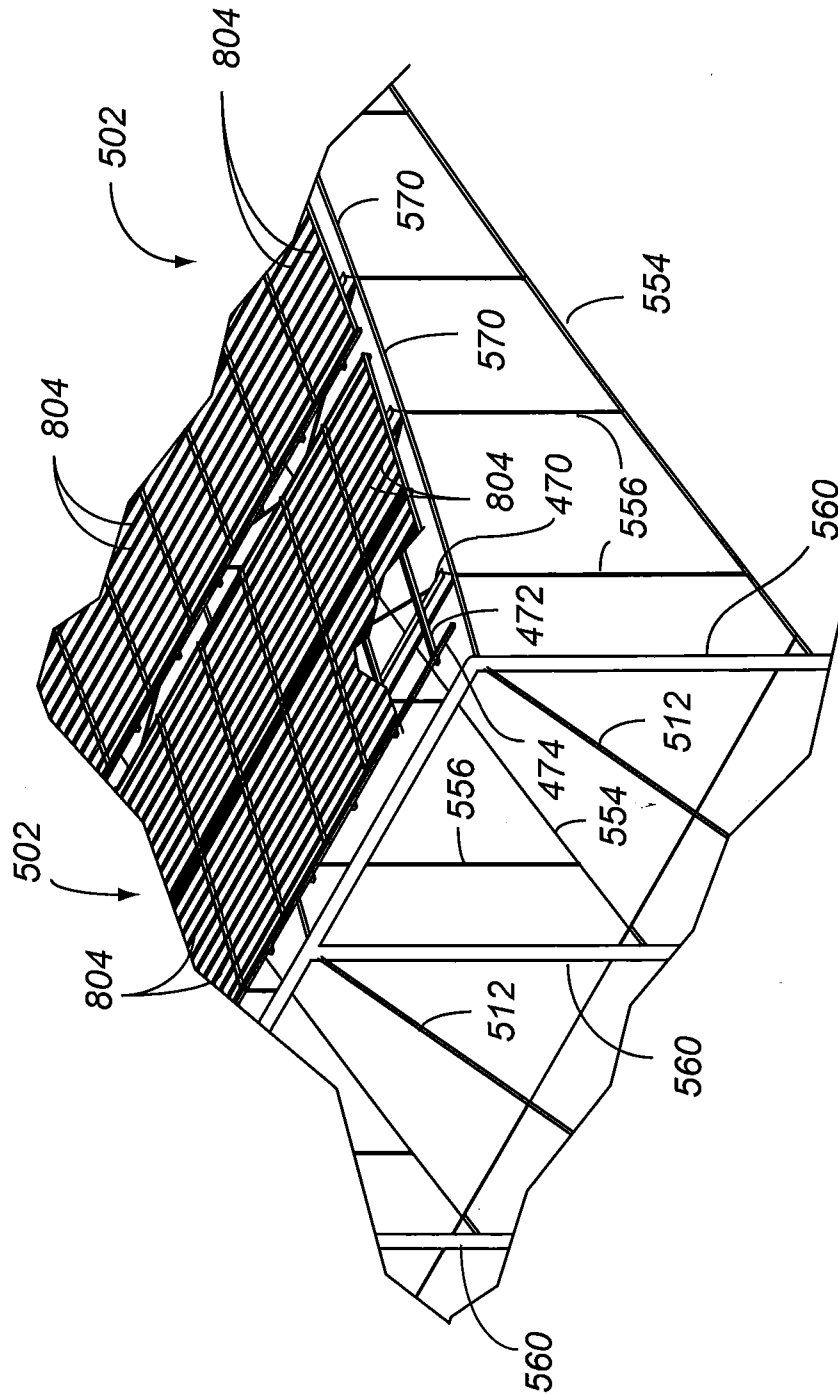


Fig. 117


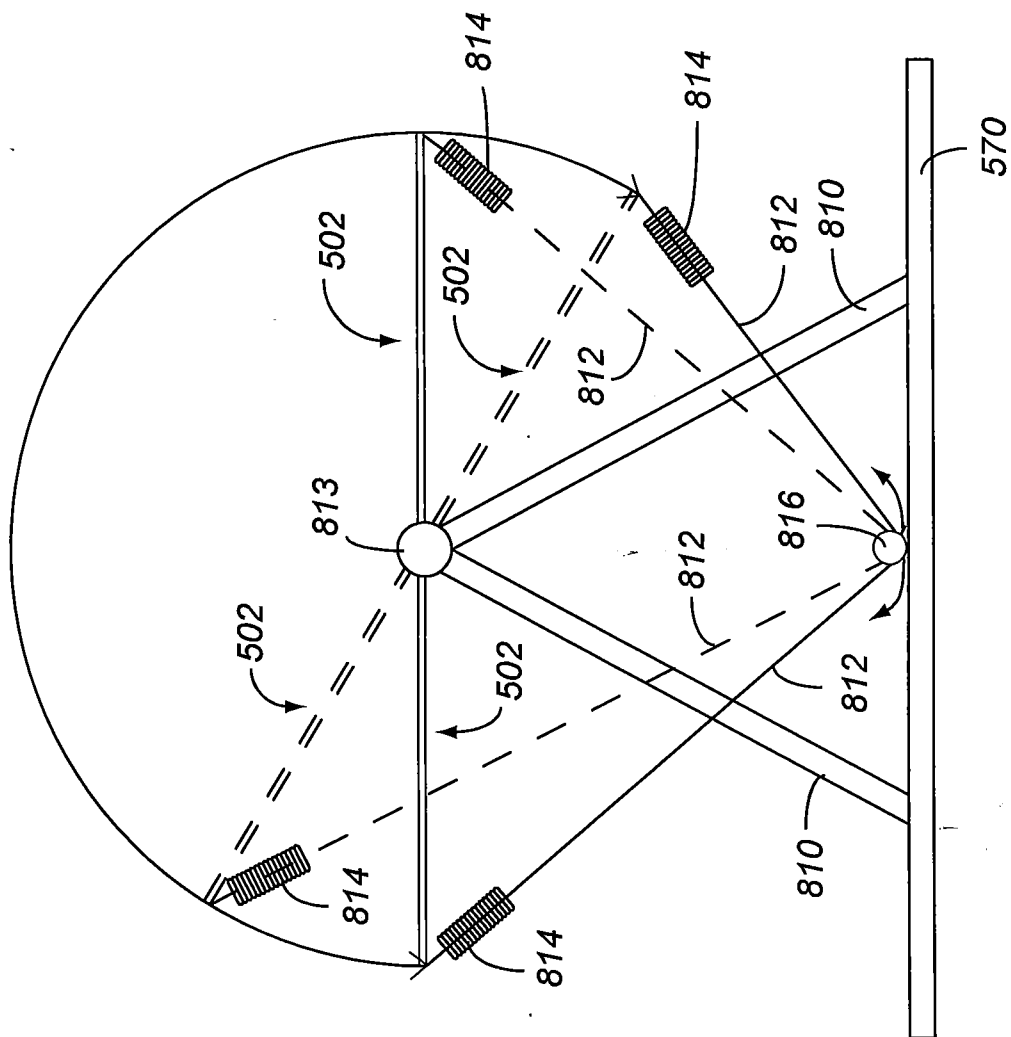


Fig. 118

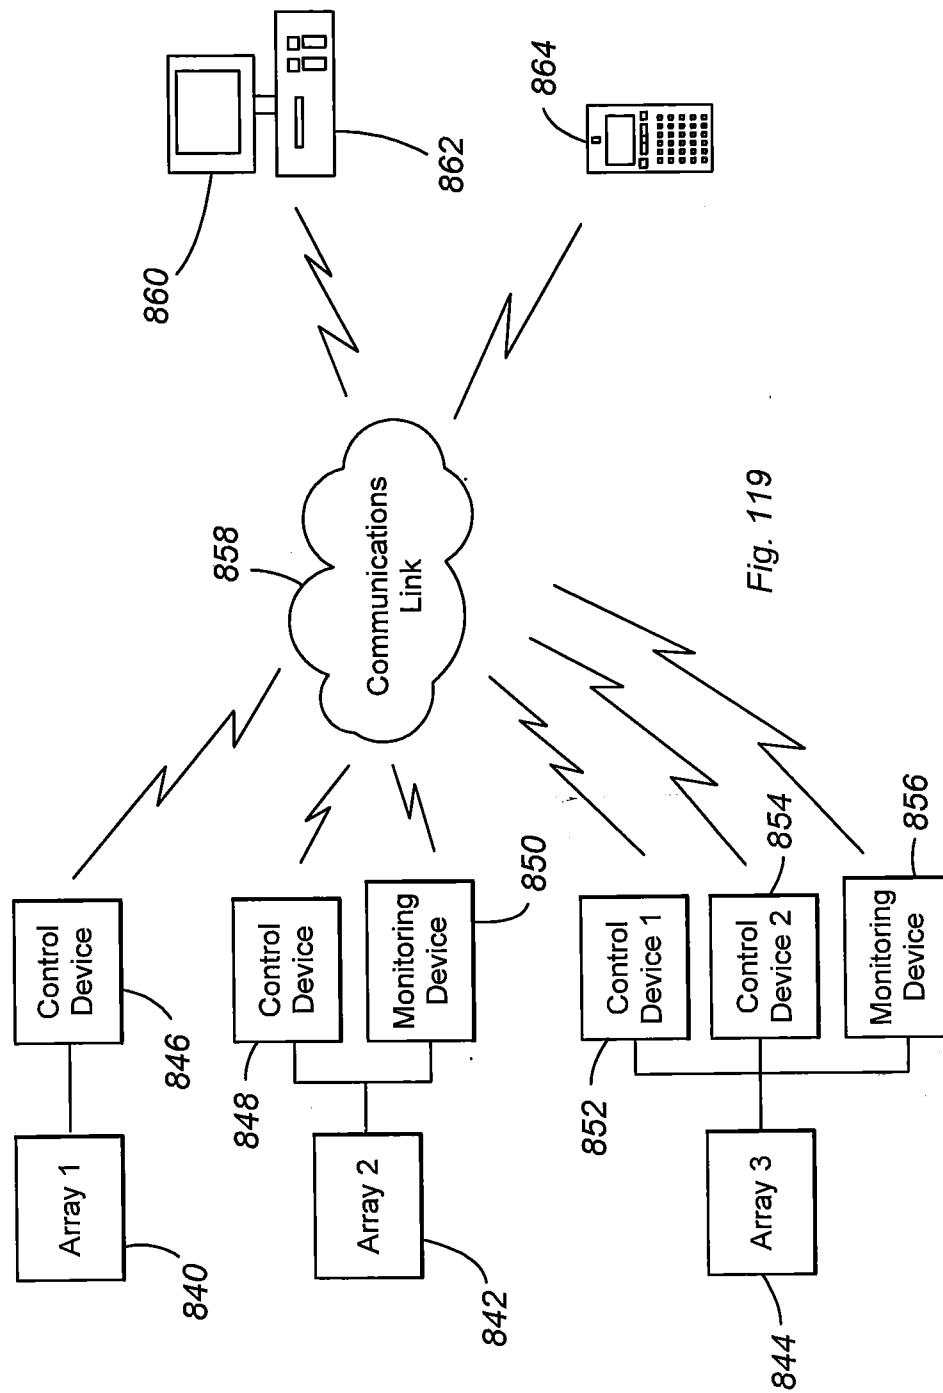

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/44060

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01L 31/042 (2009.01)

USPC - 136/244

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 136/244

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC: 126/569, 571, 700, 702, 704, 705, 906; 136/243, 244, 245, 246, 248Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
USPTO, PUBWEST (PGPB, USPT, USOC, EPAB, JPAB), Google
Search Terms Used: array, solar, photo\$, cable, tension, tighten, truss, support, mount, roof, skylight, window, membrane, coating, windmill, turbine

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2005/0035244 A1 (Conger) 17 February 2005 (17.02.2005), para [0022]-[0042], Fig 1-7, 10	1, 6, 7, 11-27 ----- 2-5, 8-10
Y	US 4,574,535 A (Pabsch) 11 March 1986 (11.03.1986), col 3, ln 25-40, col 5, ln 10-21	2, 3
Y	US 2006/0124168 A1 (Momii et al.) 15 June 2006 (15.06.2006), para [0003], [0057]-[0063]	4, 5, 8-10
A	US 6,563,040 B2 (Hayden et al.) 13 May 2003 (13.05.2003), entire document	1-27

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 June 2009 (12.06.2009)

Date of mailing of the international search report

24 JUN 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774