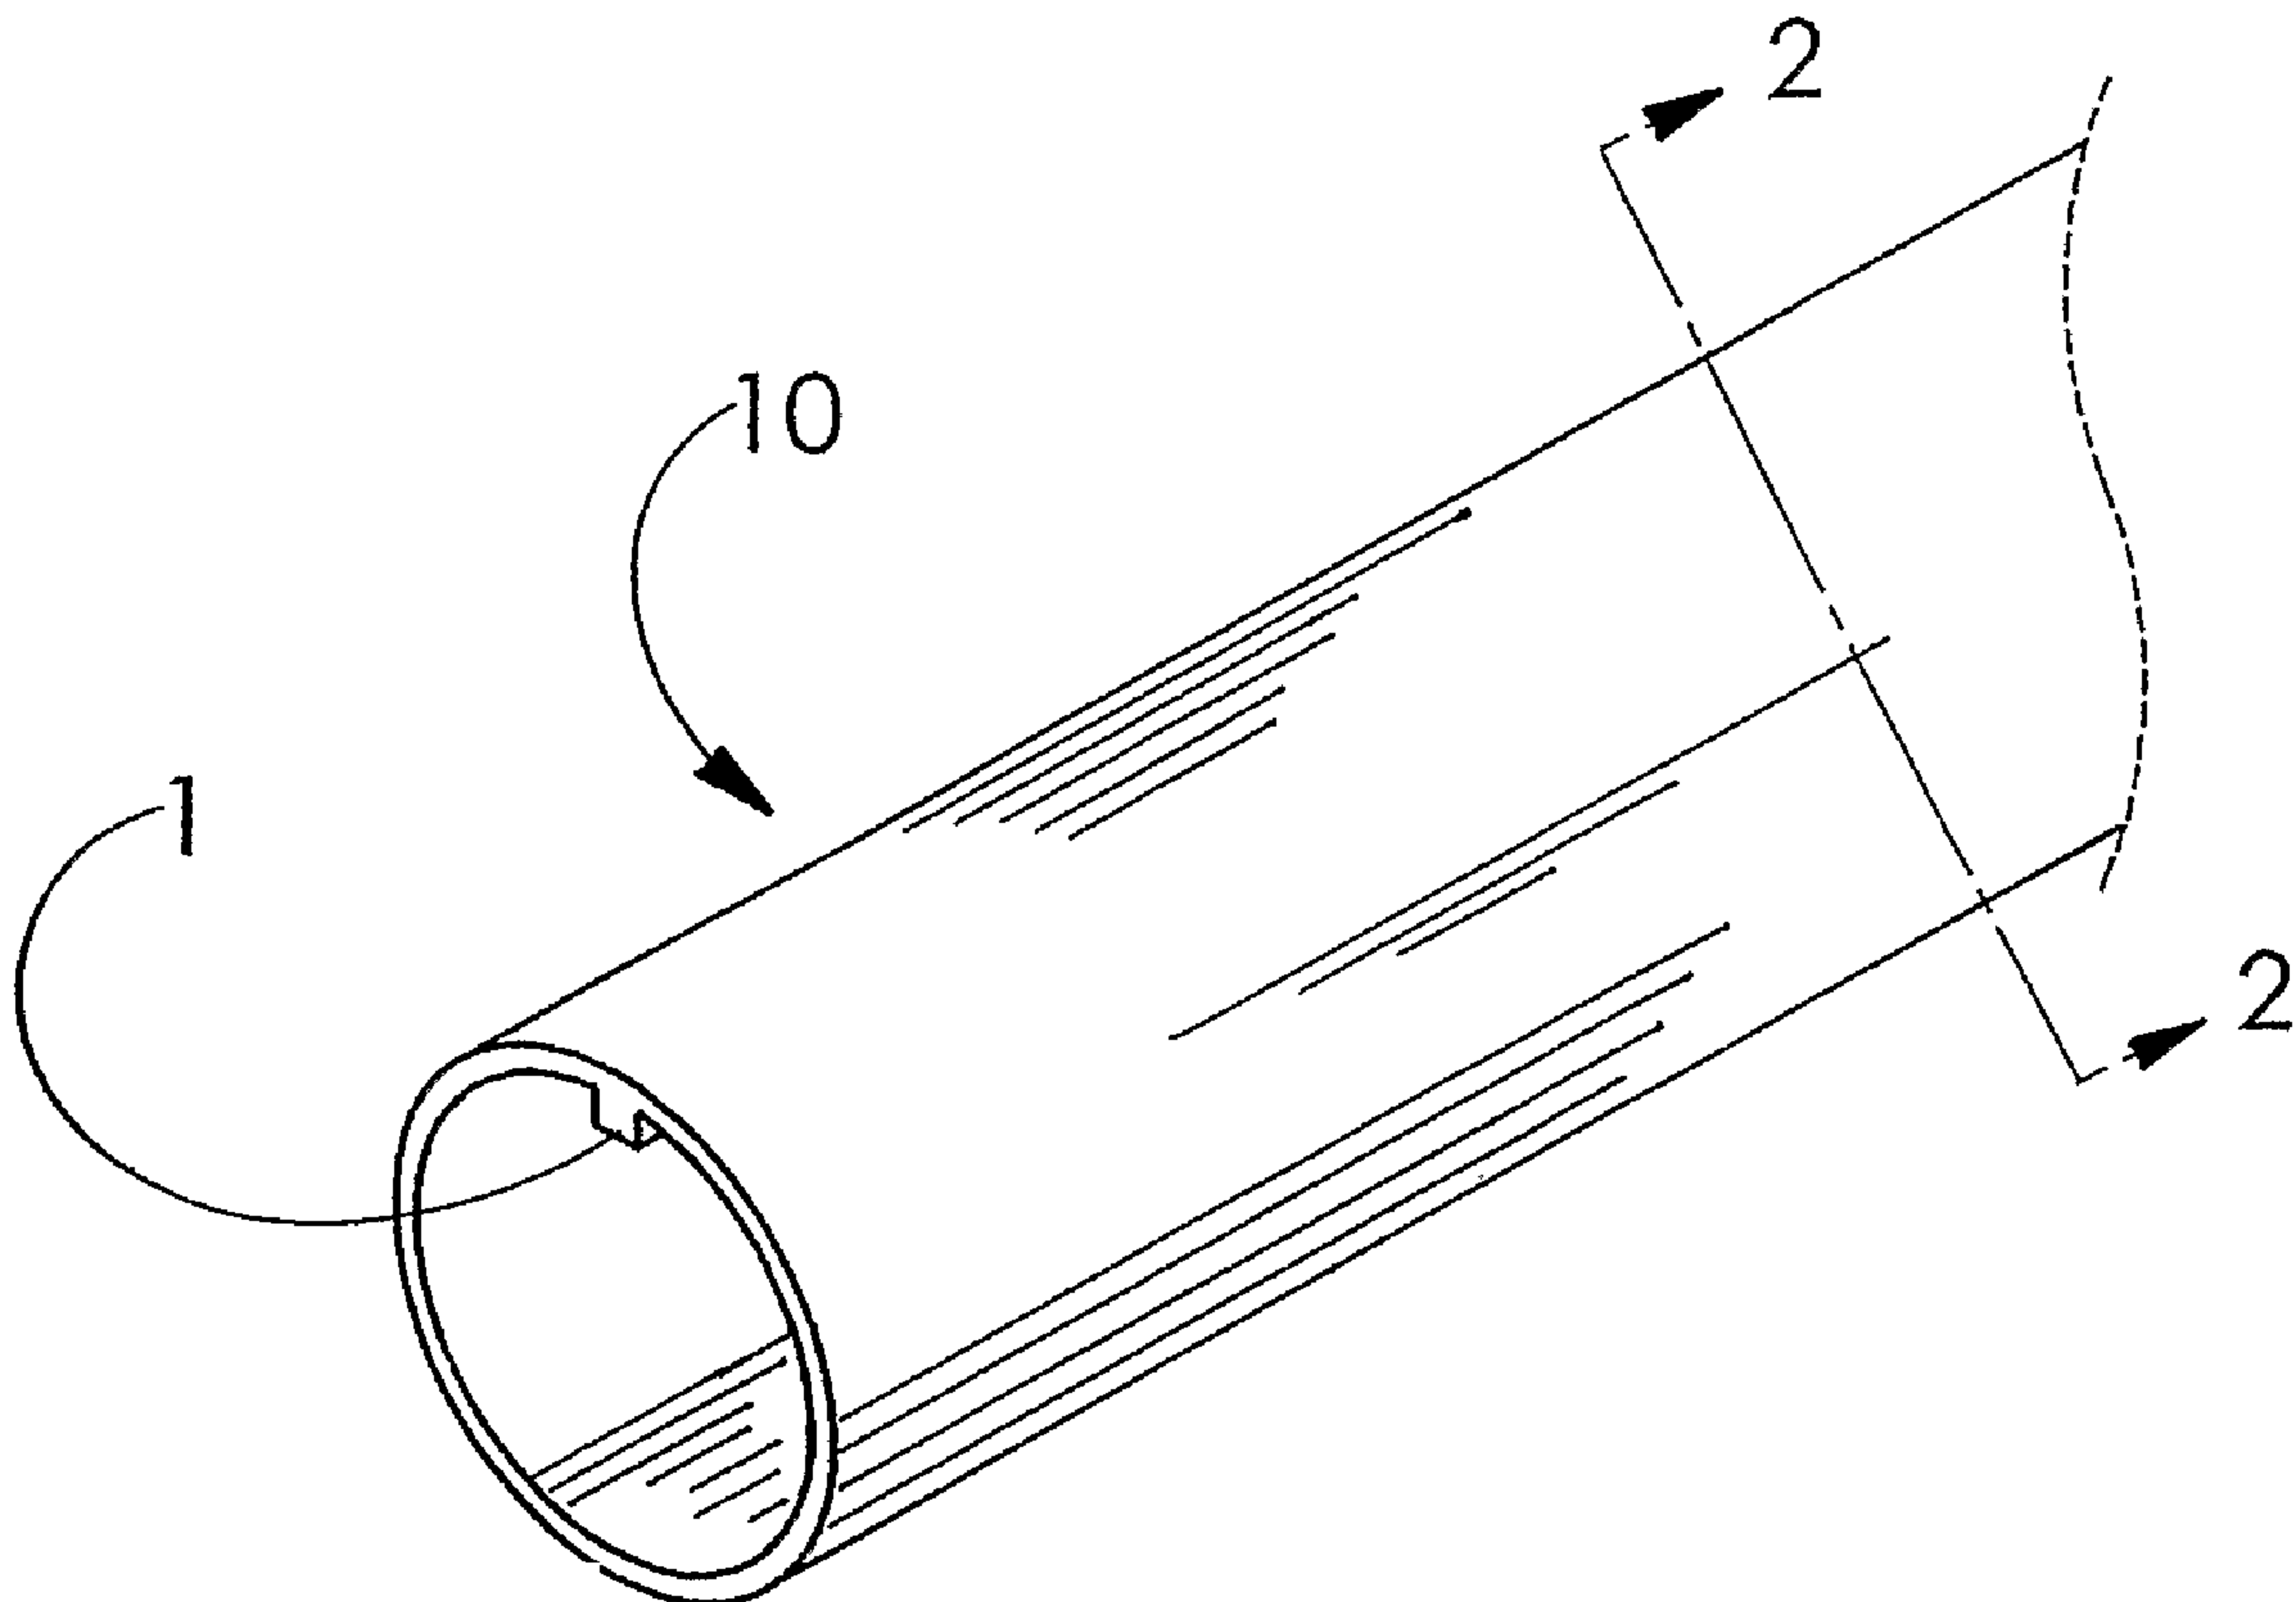




(86) Date de dépôt PCT/PCT Filing Date: 2006/02/21  
(87) Date publication PCT/PCT Publication Date: 2006/09/14  
(45) Date de délivrance/Issue Date: 2011/10/18  
(85) Entrée phase nationale/National Entry: 2007/08/28  
(86) N° demande PCT/PCT Application No.: US 2006/005966  
(87) N° publication PCT/PCT Publication No.: 2006/096314  
(30) Priorité/Priority: 2005/03/04 (US11/073,053)

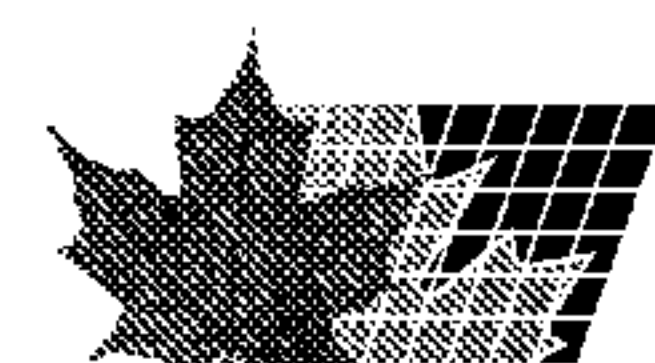
(51) Cl.Int./Int.Cl. *A61L 29/04* (2006.01)  
(72) Inventeur/Inventor:  
TRAPP, BENJAMIN M., US  
(73) Propriétaire/Owner:  
GORE ENTERPRISE HOLDINGS, INC., US  
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : UTILISATION DE GAINES THERMORETRECISSABLES EN POLYMERE POUR FORMER DES TUBES SUR  
LESQUELS ON RETROUVE UN MOTIF 3D GAUFRE  
(54) Title: USE OF POLYMER SHRINK TUBES TO FORM TUBES HAVING A 3D PATTERN EMBOSSED THEREON



(57) **Abrégé/Abstract:**

Novel polymer shrink tubes, such as fluoropolymer shrink tubes and novel uses thereof. The polymer shrink tubes include at least one three-dimensional pattern formed along at least a portion of the inner surface of the tube. The polymer shrink tubes can be used for, for example, embossing a pattern into a polymer tube. Further use includes, for example, forming a catheter with at least one channel located in the catheter wall.





## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 September 2006 (14.09.2006)

PCT

(10) International Publication Number  
**WO 2006/096314 A3**

(51) International Patent Classification:  
*A61L 29/04* (2006.01)

(21) International Application Number:  
PCT/US2006/005966

(22) International Filing Date:  
21 February 2006 (21.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/073,053 4 March 2005 (04.03.2005) US

(71) Applicant (for all designated States except US): **GORE ENTERPRISE HOLDINGS, INC.** [US/US]; 551 PAPER MILL ROAD, P.O.Box 9206, Newark, DE 19714-9206 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TRAPP, Benjamin, M.** [US/US]; 6860 North Bader Road, Flagstaff, AZ 86001 (US).

(74) Agents: **BOLAND, Kevin, J.** et al.; W.L. GORE & ASSOCIATES, INC., 551 Paper Mill Road, P.O.Box 9206, Newark, DE 19714-9206 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

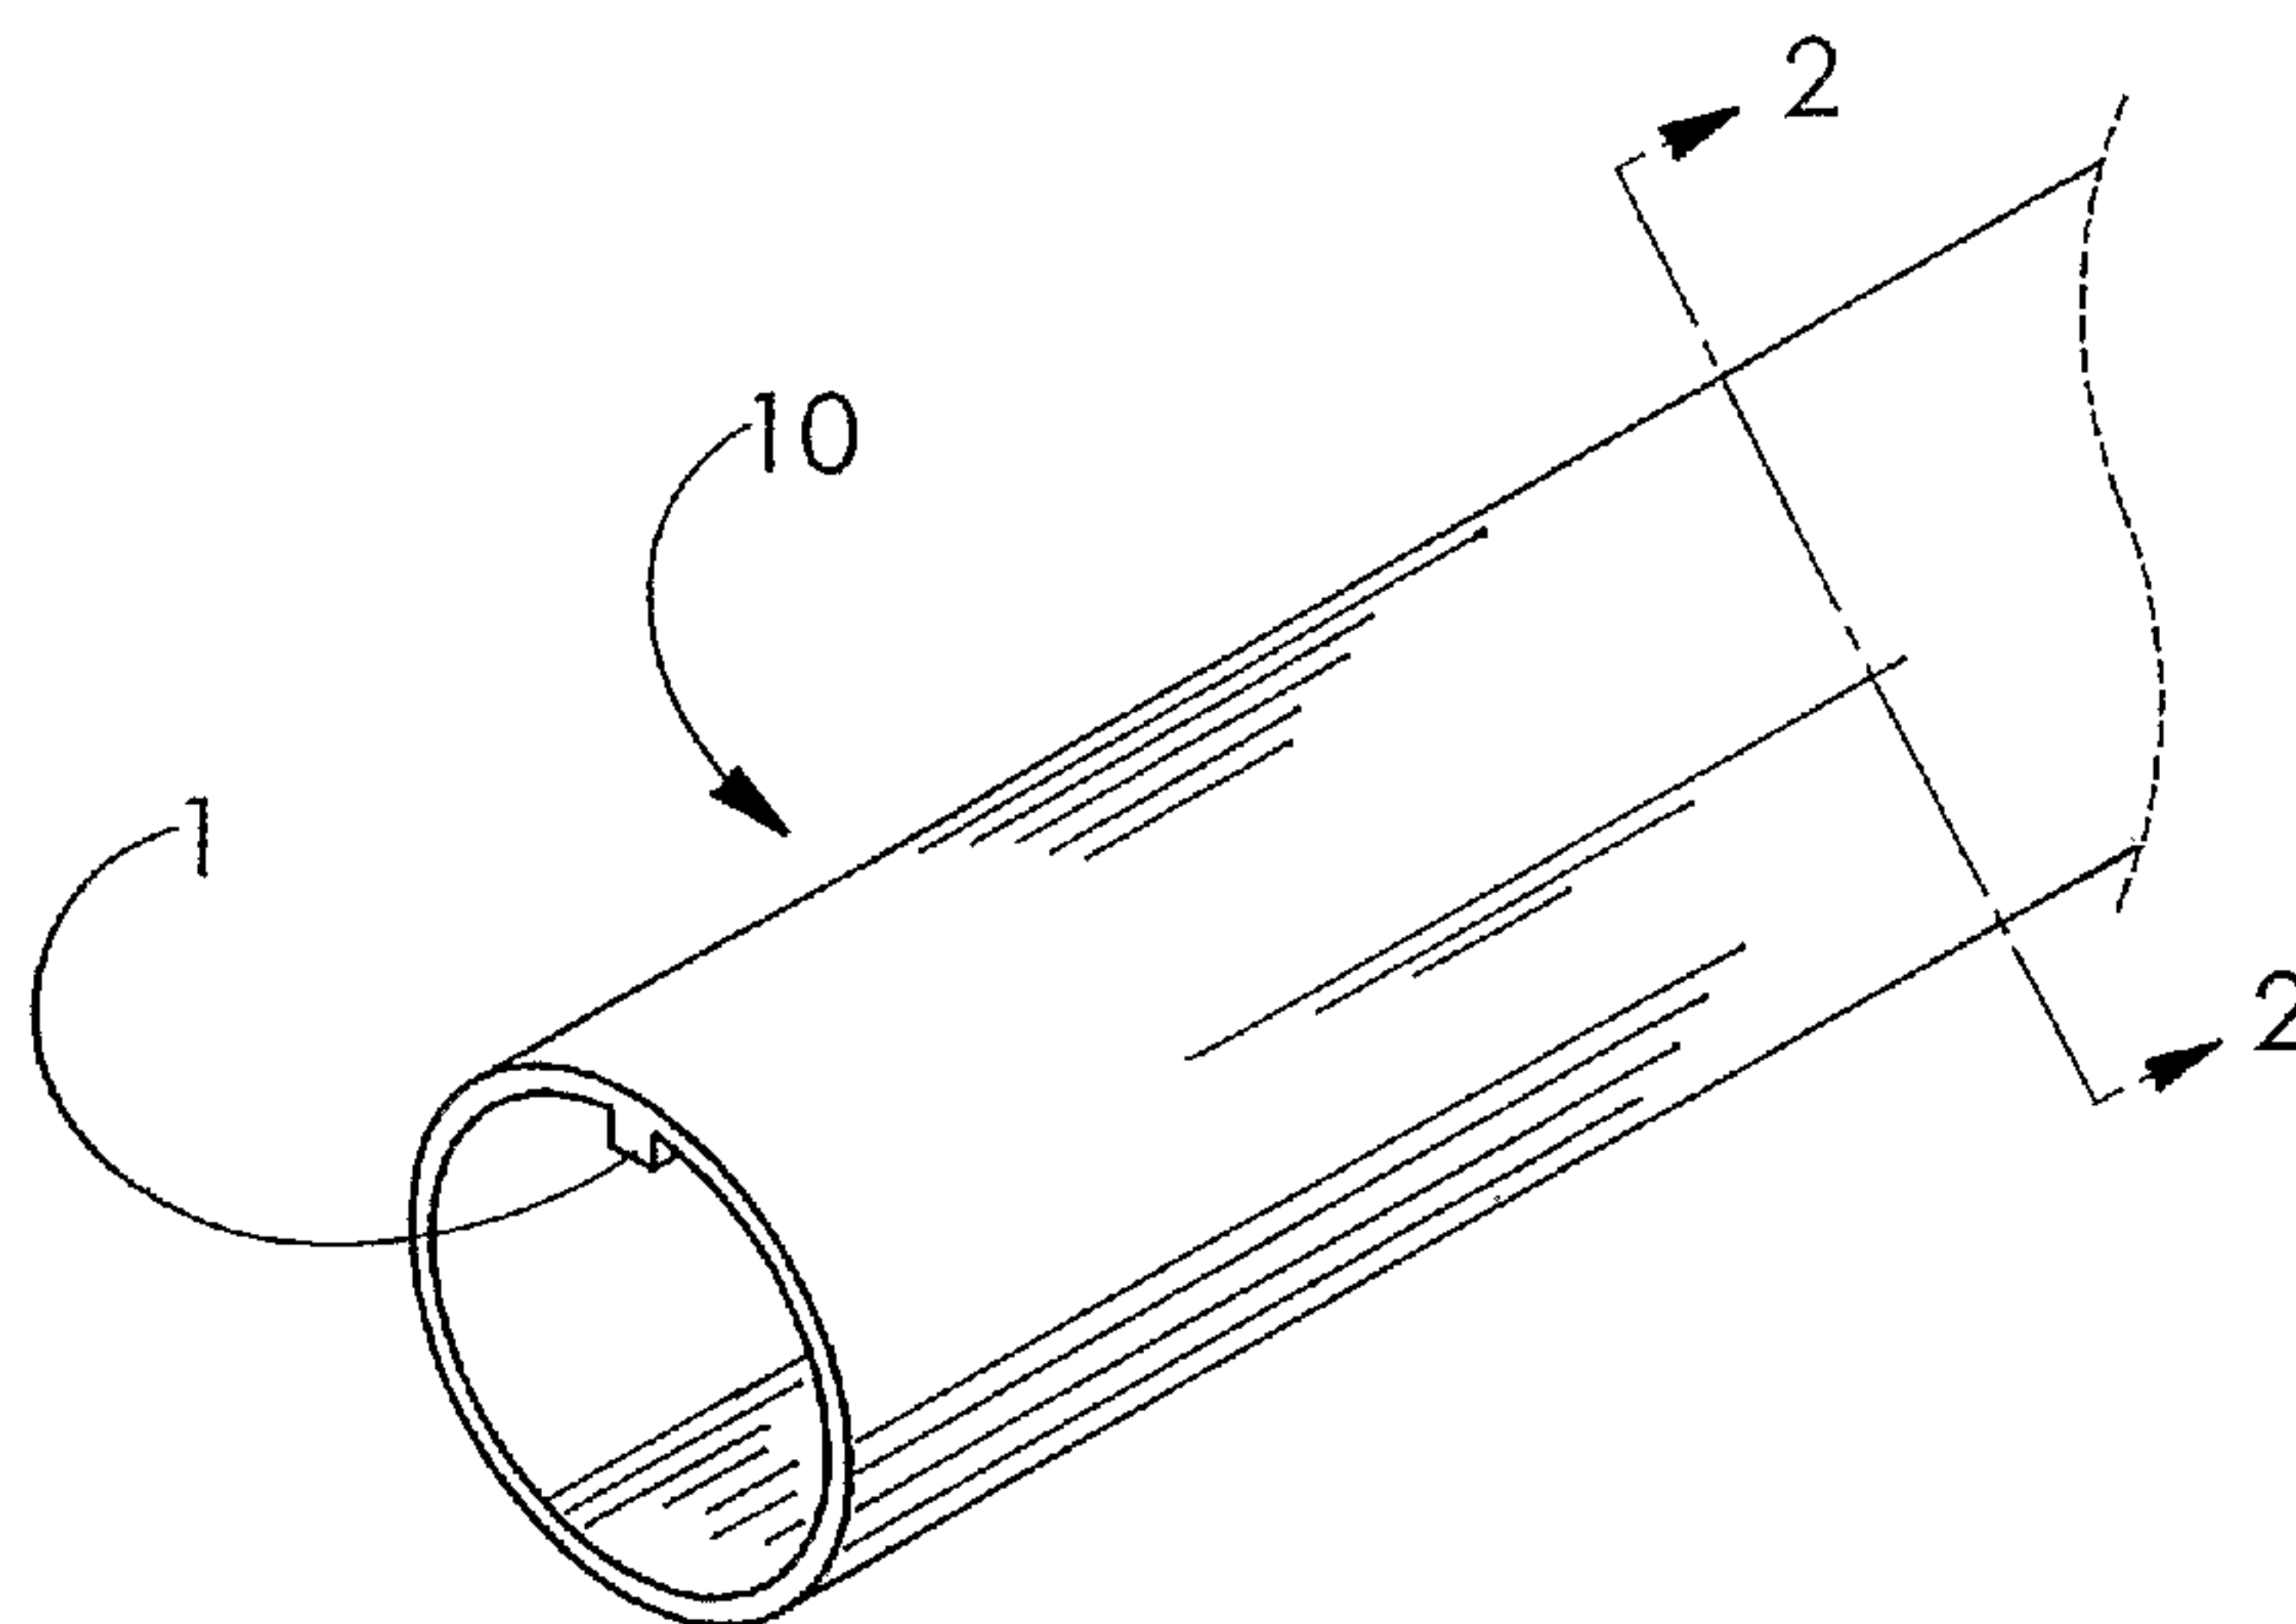
**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:  
11 January 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POLYMER SHRINK TUBES AND NOVEL USES THEREFOR



(57) Abstract: Novel polymer shrink tubes, such as fluoropolymer shrink tubes and novel uses thereof. The polymer shrink tubes include at least one three-dimensional pattern formed along at least a portion of the inner surface of the tube. The polymer shrink tubes can be used for, for example, embossing a pattern into a polymer tube. Further use includes, for example, forming a catheter with at least one channel located in the catheter wall.

WO 2006/096314 A3



TITLE OF THE INVENTION  
USE OF POLYMER SHRINK TUBES TO FORM TUBES HAVING  
A 3D PATTERN EMBOSSED THEREON  
FIELD OF THE INVENTION

This invention relates to polymer shrink tubing. Such shrink tubing can be used for, among other things, the manufacture of catheters.

DESCRIPTION OF RELATED ART

The use of delivery catheters to provide various treatments to a patient is well known. Such delivery catheters have a variety of well-known uses such as, for example, PTA and PTCA treatment, stent delivery, etc. Many delivery catheters are guided to the treatment location through a previously placed guide catheter. Moreover, it is also known to advance diagnostic catheters, angiographic catheters, and steerable catheters to a treatment location through a previously placed guide catheter.

The guide catheter will typically have a centrally located lumen, with the delivery catheter passed through the centrally located lumen to the treatment site. In view of this, it is common for the inner surface of the guide catheter that defines the centrally located lumen to be comprised of a low friction material, such as polytetrafluoroethylene (PTFE). Moreover, to provide structural support guide catheters usually are metal reinforced using, for example, a metal braid or coil wrapped about the low friction material. It is not uncommon for the metal reinforcement to be embedded by an outer polymer material that defines the outer wall portion of the guide catheter.

Recently, it has been suggested to use guide type catheters for certain stroke therapies, wherein the guide catheter is delivered, for example, to a patient's carotid artery. Various treatment devices, such as delivery catheters, balloon-on-a-wire devices, thrombectomy removal devices, etc., can be guided to the treatment site through one or more lumens provided in the guide catheter. Moreover, such guide catheters can include an inflatable member at the distal end thereof to occlude blood flow in the selected carotid artery.

Examples of such stroke therapy catheter constructions are illustrated in, for example, commonly owned U. S. Patent Nos. 6,206,868; 6,423,032; 6,540,712; and 6,295,989.

Such catheter constructions can present manufacturing challenges. For example, catheter constructions as shown, for example, in commonly owned



U. S. Patent Application Publication Nos. 2003/0040704A1; 2003/0040694A1; and 2003/0040705A1, can include, for example, at least an inflation lumen in the catheter wall, which inflation lumen will be in communication with the inflatable member at the distal end of the catheter. Further, the catheter wall can  
5 be a polymer material that embeds a metal reinforcement. Moreover, a PTFE inner liner material can define a centrally located lumen.

Providing one or more lumens in the catheter wall of such constructions is extremely difficult. One method of providing lumens in the catheter wall is described in commonly owned and copending U. S. Patent Application S. N.  
10 10/895,817, filed July 21, 2004, which discloses a polymer film wrapping process to produce such catheters. The catheter can be formed by placing a thin-walled PTFE liner tube over a mandrel. A wire support structure (e.g., braid, ribbon, coil, etc.) can then be placed over the thin-walled tube. Over the wire support structure is placed a thermoplastic material that is caused to embed the  
15 wire support structure. As taught in this commonly owned patent application, at least one lumen, or channel, in the catheter wall can be formed by a laser cut into a thermoplastic material defining the outer catheter wall. Thereafter, a polymer film is applied to (e.g., wrapped about) the catheter wall to close the channel and form the longitudinally extending lumen in the catheter body.  
20 Another method of forming lumens in the catheter wall includes, for example, placing a small, hollow tube, such as polyimide tube, adjacent the wire support structure and then embedding the wire support structure and small tube into the thermoplastic material.

The present invention provides, among other things, unique methods of  
25 forming such catheter constructions that overcome the problems discussed above.

## SUMMARY OF THE INVENTION

30 The invention relates to polymer shrink tubing and novel uses therefore. One aspect of the invention is a tube comprising a fluoropolymer shrink tube having an inner surface and at least one three-dimensional pattern formed along at least a portion of the inner surface of the tube. In an aspect of the invention, the three-dimensional pattern comprises at least one rib formed along the inner  
35 surface. The at least one rib can be longitudinally extending, spirally extending, etc.

In a further aspect of the invention, the invention includes a tube comprising a polymer shrink tube having an inner surface and at least one rib



formed along the inner surface, the rib extending from the inner surface and having a height of about 0.5 mm or less, more preferably less than about 0.2 mm.

A further aspect of the invention includes a catheter comprising an inner  
5 liner comprising fluoropolymer (e.g., PTFE) tubing. Preferably the  
fluoropolymer tube is an extruded PTFE tube. The tube having a proximal end,  
a distal end, an inner surface and an outer surface; an outer polymer tube having  
a proximal end, a distal end, an inner surface and an outer surface, wherein the  
inner surface of the outer polymer tube is positioned over the outer surface of  
10 the fluoropolymer tube; wherein at least one channel is formed in the outer  
polymer tube, the at least one channel preferably measuring about 7 by about 15  
mils (0.007" x 0.015") and extending for at least a portion and preferably a  
majority of the length of the catheter; and polymer film covering at least a  
portion and preferably a majority of the length of the at least one channel, thus  
15 forming a lumen in the outer polymer tube.

In a still further aspect of the invention, the invention includes a method  
of creating an external, embossed pattern on the exterior of a cylindrical device  
comprising: providing a polymer tube having at least one exterior surface;  
providing a polymer shrink tube having an inner and an outer surface, the inner  
20 surface having at least one three-dimensional pattern thereon; placing the  
polymer shrink tube around the polymer tube; applying sufficient energy to the  
shrink tube so as to shrink the shrink tube around the exterior of the polymer  
tube while causing at least a portion of the at least one three-dimensional pattern  
to become embossed into the exterior surface of the polymer tube. The applied  
25 energy softens the polymer tube material and shrinks the shrink tube, thus  
leading to embossing the pattern into the polymer tube. This method is  
particularly suitable for forming catheters such as the guide catheters discussed  
above.

### 30 DESCRIPTION OF THE DRAWINGS

The operation of the present invention should become apparent from the  
following description when considered in conjunction with the accompanying  
drawings in which:

35 Figure 1 shows in partial perspective view a polymer shrink tube  
according to the present invention;

Figure 2 is a schematic cross-section taken along lines 2-2 of Figure 1;



Figure 3 is a schematic cross-section of the use of a polymer shrink tube according to the invention;

Figure 4 is a schematic cross-section of a further use of a polymer shrink tube according to the present invention;

5 Figure 5 is a schematic cross-section of a catheter according to the present invention; and

Figure 6 is a longitudinal cross-section of a catheter according to the present invention.

## 10 DETAILED DESCRIPTION OF THE INVENTION

A first aspect of the invention is a tube comprising a fluoropolymer shrink tube having an inner surface and at least one three-dimensional pattern formed along at least a portion of the inner surface of the tube. In a further  
15 aspect of the invention, the three-dimensional pattern can comprise at least one rib (such as at least one longitudinally extending rib) formed along the inner surface of the tube. Suitable fluoropolymer materials include, for example, fluorinated ethylene propylene (FEP), fluoroelastomers such as Viton<sup>®</sup> fluoroelastomers (DuPont Dow Elastomers), ethylene tetrafluoroethylene  
20 (ETFE), perfluoroalkoxy (PFA), and polytetrafluoroethylene (PTFE). The fluoropolymer shrink tube is shown in partial perspective view in Figure 1. Figure 2 is a cross-section schematic drawing taken along lines 2-2 of Figure 1. As shown in the figures, the three-dimensional pattern formed along at least a portion of the inner surface of the tube 10 is indicated by 1, and in this case, is  
25 a longitudinally extending rib which can extend for essentially the entire length of the tube. Other three-dimensional patterns are envisioned by the present invention, such as, for example, spirally extending ribs, as well as a plurality of three-dimensional patterns, such as two or more ribs.

By “shrink tube having at least one three-dimensional pattern formed  
30 along at least a portion of the inner surface of the tube” it is meant to include longitudinally extending, hollow tubes having at least one protuberance, recess, or otherwise three-dimensional pattern, on the inner surface of the tube. The tube will exhibit some shrinkage of its inner diameter upon exposure to suitable energies, such as heat. Longitudinal shrinkage is not a requirement according to  
35 the invention, although it may be desirable. Therefore, “shrink tube” will include a polymer tube that will exhibit some shrinkage of its inner diameter upon exposure to suitable energy and may also exhibit some longitudinal shrinkage upon exposure to suitable energy. It is desirable for the shrink tube to



shrink in a predictable manner such that the three-dimensional pattern is predictably retained upon exposure to the suitable energy.

Polymer shrink tubes can be made by, for example, well-known extrusion processes. Typically such tubes will be formed having a first inner diameter. The tube is then expanded to a second inner diameter (referred to as the "expanded inner diameter"). Upon application of suitable energy the inner diameter will shrink back to about the first inner diameter (referred to as the "retracted inner diameter").

As stated above, the shrink tubes can comprise, for example, the fluoropolymer materials listed above. The fluoropolymer shrink tubes will shrink when heated to an appropriate temperature or exposed to other suitable energy forms. For example, the following shrink tubes will shrink at about the listed temperature or temperature range. Viton® fluoropolymer, about 120°C; ETFE, about 175°C; PFA, about 204°C; FEP, from about 210 to about 260°C; PTFE, from about 325 to about 340°C. A particularly attractive fluoropolymer tube comprises FEP.

In a further aspect of the invention, the invention includes a catheter comprising an inner liner comprising fluoropolymer (e.g., PTFE) tubing having a proximal end, a distal end, an inner surface defining a generally centrally located catheter lumen and an outer surface; an outer polymer tube having a proximal end, a distal end, an inner surface, and an outer surface; wherein the inner surface of the outer polymer tube is positioned over the outer surface of the fluoropolymer tube; wherein further at least one longitudinally extending channel is formed in the outer polymer tube, the at least one channel (preferably measuring about 0.007 inches by about 0.015 inches) extending for at least a portion and preferably a majority of the length of the catheter; and polymer film covering at least a portion and preferably a majority of the length of the at least one channel; thus defining a longitudinally extending lumen in the catheter wall. Preferably, the catheter is a delivery catheter having an about 0.118 inch or less outer diameter, even more preferably an about 0.105 inch or less outer diameter. In an aspect of the invention the catheter wall has a thickness of about 0.015 inch or less, and preferably about 0.01 inch or less, for at least a portion of its length, and preferably over substantially its entire length. The at least one channel can be formed using polymer shrink tube. In an aspect of the invention the polymer shrink tube has an expanded inner diameter of about 0.150 inch over substantially the entire length of the tube. In a further aspect of the invention the polymer shrink tube has a retracted inner diameter of about 0.100 inch over substantially the entire length of the tube. In a still further aspect of the



invention, the at least one channel can be formed using fluoropolymer shrink tube, as discussed above. The fluoropolymer tube can comprise any suitable fluoropolymer as discussed above and may have an expanded inner diameter of about 0.150 inch over substantially the entire length of the tube and may also  
5 have a retracted inner diameter of about 0.100 inch over substantially the entire length of the tube. Other polymer shrink tube may be used, such as olefins, including chlorinated olefins, polyethylene terephthalate (PET), and polyvinyl chloride (PVC).

The outer polymer tube can comprise any suitable polymer. Preferred  
10 polymers include thermoplastics such as Pebax ® polyether block amides, nylon, urethanes, polyethylene, polypropylene, FEP, etc. Particularly preferred for the outer polymer tube is a material comprising Pebax ® polyether block amides, such as Pebax ® 6333.

It should be understood that although the inner surface of the outer  
15 polymer tube is positioned over the outer surface of the fluoropolymer tube, there is no requirement that the tube surfaces directly contact each other. It may be desirable to provide an adhesive between these materials. Moreover, a reinforcing material such as a metal (e.g., stainless steel or nitinol) or polymer support structure such as braiding, coil, stylets, tubing, ribbon, or what-have-you  
20 can be positioned between the tube surfaces to obtain desired properties. It may be desirable for the outer polymer tube to at least partially embed any reinforcing material (e.g. metal braid). Moreover, it may be desirable for the outer polymer to flow through the reinforcement and bond to the fluoropolymer tube. In such a case, the fluoropolymer tube outer surface can be chemically  
25 etched to aid in the adhesion between the outer polymer tube and fluoropolymer tube.

The polymer film which can cover the at least one channel, can comprise any suitable polymer film material.

For example, the film material can be made from a thin tape of porous  
30 expanded polytetrafluoroethylene (ePTFE) that can be helically wrapped about the exterior of the catheter shaft. Preferred ePTFE films are generally made as taught by U. S. Patent Nos. 3, 953, 566 and 4,187, 390 to Gore. Even more preferred ePTFE films can be made as taught by U. S. Patent No. 5,476,589 to Bacino. Further examples of polymer films include polyethylene (including  
35 ultra-high molecular weight polyethylene), polypropylene, polyamide, polyethylene terephthalate, fluorinated ethylene propylene (FEP), perfluoroalkoxy resin, polyurethane, polyester, polyimide, etc.



Most preferably, the wrapping is accomplished in two opposing directions parallel to the length of the outer polymer tube, resulting in a bias-ply construction. Although helically wrapping a tape of polymer film is a preferred embodiment, it is also possible to provide the polymer film as a thin tubular structure that can coaxially enclose the entire outer polymer tube. Moreover, it is also possible to provide a strip of thin polymer tape material that covers the channel and is adhered to the surface of the outer polymer tube immediately adjacent both sides of the channel. Suitable wrapping techniques are fully described in, for example, commonly owned and co-pending U. S. Patent Application S.N. 10/402,083, filed March 28, 2003. As described in the commonly owned application, the porous polymer tape can optionally be provided with a thin, non-porous coating. Moreover, prior to wrapping the polymer tube, it may be desirable to fill the channel (at least partially or completely) with a material that will provide structural support to the at least one channel so that the dimensions of the channel will not be substantially altered by the film wrapping process. Of course, materials that can be easily removed from the channel after film wrapping is completed are preferred and will be apparent to the skilled artisan.

The polymer tape is most preferably made from a thin porous expanded PTFE film that has been provided with a porous or non-porous coating of, or is at least partially imbibed with, a thermoplastic such as a thermoplastic fluoropolymer, and preferably EFEP (ethylene tetra fluoro ethylene based copolymer, available from Daikin America). An example of a suitable wrapping technique includes using EFEP in combination with ePTFE tape. The tape can have, for example, a width of about 6 mm and a thickness of about 0.005 mm. The ePTFE film can be provided with a non-porous coating of EFEP on one or both sides. Moreover, the porosity of the ePTFE film can be at least partially or substantially completely imbibed with EFEP. After the coated and/or imbibed film is cut into narrow tape, the tape can be helically wrapped about the outer polymer tube comprising Pebax ® polyether block amide. The wrapped catheter can then be heated for about 5 minutes in a convection oven set at about 160° C to melt-bond the helically wrapped layers of the film together. Thereafter, the catheter can be removed from the oven and cooled to room temperature.

In an alternative embodiment, rather than using EFEP, a UV-curable or other light or radiation curable polymer could be used, thus allowing for curing of the polymer without application of such high temperature.

In a preferred embodiment, the polymer comprises UV-curable polymer. UV-curable is defined as a material that will react under UV light to either cure or



form a durable bond. The UV light can be provided by a lamp having a suitable voltage, a suitable strength, and a suitable wavelength. Curing with UV light may be carried out for any suitable length of time, and the distance between the sample being cured and the UV lamp can be any suitable distance. All of the above  
5 parameters will be readily determinable by one skilled in the art. In an aspect of the invention the UV curable material can also be sensitive to visible light. However, preferred conditions are present only under the UV spectrum (100-400nm). The preferred range is in the UVA spectrum (320-390nm). Suitable UV-curable polymers include, for example, acrylated epoxies, acrylates, urethane  
10 acrylates, urethane methacrylates, silanes, silicones, epoxides, epoxy methacrylates, triethylene glycol diacetate, and vinyl ethers. Specific examples of these polymers include acrylated aliphatic oligomers, acrylated aromatic oligomers, acrylated epoxy monomers, acrylated epoxy oligomers, aliphatic epoxy acrylates, aliphatic urethane acrylates, aliphatic urethane methacrylates, alkyl  
15 methacrylate, amine-modified oligoether acrylates, amine-modified polyether acrylates, aromatic acid acrylate, aromatic epoxy acrylates, aromatic urethane methacrylates, butylene glycol acrylate, stearyl acrylate, cycloaliphatic epoxides, cyclohexyl methacrylate, ethylene glycol dimethacrylate, epoxy methacrylates, epoxy soy bean acrylates, glycidyl methacrylate, hexanediol dimethacrylate,  
20 isodecyl acrylate, isooctyl acrylate, oligoether acrylates, polybutadiene diacrylate, polyester acrylate monomers, polyester acrylate oligomers, polyethylene glycol dimethacrylate, stearyl methacrylate, triethylene glycol diacetate, and vinyl ethers. Preferred UV-curable polymers include, for example, medical grade UV-curable polymers such as DYMAX ® 204 CTH and DYMAX ® 206 CTH (both  
25 commercially available medical grade UV-curable polymers available from DYMAX Corporation, Torrington, CT).

In addition to EFEP and UV-curable polymers, further suitable polymer materials can include, for example, thermoplastics, thermosets, pressure sensitive adhesives, heat-activated adhesives, and chemically activated  
30 adhesives.

Preferred polymer materials include thermoplastics that melt below the temperature that would cause the outer tube and/or polymer film to melt. This allows the polymer tape wraps (when used) to fuse together without melting the polymer tape, without reflowing the outer polymer tube and, thus, without losing  
35 the pattern embossed into the outer polymer tube. UV-curable adhesives can be particularly attractive in this aspect of the invention. Particularly attractive are medical grade UV-curable polymers, such as the above-mentioned DYMAX ® 204 CTH and DYMAX ® 206 CTH.



The particular polymer used will, of course, depend upon the particular embodiment and desired results. Such polymers can be provided in liquid or solid form. In an aspect of the invention, polymers include, for example, THV (tetrafluoroethylene, hexafluoropropylene, and vinylidene fluoride, available from  
5 Dyneon), EFEP (Daikin America), PE (polyolefin), polyamides, polyacrylamides, polyesters, polyolefins (e.g., polyethylene), polyurethanes, and the like.

Suitable polymer application means include any method known in the art. With regard to porous polymer films, suitable application means include, for example, coating techniques (e.g., dip coating), solvent imbibing, vacuum  
10 assisted coating, pressure assisted coating, nip coating, and other suitable means which result in the polymer filling at least some of the porosity of the porous polymer film.

It may be desirable to utilize a solvent to aid in providing polymer to the porosity of the polymer film. The ratio of solvent material to polymer can vary  
15 and will be readily determinable by the skilled artisan. A 50/50 by weight solvent to polymer solution may be particularly acceptable. Preferable solvent materials will be readily apparent to one skilled in the art and include, for example, alcohols, ketones, etc. Methyl ethyl ketone (MEK) may be one particularly attractive solvent. When a solvent material is utilized, the solvent  
20 material can be easily removed or driven off once the polymer is provided to at least some of the porosity of the porous film as desired.

The invention also relates to a method for forming catheters having at least one lumen located in the catheter wall and extending for at least a portion of the length of the catheter. The at least one lumen can be formed by utilizing  
25 the polymer shrink tubing, and particularly fluoropolymer shrink tubing, according to the present invention. The invention further relates to a method of forming catheters having easily tailorable properties and/or altered cross-sections.

For example, a cylindrical, flowable plastic material (such as Pebax ®  
30 polyether block amides), having a generally central, longitudinally extending lumen, is provided. In an aspect of the invention, a cylindrical mandrel having a diameter equal to about the desired inner diameter of a tubular member such as a catheter can first be provided. The outer surface of the mandrel can be coated with a lubricious material, such as PTFE. The cylindrical, flowable plastic  
35 material optionally could first be located over the mandrel to provide structural support to the flowable plastic material during further processing. Furthermore, a suitable, cylindrical polymer shrink tube having an inner and an outer surface, with the inner surface having at least one three-dimensional pattern thereon, can



be placed over the flowable plastic tube. Thereafter, a suitable energy source, such as hot air can be applied to the shrink tube to shrink the tube around the outer surface of the flowable plastic tube, causing the at least one three-dimensional pattern to be embossed into the flowable plastic tube. The temperature (and duration of application of heat) should be sufficient to shrink the tubing and cause the pattern to be embossed into the flowable plastic tube, but not so high (and/or so long in duration) as to cause the three-dimensional pattern to lose its form.

This embodiment is demonstrated in Figure 3, where three-dimensional pattern 1 is a longitudinally extending rib on the inner surface of shrink tube 10. As can be seen, longitudinally extending rib 1 extends into flowable plastic tube 20 during and after the heating step described above. When shrink tube 10 is removed, a catheter body having a tailored cross-section is obtained, in this case a non-circular cross-section due to the longitudinally extending channel formed in the plastic tube. This will, of course, alter certain properties of the catheter body, such as bending characteristics, when compared to catheters without the longitudinally extending channel. It should be understood that other three-dimensional patterns could be embossed into the flowable plastic tube to result in various tailored cross-sections and result in various altered catheter properties.

Figure 4 shows an alternative embodiment, which further comprises a thin-walled (e.g., about 0.0015 inch wall thickness) tubular liner 30 of a suitable material (such as PTFE) as the inner member of the tubular structure. Obviously, this embodiment can be obtained by first placing the thin-walled liner over the mandrel (if used) and then following the sequence described above. Figure 5 shows, in cross section, a further alternative embodiment which further includes metal coil (such as stainless steel or nitinol coil) material 40 located between the inner, thin-walled liner 30 and the flowable plastic tube 20. Of course, the metal coil could be at least partially embedded into the flowable plastic tube, as discussed above. In an aspect of the invention the metal coil is a helically wrapped stainless steel coil measuring about 0.002" X 0.012" that can extend any desired length of the tube. As mentioned above, the metal coil material 40 could be substituted with any desirable reinforcing material, which will be readily apparent to those skilled in the art.

In an aspect of the invention polymer shrink tube is used to cause the at least one three-dimensional pattern to be embossed into the flowable plastic tube and to cause or assist the flowable plastic to embed the optional reinforcing material. This is preferably accomplished during a single heating (or other



energy application) step. For example, an extruded PTFE tube could be placed over a mandrel, as discussed above. A suitable reinforcing material, such as stainless steel or nitinol coil could be placed over the PTFE tube. A flowable plastic tube could be placed over the reinforcing material and then a polymer shrink tube having at least one three-dimensional pattern on the inner surface thereof could be placed over the flowable plastic tube. Suitable energy, such as heat, could then be applied to the assembly to cause the polymer shrink tube to shrink. As the tube shrinks, the flowable plastic tube can at least partially embed, or substantially completely embed, the metal reinforcement while, at the same time, the at least one three-dimensional pattern is embossed into the flowable plastic tube. The at least one three-dimensional pattern could be a longitudinally extending rib, which results in a longitudinally extending channel being embossed into the flowable plastic tube. After allowing the assembly to cool, the polymer shrink tube can be removed and the at least one pattern could be covered with polymer film, as discussed above.

As shown in Figure 5, shrink tube 10 has been removed, thus resulting in longitudinally extending channel 3. Moreover, the outer polymer tube 20 has been provided with polymer film cover 50, thus defining a longitudinally extending lumen in the outer polymer tube 20. In an aspect of the invention, polymer film 50 is provided as a helical wrap of ePTFE at least partially imbued with suitable polymer, such as UV curable polymer or EFEP, as described above.

It should be understood that any number of longitudinally extending channels could be provided to the embodiment discussed above, by providing a plurality of longitudinally extending ribs to the shrink tubing 10. In an aspect of the invention, four longitudinally extending channels, each about 90° apart, are provided. In a further aspect of the invention, each of the four channels has dimensions essentially equal to one another. In a further aspect of the invention, each channel has a width of about 0.015 inch and a depth of about 0.007 inch. Once covered with suitable polymer film, four longitudinally extending lumens would be obtained. These lumens could be used, for example, to deliver inflation fluid to an expandable member on a distal end of a catheter, to pass strings/wires/or fluids down the length of a catheter, to deliver electrical, sensing, mechanical steering, or device deployment devices, etc. Moreover, the lumen(s) could be used to locate at least one material in the catheter wall that will alter at least one property of the catheter. For example, a stiffening wire could be located in a lumen for part of the length of the catheter, or for the entire length of the catheter. The stiffening wire could be located in the lumen before



or after providing the polymer film cover. Further, the lumen could be filled, partially or completely, with any suitable material (e.g., polymer, metal, etc.) to alter the catheter's stiffness along at least a portion of the length of the catheter. According to this aspect of the invention it is possible to produce catheters  
5 having varying properties (e.g., stiffness) along the length of the catheter.

Turning to Figure 6, there is shown in longitudinal cross section, one potential catheter embodiment according to the present invention. As shown, the catheter 100 includes an inflatable member 5 located at the distal end 7 of the catheter. Thin-walled liner 30 (e.g., fluoropolymer such as PTFE) extends for  
10 the length of the catheter and defines inner, centrally located lumen 6. Positioned over the inner liner 30 is polymer tube 20, which also can extend for the length of the catheter. Not shown is optional reinforcing material, such as metal coil or braid (described above), which can also extend for the length of the catheter and be positioned over thin-walled liner 30 and optionally embedded  
15 into polymer tube 20. Polymer film wrap 50 can also extend for the length of the catheter and cover longitudinally extending channel 3, thus defining longitudinally extending lumen in polymer tube 20. As shown, longitudinally extending channel 3 can function as an inflation lumen and is in fluid communication with inflation port 4 and the interior of inflatable member 5.

20 As should be understood, catheter 100 can be appropriately sized for any number of desirable applications, such as those discussed in the commonly owned patents and patent applications, discussed above. Moreover, there is no requirement that an inflatable member is located at the distal end of the catheter, or provided at all. Furthermore, additional lumens could be provided in polymer  
25 tube 20. Such lumens could be used to allow for delivery of delivery catheters, balloon-on-a-wire devices, thrombectomy removal devices, steering wires, diagnostic catheters, angiographic catheters, etc., as well as to be used to locate at least one material in the catheter wall such as a stiffening wire, as discussed above.

30 While particular embodiments of the present invention have been illustrated and described herein, the present invention should not be limited to such illustrations and descriptions. It should be apparent that changes and modifications may be incorporated and embodied as part of the present invention within the scope of the following claims.



## CLAIMS:

1. A tube comprising:  
a fluoropolymer shrink tube having an inner surface and at least one rib formed along at least a portion of the inner surface of the tube.
2. The tube of claim 1, wherein the at least one rib extends longitudinally essentially the entire length of the tube.
3. The tube of claim 1, wherein the at least one rib consists of one to four ribs.
4. The tube of claim 1, wherein the fluoropolymer comprises a material selected from the group consisting of fluorinated ethylene propylene, fluoroelastomers, ethylene tetrafluoroethylene, perfluoroalkoxy, and polytetrafluoroethylene.
5. The tube of claim 4, wherein the fluoropolymer comprises fluorinated ethylene propylene.
6. The tube of claim 1, wherein the tube has an expanded inner diameter of about 0.150" and a retracted inner diameter of about 0.100" over substantially the entire length of the tube.
7. A catheter comprising:  
a fluoropolymer tube having a proximal end, a distal end, an inner surface defining a longitudinally extending, generally central lumen and an outer surface;



an outer polymer tube having a proximal end, a distal end, an inner surface and an outer surface, wherein the inner surface of the outer polymer tube is positioned over the outer surface of the fluoropolymer tube;

wherein at least one channel is located in the outer polymer tube, the at least one channel measuring about 0.007 inches by about 0.015 inches and extending for at least a portion of the length of the catheter; and

polymer film covering at least a portion of the length of the at least one channel, thus defining at least one longitudinally extending lumen in the catheter.

8. The catheter of claim 7, further comprising a reinforcing material in contact with the outer polymer tube.
9. The catheter of claim 8, wherein the reinforcing material comprises metal.
10. The catheter of claim 9, wherein the metal comprises a material selected from the group consisting of stainless steel and nitinol.
11. The catheter of claim 9, wherein the metal is a coil construction.
12. The catheter of claim 8, wherein the reinforcing material is embedded by the outer polymer tube.
13. The catheter of claim 7, wherein the catheter has an outer diameter of about 0.118 inches or less.
14. The catheter of claim 13, wherein the catheter has an outer diameter of about 0.105 inches or less.
15. The catheter of claim 7, wherein the fluoropolymer tube comprises a



material selected from the group consisting of polytetrafluoroethylene and fluorinated ethylene propylene.

16. The catheter of claim 15, wherein the fluoropolymer tube comprises polytetrafluoroethylene.

17. The catheter of claim 7, wherein the at least one channel extends from the proximal end to the distal end of the outer polymer tube.

18. The catheter of claim 17, wherein an inflatable member is located at the distal end of the catheter and the at least one channel is in fluid communication with the interior of the inflatable member.

19. The catheter of claim 18, wherein the outer polymer tube comprises at least a second channel.

20. The catheter of claim 12, wherein the fluoropolymer tube comprises polytetrafluoroethylene, the outer polymer tube comprises polyether block amide, the polymer film comprises expanded polytetrafluoroethylene, and the reinforcing material comprises stainless steel coil.

21. A method of creating an external embossed pattern on the exterior of a cylindrical device comprising:

providing a polymer tube having at least an exterior surface;

providing a shrink tube having an inner and an outer surface, the inner surface having a three-dimensional pattern thereon;

placing the shrink tube around the polymer tube;

applying sufficient energy to the shrink tube so as to shrink the shrink tube around the exterior of the polymer tube, causing at least a portion of the three-



dimensional pattern to become embossed into the exterior surface of the polymer tube.

22. The methods of claim 21, wherein the polymer tube is placed over a mandrel prior to applying energy to the shrink tube.

23. The method of claim 21, further comprising removing the shrink tube from the polymer tube, leaving a cylindrical device with the embossed pattern therein.

24. The method of claim 23, wherein the applied sufficient energy causes the polymer tube to flow.

25. The method of claim 23, wherein the embossed pattern increases the outer surface area of the cylindrical device.

26. The method of claim 23, wherein the three-dimensional pattern comprises at least one rib extending along the inner surface of the shrink tube, whereby a channel is formed along the cylindrical device complementary to the rib.

27. The method of claim 23, wherein the cylindrical device is a catheter having a length and wherein the three-dimensional pattern provides a channel that extends for at least a portion of a length of the catheter.

28. The method of claim 27, further comprising providing a polymer film to cover at least a portion of the channel.

29. The method of claim 28, wherein the polymer film is in the form of tape wrapped about at least a portion of the catheter.



30. A method for forming a catheter having a proximal end and a distal end comprising the steps of:
- providing a fluoropolymer tube having a proximal end, a distal end, an inner surface defining a longitudinally extending, generally central lumen, and an outer surface;
  - providing an outer polymer tube having a proximal end, a distal end, an inner surface, and an outer surface, wherein the inner surface of the outer polymer tube is positioned over the outer surface of the fluoropolymer tube;
  - providing a polymer shrink tube having a proximal end, a distal end, an inner surface, and an outer surface, the inner surface having at least one three-dimensional pattern thereon;
  - placing the polymer shrink tube around the outer polymer tube, with the polymer shrink tube inner surface adjacent the outer surface of the outer polymer tube;
  - applying sufficient energy to the shrink tube so as to shrink the shrink tube around the outer polymer tube, causing at least a portion of the at least one three-dimensional pattern to become embossed into the outer polymer tube;
  - removing the polymer shrink tube; and
  - covering at least a portion of the at least one three-dimensional pattern with polymer film.
31. The method of claim 30, wherein the at least one three-dimensional pattern includes at least one rib that embosses at least one channel into the outer polymer tube.
32. The method of claim 31, wherein the at least one channel is a longitudinally extending channel.
33. The method of claim 32, further comprising a reinforcing material in contact with the outer polymer tube.



34. The method of claim 33, wherein the reinforcing material comprises metal.
35. The method of claim 34, wherein the metal is selected from the group consisting of stainless steel and nitinol.
36. The method of claim 34, wherein the metal is a coil construction.
37. The method of claim 33, wherein the reinforcing material is embedded by the outer polymer tube during the step of applying sufficient energy.
38. The method of claim 32, wherein the at least one longitudinally extending channel measures about 0.007 inch by about 0.015 inch.
39. The method of claim 32, wherein an expandable member is located at the distal end of the catheter and the at least one longitudinally extending channel is in fluid communication with the interior of the expandable member.
40. The method of claim 39, wherein the expandable member is an occlusion balloon.
41. The method of claim 30, wherein the polymer film comprises a material selected from the group consisting of polytetrafluoroethylene, polyethylene, polypropylene, polyamide, polyethylene terephthalate, fluorinated ethylene propylene, perfluoroalkoxy resin, polyurethane, polyester, and polyimide.
42. The method of claim 41, wherein the polytetrafluoroethylene is porous, expanded polytetrafluoroethylene.
43. The method of claim 42, further comprising providing at least a second



polymer to the expanded polytetrafluoroethylene.

44. The method of claim 43, wherein the second polymer is provided by at least one of the following methods, coating, imbibing, vacuum assisted coating, nip coating, and dip coating.

45. The method of claim 43, wherein the second polymer is imbibed into at least some of the porosity of the expanded polytetrafluoroethylene.

46. The method of claim 43, wherein the second polymer is provided as at least a partial surface coating to one or more sides of the expanded polytetrafluoroethylene film.

47. The method of claim 45, wherein substantially all of the porosity of the expanded polytetrafluoroethylene is imbibed with the second polymer.

48. The method of claim 43, wherein the second polymer is selected from the group consisting of thermoplastics, thermosets, pressure sensitive adhesives, heat-activated adhesives, chemically-activated adhesives, and UV-curable polymers.

49. The method of claim 48, wherein the second polymer is selected from the group consisting of ethylene tetra fluoro ethylene based copolymers and UV-curable polymers.

50. The method of claim 49, wherein the second polymer is UV-curable.

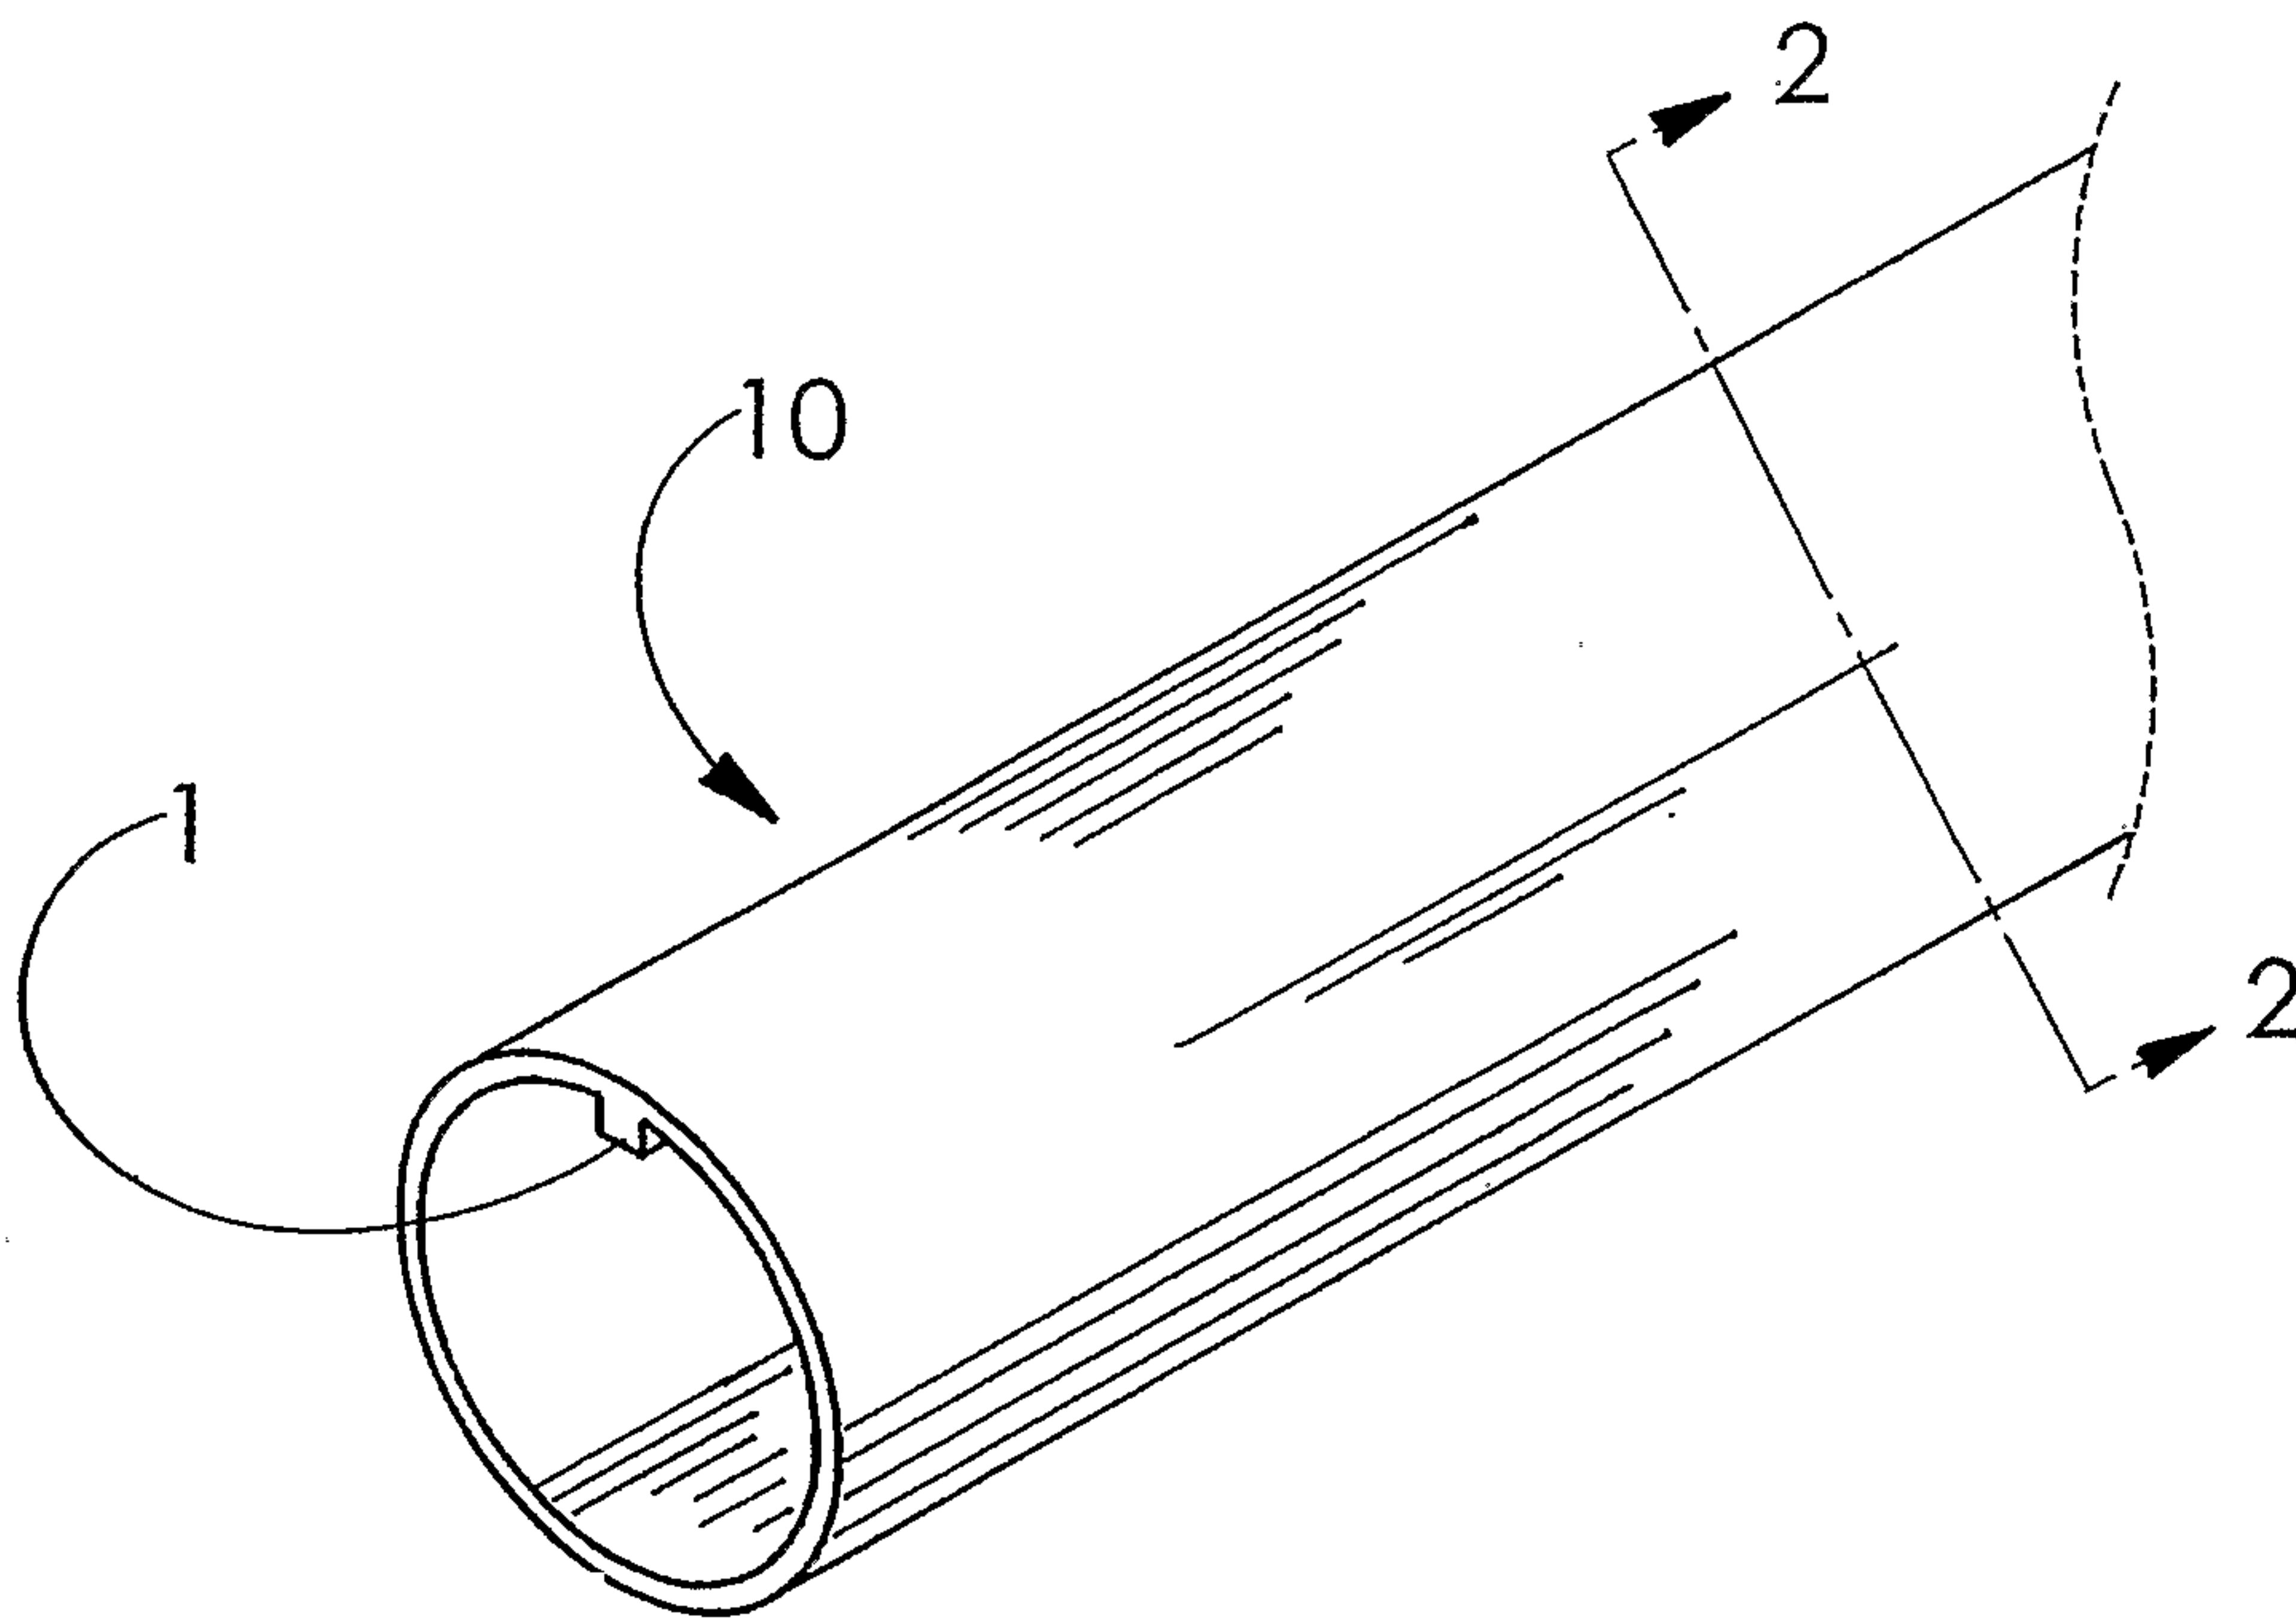
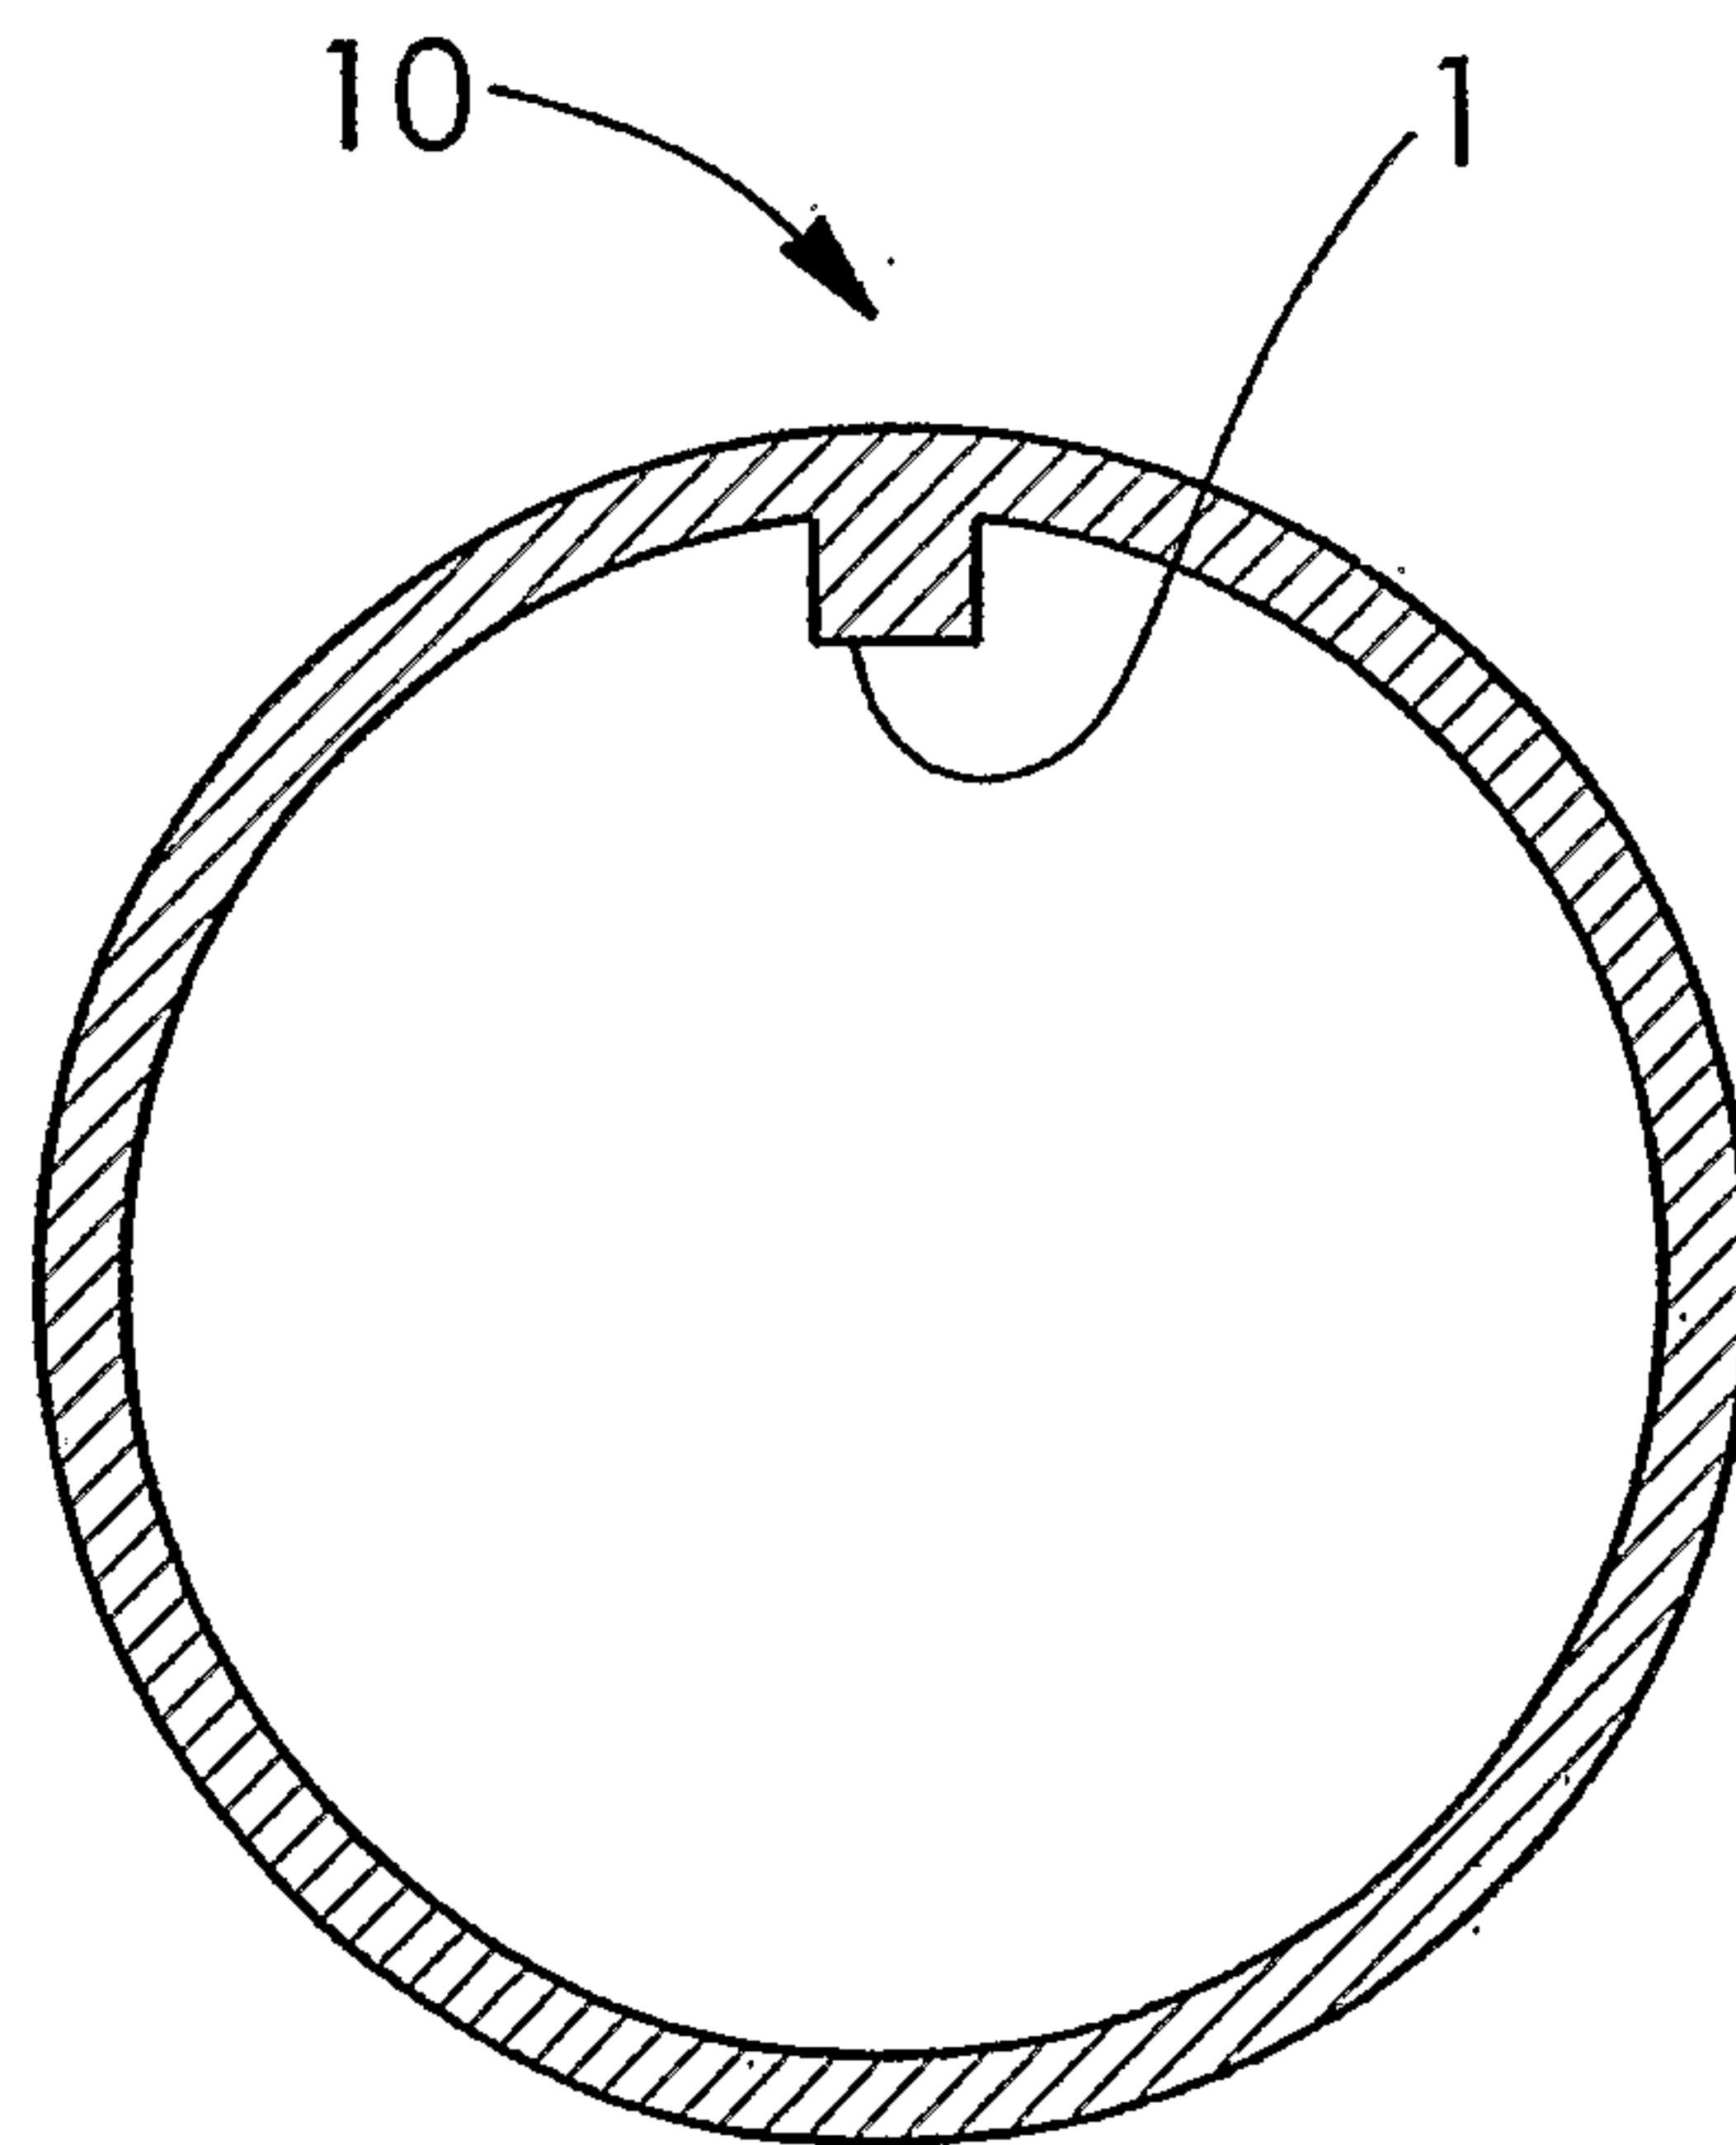
51. The method of claim 49, wherein the outer polymer tube is selected from the group consisting of polyether block amides, nylon, urethanes, polyethylene, polypropylene, and fluorinated ethylene propylene.



52. The method of claim 49, wherein the outer polymer tube comprises polyether block amide.
53. The method of claim 32, wherein four longitudinally extending channels are formed in the outer polymer tube.
54. The method of claim 53, wherein the four longitudinally channels are each about 90 degrees apart.
55. The method of claim 54, wherein each of the four longitudinally extending channels has a width of about 0.015 inch and a depth of about 0.007 inch.
56. A tube comprising:  
a shrink tube having an inner surface and at least one rib formed along the inner surface, the rib having a height of less than about 0.5 mm.
57. The tube of claim 56, wherein the rib has a height of less than about 0.2mm.

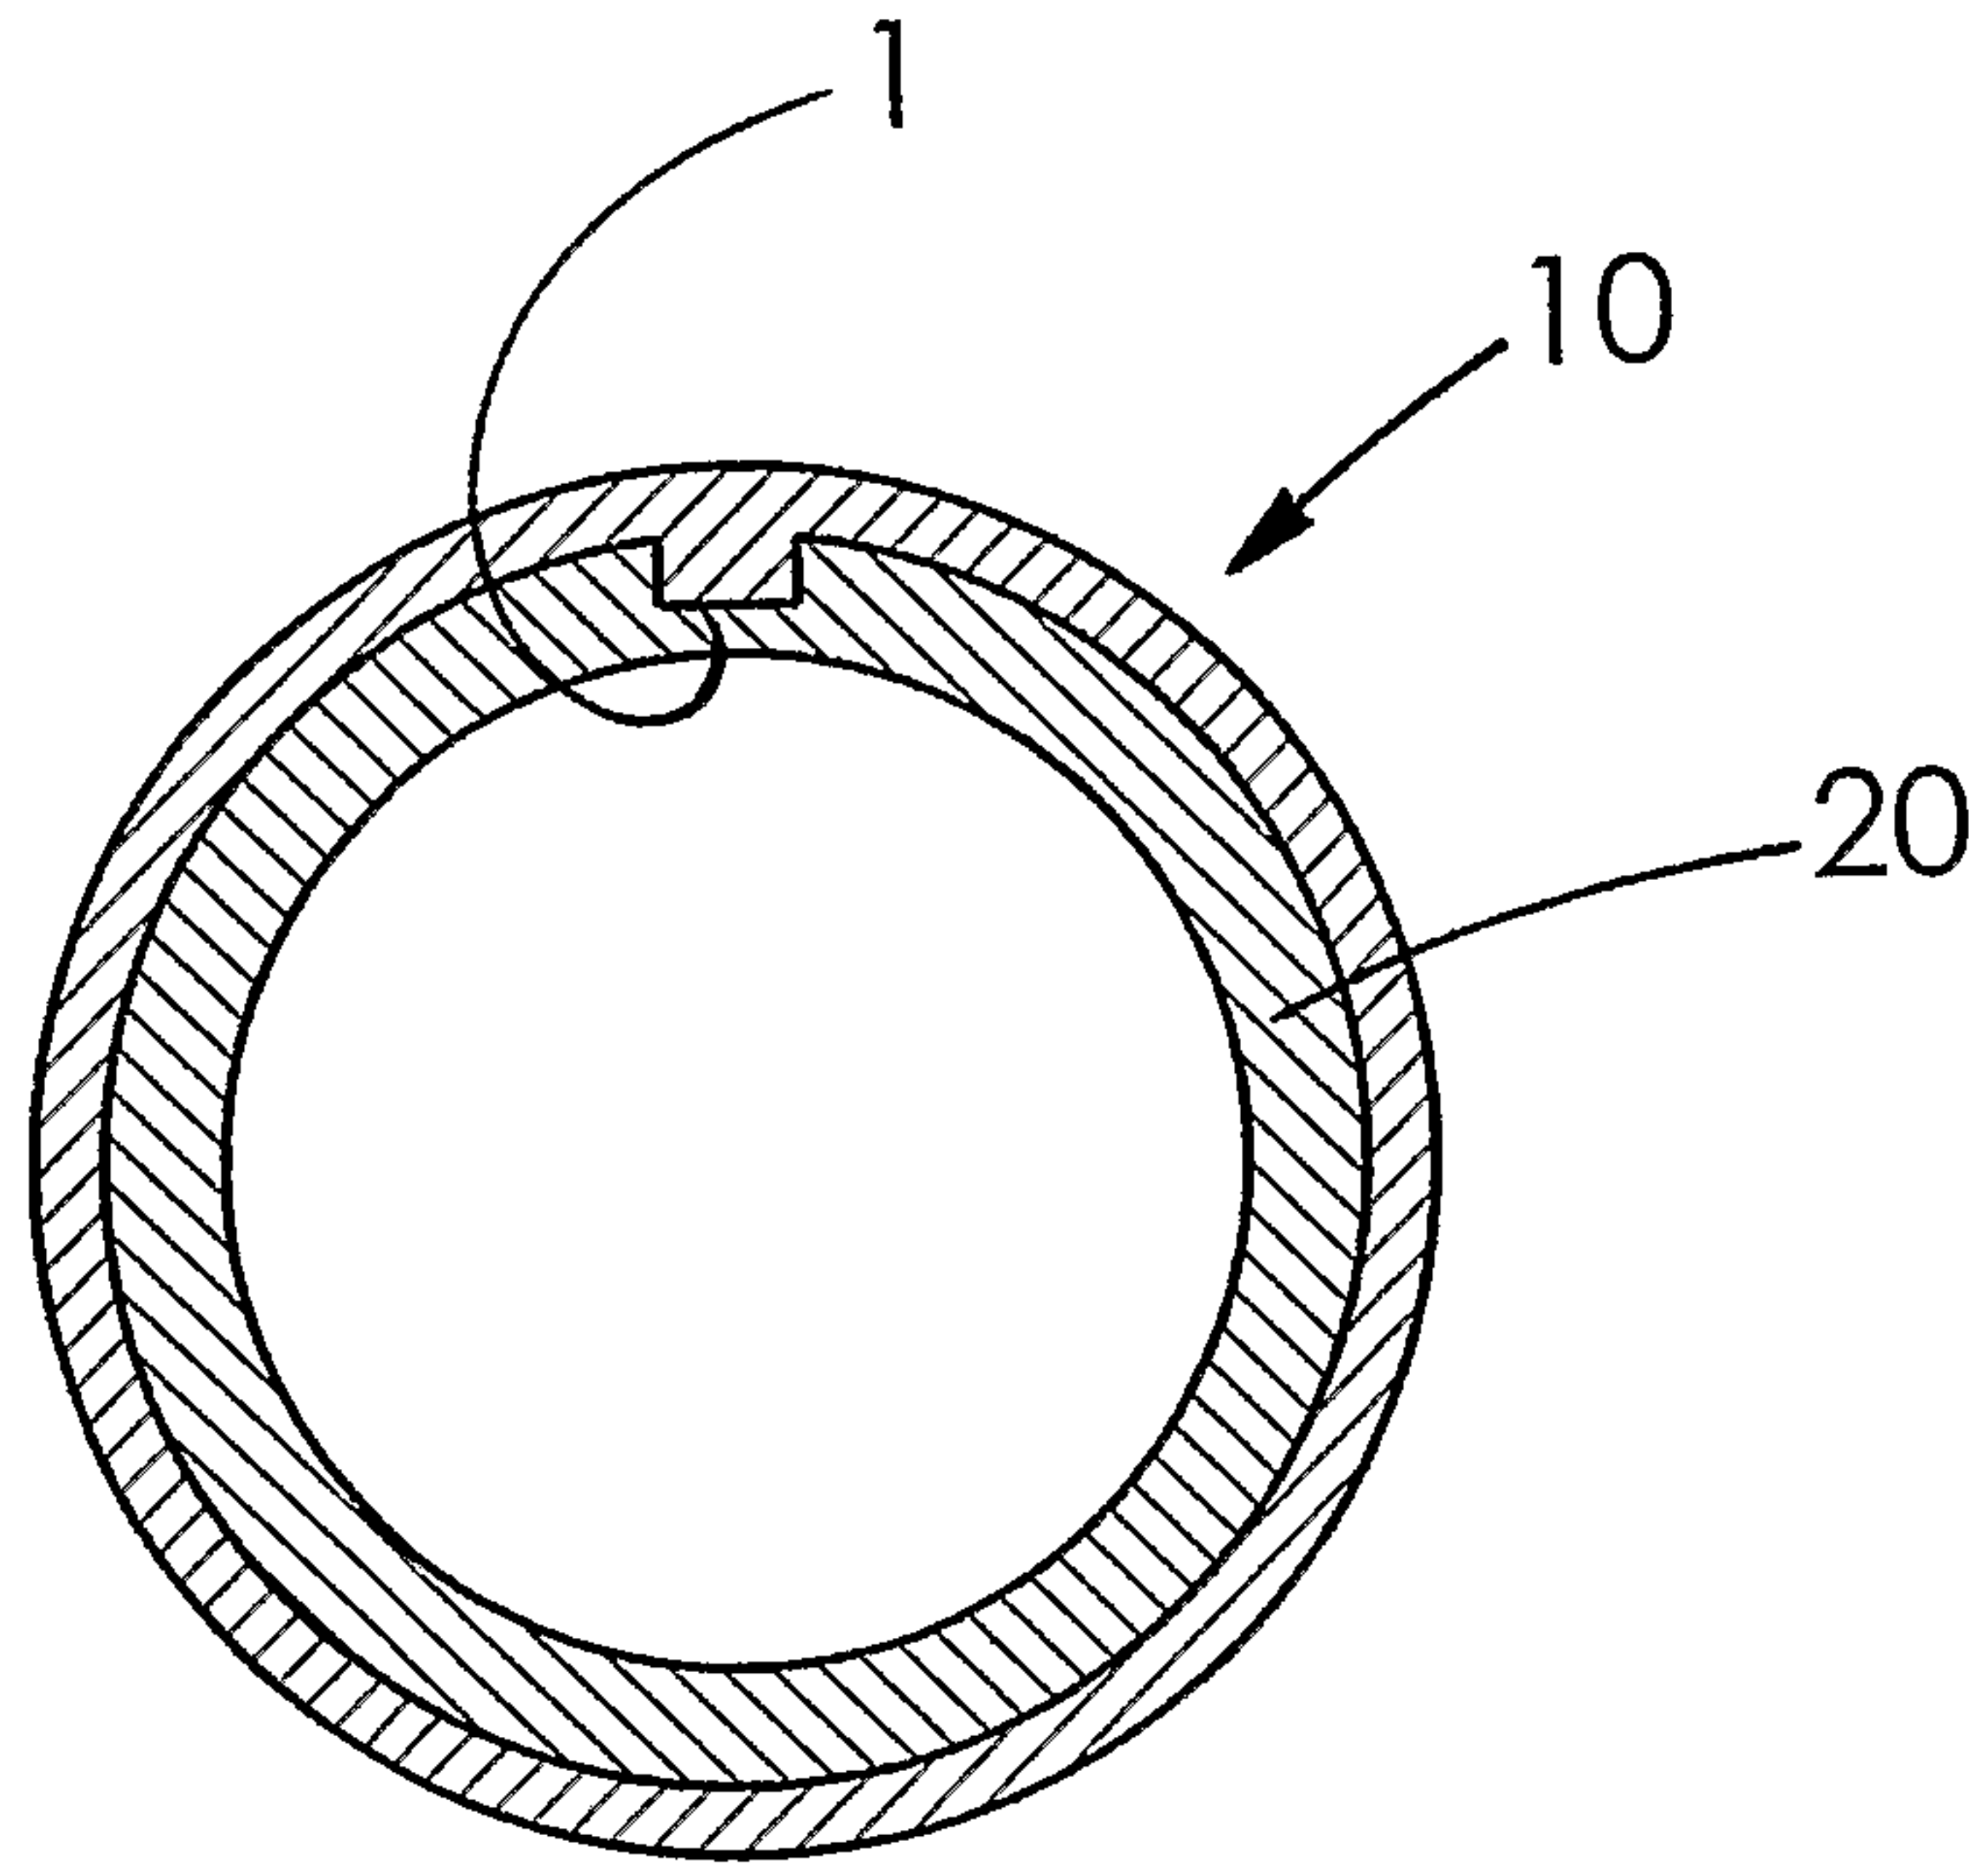
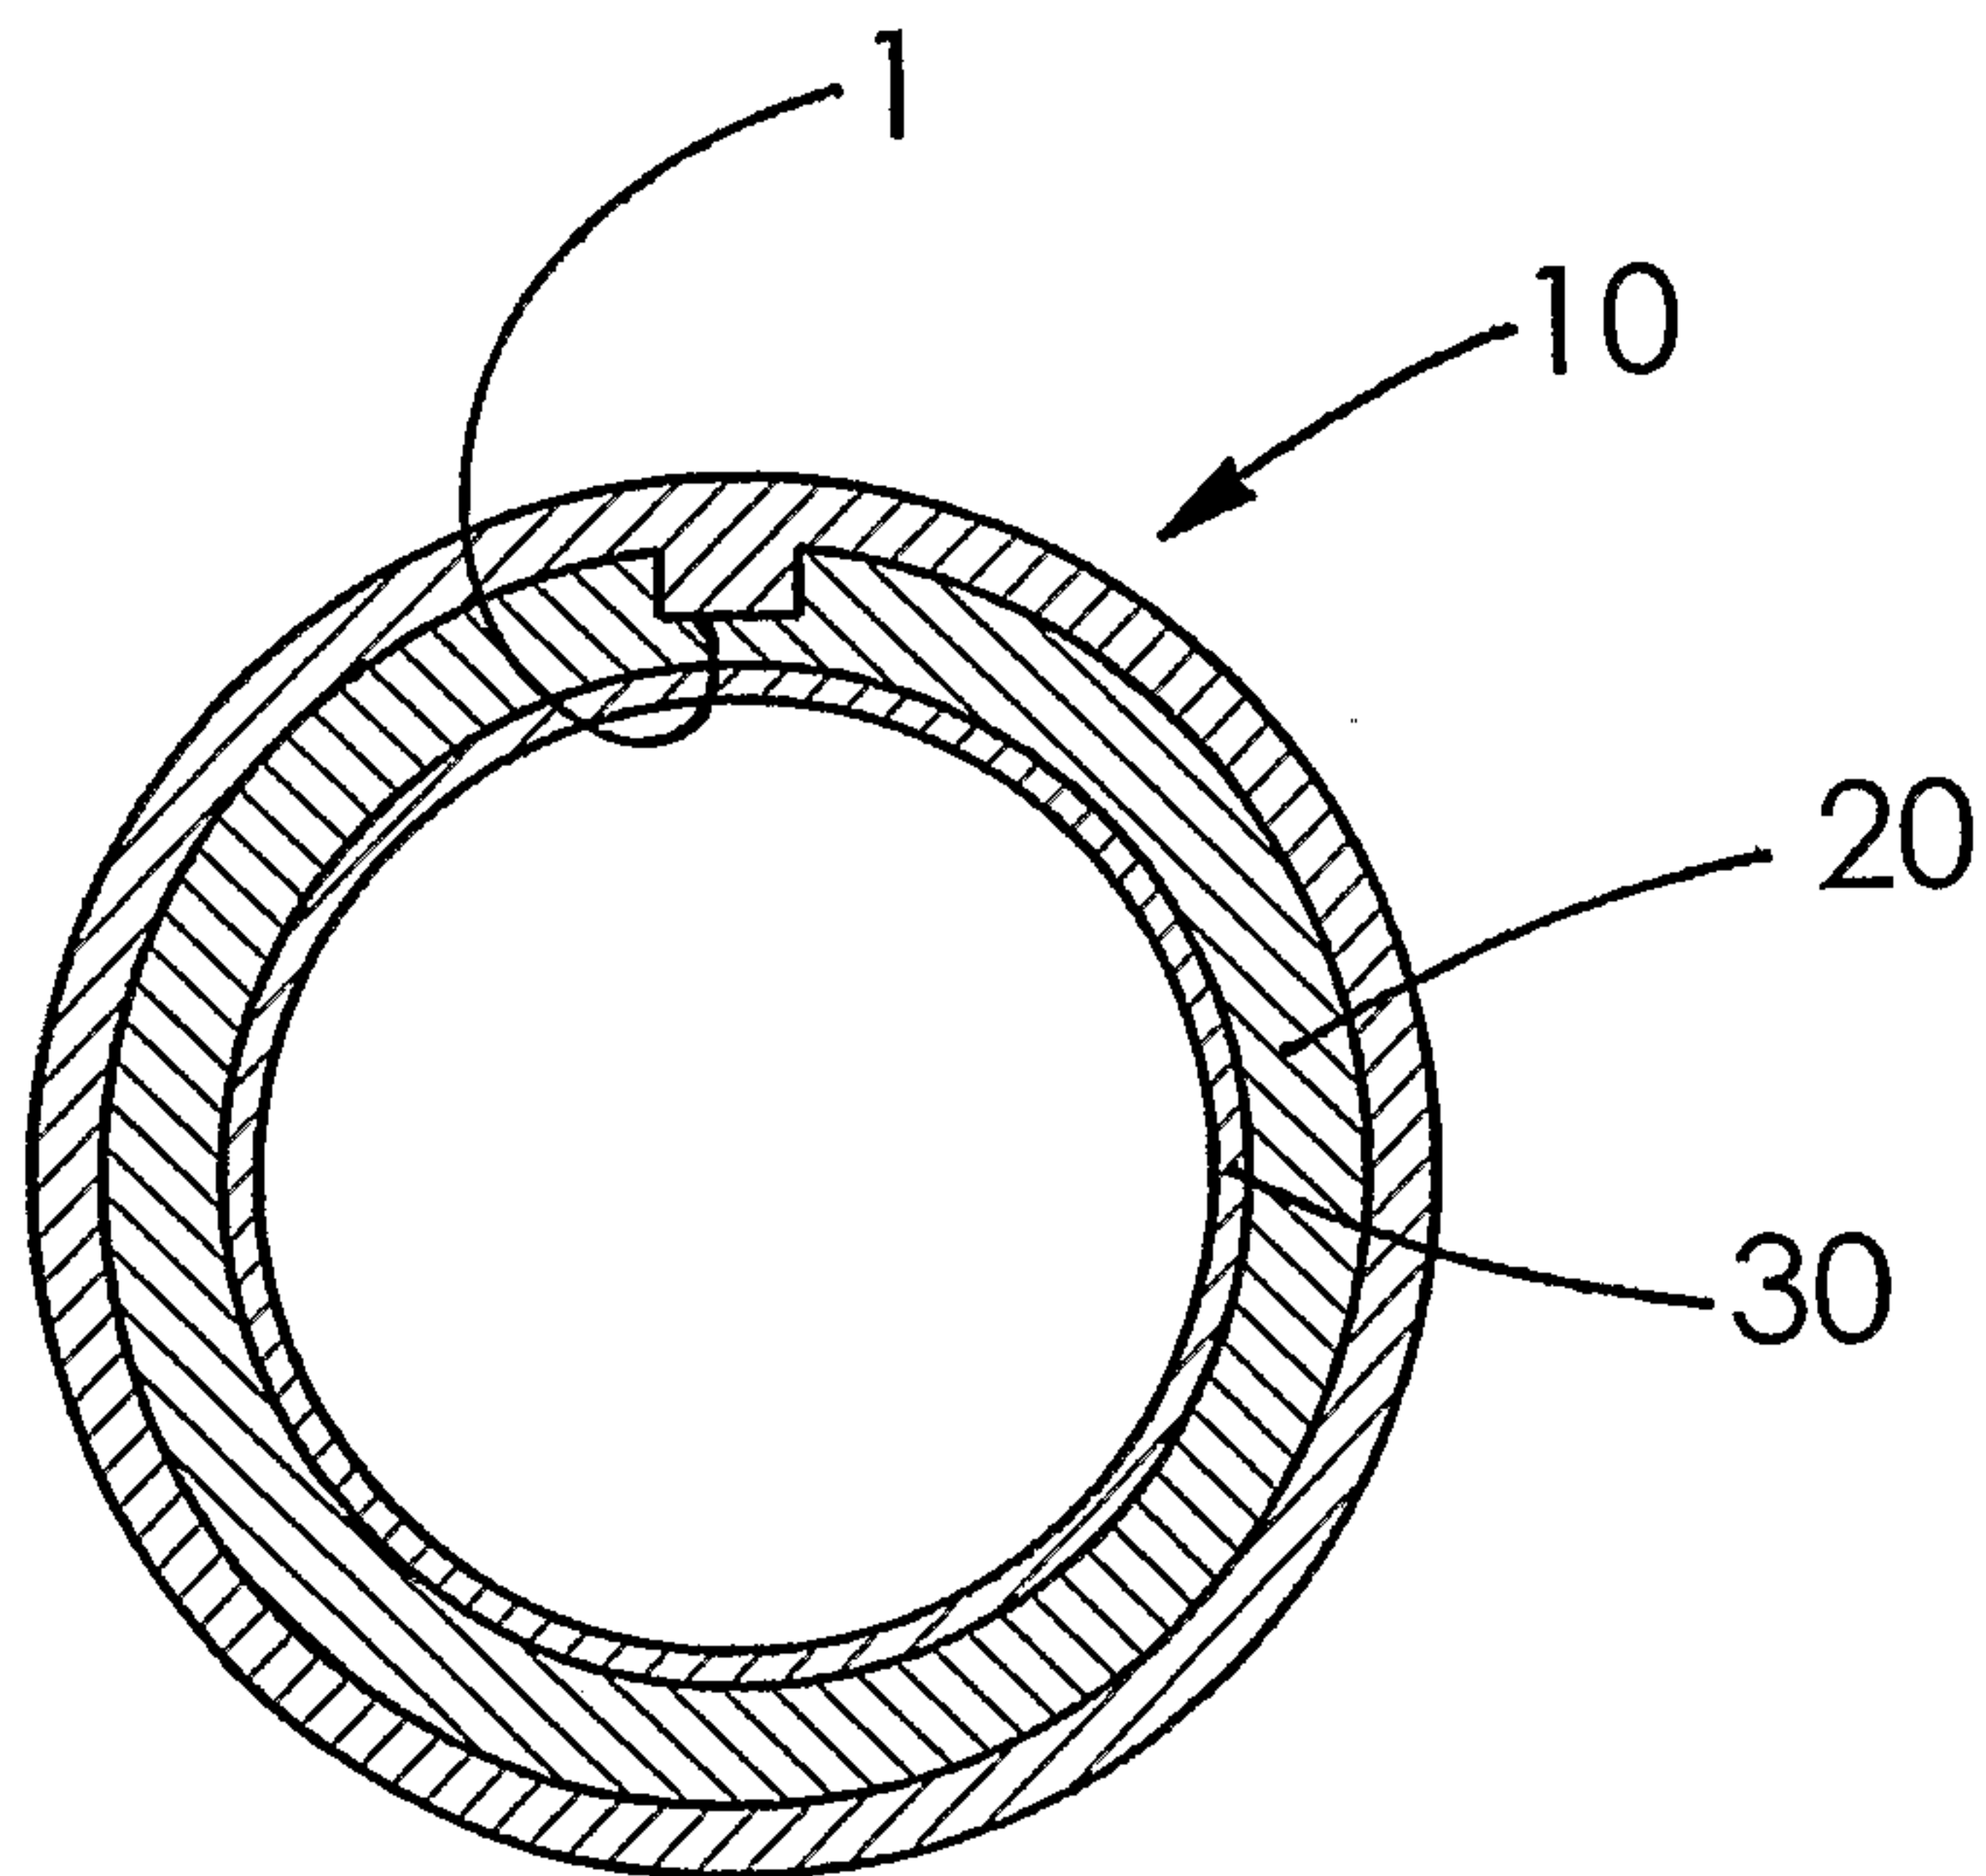


1/4

*Fig. 1**Fig. 2*

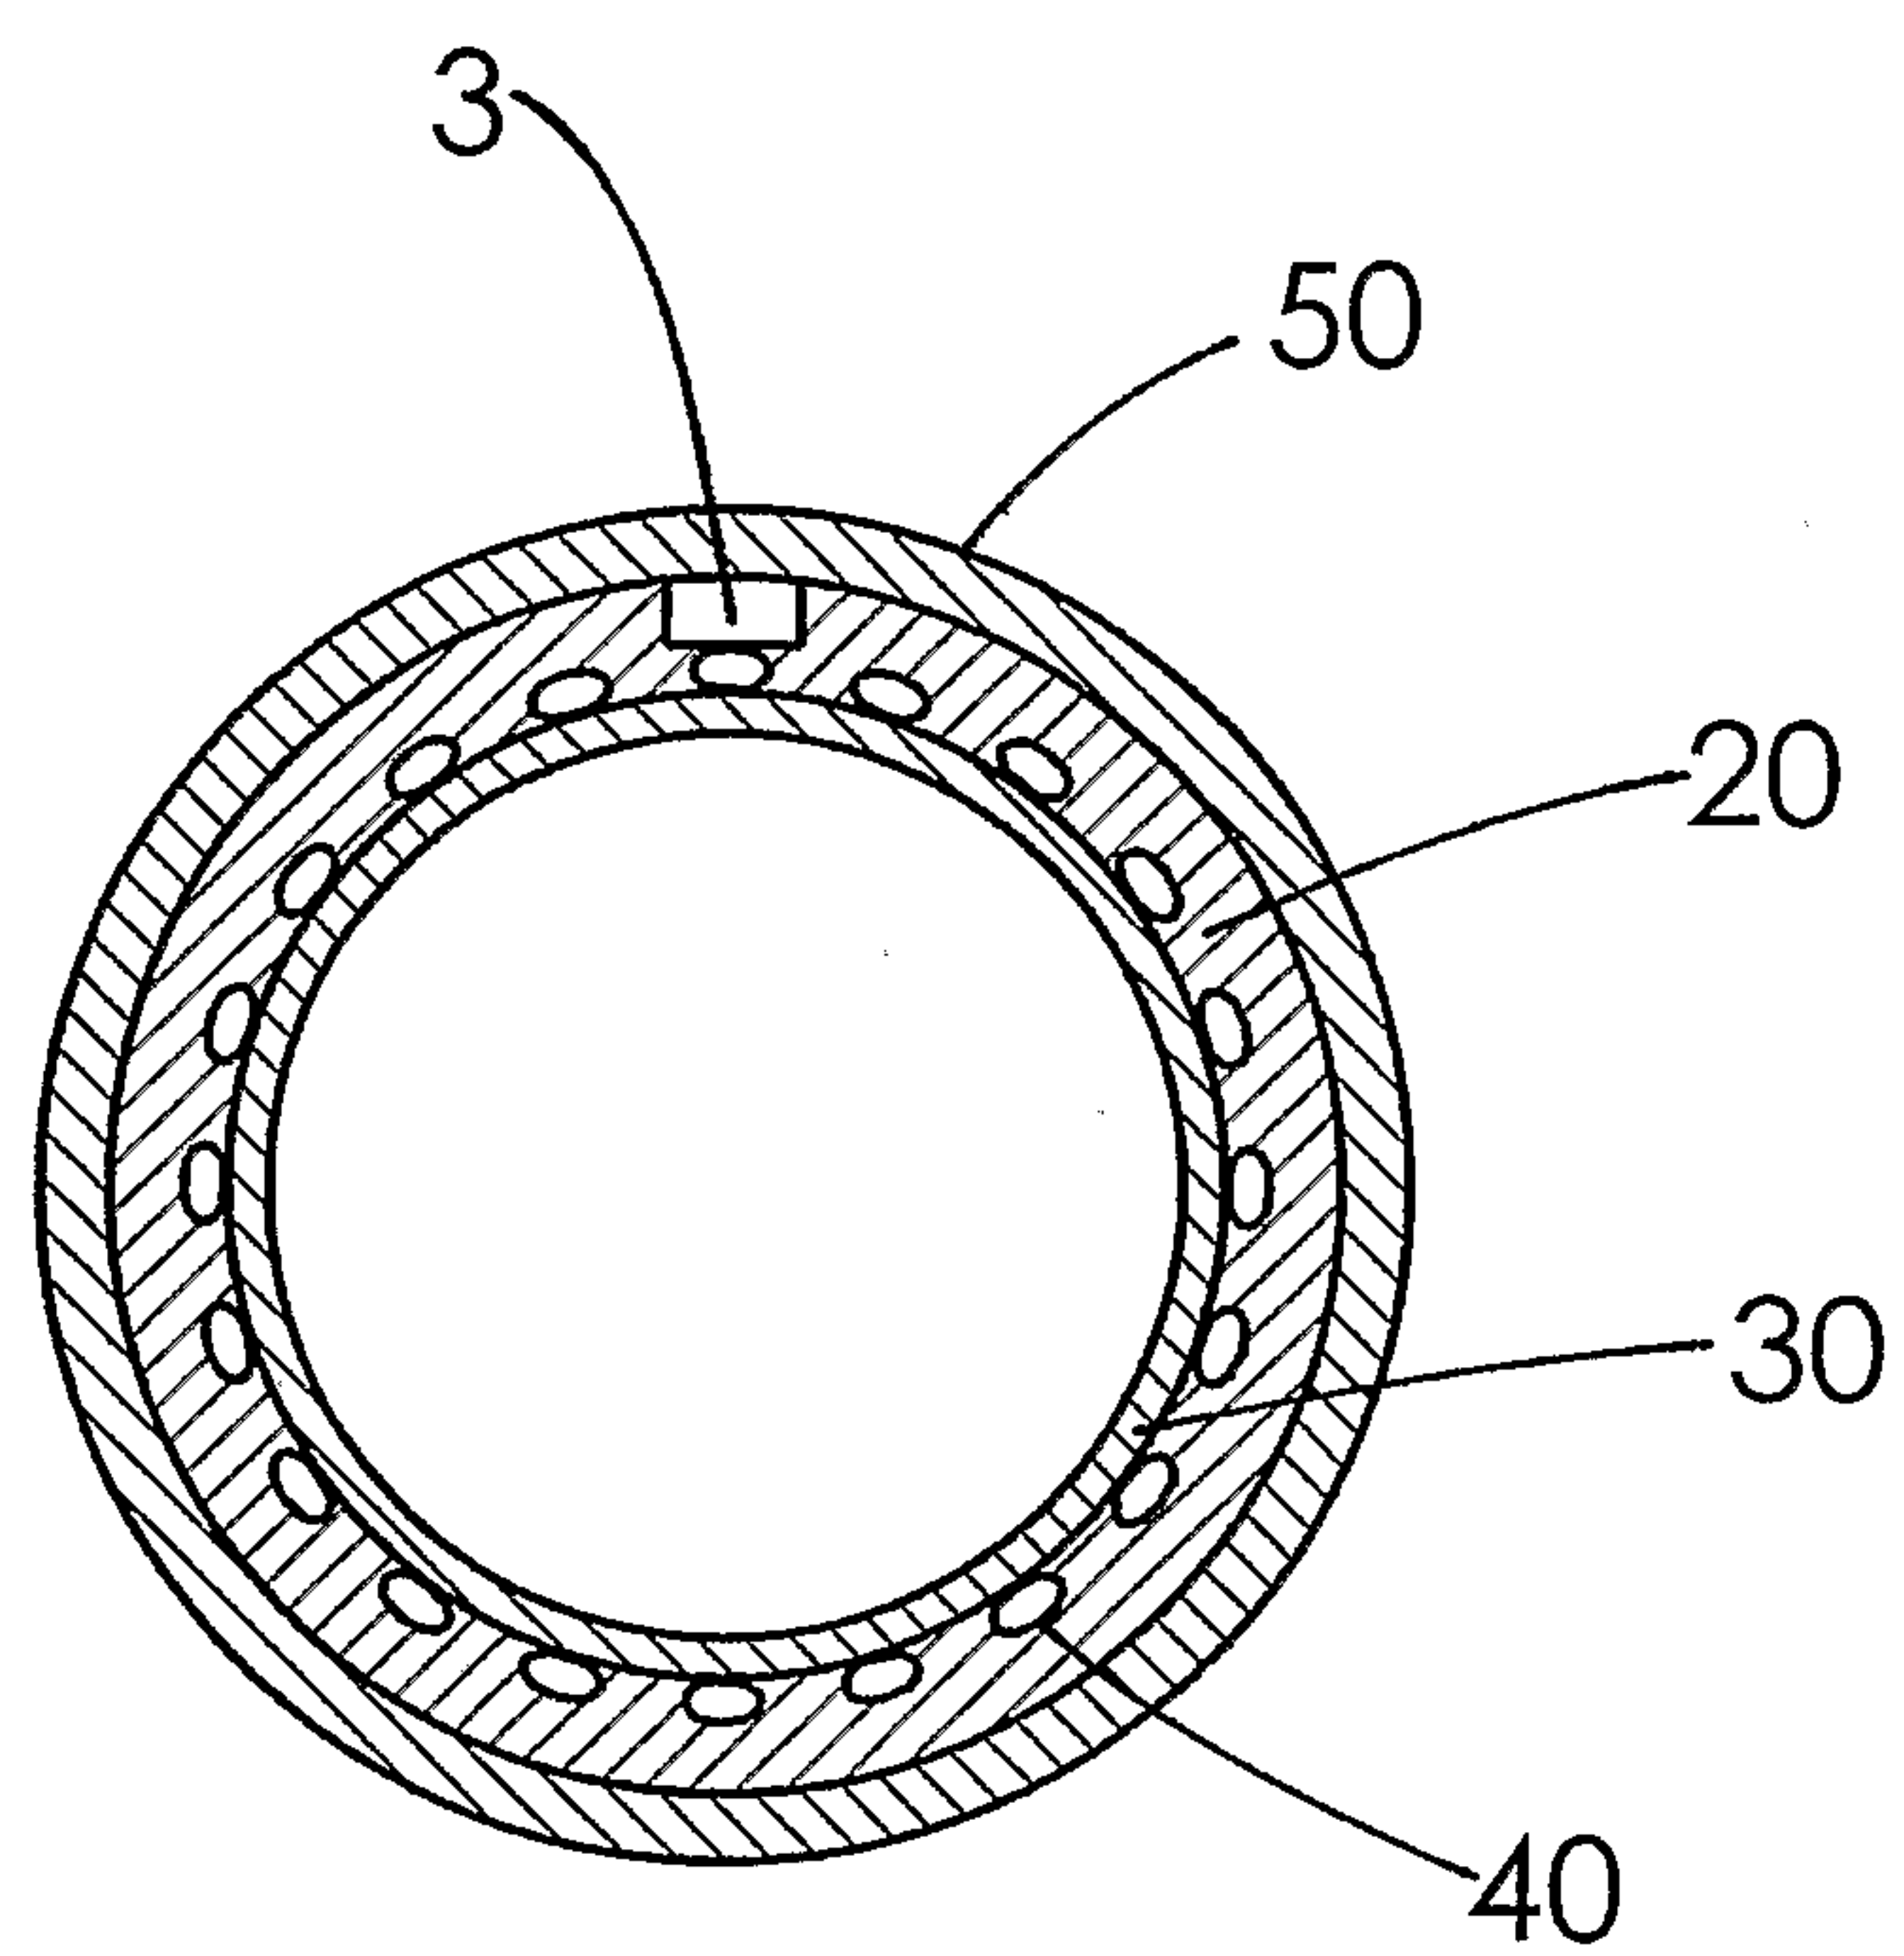


2/4

*Fig. 3**Fig. 4*



3/4

*Fig. 5*



4/4

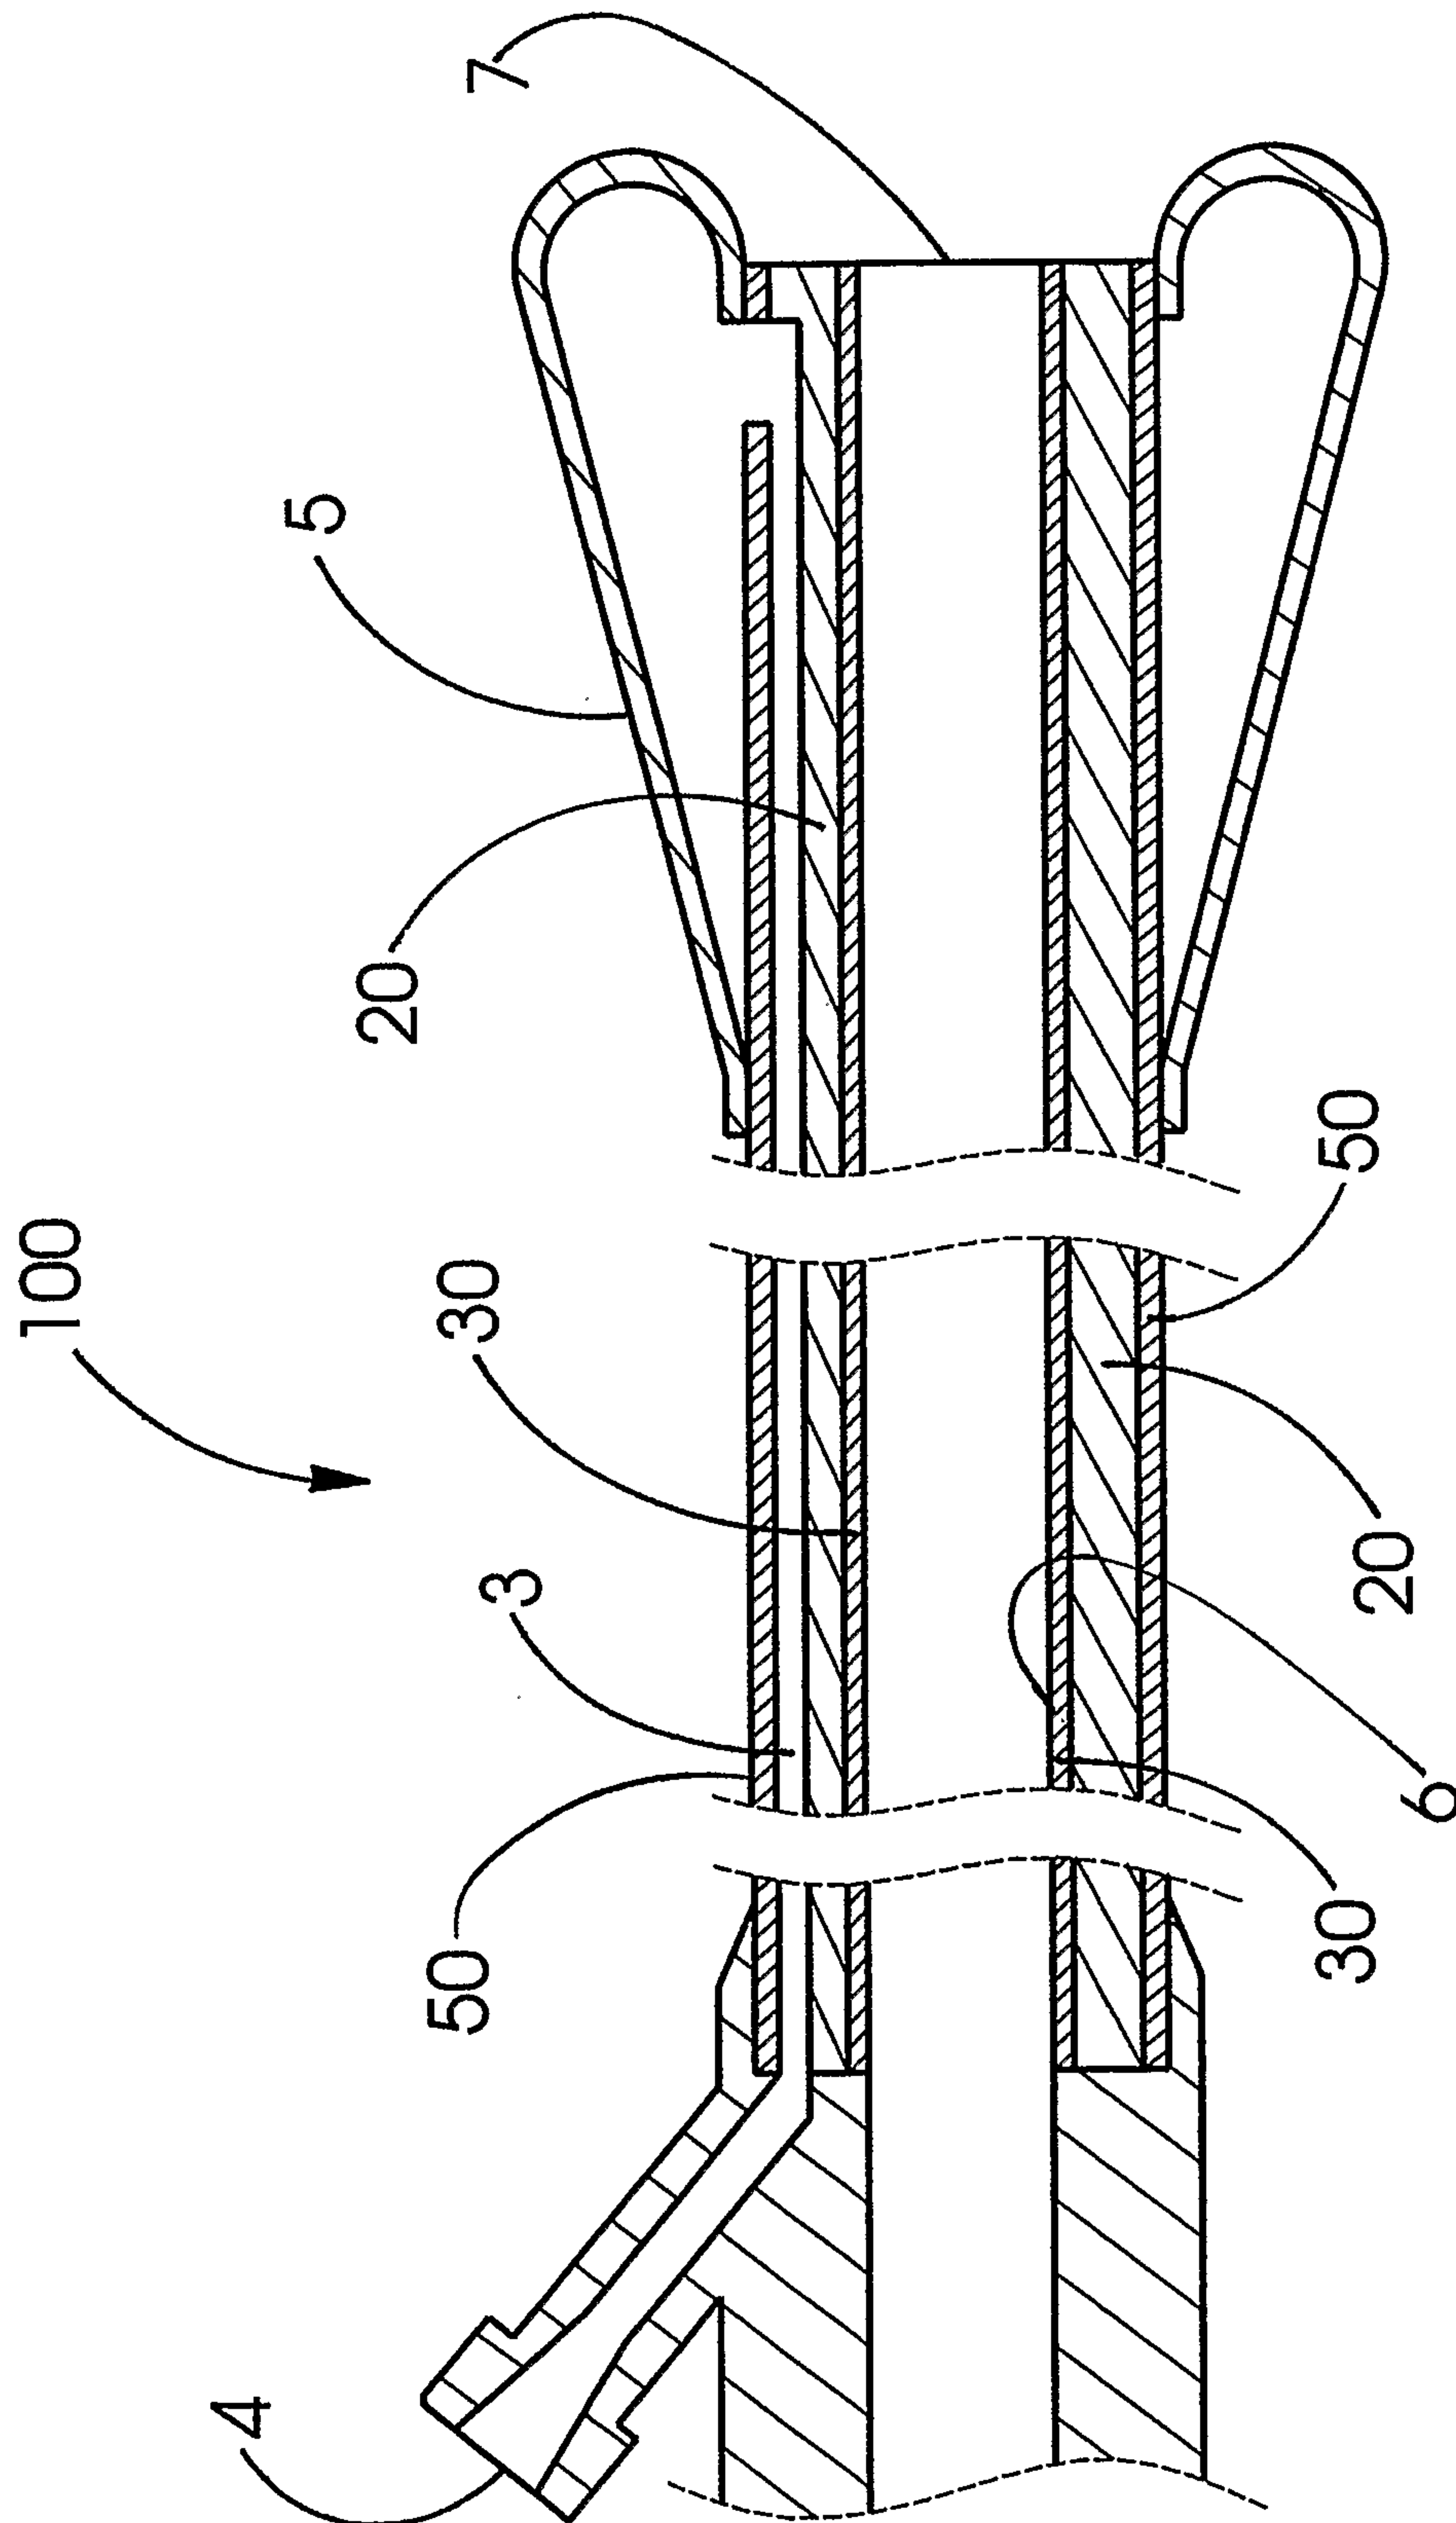


Fig. 6



