




(22) **Date de dépôt/Filing Date:** 2013/05/14  
 (41) **Mise à la disp. pub./Open to Public Insp.:** 2013/12/30  
 (45) **Date de délivrance/Issue Date:** 2018/04/17  
 (30) **Priorité/Priority:** 2012/06/30 (US13/539,432)

(51) **Cl.Int./Int.Cl.** *G01V 15/00* (2006.01),  
*G01V 3/12* (2006.01), *G06K 19/07* (2006.01)  
 (72) **Inventeurs/Inventors:**  
SALOUR, ALI, US;  
HARISH, AYYANGAR RANGANATH, IN;  
WARE, SANTOSH RAMLING, IN  
 (73) **Propriétaire/Owner:**  
THE BOEING COMPANY, US  
 (74) **Agent:** SMART & BIGGAR

(54) **Titre :** OUTIL DE PRODUCTION POURVU D'UN DISPOSITIF RFID MONTE DANS UNE INCLUSION DIELECTRIQUE  
 (54) **Title:** PRODUCTION TOOL HAVING RFID DEVICE MOUNTED WITHIN A DIELECTRIC INCLUSION

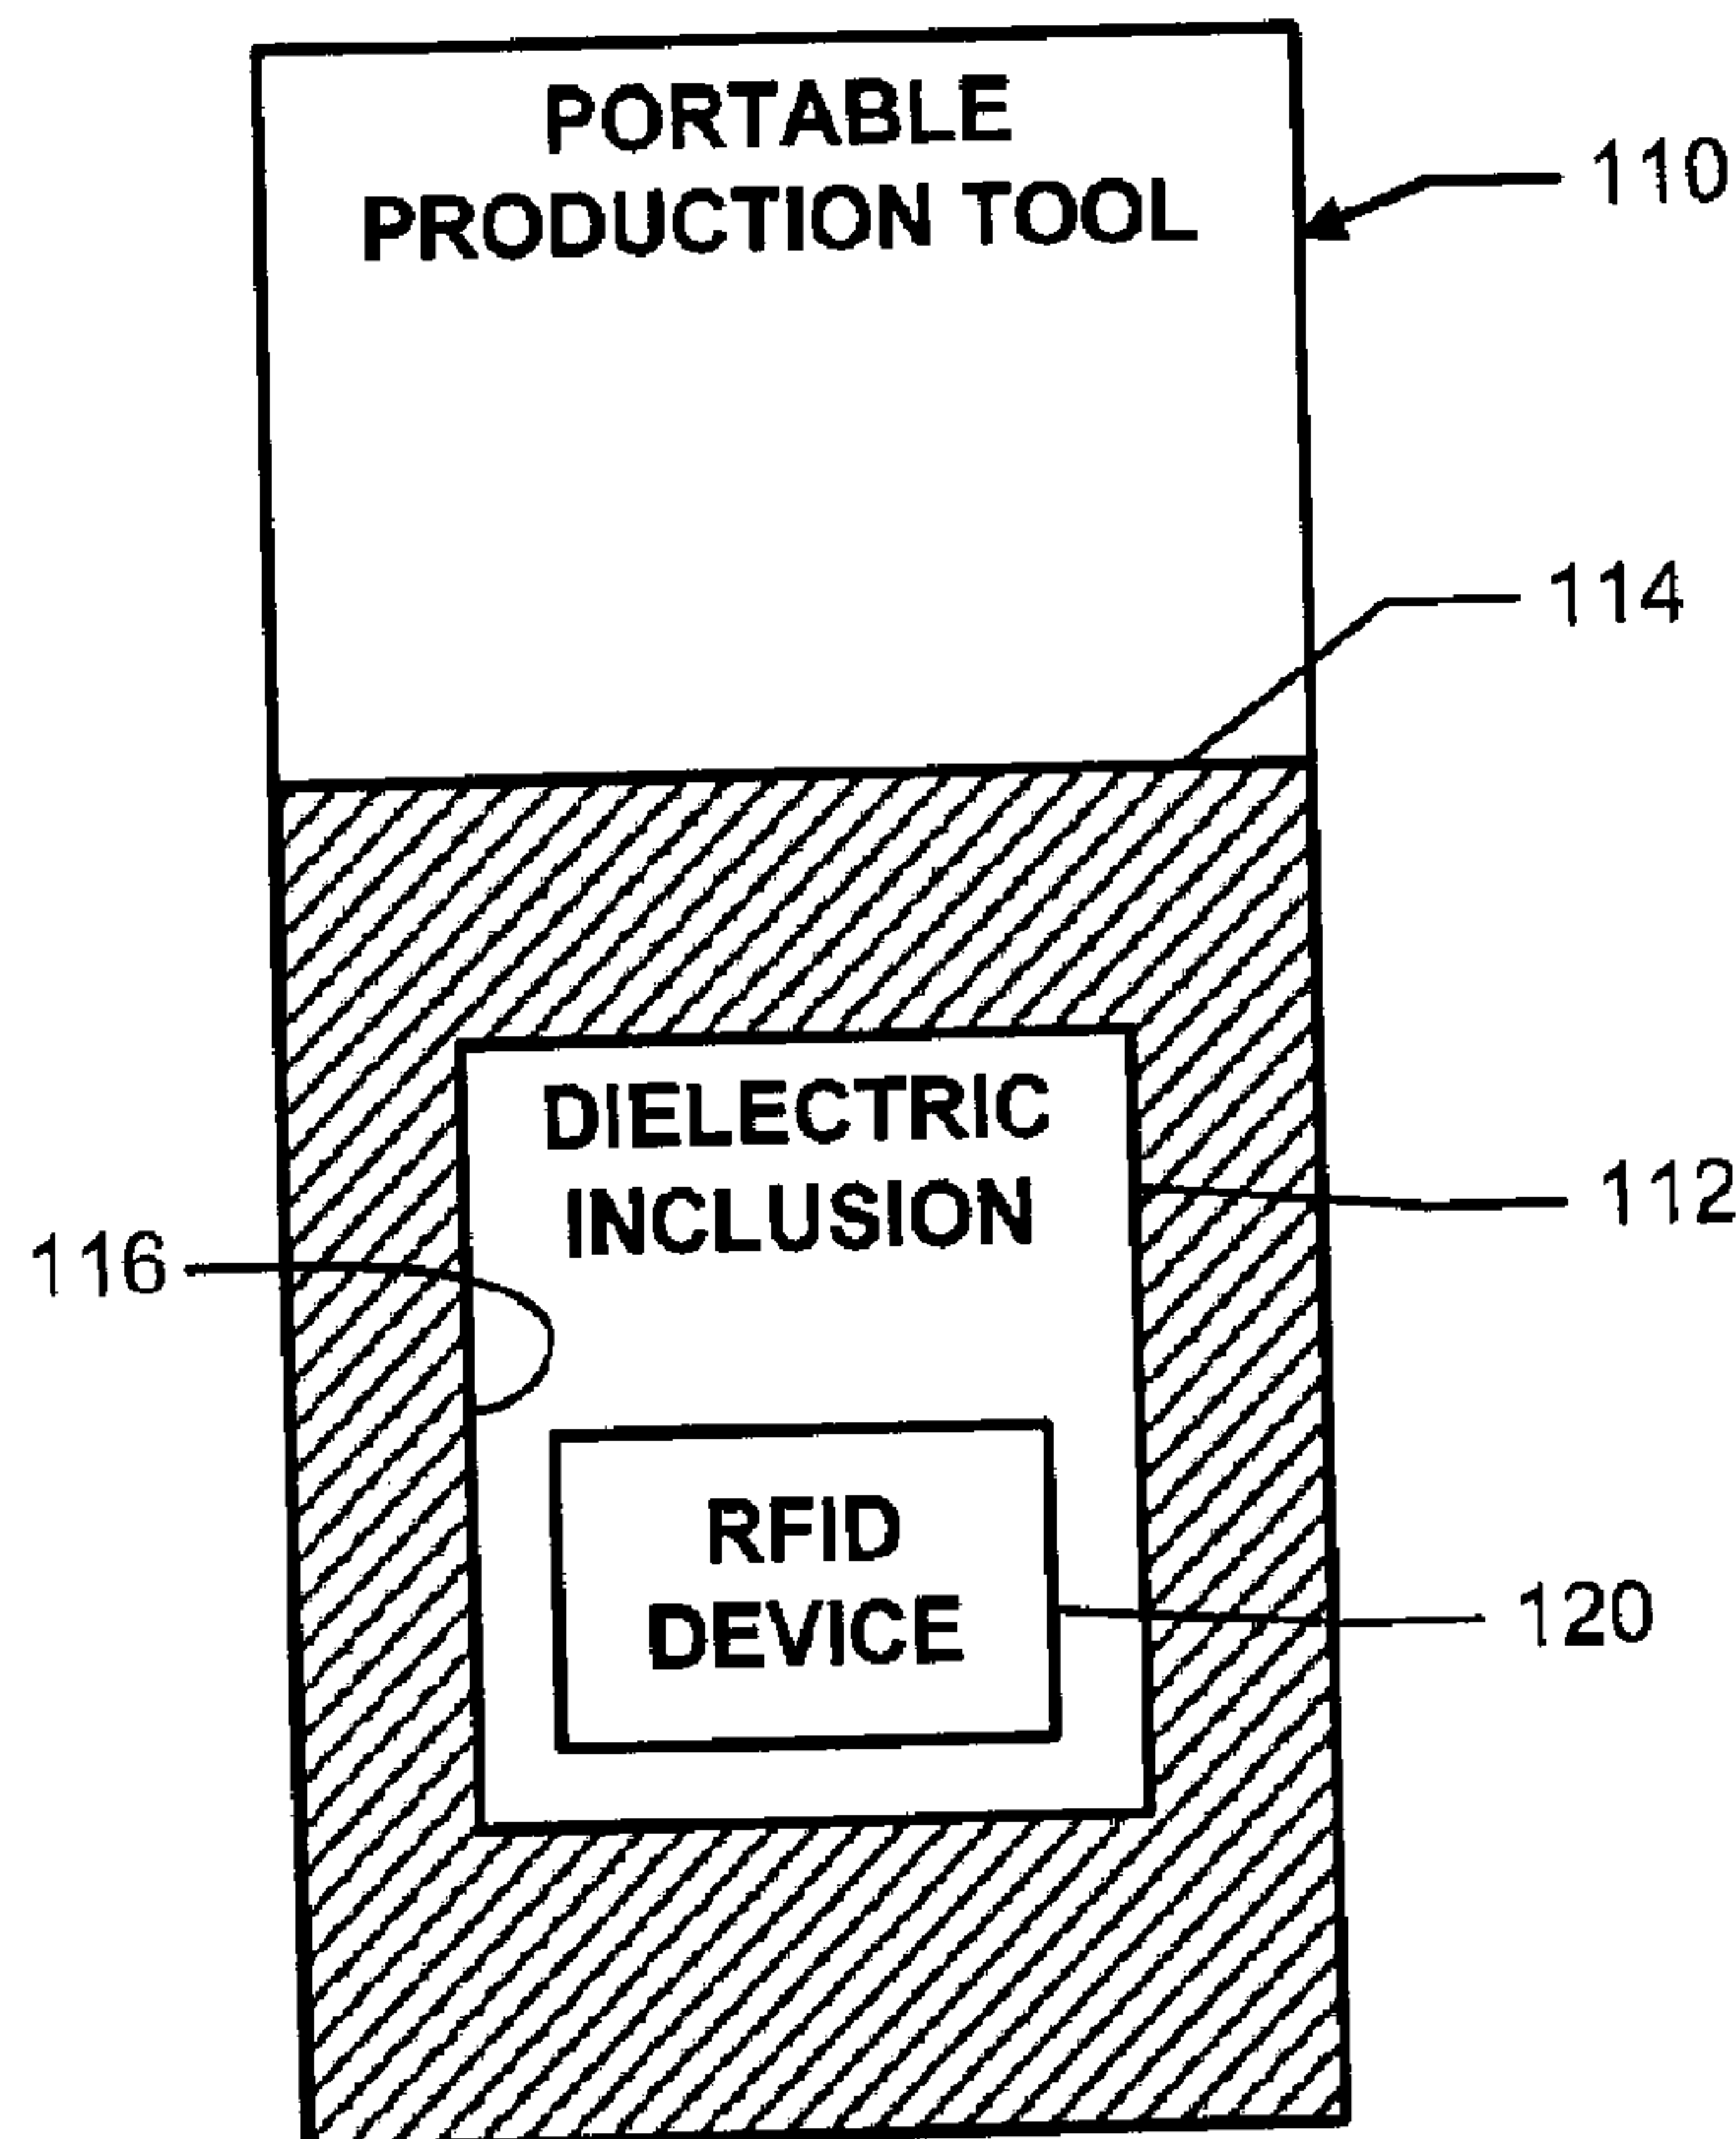

(57) **Abrégé/Abstract:**

A production tool has a dielectric inclusion, and an RFID device mounted within the dielectric inclusion.

**ABSTRACT**

A production tool has a dielectric inclusion, and an RFID device mounted within the dielectric inclusion.

**PRODUCTION TOOL HAVING RFID DEVICE  
MOUNTED WITHIN A DIELECTRIC INCLUSION**

**BACKGROUND**

5 A factory for producing large commercial aircraft may include thousands of high-precision tools dispersed over a very large area. Floor areas of the largest factories are on the order of millions of square feet.

Keeping track of the locations of portable tools in these factories is a daunting task. RFID tags may be embedded in the tools, but the embedded tags have limited ranges.

**SUMMARY**

10 According to an aspect of the present disclosure there is provided an apparatus that includes a portable production tool having a dielectric inclusion, and an RFID device mounted within the dielectric inclusion.

The tool may have a solid dielectric portion and the dielectric inclusion may be entirely within the solid portion. The solid portion may be part of a tool handle. The dielectric inclusion may include air. The dielectric inclusion may have a permittivity of unity. The RFID device may be attached to the solid portion at a wall defining the dielectric inclusion. An inclusion medium may fill a space between the RFID device and other walls defining the dielectric inclusion. The dielectric inclusion may be configured to create a discontinuity in the tool portion, which causes electromagnetic waves incident on the tool to create incident and the reflected waves, the waves undergoing constructive interference. The RFID device may include a linearly polarized antenna.

25 According to a further aspect of the present disclosure there is provided a portable production tool that includes a solid dielectric portion having inner walls that define a dielectric inclusion, and an RFID device within the dielectric inclusion, the RFID device attached to one of the inner walls. The dielectric inclusion is configured to cause electromagnetic waves incident on the tool to create incident and reflected waves, which undergo constructive interference.

The solid portion may be part of a tool handle. The dielectric inclusion may include air. The dielectric inclusion may have a permittivity of unity. The RFID device may be attached to the solid portion at a wall defining the dielectric inclusion. An inclusion medium may fill a space between the RFID device and other walls defining the dielectric inclusion.

5 According to a yet further aspect of the present disclosure there is provided a factory that includes a plurality of portable production tools at various locations within the factory. Each tool has a dielectric inclusion and an RFID device within the dielectric inclusion. Each RFID device stores information about its corresponding tool. The factory further comprises a plurality of RFID readers distributed about the factory, and a processing system, responsive to  
10 the readers, for tracking the locations of the tools within the factory.

The processing system may help ensure that the tools are being used on the designated job. The processing system may also help ensure that the tools are not accidentally left behind in an assembly. The processing system may also help ensure that the tools are calibrated. The factory may be an aircraft factory.

15 According to a further aspect of the present disclosure there is provided an apparatus comprising: a portable production tool having a dielectric inclusion, the dielectric inclusion including a cavity within a portion of the tool; and an RFID device mounted within the cavity, the RFID device including an antenna located entirely within the cavity, wherein the dielectric inclusion is configured to cause electromagnetic waves incident on the tool to create reflected  
20 waves, the incident waves and the reflected waves undergoing constructive interference to extend a communications range of the RFID device.

According to a further aspect of the present disclosure there is provided a portable production tool comprising: a solid dielectric portion having inner walls that define a dielectric inclusion; and an RFID device within the dielectric inclusion, the RFID device attached to one  
25 of the inner walls; the dielectric inclusion configured to create a discontinuity that causes incident electromagnetic waves generated by the RFID device to undergo reflections, which undergo constructive interference with the incident waves.

According to a further aspect of the present disclosure there is provided a factory comprising: a plurality of portable production tools at various locations within the factory,  
30 each tool having a portion containing a dielectric inclusion having a cavity; a plurality of

RFID devices, wherein each of the plurality of RFID devices includes a respective antenna entirely within the cavity of a corresponding tool of the plurality of portable production tools and stores information about the corresponding tool, wherein the dielectric inclusion of each tool of the plurality of portable production tools is configured to create a discontinuity in the  
5 tool portion of the tool, which causes electromagnetic waves incident on the tool to create reflected waves, the incident waves and the reflected waves undergoing constructive interference to extend a communications range of the RFID device; a plurality of RFID readers distributed within the factory; and a processing system, responsive to the plurality of readers, for tracking the locations of the tools within the factory.

10           These features and functions may be achieved independently in various embodiments or may be combined in other embodiments. Further details of the embodiments can be seen with reference to the following description and drawings.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is an illustration of a portable production tool having a dielectric inclusion and  
15 an RFID device mounted in the dielectric inclusion.

Figure 2 is an illustration of an example of an RFID device.

Figure 3 is an illustration of a portable tool and an RFID reader.

Figure 4 is an illustration of a first tool body having an RFID device mounted in a dielectric inclusion.

20           Figure 5 is an illustration of a second tool body having an RFID device mounted in a dielectric inclusion.

Figure 6 is an illustration of a third tool body having an RFID device mounted in a dielectric inclusion:

Figure 7 is an illustration of a factory including a plurality of tagged production tools.

### **DETAILED DESCRIPTION**

5 Reference is made to Figure 1, which illustrates a portable production tool **110** having a dielectric inclusion **112** and a radio frequency identification (RFID) device **120** mounted in the dielectric inclusion **112**. The production tool **110** is not limited to anything in particular. Examples of the tool **110** may include, without limitation, manual tools such as screw drivers, wrenches, and portable power feed tools, and other larger shop tools such as grinders, saws, and  
10 lathes.

That portion **114** of the tool **110** having the dielectric inclusion **112** is made of a non-conducting material. The portion **114** may be part of, for example, a handle, tool holder, tool case, or tool cover of the tool **110**.

The dielectric inclusion **112** includes a cavity that is defined by inner walls **116** of the  
15 tool portion **114**. The RFID device **120** may be mounted to one of the walls **116**. There is space between the other walls **116** and the RFID device **120**. The space is filled with a dielectric inclusion medium. The shape of the dielectric inclusion **112** is not limited to anything in particular, except to follow the contour of the tool **110**. Examples of the shape of the dielectric inclusion **112** may include, without limitation, cuboid (box shape), right circular cylinder,  
20 annular shaped cavity, and C-shaped.

The electrical property (permittivity) of the material used to make the tool portion **114** is different than that of the inclusion medium. The permittivity of the tool portion **114** may be higher or lower than that of the dielectric inclusion medium **112**. In some embodiments, the permittivity of the dielectric inclusion medium is unity, which constitutes an air box.

25 The dielectric inclusion **112** creates a discontinuity in the tool portion **114**. Due to this discontinuity, electromagnetic waves (from an RFID reader during interrogation, or the RFID device **120** during transmission) incident on the tool **110** undergo reflections. Depending on the

size, shape, location, and permittivity of the dielectric inclusion **112** and size, shape, and permittivity of the tool portion **114**, incident and the reflected waves undergo constructive interference. The constructive interference enhances electromagnetic field strength at specific locations within the tool.

5 Reference is made to Figure 2, which illustrates an example of an RFID device **120**. The RFID device **120** of Figure 2 includes a processor **210**, machine-readable memory **220**, transceiver **230**, and antenna **240**. The antenna **240** may be linearly polarized. In some embodiments, the RFID device **120** may be supplied with operating power by a battery or other internal source. In other embodiments, the power may be harvested or it may be supplied by the  
10 tool **110** or other external source.

Tool information **222** is stored in the memory **220**. The tool information **222** may identify the tool **110**, for instance, by a number (e.g., a part number, serial number, etc.). The information **222** may identify a production job to be performed by the tool **110**. A production job may be identified, for instance, by assembly procedure number. The information **222** may  
15 identify tool characteristics, such as weight, precision, hammering force, etc.

Additional reference is made to Figure 3, which shows the tool **110** within communication range of an RFID reader **310**. The reader **310** may include a circularly polarized RFID reader antenna **320**. The electric field of the electromagnetic wave radiated by a circularly polarized antenna rotates as a function of time. The linearly polarized antenna **240** of the RFID  
20 device **120** may be read by the circularly polarized antenna of the RFID reader **310** irrespective of the orientation of the RFID device **120**.

When interrogated by the RFID reader **310**, the RFID device **120** communicates tool information **222** to the reader **310**. In some embodiments, the communications may be bi-directional, whereby the RFID reader **310** may also send data to the RFID device **120**.

25 Locating the RFID device **120** within the tool portion **114** offers certain advantages. Whereas RFID devices mounted on an outer surface of a tool can hinder the tool performance, the RFID device **120** does not hinder tool performance. Further, the RFID device **120** is

protected from environmental effects and wear and tear due to handling. It is also protected against tampering. Still further, the RFID device 120 will not fall off the tool 110 and become lost.

5 Locating the RFID device 120 within the dielectric inclusion 112 provides a significant advantage. Consider the antennas of the RFID reader 310 and the RFID device 120 as two ports of a two port network. S21 is a measure of coupling between the two antennas. The applicants have conducted tests and found that the S21 coupling for an RFID device 120 within an air box (a type of dielectric inclusion 112) of the tool 110 is substantially higher than the S21 coupling for an RFID device that is simply embedded within a tool.

10 Locating the RFID device 120 within the dielectric inclusion 112 substantially extends communications range of the RFID device 120. Consequently, communications between the RFID device 120 and the RFID reader 310 may be performed over greater distances. The extended range is especially advantageous for factories having very large floor areas and a large number of portable tools, as it makes tool tracking more feasible. A fewer number of RFID  
15 readers 310 would be needed to communicate with a large plurality of RFID devices 120.

Reference is now made to Figure 4, which illustrates a tool 110 including a tool body 410 having a cylindrical shape. In some embodiments, the tool body 410 may be a tool handle. The tool body 410 has a solid portion 412 and a dielectric inclusion 414. Although the dielectric inclusion 414 is not limited to any particular geometry, it may have the geometry of a rectangular  
20 prism. An RFID device 120 is attached to an inner wall defining the dielectric inclusion 414 and extends in an axial direction. The RFID device 120 may be attached to the surface using an adhesive or fasteners. The dielectric inclusion 414 may include a dielectric medium having a lower permittivity than the material of the solid portion 412. As a first example, the solid portion 412 may be made of polytetrafluoroethylene (PTFE), and the inclusion medium may be air. As a  
25 second example, the inclusion medium may be a liquid material that solidifies naturally or with thermal treatment. The solidified liquid may help in securing the RFID device 120 within the dielectric inclusion 414.

The dielectric inclusion **414** has a length (not illustrated), width (w) and thickness (t). The dielectric inclusion **414** is positioned at a distance (d) from the surface of tool body **410**. The distance (d) to the surface and the thickness (t) of the dielectric inclusion **414** are chosen such that due to constructive interference the electromagnetic field enhancement occurs. The applicants have observed for a dielectric inclusion medium of air and a cylindrical tool body **410** made of PTFE and having a diameter of **32** mm, the field enhancement occurs for d greater than **6** mm when t is equal to **9** mm. If t is reduced to **4** mm, the field enhancement occurs if d is greater than **5** mm. It is observed that as t increases, the minimum value of d that achieves field enhancement also increases. Other combinations of t and d may result in field enhancement. Electromagnetic analysis and measurements may be used to identify these combinations.

Figure **5** illustrates another example of a tool **110**. The tool **110** of Figure **5** includes a tool body **510** in the shape of a rectangular prism and a dielectric inclusion **512** also in the shape of a rectangular prism. An RFID device **120** is mounted to an inner wall of the tool body **510** and extends in an axial direction. Consider a tool body **510** that is made of PTFE and has a **32** mm by **32** mm cross section and t=**9** mm. The applicants observed field enhancement for  $d > 6$  mm. When t was reduced to **7** mm, the observed field enhancement was observed for  $d > 5$  mm. Further reducing t to **5** mm resulted in a range of  $5 \text{ mm} < d < 11 \text{ mm}$  for which field enhancement was observed. On reducing the value of t to **4** mm, the field enhancement occurred for  $3 \text{ mm} < d < 8 \text{ mm}$ . Here also the applicants have observed field enhancement beyond a specific value of d.

Figure **6** illustrates another example of a tool **110**. The tool **120** of Figure **6** includes a body **610** having a planar shape and a dielectric inclusion **612** extending along a plane of the tool body **610**. An RFID device **120** may be adhesively bonded to the surface of the dielectric inclusion **612**. Due to the change in the aspect ratio of the cross section of the tool **110**, for a given value of t, field enhancement is observed if the value of d is below a certain depth. For example, field enhancement is observed for t=**9**mm and  $d < 8$  mm. For t=**4** mm, the maximum value of d at which field enhancement occurs is also reduced to **5** mm.

Structurally the examples of Figures **5** and **6** are very similar and differ only in aspect ratio. However, the electrical performances are very different.

Reference is now made to Figure 7, which illustrates a factory 710 for producing a complex system. The factory 710 includes a large plurality of production tools at various locations within the factory 710. The production tools may be used to fabricate parts from raw materials, assemble parts and assemblies into larger assemblies, etc. A factory 710 for producing commercial aircraft may include thousands of high-precision tools dispersed over millions of square feet.

The production tools may include tools (e.g., milling machines) that are fixed to a location in the factory 710. The production tools may also include portable tools 720, which may be moved from location to location within the factory 710. At least some of the portable production tools 720 have dielectric inclusions and RFID devices within the dielectric inclusions as described herein. The RFID devices may store and communicate information about their tools (e.g., tool identification number, tool characteristics, job identifier).

The factory 710 further includes a plurality of RFID readers 730 distributed about the facility. Each RFID reader 730 is programmed to interrogate RFID devices. As a result of the extended range of the RFID devices herein, a fewer number of readers 730 may be distributed about the factory 710, and still be able to communicate with all of the RFID devices. In addition, RFID readers 730 may be placed at select locations, such as dock doors, work stations, tool cribs, etc.

Information detected by the RFID readers 730 may be forwarded to a processing system 740. The processing system 740 tracks the locations of the portable tools 720 and ensures that the portable tools 720 are being used on the correct job. Consequently, the processing system 740 can prevent tools from being left behind in an assembly by accident. The processing system 740 may also prevent tools from being removed from the factory, and it can manage the inventory of tools.

The processing system 740 may also ensure that the tools are properly calibrated. For instance, an RFID tag could indicate the last date of calibration by an instrument laboratory. The processing system 740 may use that information to determine when a portable tool 720 should be recalibrated.

Information detected by the RFID readers 730 may be forwarded to a processing system 740. The processing system 740 collects unique ID signals transmitted from the RFID readers 730 using software middleware that interfaces to the readers 730. This detection is performed continuously in real time. The processing system 740 may match the unique ID information to an asset name and send this data to other integration processors such as an enterprise resource planning (ERP) database.

The processing system 740 tracks the locations of the portable tools 720 and sends this information to electronic work instructions within manufacturing execution system to verify portable tools 720 are being used on the correct job. Consequently, the processing system 740 may provide critical information to prevent wrong tools used on the jobs and establishes traceability from the tool unique ID to the job ID for facilitating tool utilization so they are not left behind in an assembly by accident. The processing system 740 may also prevent tools from being removed from the factory by linking the tool ID to a mechanic badge ID, and it can manage the inventory of tools.

The processing system 740 may also ensure that the tools are properly calibrated. For instance, an RFID device indicates the last date of calibration by an instrument laboratory. The processing system 740 may use that information to determine when a portable tool 720 should be recalibrated. The processing system 740 sends the calibrated tool's unique ID to a metrology system database. This database maintains the reference to the tool calibration expiration date. If a calibrated tool approaches the expiration date, an electronic alert notice is sent out to the tool custodian to return the tool to the calibration certification laboratory. If the custodian forgets to follow this message and the tool is accidentally used in a production process, the RFID device can be traced from the processing system and its associated work instruction system to facilitate the auditing process and rectify the error.

**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An apparatus comprising:

5 a portable production tool having a dielectric inclusion, the dielectric inclusion including a cavity within a portion of the tool; and

10 an RFID device mounted within the cavity, the RFID device including an antenna located entirely within the cavity, wherein the dielectric inclusion is configured to cause electromagnetic waves incident on the tool to create reflected waves, the incident waves and the reflected waves undergoing constructive interference to extend a communications range of the RFID device.

2. The apparatus of claim 1, wherein the tool portion is made of dielectric material; and wherein the dielectric inclusion is entirely within the tool portion and completely surrounded by the dielectric material.

- 15 3. The apparatus of claim 2, wherein the dielectric inclusion further includes an inclusion medium filling the cavity, the inclusion medium made of a material having a different permittivity than the dielectric material of the tool portion.

4. The apparatus of any one of claims 1 to 3, wherein the cavity is defined by an inner wall of the tool portion; and wherein the RFID device is attached to the inner wall.

- 20 5. The apparatus of claim 2, wherein:

the cavity is defined by at least one inner wall of the tool portion; and

a homogeneous dielectric inclusion medium fills all space between the RFID device and the at least one inner wall, the dielectric inclusion medium made of a material having a different permittivity than the dielectric material of the tool portion.

- 5    **6.**    The apparatus of any one of claims **1** to **4**, wherein the dielectric inclusion includes air within the cavity.
- 7.**    The apparatus of any one of claims **1** to **6**, wherein the tool portion is part of a tool handle.
- 8.**    The apparatus of any one of claims **1** to **7**, wherein the dielectric inclusion has a  
10        permittivity of unity.
- 9.**    The apparatus of any one of claims **1** to **8**, wherein the dielectric inclusion has a length, a thickness, and a width, and wherein the constructive interference causes field enhancement as a function of the thickness and a non-zero distance from the dielectric inclusion to an outer surface of the tool portion.
- 15    **10.**    The apparatus of any one of claims **1** to **9**, wherein the antenna is linearly polarized.
- 11.**    The apparatus of any one of claims **1** to **10**, wherein the dielectric inclusion is configured to create a discontinuity in the tool portion, and wherein the discontinuity in the tool portion causes the electromagnetic waves incident on the tool to create the reflected waves.
- 20    **12.**    A portable production tool comprising:

      a solid dielectric portion having inner walls that define a dielectric inclusion;  
      and

an RFID device within the dielectric inclusion, the RFID device attached to one of the inner walls;

the dielectric inclusion configured to create a discontinuity that causes incident electromagnetic waves generated by the RFID device to undergo reflections, which undergo constructive interference with the incident waves.

5

**13.** The tool of claim **12**, wherein the solid dielectric portion is part of a tool handle.

**14.** The tool of claim **12** or **13**, wherein the dielectric inclusion includes air between the walls and the RFID device.

10

**15.** The tool of any one of claims **12** to **14**, wherein the dielectric inclusion has a permittivity of unity.

**16.** The tool of any one of claims **12** to **15**, wherein the RFID device is attached to one of the inner walls.

15

**17.** The tool of any one of claims **12** to **15**, wherein the RFID device is attached to the solid dielectric portion at a wall defining the dielectric inclusion; and wherein an inclusion medium fills a space between the RFID device and other walls defining the dielectric inclusion.

**18.** The tool of any one of claims **12** to **17**, wherein the RFID device has an antenna, and wherein the RFID device and the antenna are entirely within the dielectric inclusion.

20

**19.** The tool of any one of claims **12** to **18**, wherein the dielectric inclusion has a length, a thickness, and a width, and wherein the constructive interference causes field enhancement as a function of the thickness and a non-zero distance from the dielectric inclusion to an outer surface of the solid dielectric portion.

**20.** A factory comprising:

a plurality of portable production tools at various locations within the factory,  
each tool having a portion containing a dielectric inclusion having a cavity;

a plurality of RFID devices, wherein each of the plurality of RFID devices  
includes a respective antenna entirely within the cavity of a corresponding tool  
of the plurality of portable production tools and stores information about the  
corresponding tool, wherein the dielectric inclusion of each tool of the plurality  
of portable production tools is configured to create a discontinuity in the tool  
portion of the tool, which causes electromagnetic waves incident on the tool to  
create reflected waves, the incident waves and the reflected waves undergoing  
constructive interference to extend a communications range of the RFID device;


a plurality of RFID readers distributed within the factory; and

a processing system, responsive to the plurality of readers, for tracking the  
locations of the tools within the factory.


- 21.** The factory of claim **20**, wherein the processing system is configured to ensure that the tools are being used on a designated job.
- 22.** The factory of claim **20** or **21**, wherein the processing system is configured to ensure that the tools are not accidentally left behind in an assembly.
- 23.** The factory of any one of claims **20** to **22**, wherein the processing system is configured to ensure that the tools are calibrated.
- 24.** The factory of any one of claims **20** to **23**, wherein the factory is an aircraft factory.

25. The factory of any one of claims **20** to **24**, wherein, for each of the plurality of portable production tools, the dielectric inclusion has a length, a thickness, and a width, and wherein the constructive interference causes field enhancement as a function of the thickness and a non-zero distance from the dielectric inclusion to an outer surface of the tool portion.

5

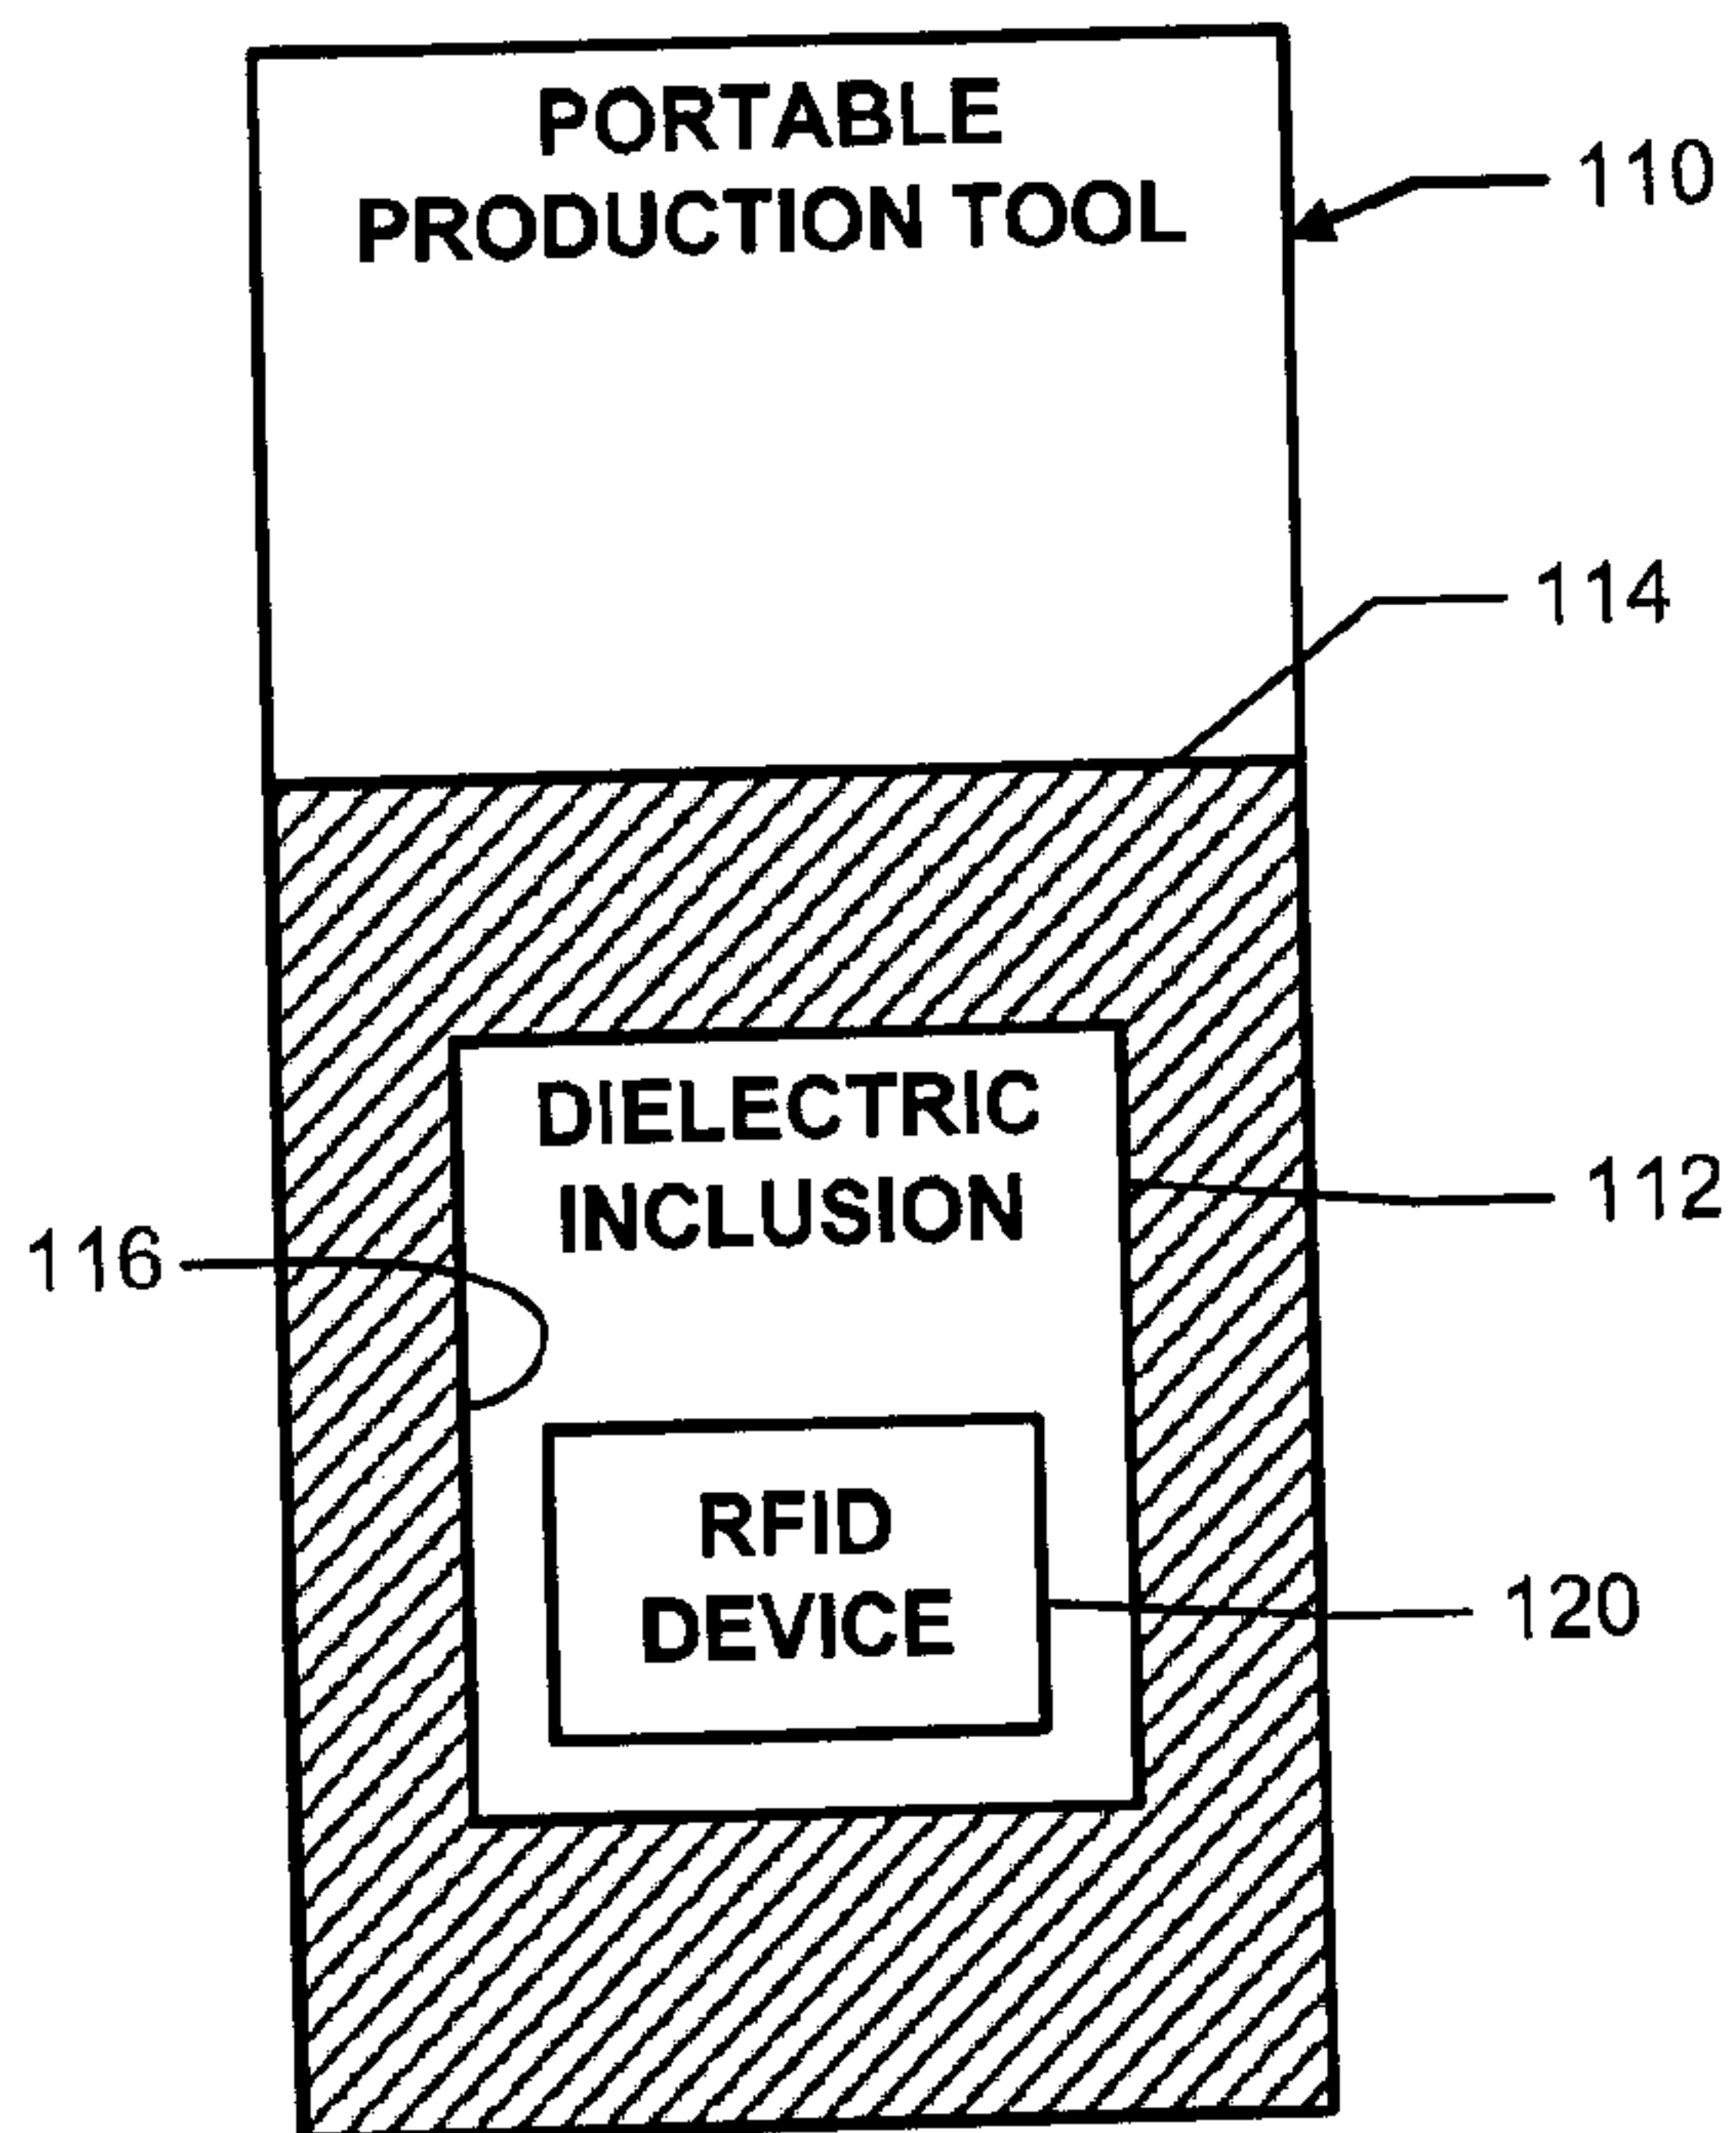

**FIG. 1**

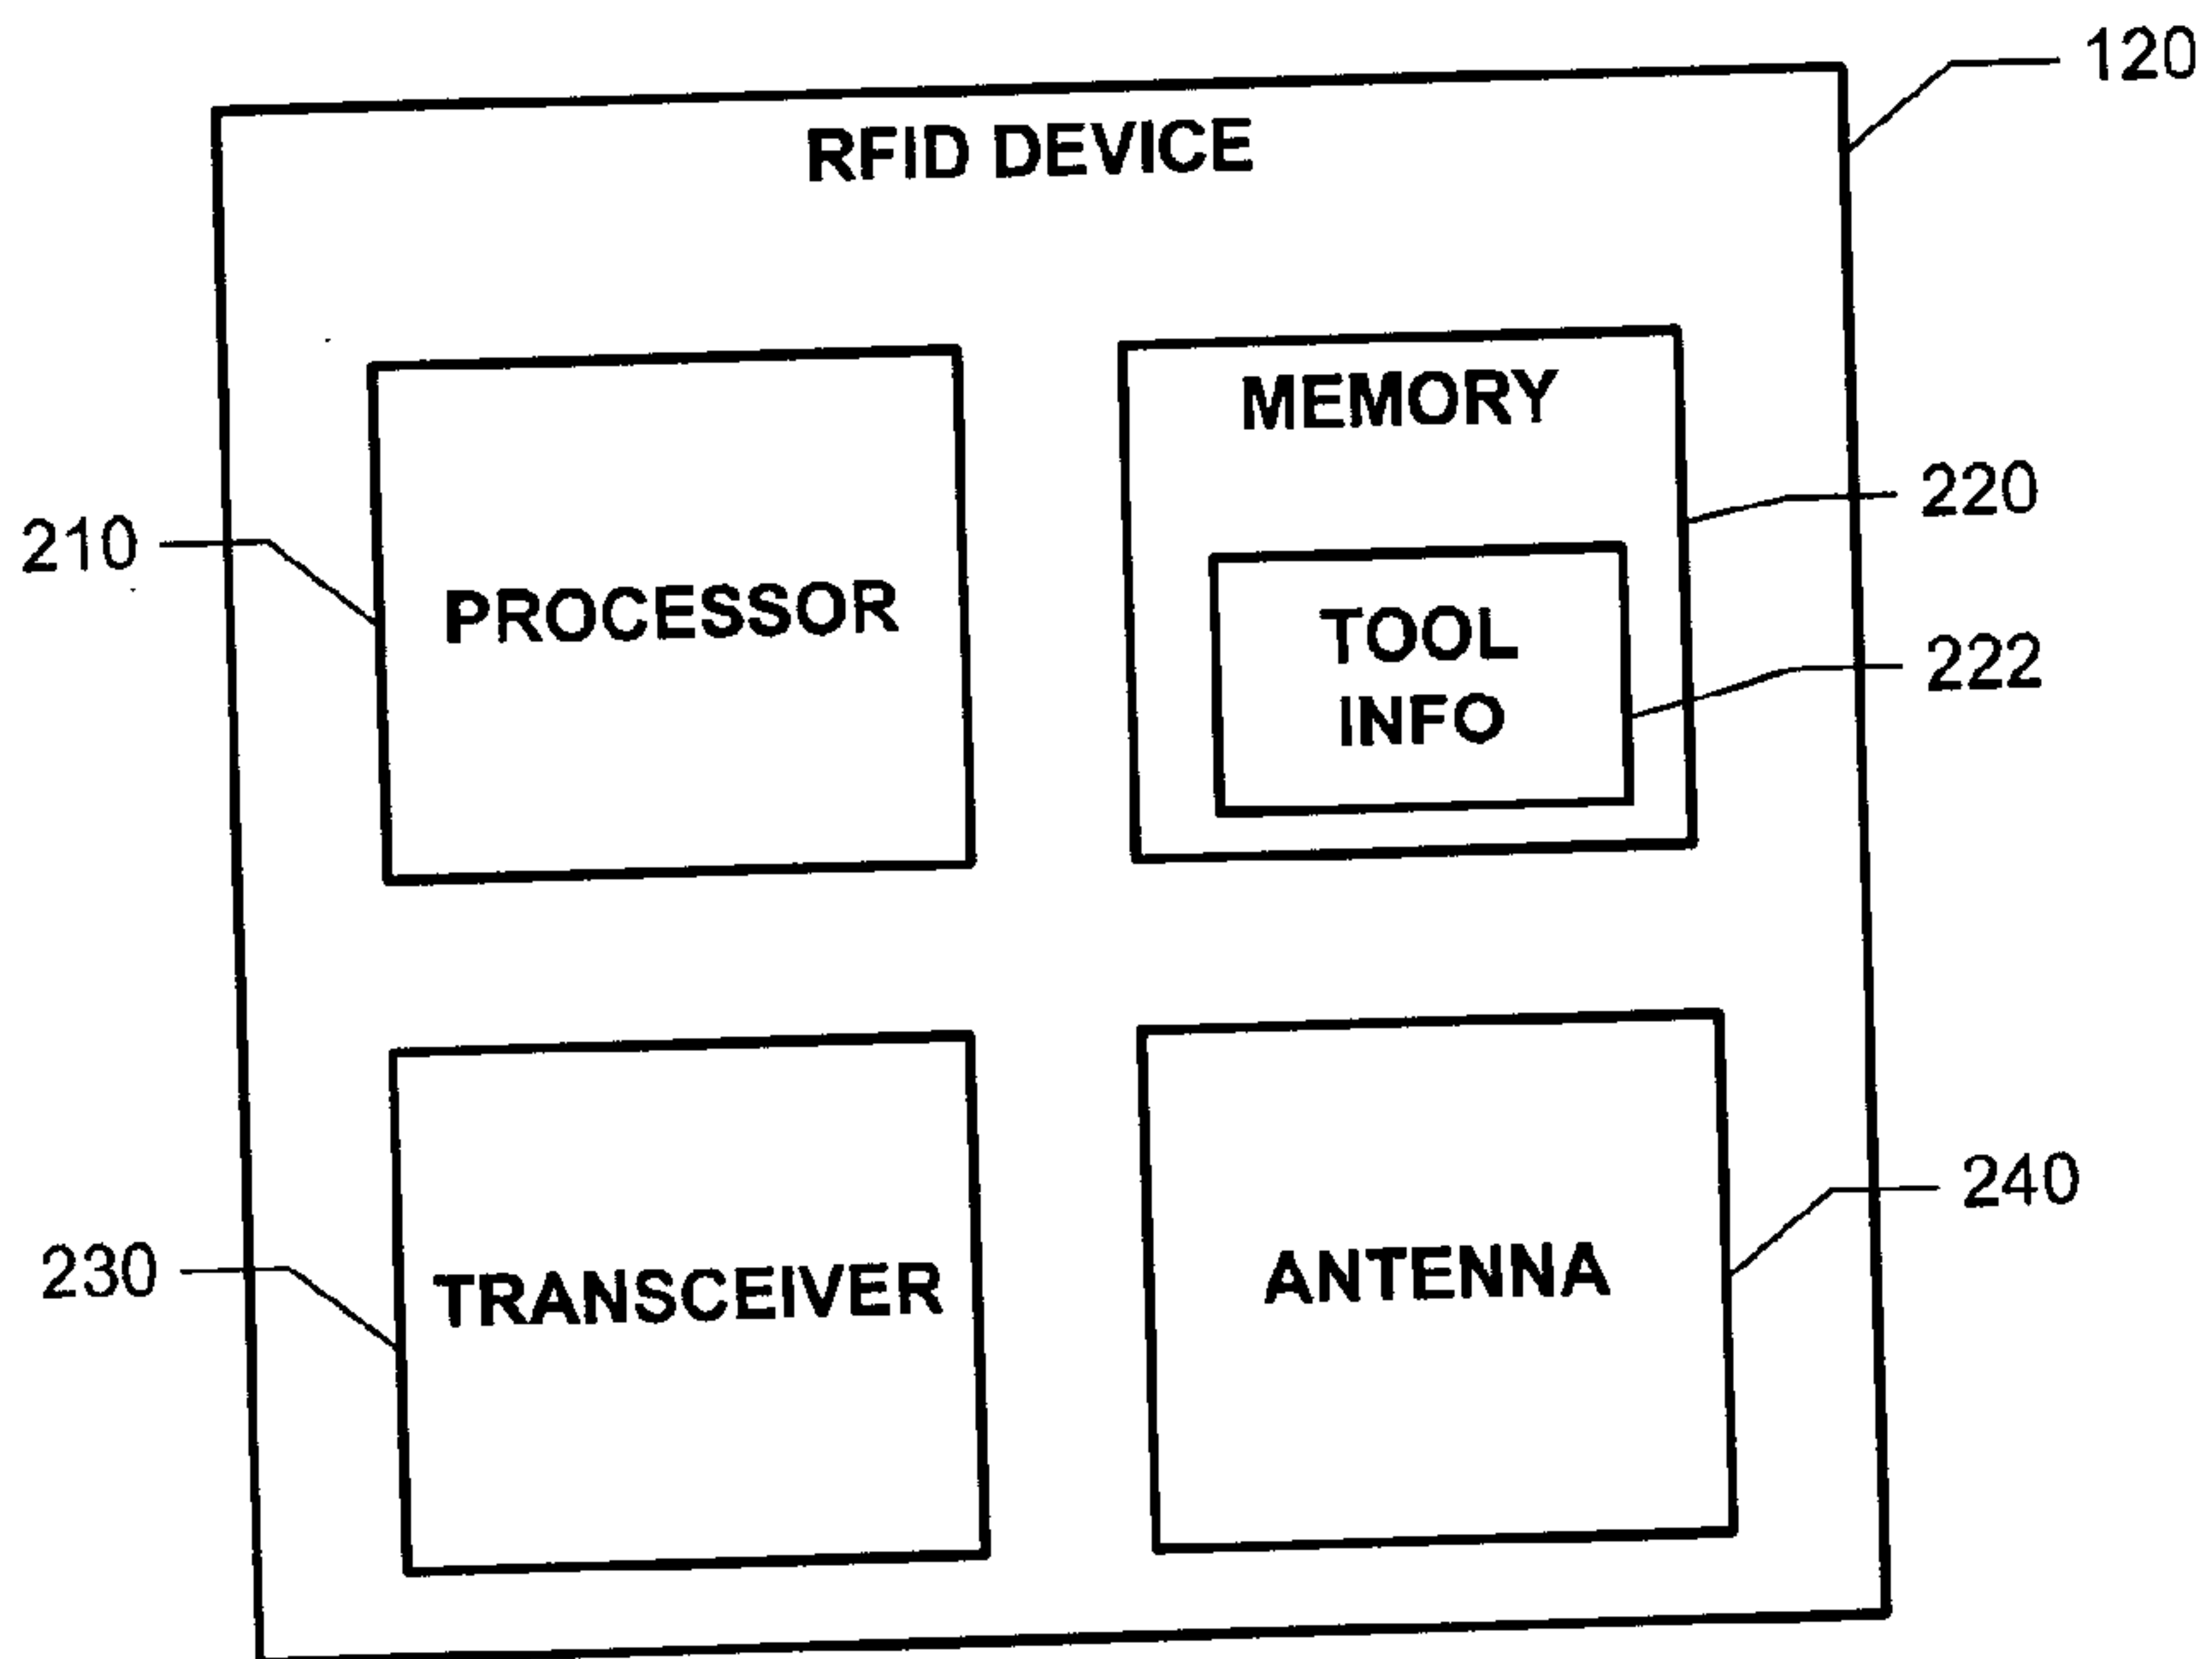

**FIG. 2**

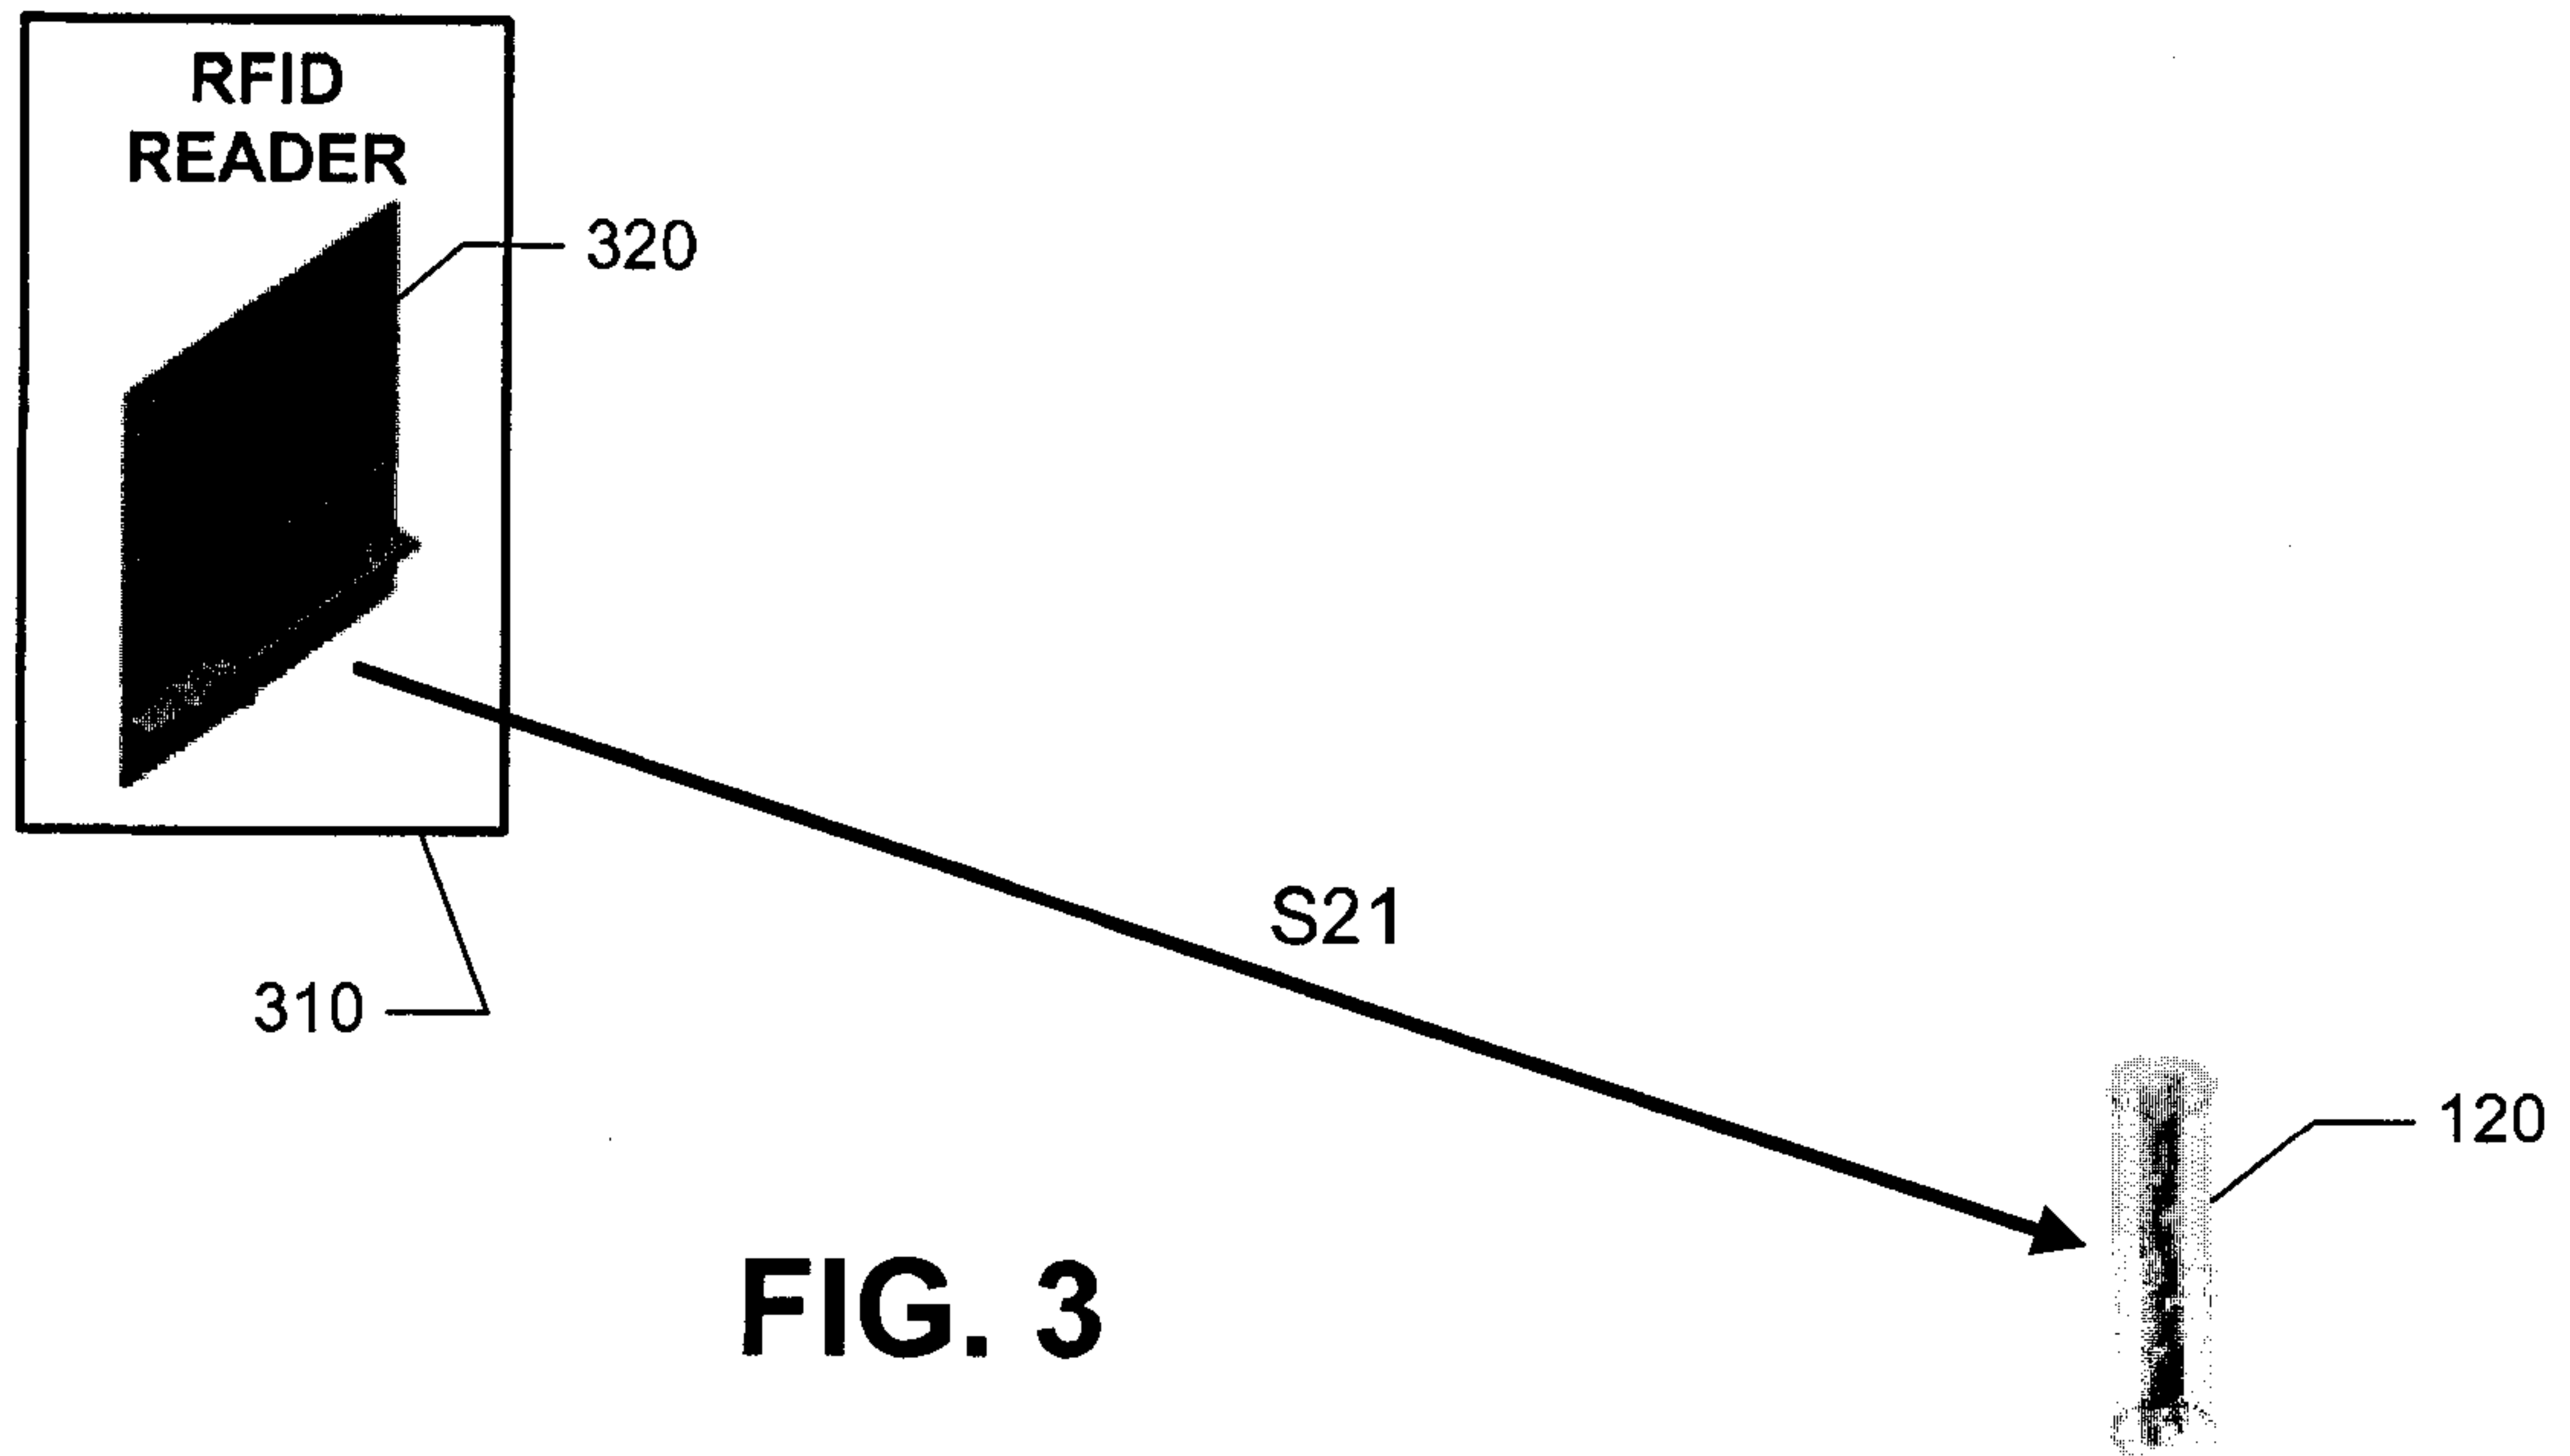


FIG. 3

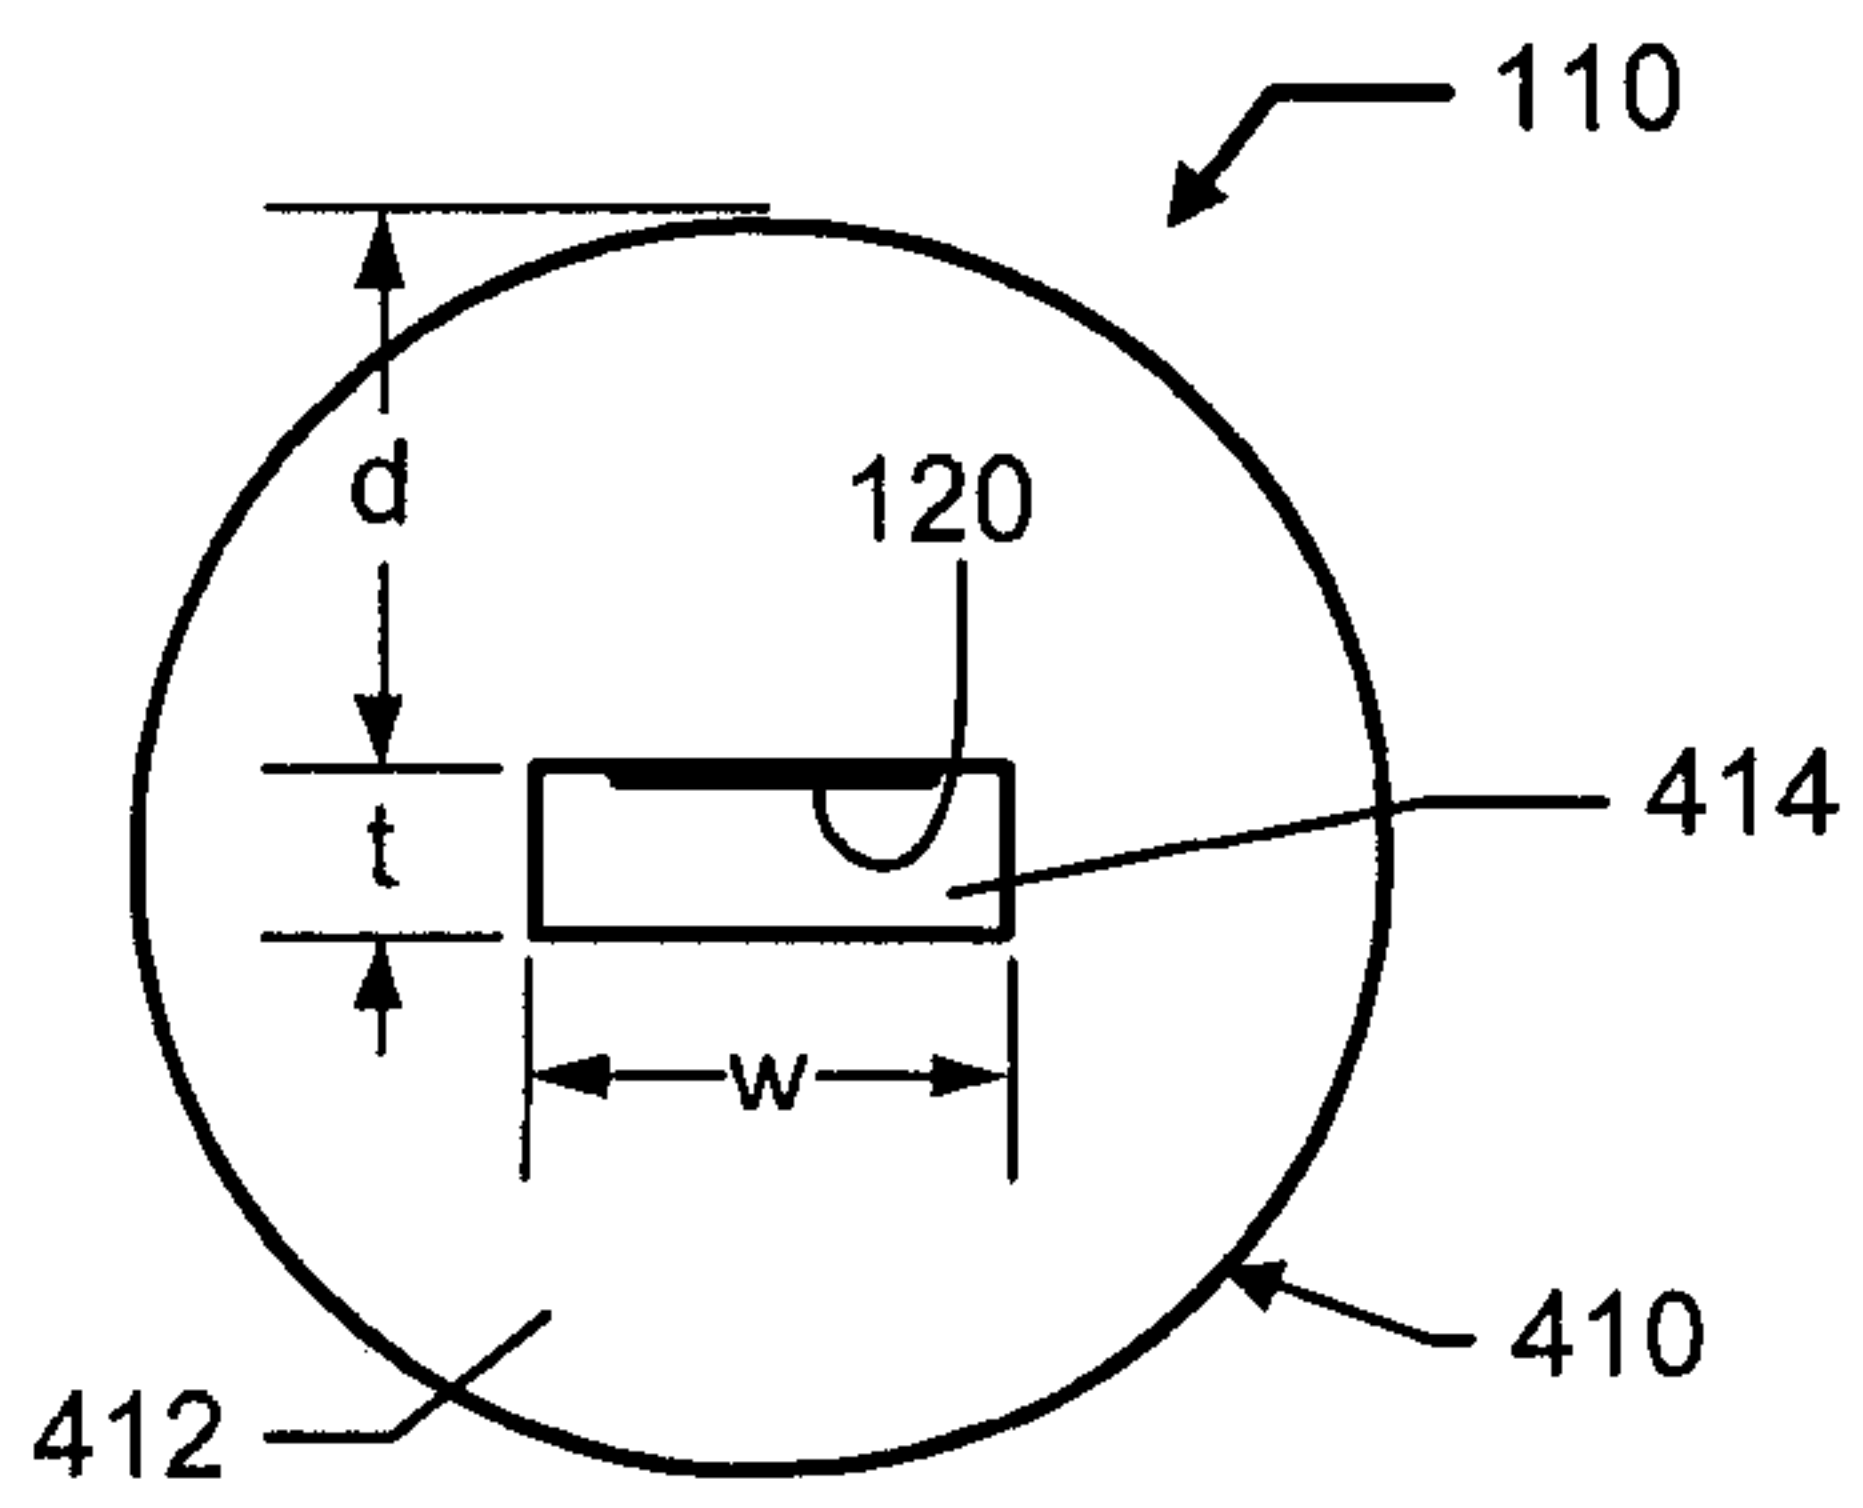


FIG. 4



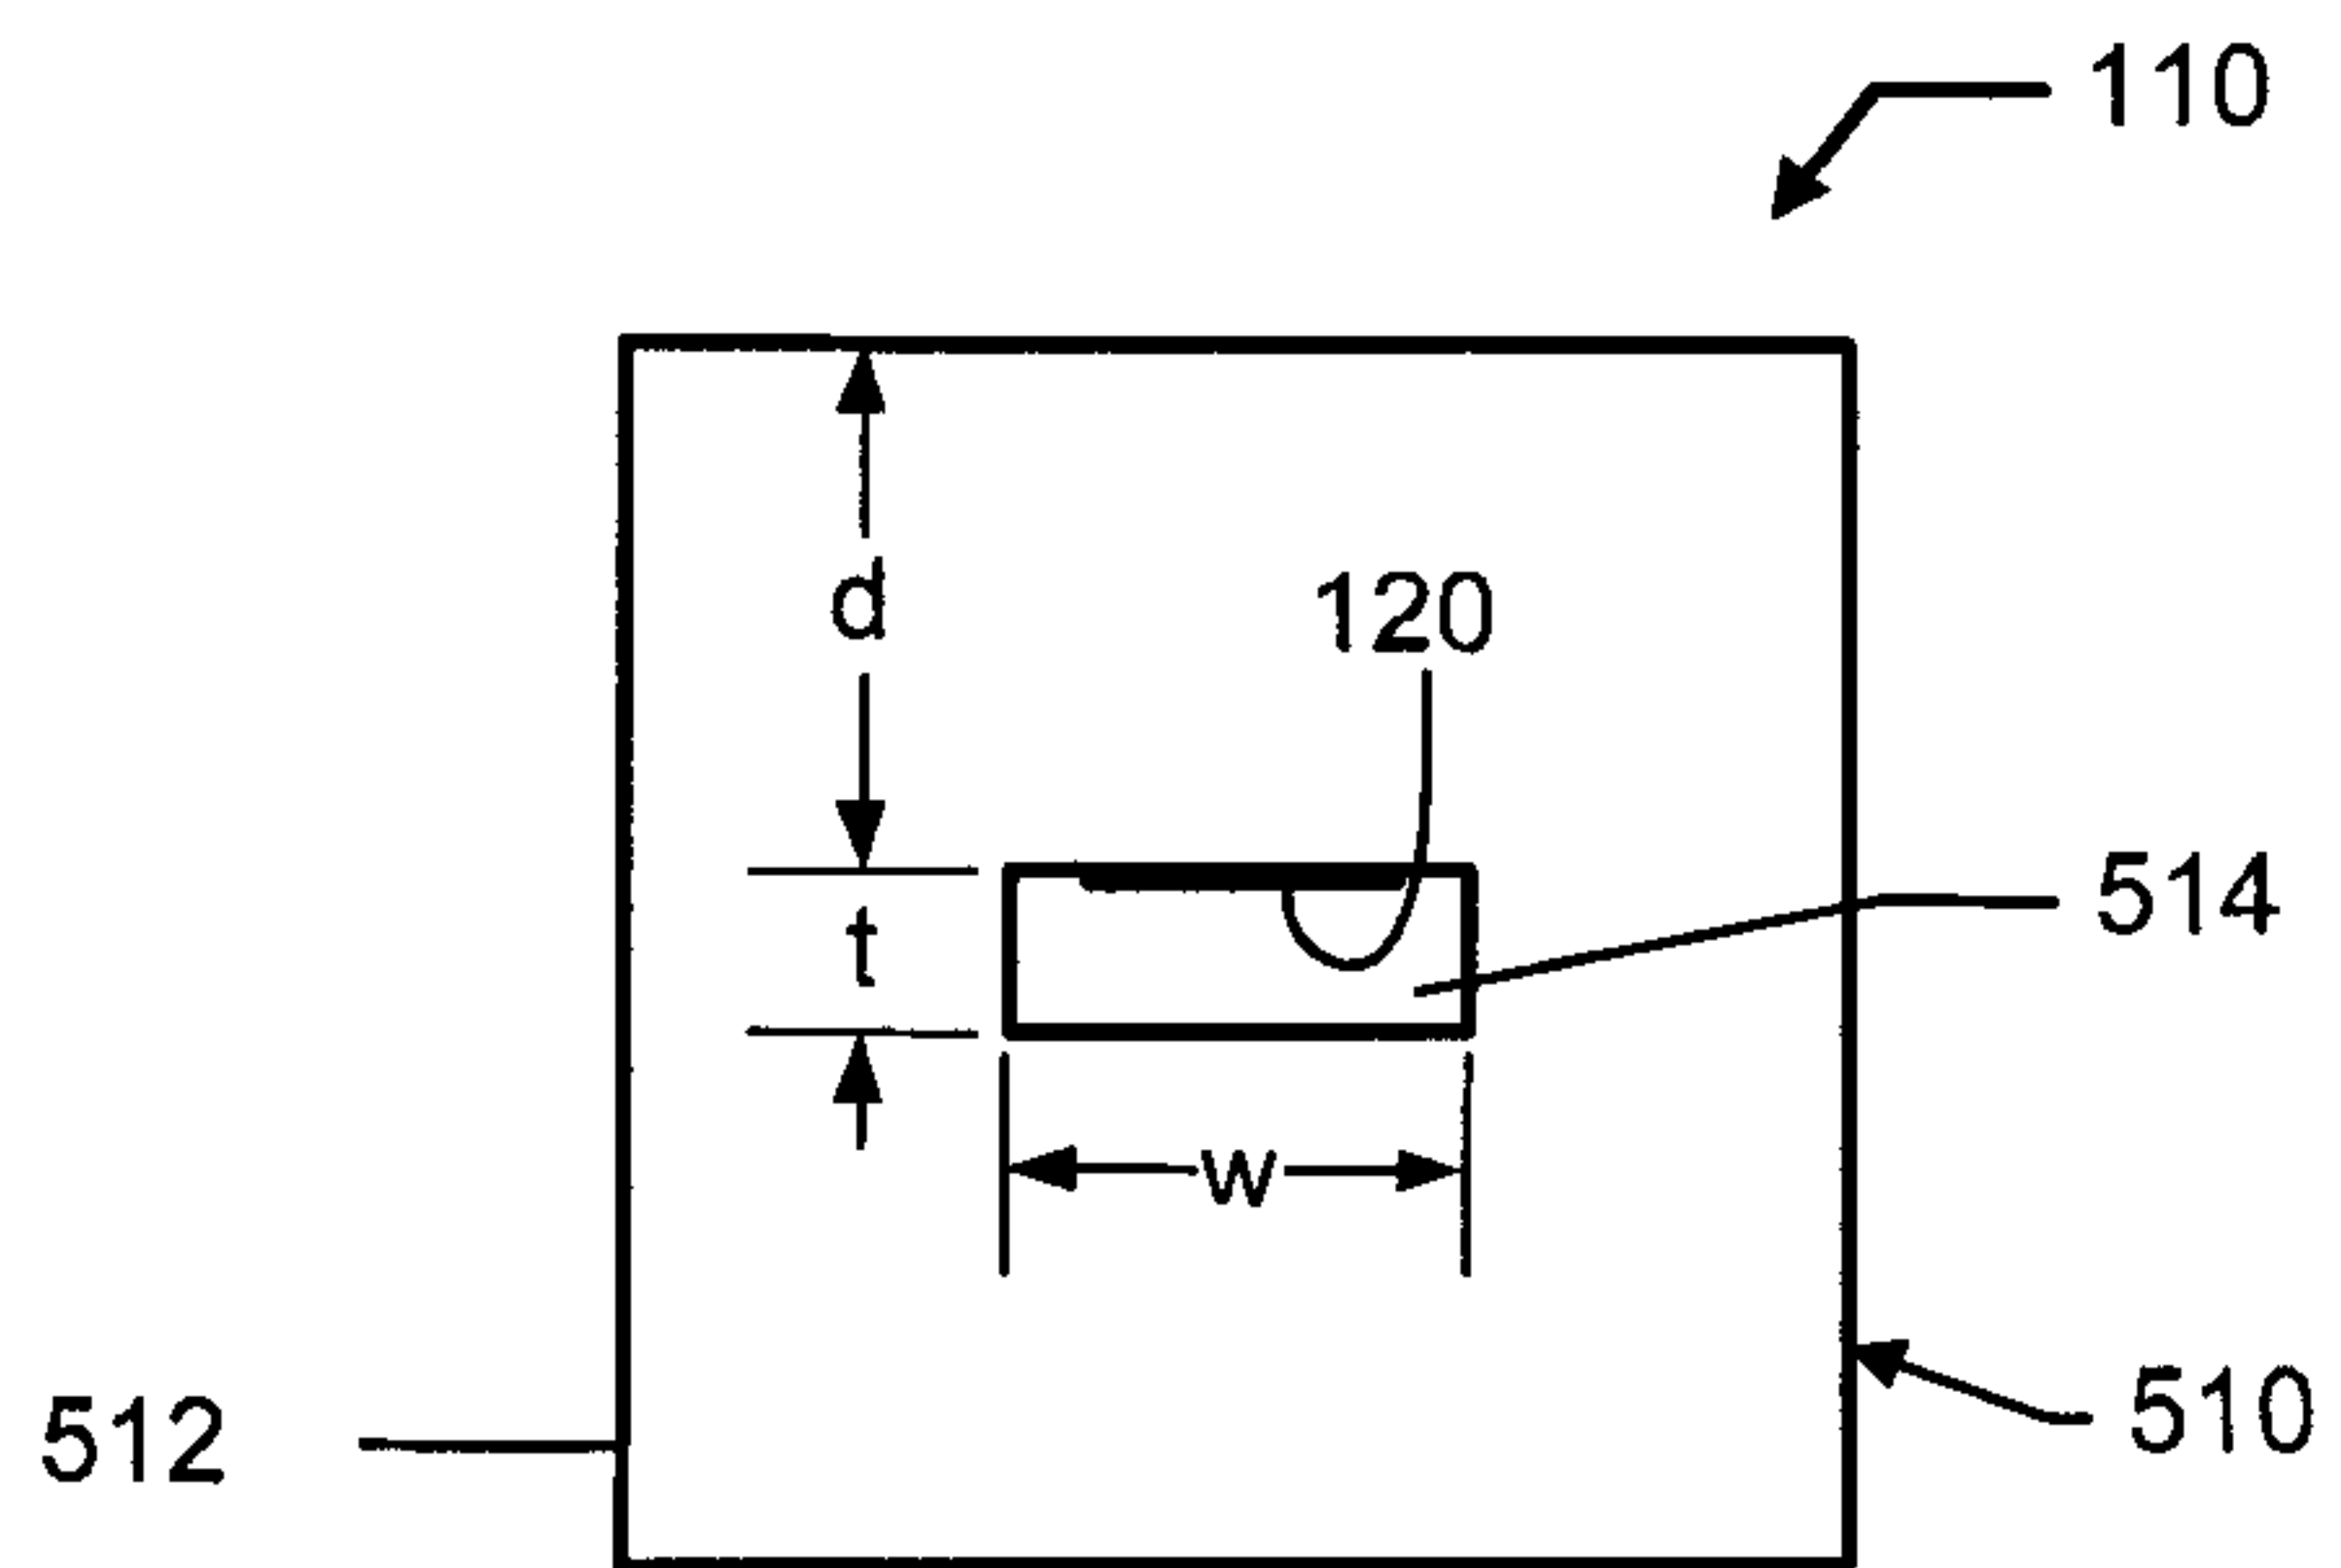


FIG. 5

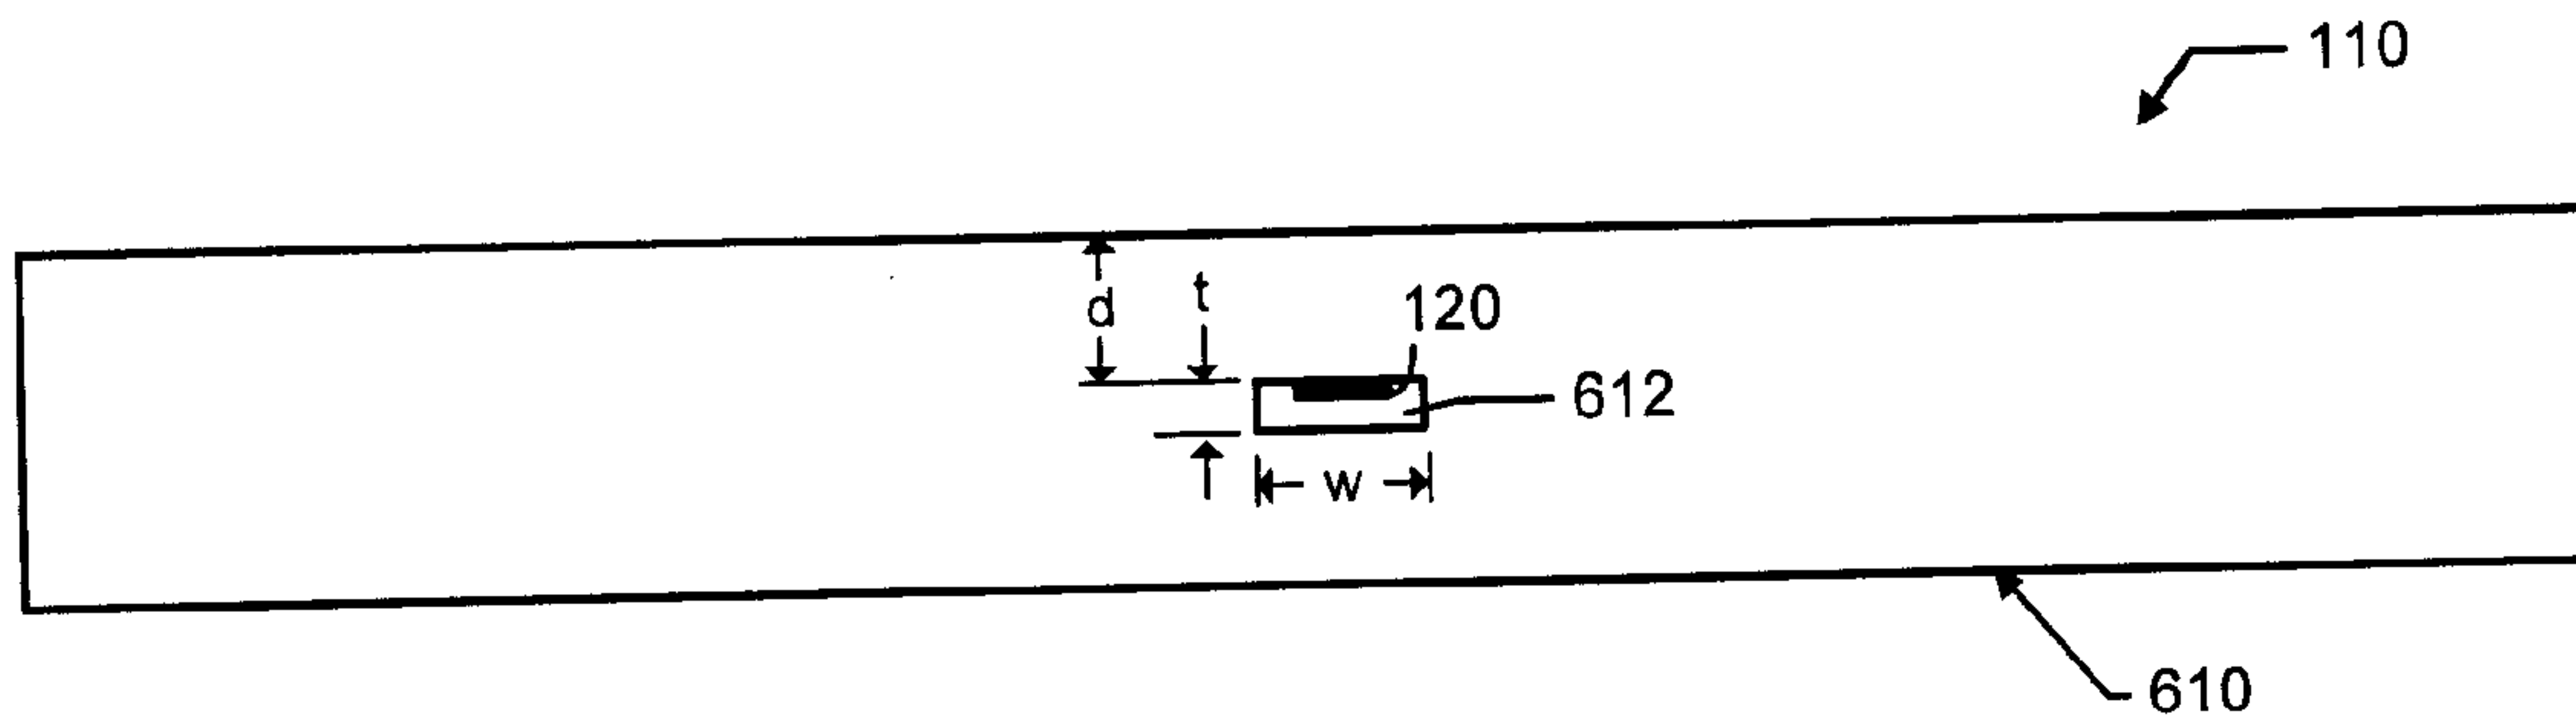

**FIG. 6**

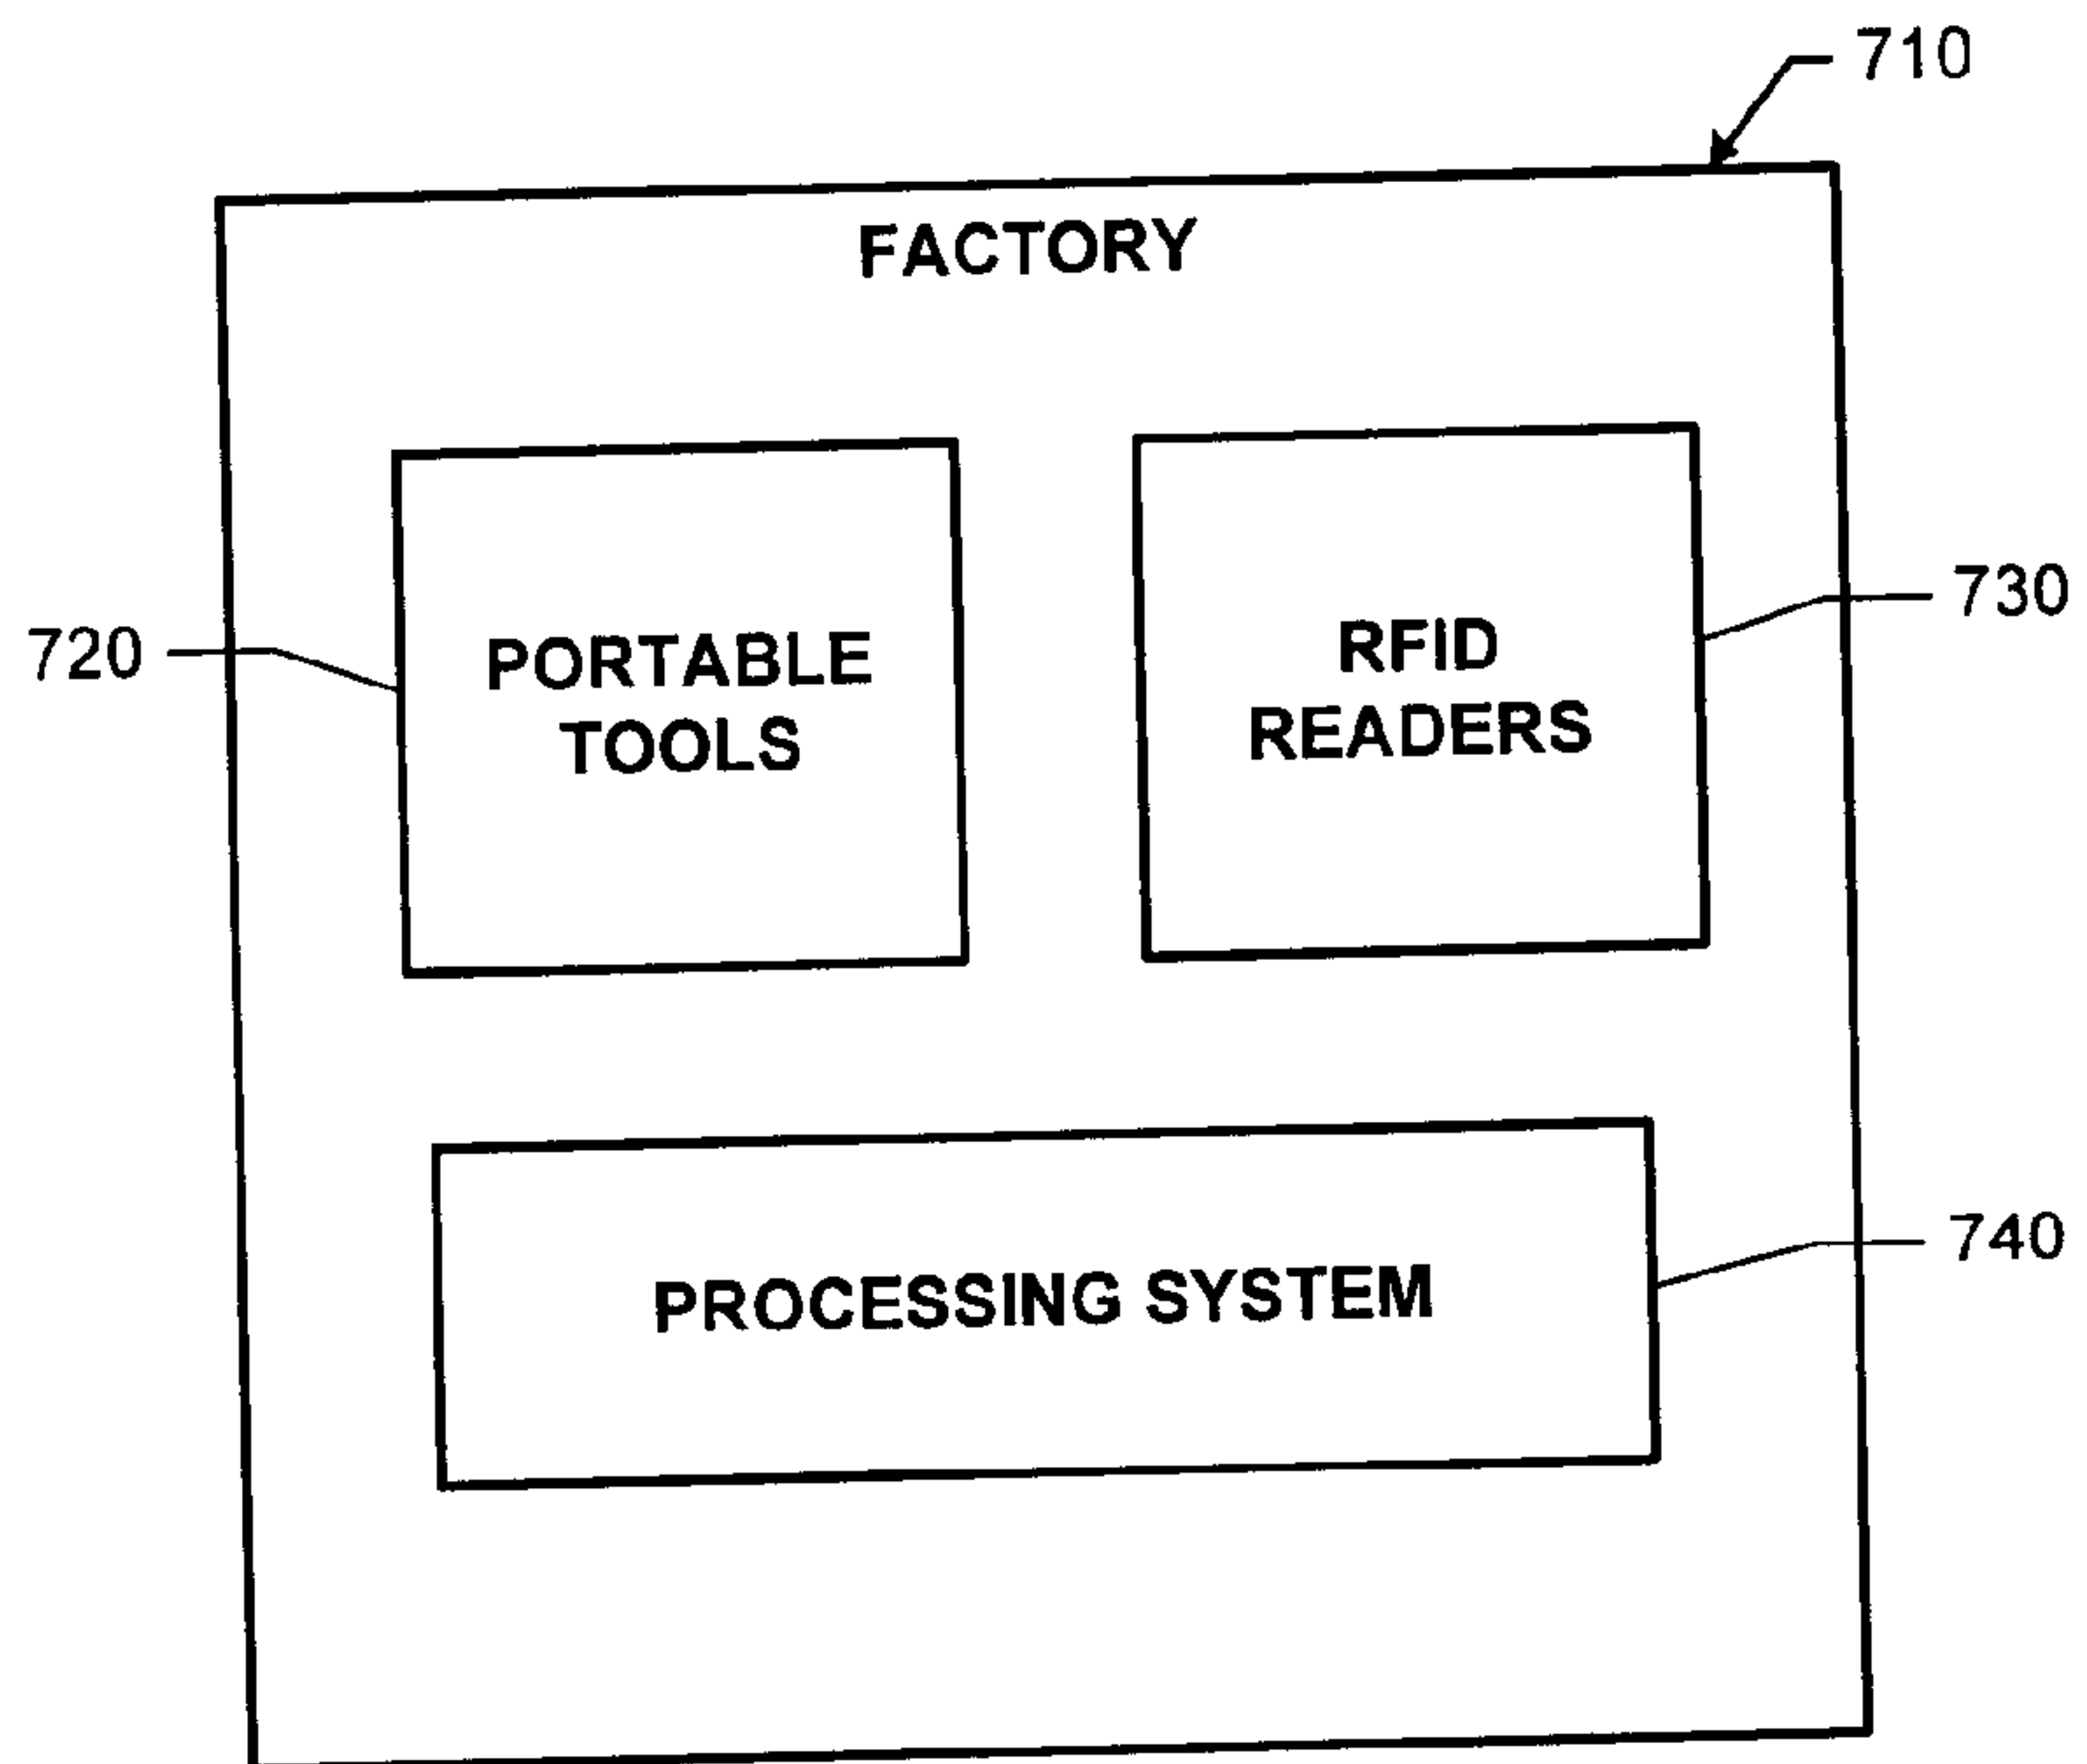

**FIG. 7**

**PORTABLE  
PRODUCTION TOOL**

110

114

**DIELECTRIC  
INCLUSION**

112

116

**RFID  
DEVICE**

120

