




(86) **Date de dépôt PCT/PCT Filing Date:** 2019/02/05
(87) **Date publication PCT/PCT Publication Date:** 2019/08/15
(45) **Date de délivrance/Issue Date:** 2023/10/10
(85) **Entrée phase nationale/National Entry:** 2020/08/07
(86) **N° demande PCT/PCT Application No.:** US 2019/016624
(87) **N° publication PCT/PCT Publication No.:** 2019/156966
(30) **Priorités/Priorities:** 2018/02/08 (US62/628,105);
2019/02/01 (US62/799,881)

(51) **Cl.Int./Int.Cl.** *H04B 11/00* (2006.01)
(72) **Inventeurs/Inventors:**
WALKER, KATIE M., US;
CLAWSON, SCOTT WILLIAM, US
(73) **Propriétaire/Owner:**
EXXONMOBIL TECHNOLOGY AND ENGINEERING
COMPANY, US
(74) **Agent:** BORDEN LADNER GERVAIS LLP

(54) **Titre : PROCÉDES D'IDENTIFICATION HOMOLOGUE DE RESEAU ET D'AUTO-ORGANISATION A L'AIDE DE SIGNATURES TONALES UNIQUES ET Puits QUI UTILISENT LES PROCÉDES**
(54) **Title: METHODS OF NETWORK PEER IDENTIFICATION AND SELF-ORGANIZATION USING UNIQUE TONAL SIGNATURES AND WELLS THAT USE THE METHODS**

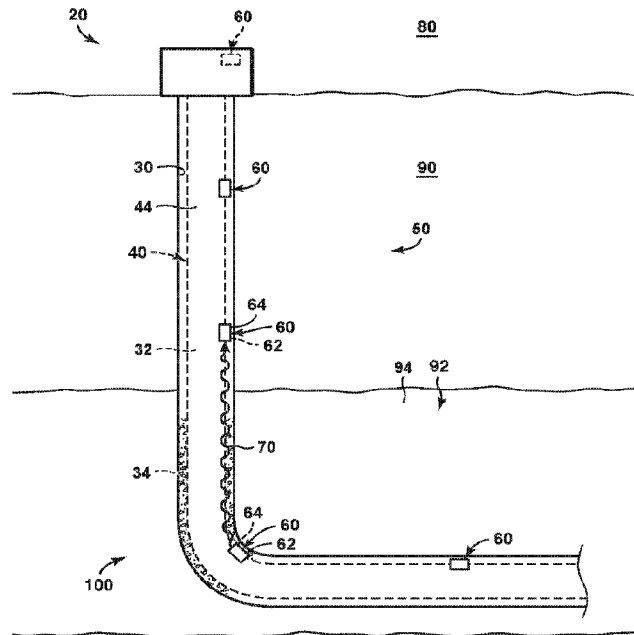

(57) **Abrégé/Abstract:**

A method of communication using a wireless network is disclosed. A wireless transmission of a signal is received at a first node. The signal has a frequency signature. The frequency signature of the received signal is compared with a frequency signature of a previously received signal from a second node. If it is determined that the frequency signature of the received signal and the frequency signature of the previously received signal are within a predetermined range of similarity, the received signal and the previously received signal are accepted as having been transmitted by the second node.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

15 August 2019 (15.08.2019)



(10) International Publication Number

WO 2019/156966 A1

(51) International Patent Classification:

H04B 11/00 (2006.01)

(21) International Application Number:

PCT/US2019/016624

(22) International Filing Date:

05 February 2019 (05.02.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/628,105 08 February 2018 (08.02.2018) US

62/799,881 01 February 2019 (01.02.2019) US

(71) Applicant (for all designated States except US):

EXXONMOBIL UPSTREAM RESEARCH COMPANY [US/US]; (EMHC-N1-4A-607), 22777 Springwoods Village Parkway, Spring, TX 77389 (US).

(72) Inventors; and

(71) Applicants (for US only): **WALKER, Katie M.** [US/US];

356 Manor Lake Lane, Spring, TX 77386 (US).

CLAWSON, Scott William [US/US]; 484 County Road

513, Califon, NJ 07830 (US).

(74) Agent: **JENSEN, Nathan O.** et al.; ExxonMobil Upstream

Research Company, (EMHC-N1-4A-607), 22777 Spring-

woods Village Parkway, Spring, TX 77389 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: METHODS OF NETWORK PEER IDENTIFICATION AND SELF-ORGANIZATION USING UNIQUE TONAL SIGNATURES AND WELLS THAT USE THE METHODS

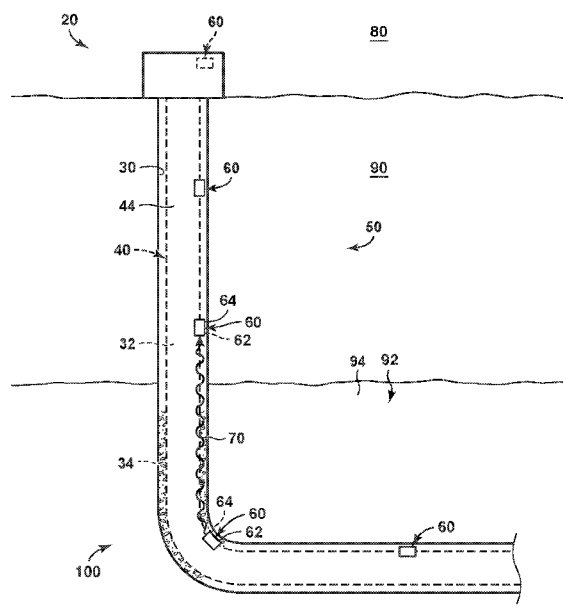


FIG. 1

(57) Abstract: A method of communication using a wireless network is disclosed. A wireless transmission of a signal is received at a first node. The signal has a frequency signature. The frequency signature of the received signal is compared with a frequency signature of a previously received signal from a second node. If it is determined that the frequency signature of the received signal and the frequency signature of the previously received signal are within a predetermined range of similarity, the received signal and the previously received signal are accepted as having been transmitted by the second node.

[Continued on next page]



WO 2019/156966 A1

WO 2019/156966 A1

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

**METHODS OF NETWORK PEER IDENTIFICATION AND SELF-ORGANIZATION
USING UNIQUE TONAL SIGNATURES AND WELLS THAT USE THE METHODS**

CROSS REFERENCE TO RELATED APPLICATIONS

5 **[0001]** (This paragraph is intentionally left blank.)

[0002] (This paragraph is intentionally left blank.)

FIELD OF THE DISCLOSURE

[0003] The present disclosure relates generally to methods of acoustically communicating and/or to wells that use the methods.

10

BACKGROUND OF THE DISCLOSURE

[0004] An acoustic wireless network may be used to wirelessly transmit an acoustic signal, such as a vibration, via a tone transmission medium. In general, a given tone transmission medium will only permit communication within a certain frequency range; and, in some systems, this frequency range may be relatively small. Such systems may be referred to herein
15 as spectrum-constrained systems. An example of a spectrum-constrained system is a well, such as a hydrocarbon well, that includes a plurality of communication nodes spaced-apart along a length thereof.

[0005] Known methods of installing and operating the nodes of such a network require significant time and energy. Nodes have been required to be installed on the casing in numeric
20 order, requiring a large investment of time, an extended spatial footprint, and an extreme

logistical plan for casing movement. Once installed in the well, operation of the network requires ongoing investigation of optimal operating conditions and potential networked node pairings. This is an iterative manual process requiring a significant testing time, and also drains energy of all nodes used to send the commands to perform the tests.

5 **[0006]** The above method also incurs significant risk. Incorrect numbering of the nodes or installation in the wrong order will result in an unworkable network, and extensive reconfiguration may be necessary to correct the mistake, costing substantial operator time and draining energy from a number of nodes on the network. Accidental misconfiguration while operating (such as assigning a duplicate or out-of-order number to a node, or linking them in
10 an endless loop) carries with it a similar risk.

[0007] A typical method of addressing the numbering issue uses a central authority to number all manufactured nodes sequentially. This guarantees uniqueness but does not address out-of-order installation, nor does it prevent accidental misconfiguration, and the approach still requires the central authority to touch each node (to assign the number), thereby limiting
15 manufacturing efficiency.

[0008] An alternate technique has each node assign itself a random number and eliminates the requirement to install nodes in sequential order. This removes the out-of-order risk and greatly reduces the risk of operational misconfiguration, but it cannot guarantee uniqueness because it is possible that two nodes will randomly assign themselves the same number. To
20 minimize (though still not eliminate) the risk of duplicate numbers, a typical implementation makes the random number very large. Unfortunately, nodes must routinely transmit this number as part of each communication, so using a very large number leads to additional energy drain via excessive transmitted tones. What is needed is a method of identifying nodes in a network after installation and without using energy-draining random identification numbers.

25 **SUMMARY OF THE DISCLOSURE**

[0009] Methods of acoustically communicating and wells that use the methods are disclosed herein. The methods generally use an acoustic wireless network including a plurality of nodes spaced-apart along a length of a tone transmission medium. According to disclosed aspects, there is provided a method of communication using a wireless network, such as an
30 acoustic wireless network using one or more well components as a tone transmission medium as described herein. A wireless transmission of a signal is received at a first node. The signal has a frequency signature and/or an amplitude signature, which in some aspects may be a time-

based frequency signature and/or a time-based amplitude signature. The frequency signature and/or the amplitude signature of the received signal is compared with a frequency signature and/or an amplitude signature of a previously received signal. If it is determined that the frequency signature and/or the amplitude signature of the received signal and the frequency
5 signature and/or the amplitude signature of the previously received signal are within a predetermined range of similarity, the received signal and the previously received signal are accepted as having been transmitted by the second node.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figure 1 is a schematic representation of a well configured to use the methods
10 according to the present disclosure.

[0011] Figure 2 is a flowchart depicting methods, according to the present disclosure, of determining a major frequency of a received acoustic tone.

[0012] Figure 3 is a plot illustrating a received amplitude of a plurality of received acoustic tones as a function of time.

15 [0013] Figure 4 is a plot illustrating a received amplitude of an acoustic tone from Figure 3.

[0014] Figure 5 is a plot illustrating frequency variation in the received acoustic tone of Figure 4.

[0015] Figure 6 is a table illustrating histogram data that may be used to determine the major frequency of the received acoustic tone of Figures 4-5.

20 [0016] Figure 7 is a table illustrating a mechanism, according to the present disclosure, by which the major frequency of the acoustic tone of Figures 4-5 may be selected.

[0017] Figures 8A-8D depict digital representations of polyhistogram signatures of a received signal.

25 [0018] Figures 9A-9F are amplitude diagrams showing unique patterns or signatures of a received signal.

[0019] Figure 10 is a flowchart depicting a method of using acoustic tonal signatures as method of network peer identification and self-organization in an acoustic wireless network.

DETAILED DESCRIPTION AND BEST MODE OF THE DISCLOSURE

[0020] The following is a non-exhaustive list of definitions of several specific terms used
30 in this disclosure (other terms may be defined or clarified in a definitional manner elsewhere)

herein). These definitions are intended to clarify the meanings of the terms used herein. It is believed that the terms are used in a manner consistent with their ordinary meaning, but the definitions are nonetheless specified here for clarity.

[0021] As used herein, the term “and/or” placed between a first entity and a second entity means one of (1) the first entity, (2) the second entity, and (3) the first entity and the second entity. Multiple entities listed with “and/or” should be construed in the same manner, i.e., “one or more” of the entities so conjoined. Other entities may optionally be present other than the entities specifically identified by the “and/or” clause, whether related or unrelated to those entities specifically identified. Thus, as a non-limiting example, a reference to “A and/or B,” when used in conjunction with open-ended language such as “comprising” may refer, in one embodiment, to A only (optionally including entities other than B); in another embodiment, to B only (optionally including entities other than A); in yet another embodiment, to both A and B (optionally including other entities). These entities may refer to elements, actions, structures, steps, operations, values, and the like.

[0022] As used herein, the phrase “at least one,” in reference to a list of one or more entities should be understood to mean at least one entity selected from any one or more of the entity in the list of entities, but not necessarily including at least one of each and every entity specifically listed within the list of entities and not excluding any combinations of entities in the list of entities. This definition also allows that entities may optionally be present other than the entities specifically identified within the list of entities to which the phrase “at least one” refers, whether related or unrelated to those entities specifically identified. Thus, as a non-limiting example, “at least one of A and B” (or, equivalently, “at least one of A or B,” or, equivalently “at least one of A and/or B”) may refer, in one embodiment, to at least one, optionally including more than one, A, with no B present (and optionally including entities other than B); in another embodiment, to at least one, optionally including more than one, B, with no A present (and optionally including entities other than A); in yet another embodiment, to at least one, optionally including more than one, A, and at least one, optionally including more than one, B (and optionally including other entities). In other words, the phrases “at least one,” “one or more,” and “and/or” are open-ended expressions that are both conjunctive and disjunctive in operation. For example, each of the expressions “at least one of A, B and C,” “at least one of A, B, or C,” “one or more of A, B, and C,” “one or more of A, B, or C” and “A, B, and/or C” may mean A alone, B alone, C alone, A and B together, A and C together, B and C together, A, B and C together, and optionally any of the above in combination with at least one other

entity.

[0023] (This paragraph is intentionally left blank.)

[0024] As used herein, the terms “adapted” and “configured” mean that the element, component, or other subject matter is designed and/or intended to perform a given function.

5 Thus, the use of the terms “adapted” and “configured” should not be construed to mean that a given element, component, or other subject matter is simply “capable of” performing a given function but that the element, component, and/or other subject matter is specifically selected, created, implemented, used, programmed, and/or designed for the purpose of performing the function. It is also within the scope of the present disclosure that elements, components, and/or
10 other recited subject matter that is recited as being adapted to perform a particular function may additionally or alternatively be described as being configured to perform that function, and vice versa.

[0025] As used herein, the phrase, “for example,” the phrase, “as an example,” and/or simply the term “example,” when used with reference to one or more components, features,
15 details, structures, embodiments, and/or methods according to the present disclosure, are intended to convey that the described component, feature, detail, structure, embodiment, and/or method is an illustrative, non-exclusive example of components, features, details, structures, embodiments, and/or methods according to the present disclosure. Thus, the described component, feature, detail, structure, embodiment, and/or method is not intended to be limiting,
20 required, or exclusive/exhaustive; and other components, features, details, structures, embodiments, and/or methods, including structurally and/or functionally similar and/or equivalent components, features, details, structures, embodiments, and/or methods, are also within the scope of the present disclosure.

[0026] As used herein, “fluid” refers to gases, liquids, and combinations of gases and
25 liquids, as well as to combinations of gases and solids, and combinations of liquids and solids.

[0027] Figures 1-10 provide examples of methods **200** and/or **1000**, according to the present disclosure, and/or of wells **20** including acoustic wireless networks **50** that may include

and/or use the methods. Elements that serve a similar, or at least substantially similar, purpose are labeled with like numbers in each of Figures 1-10, and these elements may not be discussed in detail herein with reference to each of Figures 1-10. Similarly, all elements may not be labeled in each of Figures 1-10, but reference numerals associated therewith may be used herein
5 for consistency. Elements, components, and/or features that are discussed herein with reference to one or more of Figures 1-10 may be included in and/or used with any of Figures 1-10 without departing from the scope of the present disclosure. In general, elements that are likely to be included in a particular embodiment are illustrated in solid lines, while elements that are optional are illustrated in dashed lines. However, elements that are shown in solid lines
10 may not be essential and, in some embodiments, may be omitted without departing from the scope of the present disclosure.

[0028] Figure 1 is a schematic representation of a well **20** configured to use methods **200**, and/or **1000** according to the present disclosure. Well **20** includes a wellbore **30** that extends within a subsurface region **90**. Wellbore **30** also may be referred to herein as extending
15 between a surface region **80** and subsurface region **90** and/or as extending within a subterranean formation **92** that extends within the subsurface region. Subterranean formation **92** may include a hydrocarbon **94**. Under these conditions, well **20** also may be referred to herein as, or may be, a hydrocarbon well **20**, a production well **20**, and/or an injection well **20**.

[0029] Well **20** also includes an acoustic wireless network **50**. The acoustic wireless
20 network also may be referred to herein as a downhole acoustic wireless network **50** and includes a plurality of nodes **60**, which are spaced-apart along a tone transmission medium **100** that extends along a length of wellbore **30**. In the context of well **20**, tone transmission medium **100** may include a downhole tubular **40** that may extend within wellbore **30**, a wellbore fluid **32** that may extend within wellbore **30**, a portion of subsurface region **90** that is proximal
25 wellbore **30**, a portion of subterranean formation **92** that is proximal wellbore **30**, and/or a cement **34** that may extend within wellbore **30** and/or that may extend within an annular region between wellbore **30** and downhole tubular **40**. Downhole tubular **40** may define a fluid conduit **44**.

[0030] Nodes **60** may include one or more encoding nodes **62**, which may be configured
30 to generate an acoustic tone **70** and/or to induce the acoustic tone within tone transmission medium **100**. Nodes **60** also may include one or more decoding nodes **64**, which may be configured to receive acoustic tone **70** from the tone transmission medium. A given node **60** may function as both an encoding node **62** and a decoding node **64** depending upon whether

the given node is transmitting an acoustic tone (i.e., functioning as the encoding node) or receiving the acoustic tone (i.e., functioning as the decoding node). Stated another way, the given node may include both encoding and decoding functionality, or structures, with these structures being selectively used depending upon whether or not the given node is encoding
5 the acoustic tone or decoding the acoustic tone.

[0031] In wells **20**, transmission of acoustic tone **70** may be along a length of wellbore **30**. As such, the transmission of the acoustic tone may be linear, at least substantially linear, and/or directed, such as by tone transmission medium **100**. Such a configuration may be in contrast to more conventional wireless communication methodologies, which generally may transmit a
10 corresponding wireless signal in a plurality of directions, or even in every direction.

[0032] Figure 2 is a flowchart depicting methods **200**, according to the present disclosure, of determining a major frequency of a received acoustic tone that is transmitted via a tone transmission medium using histograms generated from the received acoustic tone. Methods **200** may be performed using any suitable structure and/or structures. As an example, methods
15 **200** may be used by an acoustic wireless network, such as acoustic wireless network **50** of Figure 1. Under these conditions, methods **200** may be used to communicate along a length of wellbore **30**.

[0033] Methods **200** include receiving a received acoustic tone at **210**, estimating a frequency of the received acoustic tone at **220**, and separating a tone receipt time into a plurality
20 of time intervals at **230**. Methods **200** also include calculating a frequency variation at **240**, selecting a subset of the plurality of time intervals at **250**, and averaging a plurality of discrete frequency values at **260**. Methods **200** further may include transmitting a transmitted acoustic tone at **270**.

[0034] Receiving the received acoustic tone at **210** may include receiving with a decoding
25 node of an acoustic wireless network. Additionally or alternatively, the receiving at **210** may include receiving from the tone transmission medium and/or receiving for a tone receipt time. The receiving at **210** may include receiving for any suitable tone receipt time. As examples, the tone receipt time may be at least 1 microsecond, at least 10 microseconds, at least 25 microseconds, at least 50 microseconds, at least 75 microseconds, or at least 100 microseconds.
30 The receiving at **210** also may include receiving at any suitable frequency, or tone frequency. Examples of the tone frequency include frequencies of at least 10 kilohertz (kHz), at least 25 kHz, at least 50 kHz, at least 60 kHz, at least 70 kHz, at least 80 kHz, at least 90 kHz, at least 100 kHz, at least 200 kHz, at least 250 kHz, at least 400 kHz, at least 500 kHz, and/or at least

600 kHz. Additionally or alternatively, the tone frequency may be at most 1 megahertz (MHz), at most 800 kHz, at most 600 kHz, at most 400 kHz, at most 200 kHz, at most 150 kHz, at most 100 kHz, and/or at most 80 kHz.

5 [0035] The receiving at **210** may include receiving with any suitable decoding node, such as decoding node **64** of Figure 1. Additionally or alternatively, the receiving at **210** may include receiving with an acoustic tone receiver. Examples of the acoustic tone receiver include a piezoelectric tone receiver, a piezoresistive tone receiver, a resonant MEMS tone receiver, a non-resonant MEMS tone receiver, and/or a receiver array.

10 [0036] An example of a plurality of received acoustic tones is illustrated in Figure 3, while an example of a single received acoustic tone is illustrated in Figure 4. Figures 3-4 both illustrate amplitude of the received acoustic tone as a function of time (e.g., the tone receipt time). As illustrated in Figures 3-4, the amplitude of the received acoustic tone may vary significantly during the tone receipt time. This variation may be caused by non-idealities within the tone transmission medium and/or with the tone transmission process. Examples of
15 these non-idealities are discussed herein and include acoustic tone reflection points within the tone transmission medium, generation of harmonics during the tone transmission process, ringing within the tone transmission medium, and/or variations in a velocity of the acoustic tone within the tone transmission medium. Collectively, these non-idealities may make it challenging to determine, to accurately determine, and/or to reproducibly determine the major
20 frequency of the received acoustic tone, and methods **200** may facilitate this determination.

[0037] Estimating the frequency of the received acoustic tone at **220** may include estimating the frequency of the received acoustic tone as a function of time and/or during the tone receipt time. This may include estimating a plurality of discrete frequency values received at a corresponding plurality of discrete times within the tone receipt time and may be
25 accomplished in any suitable manner.

[0038] As an example, the received acoustic tone may include, or be, a received acoustic wave that has a time-varying amplitude within the tone receipt time, as illustrated in Figures 3-4. The time-varying amplitude may define an average amplitude, and the estimating at **220** may include measuring a cycle time between the time-varying amplitude and the average
30 amplitude (**222**), measuring a period of individual cycles of the received acoustic wave (**224**), and/or measuring a plurality of zero-crossing times of the received acoustic wave (**226**).

[0039] The estimating at **220** may be used to generate a dataset that represents the

frequency of the received acoustic tone as a function of time during the tone receipt time. An example of such a dataset is illustrated in Figure 5. As may be seen in Figure 5 the frequency of the received acoustic tone includes time regions where there is a relatively higher amount of variation, such as the time regions from T_0 to T_1 and from T_2 to T_3 in Figure 5, and a time
5 region where there is a relatively lower amount of variation, such as time region from T_1 to T_2 in Figure 5.

[0040] Separating the tone receipt time into the plurality of time intervals at **230** may include separating such that each time interval in the plurality of time intervals includes a subset of the plurality of discrete frequency values that was received and/or determined during that
10 time interval. It is within the scope of the present disclosure that each time interval in the plurality of time intervals may be less than a threshold fraction of the tone receipt time. Examples of the threshold fraction of the tone receipt time include threshold fractions of less than 20%, less than 15%, less than 10%, less than 5%, or less than 1%. Stated another way, the separating at **230** may include separating the tone receipt time into at least a threshold
15 number of time intervals. Examples of the threshold number of time intervals includes at least 5, at least 7, at least 10, at least 20, or at least 100 time intervals. It is within the scope of the present disclosure that a duration of each time interval in the plurality of time intervals may be the same, or at least substantially the same, as a duration of each other time interval in the plurality of time intervals. However, this is not required to all implementations, and the
20 duration of one or more time interval in the plurality of time intervals may differ from the duration of one or more other time intervals in the plurality of time intervals.

[0041] Calculating the frequency variation at **240** may include calculating any suitable frequency variation within each time interval and/or within each subset of the plurality of discrete frequency values. The calculating at **240** may be performed in any suitable manner
25 and/or may calculate any suitable measure of variation, or frequency variation. As an example, the calculating at **240** may include calculating a statistical parameter indicative of variability within each subset of the plurality of discrete frequency values. As another example, the calculating at **240** may include calculating a frequency range within each subset of the plurality of discrete frequency values. As yet another example, the calculating at **240** may include
30 calculating a frequency standard deviation of, or within, each subset of the plurality of discrete frequency values. As another example, the calculating at **240** may include scoring each subset of the plurality of discrete frequency values.

[0042] As yet another example, the calculating at **240** may include assessing a margin, or

assessing the distinctiveness of a given frequency in a given time interval relative to the other frequencies detected during the given time interval. This may include using a magnitude and/or a probability density to assess the distinctiveness and/or using a difference between a magnitude of a most common histogram element and a second most common histogram element within the given time interval to assess the distinctiveness.

[0043] As a more specific example, and when the calculating at **240** includes calculating the frequency range, the calculating at **240** may include binning, or separating, each subset of the plurality of discrete frequency values into bins. This is illustrated in Figure 6. Therein, a number of times that a given frequency (i.e., represented by bins 1-14) is observed within a given time interval (i.e., represented by time intervals 1-10) is tabulated. A zero value for a given frequency bin-time interval combination indicates that the given frequency bin was not observed during the given time interval, while a non-zero number indicates the number of times that the given frequency bin was observed during the given time interval.

[0044] Under these conditions, the calculating at **240** may include determining a span, or range, of the frequency bins. In the example of Figure 6, the uppermost bin that includes at least one count is bin 14, while the lowermost bin that includes at least one count is bin 11. Thus, the span, or range, is 4, as indicated.

[0045] Selecting the subset of the plurality of time intervals at **250** may include selecting a subset within which the frequency variation, as determined during the calculating at **240**, is less than a threshold frequency variation. Experimental data suggests that time intervals within which the frequency variation is less than the threshold frequency variation represent time intervals that are more representative of the major frequency of the received acoustic tone. As such, the selecting at **250** includes selectively determining which time intervals are more representative of, or more likely to include, the major frequency of the received acoustic tone, thereby decreasing noise in the overall determination of the major frequency of the received acoustic tone.

[0046] The selecting at **250** may include selecting a continuous range within the tone receipt time or selecting two or more ranges that are spaced-apart in time within the tone receipt time. Additionally or alternatively, the selecting at **250** may include selecting at least 2, at least 3, at least 4, or at least 5 time intervals from the plurality of time intervals.

[0047] The selecting at **250** additionally or alternatively may include selecting such that the frequency variation within each successive subset of the plurality of discrete frequency

values decreases relative to a prior subset of the plurality of discrete frequency values and/or remains unchanged relative to the prior subset of the plurality of discrete frequency values.

[0048] An example of the selecting at **250** is illustrated in Figure 6. In this example, time intervals with a span of less than 10 are selected and highlighted in the table. These include
5 time intervals 1, 4, and 5.

[0049] Averaging the plurality of discrete frequency values at **260** may include averaging within the subset of the plurality of time intervals that was selected during the selecting at **250** and/or averaging to determine the major frequency of the received acoustic tone. The averaging at **260** may be accomplished in any suitable manner. As an example, the averaging
10 at **260** may include calculating a statistical parameter indicative of an average of the plurality of discrete frequency values within the subset of the plurality of time intervals. As another example, the averaging at **260** may include calculating a mean, median, or mode value of the plurality of discrete frequency values within the subset of the plurality of time intervals.

[0050] As a more specific example, and with reference to Figures 6-7, the averaging at **260**
15 may include summing the bins for the time intervals that were selected during the selecting at **250**. As discussed, and using one criteria for the selecting at **250**, bins 1, 4, and 5 from Figure 6 may be selected. The number of counts in these three bins then may be summed to arrive at Figure 7, and the bin with the most counts, which represents the most common, or mode, frequency of the selected time intervals, may be selected. In the example of Figure 7, this may
20 include selecting bin 12, or the frequency of bin 12, as the major frequency of the received acoustic tone.

[0051] Transmitting the transmitted acoustic tone at **270** may include transmitting with an encoding node of the acoustic wireless network. The transmitting at **270** may be subsequent, or responsive, to the averaging at **260**; and a transmitted frequency of the transmitted acoustic
25 tone may be based, at least in part, on, or equal to, the major frequency of the received acoustic tone. Stated another way, the transmitting at **270** may include repeating, or propagating, the major frequency of the received acoustic tone along the length of the tone transmission medium, such as to permit and/or facilitate communication along the length of the tone transmission medium.

[0052] According to an aspect of the disclosure, an acoustic telemetry packet may be sent
30 from node to node along a casing in a wellbore. A node in a fixed location, such as a hydrophone, may listen to the telemetry progress down the acoustic wireless network and a

representation of the received acoustic signal may be recorded. This representation is known colloquially as a histogram or polyhistogram and may be generated as previously disclosed, or by collecting zero-crossings interpreted in time bins, such as 1 millisecond-long bins, by a receiver algorithm when receiving a telemetry packet. Other means of analyzing the frequency and/or amplitude of a received acoustic signal may be used, such as: performing a Fourier transform of the received acoustic signal; performing a fast Fourier transform (FFT) of the received acoustic signal; performing a discrete Fourier transform of the received acoustic signal; performing a wavelet transform of the received acoustic signal; performing a multiple least squares analysis of the received acoustic signal; margin, span with zero crossing rate (ZCR); margin, span with Fast Fourier Transforms (FFT), and the like. The process of identifying frequencies in a wireless network using histograms is described in co-pending and commonly owned U.S. Patent Application Publication No. 2018/058,204.

[0053] As seen in Figures 8A-8D, each frequency transmitted by a given node has its own pattern of higher and lower graded polyhistogram bins when received by a specific receiver. These patterns or signatures, which may be termed tonal signatures, polyhistogram signatures, or the like, vary by node due to the physical variability, however slight, of the node assembly and installation, and also may be impacted by the distance from the transmitting node to the receiving node. Furthermore, other non-idealities which may impact frequency signatures and/or amplitude signatures include acoustic tone reflection points within the tone transmission medium, generation of harmonics during the tone transmission process, ringing within the tone transmission medium, variations in a velocity of the acoustic tone within the tone transmission medium, the specific arrangement of distances and material properties (density, refraction index, etc.) unique to each transmit/receiver pair of nodes. For example, Figure 8A shows a polyhistogram signature **802** for a listener (such as a node in an acoustic wireless network) when a specific node, such as node 12, transmits two specific tones. As shown in Figure 8B, the listener may hear a similar polyhistogram signature **804** when node 12 later transmits the same two tones. While the digits of the two polyhistogram signatures **802**, **804** are not identical, known pattern recognition techniques may be used to determine that the signatures are sufficiently similar for the purposes of identifying a unique source of the transmitted tones. As shown in Figure 8C, the same listener hears a different polyhistogram signature **806** when a different node, such as node 13, transmits the same two tones. The listener hears a polyhistogram signature **808** when node 13 later transmits the same two tones. Polyhistogram signature **808** is similar to polyhistogram signature **806**, but differs from polyhistogram

signatures **802** and **804**.

[0054] The unique patterns or signatures are present not only in the time or frequency domains, as viewable by the corresponding polyhistogram, but also in the amplitude domain, as shown by Figures 9A-9F, due to the physical propagation of various acoustic modes through the specific arrangement of distances and material properties (density, refraction index, etc.) unique to the transmit/receiver pair of nodes. Figure 9A shows the time-based amplitude **902** of an acoustic signal from a transmitting node as received by a first receiving node. Both nodes are part of an acoustic wireless network associated with a wellbore and are attached to a casing of the wellbore. The first receiving node is positioned inches (centimeters) from the transmitting node, but on the opposite side of the casing, i.e., 180 degrees around the casing. Figure 9B shows the time-based amplitude **904** of the identical signal as it is received by a second receiving node. The second receiving node is positioned inches (centimeters) from the transmitting node, but on the same side of the casing. Figure 9C shows the time-based amplitude **906** of the signal as it is received by a third receiving node. The third receiving node is positioned 40 feet (13 meters) from the transmitting node, but on the opposite side of the casing, i.e., 180 degrees around the casing. Figure 9D shows the time-based amplitude **908** of the signal as it is received by a fourth receiving node, which is positioned 40 feet (13 meters) from the transmitting node, but on the same side of the casing. It can be seen that a signal is received differently based on distance and position of a receiving node from a transmitting node. Another example is shown in Figures 9E and 9F, which depict time-based amplitudes **910**, **912** of a different signal as received by the third and fourth receiving nodes, respectively.

[0055] Because the received patterns or signatures – whether in the time, frequency, or amplitude domains – are unique and repeatable for an extended duration between a given transmit/receive set of nodes, multiple uses for the patterns or signatures can be derived. Additionally, the unique received patterns or signatures are receiver-specific. In other words, a signal from a first transmit/receive node to a second transmit/receive node will generate a pattern or signature that is different from a pattern or signature generated by a signal from the second transmit/receive node to the first transmit/receive node. The unique nature of the patterns or signatures may be used to infer physical properties between two nodes.

[0056] Examples of uses of the disclosed aspects include using the unique frequency and/or amplitude signatures defining links between signals defined between the various nodes to form a network independent of human intervention. The unique frequency and/or amplitude signatures can identify specific nodes, and the network may be established using the defined

nodes. Such a network may adapt over time, and be optimized on a packet-by-packet basis, either to changing physical environment, or by a specific goal for network use, such as minimizing energy usage between nodes or the network as a whole, maximizing a data rate, minimizing an error rate, minimizing latency, guaranteeing a worst-case data rate, guaranteeing a worst-case latency, autonomously balancing energy usage across multiple nodes, autonomously balancing data transmission loads, and the like. The signatures may also be used to infer physical properties between any two nodes, such as a changing nature of the transmission medium, which in an aspect may be an acoustic transmission medium. In another aspect, the unique signals may help determine, on a case-by-case basis, the networking parameters between each node in the network. Such parameters may include locally-ideal frequency bands or timing parameters, which may be tailored specifically for a particular neighboring node that may be different from other nodes in the region, as described in commonly-owned U.S. Patent Application No. 16/139,427.

[0057] In another aspect, a node may change its preferred communication partner to another node in response (at least in part) to changes noted in the acoustic and/or frequency signatures. Additionally or alternatively, a node may change one or more of its communication parameters in response (at least in part) to changes noted in the signatures. Such communication parameters may include ping time (i.e., the actual duration a signal is transmitted), wait time (i.e., a predetermined duration after a ping time where no signal is transmitted), symbol time (i.e., a duration equal to the sum of the ping time and its associated wait time), transmit amplitude, type of error correction, bits per tone, type of data compression, communication link prioritization, communication frequency band, modulation strategy, and the like. These communication parameters may be selected for communication between two nodes, a group of nodes, or all nodes in the network.

[0058] In still another aspect, a communication link and/or a network parameter may be changed or modified because the frequency signature and/or the amplitude signature of a received signal is not as expected. For example, a pair of nodes may be transmitting and receiving a series of signals. If one of the received signals, expected from or assumed to have been sent from the receiving node, has a frequency signature and/or an amplitude signature that is not in line with previously received signals from the receiving node, then the receiving node may change or modify the communication link and/or network parameter(s) to maintain or improve communication between the nodes and in the network overall.

[0059] In an additional aspect, the frequency signature and/or the amplitude signature of a received signal may be used to establish a preferred signal traversal path along part or all of the network in terms of acoustic strength – instead of proximity. Such preferred signal path may include various communication links and communication parameters at different locations
5 along the network.

[0060] In still another aspect of the disclosure, the frequency signature and/or the amplitude signature of a received signal, once identified as being from a specific transmitting node in the network, may itself be used as a unique identifier of the transmitting node. In this case, the transmitting node does not need to include a node identifier in the message or data being
10 transmitted by the signal; the signature is sufficient to identify the transmitting node. The signal can therefore be used to transmit actual information, thereby saving transmission power and time.

[0061] Changes in the physical properties of received signals over time may be noted by recording in memory the pattern changes over time. Such recorded signal changes may be
15 caused by and therefore used to determine changes in the physical surroundings such as the contents of the wellbore tubular, rate of flow or flow regime of the contents, corrosion, perforation or other tubular failure, changes in tubular thickness or eccentricity, potential wellbore blockages, and the like. Changes in the signal over time may also be the result of node hardware failures or declining battery power. Recording and analyzing the changes in
20 signal properties over time may permit one to predict and mitigate node failures.

[0062] The unique frequency/amplitude signatures of each node connection are affected by their surroundings in the wellbore. By analyzing these signatures, it may be possible to determine which node is most proximate to a condition of interest to be sensed using a node's onboard sensors. Such condition of interest may include a well perforation, a well inflow, a
25 wellbore blockage, a re-injection operation, a location of a wired or autonomous tool in the well, and the like.

[0063] Advantages of the disclosed aspects are numerous. For example, node identification and network assembly can occur without human intervention. Determination of neighboring nodes may occur in terms of optimal acoustic strength instead of physical
30 proximity. This allows for automated assignment of non-sequential node identifications at the time of manufacture, and the nodes may then be installed on the casing in arbitrary order but tracked for physical location using barcode scans, RFID tags, etc. during installation into the well). Other neighbor pairings may be optimized on a packet-by-packet basis based on another

goal such as lowest energy usage, highest data (lowest error) rate, lowest latency, autonomous load balancing, etc.

5 [0064] Another advantage is that dynamic optimization of networking parameters and optimal communication partners may be performed on a case-by-case basis. Such optimization increases network scalability, thereby supporting operation of a larger network such as in deeper wells. For example, a neighboring node's transmission characteristics may suggest that, at a particular moment, the neighbor is unsuitable for conveying an important or large packet.

10 [0065] Another advantage is that with extremely sensitive dynamic systems, changes in the physical properties of received signals over time may be noted by recording in memory the pattern changes over time. Still another advantage is that locally-ideal frequency bands or timing parameters can be tailored specifically for a particular neighboring node that may be different from other nodes in the region, as described in commonly-owned U.S. Patent Application No. 16/139,427, "Method and System for Performing Operations with Communications" and filed October 13, 2017.

15 [0066] Still another advantage is that the disclosed wireless acoustic network can issue predictive trouble tickets that focus operator intervention on high-risk nodes. Yet another advantage is that the disclosed wireless acoustic network can determine which node is most proximate to a condition of interest to be sensed using a node's onboard sensors.

20 [0067] Figure 10 is a flowchart depicting a method **1000** of communicating using a wireless network according to the present disclosure. The wireless network may be an acoustic wireless network having a tone transmission medium. At block **1002** a wireless transmission of a signal is received at a first node, where the received signal has a frequency signature and/or an amplitude signature. At block **1004** the frequency signature and/or the amplitude signature of the received signal is compared with a frequency signature and/or an amplitude signature of a previously received signal received from a second node. At block **1006** it is determined
25 whether the frequency signature and/or the amplitude signature of the received signal and the frequency signature and/or the amplitude signature of the previously received signal are within a predetermined range of similarity. If so, at block **1008** the received signal and the previously received signal are accepted as having been transmitted by the second node. At block **1010** the
30 received signal and the previously received signal are defined as identifying a communication link between the first node and the second node.

[0068] The acoustic wireless network and/or the nodes thereof, which are disclosed herein, including acoustic wireless network **50** and/or nodes **60** of Figure 1, may include and/or be any suitable structure, device, and/or devices that may be adapted, configured, designed, constructed, and/or programmed to perform the functions discussed herein with reference to
5 any of the methods disclosed herein. As examples, the acoustic wireless network and/or the associated nodes may include one or more of an electronic controller, a dedicated controller, a special-purpose controller, a special-purpose computer, a display device, a logic device, a memory device, and/or a memory device having computer-readable storage media.

[0069] The computer-readable storage media, when present, also may be referred to herein
10 as non-transitory computer readable storage media. This non-transitory computer readable storage media may include, define, house, and/or store computer-executable instructions, programs, and/or code; and these computer-executable instructions may direct the acoustic wireless network and/or the nodes thereof to perform any suitable portion, or subset, of any of the methods disclosed herein. Examples of such non-transitory computer-readable storage
15 media include CD-ROMs, disks, hard drives, flash memory, etc. As used herein, storage, or memory, devices and/or media having computer-executable instructions, as well as computer-implemented methods and other methods according to the present disclosure, are considered to be within the scope of subject matter deemed patentable in accordance with Section 101 of Title 35 of the United States Code.

[0070] In the present disclosure, several of the illustrative, non-exclusive examples have
20 been discussed and/or presented in the context of flow diagrams, or flow charts, in which the methods are shown and described as a series of blocks, or steps. Unless specifically set forth in the accompanying description, it is within the scope of the present disclosure that the order of the blocks may vary from the illustrated order in the flow diagram, including with two or
25 more of the blocks (or steps) occurring in a different order and/or concurrently. It is also within the scope of the present disclosure that the blocks, or steps, may be implemented as logic, which also may be described as implementing the blocks, or steps, as logics. In some applications, the blocks, or steps, may represent expressions and/or actions to be performed by functionally equivalent circuits or other logic devices. The illustrated blocks may, but are not
30 required to, represent executable instructions that cause a computer, processor, and/or other logic device to respond, to perform an action, to change states, to generate an output or display, and/or to make decisions.

INDUSTRIAL APPLICABILITY

[0071] The wells and methods disclosed herein are applicable to the acoustic wireless communication, to the hydrocarbon exploration, and/or to the hydrocarbon production industries.

5 [0072] It is believed that the disclosure set forth above encompasses multiple distinct inventions with independent utility. While each of these inventions has been disclosed in its preferred form, the specific embodiments thereof as disclosed and illustrated herein are not to be considered in a limiting sense as numerous variations are possible. The subject matter of the inventions includes all novel and non-obvious combinations and subcombinations of the various elements, features, functions and/or properties disclosed herein. Similarly, where the
10 claims recite “a” or “a first” element or the equivalent thereof, such claims should be understood to include incorporation of one or more such elements, neither requiring nor excluding two or more such elements.

[0073] It is believed that the following claims particularly point out certain combinations
15 and subcombinations that are directed to one of the disclosed inventions and are novel and non-obvious. Inventions embodied in other combinations and subcombinations of features, functions, elements and/or properties may be claimed through amendment of the present claims or presentation of new claims in this or a related application. Such amended or new claims, whether they are directed to a different invention or directed to the same invention, whether
20 different, broader, narrower, or equal in scope to the original claims, are also regarded as included within the subject matter of the inventions of the present disclosure.

CLAIMS:

1. A method of communication using a wireless network, comprising:
 - at a first node, receiving a wireless transmission of a signal, the received signal having a frequency signature and/or an amplitude signature;
 - comparing the frequency signature and/or the amplitude signature of the received signal with a frequency signature and/or an amplitude signature of a previously received signal from a second node; and
 - if the frequency signature and/or the amplitude signature of the received signal and the frequency signature and/or the amplitude signature of the previously received signal are within a predetermined range of similarity, accepting the received signal and the previously received signal as having been transmitted by the second node and defining the received signal and the previously received signal as a unique signal identifying a communication link between the first node and the second node;
 - wherein the receiving step comprises receiving, with a decoding node of an acoustic wireless network and from a tone transmission medium, a received acoustic tone for a tone receipt time, and wherein the comparing step comprises:
 - estimating a frequency of the received acoustic tone, as a function of time, during the tone receipt time, wherein the estimating includes estimating a plurality of discrete frequency values received at a corresponding plurality of discrete times within the tone receipt time;
 - separating the tone receipt time into a plurality of time intervals, wherein each time interval in the plurality of time intervals includes a subset of the plurality of discrete frequency values received during the time interval;
 - calculating a frequency variation within each subset of the plurality of discrete frequency values;
 - selecting a subset of the plurality of time intervals within which the frequency variation is less than a threshold frequency variation; and
 - averaging the plurality of discrete frequency values within the subset of the plurality of time intervals to determine major frequency of the received acoustic tone.

2. The method of claim 1, further comprising:
using the unique signal, forming the wireless network independent of user intervention.
3. The method of claim 1, further comprising:
using the unique signal, adapting a connection in the wireless network.
4. The method of claim 3, wherein adapting the connection comprises adapting the connection due to a changing physical environment.
5. The method of claim 3, wherein adapting the connection comprises adapting the connection to optimize network communications.
6. The method of claim 5, wherein optimizing network communications comprises at least one of minimizing energy usage in the wireless network, minimizing error rate, maximizing data rate, minimizing latency, guaranteeing a worst-case data rate, guaranteeing a worst-case latency, autonomously balancing energy usage across multiple nodes, and autonomously balancing data transmission loads.
7. The method of claim 1, further comprising:
inferring physical properties between the first node and the second node based on one or more of
the frequency signature and/or the amplitude signature of the received signal from the first node, and
the frequency signature and/or the amplitude signature of the received signal from the second node.

8. The method of claim 1, further comprising:
recording, in a memory, changes to the frequency signature and/or the amplitude signature of subsequently received signals at the first node.
9. The method of claim 1, further comprising:
using at least one of the frequency signature and/or the amplitude signature of the received signal and the frequency signature and/or the amplitude signature of the previously received signal, determining a node in the wireless network most proximate to a condition of interest; and
sensing the condition of interest using sensors associated with the determined node.
10. The method of claim 1, further comprising:
when the frequency signature and/or the amplitude signature of an expected received signal and the frequency signature and/or the amplitude signature of the previously received signal are not within a predetermined range of similarity, establishing a second communication link between
one of the first node and the second node, and a third node,
prioritizing use of the second communication link over the first communication link.
11. The method of claim 1, further comprising:
when the frequency signature and/or the amplitude signature of an expected received signal and the frequency signature and/or the amplitude signature of the previously received signal are not within a predetermined range of similarity, modifying one or more communication parameters of the communication link.
12. The method of claim 11, wherein the one or more communication parameters comprise ping time, wait time, symbol time, transmit amplitude, error correction type, bits per tone, type of data compression, communication link prioritization, communication frequency band, and modulation strategy.

13. The method of claim 1, further comprising:
identifying, from one of
the frequency signature and/or the amplitude signature of the received signal
and
the frequency signature and/or the amplitude signature of the previously
received signal
a risk to the communication link; and
transmitting, from one of the first node and the second node, a message to a third
node or to a user of the wireless communication network regarding the identified risk.
14. The method of claim 1, further comprising:
establishing a preferred path of signal traversal along the network in terms of
optimal acoustic strength based at least in part on one or more of
the frequency signature and/or the amplitude signature of the received signal
from the first node, and
the frequency signature and/or the amplitude signature of the received signal
from the second node.
15. The method of claim 1, further comprising: using the unique signal as a replacement
for an encoded node identifier in the received signal.
16. A well, comprising:
a wellbore that extends within a subterranean formation; and
a downhole acoustic wireless network including a plurality of nodes spaced-apart
along a length of the wellbore, wherein the plurality of nodes includes a decoding node;
a processor; and
non-transitory computer readable storage media including
computer-executable instructions that, when executed on the processor, direct the

downhole acoustic wireless network to perform a process of communication therewith, the process including:

at a first node of the plurality of nodes, receiving a wireless transmission of a signal, the received signal having a frequency signature and/or an amplitude signature;

comparing the frequency signature and/or the amplitude signature of the received signal with a frequency signature and/or an amplitude signature of a previously received signal from a second node of the plurality of nodes; and

if the frequency signature and/or the amplitude signature of the received signal and the frequency signature and/or the amplitude signature of the previously received signal are within a predetermined range of similarity, accepting the received signal and the previously received signal as having been transmitted by the second node and defining the received signal and the previously received signal as a unique signal identifying a communication link between the first node and the second node;

wherein the receiving step comprises receiving, with the decoding node of an acoustic wireless network and from a tone transmission medium, a received acoustic tone for a tone receipt time, and wherein the comparing step comprises:

estimating a frequency of the received acoustic tone, as a function of time, during the tone receipt time, wherein the estimating includes estimating a plurality of discrete frequency values received at a corresponding plurality of discrete times within the tone receipt time;

separating the tone receipt time into a plurality of time intervals, wherein each time interval in the plurality of time intervals includes a subset of the plurality of discrete frequency values received during the time interval;

calculating a frequency variation within each subset of the plurality of discrete frequency values;

selecting a subset of the plurality of time intervals within which the frequency variation is less than a threshold frequency variation; and

averaging the plurality of discrete frequency values within the subset of the plurality of time intervals to determine major frequency of the received acoustic tone.

17. A non-transitory computer readable storage medium including computer-executable instructions that, when executed on a processor, direct an acoustic wireless network to perform a process of communication using a wireless network, comprising:

at a first node, receiving a wireless transmission of a signal, the received signal having a frequency signature and/or an amplitude signature;

comparing the frequency signature and/or the amplitude signature of the received signal with a frequency signature and/or an amplitude signature of a previously received signal from a second node; and

if the frequency signature and/or the amplitude signature of the received signal and the frequency signature and/or the amplitude signature of the previously received signal are within a predetermined range of similarity, accepting the received signal and the previously received signal as having been transmitted by the second node and defining the received signal and the previously received signal as a unique signal identifying a communication link between the first node and the second node;

wherein the receiving step comprises receiving, with a decoding node of an acoustic wireless network and from a tone transmission medium, a received acoustic tone for a tone receipt time, and wherein the comparing step comprises:

estimating a frequency of the received acoustic tone, as a function of time, during the tone receipt time, wherein the estimating includes estimating a plurality of discrete frequency values received at a corresponding plurality of discrete times within the tone receipt time;

separating the tone receipt time into a plurality of time intervals, wherein each time interval in the plurality of time intervals includes a subset of the plurality of discrete frequency values received during the time interval;

calculating a frequency variation within each subset of the plurality of discrete frequency values;

selecting a subset of the plurality of time intervals within which the frequency variation is less than a threshold frequency variation; and

averaging the plurality of discrete frequency values within the subset of the plurality of time intervals to determine major frequency of the received acoustic tone.

1/9

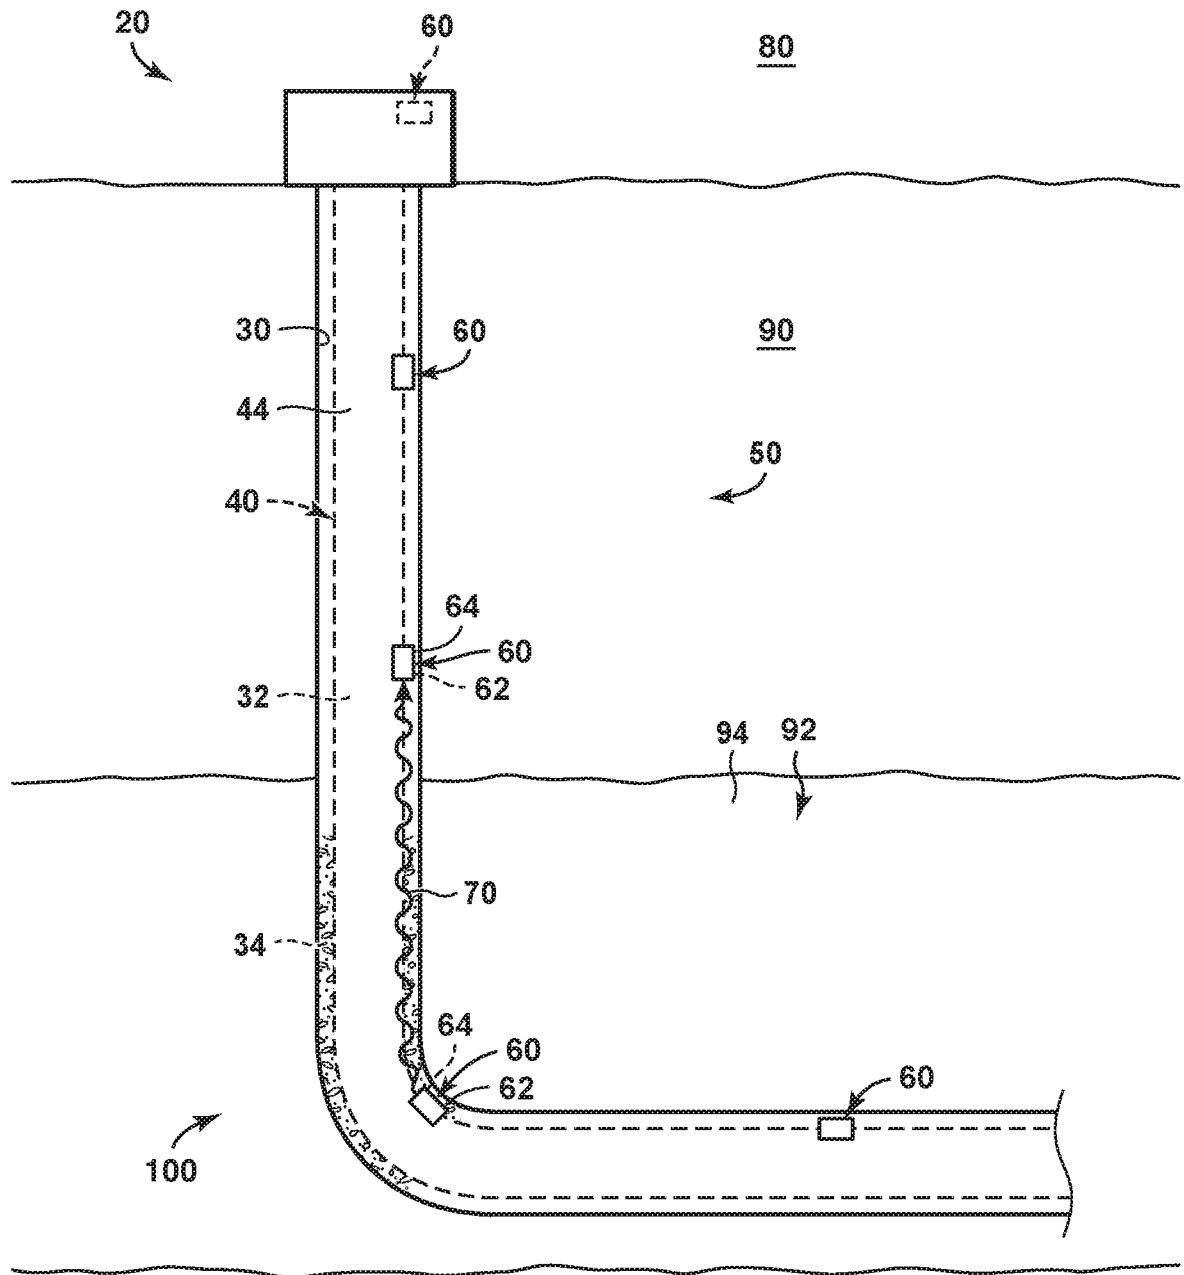


FIG. 1

2/9

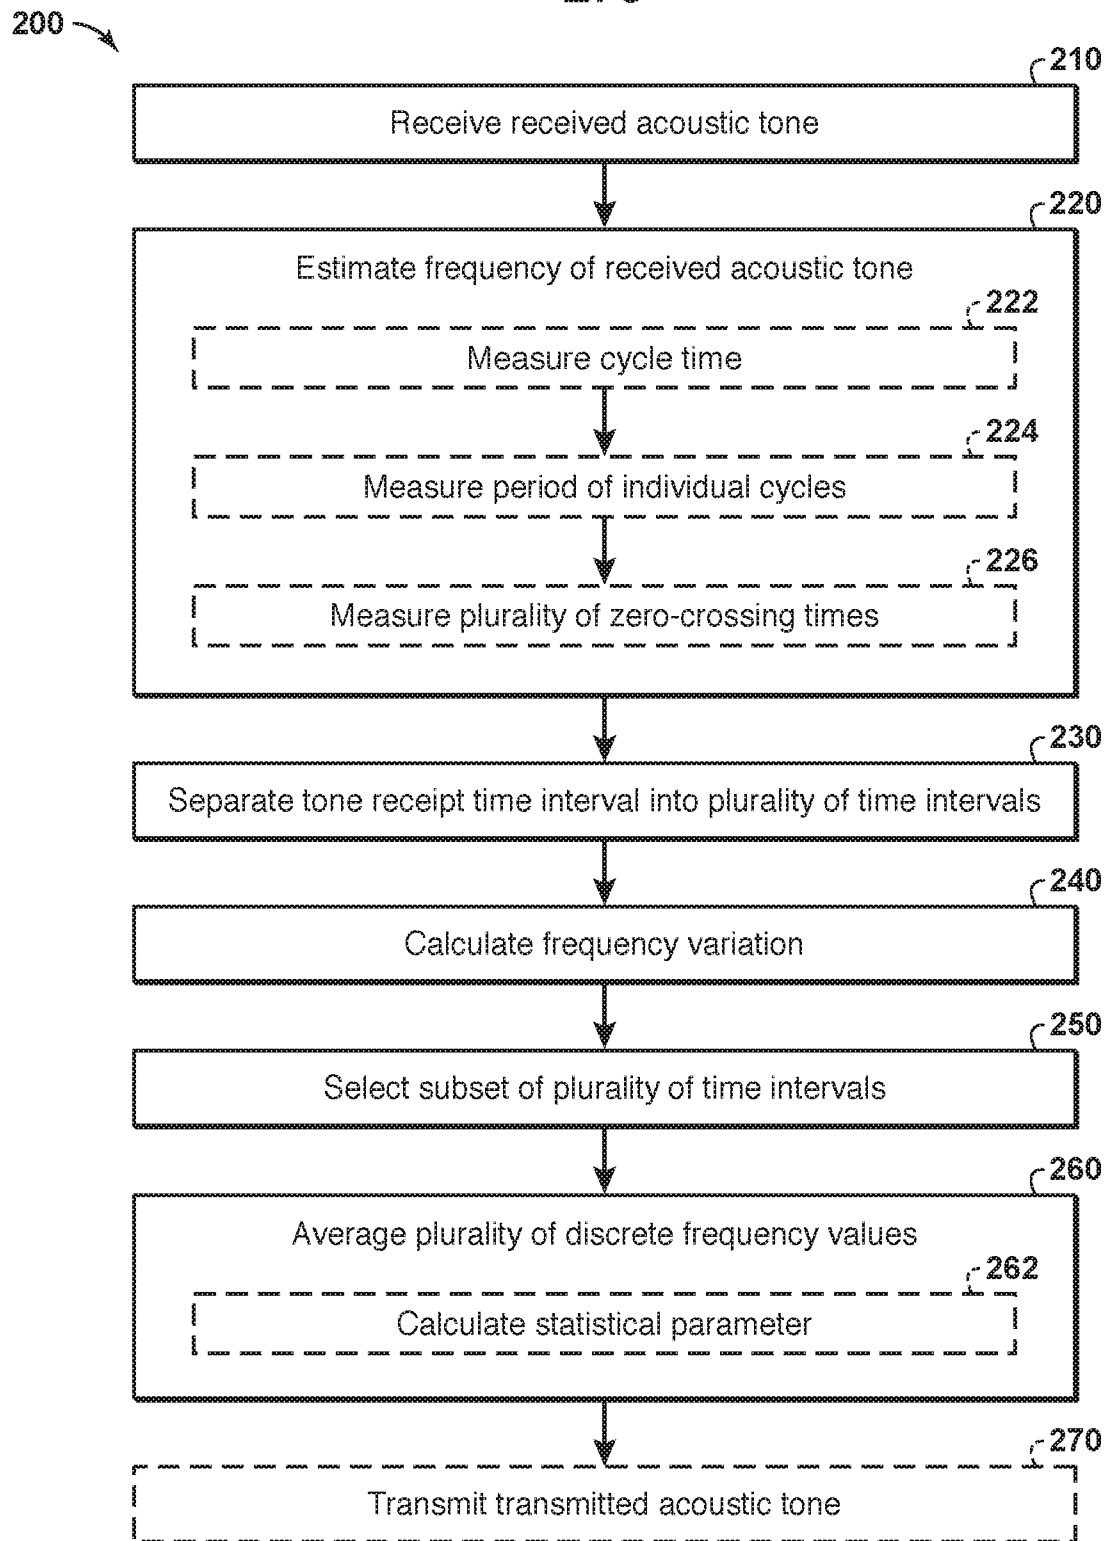
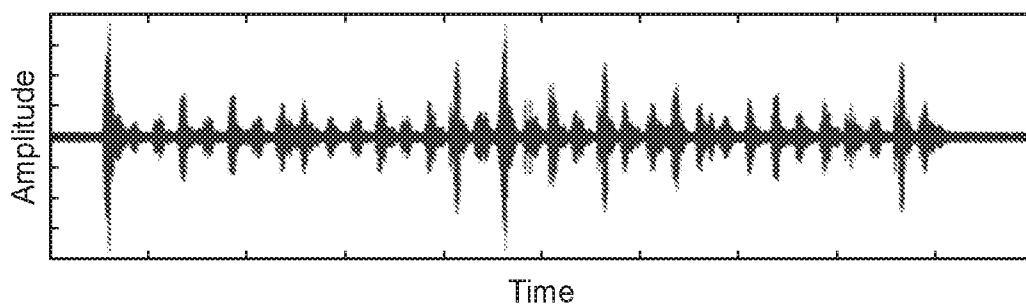
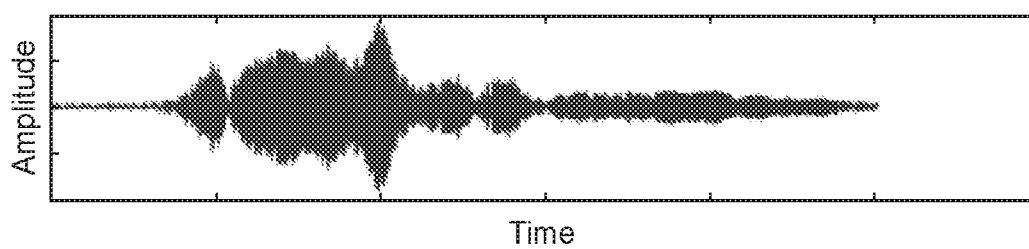
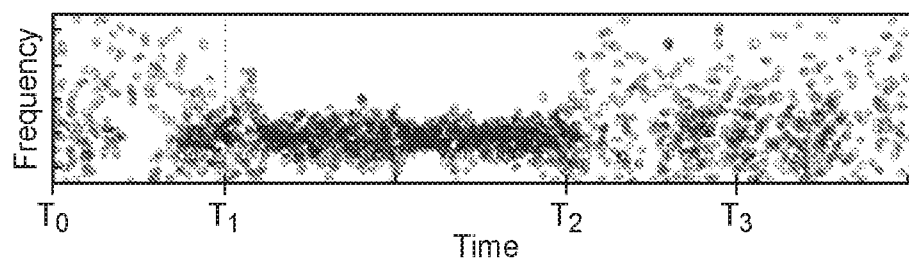


FIG. 2

3/9**FIG. 3****FIG. 4****FIG. 5**

Time Interval	Bin														Span
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
1	0	0	0	0	0	0	0	0	0	0	17	6	12	14	4
2	0	2	0	2	1	1	3	308	0	11	1	8	1	3	13
3	1	2	0	0	0	1	0	2	0	1	14	2	16	152	14
4	0	0	0	0	4	2	6	0	6	17	5	193	10	0	9
5	0	0	0	0	0	1	2	4	0	6	12	110	20	110	9
6	0	0	0	1	0	0	3	6	3	6	15	4	23	115	11
7	18	33	23	30	19	34	21	11	18	18	20	15	28	29	14
8	18	25	23	35	30	46	16	8	16	19	19	18	33	21	14
9	30	37	52	43	33	44	28	18	18	28	30	27	33	32	14
10	42	66	22	29	24	30	25	11	21	22	30	26	24	21	14



FIG. 6



Bin	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Total Hits	0	0	0	0	4	3	8	4	6	23	34	202	42	124

FIG. 7



FIG. 8D

6/9

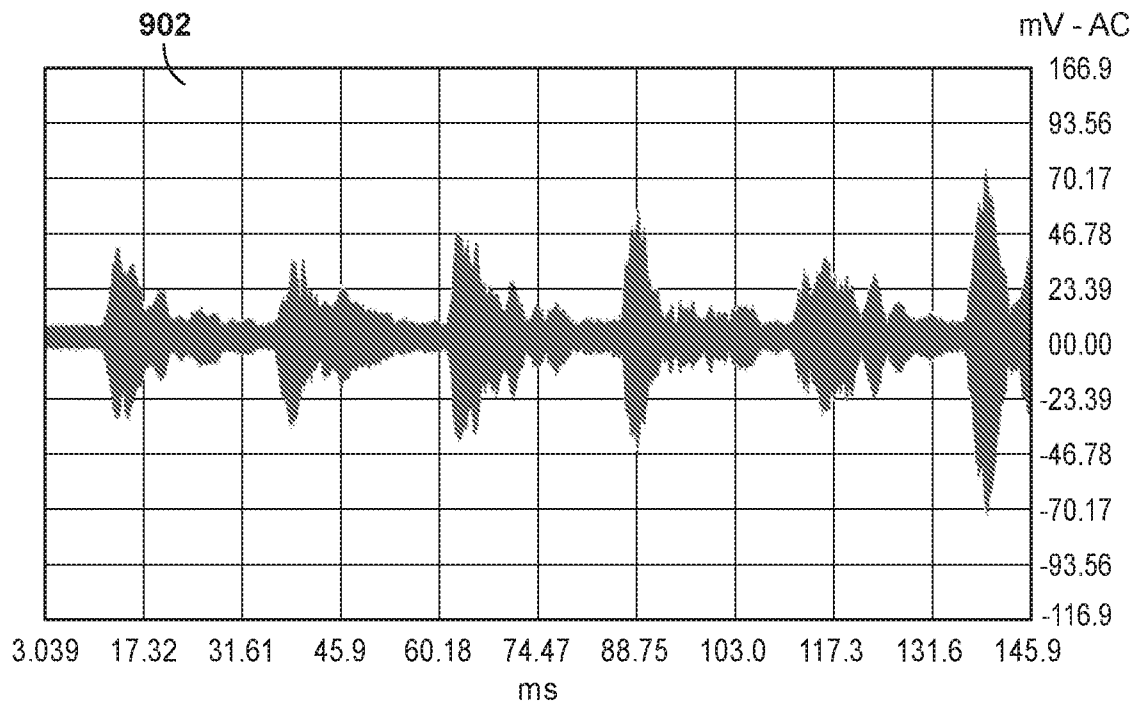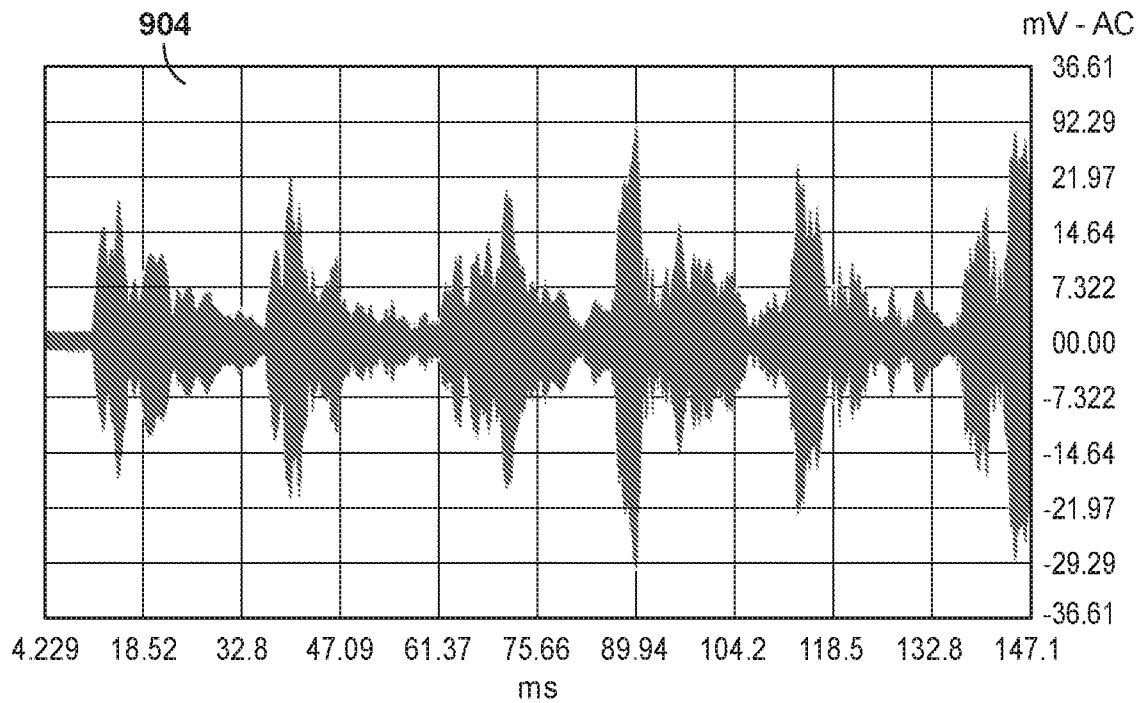
**FIG. 9A****FIG. 9B**

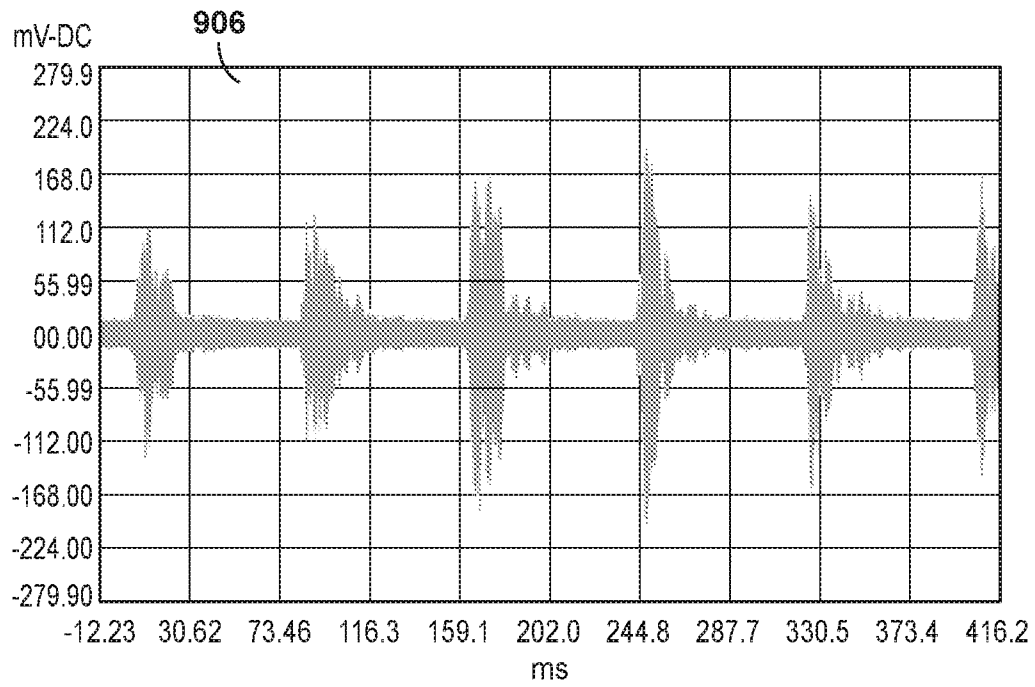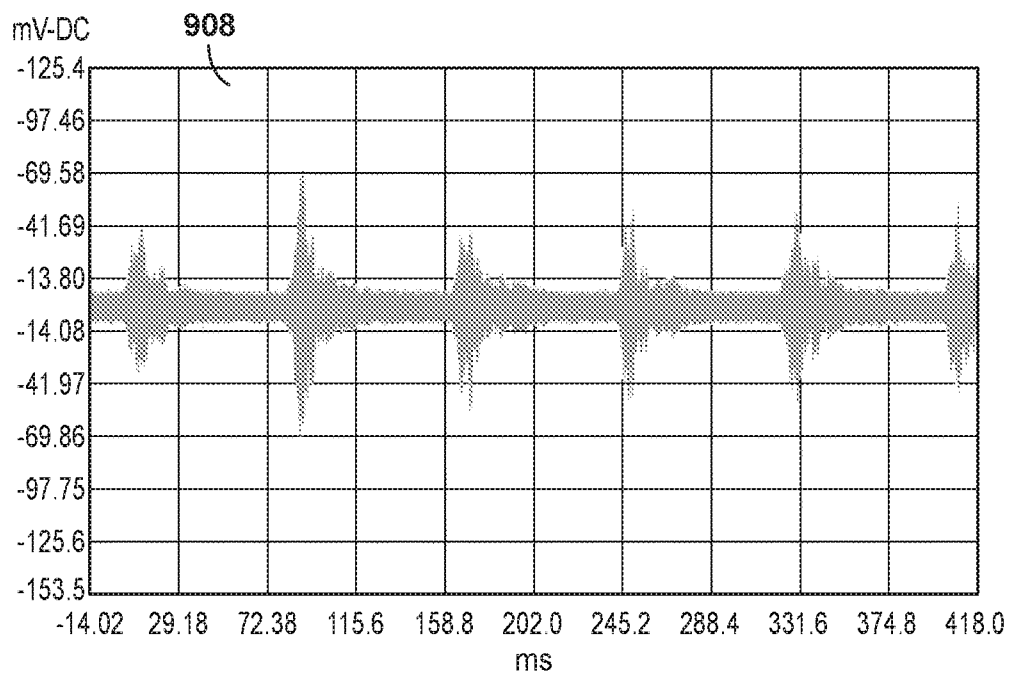7/9**FIG. 9C****FIG. 9D**

8/9

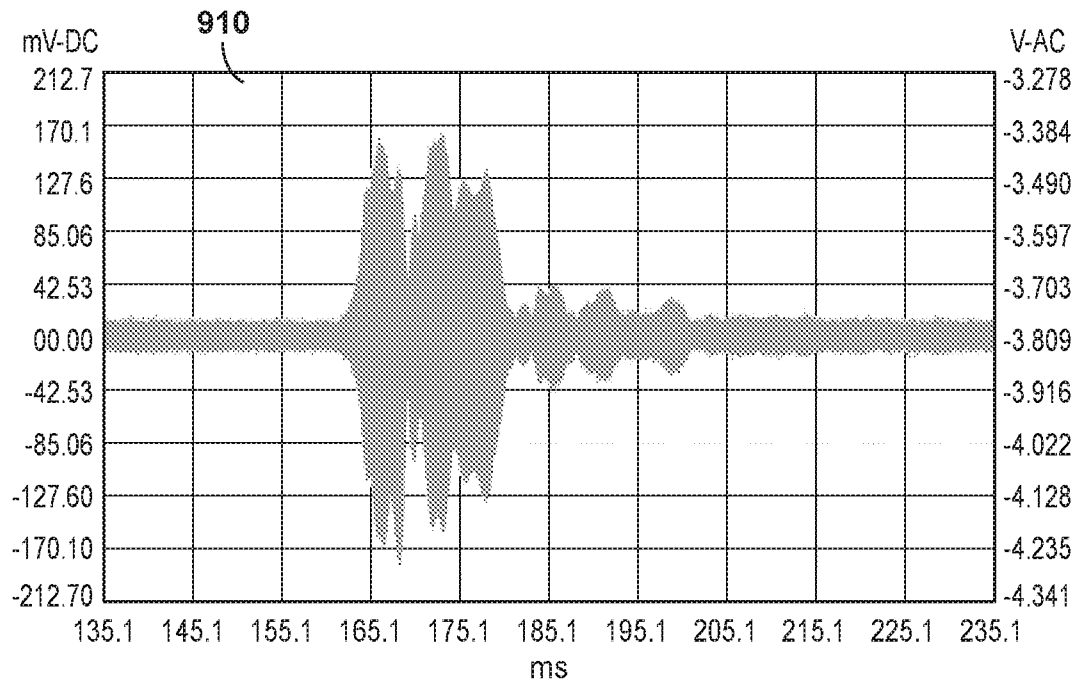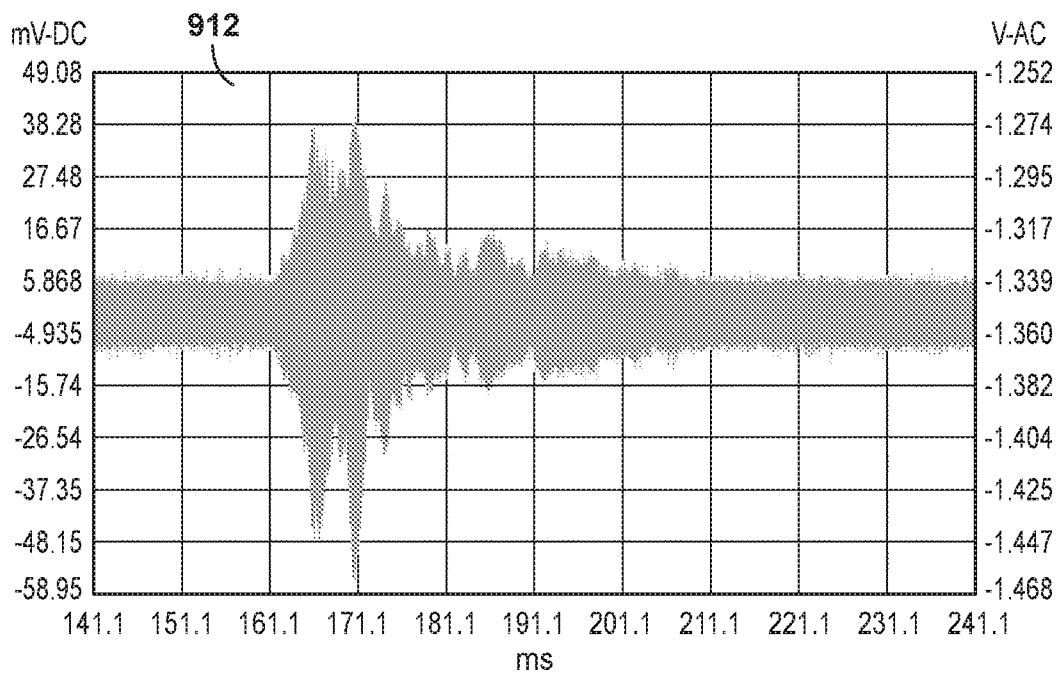**FIG. 9E****FIG. 9F**

9/9

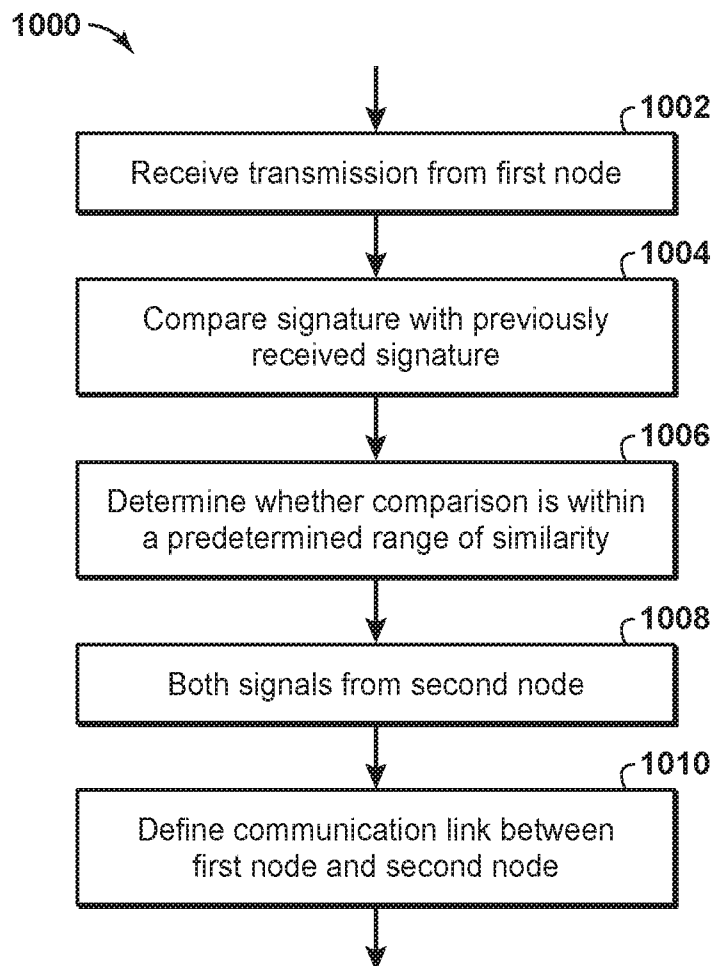**Figure 10**

