



(51) International Patent Classification:

A47J 31/02 (2006.01) A47J 31/44 (2006.01)
A47J 31/06 (2006.01)

(21) International Application Number:

PCT/US2015/049743

(22) International Filing Date:

11 September 2015 (11.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/536,142 7 November 2014 (07.11.2014) US
14/828,067 17 August 2015 (17.08.2015) US

(71) Applicant: LA VIT TECHNOLOGY LLC [US/US]; 228
Park Avenue South, Suite 28215, New York, NY 10003-
1502 (US).

(72) Inventors: LO FARO, Gian, Matteo; 608 Ashe St., Key
West, FL 33040 (US). CROSBY, Alan, M.; 38 Witherell
Drive, Sudbury, MA 01776 (US). BONNOITT, George,

Kingman; 34 Hickory Dr., Amherst, NH 03031 (US).
ADAMS, David, Preston; 214 Atlantic Ave., North
Hampton, NH 03862 (US). STRATTON, Alan, Kenneth;
663 North River Road, Millford, NH 03055 (US).

(74) Agent: KRAFT, Clifford, H.; 1354 Fairfield Ct.,
Naperville, IL 60565 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

[Continued on next page]

(54) Title: CAPSULE-BASED SYSTEM FOR PREPARING AND DISPENSING A BEVERAGE

1 - CHAMBER OPEN, CUP LOADED;
CUP CARRIER IS SPRING-LOADED
UPWARDS

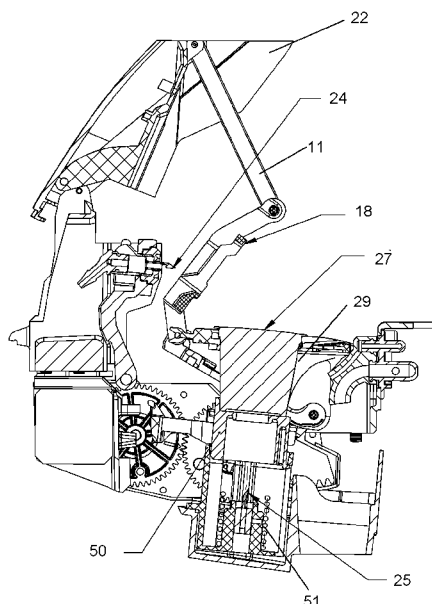


Fig. 22

(57) Abstract: A beverage dispensing system that can dispense both cold and hot drinks from either cold drink capsules or hot drink capsules. The cold or hot drink capsule is inserted into the system, and the lid is manually closed, if a cold drink capsule has been inserted, a mechanism cracks the capsule along a predetermined seam, injects cold mixing fluid into the capsule, and then rotates the capsule to pour out or further flush out the cold drink into a cup. If a hot drink capsule has been inserted, the lid is closed, and a rotating needle pierces the top of the capsule. The capsule is then punctured from the bottom. Hot water can then be injected into the top of the capsule, and the hot drink can be removed from the bottom into a cup.



TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Capsule-Based System for Preparing and Dispensing a Beverage

BACKGROUND

Field of the Invention

The present invention relates generally to beverage dispensing systems and more particularly to a complete beverage dispensing system that can dispense both cold and hot drinks.

Description of the Prior Art

There are a number of devices and techniques for dispensing a beverage such as, for example, a cup of coffee or tea from a capsule. In one approach a disposable container fits on top of a cup and has a compartment for receiving a beverage extract such as coffee with a large reservoir on top into which a person must pour boiling water. These devices can be disposable but expensive, the coffee is exposed to the air where it can easily get stale or contaminated, and they are not generally suitable for automatic coffee making or other beverage machines. Because the flow rate of beverage is generally slow, these devices are typically large relative to the volume of beverage dispensed. Also, these devices can be designed to be used upright and only the bottom area is available for filtration flow and this contributes to the slowness of the filtration process. In one construction, a filter is provided in a sealed receptacle and a support member is included intermediate the receptacle and filter which functions to support the filter. When the filter is wetted, it sags and conforms with the support member which has a hole in it to release the filtered beverage but otherwise blocks the output of the filter. Such a filter design used in an application where water is injected under pressure would provide low flow rates.

There are several known companies offering proprietary capsule based machines in the coffee and tea space, including Nestlé's Nespresso and Special T, Green Mountain Coffee Roaster's Keurig, Starbucks Verismo, Kraft's Tassimo, Sara Lee's Senseo, Nescafé's Dolce Gusto, Illy, Lavazza's Blue and Britta Yource. Mars Flavia and Esio are machines utilizing a pouch-style single use dispensing system. Additionally, there are several known companies operating single serving drink machines in the commercial environment, including PHSI's Interpure, Waterlogic's Innnowave, Vertex's Charm, Keurig, Nestlé and Mars Flavia.

Currently, there are other machines attempting to commercialize a similar capsule/pod based single-serve point of use cold beverage system. For example, Omnifrio, acquired by Primo Water, uses a puncture mechanism, which punctures the top and bottom of the capsule allowing a syrup concentrate to drain out. Bevyz uses a pressure mechanism to pop open the capsule to enable a mixing process. The Esio Hot & Cold Beverage System uses a syrup pouch system and pumps drink mix out of the pouch to mix it with water outside of the packet. Yource by Brita uses a capsule based machine.

When cold drinks are dispensed in a system in which the beverage is prepared by mixing cold fluid, usually water, with a powder instead of a liquid concentrate, one significant challenge is that the powder will not dissolve effectively during the mixing process. This can lead to poor quality output from the beverage system and unsightly and possibly unhealthful residue in the machine itself. Improved systems for providing a hot, cold, ambient temperature, carbonated, still mixed beverage designed to enable the

effective mixture of the powder with the liquid during dispensing providing for little or no residue, contamination, or cross contamination between beverages are described in U.S. Application No. 13/293,043, U.S. Provisional Application No. 61/411,786, and International Application No. PCT/US2011/060050, all of which are hereby incorporated by reference. The present disclosure describes an additional embodiment for providing mixed beverages.

In addition, there is no machine or system in the prior art that can dispense both cold and hot drinks. It would be highly advantageous to have a single beverage dispensing machine that can receive either a hot drink or a cold drink capsule, process the capsule and dispense the desired hot or cold drink. While the hot and cold drink capsules can be identical in shape and size, it is advantageous to have them of different shapes and sizes. Maintaining the familiar hot drink capsule (such as the well-known coffee capsule used by Green Mountain Keurig) readily identifies it from the cold drink capsule used by LaVit LLC. This prevents mistakes by the user and makes it easier for the system to identify whether a cold drink or a hot drink is desired.

SUMMARY OF THE INVENTION

The present invention comprises a complete hot and cold beverage dispensing system. It is a machine with a compartment adapted to receive a drink mix capsule and a control panel that can display messages to a customer and allow the customer to choose drink options. The present

invention also comprises a beverage preparation mechanism or sub-system to totally control the mechanical portion of hot and cold beverage preparation.

To dispense a beverage, a user approaches the machine, places a cold drink capsule or a hot drink capsule into the compartment, closes the lid, and selects the type of drink on the control panel (or the selection may be made automatically by the system based on the type of capsule inserted).

If the selection and capsule represent a cold drink, the machine opens the capsule when the machine cover is closed. An upper nozzle injects a small amount of cold liquid to mix with and dissolve (or dilute) the contents. A second nozzle begins to fill the vessel (cup) below an exit orifice.

Simultaneously, an internal mechanism rotates the capsule approximately ninety degrees to empty the contents of the capsule into the vessel. The cold drink capsules can contain a powder or a liquid which is mixed into the filtered water to produce the cold beverage. The drinks can be "house formulas" or common mass market branded beverages licensed from the manufacturers.

The cold drink capsule is opened by cracking and peeling. This method of accessing the capsule offers an effective and efficient way to prepare and deliver the beverage. A mechanical device is adapted to crack the capsule along a crease punched into the capsule below the top cover of the capsule. The mechanical device peels open the capsule along the cracked crease typically when a user closes the lid. For example, a slight crease could be included in a lip of the capsule or directly below it that can be used to break the seal and allow the cover to then be peeled or pried back. As stated, when the cover is peeled back (e.g., tearing open the capsule) the

drink is mixed with a mixing stream of liquid, which in many embodiments will be water, either cold or hot, sparkling or still.

If the selection and capsule represent a hot drink, the capsule is punctured by a needle on the bottom by closing the lid. Closing the lid of the machine forces the hot drink capsule down on the needle. An injection needle arm rotates a needle into position that penetrates the lid of the capsule. A hot liquid is injected into the hot capsule to brew or mix the hot drink. The hot drink is forced out of the hole in its bottom by pressure via a hot drink spout into a cup. The hot drink capsule can contain powder, grind (such as ground coffee) or a liquid which is brewed or mixed with injected hot liquid such as hot filtered water.

A purpose of the present invention is to offer a compelling alternative to bottled water and other water based ready-to-drink (RTD) beverages. The invention is meant to offer a convenient, reliable, and cost effective Point of Use solution to the consumer's hydration and beverage needs, both hot and cold. The invention is a single-serve beverage system that can produce unlimited chilled filtered water as well as single serve unique beverages through a cold capsule-based system. The present invention can dispense carbonated, flavored, enhanced, ultra purified filtered waters and flavors, hot coffee, hot and cold tea, hot chocolate and numerous other beverages both hot and cold..

DESCRIPTION OF THE FIGURES

Attention is now directed toward several drawings that illustrate features of the present invention:

Fig. 1 shows an embodiment of the complete hot and cold beverage dispensing system.

Figs. 2A and 2B show one embodiment of a typical cold capsule.

Fig. 3 shows a schematic diagram of the controller and other driven components of the system.

Fig. 4 shows a perspective view of an embodiment of a hot/cold dispensing mechanism.

Fig. 5A shows a side sectional view of the hot/cold dispensing mechanism in a neutral or starting configuration with a cold capsule inserted.

Fig. 5B shows a side section view of the hot/cold dispensing mechanism with a hot capsule inserted and the injection needle half-way deployed.

Fig. 5C shows a perspective view of the mechanism of Fig. 2B with the injection needle fully deployed.

Fig 5D shows a bottom perspective view of the hot/cold mechanism.

Fig. 6 shows a side sectional view of the hot/cold mechanism with the cover partly closed.

Fig. 7. shows a side sectional view of the hot/cold mechanism with the cover completely closed.

Fig. 8 shows a side sectional view of the hot/cold mechanism with the cover completely closed as the pouring frame begins to rotate the cold beverage capsule.

Fig. 9 shows a side sectional view of the hot/cold mechanism with the cover completely closed with the pouring frame at the maximum rotated position.

Fig. 10 shows a side sectional view of the hot/cold mechanism with the cover open in the neutral configuration with a hot beverage capsule or k-cup inserted.

Fig. 11 shows a side sectional view of the hot/cold mechanism with the cover partially closed and the hot capsule sitting on the bottom needle.

Fig. 12 shows a side sectional view of the hot/cold mechanism with the cover totally closed so that the bottom needle has punctured the bottom of the hot capsule.

Fig. 13 shows a side sectional view of the hot/cold mechanism with the cover totally closed while the injection needle rotates over the hot capsule.

Fig. 14 shows a side sectional view of the hot/cold mechanism with the cover totally closed and the injection needle piercing the top of the hot capsule.

Fig. 15 shows a front view of the hot/cold mechanism.

Fig. 16 shows a left view of the hot/cold mechanism.

Fig. 17 shows a right view of the hot/cold mechanism.

Fig. 18 shows a rear view of the hot/cold mechanism.

Fig. 19 shows a top view of the hot/cold mechanism.

Fig. 20 shows a bottom view of the hot/cold mechanism.

Figs. 21A, 21B and 21C show three isometric view of the hot/cold mechanism in different positions.

Fig. 22 shows a cross-section of an alternate embodiment of the present invention where the top of a hot capsule is pierced before the bottom.

Figs. 23-27 show the sequence of events during the dispensing of a hot beverage with the embodiment of Fig. 22.

Several drawings and illustrations have been presented to aid in understanding the present invention. The scope of the present invention is not limited to what is shown in the figures.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention comprises a complete hot and cold beverage dispensing system. It also comprises a beverage preparation mechanism or sub-system that can be inserted and removed from a housing to totally control the mechanical portion of hot and cold beverage preparation.

An embodiment of a total beverage dispensing machine or system is shown in Fig. 1 and includes an outer housing (200) with a cover (201) containing a cold and hot water or other liquid supply, a controller that controls all aspects of beverage preparation and dispensing and the beverage preparation mechanism that actually dispenses the drink. The controller is in electrical communication with one or more user control panels (201) where messages can be displayed to the user, and the user can select various

beverages. Selections may also be made with buttons (203). In some embodiments, selection of a cold or hot drink is made solely on the basis of what type of capsule is inserted. Typical selections can be cold drinks such as fruit drinks, lemonade, other flavored cold drinks and the like, while hot beverages can include coffee, tea, hot chocolate and the like. The processor can be a microcontroller known in the art, a microprocessor, or any other type of processor or computer configured to store and execute stored instructions. The controller typically includes on-board and external memory. In some embodiments, the controller may have communication capability and be able to communicate status and receive commands over a network like the Internet.

Both hot and cold beverages are supplied in sealed capsules. Cold beverage capsules (or simply cold capsules) are typically roughly diamond-shaped cups with a rim that seats a sealed lid. The cups can contain either powder or liquid cold drink mixes. Each cold capsule typically has a groove, score or indentation either on the rim or directly below the rim. When the capsule is captured by the machine and pressed downward by the user closing the machine lid, the cold capsule can be opened by allowing the rim to encounter a protrusion on one of its ends. The upward force of the protrusion against the rim as the capsule rotates or moves downward causes part of the rim to tear open along the groove providing an opening where cold liquid can be injected into the capsule causing the mixed cold drink to exit the capsule and fill a cup below the mechanism. A typical embodiment of cold capsules are similar to capsules supplied by LaVit LLC of New York for their cold beverage dispensing systems (see pending U.S patent application no.

13/293,043 published as 2012/0231126 by some of the same inventors as the present invention). Fig. 2 shows an embodiment of a typical cold capsule.

The hot capsules are similar to the familiar cups supplied by for coffee dispensing by several vendors. For the present invention, the hot capsules can contain other products besides just coffee including tea or hot chocolate for example, or any other hot drink.

Returning to Fig. 1, a view of an embodiment of the system of the present invention can be seen. The housing (200) includes a base (300) and an access lid or cover (201) that allows insertion of a cold or hot capsule. A control panel (201) is also mounted on the housing (200) that allows a user to select and command preparation of a beverage. The housing (200) contains all necessary components including plumbing, liquid heating, control and sensing as well as a hot/cold beverage dispensing module or mechanism.

Fig. 2A shows a typical cold capsule (302) with a rim (305) and lid (303). A protrusion (301) pries the rim (305) open when the capsule is forced to rotate downward while being captured with a fixed member (304). Fig. 2B shows the pried open cold capsule (302). While Fig. 2B shows the capsule being opened at both ends, a preferred way of opening the capsule is to open it only at one end. Either opening technique is within the scope of the present invention.

Fig. 3 shows schematically the controller (203) which can be solid state controller chip known in the art. The controller (203) is electrically coupled to the control panel (202) which can be a touch panel, LCD panel or any other control panel of any type. The controller (203) is a processor that executes

stored instructions that, in addition to reading and writing the control panel (202)

also controls one or more drive motors (204) that are typically part of the mechanical drink preparation module (205). The controller (203) can command the drink preparation module (205) to either prepare and dispense a cold beverage or to prepare and dispense a hot beverage depending upon the user selection. The control panel (202) can display a message to insert the proper capsule in the preparation mechanism and to close the cover. The controller (203) can also receive an instruction about the size of the cup placed under the device and hence provide the correct amount of cold or hot fluid. In some embodiments, the controller (203) receives sensor or camera information as to what type of capsule has been inserted and proceeds to prepare a cold or hot drink. In the case of a camera, the camera can read a label or barcode on the capsule.

Usually, the cold or hot fluid is filtered water; however, it does not have to be water. Other fluids may be used with some drinks. In particular, for some cold drinks, the fluid can be carbonated water. Any fluid is within the scope of the present invention. The controller (203) can also control various pumps (206), heaters (207), and valves (208). In addition, it can read the temperature of the hot injection liquid with a temperature sensor (209). The controller (203) temperature sensor (209) and heater(s) (207) can operate in a closed-loop configuration. Finally, in some embodiments of the present invention, the controller (213) can read a sensor or camera (210) located near the capsule insertion point to determine whether a cold capsule or hot capsule (or any capsule) has been inserted. The sensor (210) may include two or

more sensors, one to determine if anything at all has been inserted, and another to determine whether a cold or hot capsule has been inserted. There may be a camera (212) to read a label or barcode on the capsule. These may be infrared LED sensors or any other type of sensor. Further sensors (211) can optionally determine whether the cover is open or closed (seated) and the position of rotating members in the hot/cold dispensing module. If the cover is in the wrong position, the controller (203) can place an error message on the control panel (201).

The actual preparation and dispensing of the cold or hot beverage is handled by an insertable hot/cold dispensing mechanism or module that will now be described in detail.

Hot/Cold dispensing Mechanism

The present invention deploys an insertable beverage dispensing module or mechanism that can dispense cold beverages using the sealed capsule previously described and can dispense hot beverages using capsules similar to standard capsules known in the art for dispensing coffee. The cold beverage capsules may contain a powder or liquid mix for any cold drink; the hot capsules may contain a powder mix for any hot drink including coffee, tea and hot chocolate, or any other hot drink.

The present invention handles both cold and hot beverages by using an unique mechanism adapted to manipulate both types of capsules. When a cold drink is desired, the user inserts a cold drink capsule into the mechanism and closes the machine lid. The shape of the cold drink capsule, and the manner in which it is seated in the mechanism causes it to be pried open when the lid is closed by being pushed downward against a protruding part as

previously described. Cold liquid such as water or other cold liquid can then be injected into the capsule mixing and forcing the contents out and producing a cold drink.

When a hot drink capsule is inserted in the mechanism, closing the machine lid does not open this type of capsule since it is shaped differently. However, it does press the hot capsule down on a bottom puncture needle making a hole in the bottom of the hot capsule. An injection needle arm then rotates from a vertical rest position to a horizontal position over the hot drink capsule causing an injection needle to puncture the top of the capsule. Hot liquid can then be forced or injected into the hot drink capsule under pressure to produce a hot drink. The brewed or mixed hot drink is forced out of the bottom hole or bottom needle to a hot spout from where it flows into a cup.

Turning to Fig. 4, a perspective view of an embodiment of a hot/cold dispensing mechanism can be seen. This mechanism, or head, fits into the drink dispensing machine previously described in place of a cold-drink-only mechanism. The mechanism of Fig. 4 includes an upper housing (1), and a lower housing (3) that are joined to form a single housing. A cover or lid (22) is attached so that it can pivot closed or open on rear pins or hinges. The cover (22) is typically biased closed, but can be easily opened and closed by hand.

The mechanism includes a vertical, substantially cylindrical cavity (29) in its center, that when the cover (22) open, is configured to receive and hold either a cold drink capsule or a hot drink capsule. A small protruding lip or frame (5) allows the capsule to seat snugly, but removably in the cavity (29). The lip (5) also prevents insertion of either type of capsule upside-down. A

hot drink capsule is typically taller than a cold drink capsule. It thus sits lower in the cavity (29). This provides a way to identify the difference between the two types of capsules with a sensor, camera or other technique. Also, capsules may have bar codes or other readable indicia indicating what type of capsule they are and what type of drink they contain.

The cover (22) cooperates with the upper housing (1) and is coupled with a pair of links (20) to a ram frame (18) which also pivots downward and is used to force cold drink capsules open in order to open them, and to force hot drink capsules down onto a bottom puncture needle..

Fig. 5A shows a side sectional view of the mechanism of Fig. 4. The cover (22) pivots open and closed on hinge pins (30) on each side that attach the cover (22) to a link base (2). The link base (2) is mounted on the lower housing (3) that provides a pedestal for the cover (22). The cover (22) is coupled with a link bar (20) to the ram frame (18) that also moves downward when the cover (22) is closed. Fig. 5A shows a cold capsule (31) seated in cavity (29). In this case, when the cover (22) is closed by a user, the link bar (20a) forces the ram frame (18) down on to the cold capsule (31). The cold capsule (31) moves downward and rotates against a protrusion (shown in Fig. 2A), and is forced open.

It can be seen in Fig. 5A, that the cavity (29) is not simply cylindrical, but has a lower cylindrical part (32) and a tapered, conical upper part (33). The upper part (33) is adapted to receive and hold a cold capsule of the type previously discussed. The lower substantially cylindrical part (32) is adapted to receive and hold a hot capsule, which being of smaller diameter and different shape from the cold capsule, seats lower than a cold capsule. The

bottom of the cavity (29) has a vertical needle (25) used to puncture the bottom of a hot capsule when the machine cover (22) is closed.

When a hot capsule is used, after the cover (22) is closed and the bottom of the hot capsule has been punctured, an injection needle arm rotates from a stationary vertical position to a horizontal position over the hot capsule which causes an injection needle (24) to punctures the top of the hot capsule. This can be seen in Figs. 5B-5C. In Fig. 5A, the injection needle (24) can be seen attached to an injection hose (28) in a horizontal or rest position. This is its starting or rest position where the injection needle arm (9) is in the vertical position. Fig. 5B is a side sectional view of the mechanism with a hot capsule inserted and the injection needle (24) half-way deployed. Fig. 5C is a perspective view of the mechanism with the injection needle (24) fully deployed and sealed against the top of the hot capsule.

Turning to Fig. 5B, the injection arm (9) can be seen attached with a first drive link (10) and second drive link (11) through a pivot (34). An injection arm (9) is attached to a partial gear (17). When the partial gear (17) is caused to rotate through an angle, the injection needle (24) rotates continuously from the rest position shown in Fig. 5A to a final position shown in Fig. 5C where it has punctured the hot capsule. Fig. 5B shows the injection needle (24) half-way through the rotation cycle. The partial gear (17) is driven with a smaller drive gear (8) that is coupled to a drive motor (not shown). As the motor rotates the drive gear (8), the partial gear (17) makes a partial rotation causing the injection needle arm (9) to move from the vertical position to a horizontal position over the hot capsule (27) causing the injection needle (24) to puncture the hot capsule top.

Fig. 5C shows a top-side perspective view of the mechanism with the injection needle (24) fully deployed. In this configuration, the injection needle (24) has punctured the hot capsule, and hot liquid can be injected into the capsule through the injection hose (28). The mechanism that drives the injection needle includes a link base (2) and an armature mount (6) which provide support for the injection needle rotation sub-system. The first drive link (10) can be seen attached to the partial gear (17). The injection arm (9) is attached to the partial gear (17) (shown in Fig. 5B). It can be seen in Fig. 5C that the partial gear (17) and hence the drive gear (shown in Fig. 5B) are located laterally at the approximate center of the assembly.

Turning to Fig. 5D, a bottom perspective view of the mechanism can be seen with the cover (22) in the closed configuration. The lower housing (3) is attached to the upper housing (1), and the cover (22) pivots between an open and closed position. The closed position is shown in Fig. 5D. On the bottom of the assembly, a hot spout (4) and a cold beverage orifice (35) can be seen. At the lower back of the assembly, there is a motor mount (13) that holds the drive motor (not shown). The drive motor directly drives the drive gear (8) which is coupled to the partial gear (shown in Fig. 5C). A mounting bracket (7) is used to mount the drive gear (8).

As previously stated, the present invention can dispense both cold and hot beverages. The sequential process employed for both situations will now be examined step-by-step.

Cold Beverage Dispense

Returning to Fig. 5A, the dispensing mechanism can be seen in section in a static or resting configuration with the cover (22) open. The cover (22) is

coupled to the ram frame (18) through a link bar (20). The ram frame (18) is fully raised. A cold capsule (31) of the type previously described is shown inserted into the dispensing cavity (29). The cold beverage capsule (31) has a rim that allows it to seat high in the cavity (29) which is in the partially conical upper region (33).

Fig. 6 shows the mechanism as the user is closing the cover (22). The cover's downward travel has caused the ram frame (18) to pivot downward onto the capsule (31) through the action of the two link bars (20) and the pivot (36) capturing the capsule.

Fig. 7 shows the mechanism as the user finally pushes the cover (22) totally closed. This final push causes the cold capsule (31) to pry open along a scored seam on its rim or directly below its rim because the outer edge of the capsule rim abuts a protrusion (shown in Fig. 2A) as the capsule body is pressed downward as has been previously described. The pod frame (16) is a rotating member that pries the cold capsule into an open configuration.

Fig. 8 shows the mechanism after the cover (22) is closed and the cold capsule (31) has been torn open. The entire pod frame (16) along with the ram frame (18) rotates forward to prepare for dispensing the cold beverage. A motor, typically a stepper motor, and other drive gears (not shown) rotate the cold capsule (31) into an emptying position.

Fig. 9 shows the mechanism after the pod frame (16) has completely rotated the cold capsule. This is the cold beverage dispense configuration where contents of the cold capsule (31) are dispensed when a stream of cold liquid such as water is injected into the body of the cold capsule (31). The

ready-to-drink cold beverage dispenses out of the bottom of the assembly through an orifice directly into a cup through a cold drink exit orifice (35).

After the cold beverage is dispensed, the system rotates back to the original neutral position. The user can dispose of the spent cold capsule (31) upon opening the cover (22). In some embodiments, an additional mechanism (not shown) forces the spent cold capsule (31) into a disposal area.

Hot Beverage Dispense

Fig. 10 shows a side sectional view of the mechanism with the cover (22) completely open and a hot beverage capsule (27) inserted into the cavity (29). Since the hot capsule (27) is more nearly cylindrical than the cold capsule (although slightly conical), its rim does not extend out as far as the rim on a cold capsule, and it tends to seat lower in the cavity (29). There is a bottom needle (25) under the hot capsule (27) that will puncture the bottom of the hot capsule when the cover (22) is fully closed. The injection needle (24) is in a neutral or rest position, and the ram frame (18) is raised.

Fig. 11 shows the mechanism as the user closes the cover (22). The ram frame (18) has rotated downward in response to the linkage (20) and rests on top of the hot capsule (27) capturing it. The hot capsule (27) is sitting on the bottom needle (25), but the bottom needle has not yet pierced the capsule.

Fig. 12 shows the mechanism with the cover (22) completely closed. The force of closing the cover has caused the ram frame (18) to press the capsule (27) down onto the bottom needle (25) forcing the bottom needle to

puncture the bottom of the capsule (27). The system is ready to brew the hot beverage.

Fig. 13 shows the next step as the drive motor (not shown) begins to turn the drive gear (8) which turns the partial gear (17). This causes the injection arm (9) to pivot forward bringing the injection needle (24) toward the top of the hot capsule (27).

Fig. 14 shows the injection needle (24) piercing through the top of the hot capsule (27) as the injection arm has reached its lowest position. The drive gear (8) and partial gear (17) have reached the end of their allowed rotation and have stopped. Hot liquid may now be injected under pressure into the hot capsule (27) through the injection needle (24). An injection needle seal (23) seals the injection needle (24) to the top of the hot capsule (27) preventing leakage during the injection. The hot drink now brews or mixes. It is forced out through the hole in the bottom of the hot capsule and is dispensed into a cup through a hot spout (4) (shown in Fig. 5D and Fig. 20).

After the hot beverage is dispensed, the user (or the next user) can dispose of the spent hot capsule (24) after opening the cover (22).

Views of Outside of Hot/Cold Dispense Mechanism

Figs. 15, 16, 17, 18, 19 and 20 show the outside of the hot/cold dispense mechanism from each primary direction. Fig. 15 shows a front view. Fig. 16 shows a left view. Fig. 17 shows a right view. Fig. 18 shows a rear view. Fig. 19 shows a top view. Fig. 20 shows a bottom view.

Turning to Fig. 15, a front view of the hot/cold mechanism is seen. The cover (22), ram frame (18) and injection needle (24) are visible. The cover (22) is shown in the open position.

Fig. 16 shows a left view of the mechanism. The cover (22), link (20) and pivot (34) can be seen. The pin hinge (30) allows the cover (22) to pivot. The opening frame (5) and the opening pod frame (16) are also visible. To open the cold capsule, or press the hot capsule down on the bottom needle, the opening pod frame (16) rotates from the horizontal position shown in Fig. 16 to a vertical position. The rotation is around a pin (37).

Fig. 17 shows a right view of the mechanism. Again, the cover (22) and link (20) can be seen. A special partial gear assembly (38) driven with a different motor causes the pod frame (16) to rotate as has been discussed in order to allow the contents of a cold capsule to be dispensed.

Fig. 18 shows a rear view of the mechanism. Here the cover (22) is seen from the back side and closes downward and away from the point of view. The injection needle drive gear (8) can be seen through a slot in the rear of the lower housing.

Fig. 19 shows a top view that mostly includes the cover (22), while Fig. 20 shows a bottom view. The hot spout (4) and the cold orifice (35) can be seen. Also, in the rear of the unit is the drive motor mount (13), the injection needle drive gear (8) and the partial gear (17). Finally, the injection hose (28) can be seen exiting the top rear of the housing.

Figs. 21A-21C show three perspective views of the mechanism in three different positions. Most of the features previously described can be seen. Of particular interest is the pod frame (16) that rotates to open the cold capsule while the ram frame (18) acts to restrain the it. A lower pouring frame holds the cold drink parts. This lower pouring frame is driven by the lower gear (38)

to rotate forward to allow the cold beverage to dispense. The upper pouring frame (19) rotates to seat either type of capsule.

Particular embodiments of the present invention can be equipped with a sensor that determines whether a cold capsule or a hot capsule has been inserted into the mechanism (or that anything has been inserted). This sensor can be coupled to the controller so that if the user has inserted the wrong type of capsule for his or her selection, the machine can display an error message and not actually dispense the beverage or cause deployment of the injection needle onto a cold capsule. In the case of an error, the user can be given a chance to either remove mis-inserted capsule and discard it, or to correct his or her selection to match the inserted capsule. Because when the cover (22) is completely closed, a cold capsule has been torn open, or the bottom needle has penetrated a hot capsule, it is not possible to remove a mis-inserted capsule and use it later. If it is removed, it should be discarded.

In a different embodiment of the present invention, the hot dispensing is configured so that the top of the hot capsule is punctured by the inlet needle before the bottom is punctured by the outlet needle.

Turning to Fig. 22, a cross-section of this embodiment may be seen. The hot capsule (27) is seated in cavity (29) in a manner similar to previously-described embodiments. The capsule (27) sits on a carrier (50) that is spring-loaded upward by a carrier spring (51). The cover (22) is open. An outlet needle (25) is located under the capsule (27). An inlet injection needle (24) is shown in a retracted position away from the capsule (27).

Figs. 23-27 show the sequence of preparing and dispensing a hot drink. In Fig. 23, the cover (22) has been closed. A ram frame (18) forces the

cup carrier (50) and capsule (27) partially downward against the carrier spring (51). The outlet needle (25) remains below the capsule (27) and does not puncture the capsule.

In Fig. 24, a motor-driven arm (11) begins to rotate the inlet injection needle (24) toward the top of the capsule, while the outlet needle (25) continues to remain below the capsule (27). The arm (11) is driven by gears which are coupled to a motor.

In Fig. 25, the inlet injection needle (24) punctures the top of the capsule (27) as the arm (11) reaches an approximately horizontal position. The outlet needle (25) is still below the bottom of the capsule (27) and has not yet punctured it.

In Fig. 26, the motor-driven arm (11) begins to force the capsule (27) further downward against the spring and onto the outlet needle (25). The plastic capsule bottom (54) can deflect slightly before piercing occurs.

In Fig. 27, the capsule bottom (54) is punctured by the outlet needle (25) at the bottom of the capsule carrier stroke. Hot liquid can then be infused into the capsule through the inlet injection needle under pressure to produce the hot drink. The finished hot drink can be conveyed out of the bottom of the capsule through the outlet needle (25) and dispensed to a cup through a hot orifice as in other embodiments.

After the dispensing is complete, the motor-driven arm (11) returns to the vertical position shown in Fig. 22. The capsule carrier is forced upward by the carrier spring (51) to the position shown in Fig. 23. Finally, as the cover (22) is opened, the spent capsule is further forced upward by the carrier

spring (51) to the position shown in Fig. 22 where it can be manually or automatically removed.

Several descriptions and illustrations have been presented to aid in understanding the present invention. One with skill in the art will understand that numerous changes and variations may be made without departing from the spirit of the invention. Each of these changes and variations is within the scope of the present invention.

We claim:

1. A beverage dispensing device adapted to dispense both hot and cold beverages comprising:

a housing;

a control panel mounted on the housing, the control panel configured to permit selection of a beverage;

a controller in said housing, the controller in communication with the control panel;

a motor-driven hot/cold drink dispensing module mounted in the housing under control of the controller, the hot/cold drink dispensing mechanism comprising:

a chassis containing a carrier adapted to receive and hold either a cold capsule containing a cold beverage mix and a hot capsule containing a hot beverage mix;

a cover mounted on the chassis, the cover pivotable between an open position and a closed position;

at least one beverage exit orifice on a bottom surface of the chassis;

a cold beverage preparation mechanism cooperating with the cover, the mechanism adapted to open an inserted cold beverage capsule as the cover is closed; the cold beverage preparation mechanism also adapted to rotate the opened cold beverage capsule from a horizontal position to a rotated position

allowing an injected stream of cold liquid to mix and force its contents out through the exit orifice;

a hot beverage preparation mechanism also cooperating with the cover, the hot beverage preparation mechanism including a capsule carrier configured receive and hold a capsule containing a hot beverage mix, the capsule carrier configured to move downward against a spring as the cover is closed; the mechanism also including an outlet needle attached to the chassis below the capsule bottom; an inlet injection needle attached to a motor-driven arm adapted to puncture the capsule's top when the arm is rotated, wherein after the capsule's top is punctured, the motor-driven arm forces the capsule further downward against the spring causing the outlet needle to puncture the capsule's bottom; the mechanism then injecting hot liquid into the capsule through the inlet injection needle and withdrawing hot beverage through the outlet needle and conveying it to the exit orifice.

2. The beverage dispensing device of claim 1 wherein the motor-driven arm is coupled to the motor through a plurality of gears.

3. The beverage dispensing device of claim 1 wherein the cold capsule has a rim and is adapted to be cracked open along a groove on or directly under said rim.

4. The beverage dispensing device of claim 1 wherein the cold capsule contains a powdered cold drink mix.
5. The beverage dispensing device of claim 1 wherein the cold capsule contains a liquid cold drink mix.
6. The beverage dispensing device of claim 1 wherein the hot capsule contains a coffee, tea or hot chocolate mix.
7. The beverage dispensing device of claim 1 wherein the controller is a micro-controller adapted to execute stored instructions.
8. The beverage dispensing device of claim 7 wherein the stored instructions allow a user to select either a cold beverage or a hot beverage via the control panel by causing a cold liquid to be injected into the capsule when a cold beverage is selected or hot liquid to be infused into the capsule when a hot beverage is selected.
9. The beverage dispensing device of claim 1 wherein said cavity has a substantially cylindrical bottom part and a partially conical upper part.
10. The beverage dispensing device of claim 1 wherein said cover is link-connected to a ram member, the ram member adapted to secure the cold or hot capsule in the cavity and to force the hot capsule downward toward the outlet needle without puncture the capsule's bottom when the cover is closed.

11. The beverage dispensing device of claim 10 further comprising a rotating member that opens the cold capsule by rotating the cold capsule along a trajectory where a rim portion of the cold capsule encounters a protrusion attached to the chassis causing the cold capsule rim to pry away from the cold capsule.

12. The beverage dispensing device of claim 1 further comprising a sensor electrically connected to said controller cooperating with said cavity notifying the controller whether a cold capsule or a hot capsule has been inserted into said cavity.

13. The beverage dispensing device of claim 12 wherein the sensor is a camera that reads a label on the cold or hot capsule.

14. The beverage dispensing device of claim 1 further comprising a separate hot and cold orifice.

15. The beverage dispensing device of claim 1 wherein the cold liquid is filtered water.

16. The beverage dispensing device of claim 15 wherein the water is carbonated.

17. The beverage dispensing device of claim 1 wherein the hot liquid is filtered water.
18. The beverage dispensing device of claim 17 wherein the filtered water is at a temperature sufficient to brew coffee.
19. The beverage dispensing device of claim 1 wherein the housing further contains a heater mechanism.
20. A beverage dispensing device adapted to dispense both hot and cold beverages comprising:
- a chassis containing a cavity adapted to receive and hold a cold capsule containing a cold beverage mix or a hot capsule containing a hot beverage mix;
 - a cover pivotably mounted to said chassis, the cover pivotable between an open position and a closed position;
 - a hot beverage exit orifice on a bottom surface of said chassis, and a cold beverage exit orifice also on the bottom surface of said chassis;
 - a cold beverage preparation mechanism cooperating with said cover adapted to open an inserted cold beverage capsule as the cover is closed, the cold beverage preparation mechanism also adapted to rotate the opened cold beverage capsule to a position where it can empty its contents when injected with cold liquid to prepare a cold

beverage, the cold beverage exiting the cold beverage exit orifice into a cup;

a hot beverage preparation mechanism adapted to rotate a motor-driven injection needle until the injection needle punctures and penetrates a top surface or lid of the hot capsule and then lower the hot capsule onto an output needle so that the output needle punctures a bottom surface of the hot capsule after the injection needle has penetrated the top surface, the injection needle adapted to infuse hot liquid into the hot capsule to prepare a hot beverage, the hot beverage being conveyed out of the output needle and exiting the hot beverage exit orifice into a cup.

21. The beverage dispensing device of claim 20 wherein the injection needle is mounted on a rotating member adapted to rotate the injection needle from a rest position to an active position wherein the injection needle penetrates into the hot capsule.

22. The beverage dispensing device of claim 21 wherein the injection needle is driven by a drive motor coupled to the rotating member with a plurality of gears.

23. The beverage dispensing device of claim 20 wherein the cold capsule has a rim and is adapted to tear along a groove on or directly under said rim.

24. The beverage dispensing device of claim 20 wherein said cold capsule contains a powdered cold drink mix.

25. The beverage dispensing device of claim 20 wherein said cold capsule contains a liquid cold drink mix.

26. The beverage dispensing device of claim 20 wherein said hot capsule contains a coffee, tea or hot chocolate mix.

27. The beverage dispensing device of claim 20 wherein said cavity has a substantially cylindrical bottom part and a partially conical upper part.

28. The beverage dispensing device of claim 20 wherein the cover is link-connected to a ram member, the ram member adapted to secure the cold or hot capsule in the cavity and force the hot capsule downward when the cover is closed.

29. The beverage dispensing device of claim 20 further comprising a rotating member that opens the cold capsule by rotating the cold capsule along a trajectory where a rim portion of the cold capsule encounters a protrusion attached to the chassis causing a part of the rim portion to pry away from the cold capsule.

30. A beverage dispenser comprising:
a housing with a cover;
a controller in said housing;

a water heater and water temperature sensor in the housing configured to controlled in closed-loop operation by the controller to bring water for injection to a temperature sufficient for hot water brewing or mixing;

a capsule receiving apparatus in said housing configured to receive either a cold drink capsule or a hot drink capsule, the capsule receiving apparatus operably coupled to a capsule manipulation part adapted to open an inserted cold drink capsule when said cover is closed, or force an inserted hot drink capsule downward toward a bottom puncture needle when said cover is closed;

a hot water injection needle on a rotating arm adapted to first puncture a top surface of an inserted hot capsule and then force the hot capsule downward onto the bottom puncture needle, the hot water injection needle adapted to infuse said hot water into the hot drink capsule under pressure producing a brewed or mixed hot drink;

a cold water streaming system adapted to stream a predetermined quantity of cold water into an inserted, opened cold drink capsule causing its contents to dissolve or mix;

the capsule manipulation part also adapted to rotate an inserted cold drink capsule approximately ninety degrees after its contents have dissolved or mixed causing said contents to pour into a vessel;

the cold water streaming system also adapted to stream additional cold water into said vessel as said contents pour into the vessel producing a cold beverage.

31. A beverage dispenser adapted to dispense a cold drink from a capsule by opening the capsule and injecting a cold fluid into it mixing its contents, and then pouring the contents into a vessel while injecting further cold fluid into the vessel to produce a cold drink; the beverage dispenser also adapted to dispense a hot drink from a capsule by first puncturing the capsule top, then puncturing the capsule bottom, then injecting a hot liquid into the capsule top, and then withdrawing a hot drink from the capsule bottom into a vessel.

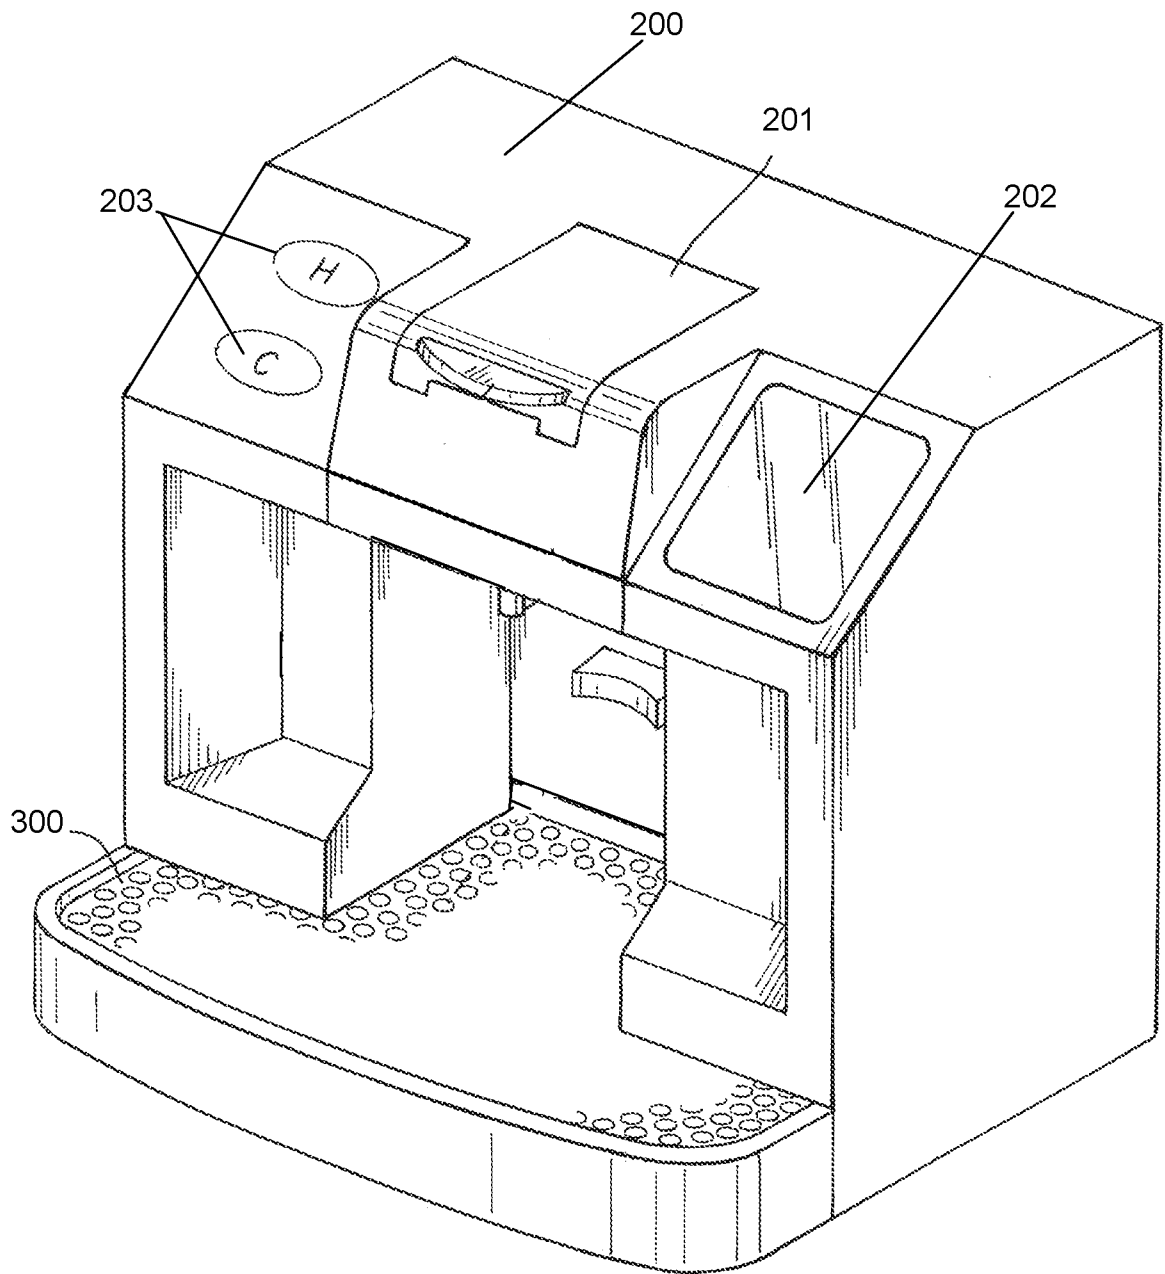


FIG. 1

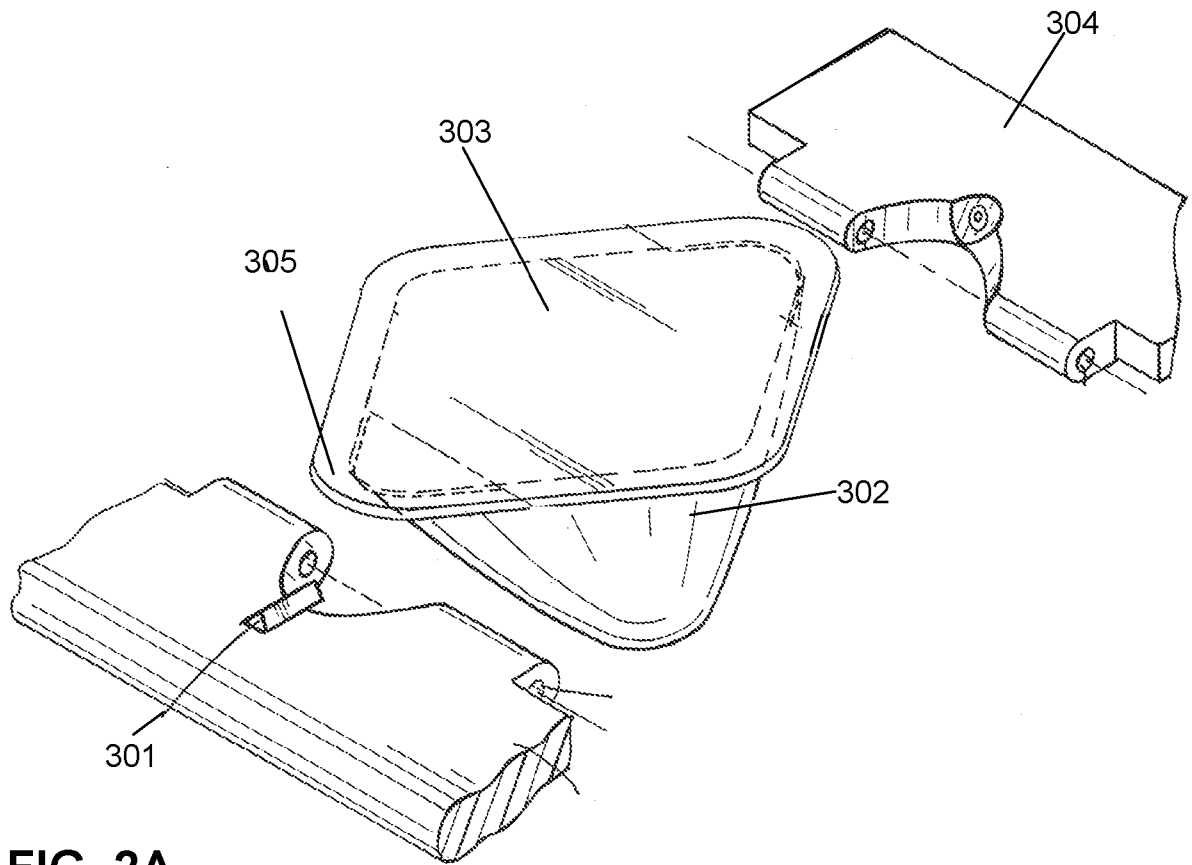


FIG. 2A

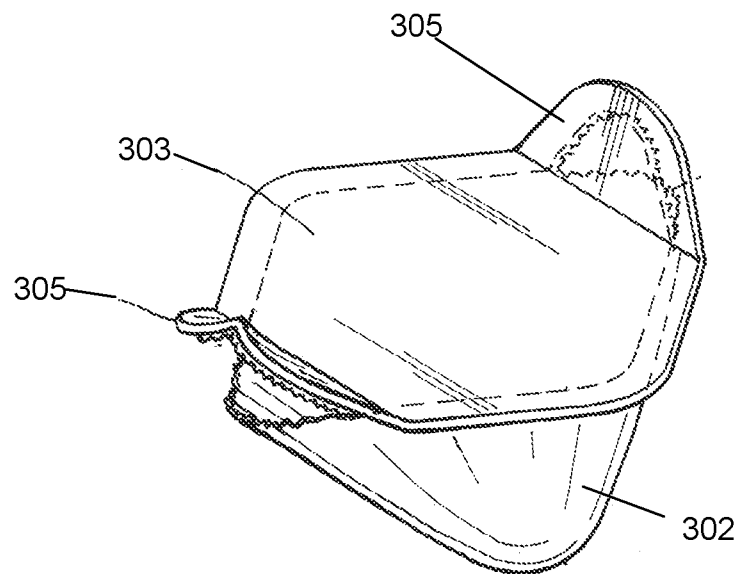
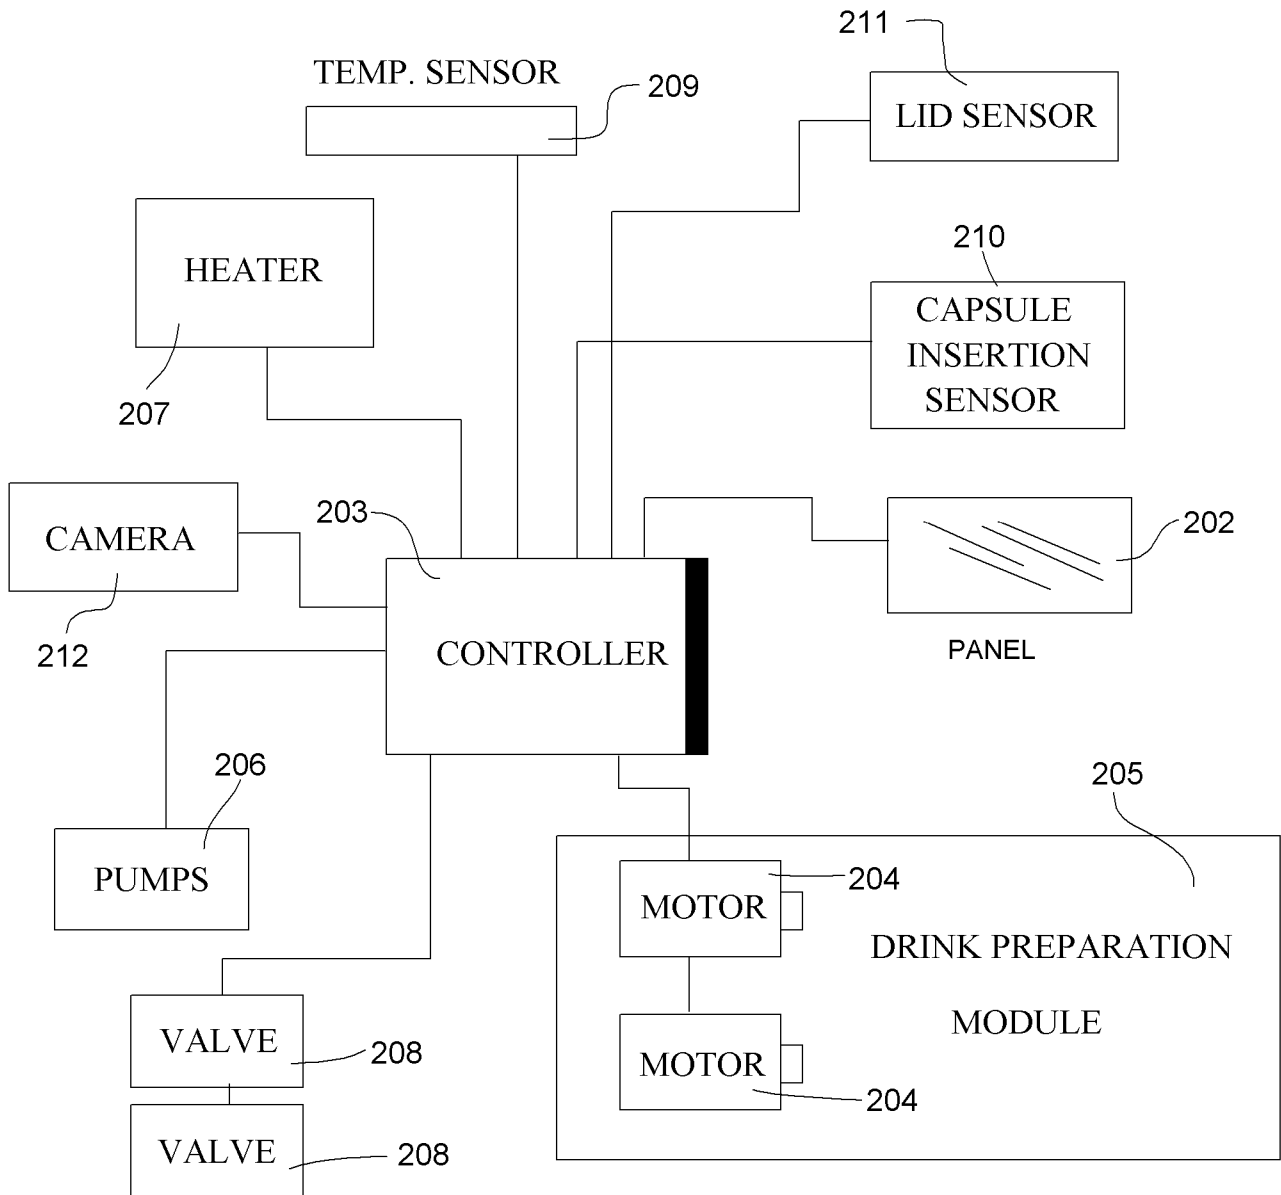


FIG. 2B

**FIG. 3**


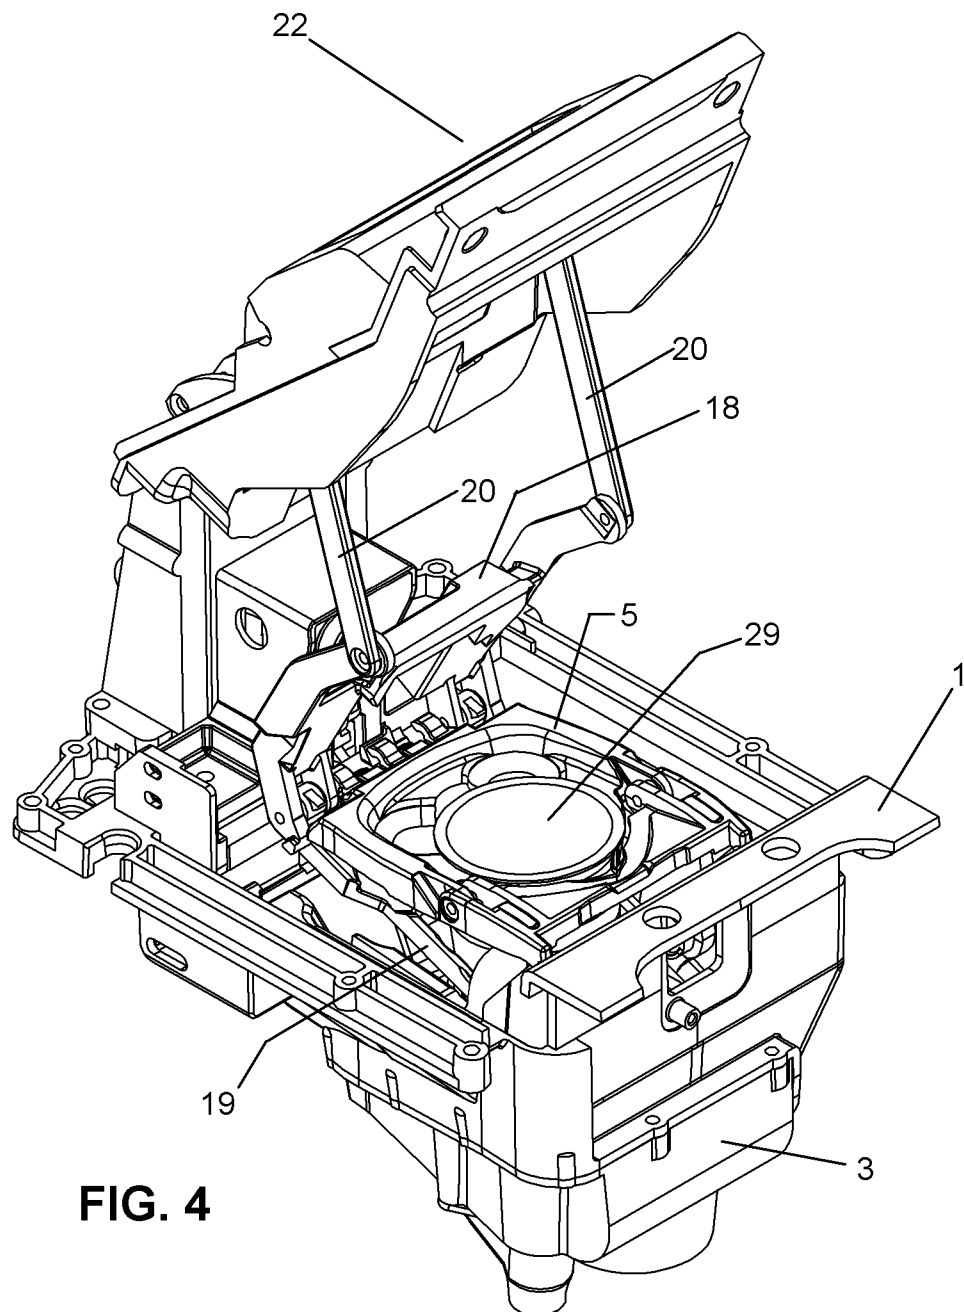


FIG. 4

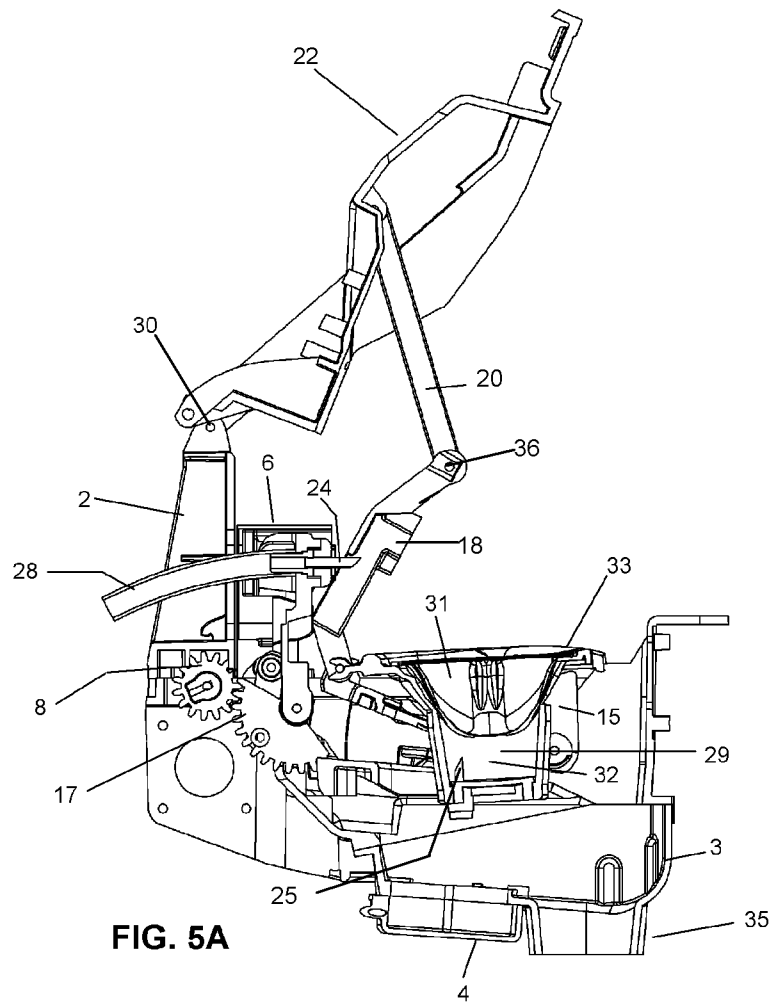

INFUSION ARM
HALFWAY DEPLOYED

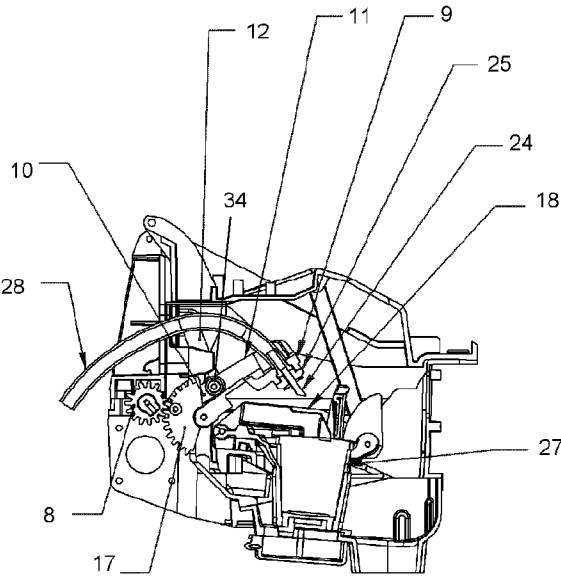


FIG. 5B

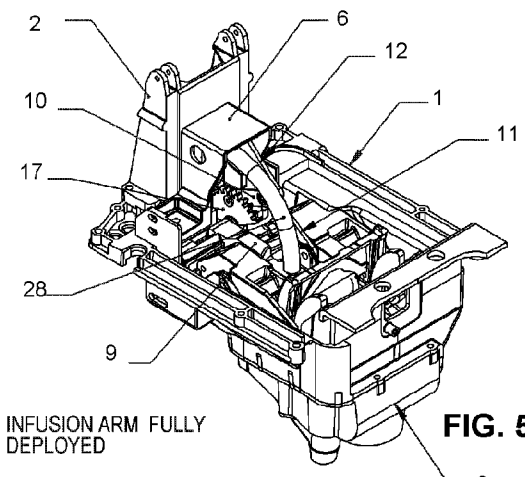


FIG. 5C

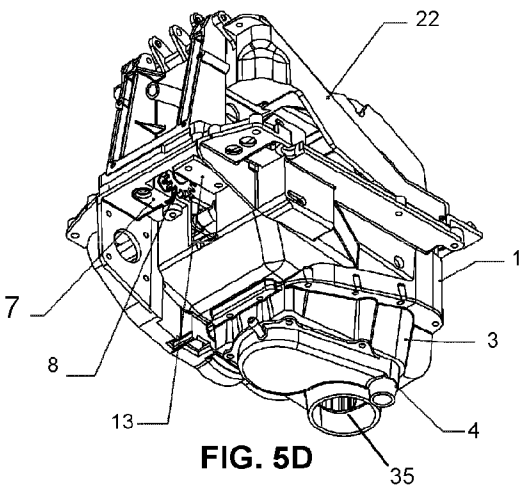


FIG. 5D

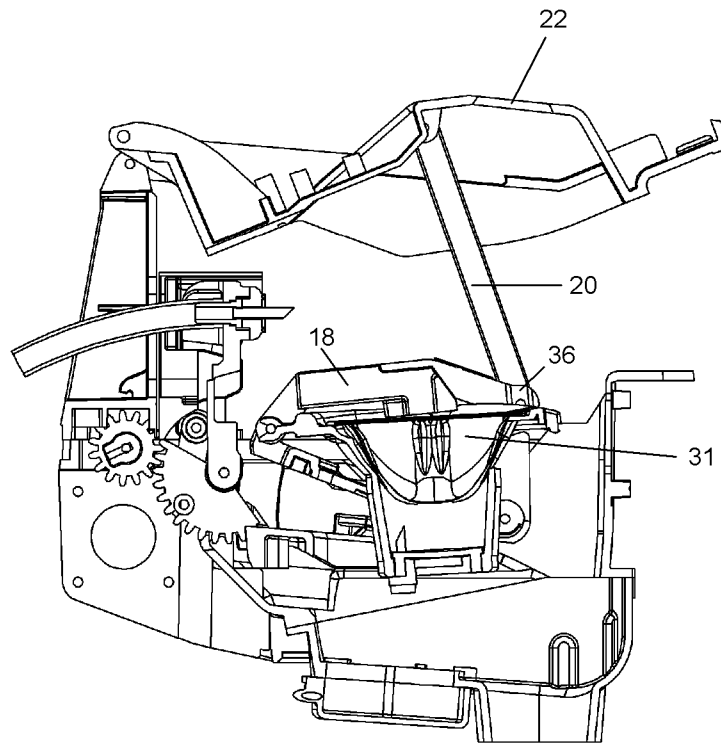


FIG. 6

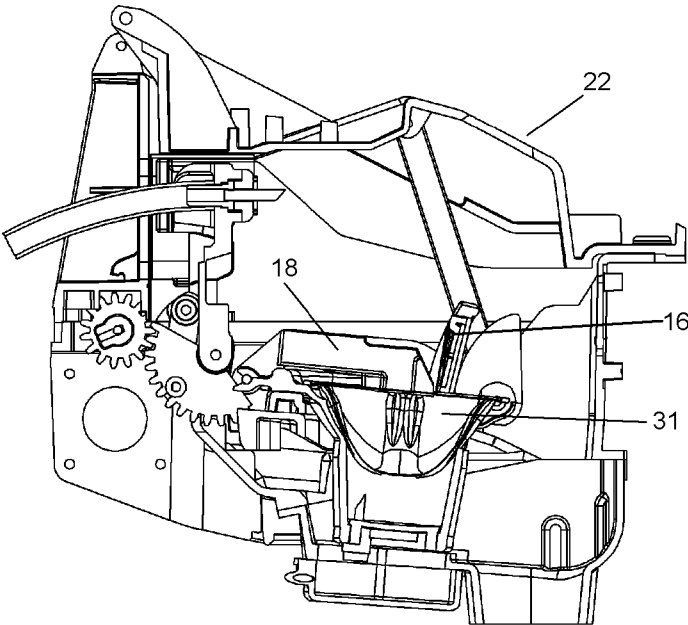


FIG. 7

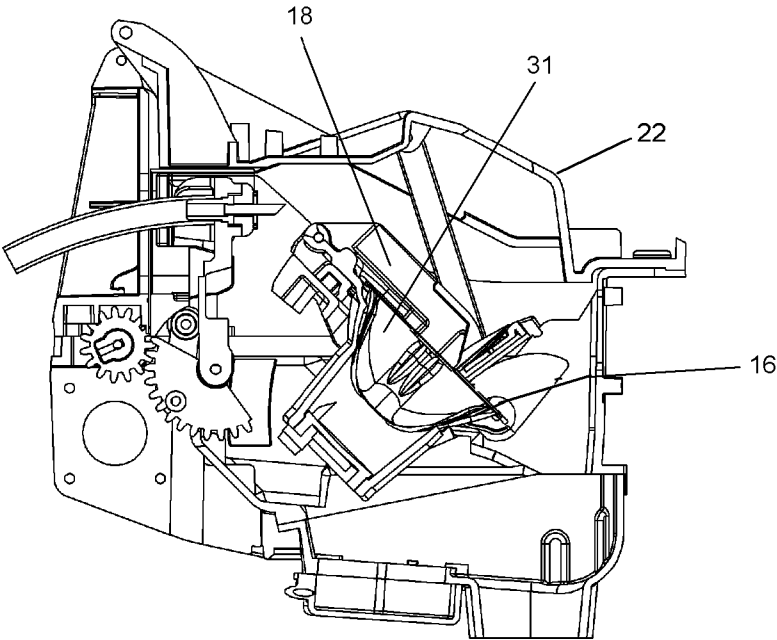


FIG. 8

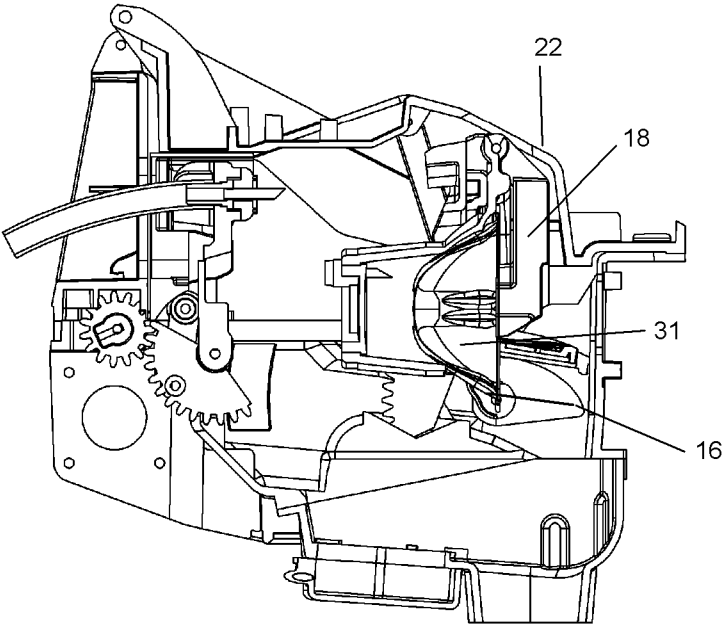


FIG. 9

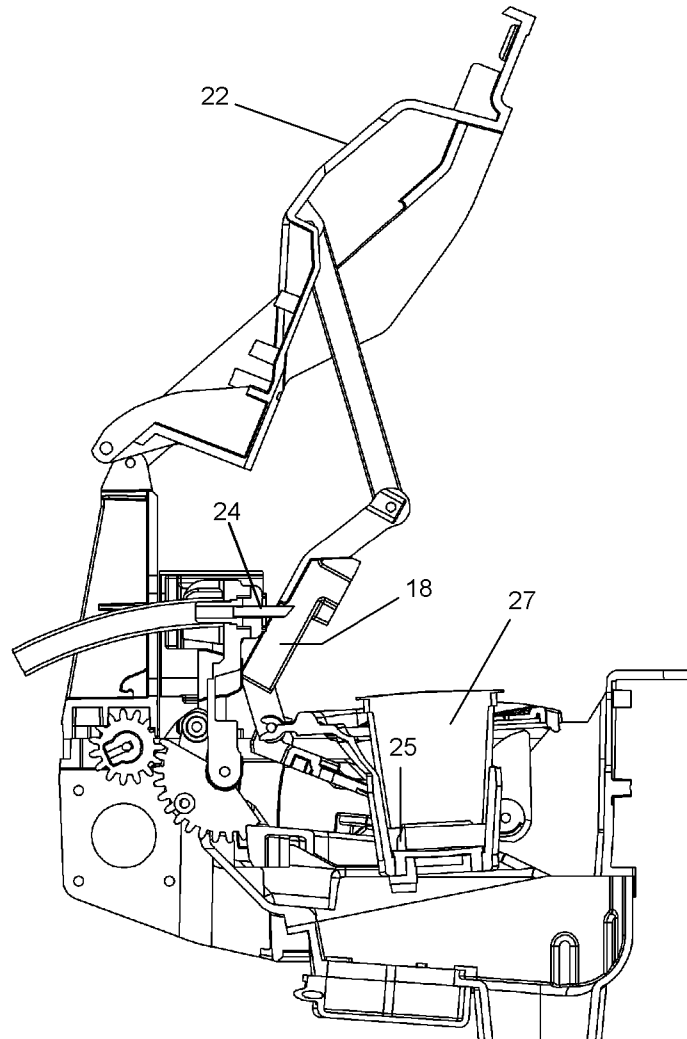


FIG. 10

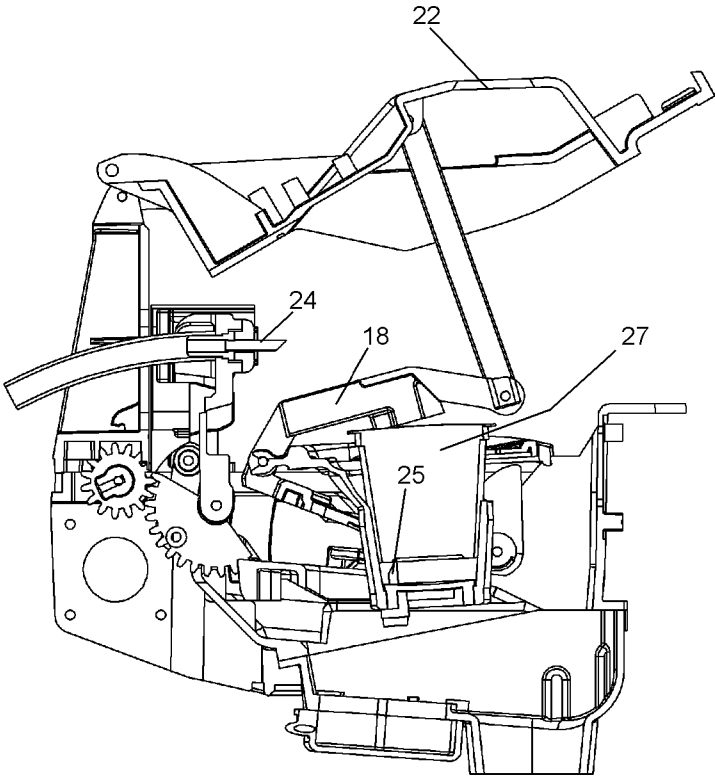


FIG. 11

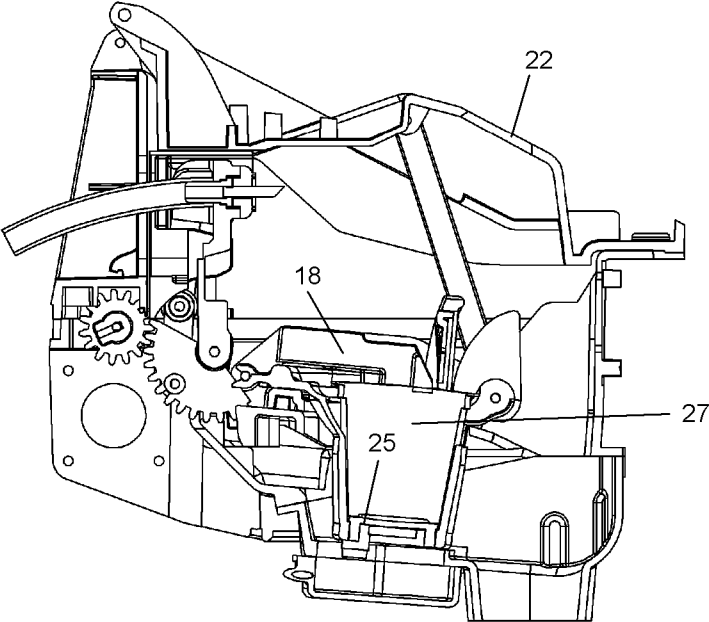


FIG. 12

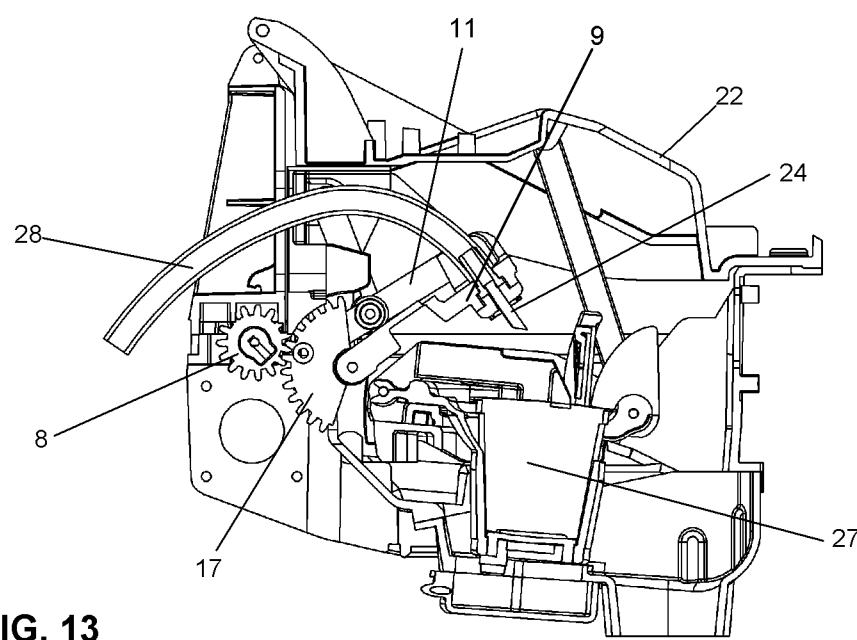


FIG. 13

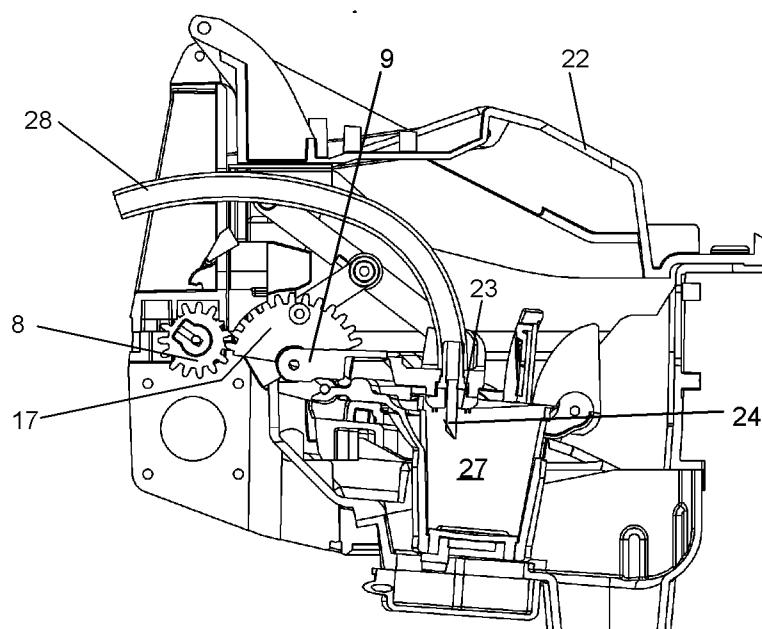


FIG. 14

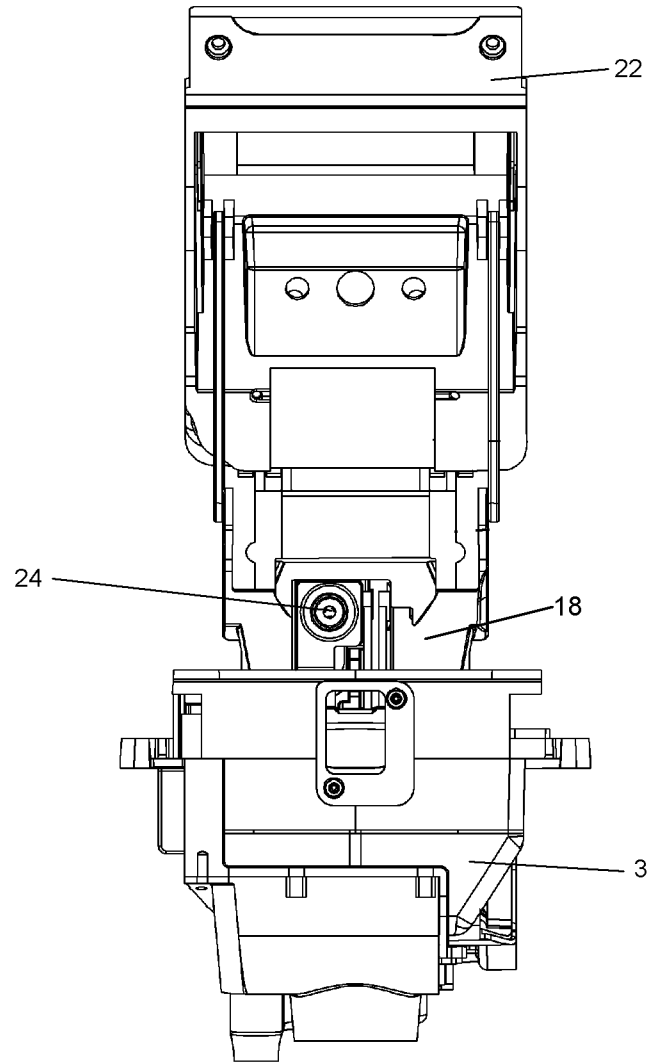
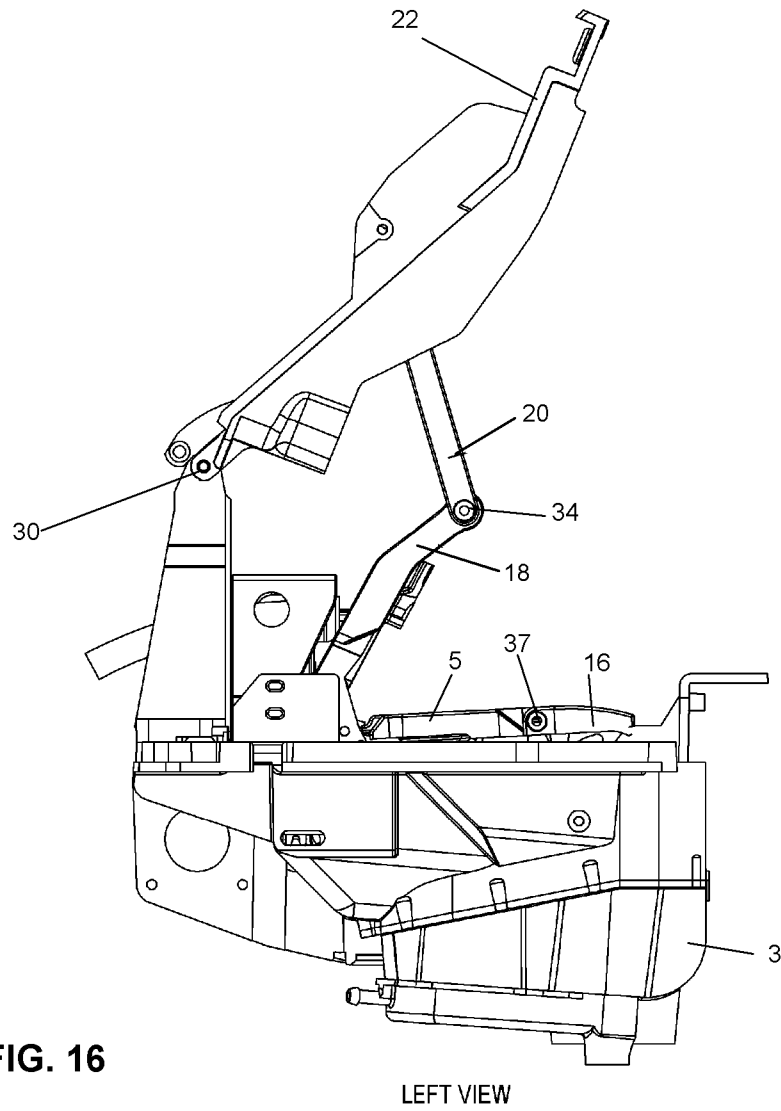
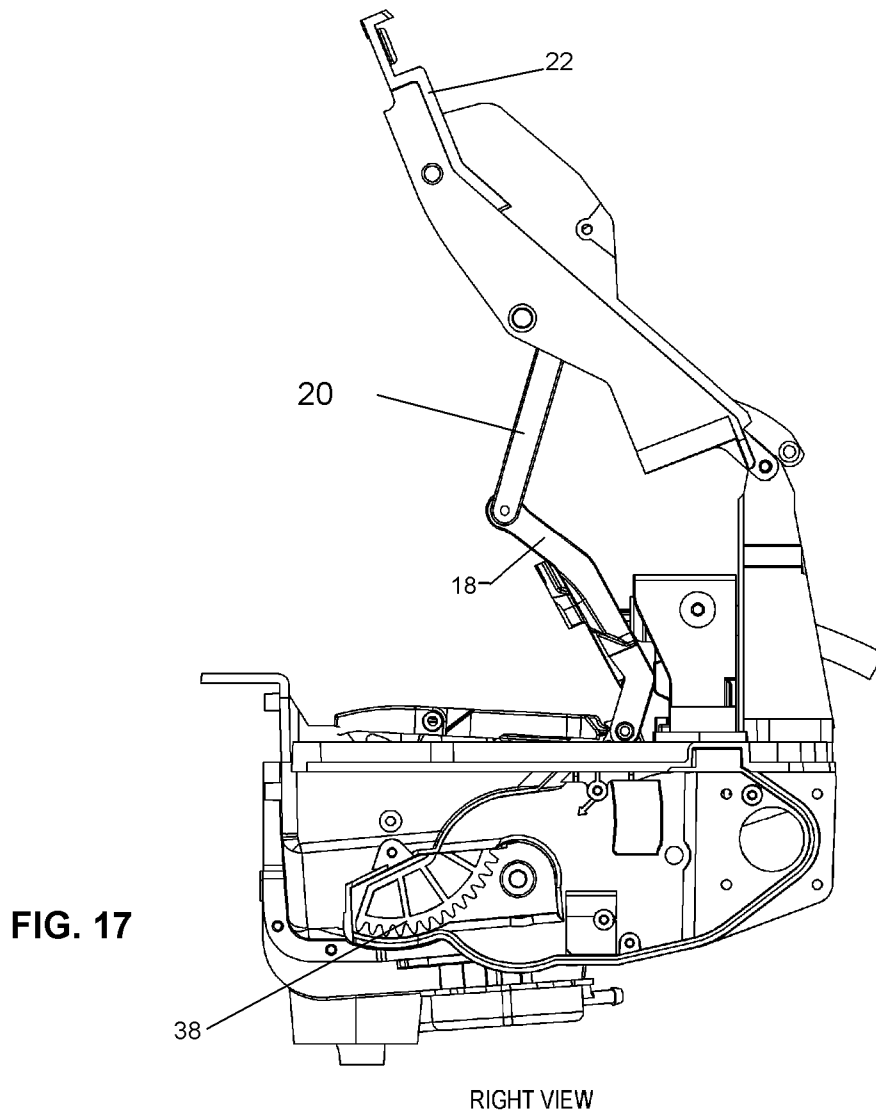


FIG. 15

FRONT VIEW





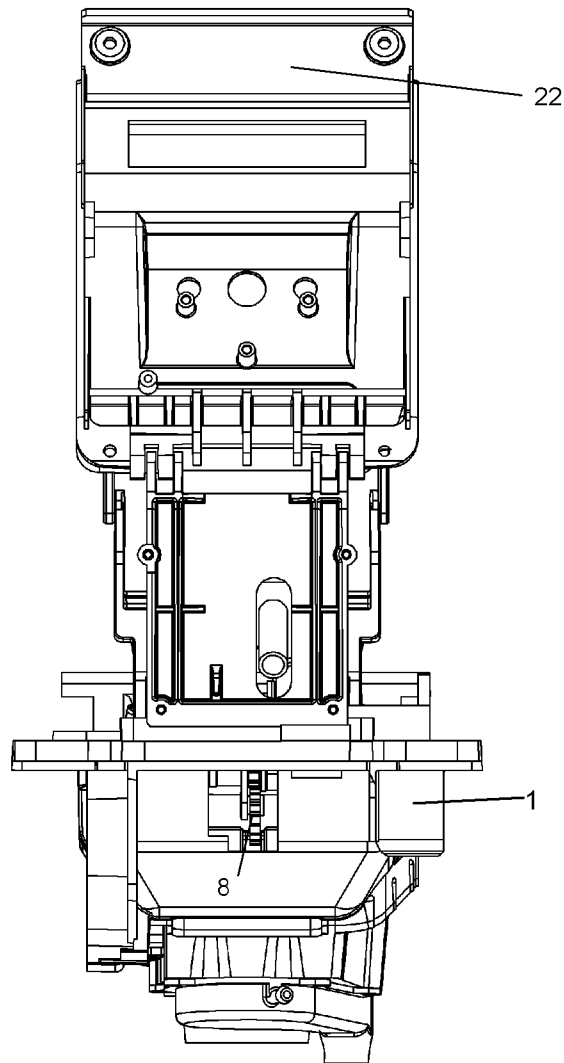


FIG. 18

REAR VIEW

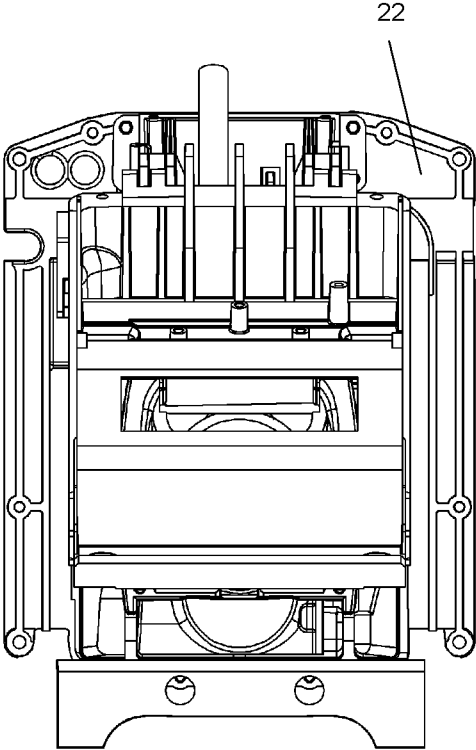


FIG. 19

TOP VIEW

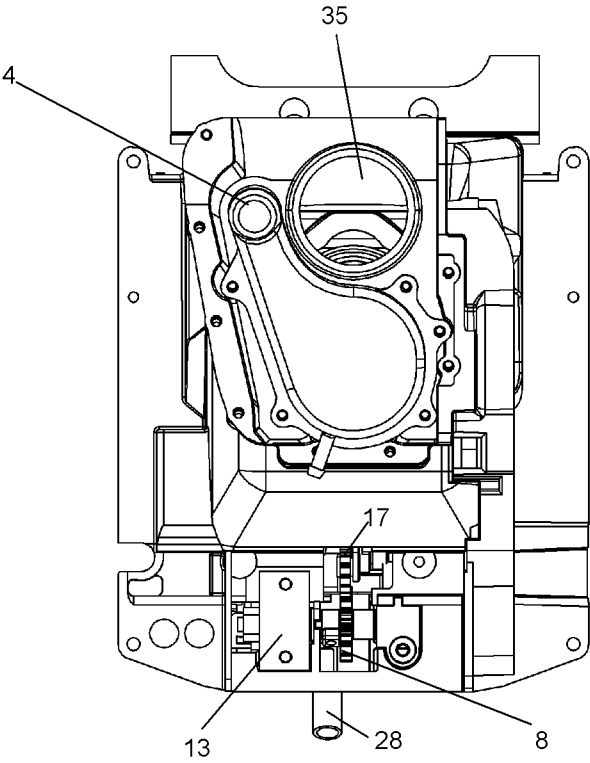


FIG. 20

BOTTOM VIEW

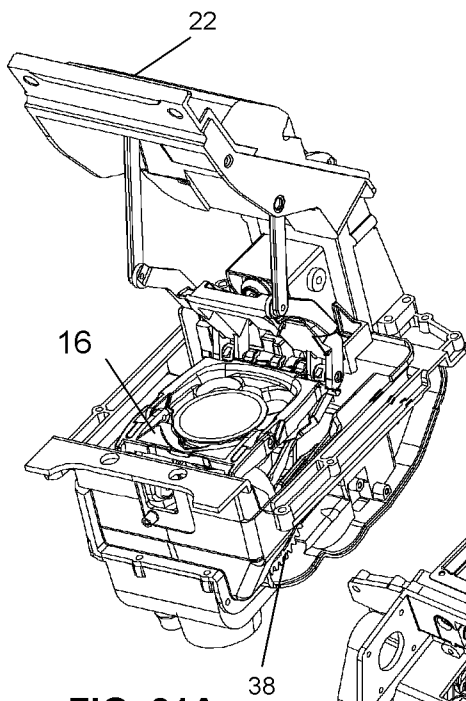


FIG. 21A

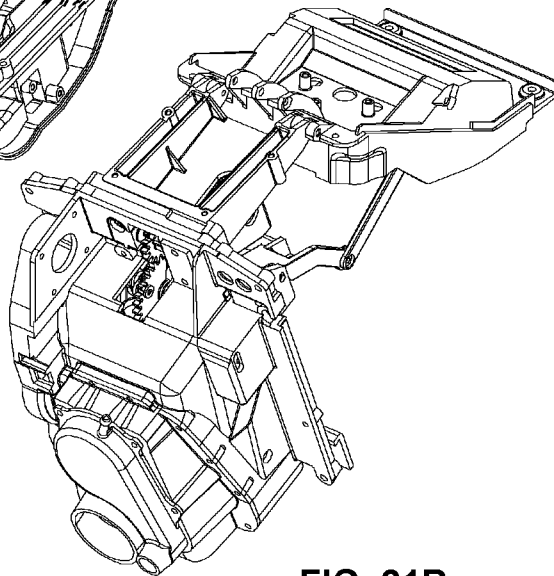


FIG. 21B

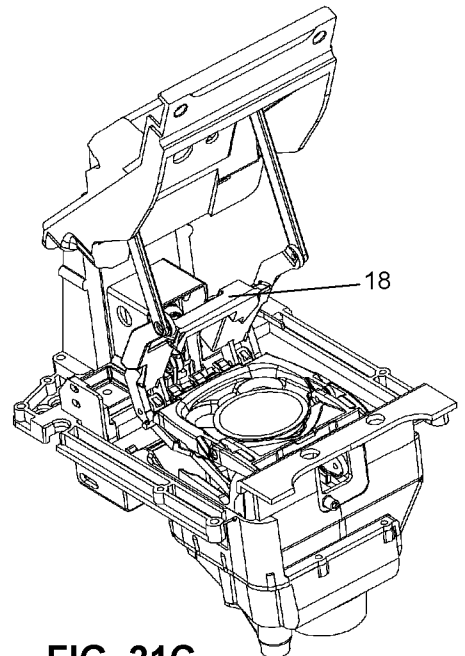


FIG. 21C

1 - CHAMBER OPEN, CUP LOADED;
CUP CARRIER IS SPRING-LOADED
UPWARDS

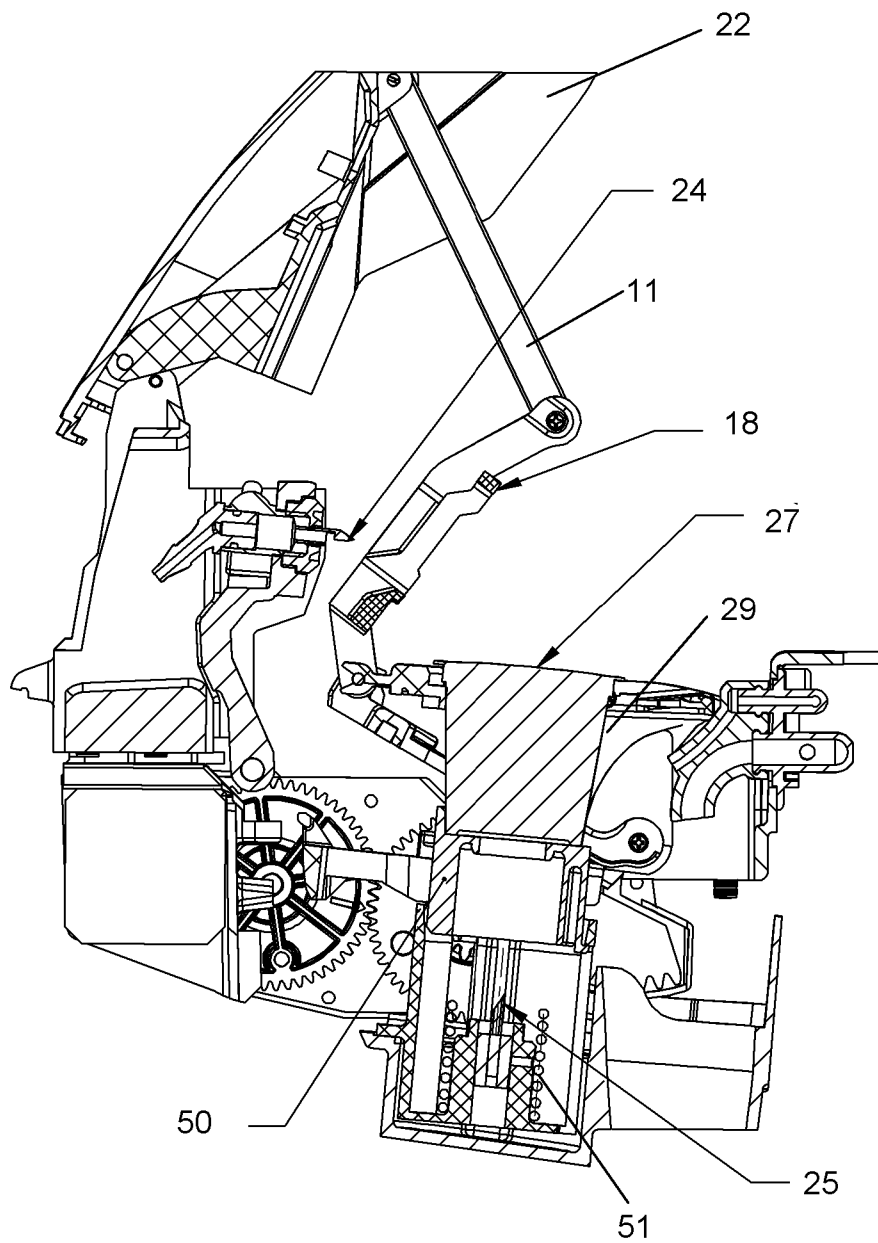


Fig. 22

2 - CHAMBER LID CLOSED, RAM FRAME FORCES
CUP PARTIALLY DOWN; OUTLET NEEDLE REMAINS
BELOW CUP BOTTOM

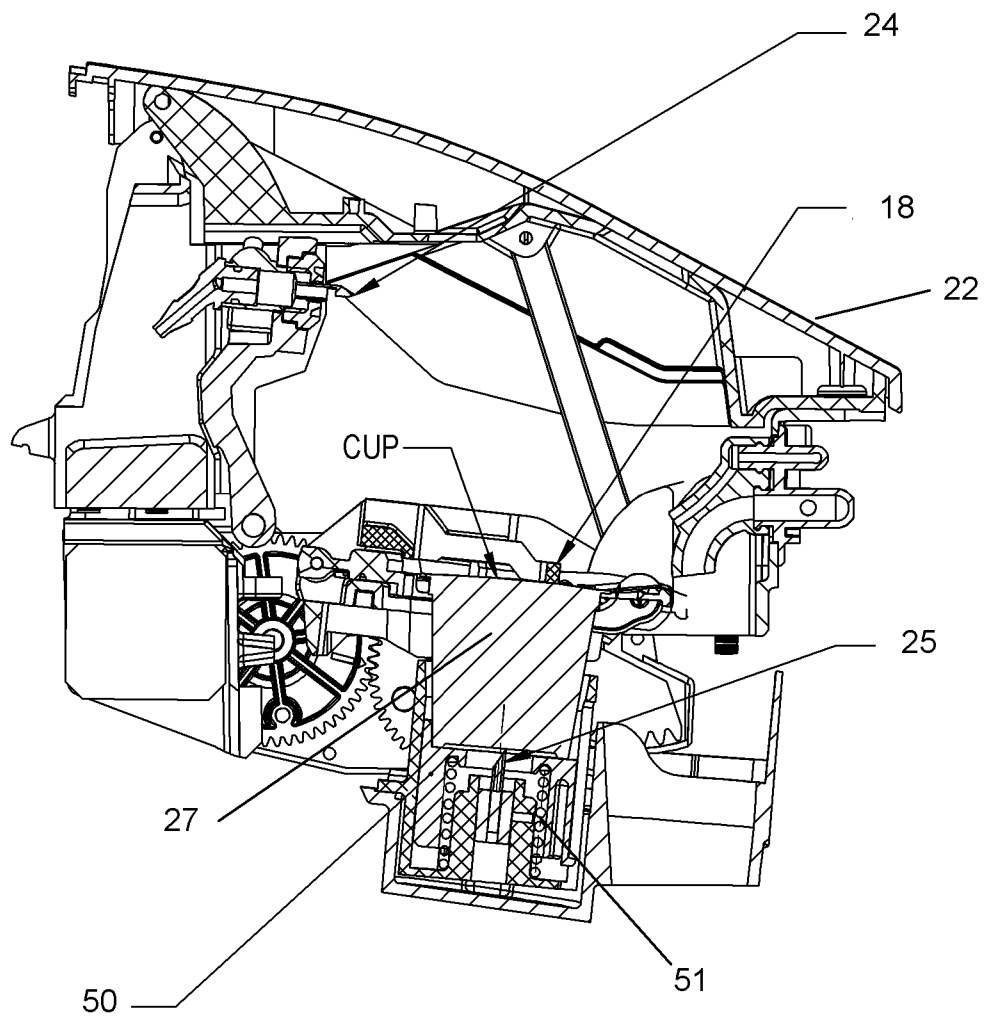


Fig. 23

3 - MOTOR-DRIVEN ARM BEGINS TO MOVE INLET
NEEDLE TOWARDS CUP

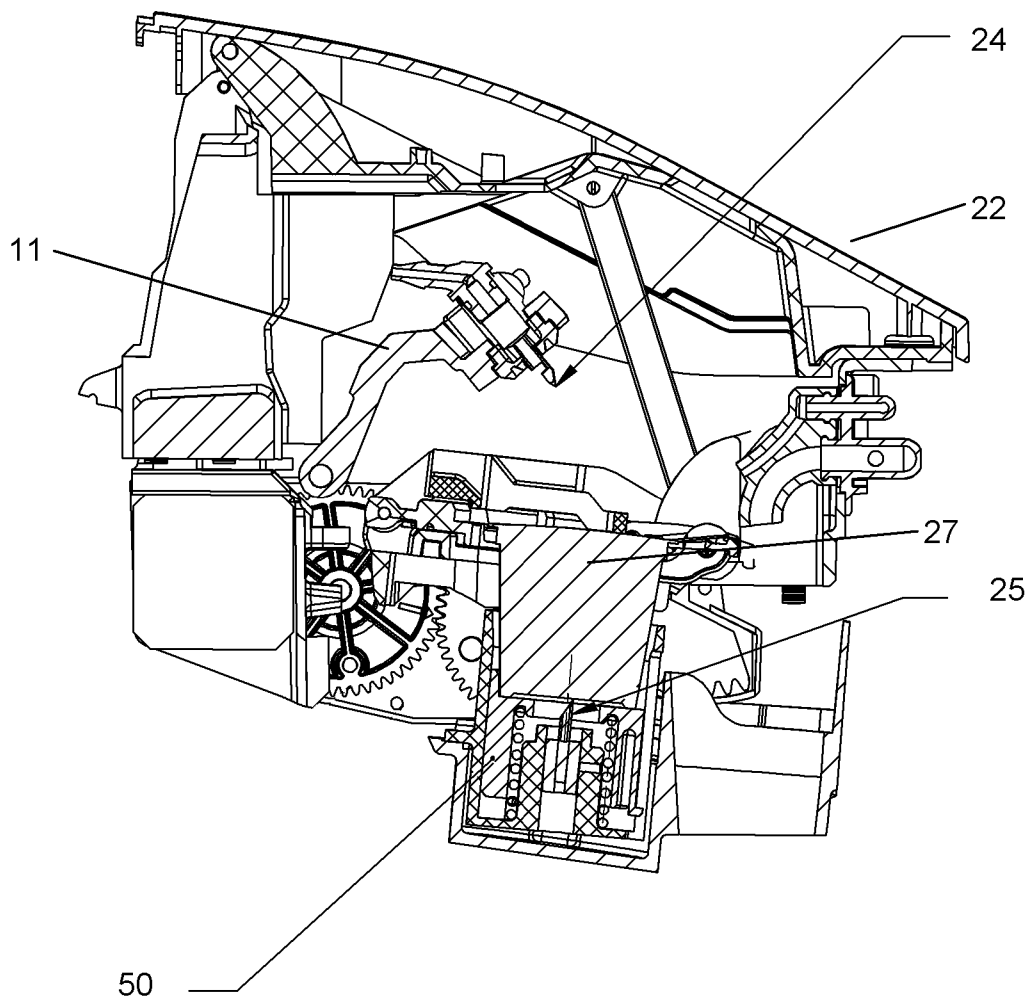


Fig. 24

4 - INLET NEEDLE PIERCES TOP OF
CUP, OUTLET NEEDLE REMAINS BELOW
BOTTOM OF CUP

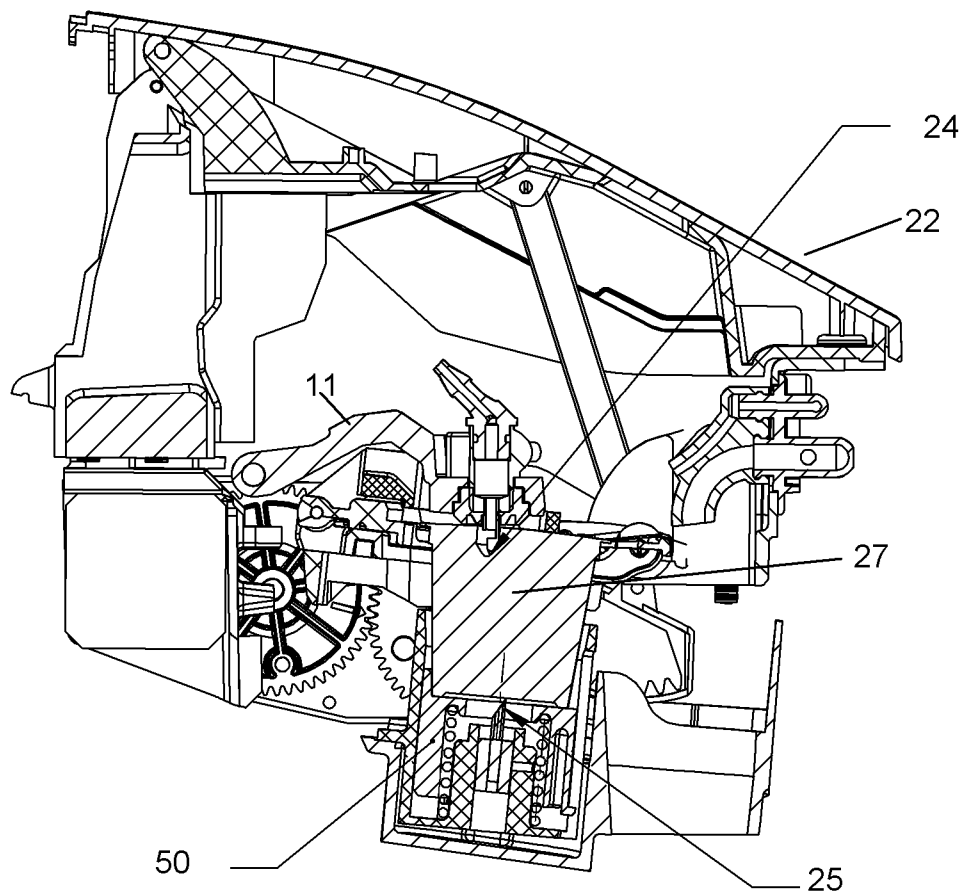


Fig. 25

5 - MOTOR-DRIVEN ARM BEGINS TO FORCE CUP FURTHER
DOWNWARDS AGAINST OUTLET NEEDLE; PLASTIC CUP BOTTOM
DEFLECTS BEFORE PIERCING OCCURS

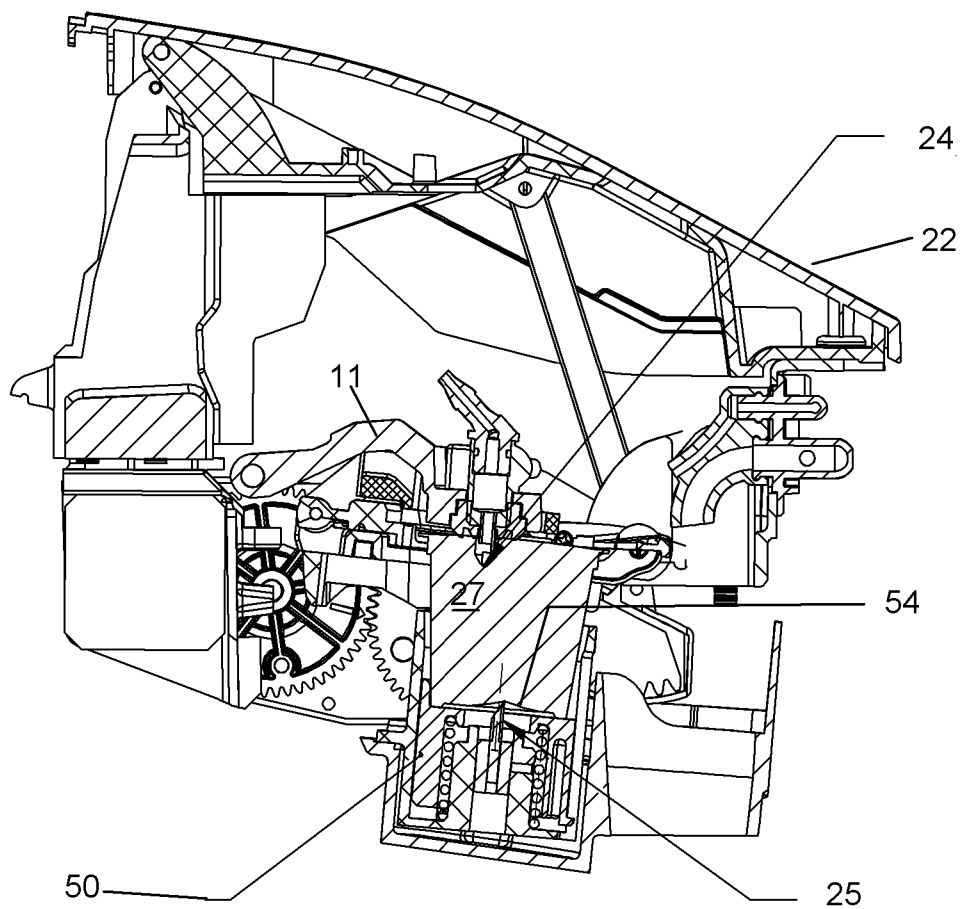


Fig. 26

6 - CUP BOTTOM IS FINALLY PIERCED BY OUTLET NEEDLE AT BOTTOM
OF CUP CARRIER STROKE

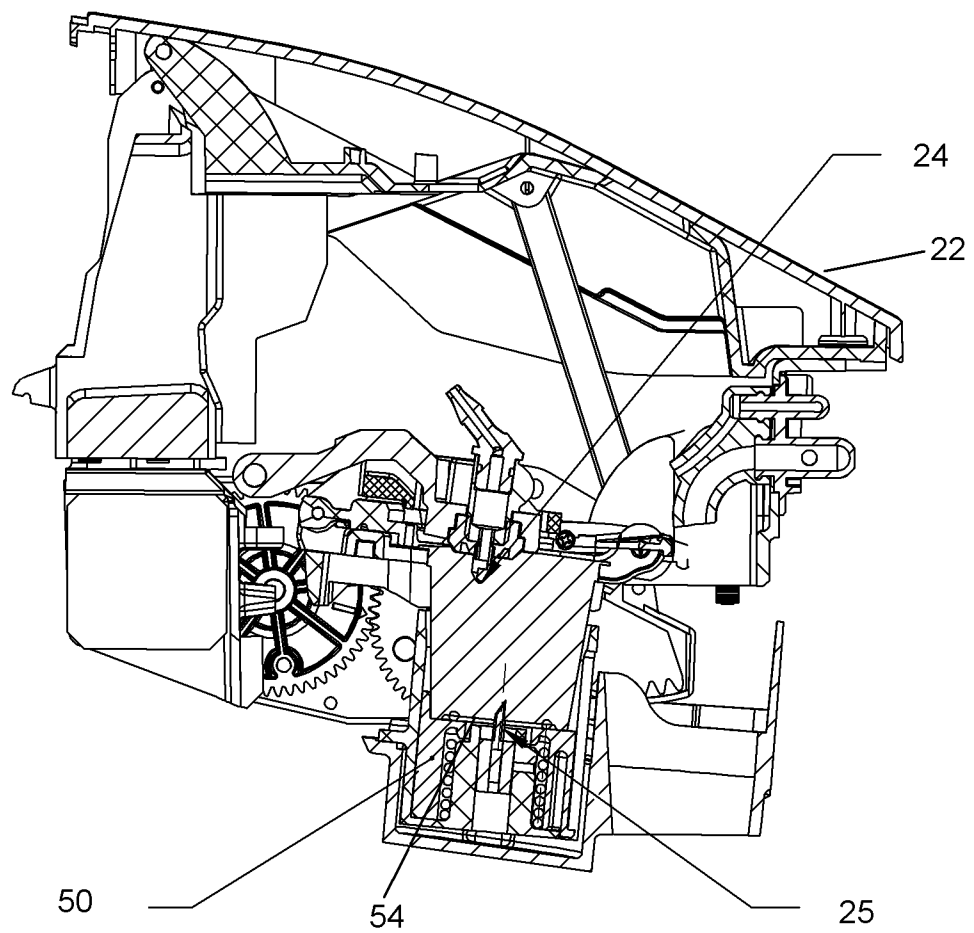


Fig. 27

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/049743**A. CLASSIFICATION OF SUBJECT MATTER****A47J 31/02(2006.01)i, A47J 31/06(2006.01)i, A47J 31/44(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A47J 31/02; B65D 85/804; A23F 5/24; A47J 31/00; B65B 29/02; A47J 31/44; A47J 31/40; A47J 31/24; A47J 31/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: capsule, dispenser, hot beverage, cold beverage, mechanism, controller, orifice, needle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012-0231126 A1 (LO FARO, GIAN MATTEO et al.) 13 September 2012 See paragraphs [0063], [0068], [0075], [0076], [0082]; claims 1-21; and figures 1-4A.	1-31
A	US 2008-0105131 A1 (CASTELLANI, ANDREA) 8 May 2008 See abstract; claims 1-15; and figures 1-3.	1-31
A	US 2013-0189400 A1 (PROVIDENCE ENTERPRISE, LLC) 25 July 2013 See abstract; claims 1-10; and figures 1-4, 9-13.	1-31
A	US 2011-0189350 A1 (VAN BELLEGHEM, LUC et al.) 4 August 2011 See abstract; claims 1-10; and figures 2a-2d.	1-31
A	US 2009-0007793 A1 (GLUCKSMAN, DOV Z. et al.) 8 January 2009 See claims 11-20; and figures 3-5, 13-15.	1-31



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 April 2016 (06.04.2016)

Date of mailing of the international search report

06 April 2016 (06.04.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

CHO, Han Sol

Telephone No. +82-42-481-5580



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/049743

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0231126 A1	13/09/2012	AU 2011326523 A1	30/05/2013
		CA 2816226 A1	18/05/2012
		CN 103249335 A	14/08/2013
		EA 201390637 A1	30/05/2014
		EP 2637532 A1	18/09/2013
		EP 2637532 A4	25/09/2013
		JP 2013-542815 A	28/11/2013
		MX 2013005291 A	06/12/2013
		US 2015-0144001 A1	28/05/2015
		US 2015-0147448 A1	28/05/2015
		WO 2012-064885 A1	18/05/2012
US 2008-0105131 A1	08/05/2008	EP 1669011 A1	14/06/2006
		IT MI20042350 A1	09/03/2005
		US 2006-0123998 A1	15/06/2006
		US 2010-0258010 A1	14/10/2010
		US 7320274 B2	22/01/2008
US 2013-0189400 A1	25/07/2013	US 2013-0068109 A1	21/03/2013
		US 2013-0071532 A1	21/03/2013
		WO 2013-154663 A1	17/10/2013
		WO 2013-154664 A1	17/10/2013
		WO 2013-154716 A1	17/10/2013
US 2011-0189350 A1	04/08/2011	CA 2725362 A1	29/10/2009
		CN 102066212 A	18/05/2011
		CN 102066212 B	24/07/2013
		EP 2112093 A1	28/10/2009
		EP 2112093 B1	14/11/2012
		EP 2159167 A1	03/03/2010
		EP 2300335 A1	30/03/2011
		EP 2300335 B1	19/06/2013
		ES 2426930 T3	25/10/2013
		JP 2011-522567 A	04/08/2011
		JP 5341174 B2	13/11/2013
		RU 2010147821 A	27/05/2012
		RU 2493082 C2	20/09/2013
		WO 2009-130311 A1	29/10/2009
		WO 2009-130312 A1	29/10/2009
US 2009-0007793 A1	08/01/2009	CA 2701826 A1	08/01/2009
		CA 2701826 C	25/08/2015
		CA 2701888 A1	08/01/2009
		CA 2701888 C	03/11/2015
		CN 101801248 A	11/08/2010
		CN 101801248 B	24/07/2013
		CN 101808554 A	18/08/2010
		CN 101808554 B	24/04/2013
		EP 2166903 A2	31/03/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/049743

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2166903 B1	15/08/2012
		EP 2166904 A2	31/03/2010
		EP 2166904 B1	04/04/2012
		US 2009-0007792 A1	08/01/2009
		US 2013-0078340 A1	28/03/2013
		US 8180204 B2	15/05/2012
		US 8322271 B2	04/12/2012
		US 9079706 B2	14/07/2015
		WO 2009-006374 A2	08/01/2009
		WO 2009-006374 A3	26/02/2009
		WO 2009-006379 A2	08/01/2009
		WO 2009-006379 A3	26/02/2009