

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/012989 A1

(51) International Patent Classification⁷: **G02F 1/13363**,
G02B 5/30, C08G 64/04

(21) International Application Number:
PCT/US2004/022944

(22) International Filing Date: 16 July 2004 (16.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/631,152 31 July 2003 (31.07.2003) US

(71) Applicant (for all designated States except US): **EASTMAN KODAK COMPANY** [US/US]; 343 State Street, Rochester, New York 14650-2201 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ELMAN, James Frank** [US/US]; 2543 Huber Road, Fairport, New York 14450 (US). **MASSA, Dennis Jon** [US/US]; 35 Cambric Circle, Pittsford, New York 14534 (US). **ANDERSON,**

Charles Chester [US/US]; 1700 Harris Road, Penfield, New York 14526 (US). **ISHIKAWA, Tomohiro** [JP/US]; 252 Mulberry Street, Rochester, New York 14620 (US).


(74) Common Representative: **EASTMAN KODAK COMPANY**; 343 State Street, Rochester, New York 14650-2201 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: OPTICAL COMPENSATOR, PROCESS OF ITS FABRICATION, AND LIQUID CRYSTAL DISPLAY

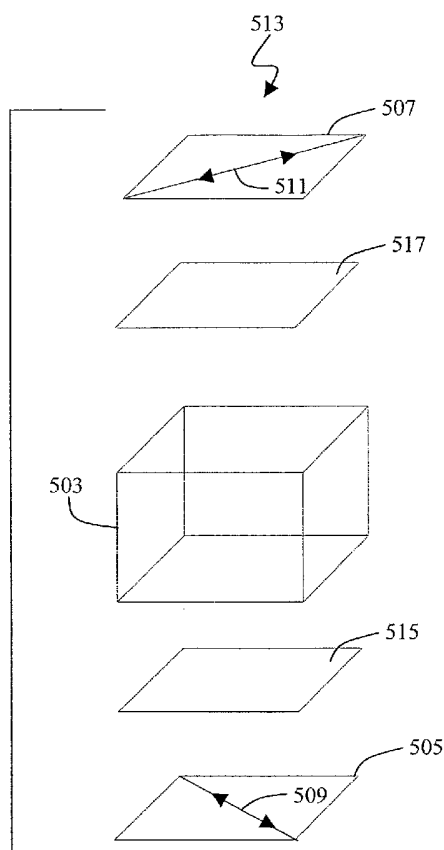

(57) Abstract: A multilayer compensator comprising one or more polymeric layers A and one or more polymeric layers B, wherein said layers A comprise a polymer having an out-of-plane birefringence not more negative than -0.01, said layers B comprise an amorphous polymer having an out-of-plane birefringence more negative than -0.01, and the overall in-plane retardation (R_{in}) of said multilayer compensator is greater than 20nm and the overall out-of-plane retardation (R_{th}) of said multilayer compensator is more negative than -20nm.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

OPTICAL COMPENSATOR, PROCESS OF ITS FABRICATION, AND LIQUID CRYSTAL DISPLAY

FIELD OF THE INVENTION

5 The present invention relates to a multilayer optical compensator for liquid crystal displays comprising polymeric A and polymeric B layers exhibiting particular birefringent properties. The invention also relates to a process for making such a compensator and liquid crystal displays using the compensator.

10

BACKGROUND OF THE INVENTION

 Liquid crystals are widely used for electronic displays. In these display systems, a liquid crystal cell is typically situated between a pair of polarizer and analyzers. An incident light polarized by the polarizer passes
15 through a liquid crystal cell and is affected by the molecular orientation of the liquid crystal, which can be altered by the application of a voltage across the cell. The altered light goes into the analyzer. By employing this principle, the transmission of light from an external source, including ambient light, can be controlled. The energy required to achieve this control is generally much less than
20 required for the luminescent materials used in other display types such as cathode ray tubes (CRT). Accordingly, liquid crystal technology is used for a number of electronic imaging devices, including but not limited to digital watches, calculators, portable computers, electronic games for which light-weight, low-power consumption and long-operating life are important features.

25 Contrast, color reproduction, and stable gray scale intensities are important quality attributes for electronic displays, which employ liquid crystal technology. The primary factor limiting the contrast of a liquid crystal display (LCD) is the propensity for light to "leak" through liquid crystal elements or cells, which are in the dark or "black" pixel state. Furthermore, the leakage and hence
30 contrast of a liquid crystal display are also dependent on the direction from which the display screen is viewed. Typically the optimum contrast is observed only within a narrow viewing angle range centered about the normal incidence to the

display and falls off rapidly as the viewing direction deviates from the display normal. In color displays, the leakage problem not only degrades the contrast but also causes color or hue shifts with an associated degradation of color reproduction.

5 LCDs are quickly replacing CRTs as monitors for desktop computers and other office or house hold appliances. It is also expected that the number of LCD television monitors with a larger screen size will sharply increase in the near future. However, unless problems of viewing angle dependence such as coloration, degradation in contrast, and an inversion of brightness are solved,
10 LCD's application as a replacement of the traditional CRT will be limited.

 A Vertically-Aligned liquid crystal display (VA-LCD) offers an extremely high contrast ratio for normal incident light. FIG. 2A and FIG. 2B are the schematics of VA liquid crystal cell in OFF **201** and ON **203** states. In its OFF state, the liquid crystal optic axis **205** is almost perpendicular to the substrate
15 **207**, FIG. 2A. With an applied voltage, the optic axis **205** is tilted away from the cell normal, FIG. 2B. In the OFF state, light does not see the birefringence in the normal direction **209**, giving the dark state that is close to that of orthogonally crossed polarizers. However, obliquely propagated light **211** picks up phase retardation giving light leakage. This results in a poor contrast ratio in some
20 viewing angle range.

 A bend aligned nematic liquid crystal display, also referred as an Optically Compensated Bend Liquid Crystal Display (OCB-LCD) uses a nematic liquid crystal cell based on the symmetric bend state. In its actual operation, the brightness of the display using the bend aligned nematic liquid crystal cell is
25 controlled by an applied voltage or field that leads to a different degree in the bend orientation within the cell as shown in FIG. 3A (OFF) **301** and FIG.3B (ON) **303**. In both states, the liquid crystal optic axis **305** takes symmetric bend state around the cell middle plane **307**. In the On state, the optic axis becomes substantially perpendicular to the cell plane except near the cell substrates **309**.
30 OCB mode offers faster response speed that is suitable to the liquid crystal display television (LCD-TV) application. It also has advantages in viewing angle

characteristic (VAC) over conventional displays, such as Twisted Nematic liquid crystal display (TN-LCD)

The above-mentioned two modes, due to their superiority over the conventional TN-LCD, are expected to dominate the high-end application such as LCD-TV. However, practical applications of both OCB and VA-LCDs require optical compensating means to optimize the VAC. In both modes, due to the birefringence of liquid crystal and crossed polarizer, VAC suffers deterioration in contrast when the displays are viewed from oblique angles. Use of biaxial films have been suggested to compensate the OCB (US 6,108,058) and VA (JP1999-95208) LCDs. In both modes, liquid crystals align sufficiently perpendicular to the plane of the cell in ON (OCB) or OFF (VA) states. This state gives positive R_{th} , thus the compensation films have to have sufficiently large negative R_{th} for satisfactory optical compensation. The need for a biaxial film with a large R_{th} is also common for Super Twisted Nematic Liquid Crystal Display (STN-LCD).

Several methods of manufacturing biaxial films with sufficient negative value of R_{th} suitable for compensating LCD modes such as OCB, VA and STN have been suggested.

US 2001/0026338 discloses a use of retardation increasing agent in combination with triacetylcellulose (TAC). The retardation-increasing agent is chosen from aromatic compounds having at least two benzene rings. By stretching agent doped TAC, one can generate both R_{th} and R_{in} . The problems with this method is that the amount of the doping of the agent. To generate the desired effects of increasing R_{th} and R_{in} , the necessary amount of agent is high enough to cause coloration. With this method, it is difficult to control the values of R_{th} and R_{in} independently.

Sasaki et al. proposes (US2003/0086033) the use of cholesteric liquid crystal disposed on the positively birefringent thermoplastic substrate. The pitch of the cholesteric liquid crystal (CHLC) is shorter than the wavelength of the visible light, thus properly aligned CHLC exhibits form birefringence giving negative R_{th} . R_{in} is controlled by adjusting the stretching amount of the thermoplastic substrate. The method enables one to adjust R_{th} and R_{in} separately.

However, the use of short pitch CHLC not only makes the manufacturing cost high but also complicates the processing due to the alignment procedure.

JP2002-210766 discloses the use of propionyl or butyryl substituted TAC. They show higher birefringence than ordinary TAC. Thus, by
5 biaxially stretching the substituted TAC film, one generates R_{in} and R_{th} . The method does not require any additional coating or layer but it suffers a difficulty of independent control of R_{in} and R_{th} .

Thus, it is a problem to be solved to provide a multilayer optical compensator with independently controlled R_{th} and R_{in} that can be readily
10 manufactured.

SUMMARY OF THE INVENTION

The invention provides a multilayer compensator comprising one or more polymeric A layers and one or more polymeric B layers, wherein said A layers comprise a polymer having an out-of-plane birefringence not more negative than -0.01, and said B layers comprise an amorphous polymer having an out-of-plane birefringence more negative than -0.01, and the overall in-plane retardation (R_{in}) of said multilayer compensator is greater than 20nm and the out-of-plane retardation (R_{th}) of said multilayer compensator is more negative than -20nm. The invention also provides a LCD and a process for preparing a compensator of the invention.

The invention multilayer optical compensator is readily manufactured and provides the required value of the R_{in} and the R_{th} values.

15 BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the subject matter of the present invention, it is believed that the invention will be better understood from the following description when taken in conjunction with the accompanying drawings, wherein:

20 FIG.1 is a view of a typical layer with thickness d and x-y-z coordinate system attached to the layer.

FIG.2A and FIG. 2B are schematics showing, respectively, the typical ON and OFF state of the VA liquid crystal cell.

FIG. 3A and FIG. 3B are schematics showing, respectively, the typical ON and OFF states of the OCB liquid crystal cell.

FIG. 4A, FIG. 4B and FIG. 4C are elevation schematics of the multilayer optical compensator of the invention.

5 FIG. 5A, FIG. 5B and FIG. 5C are schematics of a liquid crystal display with multilayer optical compensators of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The following definitions apply to the description herein:

10 Optic axis refers to the direction in which propagating light does not see birefringence.

ON and OFF state refers to the state with and without applied voltage to the liquid crystal cell.

In-plane phase retardation, R_{in} , of a layer **101** shown in FIG. 1 is a quantity
15 defined by $(n_x - n_y)d$, where n_x and n_y are indices of refraction in the direction of x and y . The x axis is taken as a direction of maximum index of refraction in the x - y plane and the y direction is perpendicular to the x axis. For stretched positively birefringent layers, x corresponds to the direction of primary stretch. The x - y plane is parallel to the plane **103** of the layer. d is a thickness of the layer in the z -
20 direction. The quantity $(n_x - n_y)$ is referred to as in-plane birefringence, Δn_{in} . The values of Δn_{in} and R_{in} hereafter are given at wavelength $\lambda = 550\text{nm}$.

Out of-plane phase retardation, R_{th} , of a layer **101** shown in FIG. 1, herein, is a quantity defined by $[n_z - (n_x + n_y)/2]d$. n_z is the index of refraction in z -direction. The quantity $[n_z - (n_x + n_y)/2]$ is referred to as out-of-plane birefringence, Δn_{th} . If
25 $n_z > (n_x + n_y)/2$, Δn_{th} is positive, thus the corresponding R_{th} is also positive. If $n_z < (n_x + n_y)/2$, Δn_{th} is negative and R_{th} is also negative. The values of Δn_{th} and R_{th} hereafter are given at $\lambda = 550\text{nm}$.

Intrinsic Birefringence Δn_{int} of a polymer herein refers to the quantity defined by $(n_e - n_o)$, where n_e , and n_o are extraordinary and ordinary index of the polymer,
30 respectively. Intrinsic birefringence is determined by factors, such as the polarizabilities of functional groups and their bond angles with respect to the

polymer chain. The actual birefringence (in-plane Δn_{in} or out-of-plane Δn_{th}) of a polymer layer depends on the process of forming it, thus the order parameter, and the Δn_{int} .

Amorphous means a lack of long-range order. Thus an amorphous polymer does not show long-range order as measured by techniques such as X-ray diffraction. Chromophore means an atom or group of atoms that serve as a unit in light adsorption. (*Modern Molecular Photochemistry* Nicholas J. Turro Editor, Benjamin/Cummings Publishing Co., Menlo Park, CA (1978) Pg 77). Typical chromophore groups include vinyl, carbonyl, amide, imide, ester, carbonate, aromatic (i.e. heteroaromatic or carbocyclic aromatic such as phenyl, naphthyl, biphenyl, thiophene, bisphenol), sulfone, and azo or combinations of these groups. Non-visible chromophore means a chromophore that has an absorption maximum outside the range of 400-700nm.

Contiguous means that articles are in contact with each other. In two contiguous layers, one layer is in direct contact with the other. Thus, if a polymer layer is formed on the substrate by coating, the substrate and the polymer layers are contiguous.

The invention provides a multilayer compensator comprising one or more polymeric A layers and one or more polymeric B layers, wherein said A layers comprises a polymer having an out-of-plane birefringence not more negative than -0.01, and said B layer comprises an amorphous polymer having an out-of-plane birefringence more negative than -0.01, and the overall in-plane retardation (R_{in}) of said multilayer compensator is greater than 20nm and the out-of-plane retardation (R_{th}) of said multilayer compensator is more negative than -20nm. The A layer is made from polymer film other than one containing a chromophore group in the backbone. The A layer has positive intrinsic birefringence, Δn_{int} . Examples of such a polymer include, TAC, cellulose acetate butylate (CAB), cyclic polyolefin, polycarbonate, polysulfonate, and other polymers known to those skilled in the art. These polymeric materials can be made into a film form by solvent casting, heat extrusion, or other methods. To generate R_{in} that is greater than 20nm in the A layer, any viable methods can be used, however, most commonly practiced procedure is stretching. As the A layers

are made from polymer film with positive Δn_{int} , indices of refraction in the plane of the layer satisfies $n_x > n_y$, where "x" denotes the primary direction of stretching and "y" is the direction perpendicular to x. By stretching polymeric materials, individual polymer chain segments are oriented predominantly to the direction of primary stretch, thus increase the birefringence of polymer layer. As it is necessary to orient the polymer segment, the stretching has to be done above the glass transition temperature of the polymeric materials. Thus, the polymeric film is heated above T_g and stretched. Other method is to stretch the film while solvents are incorporated within the film. With this method, the film can be stretched immediately after the polymer is solvent-cast into a film form. The film can be stretched uniaxially or biaxially. In uniaxial stretching, the film is stretched into one direction. However, by uniaxial stretching, it is difficult to control the films three indices of refraction, n_x , n_y and n_z , where n_z is an index of refraction in the film normal direction. This is particularly true when the stretching of the film in the x direction is large enough so that there is a contraction in the y direction. This contraction effectively gives stretching in the film normal direction z, thus increases n_z . In biaxial stretching, where two stretching directions x and y are perpendicular to each other, the undesired shrinkage caused by the stretch in the primary stretching direction (say in x direction) is prevented by simultaneous stretch in the secondly direction (y). Thus the increase in n_z can effectively be prevented. Means to stretch are not particularly limited so long the stretched film has sufficient uniformity in three indices of refraction. The polymeric A layer has Δn_{th} not more negative than -0.01 . The polymeric A layers of the multilayer compensator are such that the overall in-plane retardation (R_{in}) of said multilayer compensator is suitably greater than 20nm, desirably between than 30 and 200nm, and conveniently between 30nm and 150nm.

The polymeric B layers will typically be solvent coated onto the A layer. This solvent coating could be accomplished by spin coating, hopper coating, gravure coating, wire bar coating or other coating methods known to those skilled in the art. The coated B layers are contiguous to the A layer.

The B layer is coated from a solution containing a polymer that yields high negative birefringence that is more negative than -0.01 upon solvent coating. To produce negative Δn_{th} (or R_{th}), polymers with positive Δn_{int} are used. Such polymers usually contain non-visible chromophore groups such as vinyl,
5 carbonyl, amide, imide, ester, carbonate, sulfone, azo, and aromatic groups (i.e. benzene, naphthalate, biphenyl, bisphenol A) in the polymer backbone. Examples of such polymers are polyesters, polycarbonates, polyimides, polyetherimides, and polythiophenes. One could also add fillers and non-polymeric molecules to these polymers for the second layer.

10 Desirably, polymers to be used in the B layers will not have chromophores off of the backbone. An example of such an undesirable polymer with chromophores in and off the backbone would be polyarylates possessing the fluorene group. The glass transition temperature (T_g) of the polymers used in the B layer is significant. It should be above 180°C to achieve the desired results.
15 The polymers used in the B layers could be synthesized by a variety of techniques: condensation, addition, anionic, cationic or other common methods of synthesis could be employed.

The thickness of each B layer should be less than $30\mu\text{m}$. Typically it should be from $0.1\mu\text{m}$ to $20\mu\text{m}$. Conveniently it should be from $1.0\mu\text{m}$ to
20 $10\mu\text{m}$. Desirably it should be from $2\mu\text{m}$ to $8\mu\text{m}$.

The combined thickness of the multilayer optical compensator should be less than $200\mu\text{m}$. Typically it should be from $40\mu\text{m}$ to $150\mu\text{m}$. Desirably it should be from $80\mu\text{m}$ to $110\mu\text{m}$.

The B layers should be of sufficient thickness so that the
25 out-of-plane retardation of the B layers is more negative than -20nm . Typically it should be from -600nm to -60nm . Conveniently it should be from -500nm to -50nm . Desirably it should be from -400nm to -50nm .

Reference will now be made to the drawings in which the various elements of the present invention will be given numerical designations and in
30 which the invention will be discussed so as to enable one skilled in the art to make

and use the invention. It is to be understood that elements not specifically shown or described may take various forms well known to those skilled in the art.

FIG. 4A, FIG. 4B and FIG. 4C are elevation schematics of the exemplary multilayer optical compensators in accordance with the invention.

5 Compensator **401** in FIG. 4A has a structure in which a B layer **409** is disposed on an A layer **407**. The A layer **407** and the B layer **409** are contiguous. It is also possible to have two B layers **413**, **415** disposed on one A layer **411** such as the compensator **403** in FIG. 4B. In other case **405**, one B layer **417** is sandwiched by two A layers **419**, **421**. The compensator **405** can be formed, for example, by
10 laminating contiguous layers of A **421** and B **417**, and the single layer of A **419**. The lamination is done at the interface of B layer **417** and A layer **419**, and the two layers **417** and **419** may or may not be contiguous depending on the method of the lamination. One skilled in the art could conceive of more complex structures.

15 In LCD **501** shown in FIG. 5A, the liquid crystal cell **503** is placed between the polarizer **505** and analyzer **507**. Transmission axis of the polarizer **509** and analyzer **511** form angle $90 \pm 10^\circ$ thus, pair of polarizer **509** and analyzer **511** are said to be "crossed polarizer". A multilayer optical compensator **512** is placed between the polarizer **505** and the liquid crystal cell **503**. It can also be
20 placed between the liquid crystal cell **503** and the analyzer **507**. LCD **513** shown schematically in FIG. 5B has two multilayer optical compensators **515**, **517** placed on the both sides of the liquid crystal cell **503**. FIG. 5C shows an application example of multilayer optical compensator in a reflective type LCD **519**. The liquid crystal cell **503** is located between the polarizer **505** and a reflective plate
25 **521**. In the figure, the multilayer compensator **523** is placed between the liquid crystal cell **503** and the polarizer **505**. However, it can also be placed between the reflective plate **521** and the liquid crystal cell **503**.

Compared to the prior art, embodiments of the present invention avoids retardation increasing agent that causes coloration, do not require the use
30 of liquid crystal compounds and its alignment procedure, provide enhanced optical compensation in a relatively thin ($<200\mu\text{m}$) structure, and are easily manufactured.


As a further attribute, embodiments enable the control of R_{in} , which is primarily the responsibility of the A layer while control of R_{th} is primarily the responsibility of the B layer. In the prior art, R_{in} and R_{th} are often coupled and are not controlled independently.

5 The present invention is further illustrated by the following non-limiting examples of its practice.

Example:

Polymer 1 (synthesis):

10 To a stirred mixture of 4,4'-hexafluoroisopropylidenediphenol (23.53 g, 0.07 mole), 4,4'-(2-norbornylidene) bisphenol (8.4 g, 0.03 mole) and triethylamine (22.3 g, 0.22 mole) in methyl ethyl ketone (100 mL) at 10° C. was added a solution of terephthaloyl chloride (16.23 g, 0.8 mole) and isophthaloyl chloride (4.08g, 0.2 mole) in methyl ethyl ketone (60 mL). After the addition, the
15 temperature was allowed to rise to room temperature and the solution was stirred under nitrogen for 4 hours, during which time triethylamine hydrochloride precipitated in a gelatinous form and the solution became viscous. The solution was then diluted with toluene (160 mL) and washed with dilute hydrochloric acid, (200 mL of 2% acid) followed three times by water (200 mL). The solution was
20 then poured into ethanol with vigorous stirring, and a white bead like polymer precipitated, collected and dried at 50° C. under vacuum for 24 hours. The glass transition temperature of this polymer was measured by differential scanning calorimetry to be 265° C

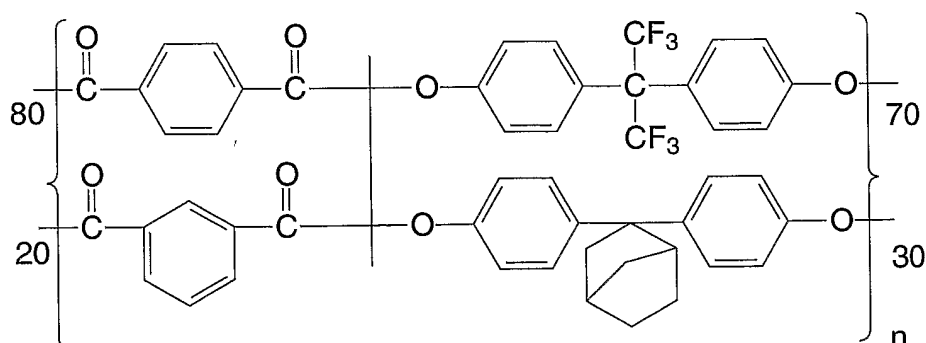

25 Poly(4,4'-hexafluoroisopropylidene-bisphenol-co- 4,4'-(2-norbornylidene) bisphenol) terephthalate-co-isophthalate.

Polymer 1

- Polymer 1 was spun cast (8% solids in 80% propylacetate 20% toluene) onto both a glass slide and a stretched polymer substrate sample, and was analyzed with an ellipsometer (model M2000V, J.A. Woollam Co.) at 550nm
- 5 wavelength to obtain the R_{th} and R_{in} . These values are listed in TABLE I.

TABLE I

<u>Sample</u>	R_{in} (nm)	R_{th} (nm)
Polymer 1 on glass	0.6	-38
Stretched polymer substrate	40.0	-123
Polymer A on stretched polymer substrate	35.0	-190

- 10 The layer of polymer 1 also did not show any sign of a long-range order therefore the layer was determined to be comprised of an amorphous polymer.

PARTS LIST

101	film
103	plane of the film
201	VA liquid crystal cell in OFF state
203	VA liquid crystal cell in ON state
205	liquid crystal optic axis
207	liquid crystal cell substrate
209	light propagating cell normal direction
211	light propagating oblique direction
301	OCB liquid crystal cell in OFF state
303	OCB liquid crystal cell in ON state
305	liquid crystal optic axis
307	cell middle plane
309	cell boundaries
401	multilayer optical compensator
403	multilayer optical compensator
405	multilayer optical compensator
407	A layer
409	B layer
411	A layer
413	B layer
415	B layer
417	B layer
419	A layer
421	A layer
501	LCD
503	liquid crystal cell
505	polarizer
507	analyzer
509	transmission axis of polarizer
511	transmission axis of analyzer
512	multilayer optical compensator

513	LCD
515	multilayer optical compensator
517	multilayer optical compensator
519	LCD
521	reflective plate
523	multilayer optical compensator
n_x	index of refraction in x direction
n_y	index of refraction in y direction
n_z	index of refraction in z direction
n_o	ordinary index of refraction
n_e	extraordinary index of refraction
Δn_{th}	out-of-plane birefringence
Δn_{in}	in-plane birefringence
Δn_{int}	intrinsic birefringence of polymer
d	thickness of the layer or film
R_{th}	out-of-plane phase retardation
R_{in}	in-plane phase retardation
λ	wavelength
T_g	glass transition temperature

Claims:

1. A multilayer compensator comprising one or more polymeric A layers and one or more polymeric B layers, wherein:
5 said A layers comprise a polymer having an out-of-plane (Δn_{th}) birefringence not more negative than -0.01;
 said B layers comprise an amorphous polymer having an out-of-plane birefringence more negative than -0.01; and
 the overall in-plane retardation (R_{in}) of said multilayer compensator is
10 greater than 20nm and the out-of-plane retardation (R_{th}) of said multilayer compensator is more negative than -20nm.
2. The multilayer compensator of claim 1 wherein at least two of the
15 layers are contiguous.
3. The multilayer compensator of claim 1 wherein all of said A and
 said B layers are contiguous.
4. The multilayer compensator of claim 1 wherein the combined B
20 layers have a thickness of less than 30 micrometers.
5. The multilayer compensator of claim 1 wherein the combined B
 layers have a thickness of from 1.0 to 10 micrometers.
- 25 6. The multilayer compensator of claim 1 wherein the combined B layers have a thickness of from 2 to 8 micrometers.
7. The multilayer compensator of claim 1 wherein the combined A
 layers are such that the overall in-plane retardation (R_{in}) of said multilayer
30 compensator is greater than 20nm

8. The multiplayer compensator of claim 1 wherein the combined A layers are such that the overall in-plane retardation (R_{in}) of said multilayer compensator is between 30 and 200nm.

5 9. The multiplayer compensator of claim 1 wherein the combined A layers are such that the overall in-plane retardation (R_{in}) of said multilayer compensator is between 30 and 150nm.

10 10. The multiplayer compensator of claim 1 wherein the combined A layers are such that the overall in-plane retardation (R_{in}) of said multilayer compensator is between 30 and 100nm.

11. The multilayer compensator of claim 1 wherein the thickness of the combined A and B layers of the compensator is less than 200 micrometers.

15

12. The multilayer compensator of claim 1 wherein the thickness of the combined A and B layers of the compensator is from 40 to 150 micrometers.

13. The multilayer compensator of claim 1 wherein the thickness of the combined A and B layers of the compensator is from 80 to 110 micrometers.

20

14. The multilayer compensator of claim 1 wherein the combined R_{th} of the B layers is -20nm or more negative.

15 15. The multilayer compensator of claim 1 wherein the combined R_{th} of the B layers is from -600 to -60nm.

16. The multilayer compensator of claim 1 wherein the combined R_{th} of the B layers is from -500 to -50nm.

30

17. The multilayer compensator of claim 1 wherein at least one B layer comprises a polymer containing in the backbone a non-visible chromophore group and has a T_g above 180°C.
- 5 18. The multilayer compensator of claim 1 comprising a polymer in an A layer wherein the T_g of said A polymer is above 180°C.
19. The multilayer compensator of claim 1 wherein a B layer comprises a polymer containing in the backbone a nonvisible chromophore
10 containing a vinyl, carbonyl, amide, imide, ester, carbonate, aromatic, sulfone, or azo, phenyl, naphthyl, biphenyl, bisphenol, or thiophene group.
20. The multilayer compensator of claim 1 wherein a B layer comprises a copolymer containing 1) a poly(4,4'-hexafluoroisopropylidene-
15 bisphenol) terephthalate-co-isophthalate, 2) a poly(4,4'-hexahydro-4,7-methanoindan-5-ylidene bisphenol) terephthalate, 3) a poly(4,4'-isopropylidene-2,2',6,6'-tetrachlorobisphenol) terephthalate-co-isophthalate, 4) a poly(4,4'-hexafluoroisopropylidene)-bisphenol-co-(2-norbornylidene)-bisphenol terephthalate, 5) a poly(4,4'-hexahydro-4,7-methanoindan-5-ylidene)-bisphenol-
20 co-(4,4'-isopropylidene-2,2',6,6'-tetrabromo)-bisphenol terephthalate, 6) a poly(4,4'-isopropylidene-bisphenol-co- 4,4'-(2-norbornylidene) bisphenol) terephthalate-co-isophthalate, or 7) a poly(4,4'-hexafluoroisopropylidene-bisphenol-co- 4,4'-(2-norbornylidene) bisphenol) terephthalate-co-isophthalate.
- 25 21. The multiplayer compensator of claim 1 wherein a B layer comprises a copolymer of a poly(4,4'-hexafluoroisopropylidene-bisphenol-co-4,4'-(2-norbornylidene) bisphenol) terephthalate-co-isophthalate
22. The multilayer compensator of claim 1 wherein an A layer
30 comprises a polymer other than a polymer containing in the backbone a non-visible chromophore group having a T_g above 180°C.

23. The multilayer compensator of claim 18 wherein a B layer comprises a polymer containing in the backbone a non-visible chromophore group that does not contain a chromophore off of the backbone

5 24. The multilayer compensator of claim 1 wherein A layer contains a polymer that comprises triacetylcellulose, cellulose diacetate, cellulose acetate butyrate, polycarbonate, cyclic polyolefin or polyarylate containing fluorene groups.

10 25. The multilayer compensator of claim 1 wherein an A layer comprises amorphous polymer stretched above glass transition temperature.

26. The multilayer compensator of claim 1 wherein a polymer in an A layer is triacetylcellulose (TAC) or cellulose acetate butylate (CAB).

15

27. A liquid crystal display comprising a liquid crystal cell, a pair of crossed polarizers located one on each side of the cell, and at least one compensator of claim 1.

20 28. The liquid crystal display of claim 27 wherein said liquid crystal cell is a vertically aligned or twisted nematic cell.

29. The liquid crystal display of claim 27 employing optically compensated bend liquid crystal cell.

25

30. A liquid crystal display comprising a liquid crystal cell, at least one polarizer, a reflective plate, and at least one compensator of claim 1.

31. The liquid crystal display of claim 30 wherein said liquid crystal
30 cell is a vertically aligned, twisted nematic liquid crystal cell.

32. A process for forming a compensator for an LC display comprising coating a B layer in a solvent onto an A layer wherein one or more A layers have in-plane retardation greater than 20nm and one or more B layers that contain an amorphous polymer and have a out-of-plane birefringence more negative than
- 5 -0.01 and comprise selected polymeric materials having sufficient thickness so that the overall in-plane retardation (R_{in}) of the said compensator is greater than 20nm and the overall out-of-plane retardation (R_{th}) is more negative than -20nm.

1/7

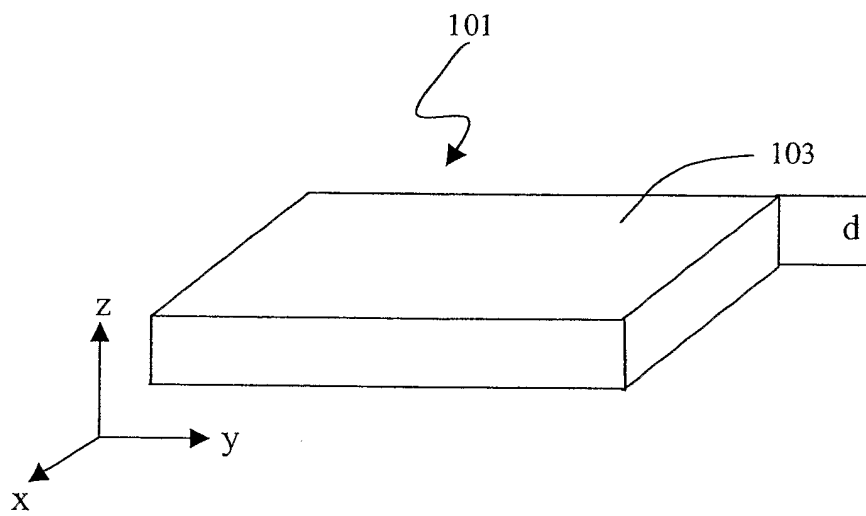


FIG. 1

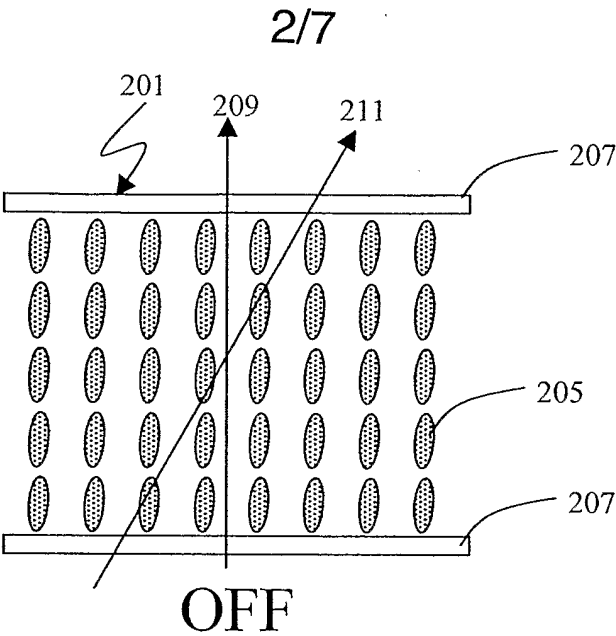


FIG.2A



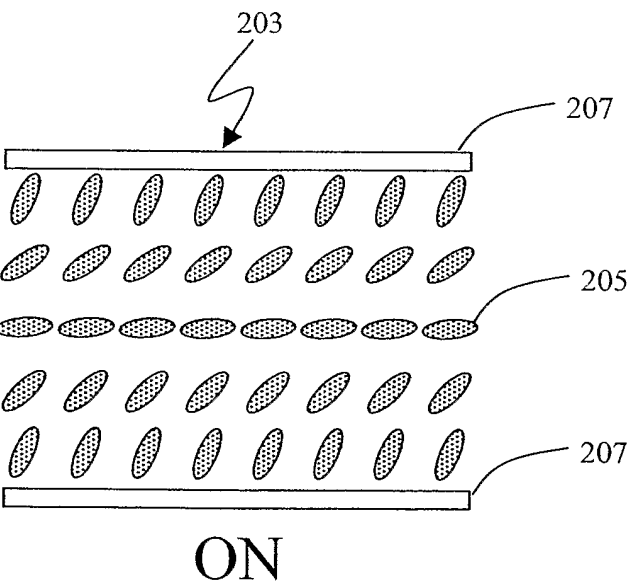


FIG.2B

3/7

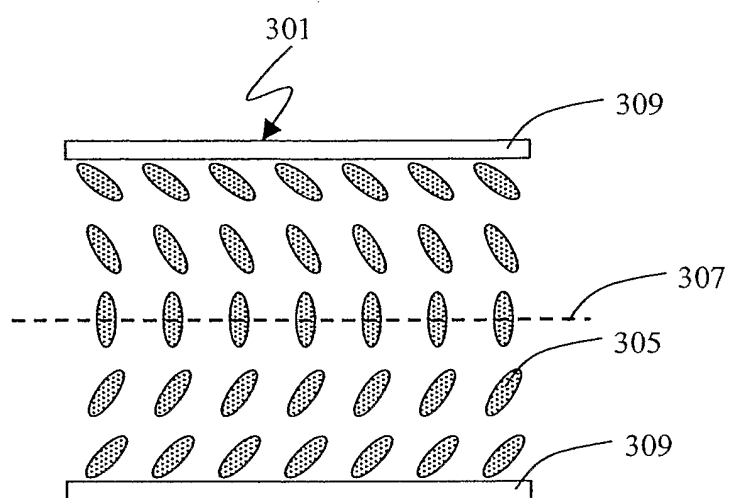

OFF
FIG.3A

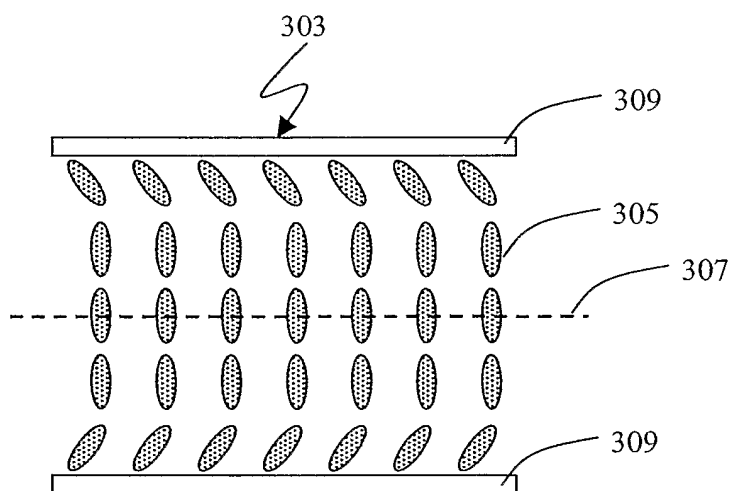

ON
FIG.3B

4/7

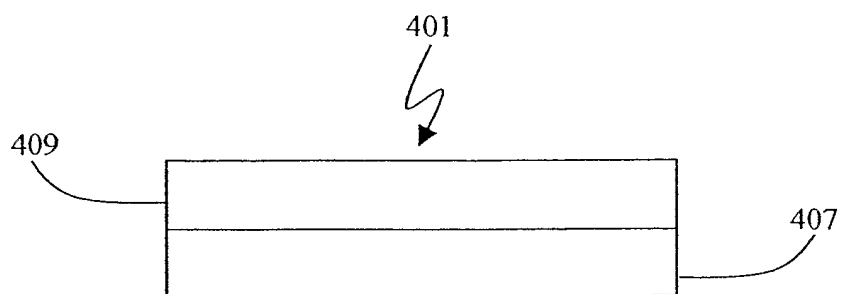


FIG. 4A

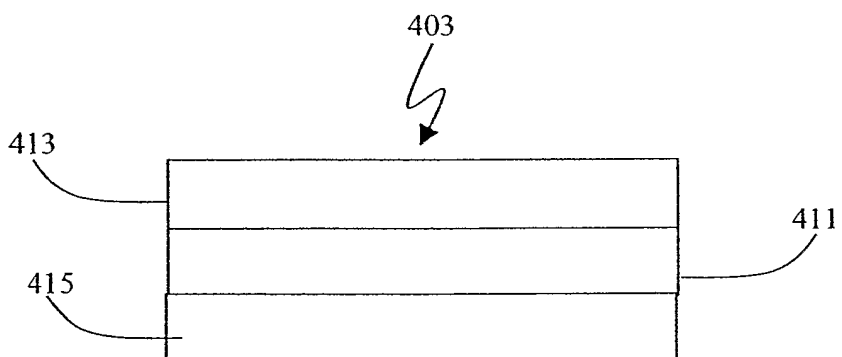


FIG. 4B

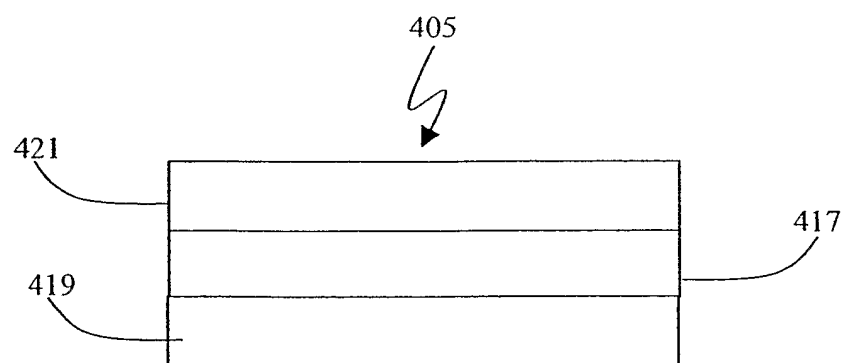


FIG. 4C

5/7

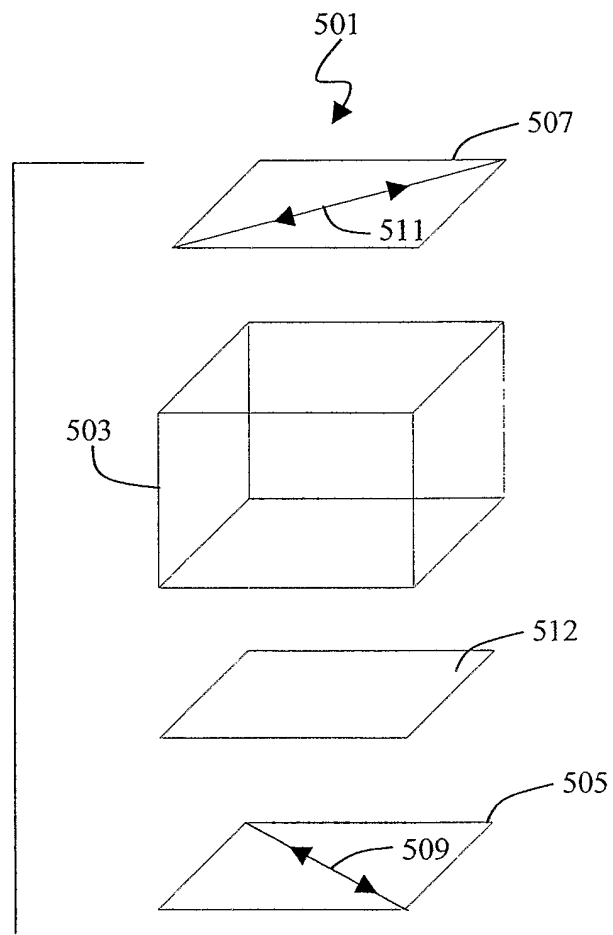


FIG. 5A

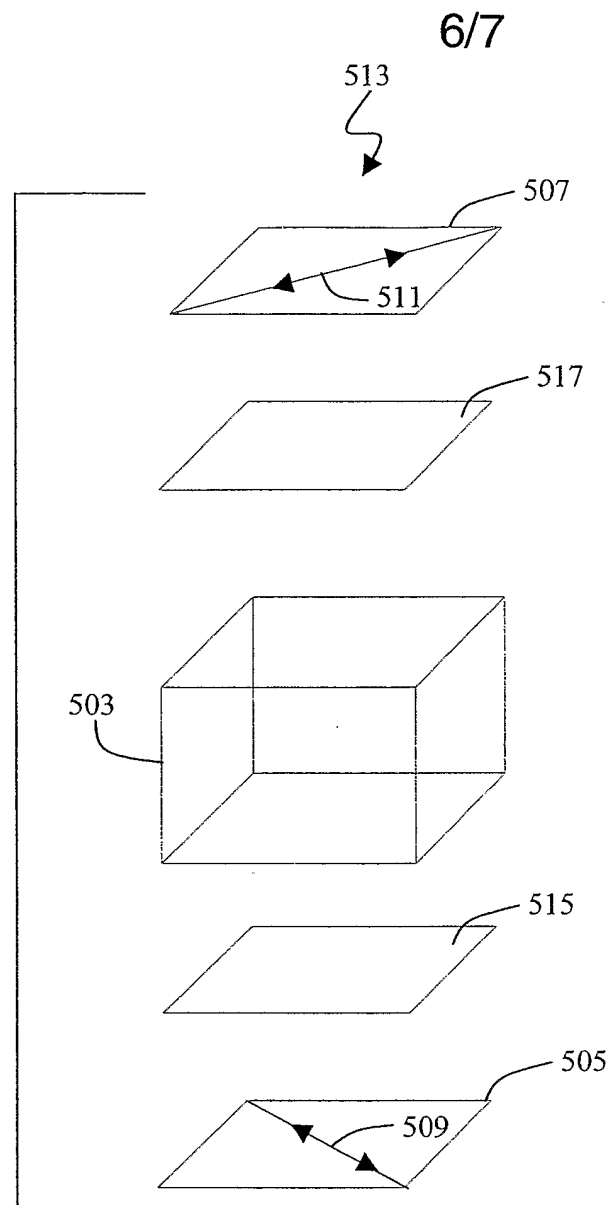


FIG. 5B

7/7

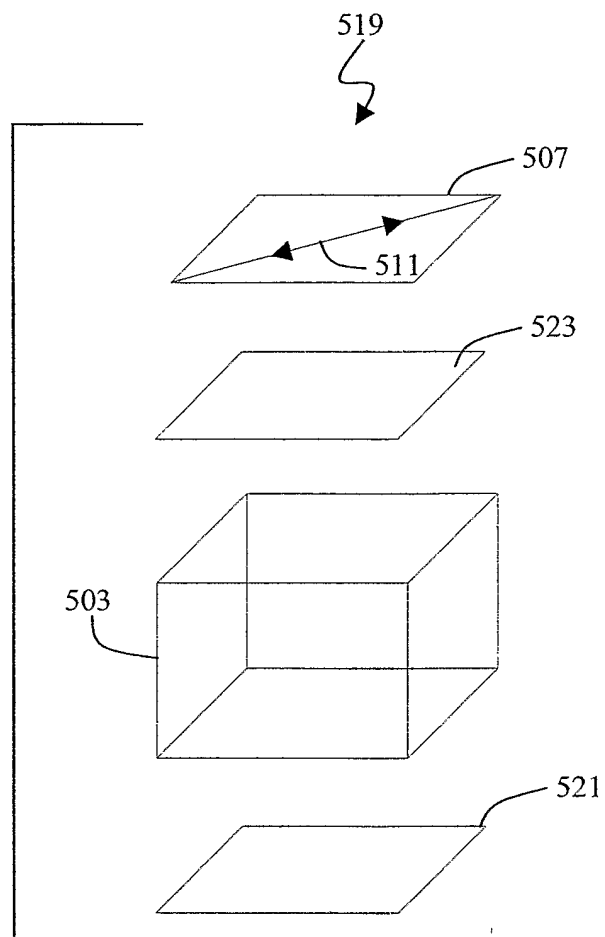


FIG. 5C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/022944

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02F1/13363 G02B5/30 C08G64/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G02F G02B C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 238 753 B1 (SAHOVANI HASSAN ET AL) 29 May 2001 (2001-05-29) abstract column 2, line 16 - column 3, line 47 column 3, line 62 - column 5, line 64 column 8, line 32 - column 9, line 20 column 10, line 41 - column 11, line 62 column 12, line 58 - column 30, line 52 figures 1,2	1-32
A	-& US 2002/192445 A1 (AYUKAWA HIROSHI ET AL) 19 December 2002 (2002-12-19) paragraphs '0024! - '0029! ----- -/--	17,18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

5 November 2004

Date of mailing of the international search report

15/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kentischer, F

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/022944

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 118 885 A (TEIJIN LTD) 25 July 2001 (2001-07-25) abstract paragraphs '0012! - '0015! paragraph '0029! - paragraph '0055! paragraph '0064! - paragraph '0066! paragraph '0078! - paragraph '0089! -----	1-32
Y	EP 0 544 013 A (FUJIMORI KOGYO CO ; SEIKO EPSON CORP (JP)) 2 June 1993 (1993-06-02) abstract page 4, line 30 - page 5, line 11 figures 1-3 -----	1-32
A	US 5 480 964 A (CHENG STEPHEN Z D ET AL) 2 January 1996 (1996-01-02) abstract column 4, line 10 - line 45 column 37, line 45 - column 40, line 23 -----	1,19-21

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US2004/022944

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6238753	B1	29-05-2001	US 6074709 A 13-06-2000
			US 5750641 A 12-05-1998
			US 2002012758 A1 31-01-2002
			AU 7369996 A 09-12-1997
			CN 1219247 A 09-06-1999
			EP 0900406 A1 10-03-1999
			JP 2000511296 T 29-08-2000
			KR 2000015781 A 15-03-2000
			US 5969088 A 19-10-1999
			WO 9744704 A1 27-11-1997
US 2002192445	A1	19-12-2002	WO 02090452 A2 14-11-2002
EP 1118885	A	25-07-2001	DE 60008693 D1 08-04-2004
			EP 1118885 A1 25-07-2001
			US 6638582 B1 28-10-2003
			CN 1322303 T 14-11-2001
			WO 0109649 A1 08-02-2001
			TW 520449 B 11-02-2003
EP 0544013	A	02-06-1993	DE 69209008 D1 18-04-1996
			DE 69209008 T2 05-09-1996
			EP 0544013 A1 02-06-1993
			US 5396355 A 07-03-1995
			WO 9222835 A1 23-12-1992
			JP 3313406 B2 12-08-2002
			JP 5196816 A 06-08-1993
US 5480964	A	02-01-1996	US 5344916 A 06-09-1994
			US 5580950 A 03-12-1996
			AU 6711694 A 08-11-1994
			CA 2160908 A1 27-10-1994
			DE 69424937 D1 20-07-2000
			DE 69424937 T2 11-01-2001
			EP 0698052 A1 28-02-1996
			WO 9424191 A1 27-10-1994
			JP 8511812 T 10-12-1996