


July 23, 1946.

J. A. BROOKS

2,404,430

HANGING SUPPORT FOR FOUNTAIN SYRINGES

Filed Aug. 8, 1944

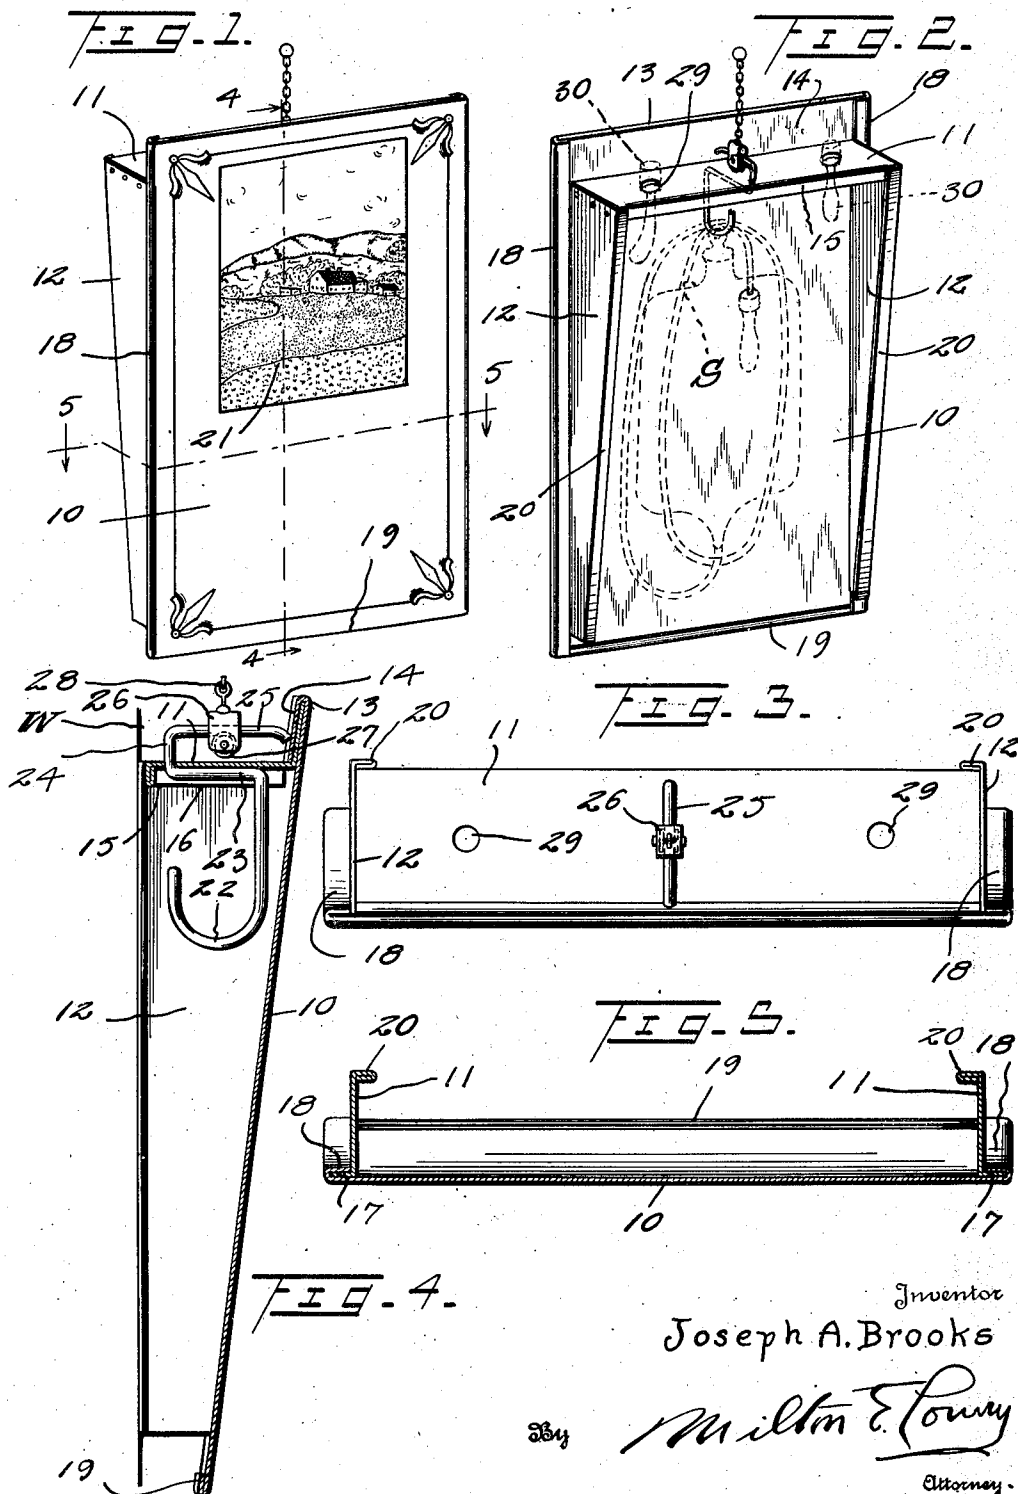

Inventor
Joseph A. Brooks

By *Milton E. Lowmy*
Attorney.

UNITED STATES PATENT OFFICE

2,404,430

HANGING SUPPORT FOR FOUNTAIN
SYRINGES

Joseph A. Brooks, Pittsburgh, Pa.

Application August 8, 1944, Serial No. 548,598

4 Claims. (Cl. 206—17.5)

1

This invention relates to certain new and useful improvements in hanging supports for fountain syringes and the like.

The primary object of the invention is to provide a hanging support for fountain syringes and the like wherein the support is in the form of an open sided casing to be suspended on a wall with the open side thereof facing the wall and with the sides of the casing having inclined edges for wall contact so that the closed side of the casing that may carry a pictorial representation or the like will be disclosed at an angle to the wall in simulation of a hanging picture with a fountain syringe, hot water bottle or the like suspended within the casing from the top wall thereof and entirely hidden from view, the casing comprising the hanging support being reversibly positioned with respect to the wall of the room when the fountain syringe or the like is in service.

A further object of the invention is to provide a hanging support for fountain syringes and the like of the foregoing character wherein a hook member secured within the casing to the top wall thereof constitutes a support for the fountain syringe, with an extension on the hook member projecting through the top wall of the casing with the extension spaced above and substantially parallel with the top wall of the casing and to which a suspension cord or chain is attached by means of a swivelled pulley block, the hanging support presenting the appearance of a wall picture when reversed with the fountain syringe or the like entirely hidden from view, while the pulley block support permits flat contact of either side of the casing with the wall.

With the above and other objects in view that will become apparent as the nature of the invention is better understood, the same consists in the novel form, combination and arrangement of parts hereinafter more fully described, shown in the accompanying drawing and claimed.

In the drawing:

Figure 1 is a front perspective view of a hanging support for fountain syringes and the like disclosing a pictorial representation on the front wall of the hanging support casing to create the impression of a wall picture;

Figure 2 is a rear perspective view of the hanging support with a fountain syringe illustrated by dotted lines as mounted therein, the top wall of the hanging support casing having openings therein for the support of fountain syringe nozzles and further illustrating the inclined edges of the side walls of the casing for wall contact to

2

present the front wall at an angle in simulation of a wall hung picture;

Figure 3 is a top plan view of the device;

Figure 4 is a vertical cross-sectional view taken on line 4—4 of Figure 1, showing the hook within the casing of the hanging support for the suspension of a fountain syringe or the like and a suspension chain and swivel pulley hook attached to an extension on the block; and

Figure 5 is an enlarged horizontal fragmentary sectional view taken on line 5—5 of Figure 1.

Referring more in detail to the accompanying drawing, there is illustrated a hanging support for fountain syringes and the like in the form of a casing open at its rear side, being preferably of rectangular form in front elevation and including a front wall 10, a top wall 11, and side walls 12.

The connection between the front wall 10 and top wall 11 includes an upwardly directed flange extension 13 at the forward edge of the top wall 11 engaged by the upper edge flange 14 on the front wall 10. The rear edge of the top wall 11 is bent downwardly and upwardly upon itself to provide a reinforcing bead 15 while each end of the top wall 11 carries a downwardly bent flange 16.

Each side wall 12 of the casing is secured to the front wall 10 thereof by means of an outwardly directed flange 17 engaged by an inwardly bent flange extension 18 on the front wall, the upper ends of the flange 18 overlying the flange 14 on the front wall 10 as shown in Figure 4. The upper ends of the side walls 12 may be secured in any suitable manner to the end flanges 16 depending from the top wall 11 and the lower ends of the side walls terminate in spaced relation to the lower end of the front wall with the latter bent upon itself as at 19, see Figure 4, to provide a reinforcing bead. Reinforcing bead extensions directed toward each other are provided at the free edges of the side walls 12 as shown at 20, with the free edges of said side walls 12 disposed at angles to the front wall 10 presenting side walls of substantially triangular formation so that when the casing comprising the hanging support is in service position, the front wall 10 of the casing carrying a pictorial or other illustration 21 as shown in Figure 1 is disposed at an angle to the wall of the room in simulation of a suspended picture.

The support for the fountain syringe, hot water bottle or the like comprises a hook 22 located within the casing and attached to the underside of the top wall 11 by means of the horizontal leg por-

3

tion 23 of the hook that may be soldered or otherwise secured to the top wall 11 with a vertical arm extension 24 on the leg 23 extending upwardly through the top wall 11 of the casing. The upper end of the leg 24 above the top wall 11 of the casing carries a return-bent leg 25 spaced upwardly of the top wall substantially parallel therewith and overlying the underlying leg 23. A pulley block 26 carries a pulley 27, the block being slidable on the leg 25 with the latter resting upon the pulley 27, the pulley block 26 being freely movable over the leg 25. A suspension chain 28 or the like supports the pulley block 26, and, of course, the hanging casing and said suspension chain may be wall or ceiling-anchored for the support of the casing.

When the casing is suspended upon a wall indicated at W in Figure 4, the same creates the appearance of a wall picture as indicated in Figure 1 in view of the angular disposition of the front wall 10 relative to the room wall W and when the casing is so disposed, the fountain syringe indicated by the reference character S that is suspended upon the hook 22 within the casing is entirely hidden from view. As shown in Figures 2 and 3, the top wall 11 of the casing is provided with spaced openings 29 for the support of fountain syringe accessories 30 indicated by dotted lines in Figure 2 that are hidden from view by the upstanding upper end of the front wall 10 and the lower setting of the top wall 11 of the casing.

When it is desired to use the fountain syringe, the casing is reversed in position against the wall 11, with the wall 10 of the casing flatly engaging the wall while the open side of the casing is exposed as illustrated in Figure 2. By the provision of the pulley block support for the casing, the upper leg 25 of the hook is freely movable through the pulley block so that either the side edges of the side walls 12 or the front wall 10 of the casing will lie in flat engagement with the wall W.

From the above detailed description of the invention, it is believed that the construction and operation of the device will at once be apparent, and while there is herein shown and described the preferred embodiment of the invention, it is nevertheless to be understood that minor changes may be made therein such as will fall within the scope of the invention as claimed.

I claim:

1. In a hanging support for fountain syringes and the like, a casing having a front wall, top and side walls, the rear edges of the side walls adapted for abutting engagement with a room wall and the forward edges of the side walls being inclined downwardly and rearwardly in its position against a wall in simulation of a hanging picture and suspension means for the casing, including a hook within the casing for the sup-

4

port of a fountain syringe or the like, a part of the hook extending upwardly through the top wall of the casing and a pulley block movably engaged with the part of the hook extending above the casing, a hanging chain engaging the pulley block, and said hook within the casing having a part thereof attached to the underside of the top wall of the casing to maintain the hook in proper relationship with the casing.

2. In a hanging support for fountain syringes and the like, a casing having a front wall, top and side walls, the rear edges of the side walls adapted for abutting engagement with a room wall and the forward edges of the side walls being inclined downwardly and rearwardly in its position against a wall in simulation of a hanging picture and suspension means for the casing, including a hook within the casing for the support of a fountain syringe or the like, said hook including a straight leg extending angularly from the body thereof and secured to the underside of the top wall of the casing to maintain the hook in proper relationship with the casing, a part of the hook extending upwardly through the top wall of the casing, a pulley block movably engaged with the part of the hook extending above the casing and a suspension for the pulley block.

3. In a hanging support for fountain syringes and the like, a casing having a front wall, top and side walls, the rear edges of the side walls adapted for abutting engagement with a room wall and the forward edges of the side walls being inclined downwardly and rearwardly in its position against a wall in simulation of a hanging picture and suspension means for the casing, including a hook in the casing for the support of a fountain syringe or the like and having a part thereof secured to the underside of the top wall of the casing, an extension leg on the hook overlying the top wall of the casing and spaced therefrom and a chain-carried pulley block on which the leg extension is slidable.

4. In a hanging support for fountain syringes and the like, a casing having a front wall, top and side walls, the rear edges of the side walls adapted for abutting engagement with a room wall and the forward edges of the side walls being inclined downwardly and rearwardly in its position against a wall in simulation of a hanging picture and suspension means for the casing, including a hook in the casing for the support of a fountain syringe or the like and having a straight leg portion secured to the underside of the top wall of the casing, the free end of the leg extending upwardly through the top wall of the casing, a second leg on said extension above the top wall, parallel therewith and spaced therefrom, a pulley block on which the second leg is freely supported and a hanging chain carrying said pulley block.

JOSEPH A. BROOKS.