

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 April 2003 (10.04.2003)

PCT

(10) International Publication Number
WO 03/029332 A1

(51) International Patent Classification⁷: **C08J 3/24**,
C08K 5/3435

(21) International Application Number: PCT/EP02/10403

(22) International Filing Date:
17 September 2002 (17.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01810933.0 25 September 2001 (25.09.2001) EP

(71) Applicant (for all designated States except US): **CIBA
SPECIALTY CHEMICALS HOLDING INC.** [CH/CH];
Klybeckstrasse 141, CH-4057 Basel (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROTH, Michael**
[DE/DE]; Falltorweg 5, 64686 Lautertal (DE). **SIMON,
Dirk** [DE/DE]; Birkenstrasse 13, 67112 Mutterstadt (DE).

(74) Common Representative: **CIBA SPECIALTY CHEMI-
CALS HOLDING INC.**; Patentabteilung, Klybeckstrasse
141, CH-4057 Basel (CH).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CROSSLINKING OF UNSATURATED POLYMERS BY THE USE OF HYDROXYLAMINE-ESTERS

(57) Abstract: The instant invention relates to a process for crosslinking unsaturated polymer resins as e.g. unsaturated polyesters using hydroxylamine esters as radical source. Further aspects of the invention are a composition comprising unsaturated polymer resins as e.g. unsaturated polyester resins and a hydroxylamine ester and the use of hydroxylamine esters for crosslinking unsaturated polymers.



WO 03/029332 A1

Crosslinking of Unsaturated Polymers by the Use of Hydroxylamine-Esters

The instant invention relates to a process for crosslinking unsaturated polymer resins as e.g. unsaturated polyesters using hydroxylamine esters as radical source. Further aspects of the invention are a composition comprising unsaturated polymer resins as e.g. unsaturated polyester resins and a hydroxylamine ester and the use of hydroxylamine esters for crosslinking unsaturated polymers.

Thermally initiated radical crosslinking of oligomers or polymers, which contain unsaturated groups, is a convenient process to produce duroplastic articles. Suitable resins are for instance unsaturated polyesters, prepolymers based on vinyl esters, acrylates, methacrylates or polyurethanes. The crosslinking reaction can be carried out with the pre-polymer itself or in combination with radically copolymerizable monomers, for instance styrene, diallylphthalate or methylmethacrylate.

Most widely used are unsaturated polyester resins or mixtures of unsaturated polyesters with monomers and other prepolymers.

Unsaturated polyester resins (UP) are polycondensation products based on unsaturated and saturated acids/anhydrides and diols or oxides. These resins are generally oligomers with a low degree of polymerization, such as for example with a molecular weight of 1000-5000 Dalton. Depending on the chemical composition and molecular weight, these oligomers may be viscous liquids or brittle solids. The unsaturation in the backbone provides sites for reaction with vinyl monomers using thermal free radical initiators, thereby leading to the formation of a three dimensional network.

Commercially available unsaturated polyester resins are usually blends or solutions of the polyester resin in a vinyl monomer such as for example styrene, diallylphthalate, methylacrylate or methylmethacrylate. These monomers are frequently called reactive diluents since they react with the unsaturated polyester resin during the crosslinking (curing) reaction.

Unsaturated polyester resins are widely used for a variety of applications in the construction, transportation and electric and electronic industry. The biggest use is in polymeric

composites, such as glass-fiber-reinforced articles. The resins can be cured over a wide temperature range from room temperature i. e. ambient condition up to 150° C using for example a peroxide as radical source.

When the unsaturated polymer resin is crosslinked (cured) by a thermal process, a peroxide, hydroperoxide or a perester must be added to produce free radicals. For example methylethylketon peroxide (MEKP) and dibenzoyl peroxide, partly in combination with radical building activators (e.g. diethylanilin, Co-octanoate), are used as initiators in ambient cure applications. Curing processes at a temperature between 60°C and 90°C often use dibenzoyl peroxide. Hot-curing in compression molding and in ovens at a temperature between 130°C and 150°C can be initiated by peroxides, such as di-tert-butyl peroxide, tert-butylperbenzoate, butylperethylhexanoate, 1,1-di(tert-butyl-peroxy)-3,3,5-trimethylcyclohexane and dicumyl peroxide.

The use of radical building activators, or so-called accelerators, in UP-resins together with peroxides is well known. For example B. Parkyn et al. (Ullmann's Encyclopedia of Industrial Chemistry, Polyesters Volume 2, publ. London ILIFFE Books, 1967, page 60-64) mentions metal salts such as e.g. salts based on Cerium, Cobalt (most commonly Co-octanoate), Vanadium, Iron. Also tert. amines, such as e.g. N,N-dimethylaniline, N,N-diethylaniline, N,N-dimethyl-p-toluidine, N,N-bis-2-hydroxyethylaniline may be added. Another group are sulfur containing compounds, such as sulphur dioxide, hydrogen sulphide, mercaptanes, in particular lauryl (dodecyl)mercaptane or p-toluenesulphinic acid. Also suitable are benzamide hydrochloride or styrene oxide.

When the radical initiators and optionally accelerators are added, the formulation must be processed shortly after their addition, since storage stability decreases dramatically. A further drawback of the conventionally used radical initiators is, that severe precautions have to be made for storing these initiators.

As mentioned before UP-resins, for example, are often available as solution of the unsaturated polyester in styrene monomer. The volatility of styrene leads to odor problems, furthermore safety requirements (good ventilation, monomer stable gloves and staff clothing, respiratory masks) need to be fulfilled. Therefore, solid or semisolid resin systems were developed recently, reducing substantially the problems of odor and safety requirements.

However due to their lower fluidity at moderate temperatures (60°C-90°C), it is necessary to process and cure particularly the solid UP-resins at higher temperatures. Curing at a temperature above 140°C with conventional radical initiators is however problematic because a substantial amount of the initiator degrades already during the heating-phase, which consequently does not contribute to the initiation process. The degradation leads to a rather bad radical yield and subsequently to heterogeneous duroplastic materials with inferior mechanical properties.

This can also occur with liquid resins if, for instance, molds with high wall thickness are produced. During the curing process, polymerization energy is released and the mold is substantially heated. Consequently, the duroplastic material may become heterogeneous and contain amounts of residual monomers resulting in bad mechanical properties. Compromising by reducing the cure temperature leads to an undesirable increase of the process cycle time.

It is therefore desirable to provide an initiator system which leads to formulations with high storage stability, low volatility and allows curing of unsaturated polymer resins at higher temperatures, such as for example >140°C, without sacrificing the final mechanical properties of the cured polymer.

Surprisingly it has been found that with the instant hydroxylamine esters a remarkably prolonged storage stability can be achieved, even at higher storage temperatures.


The curing process results in more homogeneous hot cure, curing times can become shorter and conversion is in many cases higher than with peroxides, resulting in a lower content of residual monomers.

The cured article has in many cases better mechanical properties as compared to conventionally cured resins.

In addition the hydroxyl amine esters cause substantially less safety issues during transport, storage and use, compared to peroxides.

One aspect of the invention is a process for crosslinking unsaturated polymer resins, which process comprises heating the polymer resin together with a hydroxylamine ester having a


structural element of formula (I) or formula (I') or with a polymeric hydroxylamine ester having a repetitive structural unit of formula (II) or (II')

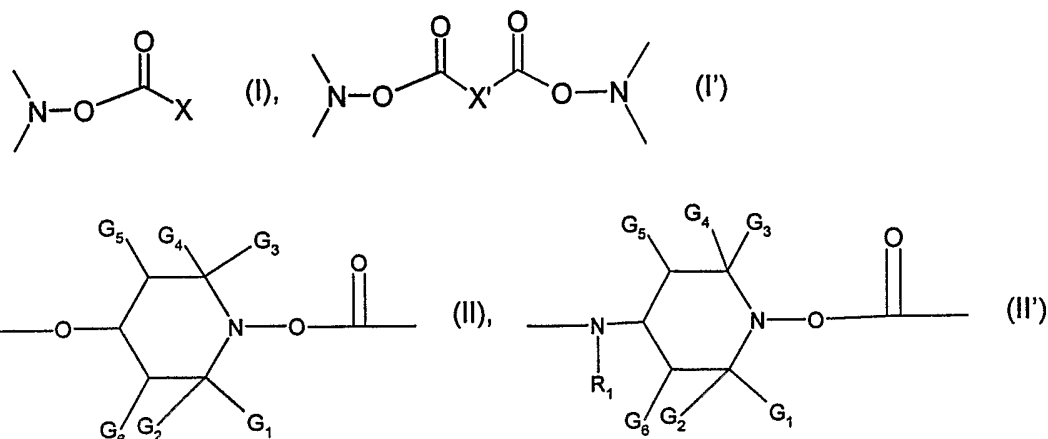

wherein

X is hydrogen, $\text{C}_1\text{-C}_{36}$ alkyl, $\text{C}_2\text{-C}_{36}$ alkenyl, $\text{C}_2\text{-C}_{18}$ alkinyl, $\text{C}_6\text{-C}_{10}$ aryl, $-\text{O}-\text{C}_1\text{-C}_{18}$ alkyl, $-\text{O}-\text{C}_6\text{-C}_{10}$ aryl, $-\text{NH}-\text{C}_1\text{-C}_{18}$ alkyl, $-\text{NH}-\text{C}_6\text{-C}_{10}$ aryl, $-\text{N}(\text{C}_1\text{-C}_6\text{alkyl})_2$;

X' is a direct bond or $\text{C}_1\text{-C}_{36}$ alkylen, $\text{C}_1\text{-C}_{36}$ alkenylen, $\text{C}_1\text{-C}_{36}$ alkinylen, $-(\text{C}_1\text{-C}_6\text{alkylen})$ -phenyl- $(\text{C}_1\text{-C}_6\text{alkylen})$ or a group

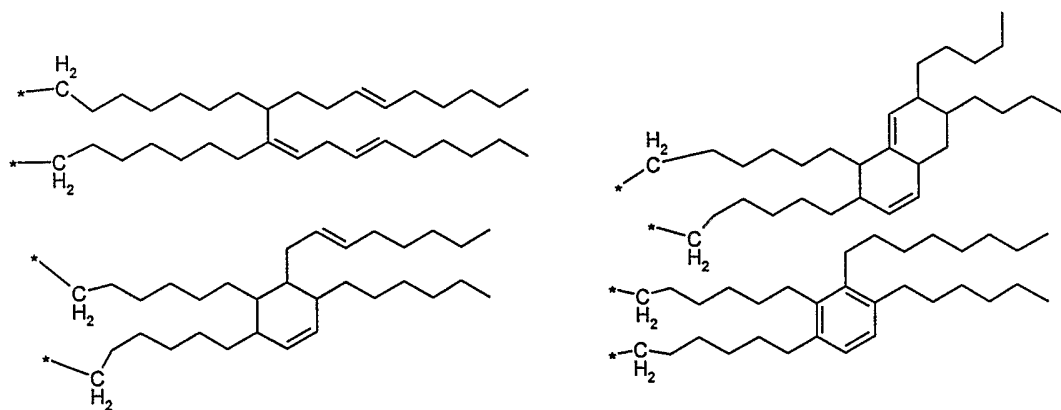

$\text{G}_1, \text{G}_2, \text{G}_3$ and G_4 are independently alkyl of 1 to 4 carbon atoms, or G_1 and G_2 together and G_3 and G_4 together, or G_1 and G_2 together or G_3 and G_4 together are pentamethylene;
 G_5 and G_6 are independently hydrogen or $\text{C}_1\text{-C}_4$ alkyl;
 R_1 is $\text{C}_1\text{-C}_{12}$ alkyl, $\text{C}_5\text{-C}_7$ cycloalkyl, $\text{C}_7\text{-C}_8$ aralkyl, $\text{C}_2\text{-C}_{18}$ alkanoyl, $\text{C}_3\text{-C}_5$ alkenoyl or benzoyl.


* Indicates the bond to the carbonyl group.

Preferably the heating temperature is of from 140° C to 250° C, more preferably of from 150° C to 200° C and most preferably of from 160° C to 200° C, with the proviso that no accelerator is additionally present.

If an accelerator is added, the curing temperature is preferably decreased by 30°C to 50°C and is in general between 100 and 150°C, in particular between 110°C and 135°C.

Unsaturated polymers are pre-polymers containing mostly ethylenically unsaturated groups, for example unsaturated polyesters and pre-polymers based on vinyl esters, acrylates, methacrylates or polyurethanes containing unsaturation in the polymer backbone chain or in a side-chain. Examples of higher molecular weight (oligomeric, polymeric) polyunsaturated compounds are acrylated epoxy resins, acrylated or vinyl-ether- or epoxy-group-containing polyesters, polyurethanes and polyethers. In addition it is also possible to use vinyl ether monomers and oligomers, and also maleate-terminated oligomers having polyester, polyurethane, polyether, polyvinyl ether and epoxide main chains. Combinations of vinyl-ether-group-carrying oligomers and polymers, as described in WO 90/01512, are also suitable, but copolymers of vinyl ether and monomers functionalised with maleic acid also come into consideration.

Particularly suitable prepolymers are vinyl ester polymers, also known under the name of epoxy (meth)acrylates, which are the addition products of polyepoxides and unsaturated carboxylic acids, preferably acrylic acid and methacrylic acid. Suitable polyepoxides are epoxy novolak resins and in particular polyepoxides based on bisphenol A. Other suitable vinyl esters are the esterification products of alkoxyated bisphenol A and (meth)acrylic acid. These resins are commercially available (e.g. Epocryl®, Derakane®, such as Derakane® 411-45 ex Dow Chem).



Another particularly suitable class of prepolymers are the vinyl ester urethane polymers. Vinyl ester urethane polymers, also known under the name urethane (meth)acrylates, are the addition products of a polyvalent isocyanate, a polyvalent alcohol or amine and a hydroxyalkyl (meth)acrylate.

Preferably the unsaturated polymer is an unsaturated polyester resin, which may optionally be dissolved or mixed with a monomer.

Unsaturated polyesters are the condensation products of polyfunctional mostly difunctional carboxylic acids and their for esterification accessible derivatives, especially their esters or anhydrides, and polyfunctional mostly difunctional alcohols. At least one of the starting materials then contains unsaturated bonds.

Examples of suitable di- or polyvalent carboxylic acids are fumaric acid, maleic acid, chloromaleic acid, itaconic acid, citraconic acid, malonic acid, succinic acid, glutaric acid, methylglutaric acid, adipic acid, sebacic acid, 1,4-cyclohexanedicarboxylic acid, phthalic acid, isophthalic acid, terephthalic acid, trimellitic acid, dihydrophthalic acid tetrahydrophthalic acid, hexahydrophthalic acid, tetrachlorophthalic acid, endomethylene tetrahydrophthalic acid (HIMIC), hexachloro endomethylene tetrahydrophthalic acid and /or the corresponding esters or anhydrides.

The unsaturated carboxylic acids to be used are preferably ethylenically unsaturated carboxylic acids, in particular α , β -ethylenically unsaturated carboxylic acids.

It is preferred that the polyester contains fumaric acid, maleic acid and/or terephthalic acid as carboxylic acid units. Also dicyclopentadiene modified resins as described in, for instance, EP-A-0783026 can be used.

When unsaturated di-carboxylic acids are condensed with diols, the unsaturated functionality is in the backbone of the unsaturated polyester. It is however also possible to react monocarboxylic unsaturated acids with remaining hydroxy groups to have the unsaturated functionality in the side chain of the polyester.

Examples of unsaturated carboxylic acids are acrylic acid, methacrylic acid, crotonic acid, itaconic acid, cinnamic acid and unsaturated fatty acids such as linolenic acid or oleic acid. Acrylic and methacrylic acid are preferred.

Suitable polyols are aromatic and especially aliphatic and cycloaliphatic polyols. Examples of aromatic polyols are hydroquinone, 4,4'-dihydroxydiphenyl, 2,2-di(4-hydroxyphenyl)pro-

pane, and novolaks and resols. Examples of polyepoxides are those based on the said polyols, especially the aromatic polyols and epichlorohydrin. Also suitable as polyols are polymers and copolymers that contain hydroxyl groups in the polymer chain or in side groups, e.g. polyvinyl alcohol and copolymers thereof or polymethacrylic acid hydroxyalkyl esters or copolymers thereof. Further suitable polyols are oligoesters having hydroxyl terminal groups.

Examples of aliphatic and cycloaliphatic polyols include alkylene diols having preferably from 2 to 12 carbon atoms, such as ethylene glycol, 1,2- or 1,3-propanediol, 1,2-, 1,3- or 1,4-butanediol, pentanediol, hexanediol, octanediol, dodecanediol, diethylene glycol, triethylene glycol, polyethylene glycols having molecular weights of preferably from 200 to 1500, 1,3-cyclopentanediol, 1,2-, 1,3- or 1,4-cyclohexanediol, 1,4-dihydroxymethylcyclohexane, glycerol, tris(β -hydroxyethyl)amine, trimethylolethane, trimethylolpropane, pentaerythritol, dipentaerythritol and sorbitol.

The polyols may be partially or fully esterified by one or by different unsaturated carboxylic acid(s), it being possible for the free hydroxyl groups in partial esters to have been modified, for example etherified, or esterified by other carboxylic acids.

Examples of esters are:

trimethylolpropane triacrylate, trimethylolethane triacrylate, trimethylolpropane trimethacrylate, trimethylolethane trimethacrylate, tetramethylene glycol dimethacrylate, triethylene glycol dimethacrylate, tetraethylene glycol diacrylate, pentaerythritol diacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, dipentaerythritol diacrylate, dipentaerythritol triacrylate, dipentaerythritol tetraacrylate, dipentaerythritol pentaacrylate, dipentaerythritol hexaacrylate, tripentaerythritol octaacrylate, pentaerythritol dimethacrylate, pentaerythritol trimethacrylate, dipentaerythritol dimethacrylate, dipentaerythritol tetramethacrylate, tripentaerythritol octamethacrylate, pentaerythritol diitaconate, dipentaerythritol trisitaconate, dipentaerythritol pentaitaconate, dipentaerythritol hexaitaconate, ethylene glycol diacrylate, 1,3-butanediol diacrylate, 1,3-butanediol dimethacrylate, 1,4-butanediol diitaconate, sorbitol triacrylate, sorbitol tetraacrylate, pentaerythritol-modified triacrylate, sorbitol tetramethacrylate, sorbitol pentaacrylate, sorbitol hexaacrylate, oligoester acrylates and methacrylates, glycerol di- and tri-acrylate, 1,4-cyclohexane diacrylate, bisacrylates and bismethacrylates of polyethylene glycol having a molecular weight of from 200 to 1500, and mixtures thereof.

The unsaturated polymer resins can contain different unsaturated resins (prepolymers), examples for unsaturated prepolymers have already been given above.

The unsaturated polymer resins preferably contain an additional monomer.

Examples of monomers having a double bond are alkyl and hydroxyalkyl acrylates and methacrylates, e.g. methyl, ethyl, butyl, 2-ethylhexyl and 2-hydroxyethyl acrylate, isobornyl acrylate and methyl and ethyl methacrylate. Also of interest are silicone acrylates. Further examples are acrylonitrile, acrylamide, methacrylamide, N-substituted (meth)acrylamides, vinyl esters, such as vinyl acetate, vinyl ethers, such as isobutyl vinyl ether, styrene, alkyl- and halo-styrenes, N-vinylpyrrolidone, vinyl chloride and vinylidene chloride.

Examples of monomers having several double bonds are ethylene glycol diacrylate, propylene glycol diacrylate, neopentyl glycol diacrylate, hexamethylene glycol diacrylate, bisphenol-A diacrylate, 4,4'-bis(2-acryloyloxyethoxy)diphenylpropane, trimethylolpropane triacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, vinyl acrylate, divinylbenzene, divinyl succinate, diallyl phthalate, triallyl phosphate, triallyl isocyanurate and tris(2-acryloylethyl) isocyanurate.


Preferred monomers are styrene, α -methylstyrene, diallylphthalate, vinyltoluene, 1,3,5-triallyl-2,4,5-trioxo-hexahydro-1,3,5-triazin, methyl(meth)acrylate, 2-hydroxyethyl-(meth)acrylate, 2-ethylhexyl-acrylate, 1,4-butandiol-di(meth)acrylate, polyethylenglycol-di(meth)acrylate, trimethylolpropan-tri(meth)acrylate, polyurethan(meth)acrylate, 3,3,5-trimethylcyclohexyl(meth)acrylate.

Particularly preferred is styrene.

The weight ratio of unsaturated polymers to monomer ranges preferably between 20:80 and 99,9:0,1; more preferably between 50:50 and 95:5 and most preferably between 60:40 and 85:15.


The above mentioned unsaturated polyesters, prepolymers and monomers as well as suitable mixtures thereof are for example described in WO 00/69971 or in DE 19618015. The various components are largely items of commerce.

Preferred is a process, wherein the hydroxylamine ester is of formula (Ia) or (I'a)

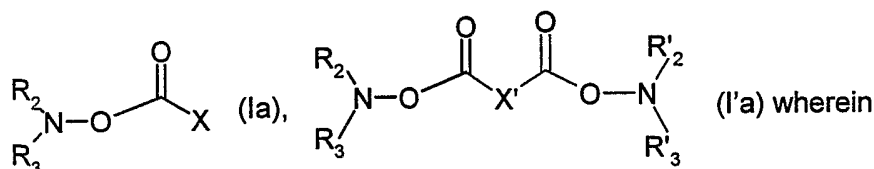

X is hydrogen, C₁-C₃₆alkyl, C₂-C₃₆alkenyl, C₂-C₁₈alkynyl, C₆-C₁₀aryl, -O-C₁-C₁₈alkyl, -O-C₆-C₁₀aryl, -NH-C₁-C₁₈alkyl, -NH-C₆-C₁₀aryl, -N(C₁-C₆alkyl)₂ ;

X' is a direct bond or C₁-C₃₆alkylen, C₁-C₃₆alkenylen, C₁-C₃₆alkynylen, -(C₁-C₆alkylen)-phenyl-(C₁-C₆alkylen) or a group

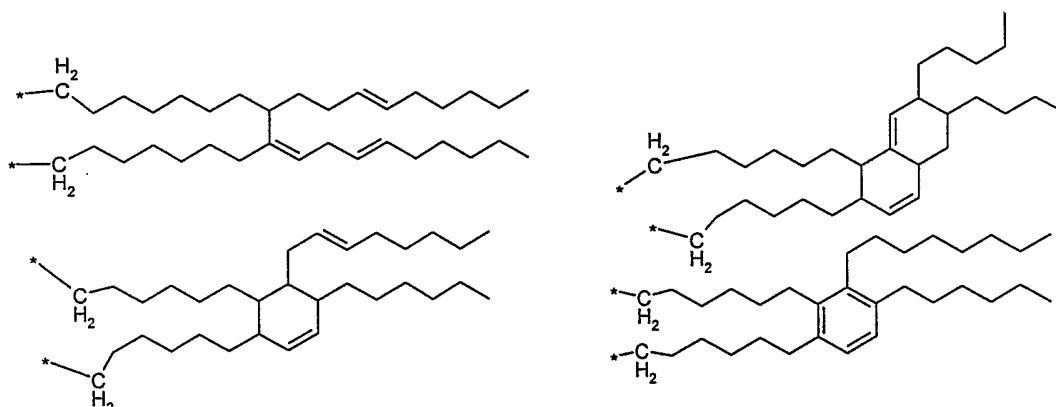





R₂, R₃, R₂' and R₃' are independently unsubstituted C₁-C₁₈alkyl, C₂-C₁₈alkenyl, C₂-C₁₈alkynyl or with halogen, CN, NO₂ or -COOR₄ substituted or with O or NR₄ interrupted C₁-C₁₈alkyl, C₂-C₁₈alkenyl or C₂-C₁₈alkynyl;




R₄ is H, phenyl or C₁-C₁₈alkyl; or




R₂ and R₃ and/or R₂' and R₃' together with the nitrogen atom to which they are bound form a 5 or 6 membered ring which may be interrupted by a nitrogen or oxygen atom and which may be substituted by one or more C₁-C₆alkyl groups, carboxyl groups, C₁-C₁₈alkoxy groups, C₁-C₁₈alkanoyloxy groups.





A 6 membered ring is generally preferred.





More preferred is a process wherein the structural element of formula (I) is of formulae A to S

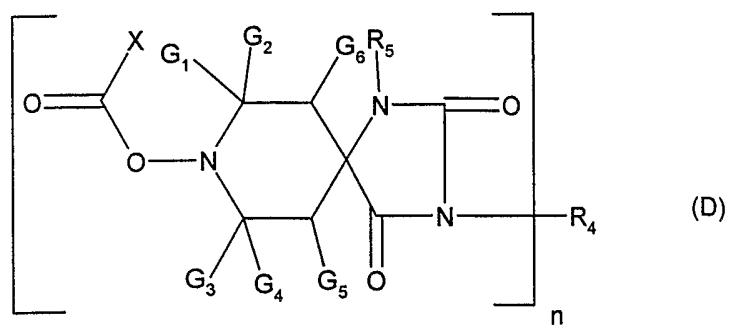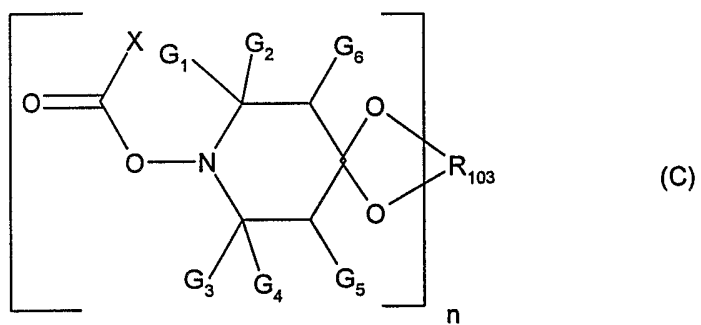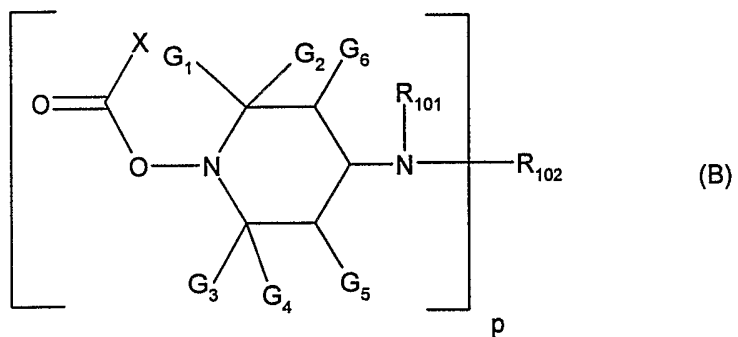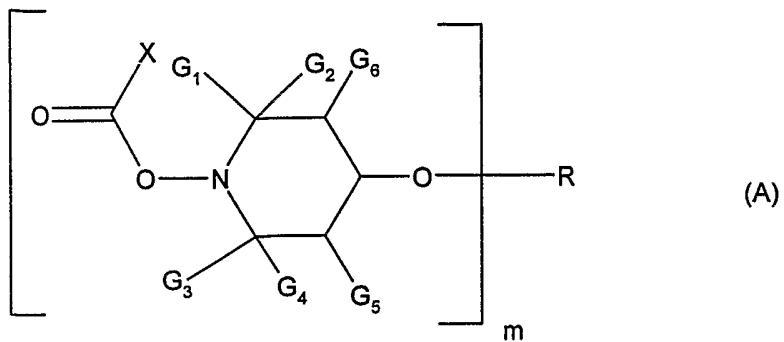

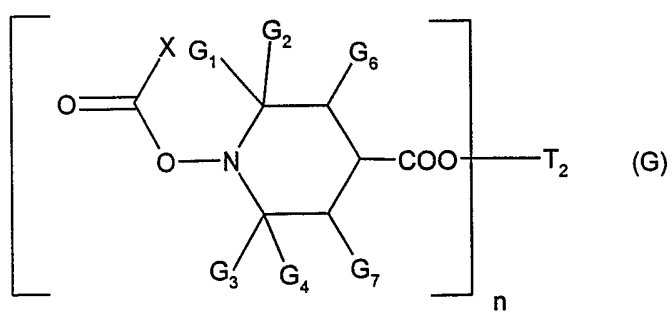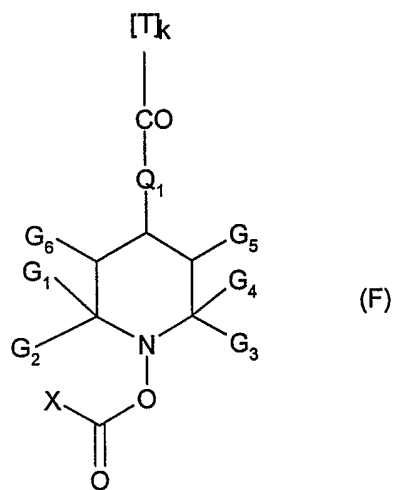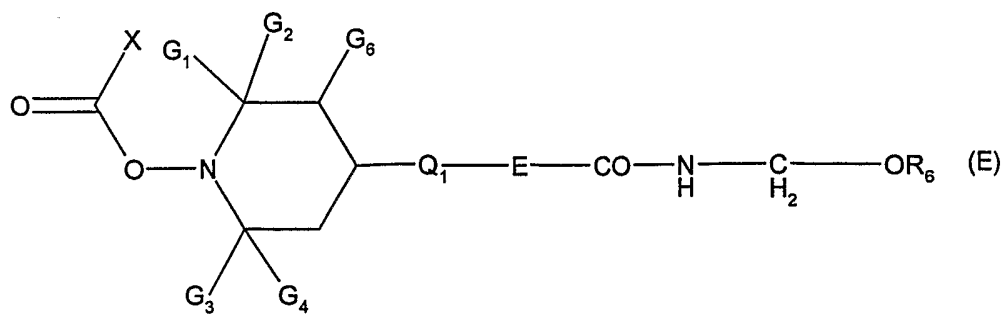

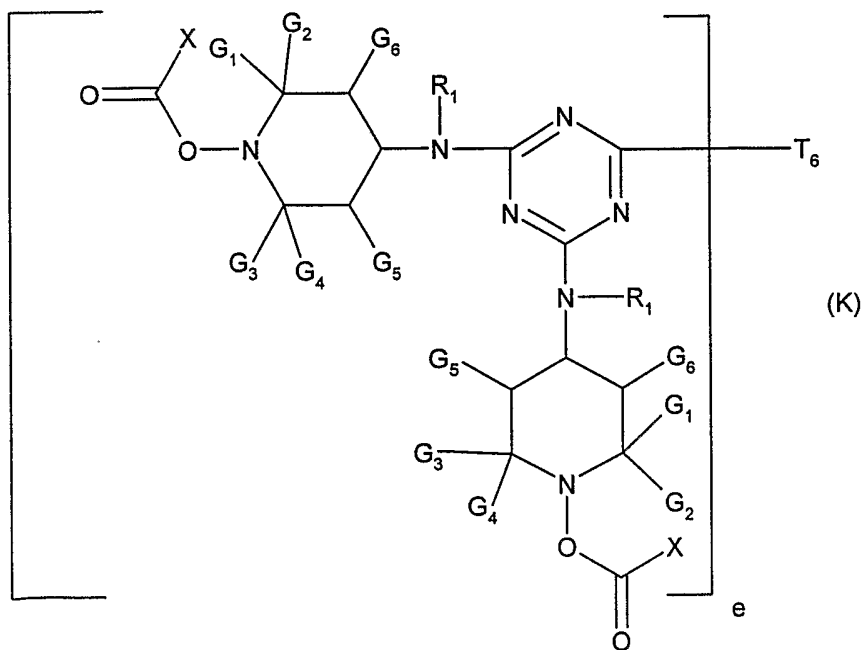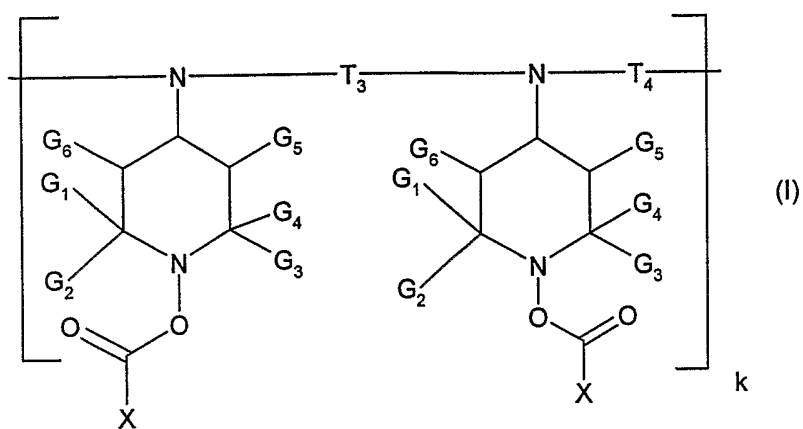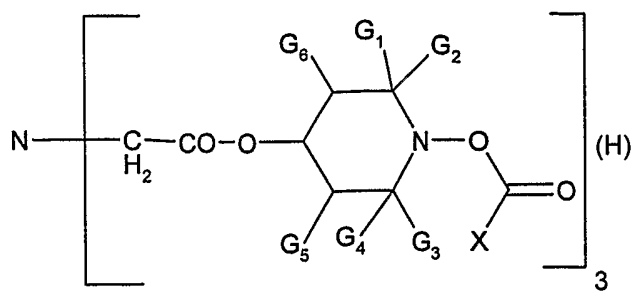

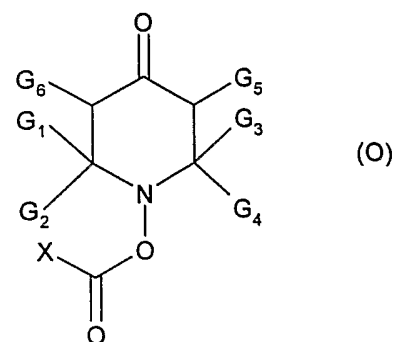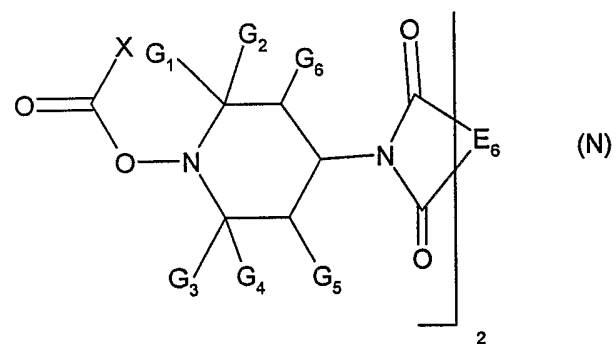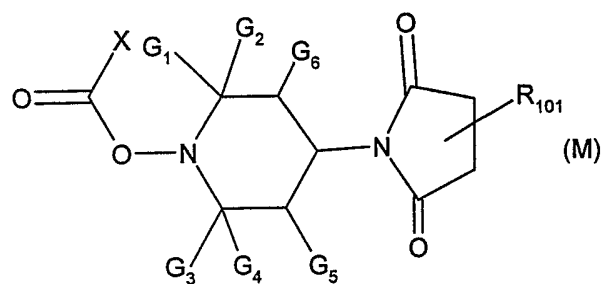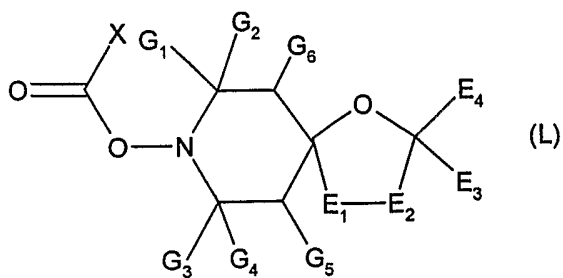

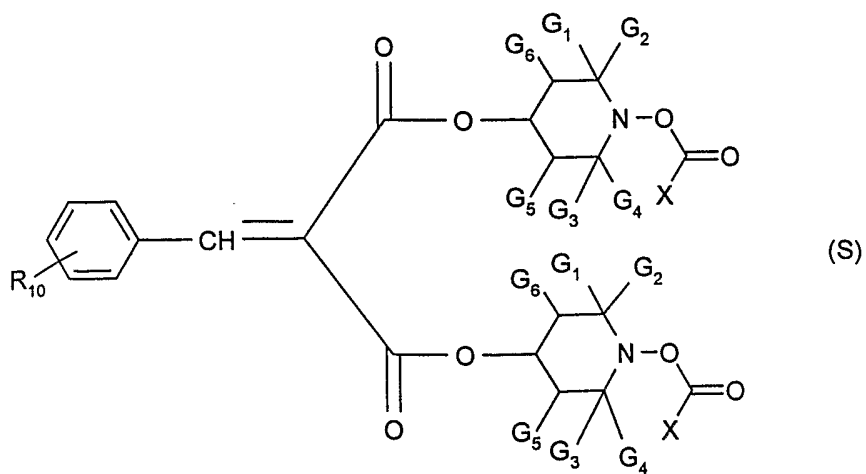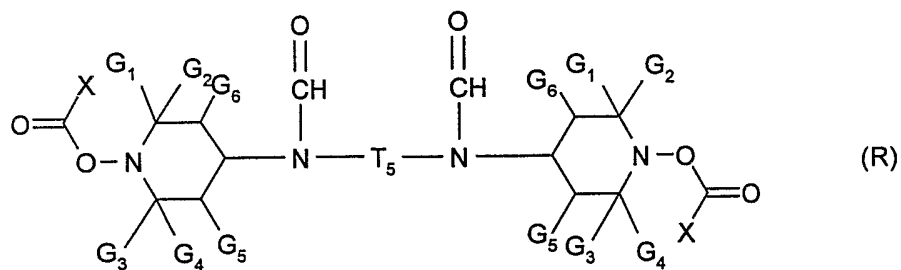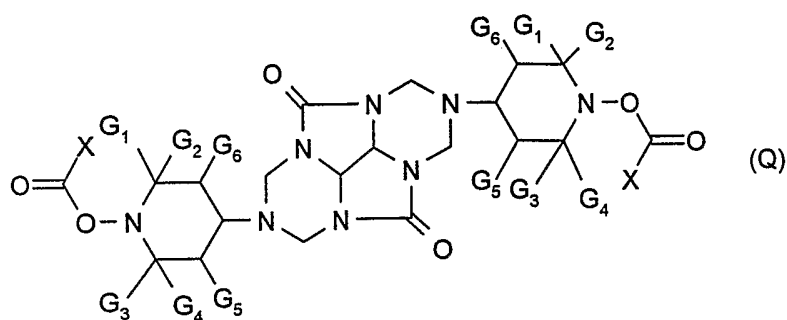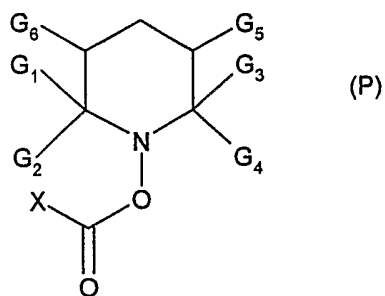

wherein

G_1 , G_2 , G_3 and G_4 are independently alkyl of 1 to 4 carbon atoms, or G_1 and G_2 together and G_3 and G_4 together, or G_1 and G_2 together or G_3 and G_4 together are pentamethylene;

G_5 and G_6 are independently hydrogen or C_1 - C_4 alkyl;

R , if m is 1, is hydrogen, C_1 - C_{18} alkyl which is uninterrupted or C_2 - C_{18} alkyl which is interrupted by one or more oxygen atoms, cyanoethyl, benzoyl, glycidyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms, where each carboxylic acid can be substituted in the aliphatic, cycloaliphatic or aromatic moiety by 1 to 3 $-\text{COOZ}_{12}$ groups, in which Z_{12} is H, C_1 - C_{20} alkyl, C_3 - C_{12} alkenyl, C_5 - C_7 cycloalkyl, phenyl or benzyl; or

R is a monovalent radical of a carbamic acid or phosphorus-containing acid or a monovalent silyl radical;

R , if m is 2, is C_2 - C_{12} alkylene, C_4 - C_{12} alkenylene, xylylene, a divalent radical of an aliphatic dicarboxylic acid having 2 to 36 carbon atoms, or a cycloaliphatic or aromatic dicarboxylic acid having 8-14 carbon atoms or of an aliphatic, cycloaliphatic or aromatic dicarbamic acid having 8-14 carbon atoms, where each dicarboxylic acid may be substituted in the aliphatic, cycloaliphatic or aromatic moiety by one or two $-\text{COOZ}_{12}$ groups; or

R is a divalent radical of a phosphorus-containing acid or a divalent silyl radical;

R , if m is 3, is a trivalent radical of an aliphatic, cycloaliphatic or aromatic tricarboxylic acid, which may be substituted in the aliphatic, cycloaliphatic or aromatic moiety by $-\text{COOZ}_{12}$, of an aromatic tricarbamic acid or of a phosphorus-containing acid, or is a trivalent silyl radical,

R , if m is 4, is a tetravalent radical of an aliphatic, cycloaliphatic or aromatic tetracarboxylic acid;

p is 1, 2 or 3,

R_{101} is C_1 - C_{12} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_8 aralkyl, C_2 - C_{18} alkanoyl, C_3 - C_5 alkenoyl or benzoyl;

when p is 1,


R_{102} is C_1 - C_{18} alkyl, C_5 - C_7 cycloalkyl, C_2 - C_8 alkenyl unsubstituted or substituted by a cyano, carbonyl or carbamide group, or is glycidyl, a group of the formula $-\text{CH}_2\text{CH}(\text{OH})-\text{Z}$ or of the formula $-\text{CO}-\text{Z}-$ or $-\text{CONH}-\text{Z}$ wherein Z is hydrogen, methyl or phenyl; or

when p is 2,

R_{102} is C_2 - C_{12} alkylene, C_6 - C_{12} arylene, xylylene, a $-\text{CH}_2\text{CH}(\text{OH})\text{CH}_2-\text{O}-\text{B}-\text{O}-\text{CH}_2\text{CH}(\text{OH})\text{CH}_2-$ group, wherein B is C_2 - C_{10} alkylene, C_6 - C_{15} arylene or C_6 - C_{12} cycloalkylene; or, provided that R_{101} is not alkanoyl, alkenoyl or benzoyl, R_{102} can also be a divalent acyl radical of an aliphatic, cycloaliphatic or aromatic dicarboxylic acid or dicarbamic acid, or can be the group

-CO-; or R_{101} and R_{102} together when p is 1 can be the cyclic acyl radical of an aliphatic or aromatic 1,2- or 1,3-dicarboxylic acid; or

R_{102} is a group



where T_7 and T_8 are independently hydrogen, alkyl of 1 to 18 carbon atoms, or T_7 and T_8 together are alkylene of 4 to 6 carbon atoms or 3-oxapentamethylene;

when p is 3,

R_{102} is 2,4,6-triazinyl;

when n is 1,

R_{103} is C_2 - C_8 -alkylene or hydroxyalkylene or C_4 - C_{32} acyloxyalkylene; or

when n is 2,

R_{103} is $(-CH_2)_2C(CH_2)_2$;

when n is 1,

R_4 is hydrogen, C_1 - C_{12} alkyl, C_3 - C_5 alkenyl, C_7 - C_9 aralkyl, C_5 - C_7 cycloalkyl, C_2 - C_4 hydroxyalkyl, C_2 - C_6 alkoxyalkyl, C_6 - C_{10} aryl, glycidyl, a group of formula $-(CH_2)_m-COO-Q$ or of the formula $-(CH_2)_m-O-CO-Q$ wherein m is 1 or 2 and Q is C_1 - C_4 alkyl or phenyl; or

when n is 2,


R_4 is C_2 - C_{12} alkylene, C_6 - C_{12} arylene, a group $-CH_2CH(OH)CH_2-O-D-O-CH_2CH(OH)CH_2-$ wherein D is C_2 - C_{10} alkylene, C_6 - C_{15} arylene or C_6 - C_{12} cycloalkylene, or a group $-CH_2CH(OZ_1)CH_2-(OCH_2CH(OZ_1)CH_2)_2-$ wherein Z_1 is hydrogen, C_1 - C_{18} alkyl, allyl, benzyl, C_2 - C_{12} alkanoyl or benzoyl;

R_5 is hydrogen, C_1 - C_{12} alkyl, allyl, benzyl, glycidyl or C_2 - C_6 alkoxyalkyl;


Q_1 is $-N(R_7)-$ or $-O-$;

E is C_1 - C_3 alkylene, the group $-CH_2CH(R_8)-O-$ wherein R_8 is hydrogen, methyl or phenyl, the group $-(CH_2)_3-NH-$ or a direct bond;

R_7 is C_1 - C_{18} alkyl, C_5 - C_7 -cycloalkyl, C_7 - C_{12} aralkyl, cyanoethyl, C_6 - C_{10} -aryl, the group $-CH_2CH(R_8)-OH$; or a group of the formula

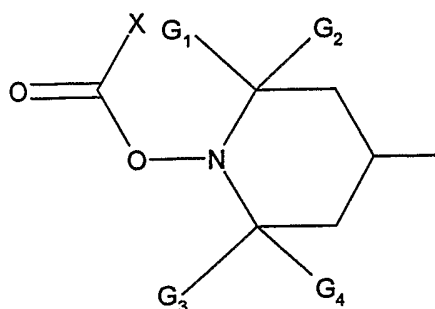

or a group of the formula

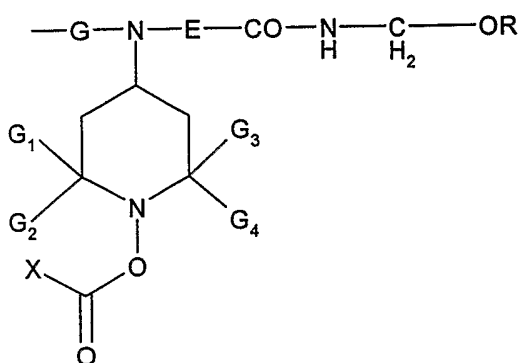

wherein G is C₂-C₆alkylene or C₆-C₁₂arylene and R is as defined above; or

R₇ is a group -E-CO-NH-CH₂-OR₆;

R₆ is hydrogen or C₁-C₁₈alkyl;


Formula (F) denotes a recurring structural unit of a oligomer where T is ethylene or 1,2-propylene, or is a repeating structural unit derived from an α -olefin copolymer with an alkyl acrylate or methacrylate;

k is 2 to 100;


R₁₀ is hydrogen, C₁-C₁₂alkyl or C₁-C₁₂alkoxy;

T₂ has the same meaning as R₄;

T₃ and T₄ are independently alkylene of 2 to 12 carbon atoms, or T₄ is a group



T₅ is C₂-C₂₂alkylene, C₅-C₇cycloalkylene, C₁-C₄alkylenedi(C₅-C₇cycloalkylene), phenylene or phenylenedi(C₁-C₄alkylene);



where a, b and c are independently 2 or 3, and d is 0 or 1;

e is 3 or 4;

T₇ and T₈ are independently hydrogen C₁-C₁₈alkyl, or T₇ and T₈ together are C₄-C₆alkylene or 3-oxapenthamethylene;

E₁ and E₂, being different, each are -CO- or -N(E₅)-, where E₅ is hydrogen, C₁-C₁₂alkyl or C₄-C₂₂alkoxycarbonylalkyl;

E₃ is hydrogen, alkyl of 1 to 30 carbon atoms, phenyl, naphthyl, said phenyl or said naphthyl substituted by chlorine or by alkyl of 1 to 4 carbon atoms, or phenylalkyl of 7 to 12 carbon atoms, or said phenylalkyl substituted by alkyl of 1 to 4 carbon atoms;

E₄ is hydrogen, alkyl of 1 to 30 carbon atoms, phenyl, naphthyl or phenylalkyl of 7 to 12 carbon atoms; or

E₃ and E₄ together are polymethylene of 4 to 17 carbon atoms, or said polymethylene substituted by up to four alkyl groups of 1 to 4 carbon atoms; and

E₆ is an aliphatic or aromatic tetravalent radical.

C₃-C₁₂alkenyl is for example propenyl, butenyl, pentenyl, hexenyl, heptenyl, octenyl, dodecenyl including their isomers.


C₇-C₉aralkyl is for example benzyl, phenylpropyl, α,α-dimethylbenzyl or α-methylbenzyl.

C₂-C₁₈alkyl interrupted by at least one O atom is for example -CH₂-CH₂-O-CH₂-CH₃, -CH₂-CH₂-O-CH₃ or -CH₂-CH₂-O-CH₂-CH₂-CH₂-O-CH₂-CH₃. It is preferably derived from polyethylene glycol. A general description is -((CH₂)_a-O)_b-H/CH₃, wherein a is a number from 1 to 6 and b is a number from 2 to 10.

If R is a monovalent radical of a carboxylic acid, it is, for example, an acetyl, caproyl, stearoyl, acryloyl, methacryloyl, benzoyl or β-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyl radical.

If R is a monovalent silyl radical, it is, for example, a radical of the formula -(C_jH_{2j})-Si(Z')₂Z'', in which j is an integer in the range from 2 to 5, and Z' and Z'', independently of one another, are C₁-C₄alkyl or C₁-C₄alkoxy.

If R is a divalent radical of a dicarboxylic acid, it is, for example, a malonyl, succinyl, glutaryl, adipoyl, suberoyl, sebacoyl, maleoyl, itaconyl, phthaloyl, dibutylmalonyl, dibenzylmalonyl, butyl(3,5-di-tert-butyl-4-hydroxybenzyl)malonyl or bicycloheptenedicarboxyl radical or a group of the formula

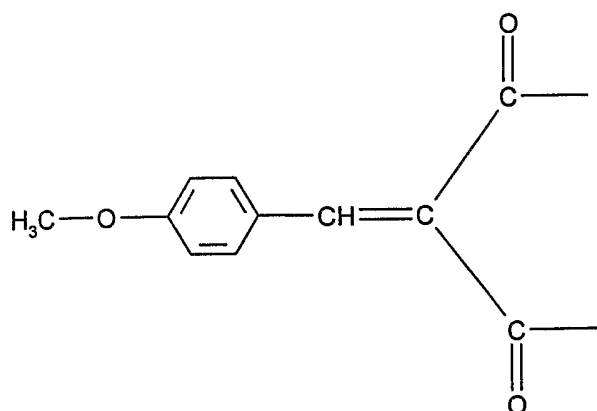

If R is a trivalent radical of a tricarboxylic acid, it is, for example, a trimellitoyl, citryl or nitrilotriacetyl radical.

If R is a tetravalent radical of a tetracarboxylic acid, it is, for example, the tetravalent radical of butane-1,2,3,4-tetracarboxylic acid or of pyromellitic acid.

If R is a divalent radical of a dicarbamic acid, it is, for example, hexamethylenedicarbamoyl or 2,4-toluylenedicarbamoyl radical.

C₁-C₁₈alkanoyl is for example, formyl, propionyl, butyryl, octanoyl, dodecanoyl but preferably acetyl and C₃-C₅alkenoyl is in particular acryloyl.

Any C₂-C₁₂alkylene radicals are, for example, ethylene, propylene, 2,2-dimethylpropylene, tetramethylene, hexamethylene, octamethylene, decamethylene or dodecamethylene.

Any C₆-C₁₅arylene substituents are, for example, o-, m- or p-phenylene, 1,4-naphthylene or 4,4'-diphenylene.

C₆-C₁₂cycloalkylene is, in particular, cyclohexylene.




Hydroxyl-, cyano-, alkoxycarbonyl- or carbamide-substituted C₁-C₄alkyl can be, for example, 2-hydroxyethyl, 2-hydroxypropyl, 2-cyanoethyl, methoxycarbonylmethyl, 2-ethoxycarbonylethyl, 2-aminocarbonylpropyl or 2-(dimethylaminocarbonyl)ethyl.

Any C₂-C₆alkoxyalkyl substituents are, for example, methoxymethyl, ethoxymethyl, propoxymethyl, tert-butoxymethyl, ethoxyethyl, ethoxypropyl, n-butoxyethyl, tert-butoxyethyl, isopropoxyethyl or propoxypropyl.

Suitable C₂-C₃₂acyloxyalkylene radicals are for example shown in formulae 143, 144, 145, 146 and 159 of Table A.

A preferred subgroup of hydroxylamine esters is of formula A, B or C and the substituents are as defined above.

From this subgroup particularly preferred hydroxylamine esters are of formula A, B or C

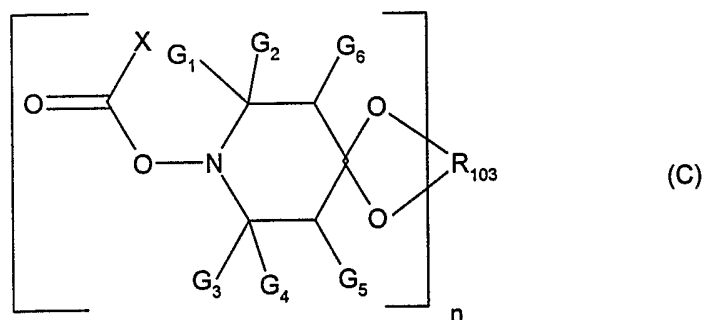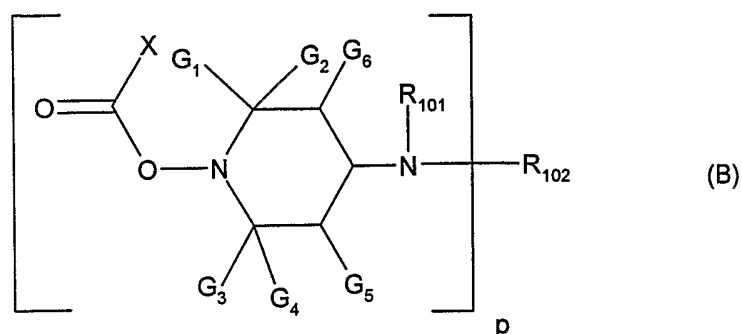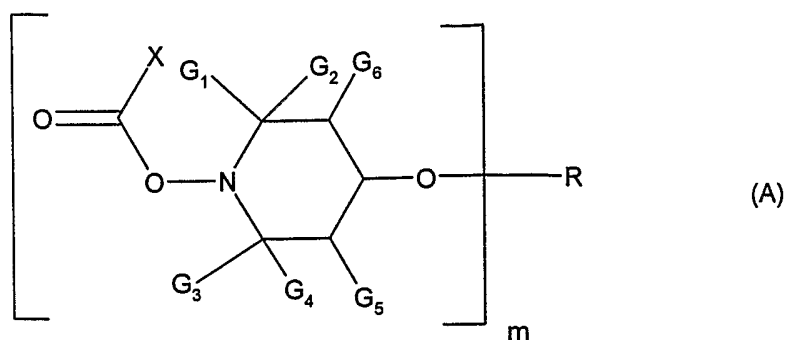

wherein

G_1 , G_2 , G_3 and G_4 are methyl or G_1 and G_3 are methyl and G_2 and G_4 are ethyl or G_1 and G_2 are methyl and G_3 and G_4 are ethyl;

G_5 and G_6 are independently hydrogen or methyl;

m is 1;

R is hydrogen, C_1 - C_{18} alkyl which is uninterrupted or C_2 - C_{18} alkyl which is interrupted by one or more oxygen atoms, cyanoethyl, benzoyl, glycidyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to

15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms, where each carboxylic acid can be substituted in the aliphatic, cycloaliphatic or aromatic moiety by 1 to 3 $-\text{COOZ}_{12}$ groups, in which Z_{12} is H, $\text{C}_1\text{-C}_{20}$ alkyl, $\text{C}_3\text{-C}_{12}$ alkenyl, $\text{C}_5\text{-C}_7$ cycloalkyl, phenyl or benzyl; or R is a monovalent radical of a carbamic acid or phosphorus-containing acid or a monovalent silyl radical;

p is 1;

R_{101} is $\text{C}_1\text{-C}_{12}$ alkyl, $\text{C}_5\text{-C}_7$ cycloalkyl, $\text{C}_7\text{-C}_8$ aralkyl, $\text{C}_2\text{-C}_{18}$ alkanoyl, $\text{C}_3\text{-C}_5$ alkenoyl or benzoyl;

R_{102} is $\text{C}_1\text{-C}_{18}$ alkyl, $\text{C}_5\text{-C}_7$ cycloalkyl, $\text{C}_2\text{-C}_8$ alkenyl unsubstituted or substituted by a cyano, carbonyl or carbamide group, or is glycidyl, a group of the formula $-\text{CH}_2\text{CH}(\text{OH})\text{-Z}$ or of the formula $-\text{CO}\text{-Z}$ - or $-\text{CONH}\text{-Z}$ wherein Z is hydrogen, methyl or phenyl;

n is 1,

R_{103} is $\text{C}_2\text{-C}_8$ alkylene or hydroxyalkylene or $\text{C}_4\text{-C}_{32}$ acyloxyalkylene.

and

X is hydrogen, $\text{C}_1\text{-C}_{36}$ alkyl or $\text{C}_6\text{-C}_{10}$ aryl.

Most preferably the hydroxylamine ester is of formula A or C;

G_1 , G_2 , G_3 and G_4 are methyl or G_1 and G_3 are methyl and G_2 and G_4 are ethyl;

G_5 and G_6 are independently hydrogen or methyl;

m is 1;

R is hydrogen, $\text{C}_1\text{-C}_{18}$ alkyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms; and

R_{103} is $\text{C}_2\text{-C}_8$ alkylene or hydroxyalkylene or $\text{C}_4\text{-C}_{32}$ acyloxyalkylene

In another preferred embodiment of the inventive process the hydroxylamineester is a oligomer or polymer obtainable by reacting a dicarboxylic acid or a dicarboxylic acid derivative with a compound of formula A1 or B1 or by reacting a diisocyanate with a compound of formula A1

methyladipic acid, sebacic acid, azelaic acid and dimeric acids (dimerisation products of unsaturated aliphatic carboxylic acids such as oleic acid), alkylated malonic and succinic acids such as octadecylsuccinic acid.

Suitable cycloaliphatic dicarboxylic acids are: 1,3-cyclobutanedicarboxylic acid, 1,3-cyclopentanedicarboxylic acid, 1,3- and 1,4-cyclohexanedicarboxylic acid, 1,3- and 1,4-(dicarboxylmethyl)cyclohexane, 4,4'-dicyclohexyldicarboxylic acid.

Suitable aromatic dicarboxylic acids are: In particular terephthalic acid, isophthalic acid, o-phthalic acid, and 1,3-, 1,4-, 2,6- or 2,7-naphthalenedicarboxylic acid, 4,4'-diphenyldicarboxylic acid, 4,4'-diphenylsulfonedicarboxylic acid, 4,4'-benzophenonedicarboxylic acid, 1,1,3-trimethyl-5-carboxyl-3-(p-carboxylphenyl)indane, 4,4'-diphenyl ether dicarboxylic acid, bis-p-(carboxylphenyl)methane or bis-p-(carboxylphenyl)ethane.

The aromatic dicarboxylic acids are preferred, in particular terephthalic acid, isophthalic acid and 2,6-naphthalenedicarboxylic acid.

Other suitable dicarboxylic acids are those containing -CO-NH-groups; they are described in DE-A2414349. Dicarboxylic acids containing N-heterocyclic rings are also suitable, for example those which are derived from carboxylalkylated, carboxylphenylated or carboxylbenzylated monoamine-s-triazinedicarboxylic acids (viz. DE-A-2121184 and 2533675), mono- or bishydantoins, optionally halogenated benzimidazoles or parabanic acid. The carboxylalkyl group can in this case contain 3 to 20 carbon atoms.


Suitable aliphatic diols are the linear and branched aliphatic glycols, in particular those containing 2 to 12, preferably 2 to 6, carbon atoms in the molecule, for example: ethylene glycol, 1,2- and 1,3-propylene glycol, 1,2-, 1,3-, 2,3- or 1,4-butanediol, pentyl glycol, neopentyl glycol, 1,6-hexanediol, 1,12-dodecanediol. A suitable cycloaliphatic diol is e.g. 1,4-dihydroxycyclohexane. Other suitable aliphatic diols are e.g. 1,4-bis(hydroxymethyl)cyclohexane, aromatic-aliphatic diols such as p-xylylene glycol or 2,5-dichloro-p-xylylene glycol, 2,2-(\square -hydroxyethoxyphenyl)propane and also polyoxyalkylene glycols such as diethylene glycol, triethylene glycol, polyethylene glycol or polypropylene glycol. The alkylene diols are preferably linear and preferably contain 2 to 4 carbon atoms.





Preferred diols are the alkylenediols, 1,4-dihydroxycyclohexane and 1,4-bis(hydroxymethyl)cyclohexane. Particularly preferred are ethylene glycol, 1,4-butanediol and 1,2- and 1,3-propylene glycol.

Other suitable aliphatic diols are the β -hydroxyalkylated, in particular β -hydroxyethylated, bisphenols such as 2,2-bis[4'-(β -hydroxyethoxy)phenyl]propane. Other bisphenols will be mentioned later.

Another group of suitable aliphatic diols are the heterocyclic diols described in DE-A-1812003, DE-A-2342432, DE-A-2342372 and DE-A-2453326, for example: N,N'-bis(β -hydroxyethyl)-5,5-dimethylhydantoin, N,N'-bis(β -hydroxypropyl)-5,5-dimethylhydantoin, methylenebis[N-(β -hydroxyethyl)-5-methyl-5-ethylhydantoin], methylenebis[N-(β -hydroxyethyl)-5,5-dimethylhydantoin], N,N'-bis(β -hydroxyethyl)benzimidazolone, N,N'-bis(β -hydroxyethyl)-(tetrachloro)benzimidazolone or N,N'-bis(β -hydroxyethyl)-(tetrabromo)benzimidazolone.

Suitable aromatic diols are mononuclear diphenols and, in particular dinuclear diphenols carrying a hydroxyl group at each aromatic nucleus. Aromatic will be taken to mean preferably hydrocarbonaromatic radicals, such as phenylene or naphthylene. Besides e.g. hydroquinone, resorcinol or 1,5-, 2,6- and 2,7-dihydroxynaphthalene, the bisphenols are to be mentioned in particular, which can be represented by the following formulae:

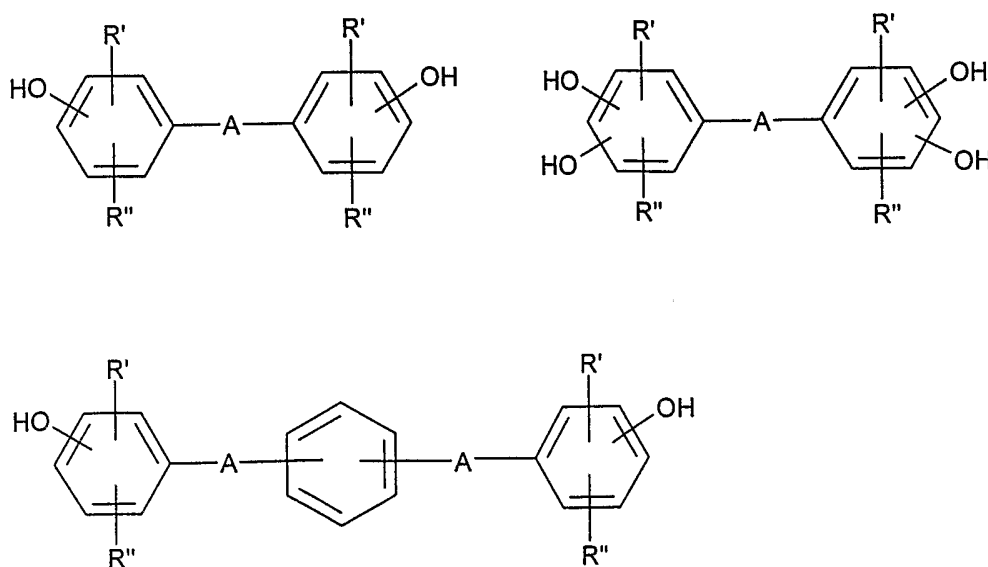

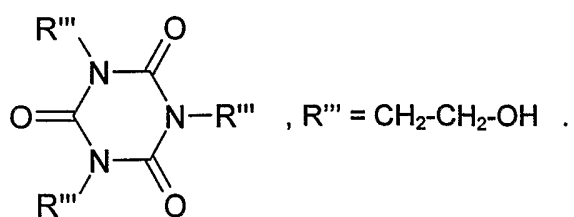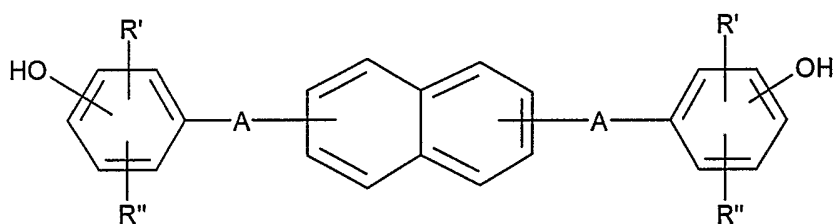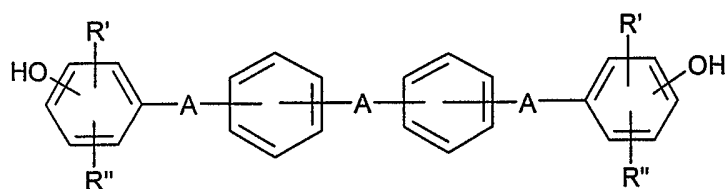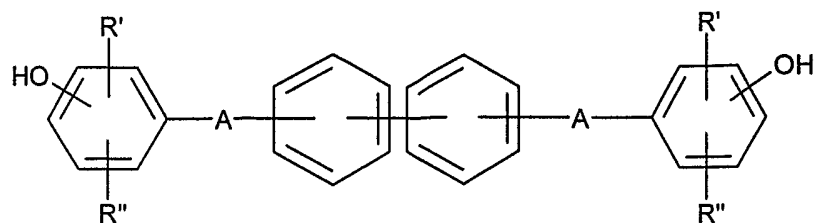

The hydroxyl groups can be in m-position, preferably in p-position, and R' and R'' in these formulae can be alkyl containing 1 to 6 carbon atoms, halogen, such as chloro or bromo, and, in particular, hydrogen atoms. A may be a direct bond or -O-, -S-, -(O)S(O)-, -C(O)-, -P(O)(C₁-C₂₀alkyl)-, unsubstituted or substituted alkylidene, cycloalkylidene or alkylene.

Examples of unsubstituted or substituted alkylidene are: ethylidene, 1,1- or 2,2-propylidene, 2,2-butylidene, 1,1-isobutylidene, pentylidene, hexylidene, heptylidene, octylidene, dichloroethylidene, trichloroethylidene.



Examples of unsubstituted or substituted alkylene are methylene, ethylene, phenylmethylene, diphenylmethylene, methylphenylmethylene. Examples of cycloalkylidene are cyclopentylidene, cyclohexylidene, cycloheptylidene and cyclooctylidene.













Examples of bisphenols are: bis(p-hydroxyphenyl) ether or bis(p-hydroxyphenyl) thioether, bis(p-hydroxyphenyl)sulfone, bis(p-hydroxyphenyl)methane, bis(4-hydroxyphenyl)-2,2'-biphenyl, phenylhydroquinone, 1,2-bis(p-hydroxyphenyl)ethane, 1-phenylbis(p-hydroxyphenyl)ethane, diphenylbis(p-hydroxyphenyl)methane, diphenylbis(p-hydroxyphenyl)ethane, bis(3,5-dimethyl-4-hydroxyphenyl)sulfone, bis(3,5-dimethyl-4-hydroxyphenyl)-p-diisopropylbenzene, bis(3,5-dimethyl-4-hydroxyphenyl)-m-diisopropylbenzene, 2,2-bis(3',5'-dimethyl-4'-hydroxyphenyl)propane, 1,1- or 2,2-bis(p-hydroxyphenyl)butane, 2,2-bis(p-hydroxyphenyl)hexafluoropropane, 1,1-dichloro- or 1,1,1-trichloro-2,2-bis(p-hydroxyphenyl)ethane, 1,1-bis(p-hydroxyphenyl)cyclopentane and, in particular, 2,2-bis(p-hydroxyphenyl)propane (bisphenol A) and 1,1-bis(p-hydroxyphenyl)cyclohexane (bisphenol C).










Suitable polyesters of hydroxycarboxylic acids are, for example, polycaprolactone, polypivalolactone or the polyesters of 4-hydroxycyclohexancarboxylic acid, 2-hydroxy-6-naphthalene carboxylic acid or 4-hydroxybenzoic acid.











Specific useful single compounds are summarized in Table A.











Table A








No.	Formula	No.	Formula
<u>101</u>		<u>102</u>	

No.	Formula	No.	Formula
103		104	
105		106	
107		108	
109		110	
111		112	
113		114	

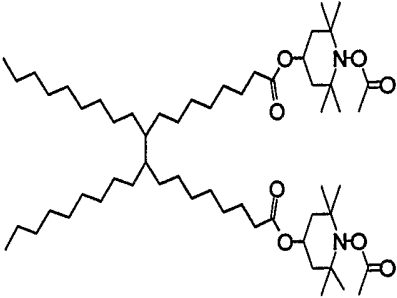No.	Formula	No.	Formula
115			
119		120	
121		122	
123		124	
125		126	

No.	Formula	No.	Formula
<u>127</u>		<u>128</u>	
<u>129</u>		<u>130</u>	
<u>131</u>		<u>132</u>	
<u>133</u>		<u>134</u>	
<u>139</u>		<u>140</u>	

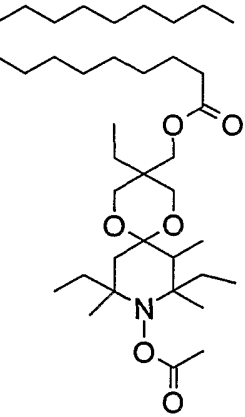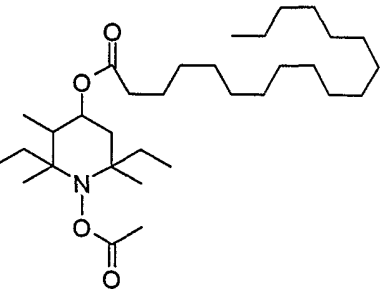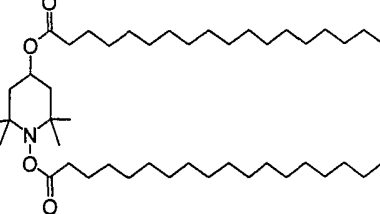No.	Formula	No.	Formula
141		142	
143		144	
145		146	
149		150	
151		152	

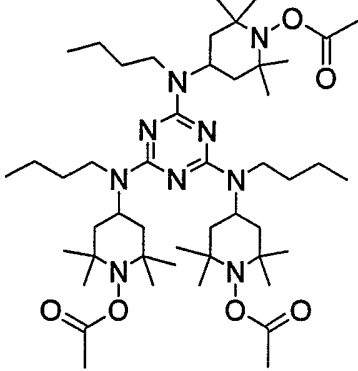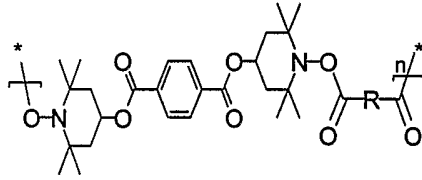No.	Formula	No.	Formula
153		154	
155		156	
157		158	
159			

Most preferred are compounds 106, 120, 146 and 159.

The preparation of the instant hydroxylamine precursors are for example disclosed in following US patents: No. 4,590,231, 5,300,647, 4,831,134, 5,204,473, 5,004,770,

5,096,950, 5,021,478, 5,118,736, 5,021,480, 5,015,683, 5,021,481, 5,019,613, 5,021,486, 5,021,483, 5,145,893, 5,286,865, 5,359,069, 4,983,737, 5,047,489, 5,077,340, 5,021,577, 5,189,086, 5,015,682, 5,015,678, 5,051,511, 5,140,081, 5,204,422, 5,026,750, 5,185,448, 5,180,829, 5,262,538, 5,371,125, 5,216,156, 5,300,544.

The hydroxylamines are reacted with a suitable acid derivative to form the final hydroxylamine ester. Such esterification processes are known and described in the chemical literature.

The preparation of particularly suitable compounds is described in WO 01/90113.

Preferably the hydroxylamine ester is present in an amount of from 0.01 to 10 weight-%, more preferably between 0.1 to 6 weight-% based on the weight of the unsaturated polymer(s) and monomer(s).

Besides the hydroxylamine ester conventional thermal radical initiators may also be present.

The thermal radical initiator is preferably a bis-azo compound, a peroxide, perester or a hydroperoxide.

Specific preferred radical sources are 2,2'-azobisisobutyronitrile, 2,2'-azobis(2-methylbutyronitrile), 2,2'-azobis(2,4-dimethylvaleronitrile), 2,2'-azobis(4-methoxy-2,4-dimethylvaleronitrile), 1,1'-azobis(1-cyclohexanecarbonitrile), 2,2'-azobis(isobutyramide) dihydrate, 2-phenylazo-2,4-dimethyl-4-methoxyvaleronitrile, dimethyl-2,2'-azobisisobutyrate, 2-(carbamoylazo)isobutyronitrile, 2,2'-azobis(2,4,4-trimethylpentane), 2,2'-azobis(2-methylpropane), 2,2'-azobis(N,N'-dimethyleneisobutyramidine), free base or hydrochloride, 2,2'-azobis(2-amidinopropane), free base or hydrochloride, 2,2'-azobis{2-methyl-N-[1,1-bis(hydroxymethyl)ethyl]propionamide} or 2,2'-azobis{2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl]propionamide}; acetyl cyclohexane sulphonyl peroxide, diisopropyl peroxy dicarbonate, t-amyl perneodecanoate, t-butyl perneodecanoate, t-butyl perpivalate, t-amylperpivalate, bis(2,4-dichlorobenzoyl)peroxide, diisononoyl peroxide, didecanoyl peroxide, dioctanoyl peroxide, dilauroyl peroxide, bis(2-methylbenzoyl) peroxide, disuccinic acid peroxide, diacetyl peroxide, dibenzoyl peroxide, t-butyl per 2-ethylhexanoate, bis-(4-chlorobenzoyl)-peroxide, t-butyl perisobutyrate, t-butyl permaleinate, 1,1-bis(t-

butylperoxy)3,5,5-trimethylcyclohexane, 1,1-bis(t-butylperoxy)cyclohexane, t-butyl peroxy isopropyl carbonate, t-butyl perisononaoate, 2,5-dimethylhexane 2,5-dibenzoate, t-butyl peracetate, t-amyl perbenzoate, t-butyl perbenzoate, 2,2-bis (t-butylperoxy) butane, 2,2 bis (t-butylperoxy) propane, dicumyl peroxide, 2,5-dimethylhexane-2,5-di-t-butylperoxide, 3-t-butylperoxy 3-phenylphthalide, di-t-amyl peroxide, α , α' -bis(t-butylperoxy isopropyl) benzene, 3,5-bis (t-butylperoxy)3,5-dimethyl 1,2-dioxolane, di-t-butyl peroxide, 2,5-dimethylhexyne-2,5-di-t-butylperoxide, 3,3,6,6,9,9-hexamethyl 1,2,4,5-tetraoxa cyclononane, p-menthane hydroperoxide, pinane hydroperoxide, diisopropylbenzene mono- α -hydroperoxide, cumene hydroperoxide or t-butyl hydroperoxide.

If a thermal radical initiator is present it is preferably added in an amount of 0.01 to 2% by weight, based on the weight of the unsaturated compound or compounds.

The ratio between hydroxylamine ester and thermal radical initiator is preferably from 20:1 to 1:10.

The combination of thermal radical initiator with hydroxylamine ester is particularly advantageous in processes where post curing is performed. While it is desirable to avoid post-cure for economic reasons, such treatments are often necessary since the strength and stiffness of the molded parts may be only 50% of those of a completely cross-linked structure. It is well known that driving the cross-linking reaction to completion by post-curing will increase the duroplastic properties via an increase in strength and modulus of the matrix. The additional use of hydroxylamines contributes to this post-curing by their effective delivery of radicals at higher temperature, compared to the conventional thermal radical initiators, which are mostly consumed already in the first curing step.

It is also possible to carry out the process by adding additionally an accelerator. Accelerators are known from conventional curing with peroxides. They are also useful together with hydroxylamines of the instant invention. Examples have already been mentioned.

A further preferred embodiment is a process wherein the thermal treatment comprises a first curing step and a second post curing step.

The unsaturated polymer resin/monomer compositions can be used without any filler or reinforcement. However, often these unsaturated polymer resin/monomer compositions contain additives for reinforcement and fillers such as for example chalk, glass fibers, quartz, kaolin, talc, aluminum oxide hydrate, MgO, Mg(OH)₂, CaO, Ca(OH)₂, BaO, Li₂O, LiOH, Mg- and Al-alcoholate, Al-ethylhexanoate, Al-benzoate, natural fibers, such as wood or cotton fibers.

Preferred are quartz or glass fiber reinforced unsaturated polyester formulations.

Moreover, between 3 and 80%, preferably between 3 and 25% (based on the unsaturated polymer resin) of thermoplastic compounds (e.g. polyethylene, polystyrene, PMMA, polyvinyl acetate, conventional polyesters and polyester urethanes) can be added mostly to reduce the shrinkage during cross-linkage.

Additionally, the unsaturated polymer resin/monomer composition may contain other additives, for example

- processing stabilizers and antioxidants
- inhibitors for pot life extension (hydroquinone, p-Benzochinone, breznkatechine, tert.butyl-hydrochinon, 4-tert.butyl-brenzkatechine, 3,5-di-tert.butyl-brenzkatechine, 2,5-di-tert.butyl-hydrochinone, chloranile, hydrochinone monomethylester),
- anti shrink additives (e.g. polystyrene and its copolymers (e.g.SAN-copolymer), PMMA, PVAc, thermoplastic polyurethanes),
- defoaming agents and wetting agents
- UV-absorbers
- plasticisers (e.g. phthalates, polysulfides),
- coupling agents (e.g. silanes like methacryloxypropyltrimethoxysilane, vinyl-trimethylsilane, dimethylaminopropyl-trimethoxysilane),
- lubricants (e.g. fine dispersed polyethylene powder, metal salts of stearic acid as Zn-stearate or Ca-stearate; stearic alcohol),
- emulsifiers,
- pigments,
- rheology additives,
- flow-control agents (e.g. MgO, synthetic silicic acid),
- optical brighteners,

- flameproofing agents (chloro paraffine, antimony trioxide, brominated compound, phosphorous containing compounds, aluminium trihydroxide trihydrate) and
- antistatic agents.

Further additives such as stable free nitroxyl radicals may also be present. Suitable nitroxyl radicals are for example described in WO 01/42313 or WO 99/67298. These stable free nitroxyl radicals may improve the storage stability of the unsaturated polyester formulation but they may also moderate the crosslinking reaction initiated by the hydroxylamine ester.

Preferably the stable free nitroxyl radical is present in an amount of from 0.001% to 10% by weight based on the weight of the unsaturated polymer(s) and monomer.

These stable sterically hindered nitroxyl free-radicals and their preparation are for example described in EP-A-581 737.

The molar ratio between stable free nitroxyl radical and hydroxylamine ester is preferably 1 : 100 to 2 : 1, more preferably from 1 : 10 to 1 : 1.

Typical nitroxyl free-radicals are, for example:

bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) sebacate, 4-hydroxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-ethoxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-propoxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-acetamido-1-oxy-2,2,6,6-tetramethylpiperidine, 1-oxy-2,2,6,6-tetramethylpiperidine, 1-oxy-2,2,6,6-tetramethylpiperidin-4-one, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl acetate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl 2-ethylhexanoate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl stearate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl laureate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl benzoate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl oleate, 1-oxy-2,2,6,6-tetramethylpiperidin-4-yl 4-tert-butyl-benzoate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) succinate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) adipate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) n-butylmalonate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) phthalate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) isophthalate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) terephthalate, bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) hexahydroterephthalate, N,N'-bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) adipamide, N-(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl)caprolactam, N-(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl)dodecylsuccinimide, 2,4,6-tris[N-butyl-N-(1-oxy-2,2,6,6-tetramethyl-

piperidin-4-yl)]-s-triazine, 4,4'-ethylenebis(1-oxy-2,2,6,6-tetramethylpiperazin-3-one), 2-oxy-1,1,3,3-tetramethyl-2-isobenzazole, 1-oxy-2,2,5,5-tetramethylpyrrolidine and N,N-bis(1,1,3,3-tetramethylbutyl)nitroxide.

Preferred nitroxyl free-radicals are: bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) sebacate, 4-hydroxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-ethoxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-propoxy-1-oxy-2,2,6,6-tetramethylpiperidine, 4-acetamido-1-oxy-2,2,6,6-tetramethylpiperidine, 1-oxy-2,2,6,6-tetramethylpiperidine and 1-oxy-2,2,6,6-tetramethylpiperidin-4-one.

Bis(1-oxy-2,2,6,6-tetramethylpiperidin-4-yl) sebacate and 4-hydroxy-1-oxy-2,2,6,6-tetramethylpiperidine are especially preferred.

Stable nitroxyl free radicals with higher steric hindrance may be advantageous in some cases such compounds and their preparation are described in GB 2 335 190.

A typical example is 1-oxy-2,6-diethyl-2,3,6-trimethylpiperidin-4-yl acetate.

A further aspect of the invention is a crosslinkable composition comprising an unsaturated polymer resin, a hydroxylamine ester having a structural element according to formula (I) or (I') and optionally a vinyl monomer.

Yet another aspect of the invention is the use of a hydroxylamine ester having a structural element according to formula (I) or (I') for crosslinking unsaturated polymers by applying heat.

Definitions and preferences have been already mentioned and apply also to the composition and use.

The components of the formulation and optionally further additives are mixed at room temperature by known means. Typical devices are kneaders, mixers or rolls. When solid polymers are used they are conveniently pre-dissolved in a suitable monomer. Examples for such polymers and monomers are given above.

The final formulation can for example be casted, spin casted, sprayed, compression moulded or, preferably, injection moulded in a conventional heatable injection device and cured at a temperature between 140° and 250° C.

Such formulated resin compositions are usually referred to as BMC (bulk molding compound), SMC (sheet molding compound), one-step-sandwich-SMC (OSS-SMC), TMC (thick molding compound) or CMC (continuous molding compound). They are well known to people skilled in this art.

Typical articles manufactured by molding processes such as headlight housings and headlight reflectors are made by injection molding of BMC-resin compositions. Spoilers, valve covers, driver cabins, wings, doors, tailgates, interior paneling for trains composite cabins for the front end of trains are made by SMC.

GRP sandwich panels are used for commercial refrigerated vehicle tanks and silos, water and sewage pipes.

Heat can be applied by conventional means, such as in ovens or in electrically heated forms. It is, however, also possible, in particular when coating applications are envisaged, to apply heat by suitable infrared lamps.

Some of the important products based on unsaturated polyester resins are also cast items, such as pearl buttons, knife and umbrella handles, and encapsulated electronic assemblies. Unsaturated polyesters are for example also used for the manufacture of bathroom fixtures. Floor tiles may be manufactured by mixing the unsaturated polyester resin with fillers, such as limestone, silica, china clay and more.

The unsaturated polymer composition of this process is useful for various purposes, for example as printing ink, as a clear finish, as a white finish, for example for wood or metal, as powder coating, as a coating material, inter alia for paper, wood, metal or plastic, as a coating for the marking of buildings and roadmarking, as laminating resins, for producing three-dimensional articles by mass curing, to produce composite materials (for example styrenic polyesters, which may, if desired, contain glass fibres and/or other fibres and other

auxiliaries) and other thick-layered compositions, for coating or sealing electronic components and chips, or as coatings for optical fibres.

Further the unsaturated polymer composition of this process is suitable for the preparation of gels with thermotropic properties.

Unsaturated polyester resins are often used in two-component systems together with a monounsaturated monomer, preferably with styrene.

It can also be used for the polymerization of heat-curable powder coatings. The powder coatings can be based on solid resins and monomers containing reactive double bonds, for example maleates, vinyl ethers, acrylates, acrylamides and mixtures thereof. A free-radically heat cured powder coating can be formulated by mixing unsaturated polyester resins with solid acrylamides (for example methyl methacrylamidoglycolate). Free-radically heat cured powder coatings can also be formulated by mixing unsaturated polyester resins with solid acrylates, methacrylates or vinyl ethers. The powder coatings may additionally comprise white or coloured pigments. For example, preferably rutile-titanium dioxide can be employed in concentrations of up to 50% by weight in order to give a cured powder coating of good hiding power. The procedure normally comprises electrostatic or tribostatic spraying of the powder onto the substrate, for example metal or wood, melting of the powder by heating, and, after a smooth film has formed, curing it at the appropriate temperature.

Coating of the substrates can be carried out by applying to the substrate a liquid composition, a solution or a suspension. The choice of solvents and the concentration depend principally on the type of composition and on the coating technique. The solvent should be inert, i.e. it should not undergo a chemical reaction with the components and should be able to be removed again, after coating, in the course of drying. Examples of suitable solvents are ketones, ethers and esters, such as methyl ethyl ketone, isobutyl methyl ketone, cyclopentanone, cyclohexanone, N-methylpyrrolidone, dioxane, tetrahydrofuran, 2-methoxyethanol, 2-ethoxyethanol, 1-methoxy-2-propanol, 1,2-dimethoxyethane, ethyl acetate, n-butyl acetate and ethyl 3-ethoxypropionate.

The solution is applied uniformly to a substrate by means of known coating techniques, for example by spin coating, dip coating, knife coating, curtain coating, brushing, spraying, es-

pecially by electrostatic spraying, and reverse-roll coating, and also by means of electrophoretic deposition.

The quantity applied (coat thickness) and the nature of the substrate (layer support) are dependent on the desired field of application. The range of coat thicknesses generally comprises values from about 0.1 μm to more than 100 μm .

Also of interest is the use for curing shaped articles made from composite compositions. The composite consists of a self-supporting matrix material, for example a glass fibre fabric, or alternatively, for example, plant fibres [cf. K.-P. Mieck, T. Reussmann in *Kunststoffe* 85 (1995), 366-370], which is impregnated with the curable formulation. Shaped parts comprising composite compounds, when produced using the hydroxylamine radical sources, attain a high level of mechanical stability and resistance. The unsaturated polyester formulation are particularly useful in moulding, impregnating and coating compositions. Examples of such compositions are gel coat resins, which are subject to stringent requirements regarding curing activity and yellowing resistance, and fibre-reinforced mouldings, for example, light diffusing panels which are planar or have lengthwise or crosswise corrugation. Techniques for producing such mouldings, such as hand lay-up, spray lay-up, centrifugal casting or filament winding, are described, for example, by P.H. Selden in "Glasfaserverstärkte Kunststoffe", page 610, Springer Verlag Berlin-Heidelberg-New York 1967. Examples of articles which can be produced by these techniques are boats, fibre board or chipboard panels with a double-sided coating of glass fibre-reinforced plastic, pipes, containers, etc. Further examples of moulding, impregnating and coating compositions are UP resin gel coats for mouldings containing glass fibres (GRP), such as corrugated sheets and paper laminates. Paper laminates may be based on urea resins or melamine resins. Prior to production of the laminate, the gel coat is produced on a support (for example a film).

Also provided for by the invention is the use of the above-described compositions for the preparation of pigmented and nonpigmented coating materials, printing inks, powder coatings, optical waveguides, optical switches, colourproofing systems, composite compositions, glass fibre cable coatings, the encapsulation of electrical and electronic components, the production of three-dimensional objects and glass faser reinforced articles.

The following examples illustrate the invention.

General Description

Methods for characterizing the curing process of UP-resins and the properties of resulting duroplastic materials

Several methods are described for characterizing the curing of UP-resins (see for example: Mona Malig, Veena Choudhary, I. K. Varma, J.M.S.-Rev. Macromol. Chem. Phys., C40(2&3), 139-165 (2000)). These methods are based either on monitoring rheological properties or on calorimetric methods in dependency on time and/or temperature. As calorimetric effects can be directly linked to chemical reactions, the calorimetry allows a more profound interpretation of the curing process. In accordance with the procedure of Mona Malig et al., the calorimetric method is adapted to the requirements of the instant compositions by measuring at constant heating rate instead of measuring at constant temperature.

Calorimetric characterization of the curing process:

About 20 mg of the UP-resin composition is weighted into an Al-pan, which is tightly closed. The heat flow of the sample in dependency of the temperature is measured within a DSC Mettler Toledo Star System: start temperature: 50°C; heating rate 10°K/min or 16K/min; end temperature: 250°C.

Generally an exothermic reaction is observed during curing of the UP-resin which leads to an exothermic peak. This peak is evaluated with respect to the starting temperature of the cure process (onset temperature).

The peak area represents the enthalpy of the cure reaction, which can be evaluated from the conversion of the cure reaction by following equation:

Conversion = actual enthalpy / experimentally detected enthalpy at 100% conversion

The reaction speed is characterized by the peak broadness.

Characterization of content of residual monomers:

The content of residual monomers is determined in accordance with DIN 53394 by extracting the duroplastic material with organic solvent (CH₂Cl₂) and detecting the amount of monomers

by GC-spectroscopy (column: HP-1 (100% Methyl-siloxane). Column length: 25m, carrier gas: helium; flow: 1.8ml/min; FID-detection; external standard calibration)

Shore D Hardness:

For determining the Shore D hardness (DIN 53505 , ASTM D 2240), duroplastic plates are tested within "Zwick-Härteprüfer Shore D (Werk-Nr.12441)".

Description of general processing procedure:

All liquid and solid components are placed in a glass vial and stirred for 15 minutes which leads to a homogeneous mixture. All numbers given in the composition tables are parts by weight.

In accordance with analogous DIN EN ISO 295 – "Pressen von Probekörpern aus duroplastischen Werkstoffen", these mixtures are compressed and cured at temperatures between 140°C and 190°C within the compression molding equipment (type: Fontijne/Holland, up to 55 kN pressure).

Comparative examples

The comparative compositions in Table 1 and 2 are mixed by above described procedure and characterized by calorimetry. Additionally, plates were compression molded by standard procedure.

Table 1

Components	V1	V2	V3
Akemi UP-resin	100	100	100
Calciumstearate	2	2	2
2,5-Bis-(tert.-butylperoxy) 2,5-dimethylhexane		3	
DHBP-45-IC *			6,7

* Due to chalk content, this mixture is opaque.

Table 2

Components	V4	V5	V6	V7	V8	V9
Akemi UP-resin	100	100	100	100	100	
Palapreg P17-02						100
Calciumstearat	2	2	2	2	2	
Zincum PZ						2
Dicumylperoxide	1	3	3	3		
Tert. butylperbenzoate					1	1
Nitroxyl 1			5	1		

Inventive examples

The inventive compositions in Tables 3-9 were mixed by above described procedure and characterized by calorimetry. Additionally, plates were compression molded by standard procedure.

Table 3

Components	E1	E2	E3	E4	E5
Akemi UP Harz	100	100	100	100	100
Calciumstearat	2	2	2	2	2
Dicumylperoxid					
Compound 2		1	3	5	3
Compound 1	1				
Nitroxyl 1					1

Table 4

Components	E6	E7	E8	E9	E10	E11
Akemi UP-resin	100	100	100	100	100	
Ca-stearate	2	2	2	2	2	
Palapreg P17-02						100
Zincum PZ						2

Compound 3					3	1
Compound 2		0.5	3	1.5		
Compound 4	1					
Dicumylperoxide		0.5		1.5		

Table 5

Components	E12	E13	E14
Palapreg P17-02	100	100	
Atlac XP810			100
Zincum PZ	2	2	
tert. Butylperbenzoate		0.5	
Compound 3	0.2	1.5	2

Table 6

Components	E15	E16	E17	E18	E19
Palapreg P17-02	100	100	100	100	100
Zincum PZ	2	2	2	2	2
Compound 2	3	3	3		
Compound 3				0.5	2
Pergaquick A100	1		0.5	1	1
Pergaquick C100		0.2	0.2		

Table 7

Components	E20	E21	E22	E23	E24
Palapreg P17-02	100	100	100	100	100
Zincum PZ	2	2	2	2	2
Compound 3	0.2	0.2	0.2	1	1
Pergaquick A100	0.8				1
Leuco-Malachitgreen		0.8		1	
Accelerator 101			0.8		

Table 8

Components	E25	E26	E27	E28
Synolite 1835-N-0	35			
Synolite 9193-N-0	35			
Pentaerythrol-tetra-acrylate		70		
Di-allylbisphenol-A-diglycidylether			70	
Phthalsäure-diallylester	30			70
Styrene		30	30	30
Compound 2	1			
Compound 3		2	2	2

Table 9

Components	E29	E30	E31	E32
Kraton D1102 CU	70	70		
Krylene 1500			70	70
Styrene	30		30	
MMA		30		30
Compound 3	2	2	2	2

Results:

The results are summarized in Tables 10 and 11 in terms of starting temperature of cure process (onset temperature), monomer conversion, cure rate (peak broadness), content of residual monomers and hardness by Shore D.

Table 10

Example	Temp. onset [°C]	Calorim. Monomer conversion	Peak broadness [°C]	Content residual monomers	hardness Shore D
V1	No reaction		-	-	-
V2	132		14	-	-
V3	135		20	-	-
V4	141	*100%	14	0,6%	80
V5	134		14	0,5%	82
V6	178	54%	3,0	3,3%	52
V7	158	70%	4,4	1,1%	74
E1	154		21	4,4%	75
E2	150		18	0,4%	85
E3	158		17	<0,1%	83
E4	167		15	<0,1%	85
E5	179	100%	8,2	1,6%	73

*was taken as reference for calculation of the other calorimetric conversions

Table 11

Example	Temp. onset [°C] (DSC rate)	hardness (proc. temp.) Shore D
V8	127 (16K/min)	87 (160°C)
V9	132 (10K/min)	81 (160°C)
E6	140 (16K/min)	not determined
E7	132 (16K/min)	not determined
E8	152 (16K/min)	83 (180°C)
E9	134 (16K/min)	86 (180°C)

Example	Temp. onset [°C] (DSC rate)	hardness (proc. temp.) Shore D
E10	148 (16K/min)	87 (160°C)
E11	162 (10K/min)	83 (180°C)
E12	166 (10K/min)	81 (180°C)
E13	143 (10K/min)	85 (180°C)
E14	164 (10K/min)	completely cross-linked (180°C)
E15	117 (10K/min)	86 (180°C)
E16	150 (10K/min)	81 (180°C)
E17	117 (10K/min)	82 (180°C)
E18	117 (10K/min)	88 (180°C)
E19	109 (10K/min)	86 (170°C)
E20	113 (10K/min)	85 (170°C)
E21	123 (10K/min)	78 (170°C)
E22	142 (10K/min)	84 (170°C)
E23	127 (10K/min)	81 (170°C)
E24	108 (10K/min)	85 (170°C)
E25	124 (16K/min)	completely cross-linked (180°C)
E26	148 (10K/min)	completely cross-linked (180°C)
E27	137 (10K/min)	completely cross-linked (180°C)
E28	201 (10K/min)	not determined
E29	133 (10K/min)	completely cross-linked (180°C)
E30	127 (10K/min)	completely cross-linked (180°C)
E31	141 (10K/min)	completely cross-linked (180°C)
E32	121 (10K/min)	completely cross-linked (180°C)

"completely cross-linked": the hardness measurement is not possible, however solubility tests in CH₂Cl₂ show complete cross-linking

When peroxides are used, curing starts already at temperatures below 140°C. By adding stable nitroxyl radicals, it is possible to increase the cure temperature, simultaneously the conversion and the mechanical properties are detrimentally influenced.

Within the inventive examples, it can be observed that curing starts only at a temperature above 140°C. Simultaneously, high monomer conversions and equal or better mechanical properties can be observed.

The cure temperature can be further increased by using a combination of stable nitroxyl radical and hydroxylamine ester. 100% monomer conversion and good mechanical hardness is achieved.

On the other hand if accelerators, which are known for the peroxide cure of UP-resins, are added to the instant hydroxylamine esters and unsaturated resins, the cure temperature is also reduced, however storage stability remains high.

Example E33: Crosslinking after Storage

Formulation:

- 19% UP-resin (Palapreg P18-03 ex DSM Composite Resins)
- 19% Ethylen-vinylacetate copolymer (low profile additive) ex Aldrich
- 45% chalk ex Aldrich
- 15% glass fiber mat ex Owens Corning
- 1.7% Zinkum PZ ex Baerlocher
- 0.1% MgO ex Aldrich
- 0.3% compound 3

The formulation is stored for 6 days at room temperature and subsequently pressed at 190°C for 5 min at a pressure up to 60 bar. The following table summarizes the results:

Table 12

Example	Hardness Shore D	residual styrene content
E33	77	0.5%

Compounds and materials used.

Akemi UP-resin:

"Marmorkitt 1000 Transparent" of Akemi Erich Höntsch GmbH in Nürnberg, contains 30-35% styrene.

Synolite 9193-N-0 ex DSM Composite Resins (monomer-free, amorphous unsaturated polyester based on isophthalic acid and neopentyl glycol)

Synolite 1835-N-0 ex DSM Composite Resins (highly reactive, monomer-free, crystalline unsaturated polyester based on terephthalic acid and neopentyl glycol)

Palapreg P17-02 ex DSM Composite Resins (unsaturated polyester based on o-phthalic acid, dissolved in styrene)

Atlac XP810 ex DSM Composite Resins (vinylester resin dissolved in styrene)

Kraton D 1102 CU ex Shell (poly-styrene-block-butadiene-block-styrene)

Krylene 1500 ex Bayer (SBR: styrene-butadiene rubber)

Pentaerythrol-tetraacrylate ex Aldrich

Di-allyl-bisphenol-A-diglycidylether ex Aldrich

Di-allyl-phthalicacidester ex Merck


Calcium-stearate, purum, ex Riedel-de-Haen,

Zincum PZ ex Baerlocher (Zn-stearate)

Pergaquick A100 = N,N-Dimethyl-p-toluidine, ex Pergan GmbH, Bochold, Germany

Pergaquick C100 = 10% Cobalt-octoate in Xylene, ex Pergan GmbH, Bochold, Germany

Leucomalachtitgreen, ex Merck

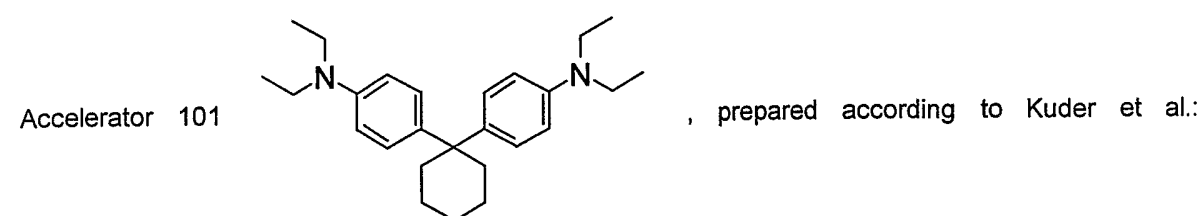

J.Org.Chem.; 44; 761 (1979)


Dicumylperoxide, 97%, ex Merck-Schuchardt

Bis-(tert.-butylperoxy)dimethylhexane, technical quality (90%), ex Aldrich


DHBP-45-IC = Diethylidibutylperoxyhexane 45% coated on chalk, ex Peroxid Chemie

Tert. butylperbenzoate (Peroxan PB) 98% ex Pergan GmbH, Bochold, Germany

nitroxyl 1

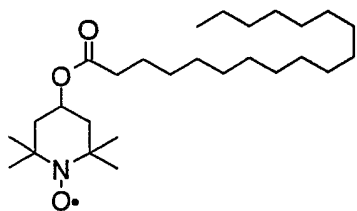


prepared according to WO 99/67298;

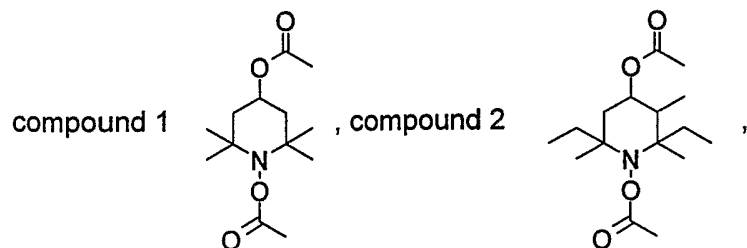

compound 3


compound 4

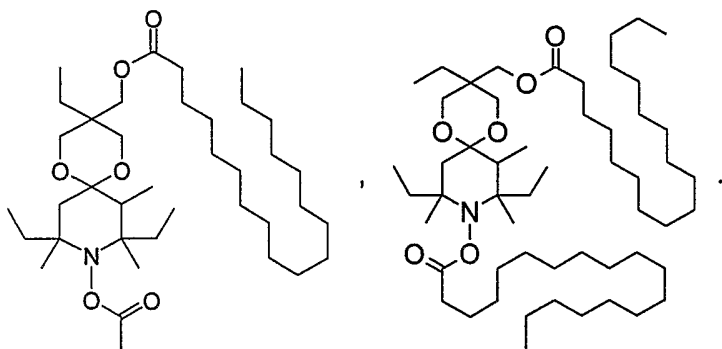

The hydroxylamine esters are prepared according to WO 01/90113

Claims


1. A process for crosslinking unsaturated polymer resins, which process comprises heating the polymer resin together with a hydroxylamine ester having a structural element of formula (I) or formula (I') or with a polymeric hydroxylamine ester having a repetitive structural unit of formula (II) or (II')

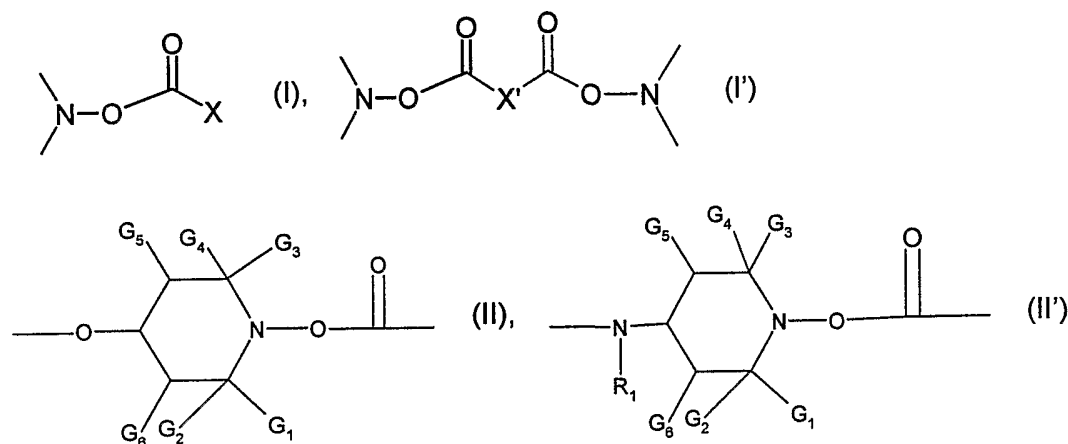

wherein

X is hydrogen, C_1 - C_{36} alkyl, C_2 - C_{36} alkenyl, C_2 - C_{18} alkynyl, C_6 - C_{10} aryl, $-\text{O}-\text{C}_1$ - C_{18} alkyl, $-\text{O}-\text{C}_6$ - C_{10} aryl, $-\text{NH}-\text{C}_1$ - C_{18} alkyl, $-\text{NH}-\text{C}_6$ - C_{10} aryl, $-\text{N}(\text{C}_1$ - C_6 alkyl) $_2$;

X' is a direct bond or C_1 - C_{36} alkylen, C_1 - C_{36} alkenylen, C_1 - C_{36} alkinylen, $-(\text{C}_1$ - C_6 alkylen)-phenyl- $(\text{C}_1$ - C_6 alkylen) or a group

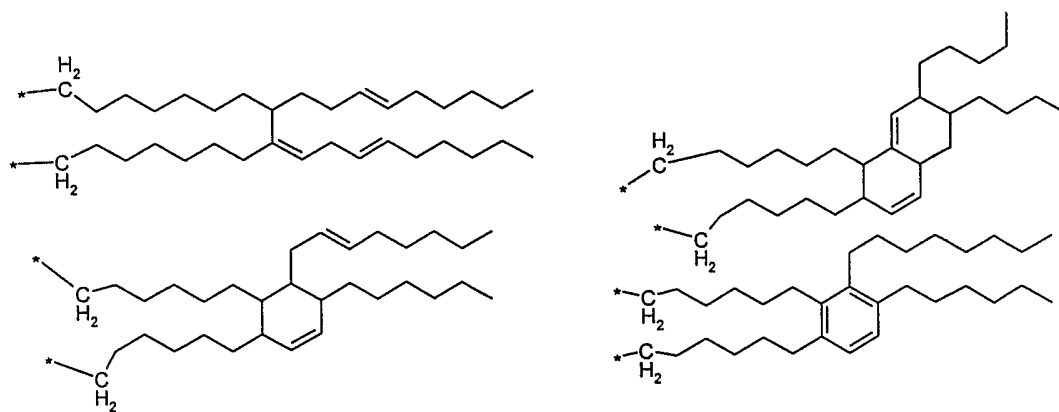


G_1 , G_2 , G_3 and G_4 are independently alkyl of 1 to 4 carbon atoms, or G_1 and G_2 together and G_3 and G_4 together, or G_1 and G_2 together or G_3 and G_4 together are pentamethylene;

G_5 and G_6 are independently hydrogen or C_1 - C_4 alkyl;


R_1 is C_1 - C_{12} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_8 aralkyl, C_2 - C_{18} alkanoyl, C_3 - C_5 alkenoyl or benzoyl.

2. A process according to claim 1 wherein the temperature is of from 140° C to 250° C, with the proviso that no accelerator is additionally present.
3. A process according to claim 1 wherein the unsaturated polymer resin is an unsaturated polyester resin.
4. A process according to claim 1 wherein an additional vinyl monomer is present.
5. A process according to claim 1, wherein the hydroxylamine ester is of formula (Ia) or (I'a)

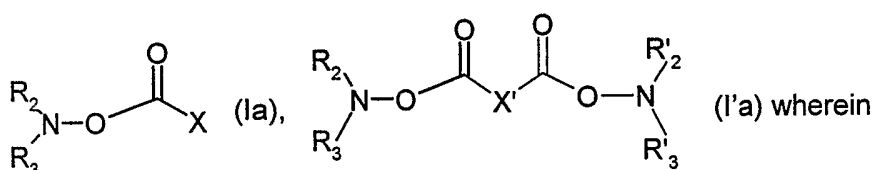

X is hydrogen, C₁-C₃₆alkyl, C₂-C₃₆alkenyl, C₂-C₁₈alkynyl, C₆-C₁₀aryl, -O-C₁-C₁₈alkyl, -O-C₆-C₁₀aryl, -NH-C₁-C₁₈alkyl, -NH-C₆-C₁₀aryl, -N(C₁-C₆alkyl)₂ ;

X' is a direct bond or C₁-C₃₆alkylen, C₁-C₃₆alkenylen, C₁-C₃₆alkynylen, -(C₁-C₆alkylen)-phenyl-(C₁-C₆alkylen) or a group



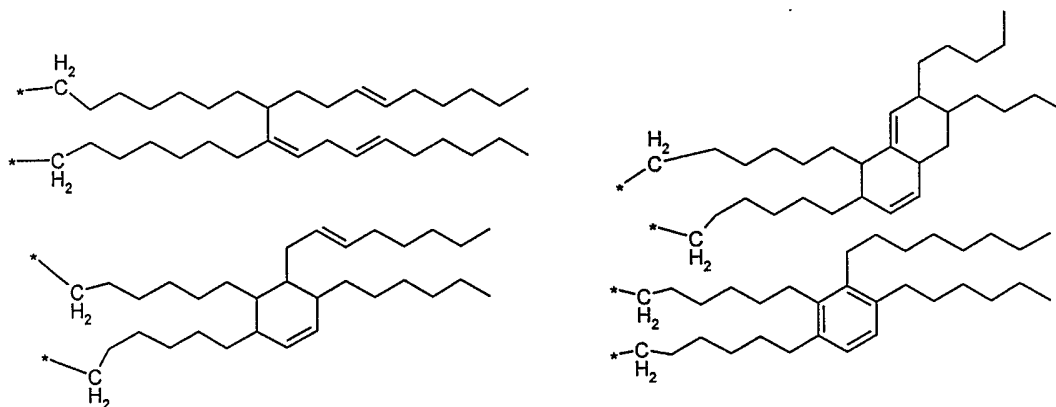





R₂, R₃, R₂' and R₃' are independently unsubstituted C₁-C₁₈alkyl, C₂-C₁₈alkenyl, C₂-C₁₈alkynyl or with halogen, CN, NO₂ or -COOR₄ substituted or with O or NR₄ interrupted C₁-C₁₈alkyl, C₂-C₁₈alkenyl or C₂-C₁₈alkynyl;




R₄ is H, phenyl or C₁-C₁₈alkyl; or




R₂ and R₃ and/or R₂' and R₃' together with the nitrogen atom to which they are bound form a 5 or 6 membered ring which may be interrupted by a nitrogen or oxygen atom and which may be substituted by one or more C₁-C₆alkyl groups, carboxyl groups, C₁-C₁₈alkoxy groups, C₁-C₁₈alkanoyloxy groups.





6. A process according to claim 1 wherein the structural element of formula (I) is of formulae A to S

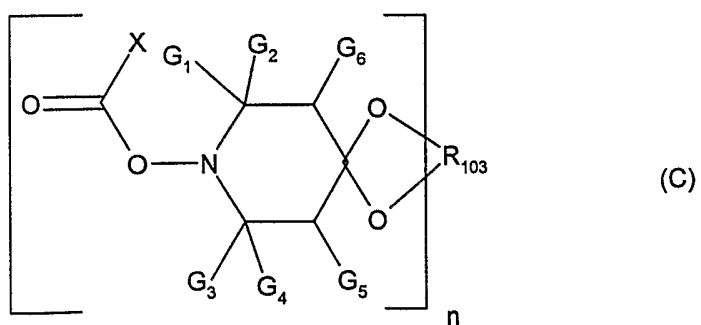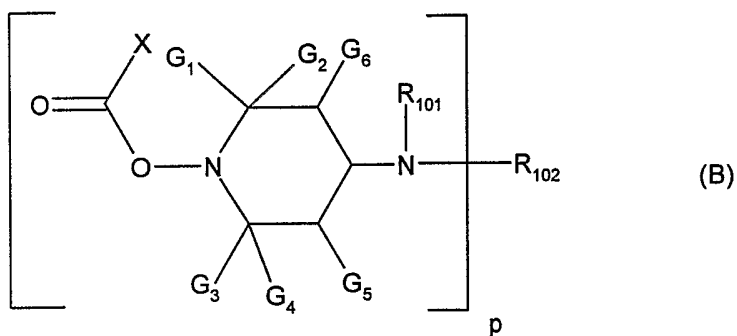
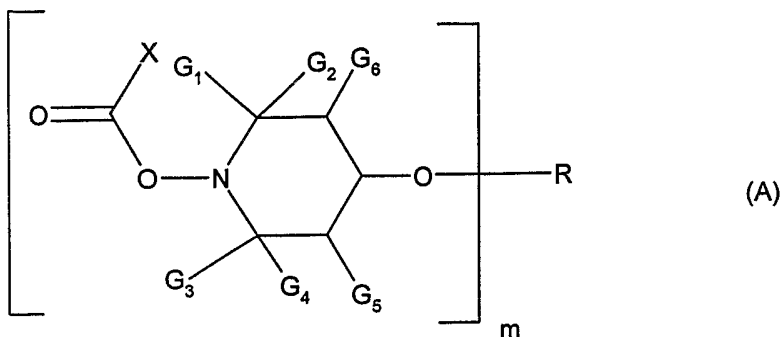


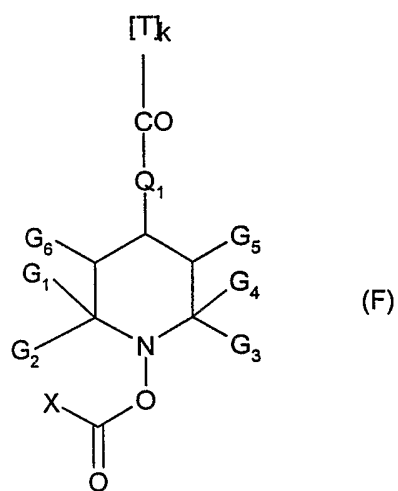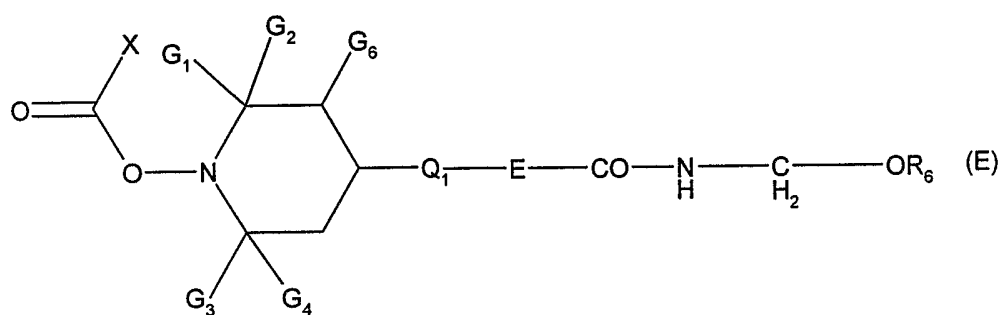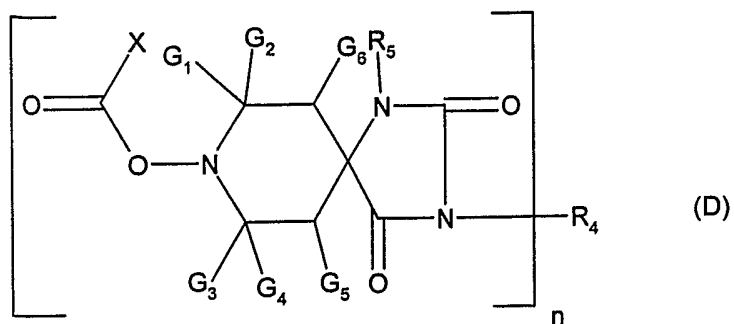

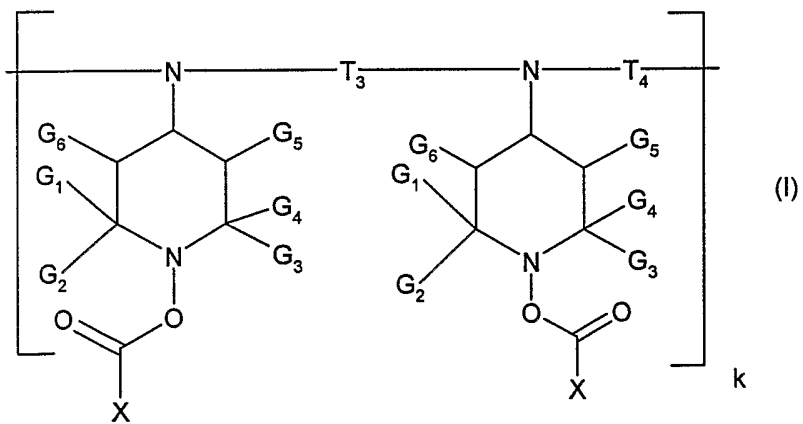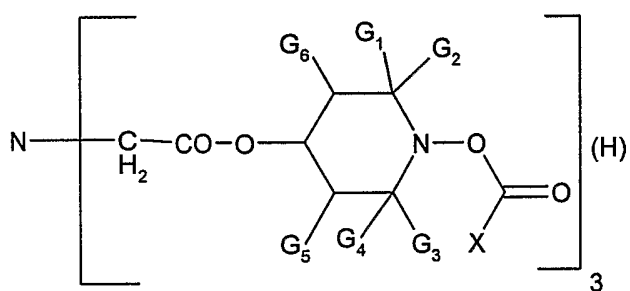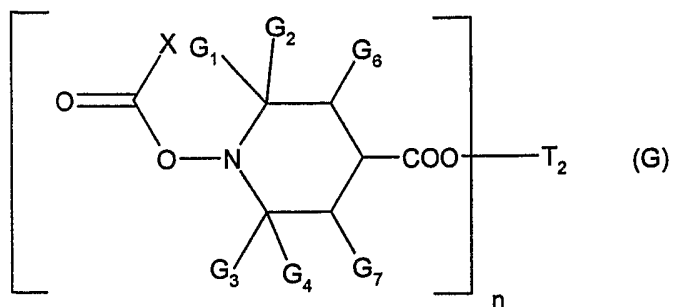

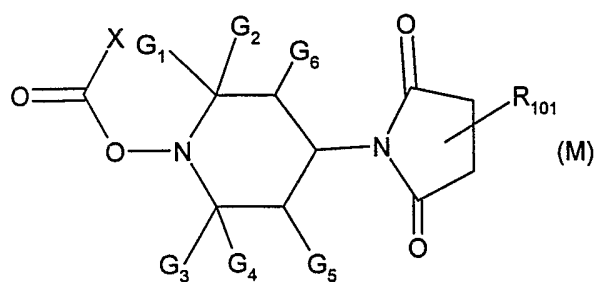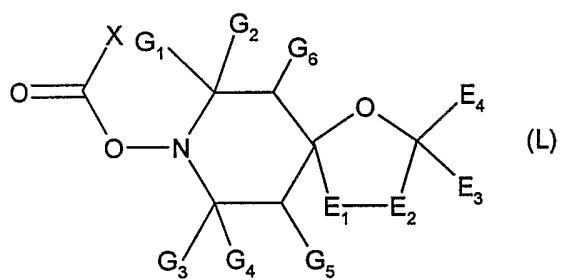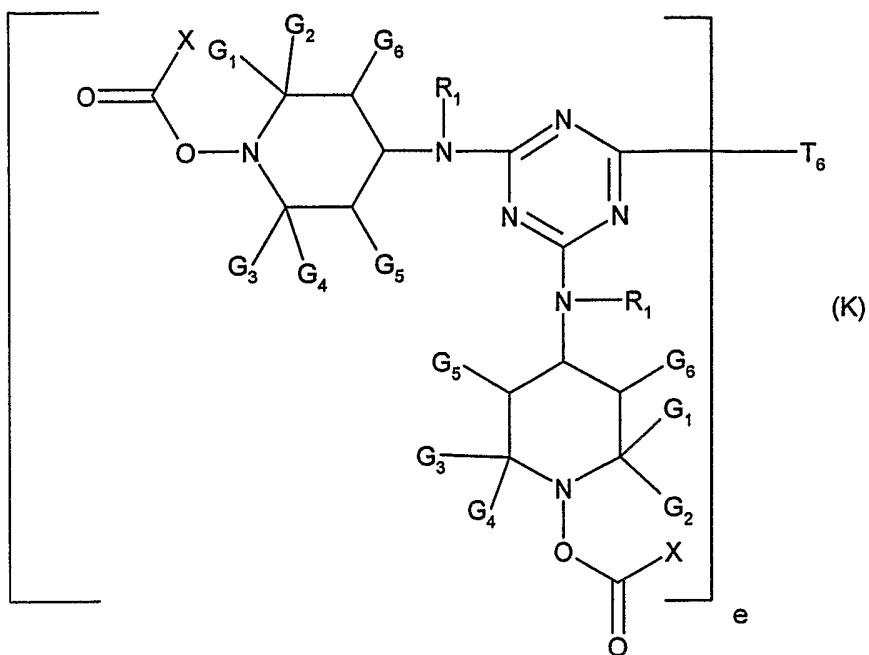

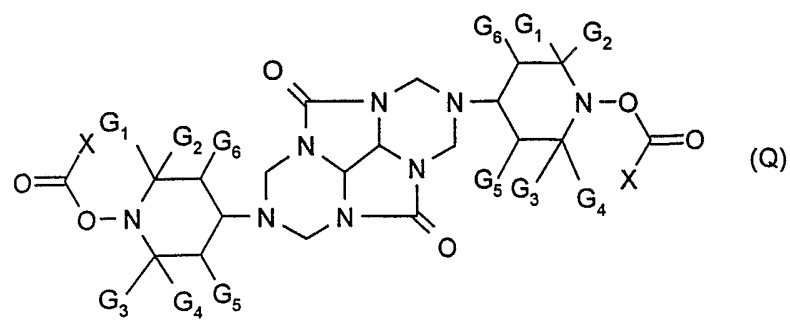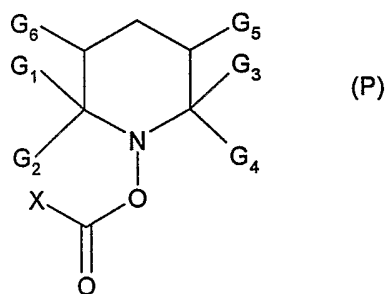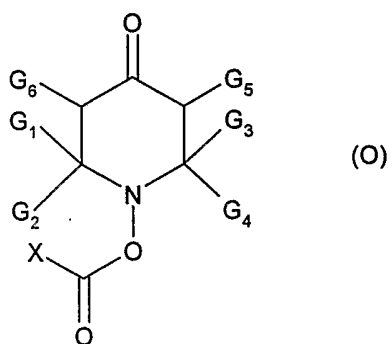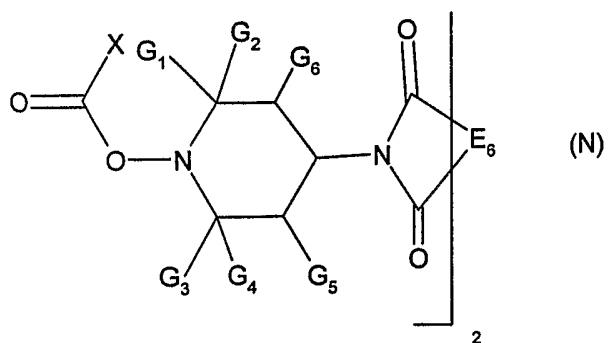

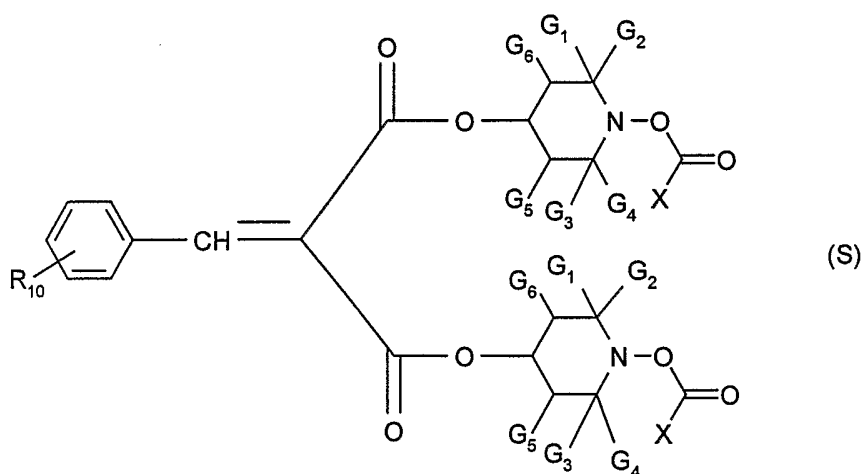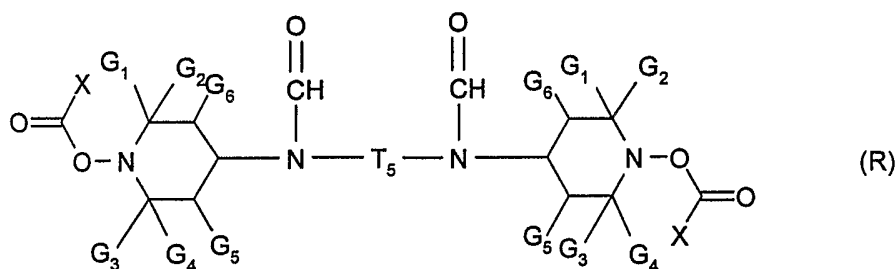

wherein

G_1 , G_2 , G_3 and G_4 are independently alkyl of 1 to 4 carbon atoms, or G_1 and G_2 together and G_3 and G_4 together, or G_1 and G_2 together or G_3 and G_4 together are pentamethylene;

G_5 and G_6 are independently hydrogen or C_1 - C_4 alkyl;

R, if m is 1, is hydrogen, C_1 - C_{18} alkyl which is uninterrupted or C_2 - C_{18} alkyl which is interrupted by one or more oxygen atoms, cyanoethyl, benzoyl, glycidyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms, where each carboxylic acid can be substituted in the aliphatic, cycloaliphatic or aromatic moiety by 1 to 3 $-COOZ_{12}$ groups, in which Z_{12} is H, C_1 - C_{20} alkyl, C_3 - C_{12} alkenyl, C_5 - C_7 cycloalkyl, phenyl or benzyl; or

R is a monovalent radical of a carbamic acid or phosphorus-containing acid or a monovalent silyl radical;

R, if m is 2, is C_2 - C_{12} alkylene, C_4 - C_{12} alkenylene, xylylene, a divalent radical of an aliphatic dicarboxylic acid having 2 to 36 carbon atoms, or a cycloaliphatic or aromatic dicarboxylic

acid having 8-14 carbon atoms or of an aliphatic, cycloaliphatic or aromatic dicarbamic acid having 8-14 carbon atoms, where each dicarboxylic acid may be substituted in the aliphatic, cycloaliphatic or aromatic moiety by one or two $-\text{COOZ}_{12}$ groups; or

R is a divalent radical of a phosphorus-containing acid or a divalent silyl radical;

R, if m is 3, is a trivalent radical of an aliphatic, cycloaliphatic or aromatic tricarboxylic acid, which may be substituted in the aliphatic, cycloaliphatic or aromatic moiety by $-\text{COOZ}_{12}$, of an aromatic tricarbamic acid or of a phosphorus-containing acid, or is a trivalent silyl radical,

R, if m is 4, is a tetravalent radical of an aliphatic, cycloaliphatic or aromatic tetracarboxylic acid;

p is 1, 2 or 3,

R_{101} is C_1 - C_{12} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_8 aralkyl, C_2 - C_{18} alkanoyl, C_3 - C_5 alkenoyl or benzoyl;


when p is 1,

R_{102} is C_1 - C_{18} alkyl, C_5 - C_7 cycloalkyl, C_2 - C_8 alkenyl unsubstituted or substituted by a cyano, carbonyl or carbamide group, or is glycidyl, a group of the formula $-\text{CH}_2\text{CH}(\text{OH})-\text{Z}$ or of the formula $-\text{CO}-\text{Z}$ or $-\text{CONH}-\text{Z}$ wherein Z is hydrogen, methyl or phenyl; or

when p is 2,

R_{102} is C_2 - C_{12} alkylene, C_6 - C_{12} -arylene, xylylene, a $-\text{CH}_2\text{CH}(\text{OH})\text{CH}_2-\text{O}-\text{B}-\text{O}-\text{CH}_2\text{CH}(\text{OH})\text{CH}_2-$ group, wherein B is C_2 - C_{10} alkylene, C_6 - C_{15} arylene or C_6 - C_{12} cycloalkylene; or, provided that R_{101} is not alkanoyl, alkenoyl or benzoyl, R_{102} can also be a divalent acyl radical of an aliphatic, cycloaliphatic or aromatic dicarboxylic acid or dicarbamic acid, or can be the group $-\text{CO}-$; or R_1 and R_2 together when p is 1 can be the cyclic acyl radical of an aliphatic or aromatic 1,2- or 1,3-dicarboxylic acid; or

R_{102} is a group



where T_7 and T_8 are independently hydrogen, alkyl of 1 to 18 carbon atoms, or T_7 and T_8 together are alkylene of 4 to 6 carbon atoms or 3-oxapentamethylene;

when p is 3,

R₁₀₂ is 2,4,6-triazinyl;

when n is 1,

R₁₀₃ is C₂-C₈alkylene or hydroxyalkylene or C₄-C₃₂acyloxyalkylene; or

when n is 2,

R₃ is (-CH₂)₂C(CH₂)₂;

when n is 1,

R₄ is hydrogen, C₁-C₁₂alkyl, C₃-C₅alkenyl, C₇-C₉aralkyl, C₅-C₇cycloalkyl, C₂-C₄hydroxyalkyl, C₂-C₆-alkoxyalkyl, C₆-C₁₀-aryl, glycidyl, a group of formula -(CH₂)_m-COO-Q or of the formula -(CH₂)_m-O-CO-Q wherein m is 1 or 2 and Q is C₁-C₄-alkyl or phenyl; or

when n is 2,


R₄ is C₂-C₁₂alkylene, C₆-C₁₂-arylene, a group -CH₂CH(OH)CH₂-O-D-O-CH₂CH(OH)CH₂- wherein D is C₂-C₁₀alkylene, C₆-C₁₅arylene or C₆-C₁₂cycloalkylene, or a group -CH₂CH(OZ₁)CH₂-(OCH₂CH(OZ₁)CH₂)₂- wherein Z₁ is hydrogen, C₁-C₁₈alkyl, allyl, benzyl, C₂-C₁₂alkanoyl or benzoyl;

R₅ is hydrogen, C₁-C₁₂alkyl, allyl, benzyl, glycidyl or C₂-C₆alkoxyalkyl;


Q₁ is -N(R₇)- or -O-;

E is C₁-C₃alkylene, the group -CH₂CH(R₈)-O- wherein R₈ is hydrogen, methyl or phenyl, the group -(CH₂)₃-NH- or a direct bond;

R₇ is C₁-C₁₈alkyl, C₅-C₇-cycloalkyl, C₇-C₁₂aralkyl, cyanoethyl, C₆-C₁₀aryl, the group -CH₂CH(R₈)-OH; or a group of the formula

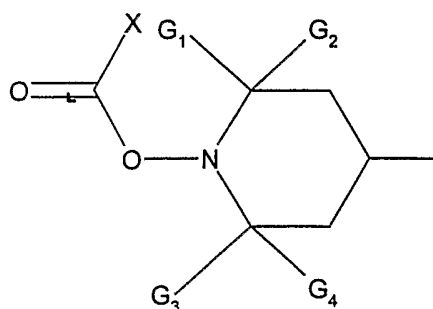

or a group of the formula

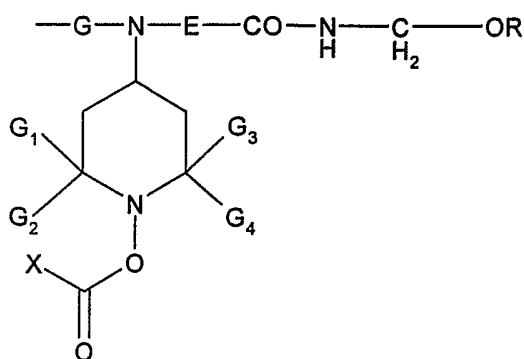

wherein G is C₂-C₆alkylene or C₆-C₁₂arylene and R is as defined above; or

R₇ is a group -E-CO-NH-CH₂-OR₆;

R₆ is hydrogen or C₁-C₁₈alkyl;


formula (F) denotes a recurring structural unit of an oligomer where T is ethylene or 1,2-propylene, or is a repeating structural unit derived from an α-olefin copolymer with an alkyl acrylate or methacrylate;

k is 2 to 100;


R₁₀ is hydrogen, C₁-C₁₂alkyl or C₁-C₁₂alkoxy;

T₂ has the same meaning as R₄;

T₃ and T₄ are independently alkylene of 2 to 12 carbon atoms, or T₄ is a group



T₅ is C₂-C₂₂alkylene, C₅-C₇cycloalkylene, C₁-C₄alkylenedi(C₅-C₇cycloalkylene), phenylene or phenylenedi(C₁-C₄alkylene);



where a, b and c are independently 2 or 3, and d is 0 or 1;
e is 3 or 4;

T_7 and T_8 are independently hydrogen C_1 - C_{18} alkyl, or T_7 and T_8 together are C_4 - C_6 alkylene or 3-oxapenthamethylene;

E_1 and E_2 , being different, each are -CO- or $\text{-N(E}_5\text{)-}$, where E_5 is hydrogen, C_1 - C_{12} alkyl or C_4 - C_{22} alkoxycarbonylalkyl;

E_3 is hydrogen, alkyl of 1 to 30 carbon atoms, phenyl, naphthyl, said phenyl or said naphthyl substituted by chlorine or by alkyl of 1 to 4 carbon atoms, or phenylalkyl of 7 to 12 carbon atoms, or said phenylalkyl substituted by alkyl of 1 to 4 carbon atoms;

E_4 is hydrogen, alkyl of 1 to 30 carbon atoms, phenyl, naphthyl or phenylalkyl of 7 to 12 carbon atoms; or


E_3 and E_4 together are polymethylene of 4 to 17 carbon atoms, or said polymethylene substituted by up to four alkyl groups of 1 to 4 carbon atoms;



E_6 is an aliphatic or aromatic tetravalent radical;

and X is as defined in claim 1

7. A process according to claim 6 wherein the hydroxylamine ester is of formula A, B or C and the substituents are as defined in claim 6.

8. A process according to claim 6 wherein the hydroxylamine ester is of formula A, B or C

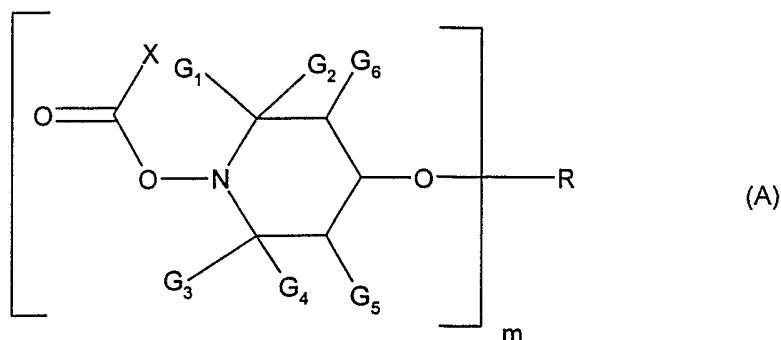

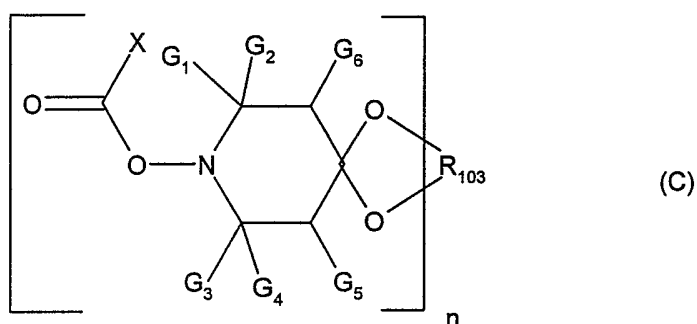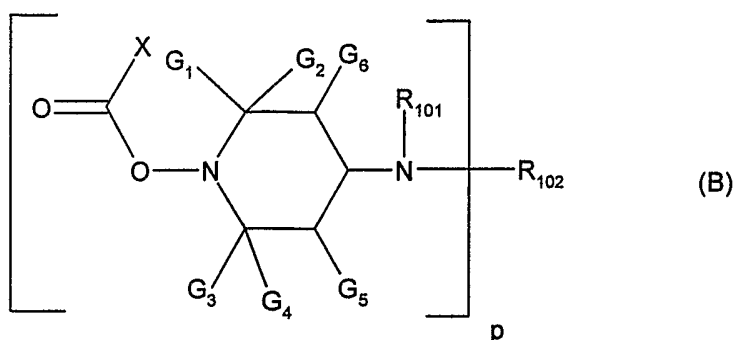

wherein

G_1 , G_2 , G_3 and G_4 are methyl or G_1 and G_3 are methyl and G_2 and G_4 are ethyl or G_1 and G_2 are methyl and G_3 and G_4 are ethyl;

G_5 and G_6 are independently hydrogen or methyl;

m is 1;

R is hydrogen, C_1 - C_{18} alkyl which is uninterrupted or C_2 - C_{18} alkyl which is interrupted by one or more oxygen atoms, cyanoethyl, benzoyl, glycidyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms, where each carboxylic acid can be substituted in the aliphatic, cycloaliphatic or aromatic moiety by 1 to 3 $-COOZ_{12}$ groups, in which Z_{12} is H, C_1 - C_{20} alkyl, C_3 - C_{12} alkenyl, C_5 - C_7 cycloalkyl, phenyl or benzyl; or

R is a monovalent radical of a carbamic acid or phosphorus-containing acid or a monovalent silyl radical;

p is 1;

R_{101} is C_1 - C_{12} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_8 aralkyl, C_2 - C_{18} alkanoyl, C_3 - C_5 alkenoyl or benzoyl;
 R_{102} is C_1 - C_{18} alkyl, C_5 - C_7 cycloalkyl, C_2 - C_8 alkenyl unsubstituted or substituted by a cyano, carbonyl or carbamide group, or is glycidyl, a group of the formula $-CH_2CH(OH)-Z$ or of the formula $-CO-Z-$ or $-CONH-Z$ wherein Z is hydrogen, methyl or phenyl;

n is 1,

R_{103} is C_2 - C_8 alkylene or hydroxyalkylene or C_4 - C_{32} acyloxyalkylene.

and

X is hydrogen, C_1 - C_{36} alkyl or C_6 - C_{10} aryl.

9. A process according to claim 8 wherein the hydroxylamine ester is of formula A;


G_1 , G_2 , G_3 and G_4 are methyl or G_1 and G_3 are methyl and G_2 and G_4 are ethyl;

G_5 and G_6 are independently hydrogen or methyl;

m is 1;

R is hydrogen, C_1 - C_{18} alkyl, a monovalent radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, of a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, or an α,β -unsaturated carboxylic acid having 3 to 5 carbon atoms or of an aromatic carboxylic acid having 7 to 15 carbon atoms.

10. A process according to claim 1 wherein the hydroxylamineester is an oligomer or polymer obtainable by reacting a dicarboxylic acid or a dicarboxylic acid derivative with a compound of formula A1 or B1 or by reacting a diisocyanate with a compound of formula A1

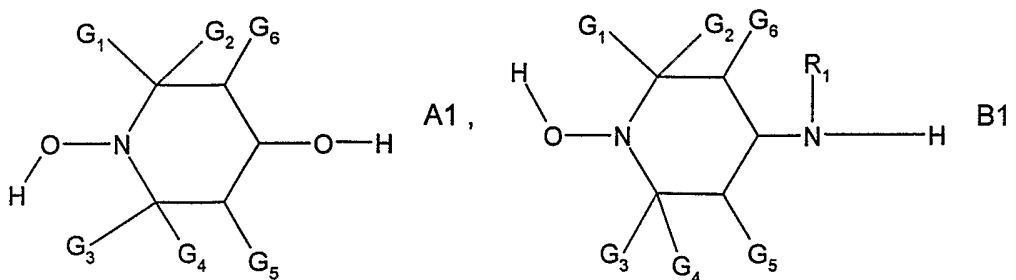

wherein the substituents G_1 , G_2 , G_3 , G_4 , G_5 , G_6 and R_1 are as defined in claim 6.

11. A process according to claim 1 wherein the hydroxylamine ester is present in an amount of from 0.01 to 10 weight-% based on the weight of the unsaturated polymer(s) and monomer(s).

12. A process according to claim 1 wherein additionally a stable free nitroxyl radical is present.

13. A process according to claim 1 wherein additionally an azo-compound, a peroxide, a perester or a hydroperoxide is present.

14. A process according to claim 1 wherein additionally an accelerator is present.

15. A process according to claim 1 wherein the thermal treatment comprises a first curing step and a second post curing step.

16. A composition, which is crosslinkable by heat comprising an unsaturated polymer resin, a hydroxylamine ester according to formula (I) or (I') of claim 1 and optionally a vinyl monomer.

17. Use of a hydroxylamine ester having a structural element according to formula (I) or (I') for crosslinking unsaturated polymers by applying heat.

18. Use of a composition according to claim 16 for the preparation of pigmented and nonpigmented coating materials, printing inks, powder coatings, optical waveguides, optical switches, colourproofing systems, composite compositions, glass fibre cable coatings, the encapsulation of electrical and electronic components, the production of three-dimensional objects and glass fibre reinforced articles.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 02/10403

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08J3/24 C08K5/3435

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C08K C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 112 890 A (MALHERBE ROGER FRANCOIS DR ET AL) 12 May 1992 (1992-05-12) column 2, line 18 figure A column 17, line 6,7 example 5 claims 1,3,18 column 16, line 50-54	1-3,5-9, 11,14, 16-18
P, X	WO 01 92397 A (CIBA SC HOLDING AG ;ROTH MICHAEL (DE); SIMON DIRK (DE); PFAENDNER) 6 December 2001 (2001-12-06) page 6, line 1-3 page 28, paragraph 11; figure A claims 1,2,17	1-9, 11-18

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

23 January 2003

Date of mailing of the international search report

05/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rose, E

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/10403

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5112890	A	12-05-1992	AU 2238388 A 23-03-1989
			BR 8804861 A 25-04-1989
			BR 8804883 A 25-04-1989
			CA 1339744 A1 17-03-1998
			CA 1339741 A1 17-03-1998
			DE 3852742 D1 23-02-1995
			DE 3852742 T2 01-06-1995
			DE 3888065 D1 07-04-1994
			DE 3888065 T2 14-07-1994
			EP 0309400 A2 29-03-1989
			EP 0309402 A1 29-03-1989
			ES 2061723 T3 16-12-1994
			ES 2065924 T3 01-03-1995
			HK 1000211 A1 06-02-1998
			JP 1113368 A 02-05-1989
			JP 2973120 B2 08-11-1999
			JP 1132562 A 25-05-1989
			JP 2867026 B2 08-03-1999
			KR 152433 B1 15-10-1998
			KR 152432 B1 15-10-1998
KR 155259 B1 01-12-1998			
SU 1831492 A3 30-07-1993			
RU 2113433 C1 20-06-1998			
ZA 8807006 A 28-06-1989			
<hr/>			
WO 0192397	A	06-12-2001	AU 1013402 A 11-12-2001
			WO 0192397 A1 06-12-2001