

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 September 2009 (24.09.2009)

(10) International Publication Number
WO 2009/116916 A1

(51) International Patent Classification:
H04L 1/18 (2006.01)

(21) International Application Number:
PCT/SE2008/051434

(22) International Filing Date:
10 December 2008 (10.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/037,432 18 March 2008 (18.03.2008) US

(71) Applicants (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE). BERGMAN, Johan [SE/SE]; Kungsholmsgatan 9, SE-112 27 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RINGSTRÖM, Markus [SE/SE]; Kungsklippan 22, 2 tr, SE-112 25 Stockholm (SE). GERSTENBERGER, Dirk [DE/SE]; Birger Jarlsgatan 113 C, SE-113 56 Stockholm (SE).

(74) Agent: HASSELGREN, Joakim; Ericsson AB, Patent Unit LTE, SE-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: METHODS AND ARRANGEMENTS IN A WIRELESS COMMUNICATIONS SYSTEM

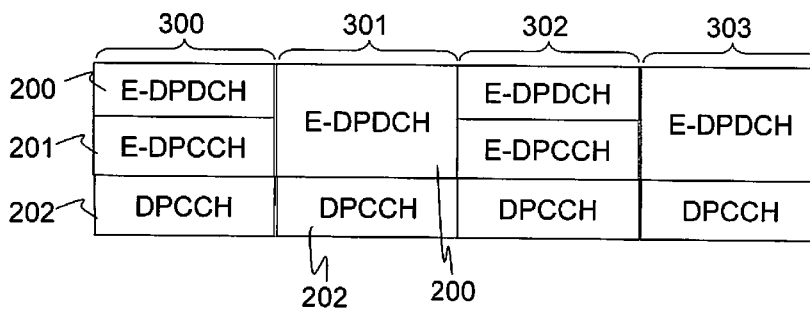


Fig. 3b

(57) Abstract: The present invention relates to methods and arrangements for uplink retransmissions from a user equipment to a radio base station in a UTRAN with enhanced uplink. The UE transmits a subframe comprising physical control channel(s) and physical data channel(s) in an initial transmission. According to the present invention, one or more of the physical control channels are transmitted with a lower transmission power level in all or some of the retransmitted subframes in the uplink. This results in reduced control overhead (a smaller part of the transmission power resource is used for control signaling) and thus reduced interference from the overhead. At the same time, the transmission power resource no longer used for the physical control channel information, can be used to increase the transmission power level of the physical data channel information in these retransmitted subframes, which improves the uplink coverage.



WO 2009/116916 A1

METHODS AND ARRANGEMENTS IN A WIRELESS COMMUNICATIONS SYSTEM

TECHNICAL FIELD

The present invention relates to the area of wireless communications and especially to improvements of uplink coverage in a Universal mobile telecommunications system
5 Terrestrial Radio Access Network (UTRAN) with enhanced uplink.

BACKGROUND

The Universal Mobile Telecommunication System (UMTS), also referred to as the third generation (3G) system or the wideband code division multiplexing access (WCDMA) system, is designed to succeed GSM. UMTS Terrestrial Radio Access Network (UTRAN)
10 is the radio access network of a UMTS system. In the UTRAN architecture, user equipment (UE) 150 is wirelessly connected to a NodeB 130, as illustrated in figure 1.

High-Speed Downlink Packet Access (HSDPA) is an evolution of UTRAN bringing further enhancements to the provisioning of packet-data services both in terms of system and end-user performance. The downlink packet-data enhancements of HSDPA are
15 complemented with Enhanced Uplink (EUL), also known as High-Speed Uplink Packet Access (HSUPA). EUL provides improvements in the uplink capabilities and performance in terms of higher data rates, reduced latency, and improved system capacity, and is therefore a natural complement to HSDPA. HSDPA and EUL are often jointly referred to as High-Speed Packet Access (HSPA). The evolution of UTRAN has been strongly
20 focused on increased data rates and reduced Round Trip Times (RTT), to support the use of delay sensitive packet-data services. RTT is defined as the time it takes for a packet to get to a remote place and back again. In order to allow for reduced RTT and increased data rates, the Transmission Time Interval (TTI) is shortened. TTI is defined as the duration of data transmission where coding and interleaving is performed.

25 In a UTRAN, the dedicated transport channel is called Dedicated Channel (DCH). The DCH carries all the information to/from a specific UE from/to higher layers including the data for the actual service and higher layer control information. The DCH is mapped onto two physical channels: The Dedicated Physical Data Channel (DPDCH) carrying higher layer information (which includes the user data), and the Dedicated Physical Control
30 Channel (DPCCH) carrying the physical layer control information.

In a UTRAN with HSPA, the EUL enhancements are implemented through a new dedicated transport channel: the Enhanced Dedicated Channel (E-DCH). A short TTI of 2 ms is supported by the E-DCH to allow for reduced RTT (as discussed above). An alternative TTI length of 10 ms is also supported, and the network can configure the appropriate TTI value. Simultaneous transmission of E-DCH and DCH is possible. The uplink data and control channels used for E-DCH support are illustrated in **figure 2**. The E-DCH is mapped to a set of uplink channelization codes known as E-DCH Dedicated Physical Data Channels (E-DPDCH) 200. In order for the NodeB to demodulate and decode the data transmission on the E-DPDCH 200, control signaling is needed on the uplink, and the E-DCH Dedicated Physical Control Channel (E-DPCCH) 201 is used for this purpose. The DPCCH 202 carries the pilot signal and transmission power control commands. There is also an uplink channel for the HSDPA related control signaling, called HSDPA Dedicated Physical Control Channel (HS-DPCCH) 203.

Although a short TTI is generally beneficial for upper layer protocols and applications, there is a downside as well: The reliability of the transmitted data (and thus the coverage) decreases with a shortened TTI, as a shortened TTI means reduced energy per information bit. One solution to this problem is to increase the transmission power and thus increase the energy per information bit. This might be possible on the downlink, but in the uplink and especially in the case of a coverage limited scenario, the UE is in general already transmitting close to its maximum transmission power.

Another solution to the problem is to reduce the number of information bits and thus to get more energy per information bit. Though reducing the number of data channel information bits (within a TTI or subframe) may increase the coverage, this approach has the disadvantage of increased control overhead, i.e. an unbalanced relation between the control channel information and the data channel information.

Yet another solution to the problem of decreased reliability or coverage is to rely on retransmissions on lower layers, typically Hybrid Automatic Repeat Request HARQ retransmissions. This solution is used in UTRAN HSPA systems.

HARQ is a combination of forward error-correcting (FEC) coding and Automatic Repeat Request (ARQ). In FEC coding, redundancy is introduced in the transmitted signal. Parity bits are added to the information bits prior to the transmission, and the parity bits are computed from the information bits using a method given by the coding structure used. In an ARQ scheme, the receiver uses an error-detecting code to detect when the received

packet is in error and a retransmission is requested in that case. If no error is detected, a positive acknowledgement (ACK) is sent to the transmitter, and if an error is detected, a negative acknowledgement (NAK) is sent. HARQ thus uses FEC codes to correct a subset of all errors and relies on error detection with retransmission for handling the rest
5 of the errors.

Taking the example of HARQ retransmissions in uplink in a UTRAN with HSPA, the NodeB receives a subframe, comprising both the physical control channels (e.g. DPCCH, HS-DPCCH and E-DPCCH) and the physical data channels (E-DPDCH), in an initial transmission from the UE. Based on the E-DPCCH, the NodeB will try to demodulate and
10 decode the E-DPDCH. If there are non correctable errors in the physical data channel information, the information cannot be decoded and the NodeB will ask for a retransmission of the subframe by sending a NAK to the UE. The entire subframe is then retransmitted by the UE.

One disadvantage of the retransmission solution is that the physical control channel
15 information is retransmitted together with the physical data channel information in every retransmission, although the control channel information has already been received in the initial retransmission. A part of the scarce uplink transmission power resource is thus used for redundant control data.

SUMMARY

20 The object of the present invention is to provide methods and arrangements that obviate some of the above disadvantages, and that improves the uplink coverage in a UTRAN with enhanced uplink, by reducing the control overhead in uplink retransmissions.

This is achieved by transmitting redundant physical control channel information with a transmission power level that is lower than in the initial transmission, in all or some of the
25 retransmissions, thus saving enhanced uplink transmission power resources. This also gives the possibility to increase the transmission power of the physical data channel information in these same retransmissions, which affects the enhanced uplink coverage positively.

Thus in accordance with a first aspect of the present invention, a method of uplink
30 retransmissions in a user equipment of a UTRAN with enhanced uplink is provided. The method comprises the step of transmitting a subframe comprising a first number of

physical control channel(s) and a second number of physical data channel(s) in an initial transmission. It further comprises the step of retransmitting the subframe in a third number N of a total number M of retransmissions, where N is smaller than M. It also comprises a step of retransmitting the subframe in the remaining M-N retransmissions, 5 where at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.

10 In accordance with a second aspect of the present invention, a method of uplink retransmissions in a NodeB of a UTRAN with enhanced uplink is provided. The method comprises the step of receiving a subframe comprising a first number of physical control channel(s) and a second number of physical data channel(s) in an initial transmission received from a user equipment. It further comprises the step of receiving the subframe in 15 a third number N of a total number M of retransmissions received from the user equipment, where N is smaller than M. It also comprises the step of receiving the subframe in the remaining M-N retransmissions received from the user equipment, where at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the initial transmission, 20 and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.

In accordance with a third aspect of the present invention, a UE of a Universal Mobile Telecommunications System Terrestrial Radio Access Network, UTRAN, with enhanced 25 uplink is provided. The UE comprises means for transmitting a subframe comprising a first number of physical control channel(s) and a second number of physical data channel(s) in an initial transmission. It also comprises means for retransmitting the subframe in a third number N of a total number M of retransmissions, where N is smaller than M. It further comprises means for retransmitting the subframe in the remaining M-N retransmissions, 30 where at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.

In accordance with a fourth aspect of the present invention, a NodeB is provided. The NodeB comprises means for receiving a subframe comprising a first number of physical control channel(s) and a second number of physical data channel(s) in an initial transmission received from a user equipment. It also comprises means for receiving the subframe in a third number N of a total number M of retransmissions received from said user equipment, where N is smaller than M. The NodeB further comprises means for receiving the subframe in the remaining M-N retransmissions received from the user equipment, where at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.

.An advantage of embodiments of the present invention is that a smaller part of the total uplink transmission power resource is used for physical control channels, and a larger part is used for physical data channels, which improves the uplink coverage. The overhead reduction also results in an increased capacity in the own cell as well as in neighboring cells as less interference is transmitted in terms of control overhead.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates schematically a part of a UTRAN with enhanced uplink wherein the present invention may be implemented.

Figure 2 illustrates schematically the uplink physical data channels and physical control channels available in a UTRAN with HSPA (HSDPA and EUL).

Figure 3a illustrates schematically an uplink initial transmission and three retransmissions of a subframe comprising DPCCH, E-DPCCH and E-DPDCH, according to prior art.

Figure 3b illustrates schematically an uplink initial transmission and three retransmissions of a subframe comprising DPCCH, E-DPCCH and E-DPDCH in the initial transmission, according to embodiments of the present invention.

Figures 4a and 4b are flowcharts of the methods of the UE and NodeB respectively according to embodiments of the present invention.

Figure 5 illustrates schematically the NodeB and UE according to embodiments of the

present invention.

DETAILED DESCRIPTION

In the following, the invention will be described in more detail with reference to certain embodiments and to accompanying drawings. For purposes of explanation and not
5 limitation, specific details are set forth, such as particular scenarios, techniques, etc., in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practised in other embodiments that depart from these specific details.

Moreover, those skilled in the art will appreciate that the functions and means explained
10 herein below may be implemented using software functioning in conjunction with a programmed microprocessor or general purpose computer, and/or using an application specific integrated circuit (ASIC). It will also be appreciated that while the current invention is primarily described in the form of methods and devices, the invention may also be embodied in a computer program product as well as in a system comprising a computer
15 processor and a memory coupled to the processor, wherein the memory is encoded with one or more programs that may perform the functions disclosed herein.

The present invention relates to methods and arrangements for uplink retransmissions from a user equipment to a radio base station in a UTRAN with enhanced uplink. The UE transmits a subframe comprising physical control channel(s) and physical data channel(s)
20 in an initial transmission. According to the present invention, one or more of the physical control channels are transmitted with a lower transmission power level in all or some of the retransmitted subframes in the uplink. This results in reduced control overhead (a smaller part of the transmission power resource is used for control signaling) and thus reduced interference from the overhead. At the same time, the transmission power
25 resource no longer used for the physical control channel information, can be used to increase the transmission power level of the physical data channel information in these retransmitted subframes, which improves the uplink coverage.

Thus, according to a first embodiment, a subframe comprising physical control channels and physical data channels is transmitted in an initial transmission. This initial
30 transmission will be followed by a number of retransmissions, e.g. autonomous retransmissions. In all or in a subset of these retransmissions, the transmission power level of at least one of the physical control channels will be decreased in relation to the

initial transmission, while the transmission power level of at least one of the physical data channels will be increased. This is possible since the physical control channel information is redundant, as it has already been decoded once by the NodeB in the initial transmission.

- 5 One special case of this first embodiment is when the transmission power level of at least one of the physical control channels is zero, which means that this physical control channel is completely excluded from that retransmission.

The benefit of the first embodiment is that the control overhead is reduced which results in decreased interference. Another benefit is that a larger part of the transmission power
10 resource is used for the physical data channels, thus increasing the uplink coverage as there is more energy per physical data channel information bit.

In order to increase the probability of a successful reception of the physical control channel information in the initial transmission and since the information might not be repeated in all subsequent retransmissions, the physical control channel transmission
15 power may be increased in the initial transmission in relation to the physical data channel transmission.

To keep track of the Retransmission Sequence Number (RSN, which is zero for the initial transmission and incremented by one for each subsequent retransmission) the NodeB will assume that the UE takes the proper action suggested by the ACK/NAK transmitted by
20 the NodeB. This may for example be combined with blind detection of the physical control channel to enhance the performance in case of a misunderstanding in the signaling.

According to a second embodiment of the present invention, the physical control channel that is excluded from (i.e. the transmission power level is zero) or retransmitted with lower transmission power in some or all of the retransmissions is the E-DPCCH. E-DPCCH
25 carries control information needed for the NodeB to demodulate and decode the E-DPDCH. A comparison between figure 3a and 3b, illustrates the difference between prior art and the present invention. In figure 3a (prior art), the physical control channels (E-DPCCH 201 and DPCCH 202) are transmitted together with the physical data channel (E-DPDCH) 200 in all transmissions, including the initial transmission 300 and consecutive
30 retransmissions 301, 302, 303. In figure 3b, illustrating a non-limiting example of an initial uplink transmission 300 and the retransmissions 301, 302, 303 according to the second embodiment of the present invention, the E-DPCCH 201 is excluded from some of the

retransmissions. The E-DPCCH 201 is sent in the initial transmission 300 and in the second retransmission 302, but not in the first 301 and third 303 retransmission. This leaves more transmission power for the E-DPDCH 200 in the first 301 and the third 303 retransmission, which will thus increase the uplink coverage.

5 According to a third embodiment of the present invention, the physical control channel that is excluded from or retransmitted with lower transmission power in some or all of the retransmissions is the DPCCH. This embodiment may impact for example the downlink power control and can be used when trading in optimized downlink power control for uplink coverage.

10 According to a fourth embodiment the physical control channel that is excluded from or retransmitted with lower transmission power in some or all of the retransmissions is both the E-DPCCH and the DPCCH. This is thus a combination of the two previous embodiments. Other physical control channels and combinations may also be considered.

To reduce the delay introduced by the HARQ retransmissions, one solution is to allow a
15 pre-defined number of consecutive retransmissions without awaiting the ACK or NAK between them. This kind of consecutive retransmissions are hereinafter referred to as autonomous retransmissions. According to a fifth embodiment of the present invention, autonomous retransmissions are used, and as the number of retransmissions is pre-defined (configured by the UE or the network), the NodeB is aware of the required number
20 of retransmissions without any signaling. There is thus no need to keep track of the RSN or to use blind detection of the physical control channel in order to get a good performance. Thus, this results in that this embodiment is less sensitive to signaling errors.

As described above, the physical control channel transmission power may be increased in
25 the initial transmission in relation to the physical data channel transmission, in order to increase the probability of a successful reception of the physical control channel information in the initial transmission. In the case of autonomous retransmissions, it is possible to exclude the physical data channels completely in the initial transmission, thus leaving all available transmission power resources to the physical control channels.

30 Some of the retransmissions on the uplink may be self-decodable, while others are not. The information in a self-decodable retransmission can be decoded based on the information in that retransmission only. In a non self-decodable retransmission, at least

one of the previous retransmissions is needed in order to decode the information. According to a sixth embodiment, it is always a self-decodable retransmission that is chosen for retransmitting the physical control channel and the physical data channel with the same relation between the transmission power levels as in the initial transmission.

5 The retransmissions where the transmission power level of at least one of the physical control channels is lowered or set to zero are the non self-decodable ones. The reasoning behind this is that these retransmissions anyhow always need an earlier retransmission with physical control channel information to be decoded. In this embodiment, unnecessary retransmissions of physical control channel information are thus avoided, which again

10 allows for an optimal use of the transmission power.

Figure 4a is a flowchart of the method for the UE, according to the first embodiment of the present invention described above. In step 400, a subframe comprising physical control channel information and physical data channel information is transmitted on the uplink, in an initial transmission. In step 401, the UE will - in a subset of the retransmissions

15 following the initial transmission - retransmit the subframe with the same relation between transmission power levels of the control channels and the data channels as in the initial transmission. This step 401 could thus be performed in every second retransmission or in even fewer retransmissions or in no retransmissions at all. In step 402, the UE will - in the rest of the retransmissions -retransmit one or more of the physical control channels with a

20 lower transmission power level than in the initial transmission, and will use the freed transmission power resource to retransmit one or more of the physical data channels with a higher transmission power level than in the initial transmission. This will thus enable increased uplink coverage, as a larger portion of the transmission power is used for physical data channels.

25 Furthermore, **figure 4b** is a flowchart of the method for the NodeB, according to the first embodiment of the present invention described above. In step 403, the NodeB receives a subframe comprising both physical control channel information and physical data channel information in an initial uplink transmission from the UE. The NodeB will then, in step 404 and 405, receive a total number of retransmissions that follow the initial transmission. In

30 step 404, the NodeB receives the subframe in a subset of the retransmissions from the UE with the same relation between the different control and data channels transmission power levels as in the initial transmission. In step 405, the NodeB will, in the rest of the retransmissions from the UE, receive the physical control channel with lower transmission power level than in the initial transmission and will receive the physical data channel with

a higher transmission power level than in the initial transmission.

Schematically illustrated in **figure 5** and according to the first embodiment described above, the UE 150 comprises transmitting means 501 for transmitting a subframe comprising physical control channels and physical data channels. It also comprises
5 retransmitting means 502 for retransmitting the subframe with the physical data channel information in a subset of the retransmissions, and for retransmitting the subframe with decreased transmission power of the physical control channel and increased transmission power of the physical data channel in the rest of the retransmissions.

Also illustrated in **figure 5** is the NodeB 130. It comprises receiving means 503, for
10 receiving a subframe with both physical control channel and physical data channel information in an initial transmission. The receiving means 503 are also used for receiving the subframe with the physical data channel information in a subset of the retransmissions from the UE, and for receiving the subframe with decreased transmission power of the physical control channel and increased transmission power of the physical data channel in
15 the rest of the retransmissions from the UE.

It should be noted that the means illustrated in **figure 5** may be implemented by physical or logical entities using software functioning in conjunction with a programmed microprocessor or general purpose computer, and/or using an application specific integrated circuit (ASIC).

20 The above mentioned and described embodiments are only given as examples and should not be limiting to the present invention. Other solutions, uses, objectives, and functions within the scope of the invention as claimed in the accompanying patent claims should be apparent for the person skilled in the art.

CLAIMS

1. A method of uplink retransmissions in a user equipment of a Universal Mobile
Telecommunications System Terrestrial Radio Access Network, UTRAN, with
5 enhanced uplink, comprising the steps of
 - transmitting (400) a subframe comprising a first number of physical control channel(s)
and a second number of physical data channel(s) in an initial transmission,
 - retransmitting (401) the subframe in a third number N of a total number M of
retransmissions, where N is smaller than M, and
 - 10 - retransmitting (402) the subframe in the remaining M-N retransmissions, wherein at
least one of the first number of physical control channel(s) has a lower transmission
power level than the corresponding physical control channel(s) in the initial
transmission, and at least one of the second number of physical data channel(s) has a
higher transmission power level than the corresponding physical data channel(s) in
15 the initial transmission.
2. The method according to claim 1, wherein said lower transmission power level is zero.
3. The method according to any of the preceding claims, wherein the at least one of the
20 first number of physical control channel(s) in said N retransmissions has a higher
transmission power level than the corresponding physical control channel(s) in the
initial transmission.
4. The method according to any of the preceding claims, wherein one of said physical
25 control channel(s) with lower transmission power level is the dedicated physical
control channel for the enhanced dedicated channel, E-DPCCH.
5. The method according to any of the preceding claims, wherein one of said physical
control channel(s) with lower transmission power level is the dedicated physical
30 control channel, DPCCH.
6. The method according to any of the preceding claims, wherein said M retransmissions
are autonomous retransmissions.

7. The method according to any of the preceding claims, wherein said N retransmissions are self-decodable retransmissions.
8. A method of uplink retransmissions in a NodeB of a Universal Mobile
5 Telecommunications System Terrestrial Radio Access Network, UTRAN, with enhanced uplink, said method comprising the steps of
- receiving (403) a subframe comprising a first number of physical control channel(s) and a second number of physical data channel(s) in an initial transmission received from a user equipment,
 - 10 - receiving (404) the subframe in a third number N of a total number M of retransmissions received from said user equipment, where N is smaller than M, and
 - receiving (405) the subframe in the remaining M-N retransmissions received from said user equipment, wherein at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control
15 channel(s) in the initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.
9. The method according to claim 8, wherein said lower transmission power level is zero.
20
10. The method according to any of claims 8-9, wherein the at least one of the first number of physical control channel(s) in said N retransmissions has a higher transmission power level than the corresponding physical control channel(s) in the initial transmission.
25
11. The method according to any of claims 8-10, wherein one of said physical control channel(s) with lower transmission power level is the dedicated physical control channel for the enhanced dedicated channel, E-DPCCH.
- 30 12. The method according to any of claims 8-11, wherein one of said physical control channel(s) with lower transmission power level is the dedicated physical control channel, DPCCH.
13. The method according to any of claims 8-12, wherein said M retransmissions are
35 autonomous retransmissions.

14. The method according to any of claims 8-13, wherein said N retransmissions are self-decodable retransmissions.
- 5
15. A user equipment (150) of a Universal Mobile Telecommunications System Terrestrial Radio Access Network, UTRAN, with enhanced uplink, comprising
- means for transmitting (501) a subframe comprising a first number of physical control channel(s) and a second number of physical data channel(s) in an initial transmission,
 - 10 - means for retransmitting (502) the subframe in a third number N of a total number M of retransmissions, where N is smaller than M, and
 - means for retransmitting (502) the subframe in the remaining M-N retransmissions, wherein at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the
 - 15 initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.
16. The user equipment according to claim 15, wherein said lower transmission power level is zero.
- 20
17. The user equipment according to any of claims 15-16, wherein the at least one of the first number of physical control channel(s) in said N retransmissions has a higher transmission power level than the corresponding physical control channel(s) in the
- 25 initial transmission.
18. The user equipment according to any of claims 15-17, wherein one of said physical control channel(s) with lower transmission power level is the dedicated physical control channel for the enhanced dedicated channel, E-DPCCH.
- 30
19. The user equipment according to any of claims 15-18, wherein one of said physical control channel(s) with lower transmission power level is the dedicated physical control channel, DPCCH.

20. The user equipment according to any of claims 15-19, wherein said M retransmissions are autonomous retransmissions.
21. The user equipment according to any of claims 15-20, wherein said N retransmissions
5 are self-decodable retransmissions.
22. A NodeB (130) of a Universal Mobile Telecommunications System Terrestrial Radio Access Network, UTRAN, with enhanced uplink, comprising
- means for receiving (503) a subframe comprising a first number of physical control
10 channel(s) and a second number of physical data channel(s) in an initial transmission received from a user equipment,
 - means for receiving (503) the subframe in a third number N of a total number M of retransmissions received from said user equipment, where N is smaller than M, and
 - means for receiving (503) the subframe in the remaining M-N retransmissions
15 received from said user equipment, wherein at least one of the first number of physical control channel(s) has a lower transmission power level than the corresponding physical control channel(s) in the initial transmission, and at least one of the second number of physical data channel(s) has a higher transmission power level than the corresponding physical data channel(s) in the initial transmission.
- 20
23. The NodeB according to claim 22, wherein said lower transmission power level is zero.
24. The NodeB according to any of claims 22-23, wherein the at least one of the first
25 number of physical control channel(s) in said N retransmissions has a higher transmission power level than the corresponding physical control channel(s) in the initial transmission.
25. The NodeB according to any of claims 22-24, wherein one of said physical control
30 channel(s) with lower transmission power level is the dedicated physical control channel for the enhanced dedicated channel, E-DPCCH.
26. The method according to any of claims 22-25, wherein one of said physical control
35 channel(s) with lower transmission power level is the dedicated physical control channel, DPCCH.

27. The method according to any of claims 22-26, wherein said M retransmissions are autonomous retransmissions.
- 5 28. The method according to any of claims 22-27, wherein said N retransmissions are self-decodable retransmissions.

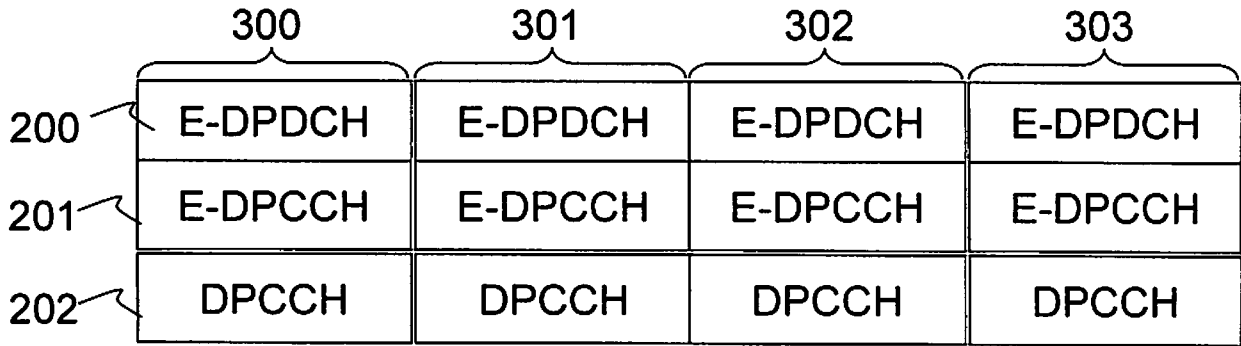


Fig. 3a

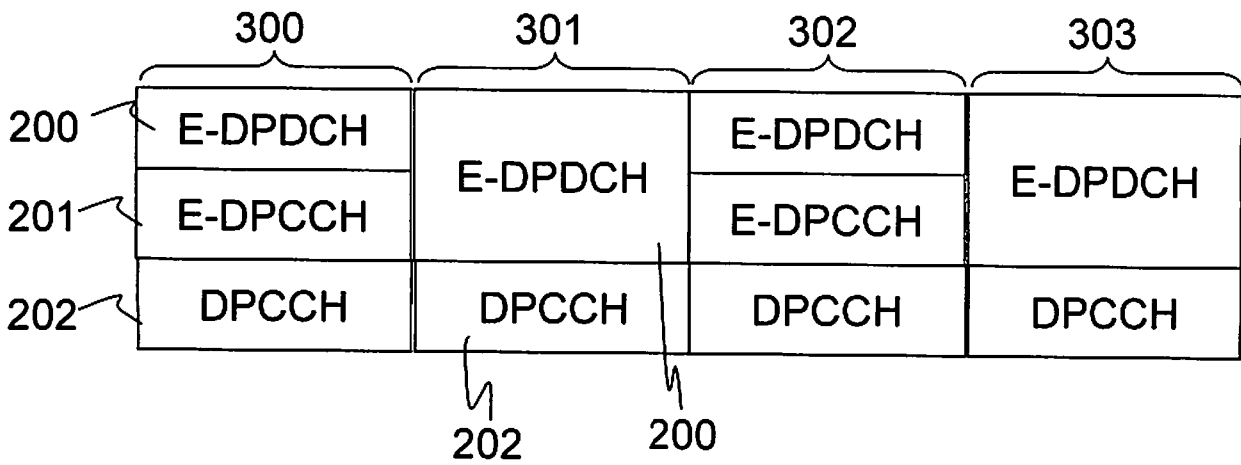


Fig. 3b

3/4

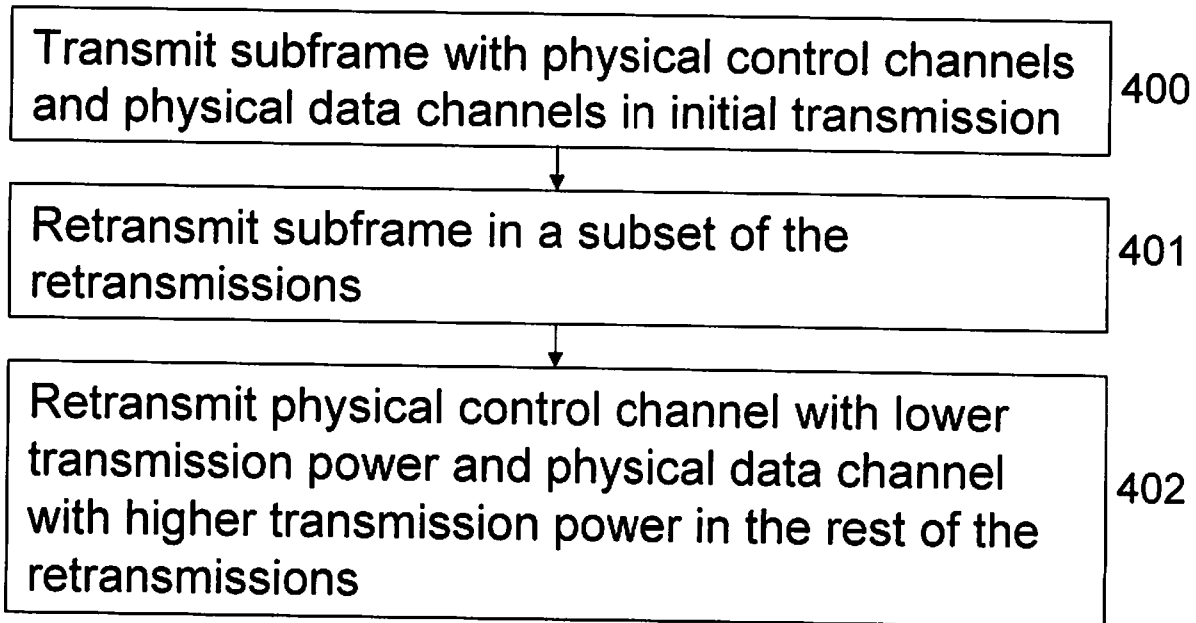


Fig. 4a

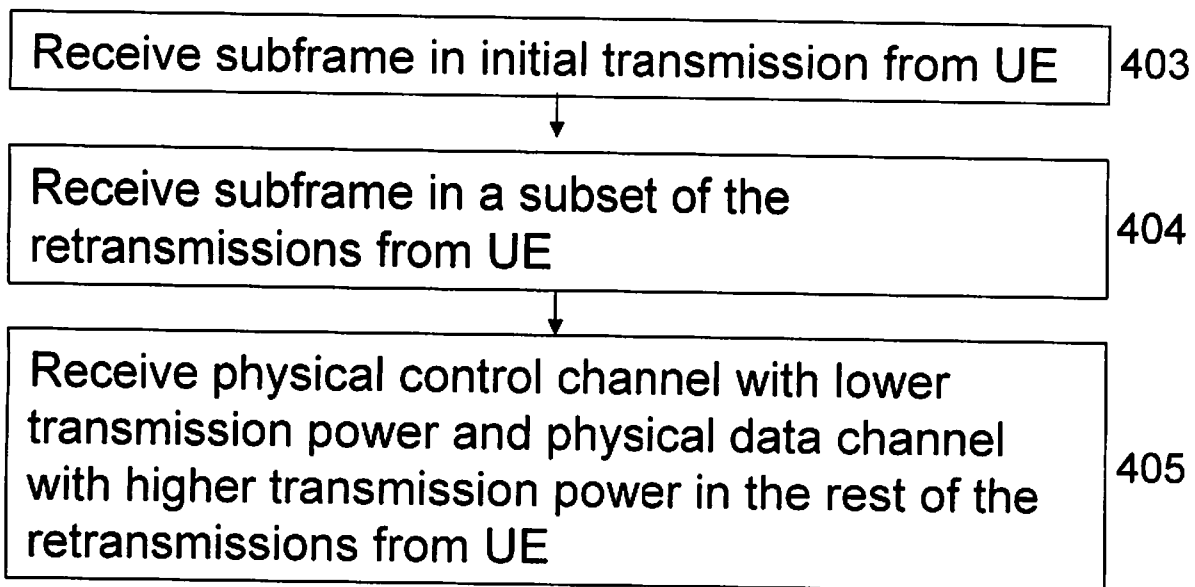


Fig. 4b

4/4

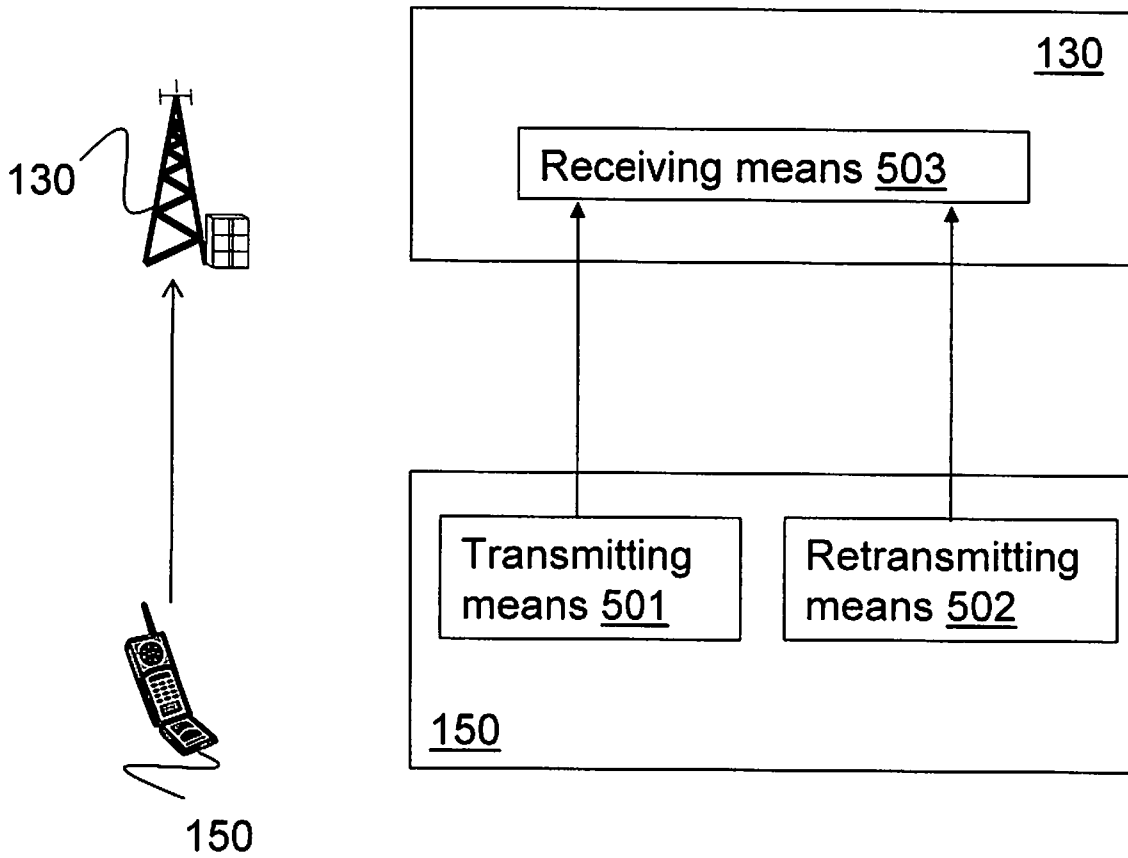


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No

PCT/SE2008/051434

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04L1/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2006/067279 A1 (KIM BONG H [KR] ET AL) 30 March 2006 (2006-03-30) page 1, left-hand column, paragraph 5 - right-hand column, paragraph 10 page 3, right-hand column, paragraph 42 - page 4, left-hand column, paragraph 48 page 4, right-hand column, paragraph 50 - paragraph 51	1-28
Y	WO 2006/031177 A (ERICSSON TELEFON AB L M [SE]; DAHLMAN ERIK [SE]; ENGLUND EVA [SE]; CHE) 23 March 2006 (2006-03-23) page 2, line 8 - line 32 page 6, line 14 - page 7, line 8; figure 2 ----- -/--	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

21 April 2009

Date of mailing of the international search report

28/04/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Papantoniou, Antonis

INTERNATIONAL SEARCH REPORT

International application No

PCT/SE2008/051434

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 2005/018115 A (SAMSUNG ELECTRONICS CO LTD [KR]; KIM YOUN-SUN [KR]; KWON HWAN-JOON [KR]) 24 February 2005 (2005-02-24) page 13, line 23 - line 29 page 14, line 1 - line 6 page 16, line 1 - line 5; figure 7</p> <p style="text-align: center;">-----</p>	1,8,15, 22
A	<p>EP 1 827 043 A (NTT DOCOMO INC [JP]) 29 August 2007 (2007-08-29) column 7, paragraph 45 column 9, paragraph 51 - paragraph 52 column 13, paragraph 87 - paragraph 89 column 14, paragraph 101 - paragraph 103 column 15, paragraph 105 - paragraph 109 column 16, paragraph 113 - paragraph 122 column 19, paragraph 148 - column 20, paragraph 152 column 20, paragraph 156 - column 21, paragraph 157</p> <p style="text-align: center;">-----</p>	1,8,15, 22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/SE2008/051434

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2006067279	A1	30-03-2006	CN 101048967 A	03-10-2007
			EP 1790106 A2	30-05-2007
			JP 2008514104 T	01-05-2008
			WO 2006031074 A2	23-03-2006
			KR 20060025035 A	20-03-2006
WO 2006031177	A	23-03-2006	AT 421199 T	15-01-2009
			EP 1790108 A1	30-05-2007
			US 2007242652 A1	18-10-2007
WO 2005018115	A	24-02-2005	CA 2529407 A1	24-02-2005
			CN 1813428 A	02-08-2006
			EP 1656750 A1	17-05-2006
			JP 2007503156 T	15-02-2007
			KR 20050021618 A	07-03-2005
			RU 2316116 C2	27-01-2008
EP 1827043	A	29-08-2007	US 2005041588 A1	24-02-2005
			WO 2006051827 A1	18-05-2006
			KR 20070085380 A	27-08-2007
			US 2008056182 A1	06-03-2008