




(22) **Date de dépôt/Filing Date:** 2015/07/13
(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/02/07
(45) **Date de délivrance/Issue Date:** 2018/08/07
(30) **Priorité/Priority:** 2014/08/07 (US14/454,368)

(51) **Cl.Int./Int.Cl.** *G01M 15/00* (2006.01),
B64D 15/20 (2006.01), *G01W 1/06* (2006.01)
(72) **Inventeurs/Inventors:**
GRZYCH, MATTHEW L., US;
MASON, JEANNE G., US;
PATNOE, MICHAEL, US
(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US
(74) **Agent:** SMART & BIGGAR

(54) **Titre : APPAREIL, SYSTEME ET METHODE D'ESTIMATION DE LA PROBABILITE D'UN EVENEMENT DE PRESENCE DE CRISTAUX DE GLACE DANS UN MOTEUR**
(54) **Title: ICE CRYSTAL ICING ENGINE EVENT PROBABILITY ESTIMATION APPARATUS, SYSTEM, AND METHOD**

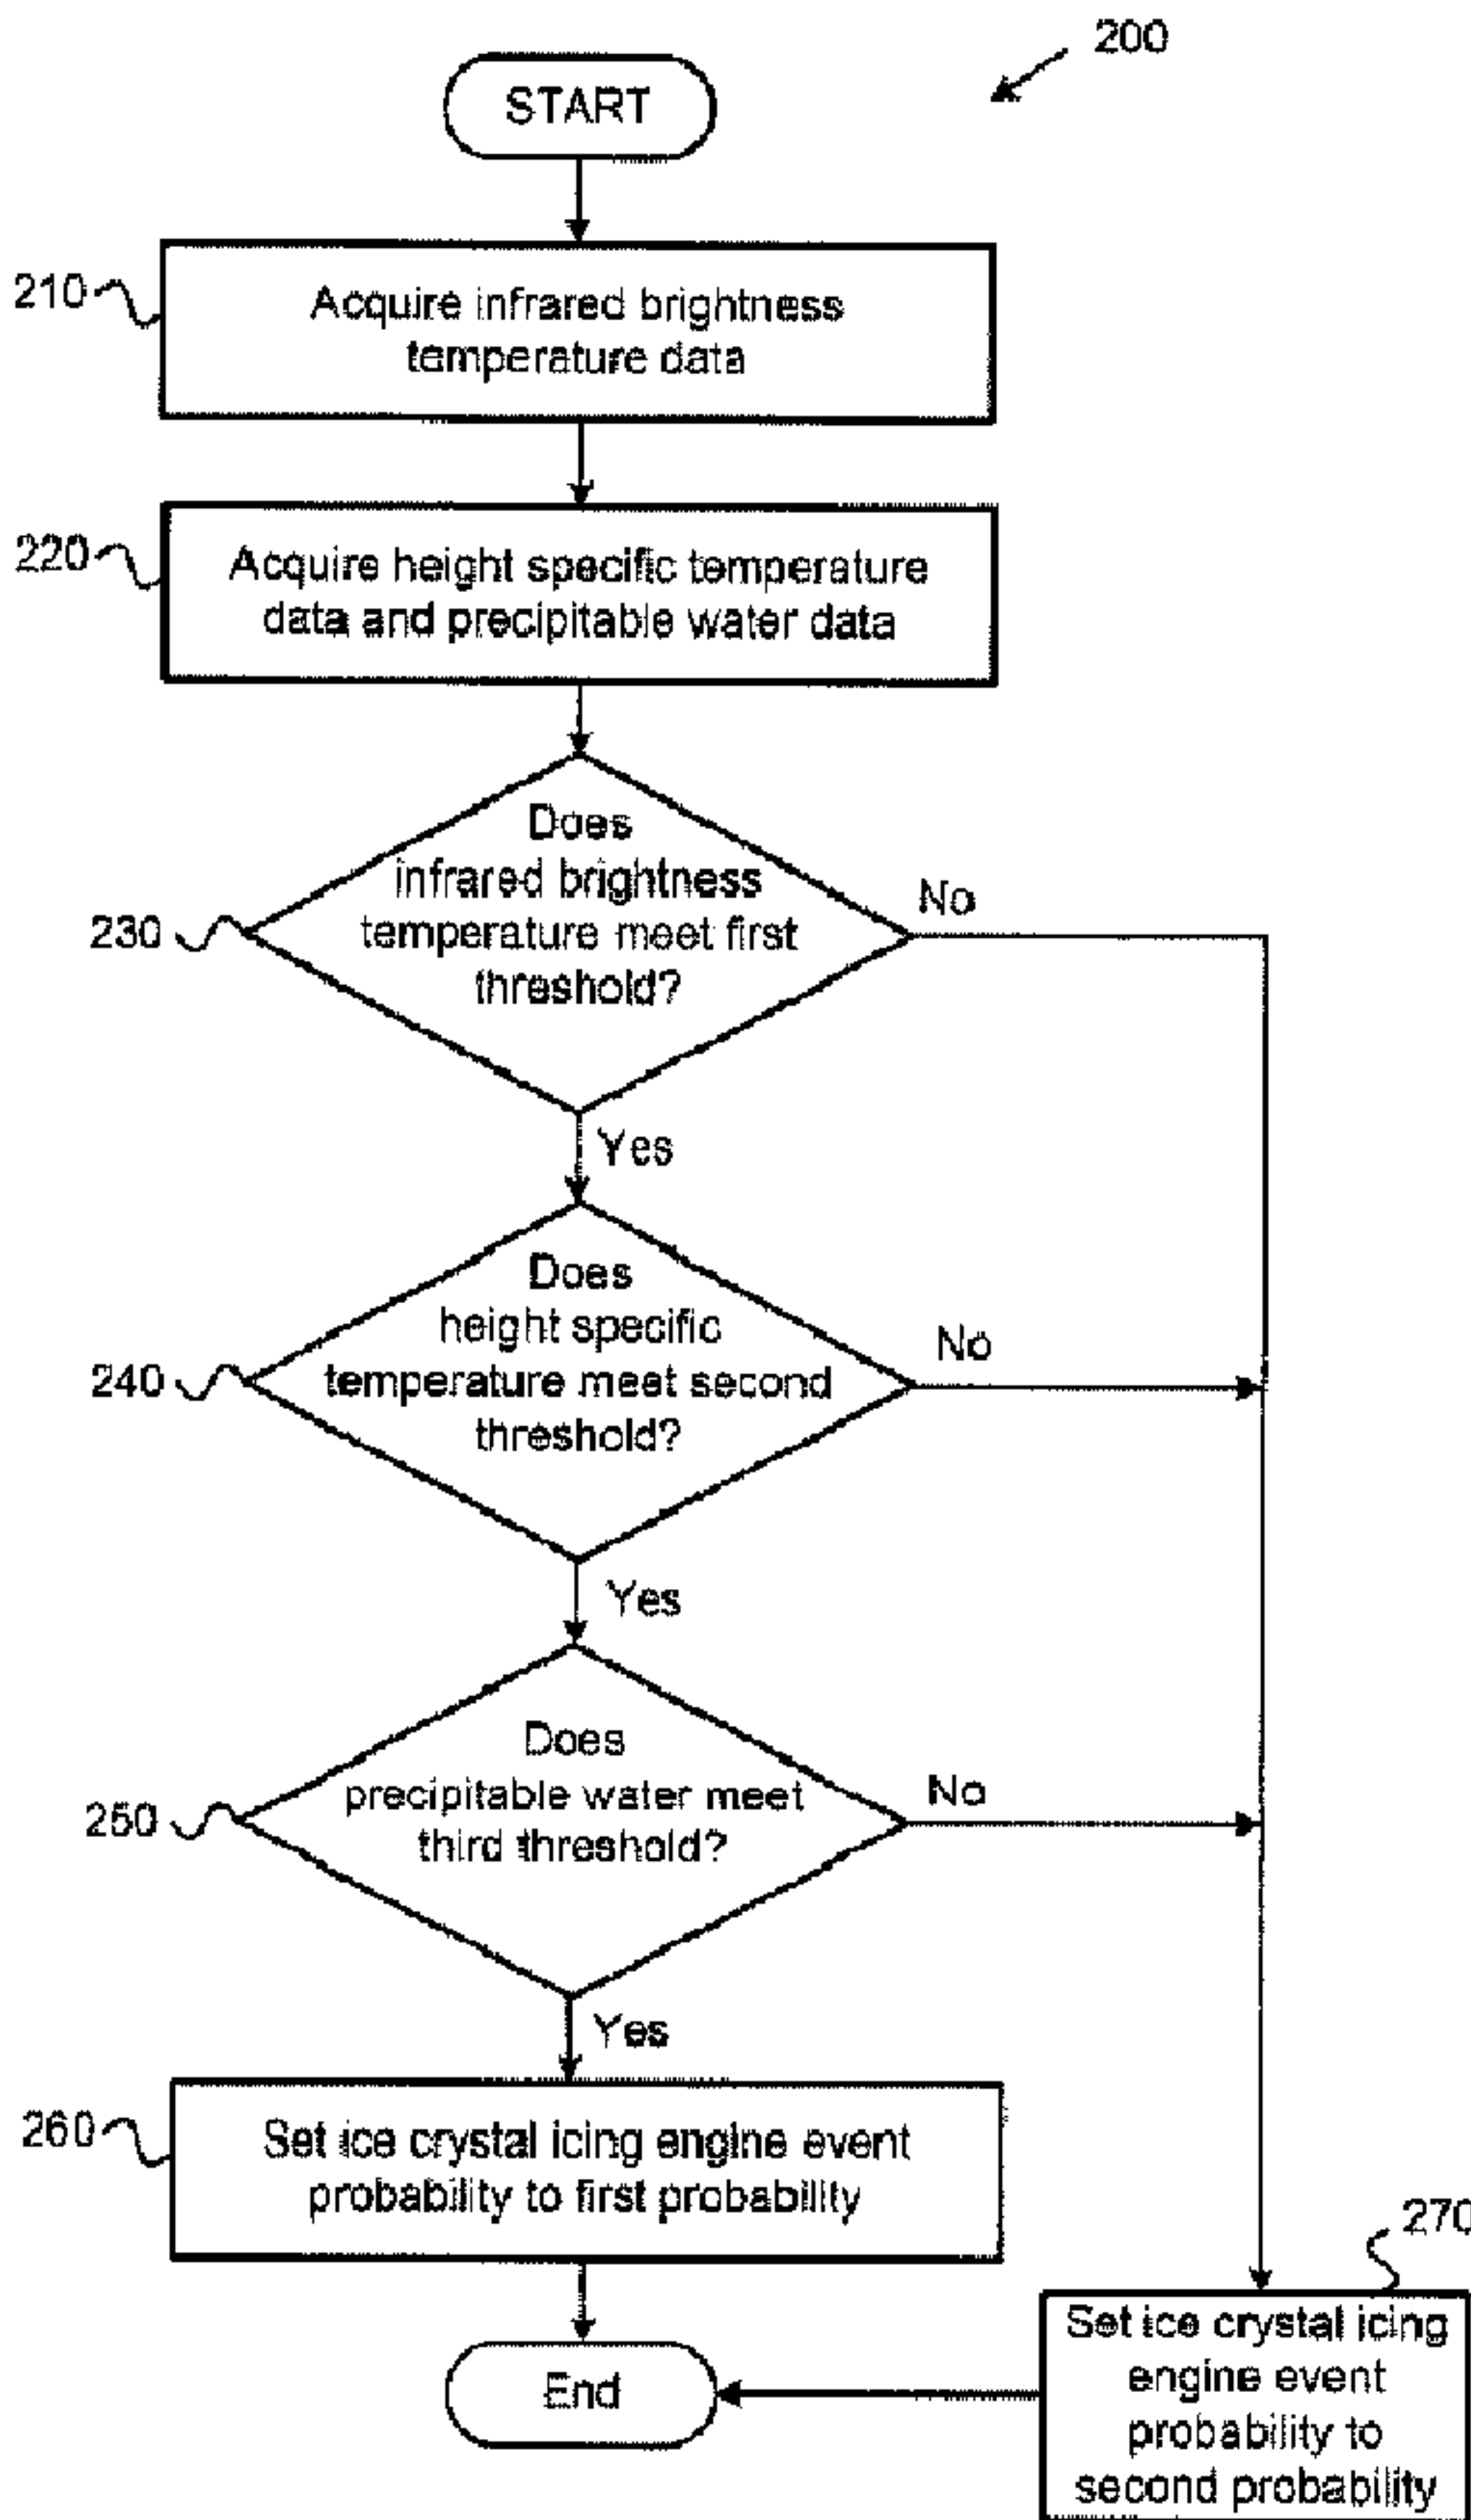

(57) **Abrégé/Abstract:**
Described herein is an apparatus that includes an estimation module that estimates a probability of an ice crystal icing engine event based on infrared satellite data, numerical weather prediction data, and empirical data corresponding with at least one actual ice

(57) **Abrégé(suite)/Abstract(continued):**

crystal icing engine event. The apparatus also includes a data product module that generates a data product that indicates the estimation of the probability of an ice crystal icing engine event. Additionally, the apparatus includes an output module that communicates the data product to a recipient.

ABSTRACT

Described herein is an apparatus that includes an estimation module that estimates a probability of an ice crystal icing engine event based on infrared satellite data, numerical weather prediction data, and empirical data corresponding with at least one actual ice crystal icing engine event. The apparatus also includes a data product module that generates a data product that indicates the estimation of the probability of an ice crystal icing engine event. Additionally, the apparatus includes an output module that communicates the data product to a recipient.

ICE CRYSTAL ICING ENGINE EVENT PROBABILITY ESTIMATION APPARATUS, SYSTEM, AND METHOD

BACKGROUND

5 This disclosure relates generally to determining atmospheric conditions, and more particularly to determining ice water content in the atmosphere and estimating the probability of ice crystal icing engine events.

 Ice water content in the atmosphere is defined as the concentration of ice particles in the atmosphere. Certain regions of the atmosphere tend to have higher
10 ice water content than other regions.

 Regions of the atmosphere with low ice water content may be safer to the flight of aircraft. As an example, high ice water content may be linked to ice crystal icing events within engines of aircraft. Such an ice crystal icing engine event occurs when concentrations of ice particles in the air melt after entering an aircraft engine
15 and refreeze on surfaces of the engine, resulting in an effect on engine operating characteristics. More specifically, an ice crystal icing engine event can be defined as when glaciated or mixed phase cloud particles (e.g., lacking significant amounts of supercooled liquid and airframe icing) are accreted within the engine. Such events inside the engine can cause degradation of the engine.

20

SUMMARY

The subject matter of the present application has been developed in response to the present state of the art, and in particular, in response to shortcomings of conventional atmospheric ice water determination systems and/or systems for
5 estimating the probability of ice crystal icing engine events. One such shortcoming includes the inability of conventional atmospheric ice water determination systems to accurately determine (e.g., predict) or detect regions of the atmosphere that contain small-particle, high-concentration ice water content or high concentrations of small-
10 particle ice water, and thus regions of the atmosphere that may impose a higher probability of ice crystal icing engine events. Some widely-available weather and atmospheric condition detection systems, such as on-board radar, may be capable of detecting concentrations of ice water with large ice particles. However, such systems do not adequately detect concentrations of ice water with small ice particles.

15 Many weather and atmospheric condition detection systems cannot rely on empirically-observed data associated with actual ice crystal icing engine events because such events often occur in remote regions of the atmosphere, such as over remote stretches of tropical bodies of water, where empirical observations of weather and atmospheric conditions are unavailable. For example, remote locations
20 of the earth tend to lack ground-based empirical data, such as data from weather radar coverage, weather balloon data, and surface observations. Therefore, general weather patterns or atmospheric conditions that are conducive to the formation of small-particle, high-concentration ice water content are difficult to detect.

The subject matter of the present application has been developed to provide
25 an apparatus, system, and method that overcome at least some of the above-discussed shortcomings of the prior art. More particularly, in some embodiments,

described herein is an apparatus, system, and method for determining (e.g., estimating) regions of the atmosphere that potentially contain high concentrations of small-particle ice water and thus present a higher probability of ice crystal icing engine events. In certain implementations, the apparatus, system, and method of the present disclosure does not rely on ice particle data from conventional radar detection systems to estimate the probability of ice crystal icing engine events often caused by regions with small-particle, high-concentration ice water content. Rather, in such implementations, other, more reliable, atmospheric condition data determined to be associated with the formation of small-particle, high concentration ice water content is utilized. Furthermore, although ground-based empirical data may be unavailable, in some implementations, the apparatus, system, and method of the present disclosure utilizes available empirical data (e.g., flight-based empirical data) directly associated with and/or obtained during actual ice crystal icing events in engines of aircraft for estimating the probability of ice crystal icing engine events.

15 In view of the foregoing improvements over the prior art, in some embodiments, the present disclosure establishes weather patterns or atmospheric conditions for estimating the probability of ice crystal icing engine events (which may be directly or indirectly based on an estimation of small-particle, high-concentration ice water content) on a global scale, and thus determining in near real-time conditions conducive to ice crystal icing events in engines of an aircraft on a global scale. Generally, as established by the present disclosure, the highest probability of ice crystal icing engine events occurs during flight in atmospheric conditions associated with convective cloud weather systems, such as so-called mesoscale convective systems, which are found mainly in warm and moist regions of the atmosphere. Although many variables may affect the formation and evolution of convective cloud weather systems that induce atmospheric regions of high-

concentration, small-particle ice water content, it has been found that a combination of only some of the variables (e.g., infrared cloud top temperature data from satellites, precipitable water data, and height-specific temperature data) dominate, and thus only these variables are used to determine potential regions of high probability of ice crystal icing engine events associated with high-concentration, small-particle ice water content on a map.

These regions can represent high probabilities for ice crystal icing engine events, which can be associated with concentrations of small particles (at or just above 100 nm) of ice water greater than about 1 g/m³, with embedded higher concentrations, in certain implementations. Ice crystal icing events within engines (i.e., ice crystal icing engine events) may occur during flight within long stretches (e.g., at least 100 nautical miles) at lower concentrations (e.g., about 1 g/m³) of small-particle ice water content. Alternatively, ice crystal icing engine events may occur during flight within shorter stretches (e.g., much less than 100 nautical miles) at higher concentrations (e.g., greater than about 3 g/m³) of small-particle ice water content. Or finally, ice crystal icing engine events may occur during flight through long stretches of lower concentration ice water content with embedded regions of high ice water content.

Concurrently determining regions around the earth that introduce a high enough probability of ice crystal icing engine events allows aircraft to reroute in flight, or flight route planners to prepare routes in advance, to avoid such regions.

According to one embodiment, an apparatus includes an estimation module that estimates a probability of an ice crystal icing engine event based on infrared satellite data, numerical weather prediction data, and empirical data corresponding with at least one actual ice crystal icing engine event. The apparatus also includes a data product module that generates a data product that indicates an estimation of

the probability of an ice crystal icing engine event. Additionally, the apparatus includes an output module that communicates the data product to a recipient.

In some implementations of the apparatus, the infrared satellite data includes infrared brightness temperature of the atmosphere and the numerical weather
5 prediction data includes height-specific temperature of the atmosphere and precipitable water in the atmosphere. The estimation module may execute a comparison between the infrared brightness temperature of the atmosphere, height-specific temperature of the atmosphere, and precipitable water in the atmosphere to respective predetermined thresholds. The estimation module can estimate the
10 probability of an ice crystal icing engine event based on the comparison. The respective predetermined thresholds are based on the empirical data corresponding with actual ice crystal icing engine events in some implementations.

According to certain implementations of the apparatus, the probability of an ice crystal icing engine event is identifiable as one of at least a first ice crystal icing
15 engine event probability and a second ice crystal icing engine event probability. The estimation module estimates the probability of an ice crystal icing engine event as the second ice crystal icing engine event probability if any one of the infrared brightness temperature of the atmosphere, height-specific temperature of the atmosphere, and precipitable water in the atmosphere does not meet a
20 corresponding one of the respective predetermined thresholds. In contrast, the estimation module estimates the probability of an ice crystal icing engine event as the first ice crystal icing engine event probability if all of the infrared brightness temperature of the atmosphere, height-specific temperature of the atmosphere, and precipitable water in the atmosphere meet the respective predetermined thresholds.
25 The first ice crystal icing engine event probability can correspond with a higher probability of an ice crystal icing engine event, and the second ice crystal icing

engine event probability can correspond with a lower probability of an ice crystal icing engine event. The predetermined threshold corresponding with the infrared brightness temperature is between about 200 K and about 220 K in some implementations, and is about 209 K in certain implementations. The predetermined
5 threshold corresponding with the height-specific temperature is between about -20°C at 500 mb and about 0°C at 500 mb in some implementations, and is about -10°C at 500 mb in certain implementations. The predetermined threshold corresponding with the precipitable water is between about 25 mm and about 45 mm in some implementations, and is about 35 mm in certain implementations.

10 In some implementations, the estimation module concurrently estimates the probability of an ice crystal icing engine event at a plurality of locations across earth. The comparison can be executed for each of the plurality of locations. The apparatus includes a verification module that verifies the accuracy of the probability of an ice crystal icing engine event based on a physical measurement of at least one
15 condition in the atmosphere in some implementations. According to certain implementations, the estimation module estimates the probability of an ice crystal icing engine event based on a type of engine powering an aircraft capable of flight in the atmosphere.

Furthermore, in some implementations, the data product includes one of an
20 electronic binary data file and an image file.

According to another embodiment, a system includes an aircraft, an estimation module, and an output module. The estimation module estimates a probability of an ice crystal icing engine event based on infrared brightness temperature of the atmosphere, height-specific temperature of the atmosphere,
25 precipitable water in the atmosphere, and empirical data corresponding with at least one actual ice crystal icing engine event. The output module communicates an

estimation of the probability of an ice crystal icing engine event to the aircraft. The estimation module estimates the probability of an ice crystal icing engine event based on a type of engine powering the aircraft in some implementations.

In yet another embodiment, a method includes acquiring infrared satellite data and
5 numerical weather prediction data. The method also includes comparing the infrared satellite data and numerical weather prediction data to respective predetermined thresholds. Additionally, the method includes estimating the probability of an ice crystal icing event based on a comparison between the infrared satellite data and numerical weather prediction data to the respective predetermined thresholds.

10 According to some implementations of the method, the infrared satellite data includes infrared brightness temperature data, and the numerical weather prediction data includes height-specific temperature data and precipitable water data. The method may further include setting the probability of an ice crystal icing event to indicate a higher probability of an ice crystal icing event when each of the infrared
15 brightness temperature data, height-specific temperature data, and precipitable water data meets the respective predetermined thresholds, and setting the probability of an ice crystal icing event to indicate a lower probability of an ice crystal icing event when at least one of the infrared brightness temperature data, height-specific temperature data and precipitable water data does not meet the respective
20 predetermined thresholds. In certain implementations, the infrared brightness temperature data is acquired from a plurality of satellites, and the height-specific temperature data and precipitable water data is acquired from a global numerical weather prediction model.

In some implementations of the method, the ice crystal icing event is an ice
25 crystal icing event on an engine of an aircraft. In yet certain implementations of the

method, the ice crystal icing event is an ice crystal icing event on a non-engine component of an aircraft.

In another embodiment, there is provided an apparatus including an estimation module that estimates a probability of an ice crystal icing engine event
5 based on infrared satellite data, numerical weather prediction data, and empirical data corresponding with actual ice crystal icing engine events. The infrared satellite data includes infrared brightness temperature of atmosphere. The numerical weather prediction data includes height-specific temperature of atmosphere and precipitable water in atmosphere. The estimation module executes a comparison
10 between the infrared brightness temperature of atmosphere, the height-specific temperature of atmosphere, and the precipitable water in atmosphere to respective predetermined thresholds. The estimation module then estimates the probability of an ice crystal icing engine event based on the comparison. The apparatus further includes a data product module that generates an electronic data file indicating the
15 estimation of the probability of an ice crystal icing engine event. The apparatus further includes an output module that communicates the electronic data file over an electronic data communication channel to at least one aircraft-monitoring recipient to allow the at least one aircraft-monitoring recipient to route and/or reroute at least one aircraft to avoid at least one region where the estimation of the probability of an ice
20 crystal icing engine event exceeds a threshold probability.

In another embodiment, there is provided a system including an aircraft and an estimation module that estimates a probability of an ice crystal icing engine event based on infrared brightness temperature of atmosphere, height-specific temperature of atmosphere, precipitable water in atmosphere, and empirical data
25 corresponding with at least one actual ice crystal icing engine event. The estimation module executes a comparison between the infrared brightness temperature of

atmosphere, the height-specific temperature of atmosphere, and the precipitable water in atmosphere to respective predetermined thresholds. The estimation module then estimates the probability of an ice crystal icing engine event based on the comparison. The system further includes an output module that communicates the
5 estimation of the probability of an ice crystal icing engine event to the aircraft to allow the aircraft to route and/or reroute to avoid at least one region where the estimation of the probability of an ice crystal icing engine event exceeds a threshold probability.

In another embodiment, there is provided a method involving acquiring
10 infrared satellite data and numerical weather prediction data and comparing the infrared satellite data and the numerical weather prediction data to respective predetermined thresholds. The infrared satellite data includes infrared brightness temperature data, and the numerical weather prediction data includes height-specific temperature data and precipitable water data. The method further involves
15 estimating a probability of an ice crystal icing event based on a comparison between the infrared satellite data and the numerical weather prediction data to the respective predetermined thresholds. The method further involves setting the probability of an ice crystal icing event to indicate a higher probability of an ice crystal icing event when each of the infrared brightness temperate data, the height-specific temperature
20 data, and the precipitable water data meets the respective predetermined thresholds, and setting the probability of an ice crystal icing event to indicate a lower probability of an ice crystal icing event when at least one of the infrared brightness temperature data, the height-specific temperature data and the precipitable water data does not meet the respective predetermined thresholds. The method further
25 involves converting the probability of an ice crystal icing event into an electronic data file and communicating the electronic data file to at least one aircraft-monitoring

recipient over an electronic data communication channel to allow the at least one aircraft-monitoring recipient to route and/or reroute at least one aircraft to avoid at least one region where the probability of an ice crystal icing event exceeds a threshold probability.

5 The described features, structures, advantages, and/or characteristics of the subject matter of the present disclosure may be combined in any suitable manner in one or more embodiments and/or implementations. In the following description, numerous specific details are provided to impart a thorough understanding of embodiments of the subject matter of the present disclosure. One skilled in the
10 relevant art will recognize that the subject matter of the present disclosure may be practiced without one or more of the specific features, details, components, materials, and/or methods of a particular embodiment or implementation. In other instances, additional features and advantages may be recognized in certain embodiments and/or implementations that may not be present in all embodiments or
15 implementations. Further, in some instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the subject matter of the present disclosure. The features and advantages of the subject matter of the present disclosure will become more fully apparent from the following description and appended claims, or may be learned by the practice of the subject
20 matter as set forth hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the advantages of the subject matter may be more readily understood, a more particular description of the subject matter briefly described above will be rendered by reference to specific embodiments that are illustrated in
5 the appended drawings. Understanding that these drawings depict only typical embodiments of the subject matter, they are not therefore to be considered to be limiting of its scope. The subject matter will be described and explained with additional specificity and detail through the use of the drawings, in which:

Figure 1 is a schematic diagram of a system for estimating a probability of ice
10 crystal icing engine events according to one embodiment;

Figure 2 is a schematic block diagram of an apparatus for estimating a probability of ice crystal icing engine events according to yet another embodiment;

Figure 3 is a schematic flow diagram of a system for estimating a probability of ice crystal icing engine events according to one embodiment; and

15 Figure 4 is a schematic flow diagram of a method for estimating a probability of ice crystal icing engine events according to one embodiment.

DETAILED DESCRIPTION

Reference throughout this specification to “one embodiment,” “an embodiment,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present disclosure. Appearances of the phrases “in one embodiment,” “in an embodiment,” and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment. Similarly, the use of the term “implementation” means an implementation having a particular feature, structure, or characteristic described in connection with one or more embodiments of the present disclosure, however, absent an express correlation to indicate otherwise, an implementation may be associated with one or more embodiments.

Referring to Figure 1, and according to one embodiment, a system 10 for estimating a probability of ice crystal icing engine events includes an atmospheric condition analysis station 20. In the illustrated implementation, the atmospheric condition analysis station 20 is positioned and remains on the ground 12. However, in other implementations, the atmospheric condition analysis station 20 can be located on an aircraft, such as aircraft 16, which can be flown in the atmosphere 13 above the ground 12. When separate from the aircraft 16, such as in the illustrated implementation, the atmospheric condition analysis station 20 can communicate information to and receive information from the aircraft via any of various communication signals and techniques, such as via the transceiver 24.

The system 10 also includes a satellite information station 21 on the ground 12 that receives information from at least one satellite, such as at least one of satellites 26, 28. The satellites 26, 28, 34 of the system orbit the earth above the atmosphere 13 and collect data concerning various conditions of the atmosphere 13. According to one implementation, the information collected by the satellites 26, 28

and received by the satellite information station **21** via a receiver **22** includes infrared satellite imagery data. More specifically, the satellites **26**, **28** may collect infrared brightness temperature data of the atmosphere **13**, and forward that data to the satellite information station **21**. Infrared brightness temperature data includes data
5 or imagery, acquired through electromagnetic radiation techniques, representing atmospheric temperatures at the tops of cloud formations. Generally, the colder the temperatures indicated by the infrared brightness temperature data, the higher the cloud formation, and conversely, the warmer the temperatures indicated by the infrared brightness temperature data, the lower the cloud formation. Although two
10 satellites **26**, **28** for collecting infrared brightness temperature data are shown, any number of satellites can be used to collect the data. For example, in one implementation, five satellites are used to collect infrared brightness temperature data. Basically, the more satellites used to collect the data, the larger the area of the atmosphere covered by the satellites. Because in some regions of the earth,
15 such as extreme north and south regions, the probability of ice crystal icing engine events is low, the infrared brightness temperature data can be collected from satellites covering only the regions of the earth, such as middle regions of the earth between about **55° S** to about **55° N**, where the probability of ice crystal icing engine events is higher.

20 The satellite information station **21** forwards infrared brightness temperature data received from the satellites **26**, **28** to the atmospheric condition analysis station **20**. According to one implementation, for example, the satellite information station **21** can be associated with Space Science and Engineering Center of the University of Wisconsin-Madison. The infrared brightness temperature data can be
25 communicated to the atmospheric condition analysis station **20** using any of various communication techniques and protocols known in the art. The satellite information

station **21** generates an electronic data file containing the infrared brightness temperature data, which is communicated to and processed by the atmospheric condition analysis station **20**.

The system **10** can additionally include a global forecast station **30** that
5 generates numerical weather prediction data. The numerical weather prediction data includes information associated with the prediction of one or more atmospheric weather conditions. In some implementations, the numerical weather prediction data includes predictions of the height-specific temperature of the atmosphere and the precipitable water in the atmosphere. The global forecast station **30** can
10 generate the numerical prediction data based on the application of a weather forecast model that receives as input any of various factors. In one implementation, for example, the global forecast station **30** is associated with the National Climatic Data Center of the National Oceanic and Atmospheric Administration (NOAA), and the weather forecast model can be produced by the National Centers for
15 Environmental Prediction. According to certain implementations, at least one factor is based on information received from one or more satellites, such as satellite **34**, and collected by a receiver **32**. The numerical weather prediction data generated by the global forecast station **30** can be communicated to and processed by the atmospheric condition analysis station **20**.

20 The atmospheric condition analysis station **20** includes an apparatus **40** that estimates a probability of ice crystal icing engine events in at least one region of the atmosphere. The probability estimation can be based at least partially on an estimation or prediction of ice water content in the atmosphere **13**, and more specifically, in convective cloud formations **14** in the atmosphere. Generally, the
25 apparatus **40** generates a real-time or near real-time ice crystal icing engine event estimate based on data received from the satellite information station **21** and the

global forecast station **30**, as well as empirical data corresponding with actual ice crystal icing engine events stored on or accessible by the apparatus. The ice crystal icing engine event estimate can be communicated to the aircraft **16** via the transceiver **24** and used to reroute the aircraft around corresponding regions of high probability, such as convective cloud formations **14**, should the estimate be associated with a threshold probability of ice crystal icing events on the engines of the aircraft. Also, in some implementations, as an aircraft **16** is passing through cloud formations associated with an estimated probability of ice crystal icing events that exceed the threshold, information can be communicated to an engine health monitoring unit on the aircraft, other systems of the aircraft, or recipients other than the aircraft for monitoring purposes. Additionally, or alternatively, the ice crystal icing engine event estimate can be communicated to an aircraft flight scheduler or dispatch system to schedule aircraft routes that avoid convective cloud formations **14** associated with a threshold probability of ice crystal icing events on engines of aircraft. Further, avoiding cloud formations associated with the threshold probability of ice crystal icing engine events to reduce the probability of ice crystal icing events in engines also reduces the probability of ice crystal icing events in non-engine components. Moreover, in certain implementations, the apparatus **40** may be configured to estimate probabilities for ice crystal icing non-engine events to avoid cloud formations associated with a threshold probability of ice crystal icing events on non-engine components of aircraft. The modules of the apparatus **40**, as will be explained in more detail below, can be executed on a computer machine running any of various operating systems, such as Linux®.

Although the satellite information station **21** and the global forecast station **30** are shown as being physically separate from the atmospheric condition analysis station **20**, in some embodiments one or both of the satellite information station and the

global forecast station can form part of, or be integrated into, the atmospheric condition analysis station.

Referring to Figure 2, according to one embodiment, the apparatus **40** includes an infrared data module **42**, a numerical data module **44**, an ice crystal icing (ICI) estimation module **46**, a verification module **48**, a data product module **50**, and an output module **52**. The infrared data module **42** receives infrared data input **54**, and in some implementations converts the infrared data input into a different format. The infrared data input **54** can be data collected from satellites regarding conditions of the atmosphere. In some implementations, the infrared data input **54** includes infrared satellite imagery data. The infrared data module **42** communicates information corresponding with the infrared data input **54** to the ICI estimation module **46**.

Similar to the infrared data module **42**, the numerical data module **44** receives numerical data input **56**, and in some implementations converts the numerical data input into a different format. The numerical data input **56** can be data collected from one or more satellites, and/or other sources, regarding predictions of atmospheric weather conditions. In some implementations, the numerical data input **56** includes predictions of the height-specific temperature of the atmosphere and the precipitable water in the atmosphere. The numerical data input **56** may also include predictions of other atmospheric and weather conditions, such as lifted index and convective available potential energy. The numerical data module **44** communicates information corresponding with the numerical data input **56** to the ICI estimation module **46**.

The ICI estimation module **46** receives information regarding the infrared data input **54** and the numerical data input **56**, as well as empirical data input **58**. Based on the infrared data information, numerical data information, and the empirical data

input **58**, the ICI estimation module **46** determinations or estimates the probability of ice crystal icing engine events for at least one region in the atmosphere. In some implementations, the ice crystal icing engine event estimate generated by the ICI estimation module **46** can be represented as an estimated probability of ice crystal icing events in engines of aircraft. Alternatively, or additionally, the ice crystal icing engine event estimate generated by the ICI estimation module **46** can be represented as an estimated concentration of small-particle ice water. The ICI estimation module **46** can compare the infrared data input **54** and numerical data input **56** to thresholds. Based on the comparison between the infrared data input **54** and numerical data input **56** and the thresholds, the ICI estimation module **46** estimates the probability of ice crystal icing engine events, which can be based on predicted ice water content, in the atmosphere. The thresholds can be predetermined based on the empirical data input **58**, which can be information regarding atmospheric and other conditions empirically obtained during previously-occurring actual ice crystal icing events in engines of aircraft. The information of the empirical data input **58** can be stored in and accessible from a database. Additionally, the thresholds can be predetermined based on engine type input **60**, which includes a type of engine powering an aircraft under consideration. For example, when estimating a probability of ice crystal icing events in engines of aircraft, the probabilities for ice crystal icing engine events, and thus the thresholds, may vary based on the type of engine of the aircraft.

The verification module **48** verifies the accuracy of ice crystal icing engine event estimations generated by the ICI estimation module **46**. In one implementation, the verification module **48** receives measured data input **62** from a measured data source (not shown). The measured data input **62** may include measurements of conditions of the atmosphere obtained through physical detection

means. In one implementation, the measured data input **62** includes measurements of certain conditions of the atmosphere indirectly related to ice crystal icing engine events and/or ice water content in the atmosphere. In yet some implementations, the measured data input **62** may include measurements of conditions directly related to ice crystal icing engine events and/or ice water content in the atmosphere.

According to one embodiment, the measured data input **62** may be used to update the process used by the ICI estimation module **46** for estimating the probability of ice crystal icing engine events in regions of the atmosphere. For example, the thresholds applied by the ICI estimation module **46** to estimate the probability of ice crystal icing engine events may be updated or originally calculated based at least partially on the measured data input **62**. The measured data input **62** can include various atmospheric and weather conditions.

The data product module **50** generates a data product based on the ice crystal icing engine event estimation of the ICI estimation module **46**. The data product indicates the ice crystal icing engine event estimation and/or the ice water content estimation. In some implementations, the data product is an electronic data file, such as a binary file and/or image file. Accordingly, the data product can provide a numerical and/or visual indication of the ice crystal icing engine event estimation and/or ice water content estimation generated by the ICI estimation module **46**.

The output module **52** communicates data products **64** to any of various recipients. The data products **64** may be communicated over any of various data communication lines using any of various communication protocols. For example, the data products **64** may be communicated over the air and/or via landline cables to an aircraft or aircraft dispatch system. The recipients may then utilize the data products **64** to make determinations regarding routing and/or rerouting of aircraft to

avoid atmospheric regions where the estimated probability of ice crystal icing engine events meets some threshold probability and/or estimated concentrations of ice water content meet some threshold concentration.

Referring to Figure 3, one embodiment of a system **100** for estimating the probability of ice crystal icing engine events in the atmosphere is shown. The system **100** is analogous to the system **10**. Accordingly, the description of the features of the system **10** may apply to the analogous features of the system **100**. For example, like the apparatus **40** of system **10**, the system **100** includes an infrared data module **116**, a numerical data module **122**, an ICI estimation module **128**, and a data produce module **132**, which may operate in a manner similar to the analogous modules of the system **10**.

The infrared data module **116** of the system **100** receives satellite data from one or more satellites. For example, as shown, the infrared data module **116** of the illustrated embodiment receives at least first satellite data **110** from a first satellite and second satellite data **112** from a second satellite. However, the infrared data module **116** is equipped to receive satellite data from any number of satellites as indicated by Nth satellite data **114** from an Nth satellite. The satellite data **110**, **112**, **114** can be infrared satellite imagery data, such as infrared brightness temperature, for respective regions of the atmosphere across the earth. Each satellite obtains infrared satellite imagery data for a different region of the atmosphere such that the combination of infrared satellite imagery data from all the satellites can cover a substantial portion (e.g., nearly all) of the earth. The satellite data **110**, **112**, **114** can be in any of various formats or electronic data files for processing by the infrared data module **116**. In one implementation, the satellite data **110**, **112**, **114** is in a McIDAS AREA® format and communicated to the infrared data module **116** in a secure environment, such as an Abstract Data Distribution Environment (ADDE).

Depending on the format of the satellite data **110**, **112**, **114**, the infrared data module **116** can convert the satellite data into a different format conducive for importing into a grid file. For example, the infrared data module **116** can include a conversion tool, such as McIDAS-X® software, that converts raw McIDAS AREA

5 files from the satellite data **110**, **112**, **114** into NetCDF® files (e.g., machine-independent data format that supports the creation, access, and sharing of array-oriented scientific data). The grid file includes infrared satellite imagery data values for a plurality of sections or points forming a geographical grid. In other words, the grid file includes at least one infrared satellite imagery data value for each section or

10 point of a geographical grid. The data values can be represented by binary digits or graphical images. According to one implementation, the grid file includes an infrared brightness temperature value for each section of a geographical infrared brightness temperature (IBT) grid **118** covering the regions covered by the satellite data from the satellites. The IBT grid **118** can have any number of sections, with each section

15 of the IBT grid **118** covering a desired area, such as an **8** km x **8** km area. The greater the number of sections, the more detailed the resulting IBT grid **118**, and potentially the more accurate the estimation of the probability of ice crystal icing engine events as will be explained in more detail below. In other implementations, each section of the IBT grid **118** can be larger or smaller than **8** km x **8** km. Also,

20 the satellite data can be downloaded by or received at the infrared data module **116** at a desired frequency, such as once every hour. In this manner, the IBT grid **118** can be updated according to the desired frequency.

The numerical data module **122** receives numerical weather prediction data from a global forecast station **30**. In the illustrated embodiment, the numerical

25 weather prediction data is global forecast system (GFS) data **120** generated by the NOAA. The GFS data **120** can include, among other atmospheric condition data,

height-specific temperature data and precipitable water data. Further, the GFS data **120** includes height-specific temperature data values and precipitable water data values for various regions of the atmosphere across the earth. The GFS data **120** can be in any of various formats or electronic data files for processing by the numerical data module **122**. In one implementation, the GFS data **120** is in a GRIB2® format, or other similar binary format.

Depending on the format of the GFS data **120**, the numerical data module **122** can convert the GFS data into a different format conducive for importing into respective grid files, or extract numerical data from the GFS data for importing into respective grid files. For example, the numerical data module **122** can include an extraction tool, such as a “degrib” Perl® script, that extracts desired numerical data from the GFS data **120**. The desired numerical data extracted from the GFS data **120** can include numerical values for height-specific temperature and precipitable water. Accordingly, the grid files include a grid file with height-specific temperature data values, and a grid file with precipitable water data values, for a plurality of sections or points forming a geographical grid. In other words, each of the grid files includes a respective one of at least one height-specific temperature data value and at least one precipitable water data value for each section or point of the respective geographical grid. The data values can be represented by binary digits or graphical images.

According to one implementation, one grid file includes a height-specific temperature data value at a desired height, such as **500** mb (about **18,000** feet above ground), for each section of a temperature (T) grid **124**, and another grid file includes a precipitable water data value, such as a size of the precipitable water, for each section of a precipitable water (PW) grid **126**. Each of the T grid **124** and PW grid **126** covers the regions covered by the GFS data **120**. Additionally, each of the

T grid **124** and PW grid **126** can have any number of sections, with each section of the grids covering a desired area, such as an **8 km x 8 km** area. The greater the number of sections, the more detailed the resulting T grid **124** and PW grid **126**, and potentially the more accurate the estimation of the probability of ice crystal icing engine events as will be explained in more detail below. In other implementations, each section of the T grid **124** and PW grid **126** can be larger or smaller than **8 km x 8 km**. The GFS data **120** can be downloaded by or received at the numerical data module **122** at a desired frequency, such as two times every day. In this manner, the T grid **124** and PW grid **126** can be updated according to the desired frequency.

10 The IBT grid **118** generated by the infrared data module **116** and the T grid **124** and PW grid **126** generated by the numerical data module **122** are communicated to and received by the ICI estimation module **128**. The ICI estimation module **128** utilizes empirical data **146** to determine thresholds associated with each of the grids generated by the infrared data module **116** and numerical data module
15 **122**. For example, in the illustrated embodiment, the ICI estimation module **128** determines an infrared brightness temperature threshold associated with the IBT grid **118**, a height-specific temperature threshold associated with the T grid **124**, and a precipitable water threshold associated with the PW grid **126** based on the empirical data **146**. The thresholds associated with each of the grids may also be
20 based on engine type **142** and measured data **144**. As shown, in some embodiments, the ICI estimation module **128** receives an engine type **142** and measured data **144**, and determines the thresholds based on the engine type and measured data. The empirical data **146** can be physically-obtained data directly associated with and/or obtained during actual ice crystal icing events in engines of
25 aircraft. For example, the empirical data **146** includes empirical measurements of atmospheric conditions or other conditions taken during actual ice crystal icing

engine events. In some implementations, the empirical data **146** includes data measurements obtained during at least **150** separate ice crystal icing engine events.

The thresholds determined by the ICI estimation module **128** can be associated with any of various atmospheric conditions, and have any of various values based on any number of factors. In one embodiment, the thresholds
 5 determined by the ICI estimation module **128** include the infrared brightness temperature threshold, the height-specific temperature threshold, and the precipitable water threshold. In one implementation, the infrared brightness temperature threshold is about **209** K, and in other implementations, the infrared
 10 brightness temperature threshold is between about **200** K and about **220** K. In one implementation, the height-specific temperature threshold is about -10°C at **500** mb, and in other implementations, the height-specific temperature threshold is between about -20°C and about 0°C at **500** mb. According to yet one implementation, the precipitable water threshold is about **35** mm, and in other implementations, the
 15 precipitable water threshold is between about **25** mm and **45** mm.

After the thresholds are determined, the ICI estimation module **128** separately compares each value for each section of the grids to the corresponding threshold, and generates an ICI grid **130** based on the results of the comparison. The ICI grid **130** is a geographical grid having sections configured according to the configuration
 20 of the sections of the grids generated by the infrared data module **116** and numerical data module **122**. More specifically, in some implementations, the ICI grid **130** includes the same number of sections and the same size of sections as the grids generated by the infrared data module **116** and numerical data module **122**. In this manner, the ICI grid **130** aligns with the grids generated by the infrared data module
 25 **116** and numerical data module **122** such that each section of the ICI grid corresponds with respective sections in the other grids. Accordingly, each section of

the ICI grid **130** includes ice crystal icing engine event probability, ice water content, or other similar data values corresponding with the results of the comparisons between the thresholds and data values at the corresponding sections of the grids generated by the infrared data module **116** and numerical data module **122**. In
5 some implementations where the grids generated by the infrared data module **116** and numerical data module **122** do not align with (e.g., do not have similarly configured sections as) the ICI grid **130**, the ICI estimation module **128** can use extrapolation or interpolation techniques, such as a nearest-neighbor method, to generate the ICI grid **130**.

10 The ICI estimation module **128** creates a blank ICI grid **130** and performs a comparison between the thresholds and data values of the IBT, T, and PW grids for each section of the ICI grid. For example, in one implementation, at each section or point of the blank ICW grid **130**, the ICI estimation module compares the infrared brightness temperature value from the same section of the IBT grid **118** to the
15 infrared brightness temperature threshold, compares the height-specific temperature value from the same section of the T grid **124** to the height-specific temperature threshold, and compares the precipitable water value from the same section of the PW grid **126** to the precipitable water threshold. The ICI estimation module **128** then populates each section with the overall result of the comparisons at that section.

20 The ICI estimation module **128** sets rules for determining the overall result of the comparison. According to some implementations, the ICI estimation module **128** populates each section with a first result if all the thresholds are met, and a second result if not all thresholds are met (e.g., any one of the thresholds is not met). In one implementation, the ICI estimation module **128** populates each section with a first
25 result if all the thresholds are met, a second result if a threshold number (e.g., **2** or more) of thresholds are met, and a third result if the threshold number of thresholds

are not met. The section is populated with a value, or other indication, representative of the result. For example, the first result can be represented by a binary number '1' in the section, while the second result can be represented by a binary number '0'. Alternatively, where more than two results are achievable, the results can be represented by one of three or more binary numbers, such as '0', '0.5', and '1'. It is noted that any binary numbering system using any of various values can be used to designate the results of the comparison.

According to one implementation, for each section of the ICI grid **130**, the ICI estimation module **128** populates the section with a first value (e.g., 1) if the infrared brightness temperature value from the same section of the IBT grid **118** meets (e.g., exceeds) the infrared brightness temperature threshold, the height-specific temperature value from the same section of the T grid **124** meets (e.g., exceeds) the height-specific temperature threshold, and the precipitable water value from the same section of the PW grid **126** meets (e.g., exceeds) the precipitable water threshold. In contrast, the ICI estimation module **128** populates the section with a second value (e.g., 0) if the infrared brightness temperature value from the same section of the IBT grid **118** does not meet the infrared brightness temperature threshold, the height-specific temperature value from the same section of the T grid **124** does not meet the height-specific temperature threshold, or the precipitable water value from the same section of the PW grid **126** does not meet the precipitable water threshold.

Each result value is associated with an ice crystal icing engine event probability value and/or ice water content value. Accordingly, the ICI grid **130**, when populated, provides a numerical representation of the estimation of ice crystal icing engine event probabilities and/or ice water content values at various locations across the globe. Generally, the result value is associated with a higher probability

of ice crystal icing engine events or higher ice water content value when all the thresholds are met, and associated with a lower probability of ice crystal icing engine events or lower ice water content value or ice when any one of the thresholds are not met.

5 To facilitate the viewability, compatibility, or usability of the information in the ICI grid **130**, the data product module **132** converts the binary format of the ICI grid into a product module that is more viewable, compatible, or useable than the binary information in the ICI grid **130**. In one implementation, the data product module **132** includes a conversion tool, such as GrADS ® software, that extracts data from the
 10 ICI grid **130** and presents it in a data product having a different format. For example, the data product module **132** may convert the binary designations, such as '1' and '0', from the ICI grid **130** to alphanumeric designations associated with the estimated ice crystal icing engine event probabilities (or ice water content), such as 'high' and 'low'. As another example, the data product module **132** may convert the binary
 15 designations, such as '1' and '0', from the ICI grid **130** to color-coded designations associated with the ice crystal icing engine event probabilities (or ice water content), such as a green color for a low probability of ice crystal icing engine events, and a red color for a high probability of ice crystal icing engine events. Although not shown, the values of the ICI grid **130** can be verified as described above before
 20 being extracted by the data product module **132**.

In the illustrated embodiment, the data product module **132** generates a first data product **134** and a second data product **136**. The first data product **134** is communicated to a first dispatch system **138** for processing, and the second data product **136** is communicated to a second dispatch system **140** for processing.
 25 According to one implementation, first data product **134** is an image file, such as a .PNG file or .GIF file, or data file, such as an Electronic Flight Folder® file, and the

first dispatch system **138** is a computer information delivery and management system, such as MyBoeingFleet®, that enables the transmission of flight information (e.g., rerouting information) to an aircraft. The image file of the first data product **134** may include a depiction of cloud movement based on the storage of ice crystal icing engine event probability estimations over time. Additionally, the image files may have planned aircraft route overlays.

In yet one implementation, the second data product **136** is a concise data format file, such as a GRIB2 file, and the second dispatch system **140** is an aircraft fleet management and routing system, such as provided by Jeppesen®. Although two data products and two dispatch systems are shown, in other embodiments, any number of data products can be communicated and processed by any number of dispatch systems, or other systems to which the information in the data products may be useful.

Referring to Figure **4**, a method **200** for estimating the probability of ice crystal icing engine events for aircraft flying through the atmosphere, or correspondingly ice water content in the atmosphere, is shown. The method **200** includes acquiring infrared satellite data, such as infrared brightness temperature data, at **210**. Additionally, the method **200** includes acquiring numerical weather prediction data, such as height-specific temperature data and precipitable water data, at **220**. In some implementations, the infrared satellite data is acquired from a plurality of satellites and the numerical weather prediction data is acquired from a global numerical weather prediction model.

The method **200** includes determining whether the infrared brightness temperature or other infrared brightness temperature data meets a first threshold at **230**. If the determination at **230** is positive, the method **200** proceeds to determine if a first condition of the numerical weather prediction data, such as a height-specific

temperature, meets a second threshold at **240**. If the determination at **240** is positive, the method **200** determines if a second condition of the numerical weather prediction data, such as precipitable water, meets a third threshold at **250**. If the determination at **250** is positive, the method **200** proceeds to set an estimation of the probability of an ice crystal icing engine event to a first probability, such as high, at **260** and the method ends. However, if any of the determinations at **230**, **240**, **250** is negative, the method **200** proceeds to set an estimation of the probability of an ice crystal icing engine event to a second probability, such as low, at **270** and the method ends. In an alternative embodiment, the method **200** may set an ice water content status to a first status, such as high, at **260**, and set the ice water content status to a second status, such as low, at **270**.

In the above description, certain terms may be used such as "up," "down," "upper," "lower," "horizontal," "vertical," "left," "right," "over," "under" and the like. These terms are used, where applicable, to provide some clarity of description when dealing with relative relationships. But, these terms are not intended to imply absolute relationships, positions, and/or orientations. For example, with respect to an object, an "upper" surface can become a "lower" surface simply by turning the object over. Nevertheless, it is still the same object. Further, the terms "including," "comprising," "having," and variations thereof mean "including but not limited to" unless expressly specified otherwise. An enumerated listing of items does not imply that any or all of the items are mutually exclusive and/or mutually inclusive, unless expressly specified otherwise. The terms "a," "an," and "the" also refer to "one or more" unless expressly specified otherwise. Further, the term "plurality" can be defined as "at least two."

Additionally, instances in this specification where one element is "coupled" to another element can include direct and indirect coupling. Direct coupling can be

defined as one element coupled to and in some contact with another element. Indirect coupling can be defined as coupling between two elements not in direct contact with each other, but having one or more additional elements between the coupled elements. Further, as used herein, securing one element to another
5 element can include direct securing and indirect securing. Additionally, as used herein, "adjacent" does not necessarily denote contact. For example, one element can be adjacent another element without being in contact with that element.

As used herein, the phrase "at least one of", when used with a list of items, means different combinations of one or more of the listed items may be used and
10 only one of the items in the list may be needed. The item may be a particular object, thing, or category. In other words, "at least one of" means any combination of items or number of items may be used from the list, but not all of the items in the list may be required. For example, "at least one of item A, item B, and item C" may mean item A; item A and item B; item B; item A, item B, and item C; or item B and item C.
15 In some cases, "at least one of item A, item B, and item C" may mean, for example, without limitation, two of item A, one of item B, and ten of item C; four of item B and seven of item C; or some other suitable combination.

Many of the functional units described in this specification have been labeled as modules, in order to more particularly emphasize their implementation
20 independence. For example, a module may be implemented as a hardware circuit comprising custom VLSI circuits or gate arrays, off-the-shelf semiconductors such as logic chips, transistors, or other discrete components. A module may also be implemented in programmable hardware devices such as field programmable gate arrays, programmable array logic, programmable logic devices or the like.

25 Modules may also be implemented in software for execution by various types of processors. An identified module of computer readable program code may, for

instance, comprise one or more physical or logical blocks of computer instructions which may, for instance, be organized as an object, procedure, or function. Nevertheless, the executables of an identified module need not be physically located together, but may comprise disparate instructions stored in different locations which, 5 when joined logically together, comprise the module and achieve the stated purpose for the module.

Indeed, a module of computer readable program code may be a single instruction, or many instructions, and may even be distributed over several different code segments, among different programs, and across several memory devices. 10 Similarly, operational data may be identified and illustrated herein within modules, and may be embodied in any suitable form and organized within any suitable type of data structure. The operational data may be collected as a single data set, or may be distributed over different locations including over different storage devices, and may exist, at least partially, merely as electronic signals on a system or network. 15 Where a module or portions of a module are implemented in software, the computer readable program code may be stored and/or propagated on in one or more computer readable medium(s).

The computer readable medium may be a tangible computer readable storage medium storing the computer readable program code. The computer 20 readable storage medium may be, for example, but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, holographic, micromechanical, or semiconductor system, apparatus, or device, or any suitable combination of the foregoing.

More specific examples of the computer readable medium may include but 25 are not limited to a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only

memory (EPROM or Flash memory), a portable compact disc read-only memory (CD-ROM), a digital versatile disc (DVD), an optical storage device, a magnetic storage device, a holographic storage medium, a micromechanical storage device, or any suitable combination of the foregoing. In the context of this document, a
5 computer readable storage medium may be any tangible medium that can contain, and/or store computer readable program code for use by and/or in connection with an instruction execution system, apparatus, or device.

The computer readable medium may also be a computer readable signal medium. A computer readable signal medium may include a propagated data signal
10 with computer readable program code embodied therein, for example, in baseband or as part of a carrier wave. Such a propagated signal may take any of a variety of forms, including, but not limited to, electrical, electro-magnetic, magnetic, optical, or any suitable combination thereof. A computer readable signal medium may be any computer readable medium that is not a computer readable storage medium and
15 that can communicate, propagate, or transport computer readable program code for use by or in connection with an instruction execution system, apparatus, or device. Computer readable program code embodied on a computer readable signal medium may be transmitted using any appropriate medium, including but not limited to wireless, wireline, optical fiber cable, Radio Frequency (RF), or the like, or any
20 suitable combination of the foregoing

In one embodiment, the computer readable medium may comprise a combination of one or more computer readable storage mediums and one or more computer readable signal mediums. For example, computer readable program code may be both propagated as an electro-magnetic signal through a fiber optic cable for
25 execution by a processor and stored on RAM storage device for execution by the processor.

Computer readable program code for carrying out operations for aspects of the embodiments described herein may be written in any combination of one or more programming languages, including an object oriented programming language such as Java, Smalltalk, C++ or the like and conventional procedural programming languages, such as the "C" programming language or similar programming languages (e.g., LabVIEW). The computer readable program code may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

The schematic flow chart diagrams included herein are generally set forth as logical flow chart diagrams. As such, the depicted order and labeled steps are indicative of one embodiment of the presented method. Other steps and methods may be conceived that are equivalent in function, logic, or effect to one or more steps, or portions thereof, of the illustrated method. Additionally, the format and symbols employed are provided to explain the logical steps of the method and are understood not to limit the scope of the method. Although various arrow types and line types may be employed in the flow chart diagrams, they are understood not to limit the scope of the corresponding method. Indeed, some arrows or other connectors may be used to indicate only the logical flow of the method. For instance, an arrow may indicate a waiting or monitoring period of unspecified duration between enumerated steps of the depicted method. Additionally, the order

in which a particular method occurs may or may not strictly adhere to the order of the corresponding steps shown.

The present subject matter may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are
5 to be considered in all respects only as illustrative and not restrictive. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

In accordance with one embodiment, there is provided an apparatus. The apparatus includes an estimation module (46) that estimates a probability of an ice
10 crystal icing engine event based on infrared satellite data (54), numerical weather prediction data (56), and empirical data (58) corresponding with actual ice crystal icing engine events; a data product module (50) that generates a data product (64) indicating the estimation of the probability of an ice crystal icing engine event; and an output module (52) that communicates the data product (64).

15 The infrared satellite data (54) may include infrared brightness temperature of atmosphere, and the numerical weather prediction data (56) may include height-specific temperature of atmosphere and precipitable water in atmosphere.

The estimation module (46) may execute a comparison between the infrared brightness temperature of atmosphere, height-specific temperature of atmosphere,
20 and precipitable water in atmosphere to respective predetermined thresholds, and the estimation module (46) may estimate the probability of an ice crystal icing engine event based on the comparison.

The respective predetermined thresholds may be based on the empirical data (58) corresponding with actual ice crystal icing engine events.

25 The probability of an ice crystal icing engine event may be identifiable as one of at least a first ice crystal icing engine event probability and a second ice crystal

icing engine event probability, and the estimation module (46) may estimate the probability of an ice crystal icing engine event as the second ice crystal icing engine event probability if any one of the infrared brightness temperature of atmosphere, height-specific temperature of atmosphere, and precipitable water in atmosphere
 5 does not meet a corresponding one of the respective predetermined thresholds, and may estimate the probability of an ice crystal icing engine event as the first ice crystal icing engine event probability if all of the infrared brightness temperature of atmosphere, height-specific temperature of atmosphere, and precipitable water in atmosphere meet the respective predetermined thresholds.

10 The first ice crystal icing engine event probability may correspond with a higher probability of an ice crystal icing engine event, and the second ice crystal icing engine event probability may correspond with a lower probability of an ice crystal icing engine event.

The predetermined threshold corresponding with the infrared brightness
 15 temperature may be between about **200 K** and about **220 K**.

The predetermined threshold corresponding with the infrared brightness temperature may be about **209 K**.

The predetermined threshold corresponding with the height-specific temperature may be between about **-20°C** at **500 mb** and about **0°C** at **500 mb**.

20 The predetermined threshold corresponding with the height-specific temperature may be about **-10°C** at **500 mb**.

The predetermined threshold corresponding with the precipitable water may be between about **25 mm** and about **45 mm**.

The predetermined threshold corresponding with the precipitable water may
 25 be about **35 mm**.

The estimation module (46) may concurrently estimate the probability of an ice crystal icing engine event at a plurality of locations across earth.

The apparatus may further include a verification module (48) that verifies accuracy of the probability of an ice crystal icing engine event based on a physical measurement of at least one condition in atmosphere.

The estimation module (46) may estimate the probability of an ice crystal icing engine event based on a type of engine powering an aircraft capable of flight in the atmosphere.

The data product may include (64) one of an electronic binary data file and an image file.

In accordance with another embodiment, there is provided a system that includes an aircraft (16), an estimation module (46) that estimates a probability of an ice crystal icing engine event based on infrared brightness temperature of atmosphere, height-specific temperature of atmosphere, precipitable water in atmosphere, and empirical data corresponding with at least one actual ice crystal icing engine event; and an output module (52) that communicates the estimation of the probability of an ice crystal icing engine event to the aircraft (16).

The estimation module (46) may estimate the probability of an ice crystal icing engine event based on a type of engine powering the aircraft.

In accordance with another embodiment there is provided a method that involves acquiring infrared satellite data and numerical weather prediction data, comparing the infrared satellite data and numerical weather prediction data to respective predetermined thresholds, and estimating a probability of an ice crystal icing event based on a comparison between the infrared satellite data and numerical weather prediction data to the respective predetermined thresholds.

The infrared satellite data may involve infrared brightness temperature data, and the numerical weather prediction data may include height-specific temperature data and precipitable water data.

5 The method may further involve setting the probability of an ice crystal icing event to indicate a higher probability of an ice crystal icing event when each of the infrared brightness temperature data, height-specific temperature data, and precipitable water data meets the respective predetermined thresholds, and setting the probability of an ice crystal icing event to indicate a lower probability of an ice crystal icing event when at least one of the infrared brightness temperature data,
10 height-specific temperature data and precipitable water data does not meet the respective predetermined thresholds.

The infrared brightness temperature data may be acquired from a plurality of satellites, and the height-specific temperature data and precipitable water data may be acquired from a global numerical weather prediction model.

15 The ice crystal icing event may involve an ice crystal icing event on an engine of an aircraft.

The ice crystal icing event may involve an ice crystal icing event on a non-engine component of an aircraft.

**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS
CLAIMED ARE DEFINED AS FOLLOWS:**

- 1.** An apparatus, comprising:

5

an estimation module that estimates a probability of an ice crystal icing engine event based on infrared satellite data, numerical weather prediction data, and empirical data corresponding with actual ice crystal icing engine events;

10

wherein the infrared satellite data comprises infrared brightness temperature of atmosphere, and the numerical weather prediction data comprises height-specific temperature of atmosphere and precipitable water in atmosphere; and

15

wherein the estimation module executes a comparison between the infrared brightness temperature of atmosphere, the height-specific temperature of atmosphere, and the precipitable water in atmosphere to respective predetermined thresholds, and wherein the estimation module estimates the probability of an ice crystal icing engine event based on the comparison;

20

a data product module that generates an electronic data file indicating the estimation of the probability of an ice crystal icing engine event; and

25

an output module that communicates the electronic data file over an electronic data communication channel to at least one aircraft-monitoring recipient to allow the at least one aircraft-monitoring recipient to route and/or reroute at least one aircraft to avoid at least one region where the estimation of the probability of an ice crystal icing engine event exceeds a threshold probability.

2. The apparatus of claim 1, wherein the respective predetermined thresholds are based on the empirical data corresponding with actual ice crystal icing engine events.

3. The apparatus of claim 1 or claim 2, wherein the probability of an ice crystal icing engine event is identifiable as one of at least a first ice crystal icing engine event probability and a second ice crystal icing engine event probability, and

wherein the estimation module estimates the probability of an ice crystal icing engine event as the second ice crystal icing engine event probability if any one of the infrared brightness temperature of atmosphere, the height-specific temperature of atmosphere, and the precipitable water in atmosphere does not meet a corresponding one of the respective predetermined thresholds, and estimates the probability of an ice crystal icing engine event as the first ice crystal icing engine event probability if all of the infrared brightness temperature of atmosphere, the height-specific temperature of atmosphere, and the

precipitable water in atmosphere meet the respective predetermined thresholds.

4. The apparatus of claim 3, wherein the first ice crystal icing engine event probability corresponds with a higher probability of an ice crystal icing engine event, and the second ice crystal icing engine event probability corresponds with a lower probability of an ice crystal icing engine event.
5. The apparatus of any one of claims 1-4, wherein the predetermined threshold corresponding with the infrared brightness temperature is between about **200** K and about **220** K.
6. The apparatus of claim 5, wherein the predetermined threshold corresponding with the infrared brightness temperature is about **209** K.
7. The apparatus of any one of claims 1-6, wherein the predetermined threshold corresponding with the height-specific temperature is between about **-20°C** at **500** mb and about **0°C** at **500** mb.
8. The apparatus of claim 7, wherein the predetermined threshold corresponding with the height-specific temperature is about **-10°C** at **500** mb.
9. The apparatus of any one of claims 1-8, wherein the predetermined threshold corresponding with the precipitable water is between about **25** mm and about **45** mm.

10. The apparatus of claim 9, wherein the predetermined threshold corresponding with the precipitable water is about **35** mm.
- 5 11. The apparatus of any one of claims 1-10, wherein the estimation module concurrently estimates the probability of an ice crystal icing engine event at a plurality of locations across earth.
- 10 12. The apparatus of any one of claims 1-11, further comprising a verification module that verifies accuracy of the probability of an ice crystal icing engine event based on a physical measurement of at least one condition in atmosphere.
- 15 13. The apparatus of any one of claims 1-12, wherein the estimation module further estimates the probability of an ice crystal icing engine event based on a type of engine powering the at least one aircraft capable of flight in the atmosphere.
- 20 14. The apparatus of any one of claims 1-13, wherein the electronic data file comprises one of an electronic binary data file and an image file.
- 25 15. The apparatus of any one of claims 1-14, wherein the aircraft-monitoring recipient routes the at least one aircraft to avoid the at least one region where the estimation of the probability of an ice crystal icing engine event exceeds the threshold probability

16. The apparatus of any one of claims 1-15, wherein the aircraft-monitoring recipient reroutes the at least one aircraft to avoid the at least one region where the estimation of the probability of an ice crystal icing engine event exceeds the threshold probability

5

17. A system, comprising:

an aircraft;

10

an estimation module that estimates a probability of an ice crystal icing engine event based on infrared brightness temperature of atmosphere, height-specific temperature of atmosphere, precipitable water in atmosphere, and empirical data corresponding with at least one actual ice crystal icing engine event;

15

wherein the estimation module executes a comparison between the infrared brightness temperature of atmosphere, the height-specific temperature of atmosphere, and the precipitable water in atmosphere to respective predetermined thresholds, and wherein the estimation module estimates the probability of an ice crystal icing engine event based on the comparison; and

20

an output module that communicates the estimation of the probability of an ice crystal icing engine event to the aircraft to allow the aircraft to route and/or reroute to avoid at least one region where the estimation of

25

the probability of an ice crystal icing engine event exceeds a threshold probability.

5 **18.** The system of claim **17**, wherein the estimation module further estimates the probability of an ice crystal icing engine event based on a type of engine powering the aircraft.

10 **19.** The system of claim **17** or claim **18**, wherein the aircraft routes the aircraft to avoid the at least one region where the estimation of the probability of an ice crystal icing engine event exceeds the threshold probability.

15 **20.** The system of any one of claims **17-19**, wherein the aircraft reroutes the aircraft to avoid the at least one region where the estimation of the probability of an ice crystal icing engine event exceeds the threshold probability.

20 **21.** A method, comprising:

acquiring infrared satellite data and numerical weather prediction data;

25 comparing the infrared satellite data and the numerical weather prediction data to respective predetermined thresholds, wherein the infrared satellite data comprises infrared brightness temperature data, and the numerical weather prediction data comprises height-specific temperature data and precipitable water data;

estimating a probability of an ice crystal icing event based on a comparison between the infrared satellite data and the numerical weather prediction data to the respective predetermined thresholds;

5 setting the probability of an ice crystal icing event to indicate a higher probability of an ice crystal icing event when each of the infrared brightness temperate data, the height-specific temperature data, and the precipitable water data meets the respective predetermined thresholds, and setting the probability of an ice crystal icing event to
10 indicate a lower probability of an ice crystal icing event when at least one of the infrared brightness temperature data, the height-specific temperature data and the precipitable water data does not meet the respective predetermined thresholds;

15 converting the probability of an ice crystal icing event into an electronic data file;

 communicating the electronic data file to at least one aircraft-monitoring recipient over an electronic data communication channel to allow the at
20 least one aircraft-monitoring recipient to route and/or reroute at least one aircraft to avoid at least one region where the probability of an ice crystal icing event exceeds a threshold probability.

22. The method of claim **21**, wherein the infrared brightness temperature data is
25 acquired from a plurality of satellites, and the height-specific temperature data

and the precipitable water data is acquired from a global numerical weather prediction model.

5 **23.** The method of claim **21** or claim **22**, wherein the ice crystal icing event comprises an ice crystal icing event on an engine of the at least one aircraft.

10 **24.** The method of any one of claims **21-23**, wherein the ice crystal icing event comprises an ice crystal icing event on a non-engine component of the at least one aircraft.

15 **25.** The method of any one of claims **21-24**, further comprising routing, by the at least one aircraft-monitoring recipient, the at least one aircraft to avoid the at least one region where the probability of an ice crystal icing event exceeds the threshold probability.

26. The method of any one of claims **21-25**, further comprising rerouting, by the at least one aircraft-monitoring recipient, the at least one aircraft to avoid the at least one region where the probability of an ice crystal icing event exceeds the threshold probability.

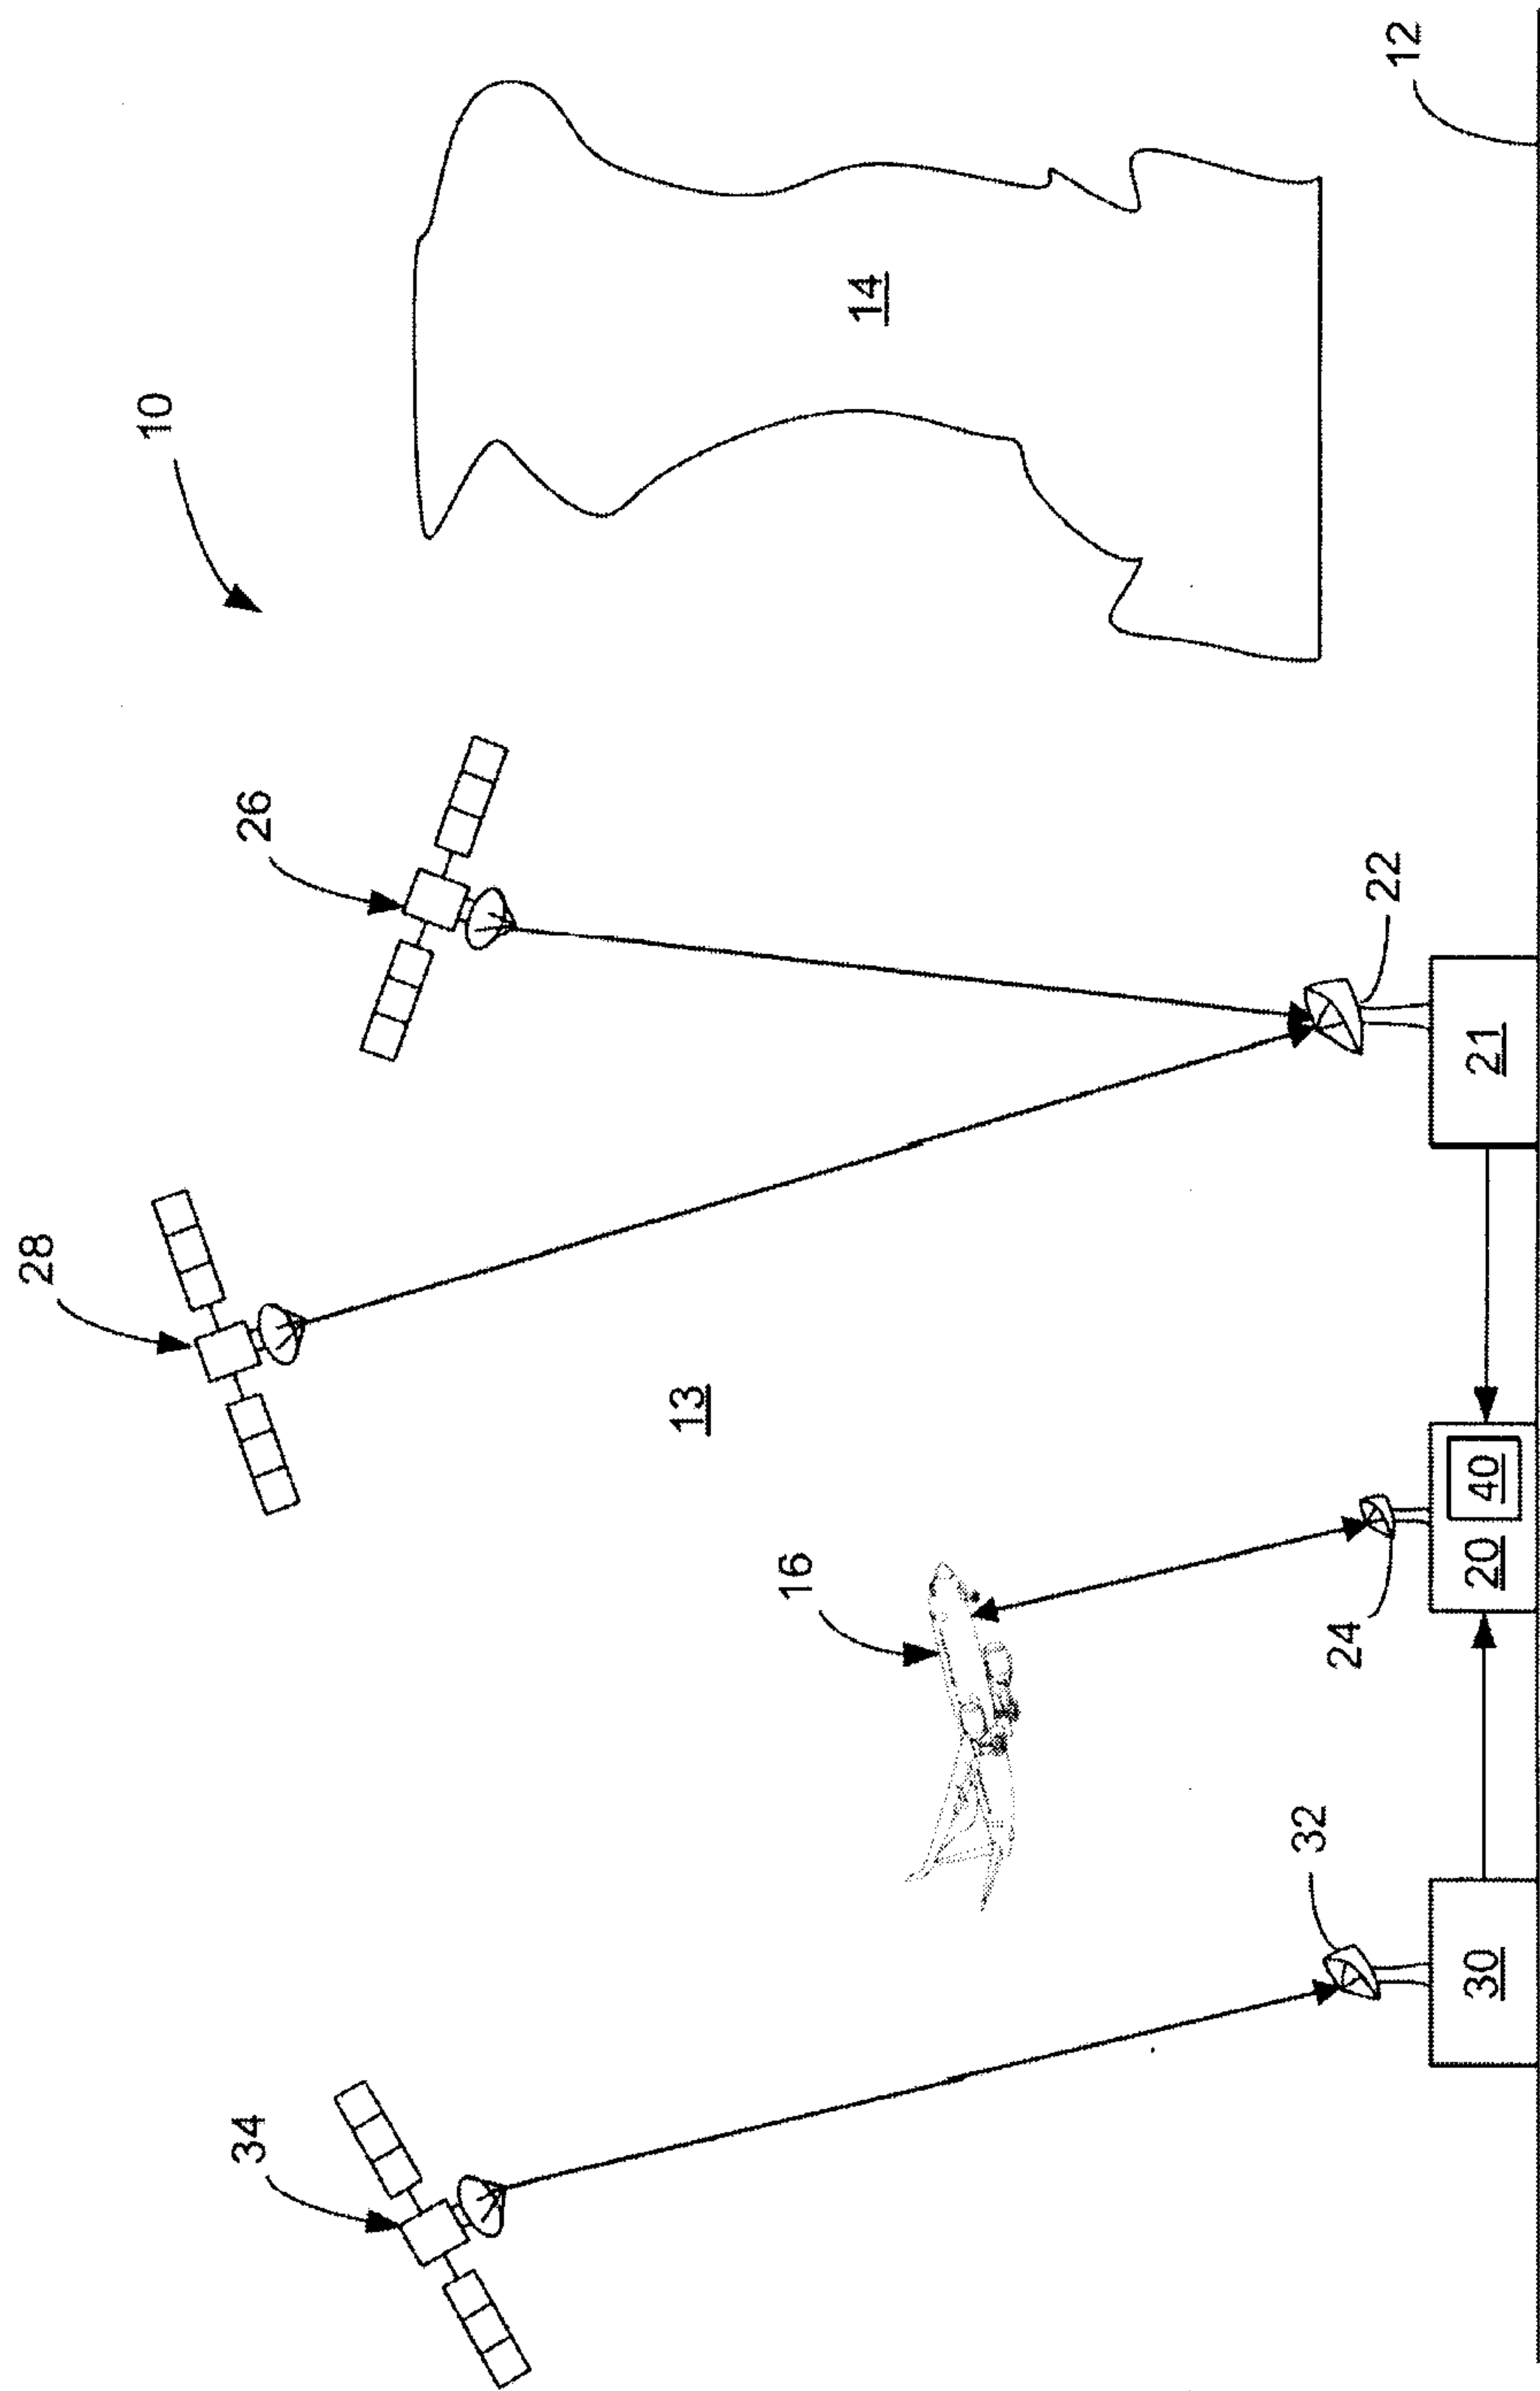


Fig. 1

PAGE 2/4

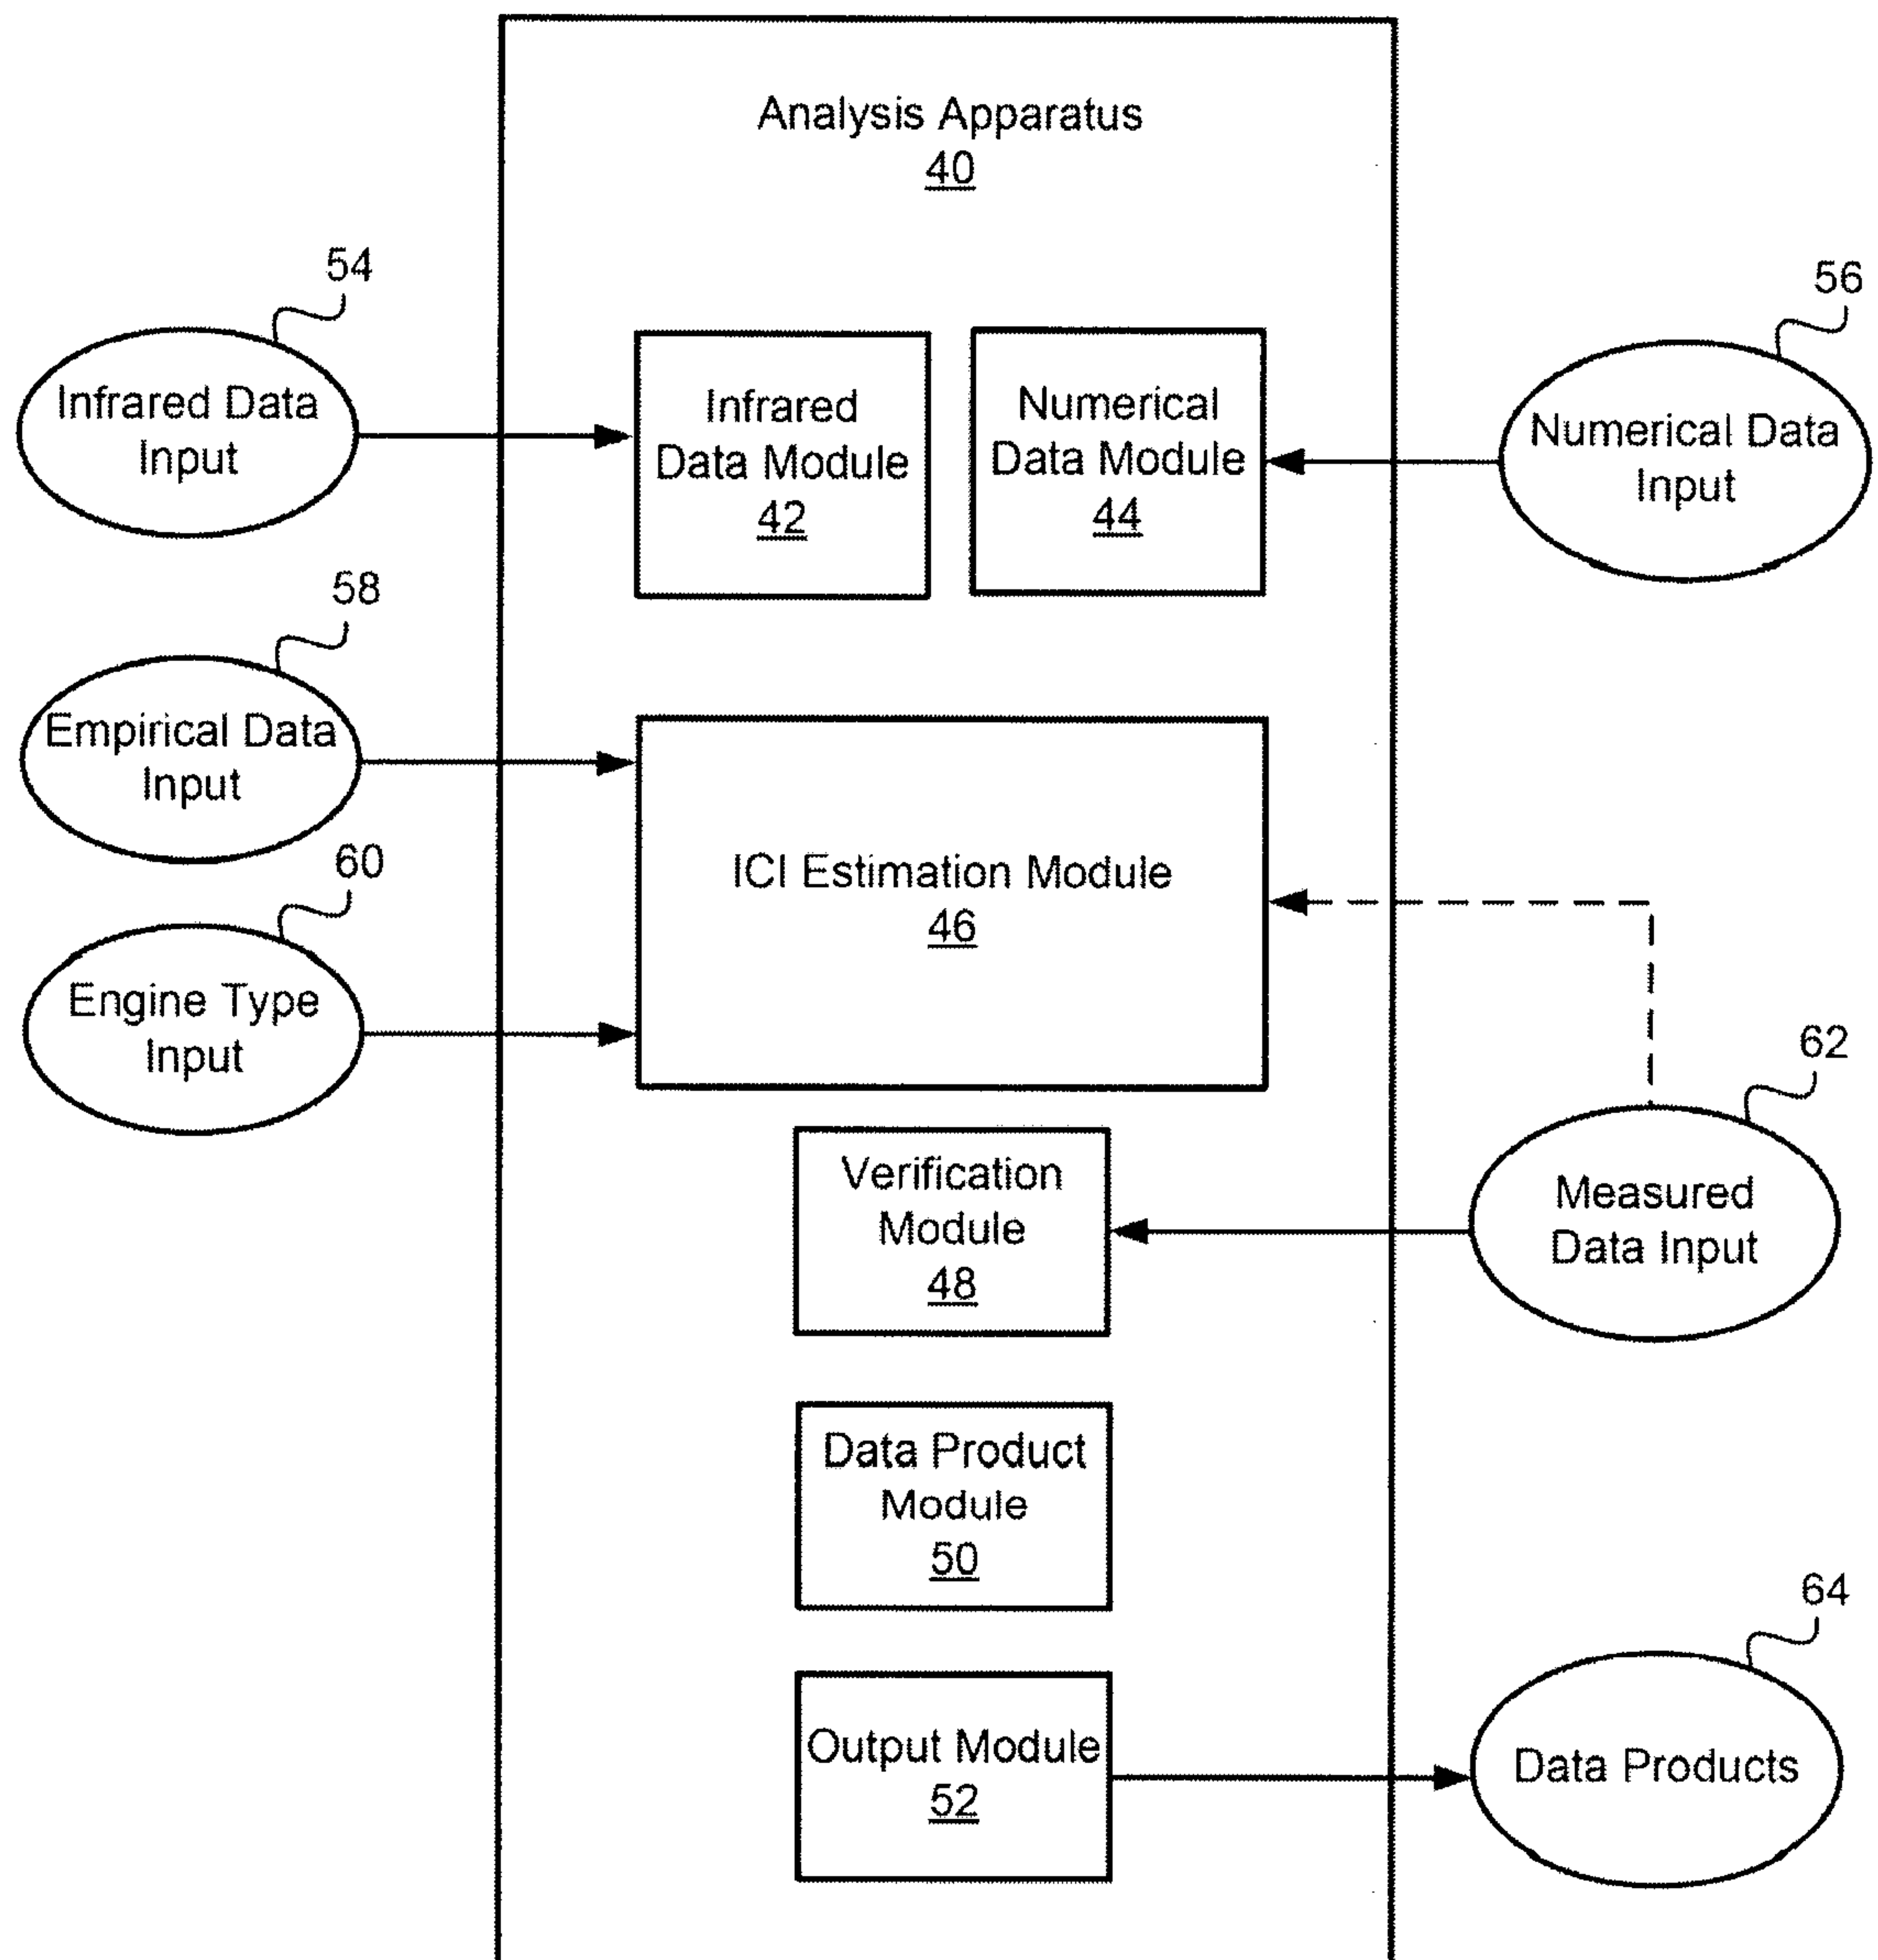
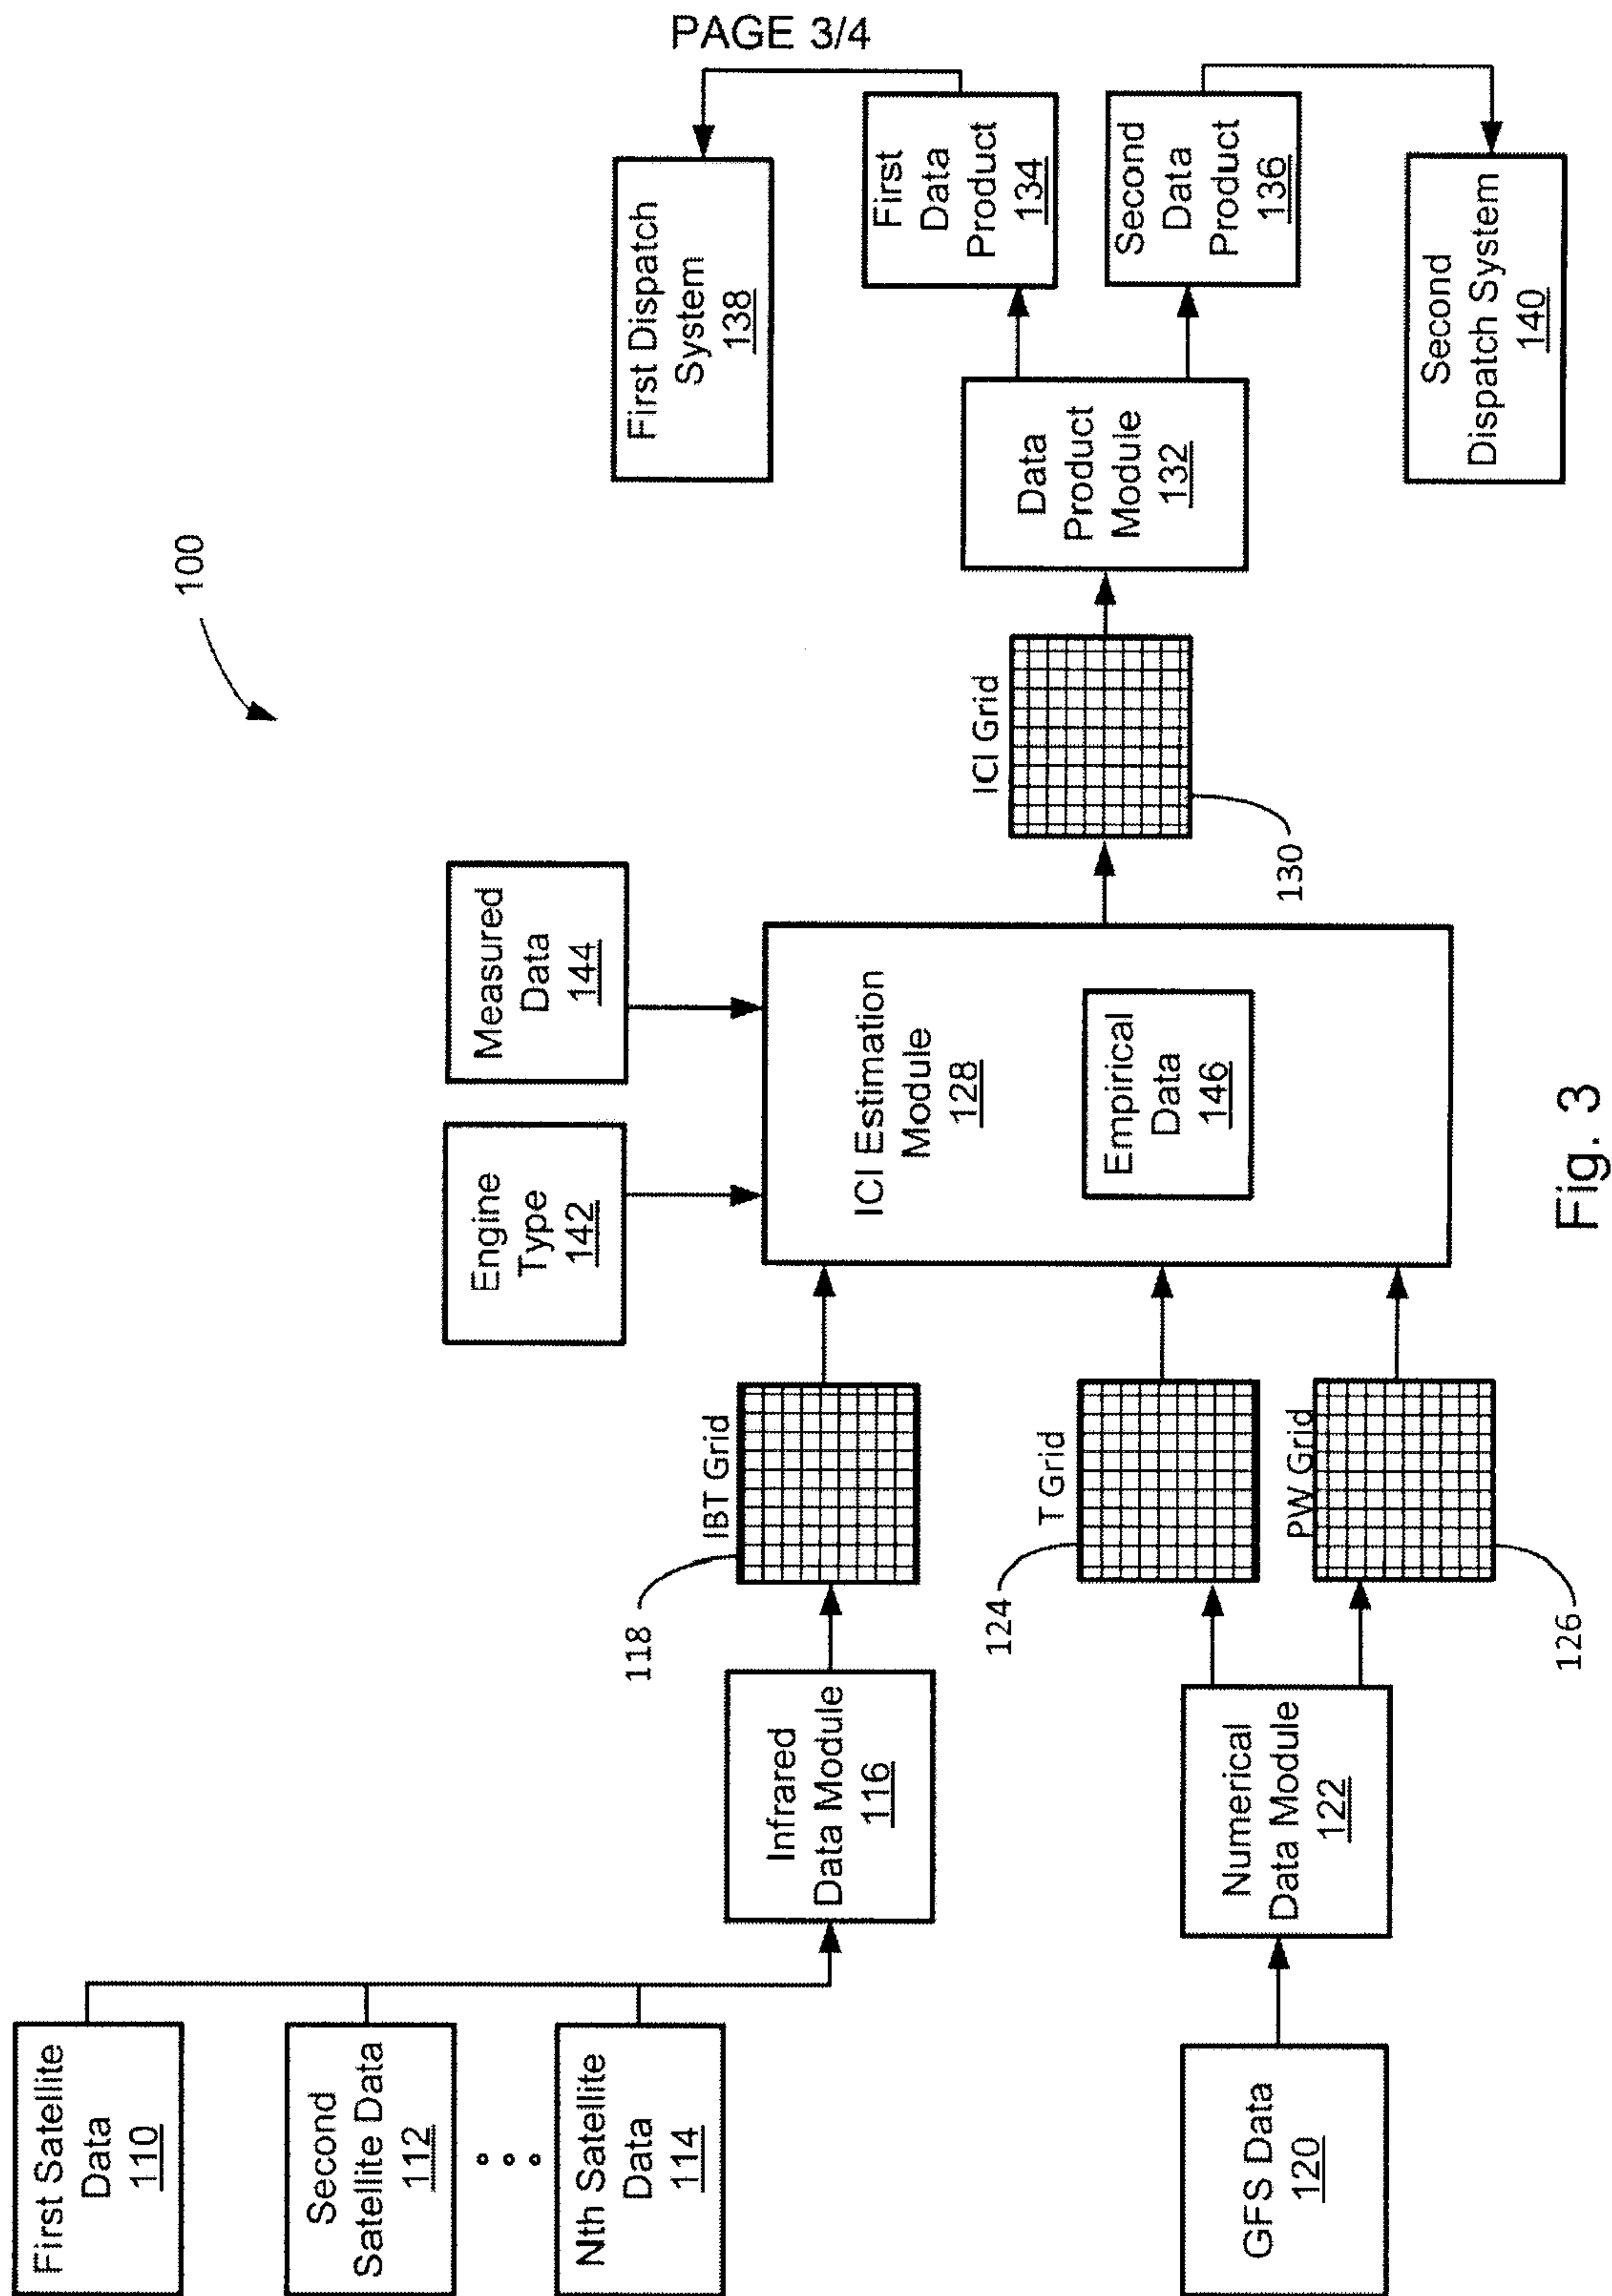


Fig. 2



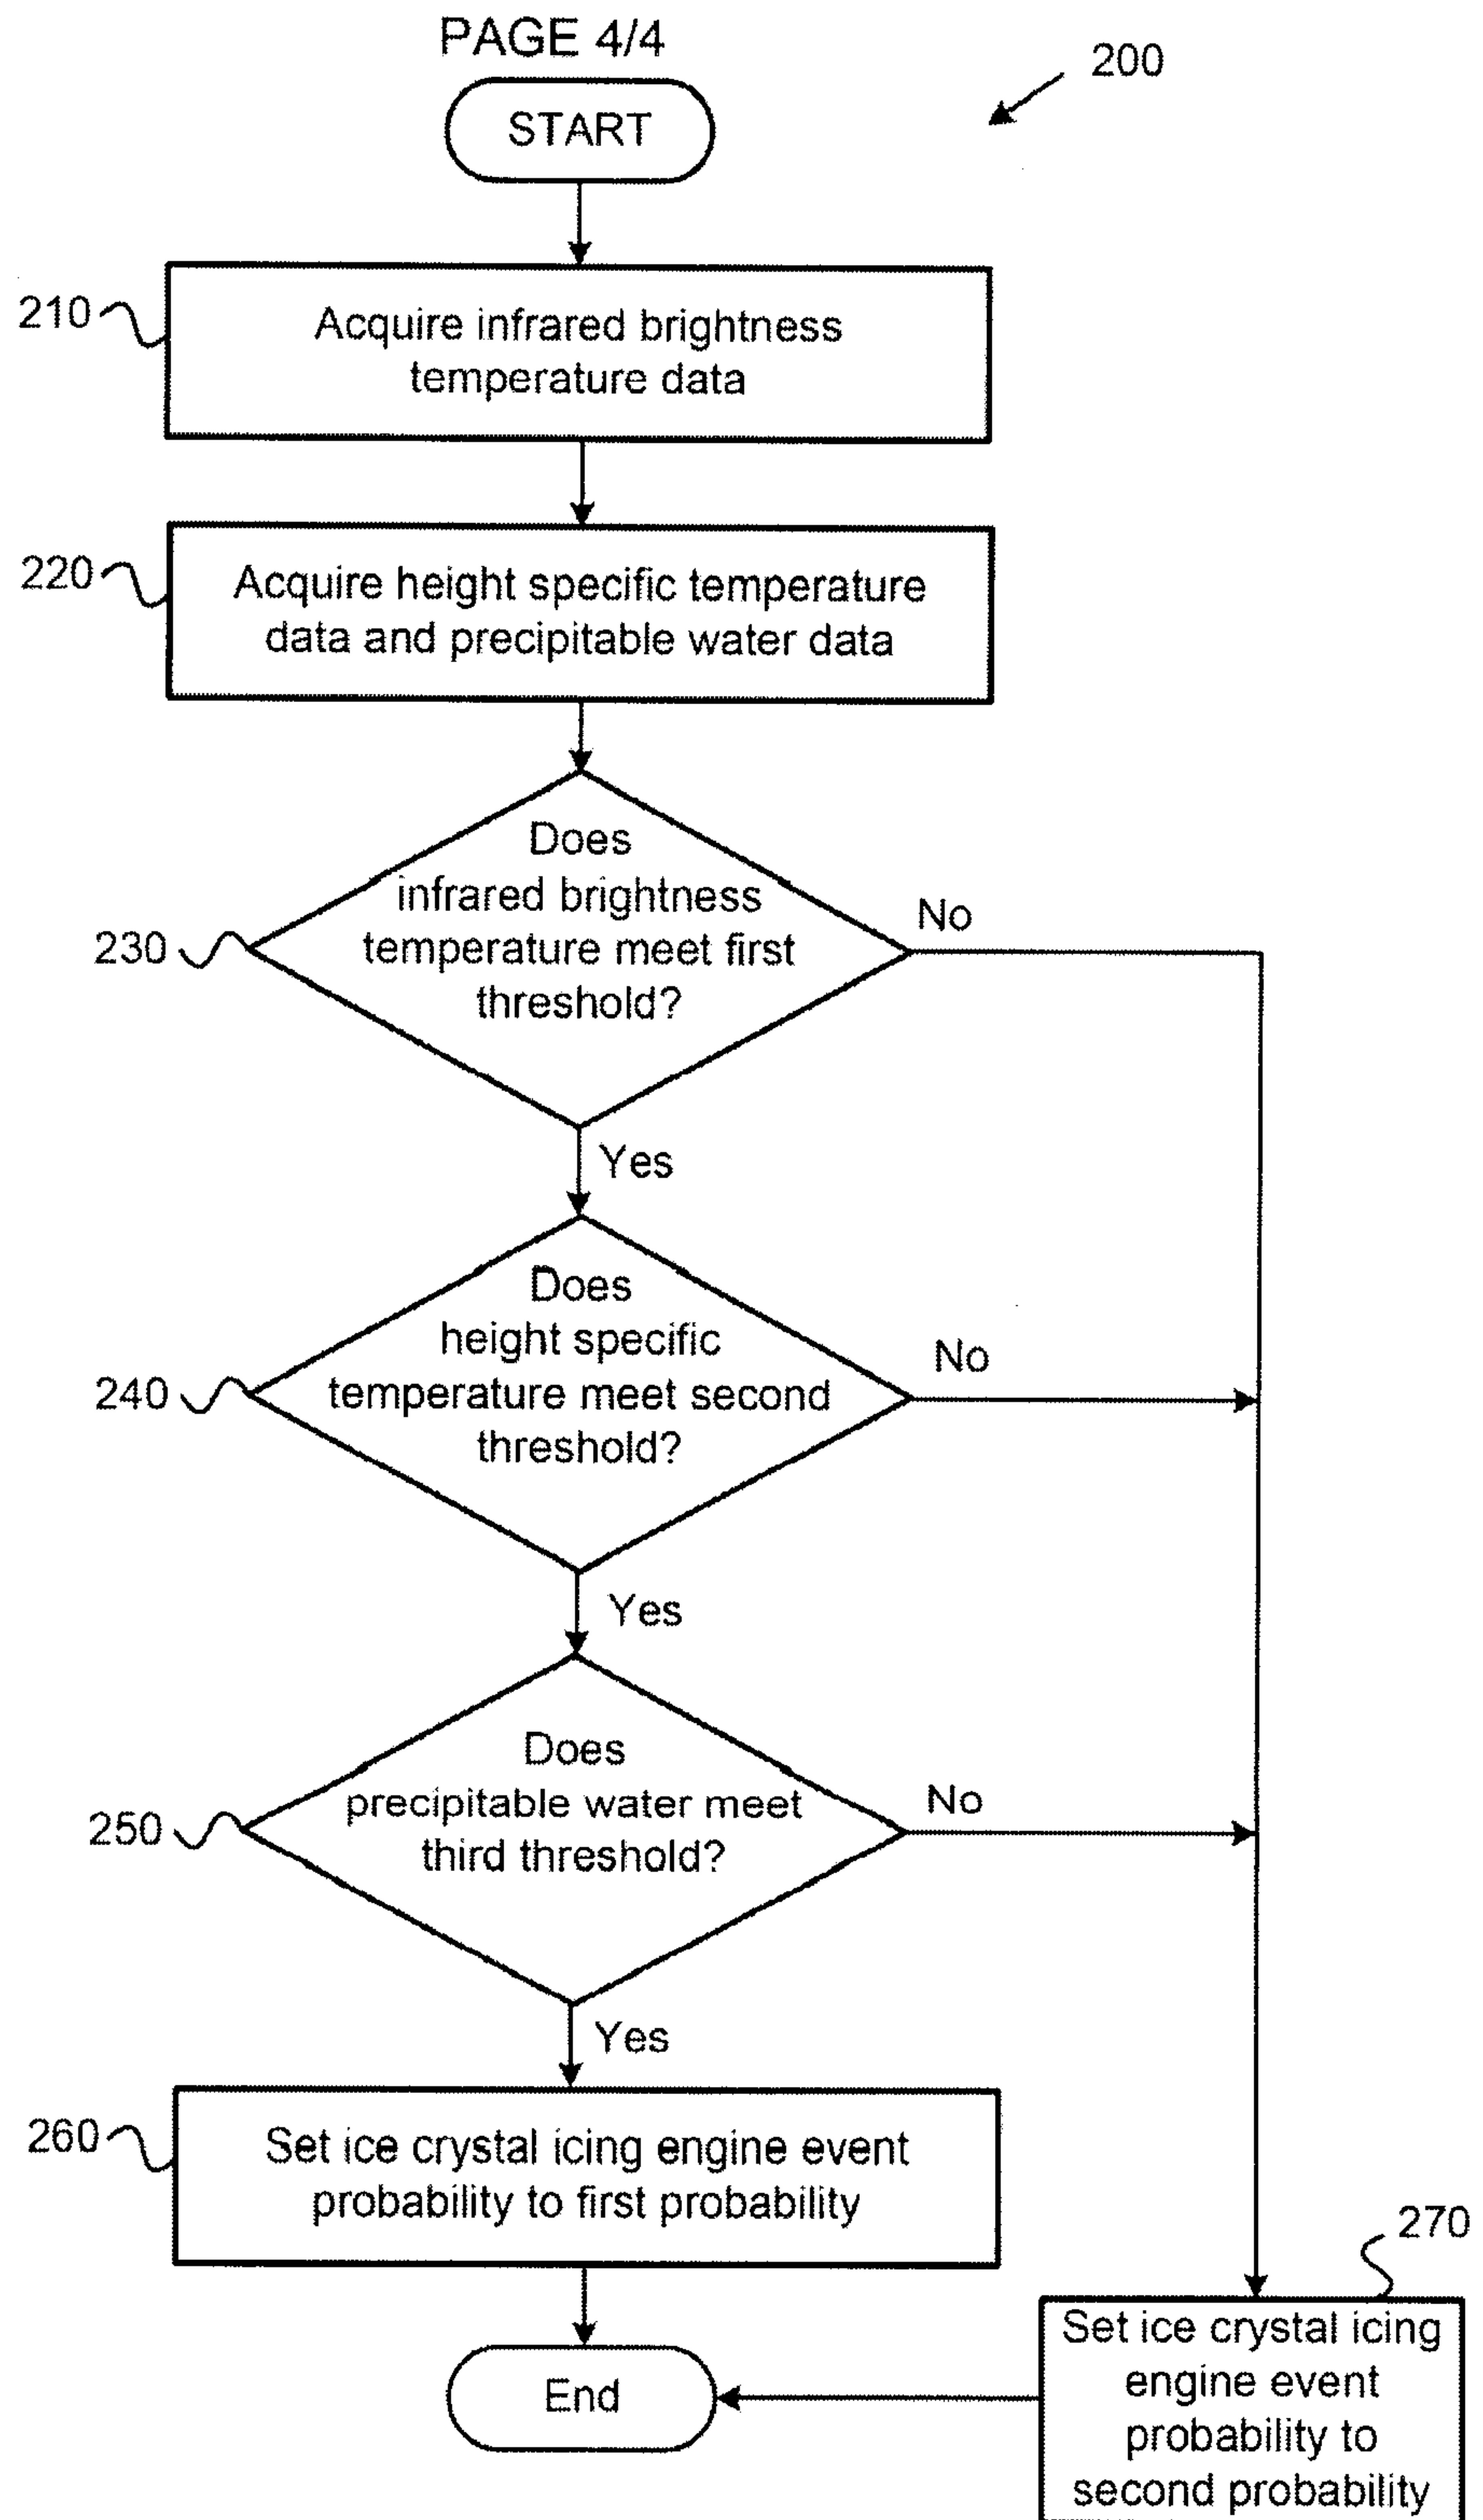


Fig. 4

