



US 20050262862A1

(19) **United States**

(12) **Patent Application Publication**
Moffitt

(10) **Pub. No.: US 2005/0262862 A1**

(43) **Pub. Date: Dec. 1, 2005**

(54) **HVAC DESICCANT WHEEL SYSTEM AND METHOD**

Publication Classification

(76) **Inventor: Ronnie R. Moffitt, Harrodsburg, KY (US)**

(51) **Int. Cl.⁷ F25D 17/06; F25D 17/04; F25B 49/00; F25D 23/00**

(52) **U.S. Cl. 62/271; 62/93; 62/176.6**

Correspondence Address:
William O'Driscoll - 12-1
Trane
3600 Pammel Creek Road
La Crosse, WI 54601 (US)

(57) **ABSTRACT**

An HVAC system includes a desiccant wheel, wherein the wheel's speed varies with airflow, the wheel is energized for at least a set period at startup, and/or a heat recovery system (e.g., an air-to-air heat exchanger) upstream of the wheel enhances the system's ability to dehumidify air.

(21) **Appl. No.: 10/855,912**

(22) **Filed: May 27, 2004**

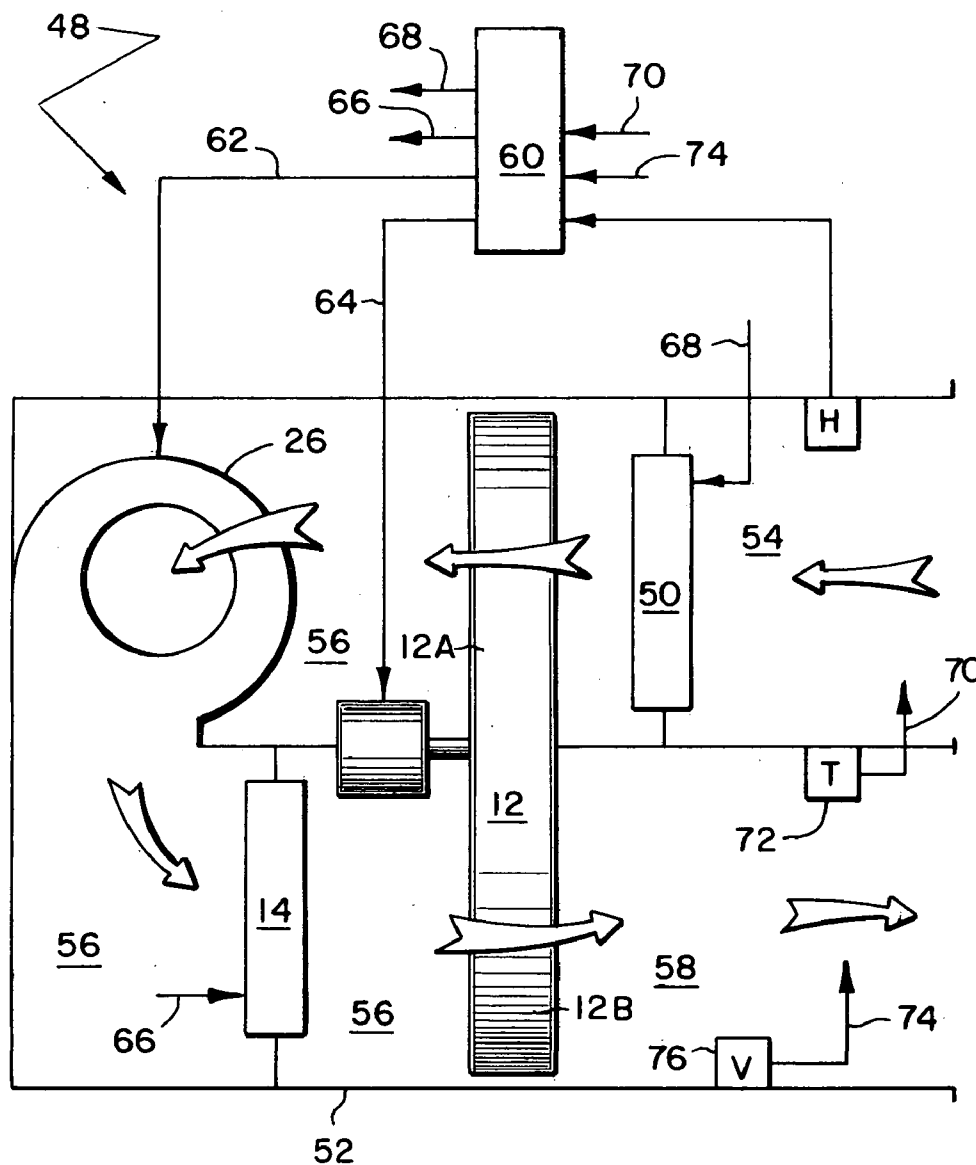


FIG. 1

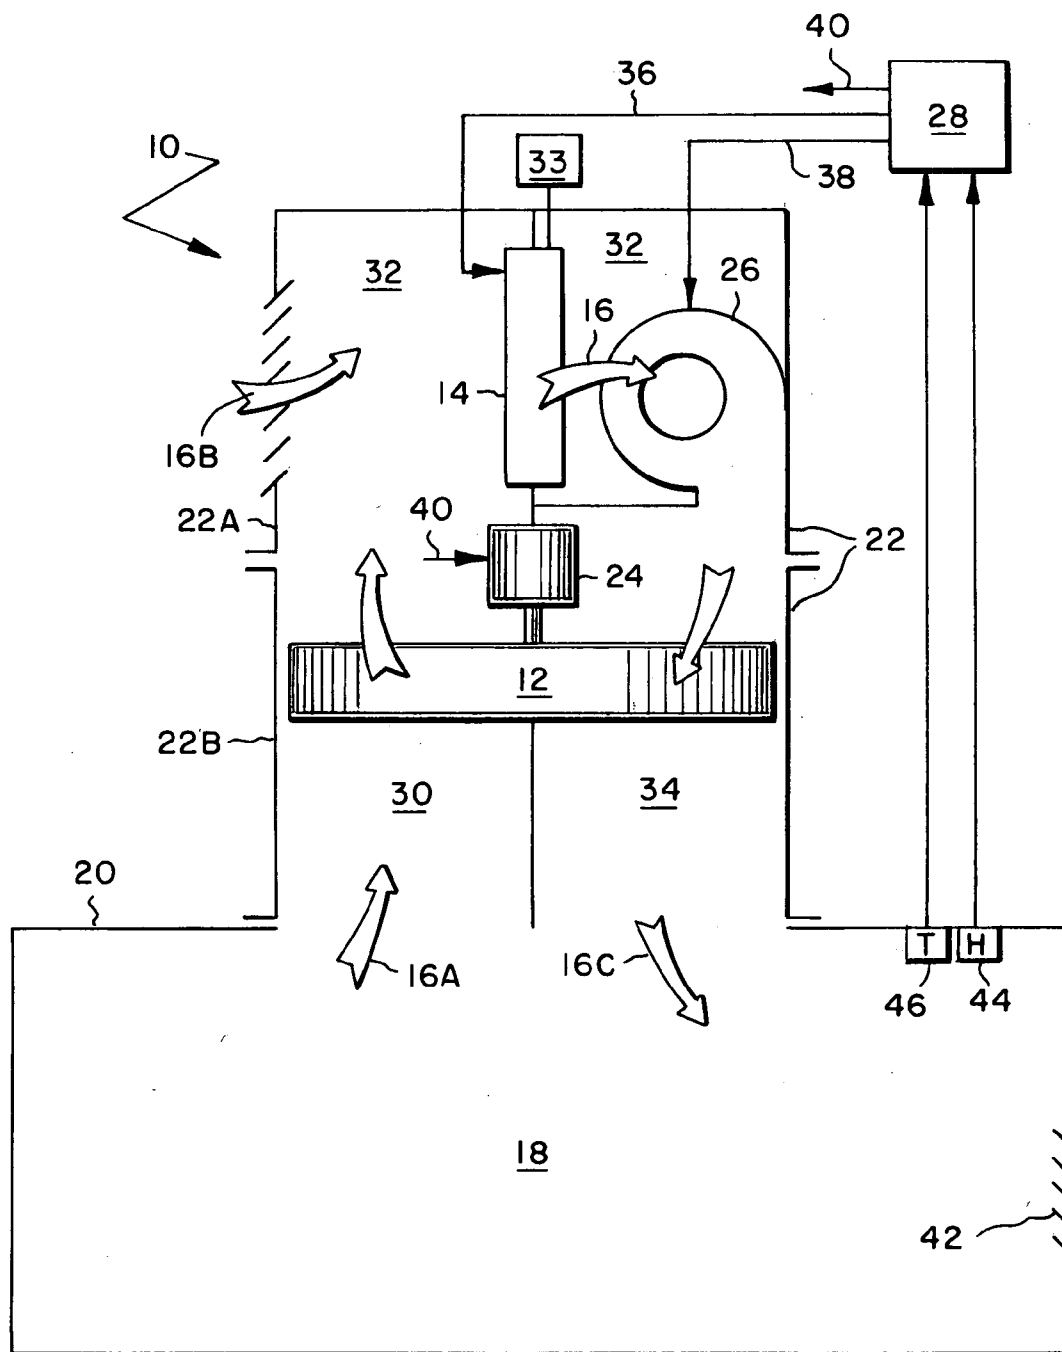


FIG. 2


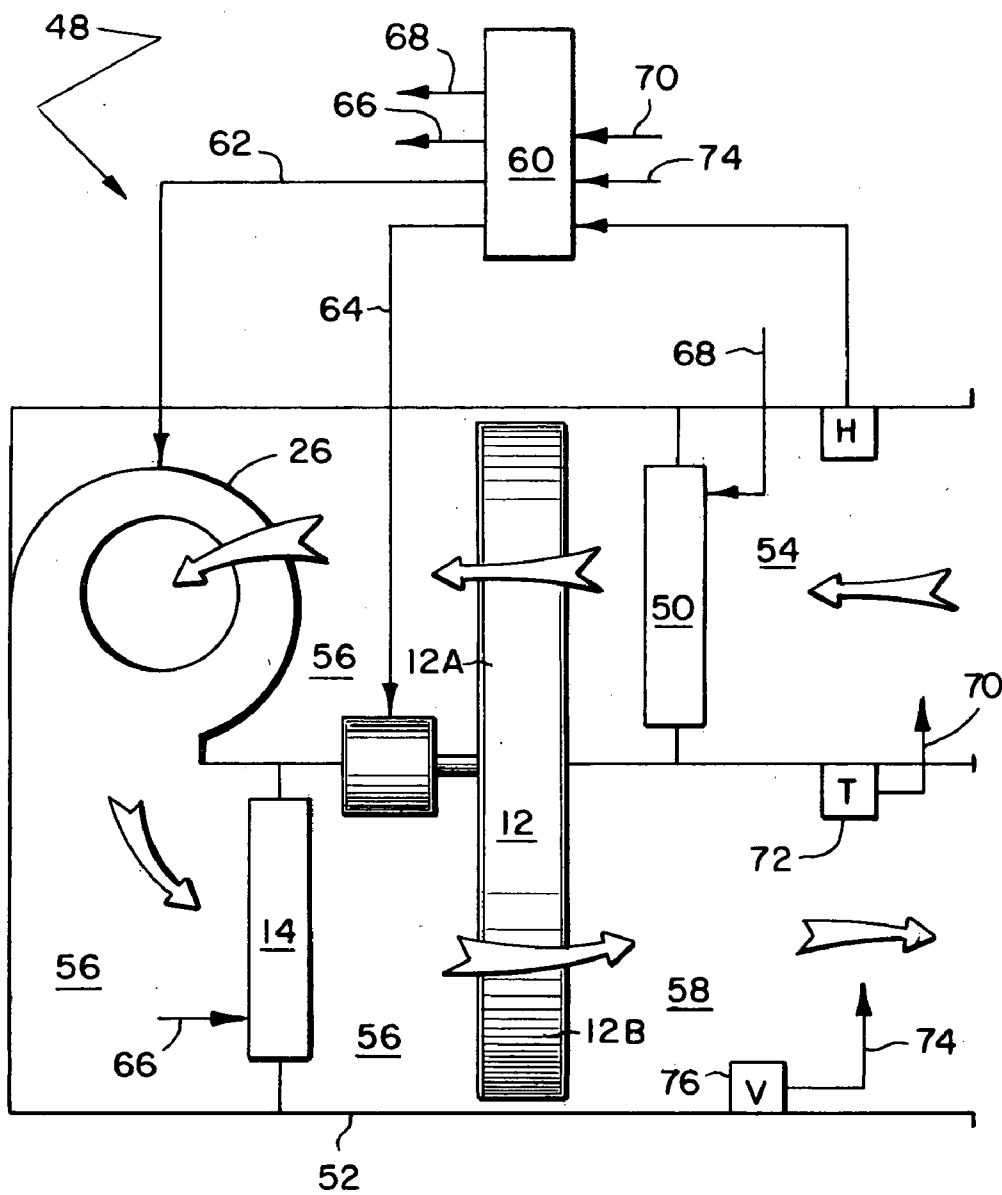


FIG. 4

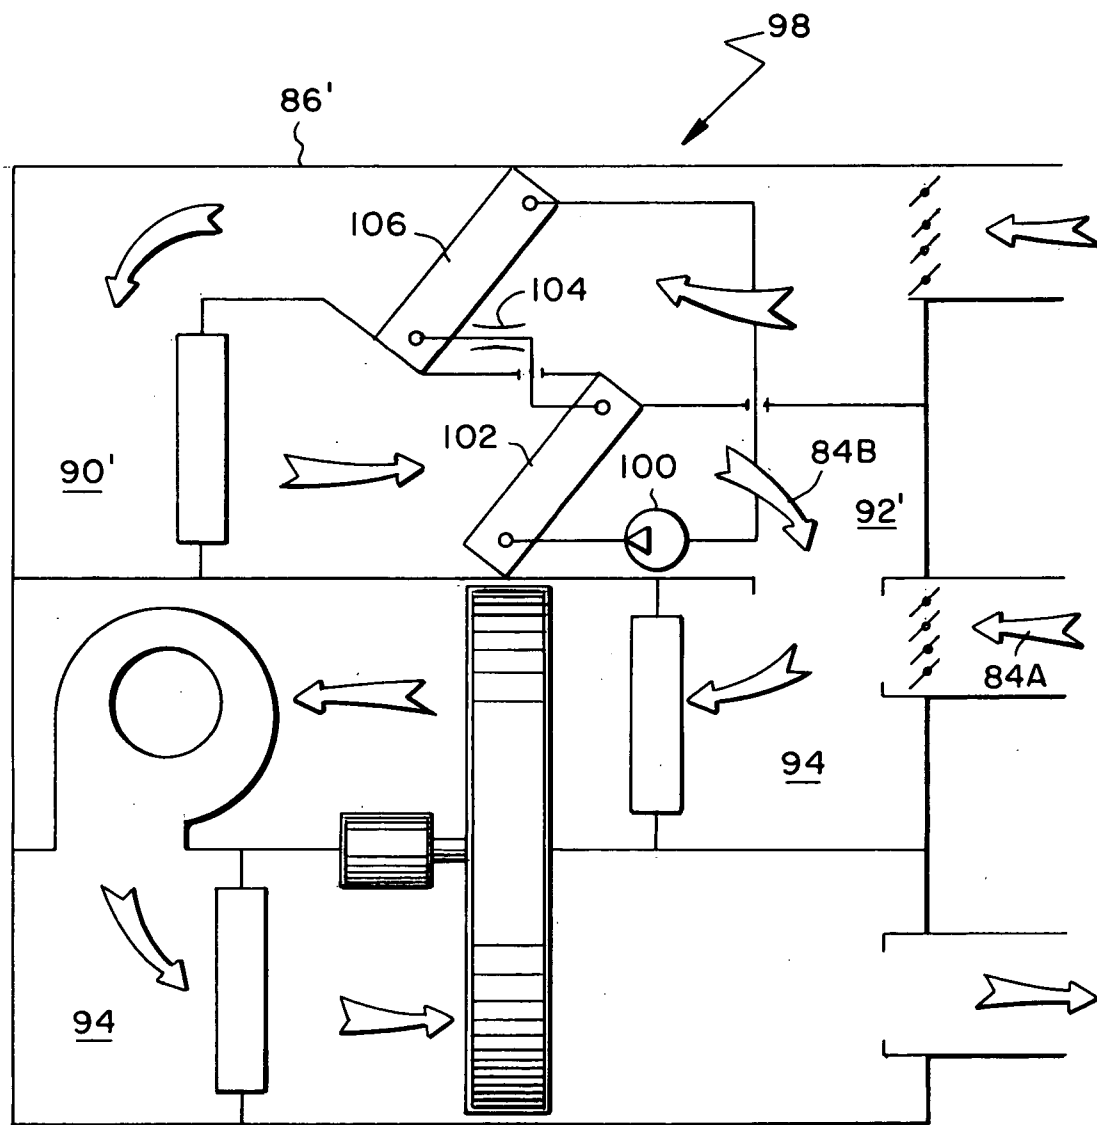

HVAC DESICCANT WHEEL SYSTEM AND METHOD

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The subject invention generally pertains to HVAC systems and more specifically to an air conditioning system that includes a dehumidifying desiccant wheel.

[0003] 2. Description of Related Art

[0004] Energy wheels and desiccant wheels are two distinct types of wheels used in the HVAC industry. An energy wheel is a rotating, porous mass that functions as heat exchanger by transferring sensible heat from one air stream to another. With an energy wheel, half the wheel absorbs heat while the other half releases it. Examples of energy wheels are disclosed in U.S. Pat. Nos. 6,141,979 and 4,825,936.

[0005] Desiccant wheels, on the other hand, transfer moisture from one air stream to another, usually for the purpose of reducing humidity of a comfort zone. Examples of systems with desiccant wheels are disclosed in U.S. Pat. Nos. 6,311,511; 6,237,354; 5,887,784; 5,816,065; 5,732,562; 5,579,647; 5,551,245; 5,517,828 and 4,719,761.

[0006] Although many air conditioning systems that are enhanced with desiccant wheels have been developed, such systems often implement the use of desiccant wheels whenever there is a dehumidification load. However many air conditioning systems may be most efficient if the desiccant wheel is only utilized at part load conditions or when the load on the system shifts from a sensible cooling load to more of a latent cooling or dehumidification load. Current systems often fail to address these efficiency concerns. Moreover, current systems with desiccant wheels often disregard a critical period when the refrigerant system is first activated. At startup, it takes a moment for the refrigerant system's evaporator to become sufficiently cold to remove moisture from the air. So, when the refrigerant system is first energized and before the evaporator becomes cold, condensed water on the surface of the evaporator may actually evaporate into the air, which can increase the humidity of the comfort zone.

[0007] Consequently, a need exists for air conditioning systems that are enhanced with desiccant wheels that address efficiency concerns at part load operation for variable air volume systems.

SUMMARY OF THE INVENTION

[0008] It is a primary object of the invention to improve an HVAC system's overall effectiveness by configuring the system with a desiccant wheel in a manner that takes full advantage of the wheel's ability to reduce humidity over a variety of operating conditions.

[0009] Another object of some embodiments is to start a refrigerant compressor and the rotation of a desiccant wheel regardless of the surrounding humidity, and then discontinue the wheel's rotation after a predetermined period, whereby the wheel, during the predetermined period, can reabsorb moisture that may have vaporized off an evaporator at startup.

[0010] Another object of some embodiments is to discontinue the rotation of a desiccant wheel in response to a humidistat indicating that the humidity is below a certain level.

[0011] Another object of some embodiments is to discontinue the rotation of a desiccant wheel in response to a thermostat indicating that the air temperature is above a certain level.

[0012] Another object of some embodiments is to vary the rotational speed of a desiccant wheel in proportion to the airflow volume through the wheel.

[0013] Another object of some embodiments is to vary the rotational speed of a desiccant wheel in proportion to the airflow volume through the wheel, wherein the airflow volume is determined based on a controller's speed command signal to a variable speed blower.

[0014] Another object of some embodiments is to vary the rotational speed of a desiccant wheel in proportion to the airflow volume through the wheel, wherein the airflow volume is determined based on an airflow sensor.

[0015] Another object of some embodiments is to preheat the air entering a desiccant wheel in response to a humidistat, wherein the preheating assists the wheel in reducing the humidity in situations where the rotational speed of the wheel is reduced due to lower airflow rates.

[0016] Another object of some embodiments is to heat the air entering one portion of a desiccant wheel and cooling the air entering another portion of the wheel, wherein the heating is in response to a humidistat, and the cooling is in response to a temperature sensor.

[0017] Another object of some embodiments is to decrease the cooling rate of a desiccant wheel system to meet a reduced sensible cooling demand, while maintaining or just slightly decreasing a heating rate to meet a latent heating demand.

[0018] Another object of some embodiments is to install a heat recovery system upstream of a desiccant wheel to meet both a latent and sensible cooling demand. An air-to-air heat exchanger and a condenser/evaporator refrigerant circuit are just two examples of such a heat recovery system.

[0019] Another object of some embodiments is to meet a latent cooling demand without having to preheat the incoming air or otherwise increase the sensible cooling demand.

[0020] Another object of some embodiments is to provide an HVAC enclosure that conveys more airflow in some sections than others to accommodate the influx of both outside air and return air.

[0021] Another object of some embodiments is to install a pre-dehumidifying heat recovery system upstream of the desiccant wheel to meet both a latent and sensible cooling demand.

[0022] One or more of these and/or other objects of the invention are provided by an HVAC system that includes a desiccant wheel, wherein the configuration and/or control of the system is such that the system takes full advantage of the wheel's ability to cool and dehumidify the air of a comfort zone under various conditions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIG. 1 is a schematic diagram of one embodiment of an HVAC system that includes a desiccant wheel.

[0024] FIG. 2 is a schematic diagram of a second embodiment of an HVAC system that includes a desiccant wheel.

[0025] FIG. 3 is a schematic diagram of a third embodiment of an HVAC system that includes a desiccant wheel.

[0026] FIG. 4 is a schematic diagram of a fourth embodiment of an HVAC system that includes a desiccant wheel.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0027] A refrigerant system 10, shown in FIG. 1, is cycled on and off to meet a latent and/or sensible cooling demand, wherein a desiccant wheel 12 of the system operates for at least a predetermined period at the beginning of each cycle. At the start of each cycle, it can take a moment for a cooling coil 14, such as an evaporator of a refrigerant circuit, to become sufficiently cool to condense moisture from the air 16. Moisture, which may have condensed on the surface of coil 14 during an earlier operating cycle, may later evaporate back into the air upon starting a new cycle. So, operating wheel 12 for a predetermined period at startup can help absorb that moisture before it raises the humidity of a comfort zone 18, such as a room or other area of a building 20.

[0028] For the illustrated embodiment, system 10 comprises an enclosure 22 that contains cooling coil 14, desiccant wheel 12 driven by a motor 24, a blower 26, and a controller 28.

[0029] Enclosure 22 is schematically illustrated to represent any structure or combination of structures that can define an upstream air passageway 30, an intermediate air passageway 32, and a downstream air passageway 34. In this example, enclosure 22 comprises a cabinet 22A and a roof curb 22B, wherein roof curb 22B attaches cabinet 22A to a roof of building 20. Although enclosure 22 is shown having its two components, cabinet 22A and roof curb 22B, adjacent to each other, other embodiments may have an enclosure whose components are separated or interconnected by ductwork.

[0030] Cooling coil 14 is schematically illustrated to represent any structure that can cool a stream of air by means of a chilled fluid from a chilled fluid source 33. Examples of a chilled fluid source 33 for coil 14 include, but are not limited to, a conventional evaporator of a conventional refrigerant circuit, and a heat exchanger that conveys chilled water.

[0031] Blower 26 is schematically illustrated to represent any apparatus that can move air 16 through enclosure 22. Examples of blower 26 include, but are not limited to, a centrifugal fan, an axial fan, etc. Although blower 26 is shown disposed within intermediate air passageway 32, blower 26 could be installed anywhere as long as it can move air 16 in an appropriate flow path through enclosure 22.

[0032] Desiccant wheel 12 is schematically illustrated to represent any rotatable, air-permeable structure that can absorb and release moisture from a stream of air 16. Wheel

12, for example, may comprise a honeycomb structure or porous pad or cage that contains or is coated with a desiccant, such as silica gel, montmorillonite clay, zeolite, etc. The actual structure of various desiccant wheels are well known to those skilled in the art. Examples of desiccant wheels are disclosed in U.S. Pat. Nos. 6,311,511; 6,237,354; 5,887,784; 5,816,065; 5,732,562; 5,579,647; 5,551,245; 5,517,828 and 4,719,761, all of which are specifically incorporated by reference herein.

[0033] Controller 28 provides at least one output signal that cycles cooling coil 14 and blower 26 on and off to meet the cooling and/or dehumidification demand of comfort zone 18. In this example, controller 28 provides an output signal 36 for selectively energizing or energizing the source 33 of chilled fluid and/or the cooling coil 14 (or its associated refrigerant compressor) and an output signal 38 for energizing blower 26. Controller 28 also provides another output signal 40 for selectively energizing and de-energizing motor 24 of desiccant wheel 12. Controller 28 is schematically illustrated to represent any device that can provide such output signals. Examples of controller 28 include, but are not limited to, an electromechanical relay circuit, thermostat, PLC (programmable logic controller), computer, microprocessor, analog/digital circuit, and various combinations thereof.

[0034] Under normal operation, blower 26 draws return air 16A and/or outside air 16B into intermediate air passageway 32 and across coil 14, which provides latent and sensible cooling of the air. Next, blower 26 forces the conditioned air from intermediate air passageway 32 through a portion of wheel 12 that absorbs moisture from supply air 16C. Downstream air passageway 34 then conveys the relatively cool, dry supply 16C to comfort zone 18. Some of the air in zone 18 may escape building 20 through a vent 42 or other outlet, and the rest of the air becomes return air 16A that blower 26 draws back into upstream air passageway 30. As wheel 12 rotates, wheel 12 carries the moisture it absorbed in downstream passageway 34 and releases the moisture to the return air 16A passing through upstream air passageway 30.

[0035] Upon initially activating the source 33 and/or cooling coil 14 and blower 26 at the beginning of each on-cycle, controller 28 actuates or rotates wheel 12 for a predetermined limited period, e.g., five or ten minutes, regardless of any current dehumidification need. During this period, wheel 12 can absorb moisture that the surface of coil 14 may have accumulated from a previous on-cycle and is currently evaporating from that surface. Such evaporation can be caused by air 16 passing across the surface of coil 14 before the coil is sufficiently cool to hold the moisture in a condensed state. With wheel 12 rotating at the beginning of every on-cycle, downstream air passageway 34 can immediately convey relatively dry supply air 16C to comfort zone 18.

[0036] Once the predetermined period expires, signal 40 can de-activate wheel 12, while cooling coil 14 and blower 26 continue operating to meet the sensible cooling demand of zone 18. If, however, a humidistat 44 determines that a dehumidification demand exists after the predetermined period expires, signal 40 may command wheel 12 to continue operating.

[0037] In some cases system 10 may have difficulty meeting the sensible cooling demand of zone 18. Such an

overload can be determined based on a thermostat **46** indicating that the zone temperature has risen to a certain level (e.g., two degrees above a target zone temperature) even though system **10** is still operating. In such situations, signal **40** may de-activate wheel **12** until system **10** can satisfy the zone's sensible cooling demand.

[0038] In another embodiment, shown in **FIG. 2**, a refrigerant system **48** comprises desiccant wheel **12**, blower **26**, cooling coil **14**, an optional heater **50**, and an enclosure **52**. Enclosure **52** defines an upstream air passageway **54**, an intermediate air passageway **56**, and a downstream air passageway **58**. Blower **26** forces air sequentially through upstream passageway **54**, through heater **50**, through a first portion **12A** of wheel **12** that releases moisture to the air, into intermediate air passageway **56**, through blower **26**, through cooling coil **14** to provide latent and sensible cooling, through another portion **12B** of wheel **12** to absorb moisture from the air, into downstream passageway **58**, and onto a comfort zone. The air in downstream air passageway **58** is supply air, and the air in upstream air passageway **54** can be return air and/or outside air. In this case, wheel **12** transfers moisture from the supply air to the return air or outside air.

[0039] System **48** is particularly suited for VAV systems where the cooling demand of a building is met by a system that delivers supply air at a variable air volume. A controller **60**, similar to controller **28**, provides one or more output signals to system **48**. Output signal **62**, for example, controls the speed or airflow volume of blower **26**, an output signal **64** controls the rotational speed of wheel **12**, an output signal **66** controls cooling coil **14** (e.g., by selectively actuating its associated compressor), and an output signal **68** controls the operation of heater **50**. To meet the building's cooling needs, controller **60** varies the air delivery of blower **26** by providing output signal **62** in response to an input signal **70** from a temperature sensor **72**.

[0040] To help maintain the wheel's efficiency over a range of airflow volumes, controller **60** provides output signal **64** such that the rotational speed of wheel **12** increases with the air volume. The wheel's speed is preferably adjusted to be proportional to the blower's speed or airflow volume. Controller **60** can determine the airflow volume by way of an input signal **74** from a conventional airflow sensor **76**. Alternatively, controller **60** can simply assume the airflow volume or blower speed agrees with output signal **62**, whereby flow sensor **76** can be omitted.

[0041] Heater **50**, which is optional, can be used for preheating the return air in situations where the rest of system **48** is unable to effectively dehumidify the air without excessively cooling the supply air to a level where the comfort zone begins feeling unpleasantly cold. Heater **50** can be a primary or auxiliary condenser of the same refrigerant circuit that contains cooling coil **14**, or heater **50** can be a separate heater, such as an electric heater, hot water coil, radiator, etc.

[0042] In some cases where the sensible cooling demand drops significantly while the latent cooling demand remains high, the heat transfer rate between heater **50** and the current of air passing therethrough can remain constant or be reduced by a first delta-heat transfer rate, and the heat transfer rate between cooling coil **14** and the current of air passing therethrough can be reduced by a second delta-heat transfer rate, wherein the second delta-heat transfer rate is

greater than the first delta-heat transfer rate. Deactivating or increasing the surface temperature of cooling coil **14** can be the primary cause of the second delta-heat transfer rate, while a decrease in airflow volume can cause the first delta-heat transfer rate. If, however, the airflow volume is not reduced, then the first delta-heat transfer rate may be substantially zero (i.e., the heat transfer rate of heater **68** remains substantially constant).

[0043] **FIG. 3** shows a system **78** that is similar to system **48** of **FIG. 2**; however, system **78** has a second cooling coil **80** and a heat recovery system **82**. With the heat recovery system and second cooling coil, system **78** can provide greater dehumidification with little or no auxiliary heat, i.e., heater **50** may be optional.

[0044] System **78** includes blower **26** that forces air **84** through an enclosure **86** that defines various air passageways. In some embodiments, blower **26** forces air **84** sequentially through an outside air inlet **88**, a cooling section **82A** of heat recovery system **82**, an intermediate air chamber **90**, cooling coil **80**, a heating section **82B** of heat recovery system **82**, an outside air outlet **92**, an upstream air passageway **94** where return air **84A** from a comfort zone and outside air **84B** can mix, optional heater **50**, a moisture-releasing section **12A** of desiccant wheel **12**, an intermediate air passageway **94** that contains blower **26** and cooling coil **14**, a moisture-absorbing section **12B** of wheel **12**, and a downstream air passageway **96** that discharges supply air **85C** to a comfort zone.

[0045] From upstream air passageway **94** to downstream air passageway **96**, the function of system **78** is very similar to that of system **48**. To enhance dehumidification, however, system **78** employs cooling coil **80** and heat recovery system **82**. Cooling coil **80** removes moisture from the air, while heat recovery system **82** transfer heat from the air passing from outside air inlet **88** to intermediate air chamber **90** to the air passing from intermediate air chamber **90** to outside air outlet **92**, whereby the air moving from outside air outlet **92** to upstream air passageway **94** is cooler and drier than the air entering system **48** of **FIG. 2**.

[0046] The fact that the air in passageway **94** is not only drier but is also cooler than the air in passageway **94** is an important advantage over conventional systems that preheat or warm the air to achieve dehumidification. With conventional systems, reheating the air increases the sensible cooling load. With the current system, however, dehumidification can be achieved without increasing the sensible cooling load, thus the current system is more efficient.

[0047] Heat recovery system **82** is schematically illustrated to represent any apparatus for transferring heat from one airstream to another. Heat recovery system **82**, for example, can be a conventional air-to-air heat exchanger or it can be the condenser and evaporator of a conventional refrigerant circuit.

[0048] Such a refrigerant circuit is incorporated into a system **98** that is illustrated in **FIG. 4**. System **98** includes a refrigerant circuit that comprises a refrigerant compressor **100**, a condenser **102**, an expansion device **104** (e.g., a flow restriction, capillary, orifice, expansion valve, etc.), and an evaporator **106**. The refrigerant circuit operates in a conventional manner in that compressor **100** discharges hot pressurized refrigerant gas into condenser **102**. The refrigerant

erant within condenser **102** condenses as the refrigerant releases heat to the surrounding air (the air passing from an intermediate chamber **90'** to an outside air outlet **92'**). From condenser **102**, the condensed refrigerant cools by expansion by passing through expansion device **104**. The refrigerant then enters evaporator **106** where the relatively cool refrigerant absorbs heat from the incoming outside air. From evaporator **106**, the refrigerant returns to the inlet of compressor **100** to be compressed again. As a result, the refrigerant circuit transfers heat from the air passing through evaporator **106** to the air passing through condenser **102**.

[0049] It should be noted, that although upstream air passageway **94** conveys a mixture of outside air **84B** and return air **84A**, in some embodiments there is no return air, only outside air. In such cases, the airflow volume through intermediate air chamber **90** or **90'** is substantially equal to that of intermediate air passageway **94**. If, however, enclosure **86** or **86'** receives both outside air and return air, then intermediate air passageway **94** conveys more air than does intermediate air chamber **90** or **90'**. Any excess air can be released from the building through some sort of exhaust or other opening in the building.

[0050] Although the invention is described with reference to a preferred embodiment, it should be appreciated by those skilled in the art that various modifications are well within the scope of the invention. Therefore, the scope of the invention is to be determined by reference to the following claims:

1. A refrigerant system for conditioning air for a comfort zone, the refrigerant system comprising:

- an enclosure defining an upstream air passageway, a downstream air passageway, and an intermediate air passageway therebetween, wherein the air passes sequentially through the upstream air passageway, the intermediate air passageway, and the downstream air passageway;
- a cooling coil disposed in the enclosure;
- a source associated with the cooling coil and providing a chilled fluid thereto;
- a blower in a position to force the air from the downstream air passageway into the comfort zone;
- a desiccant wheel able to absorb moisture from the air passing from the intermediate air passageway to the supply air passageway and simultaneously release moisture to the air passing from the upstream air passageway to the intermediate air passageway; and
- a controller connected to selectively start and stop the source and selectively energize and de-energize the desiccant wheel for rotation, wherein the controller upon starting the source energizes the desiccant wheel for a predetermined limited period, whereby the desiccant wheel during the predetermined limited period helps absorb moisture that may vaporize from the cooling coil before the cooling coil is sufficiently cool to condense moisture from the air.

2. The refrigerant system of claim 1, further comprising a moisture sensor in communication with the controller, wherein the controller de-energizes the desiccant wheel in response to the moisture sensor detecting that the air is drier than a certain limit.

3. The refrigerant system of claim 1, further comprising a temperature sensor in communication with the controller, wherein the controller after the predetermined limited period de-energizes the desiccant wheel in response to the temperature sensor detecting that the air is warmer than a certain limit.

4. The refrigerant system of claim 1 wherein the source is a compressor and the cooling coil is disposed in the upstream air passageway.

5. A method for conditioning air for a comfort zone, the method comprising:

- energizing a source of chiller fluid of a refrigerant system;
- energizing a desiccant wheel for rotation for a predetermined period; and
- de-energizing the desiccant wheel at the end of the predetermined period while continuing to energize the source.

6. The method of claim 5, wherein the step of de-energizing the desiccant wheel is performed provided the air is drier than a certain limit.

7. The method of claim 5, wherein the step of de-energizing the desiccant wheel is performed provided the air is warmer than a certain limit.

8. The method of claim 5 wherein the source is a compressor.

9. A refrigerant system for conditioning air for a comfort zone, the refrigerant system comprising:

- an enclosure defining an upstream air passageway, a downstream air passageway, and an intermediate air passageway therebetween, wherein the air passes sequentially through the upstream air passageway, the intermediate air passageway, and the downstream air passageway;
- a cooling coil disposed in the intermediate air passageway;
- a desiccant wheel able to absorb moisture from the air passing from the intermediate air passageway to the downstream air passageway and simultaneously release moisture to the air passing from the upstream air passageway to the intermediate air passageway;
- a variable air volume blower in a position to force the air at a variable airflow rate from the downstream air passageway to the comfort zone; and
- a controller connected to the variable air volume blower to adjust the variable airflow rate and connected to the desiccant wheel to adjust a rotational speed thereof, wherein the controller selectively increases the rotational speed of the desiccant wheel upon increasing the variable airflow rate and decreases the rotational speed of the desiccant wheel upon decreasing the variable airflow rate.

10. The refrigerant system of claim 9, wherein the rotational speed of the desiccant wheel is proportional to the variable airflow rate of the blower.

11. The refrigerant system of claim 9, further comprising an airflow sensor in fluid communication with the air, wherein the variable airflow rate of the blower is determined based on the airflow sensor.

- 12.** The refrigerant system of claim 9, further comprising:
 a heater disposed in the upstream air passageway; and
 a humidistat disposed in the upstream air passageway, wherein the heater is selectively energized and de-energized in response to the humidistat.
- 13.** The refrigerant system of claim 9, further comprising a temperature sensor disposed downstream of the intermediate air passageway, wherein activation of the cooling coil is in response to the temperature sensor.
- 14.** The refrigerant system of claim 9 further including a source of chilled fluid operatively associated with and connected to the cooling coil and the controller wherein the controller upon starting the source energizes the desiccant wheel for a predetermined limited period, whereby the desiccant wheel during the predetermined limited period helps absorb moisture that may vaporize from the cooling coil before the cooling coil is sufficiently cool to condense moisture from the air.
- 15.** A method of conditioning air for a comfort zone, the method comprising:
 adjusting an airflow volume of a variable air volume blower;
 increasing a rotational speed of a desiccant wheel upon increasing the airflow volume; and
 decreasing the rotational speed of the desiccant wheel upon decreasing the airflow volume; and
 cooling a second current of air before the second current of air passes through the desiccant wheel.
- 16.** The method of claim 15, further comprising changing the rotational speed of the desiccant wheel proportionally with the airflow volume.
- 17.** The method of claim 15, further comprising, in response to a humidistat, heating a first current of air before the first current of air passes through the desiccant wheel.
- 18.** The method of claim 15 further comprising:
 energizing a source of chiller fluid of a refrigerant system;
 energizing the desiccant wheel for rotation for a predetermined period; and
 de-energizing the desiccant wheel at the end of the predetermined period while continuing to energize the source.
- 19.** A method of conditioning air for a comfort zone, the method comprising:
 heating a first current of air at a first heat transfer rate before the first current of air passes through a desiccant wheel;
 cooling a second current of air at a second heat transfer rate before the second current of air passes through the desiccant wheel;
 decreasing the second heat transfer rate by a second delta-heat transfer rate while still cooling the second current of air; wherein the step of decreasing the second heat transfer rate is achieved by increasing a surface temperature of a cooling coil that is in heat transfer relationship with the second current of air;
 decreasing the first heat transfer rate by a first delta-heat transfer rate while still heating the first current of air, wherein the second delta-heat transfer rate is greater than the first delta heat transfer rate.
- 20.** The method of claim 19, further comprising decreasing a rotational speed of the desiccant wheel upon decreasing the second heat transfer rate.
- 21.** The method of claim 19, wherein the step of decreasing the first heat transfer rate is achieved by decreasing an airflow volume of the first airflow rate.
- 22.** The method of claim 19 further comprising:
 energizing a source of chiller fluid of a refrigerant system;
 energizing the desiccant wheel for rotation for a predetermined period; and
 de-energizing the desiccant wheel at the end of the predetermined period while continuing to energize the source.
- 23.** A refrigerant system for conditioning air for a comfort zone, the refrigerant system comprising:
 an enclosure defining an outside air inlet, an intermediate air chamber, an outside air outlet, an upstream air passageway, an intermediate air passageway, and a downstream air passageway, wherein the air moves downstream sequentially through the outside air inlet, the intermediate air chamber, the outside air outlet, the upstream air passageway, the intermediate air passageway, and the downstream air passageway;
 a heat recovery system in fluid communication with the outside air inlet, the intermediate air chamber, and the outside air outlet, wherein the heat recovery system transfers heat from a first current of air to a second current of air, wherein the first current of air travels from the outside air inlet to the intermediate air chamber, and the second current of air travels from the intermediate air chamber to the outside air outlet;
 a desiccant wheel able to absorb moisture from the air passing from the intermediate air passageway to the downstream air passageway and simultaneously release moisture to the air passing from the upstream air passageway to the intermediate air passageway;
 a blower in a position to force the air from the downstream air passageway to the comfort zone;
 a first cooling coil disposed within the intermediate air passageway to help cool and remove moisture from the air; and
 a second cooling coil disposed in the intermediate air chamber.
- 24.** The refrigerant system of claim 23, wherein the heat recovery system is an air-to-air heat exchanger that places the first current of air in proximity with the second current of air to effect heat transfer therebetween.
- 25.** The refrigerant system of claim 23, wherein the heat recovery system is a refrigerant circuit that includes a condenser disposed in heat transfer relationship with the first current of air and an evaporator in heat transfer relationship with the second current of air.
- 26.** The refrigerant system of claim 23, further comprising a heater disposed downstream of the heat recovery system and upstream of the desiccant wheel.
- 27.** The refrigerant system of claim 23, wherein the intermediate air passageway conveys a greater volume of air than does the intermediate air chamber.

28. The refrigerant system of claim 23 further including a source of chilled fluid operatively associated with and connected to the first cooling coil, a controller operably connected to and controlling the source and the desiccant wheel wherein the controller upon starting the source energizes the desiccant wheel for a predetermined limited period, whereby the desiccant wheel during the predetermined limited period helps absorb moisture that may vaporize from the cooling coil before the cooling coil is sufficiently cool to condense moisture from the air.

29. A method of conditioning air for a comfort zone, the method comprising:

conveying the air sequentially through an outside air inlet, an intermediate air chamber, an outside air outlet, an upstream air passageway, through a desiccant wheel, through an intermediate air passageway, back through the desiccant wheel, and out through a downstream air passageway;

cooling the air as the air passes from the outside air inlet to the intermediate air chamber;

heating the air as the air passes from the intermediate air chamber to the outside air outlet;

heating the air as the air passes from the outside air outlet to the desiccant wheel;

releasing moisture from the desiccant wheel to the air as the air passes from the upstream air passageway to the intermediate air passageway;

cooling the air as the air moves from the desiccant wheel to the downstream air passageway; and

absorbing moisture from the air as the air moves back through the desiccant wheel upon traveling from the intermediate air passageway to the downstream air passageway.

30. The method of claim 29, wherein the air passing from the outside air inlet to the intermediate air chamber is what heats the air passing from the intermediate air chamber to the outside air outlet.

31. The method of claim 29, wherein more air passes through the intermediate air passageway than through the intermediate air chamber.

32. The method of claim 29, further including the step of de-energizing the desiccant wheel wherein the step of de-energizing the desiccant wheel is performed provided the air is warmer than a certain limit.

33. Apparatus for conditioning air for a comfort zone, comprising:

a refrigeration system;

a source of chiller fluid for the refrigeration system;

a desiccant wheel;

means for energizing the source of chiller fluid of the refrigerant system;

means for energizing the desiccant wheel for rotation for a predetermined period; and

means for de-energizing the desiccant wheel at the end of the predetermined period while continuing to energize the source.

* * * * *