




(86) Date de dépôt PCT/PCT Filing Date: 2003/07/24
 (87) Date publication PCT/PCT Publication Date: 2004/02/19
 (85) Entrée phase nationale/National Entry: 2005/02/07
 (86) N° demande PCT/PCT Application No.: US 2003/023316
 (87) N° publication PCT/PCT Publication No.: 2004/015357
 (30) Priorité/Priority: 2002/08/09 (60/402,464) US

(51) Cl.Int.⁷/Int.Cl.⁷ G05D 16/10
 (71) Demandeur/Applicant:
FATS, INC., US
 (72) Inventeurs/Inventors:
METCALFE, COREY HOWARD, US;
WILSON, HENRY MARTIN, JR., US;
FLEMING, PAUL HEATH, US
 (74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SYSTEME A EMPRUNT DE GAZ POUR SIMULATEURS D'ARMES A FEU
 (54) Title: GAS OPERATING SYSTEM FOR FIREARM SIMULATORS

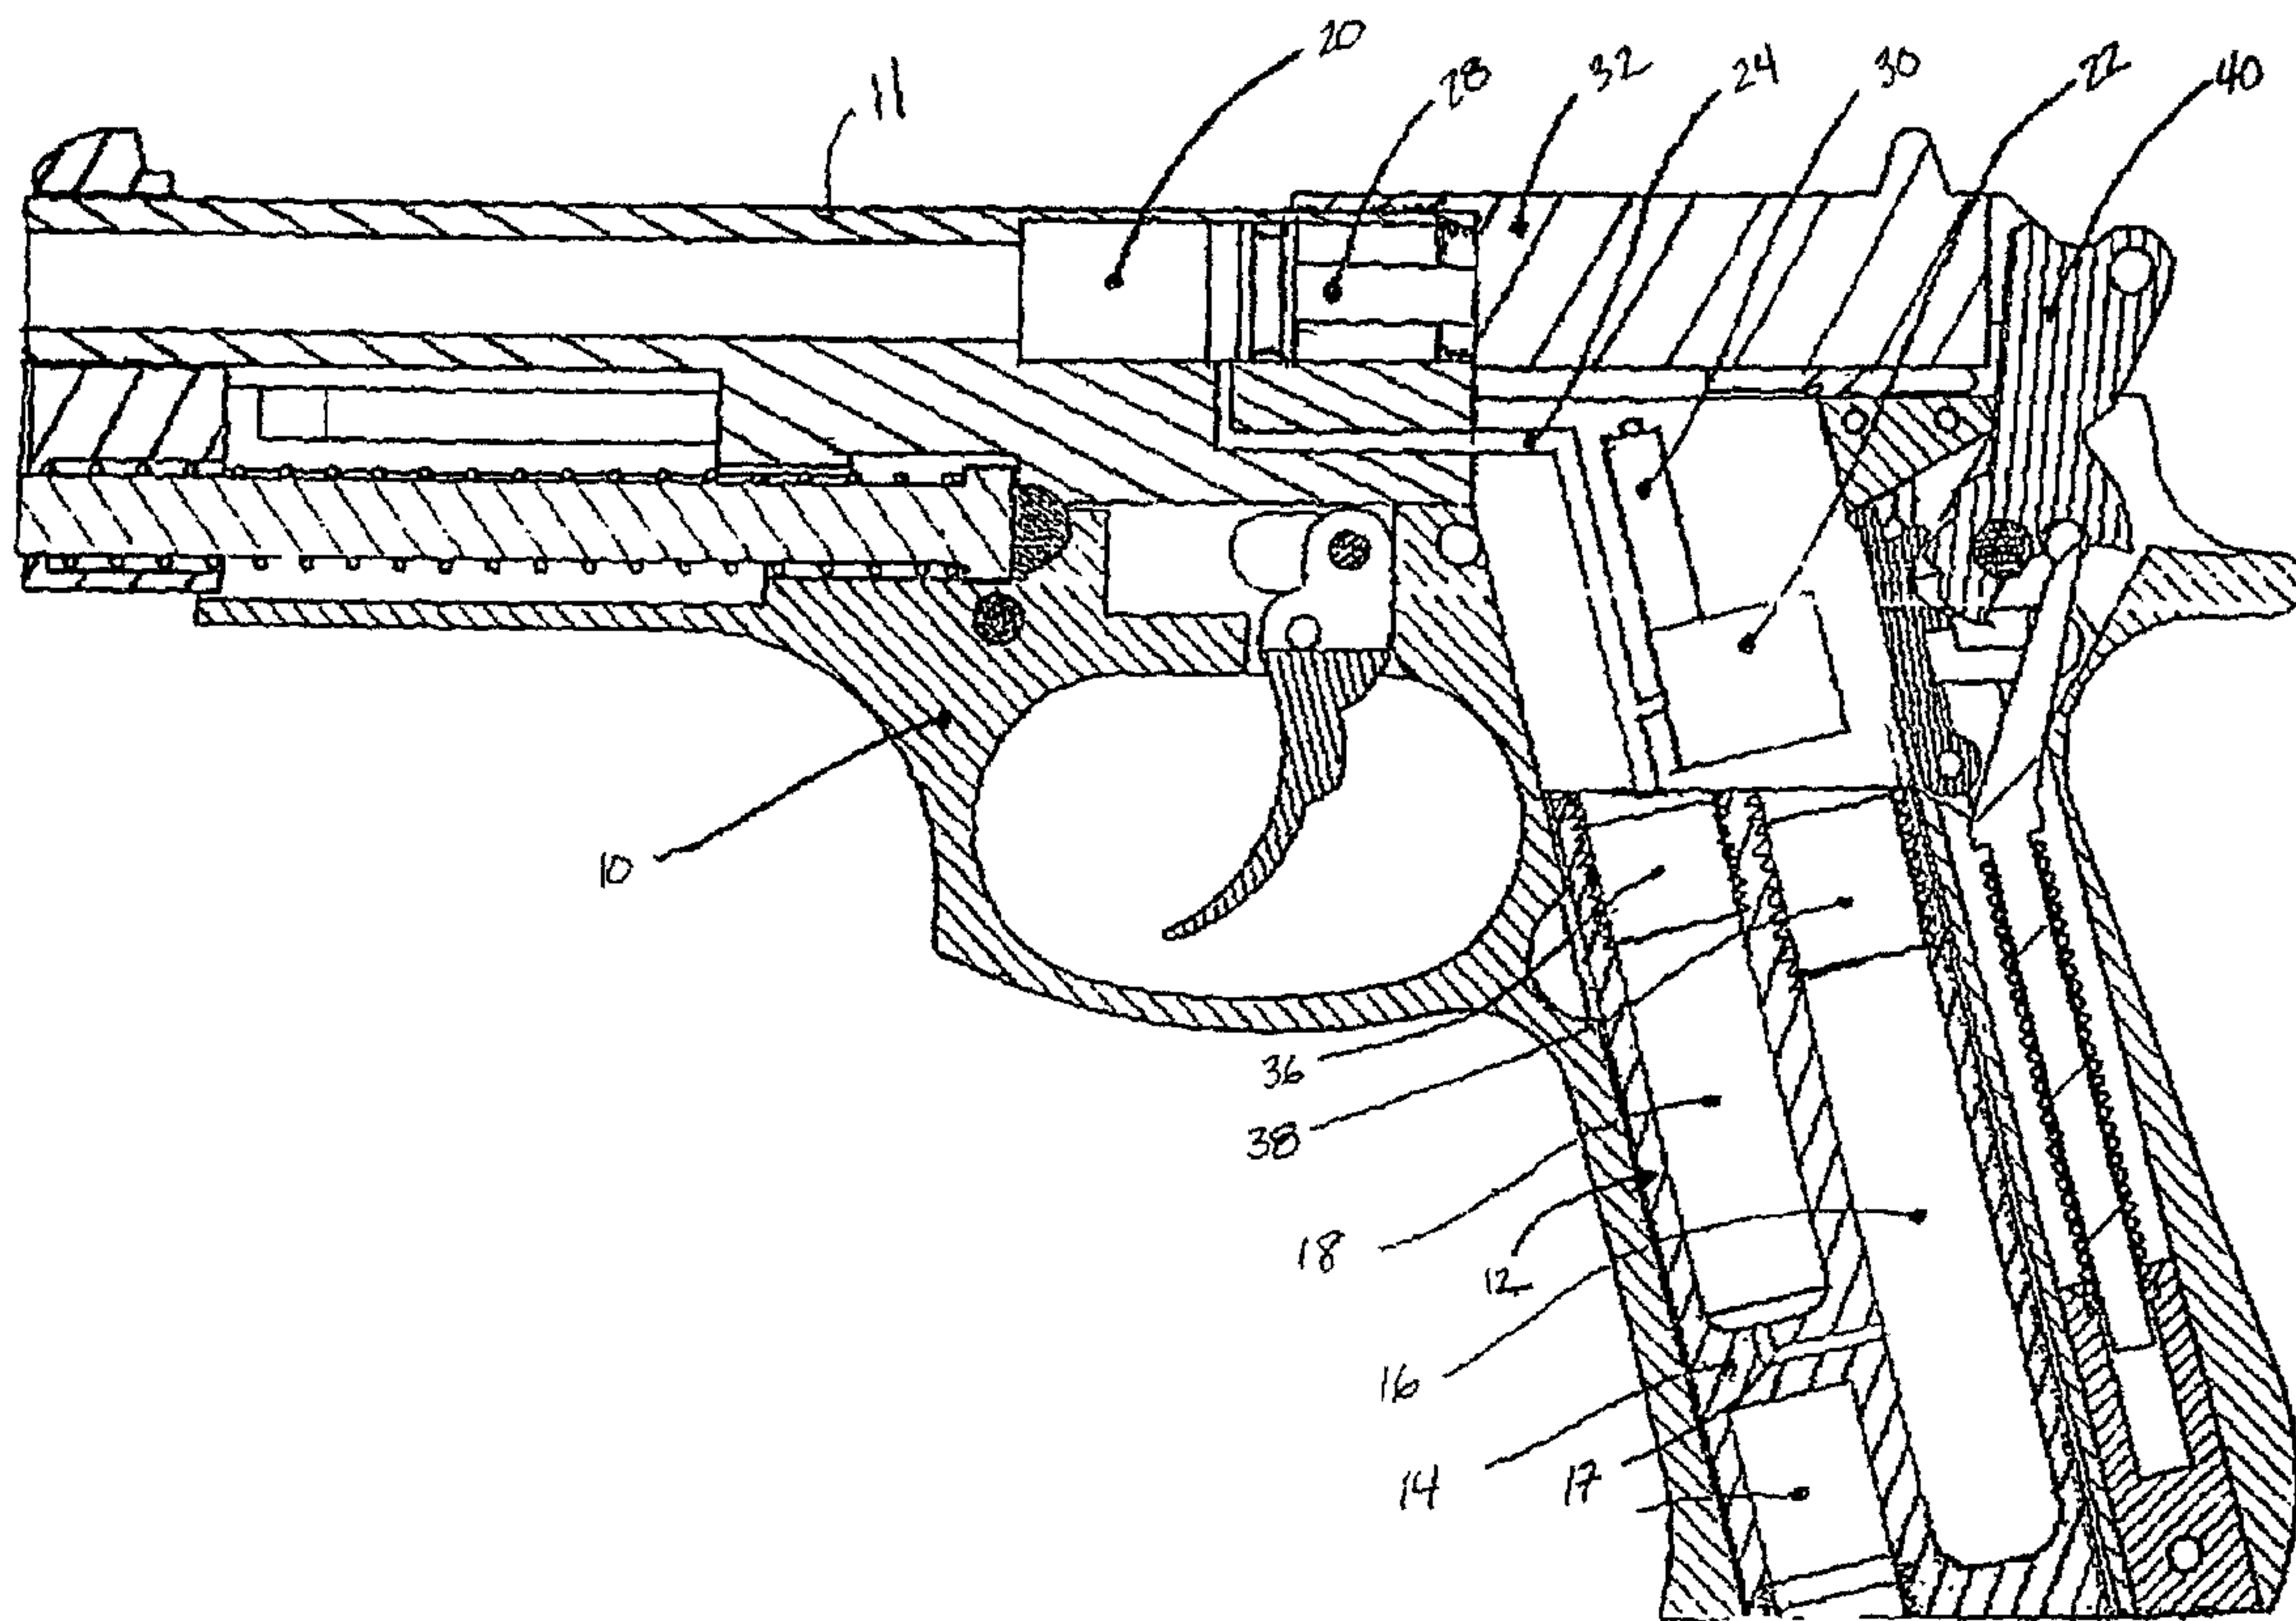

(57) Abrégé/Abstract:

A removable gas supply (12) for a weapon simulator (10), wherein the gas system cycles the bolt (32) or slide (32) of the simulator (10) to provide recoil, actuate a hammer/trigger mechanism (34) and provide realism of the original weapon functions. The weapon simulator (10) has a housing (11) defining a piston chamber (59) and a piston (58) positioned in said chamber and connected to the bolt (32). The simulator (10) also includes a valve chamber (47) in the housing (11) connected with said regulated gas supply (12) and said bolt (32), and a recoil valve (46) positioned in the valve chamber (47) to control the release of gas from said regulated gas supply (12) to said piston chamber (59) to generate recoil in the weapon simulator (10).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)


PCT

(10) International Publication Number
WO 2004/015357 A3

- (51) International Patent Classification⁷: **G05D 16/10**
- (21) International Application Number:
PCT/US2003/023316
- (22) International Filing Date: 24 July 2003 (24.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/402,464 9 August 2002 (09.08.2002) US
- (71) Applicant: **FATS, INC.** [US/US]; 7340 McGinnis Ferry Road, Suwanee, GA 30024 (US).
- (72) Inventors: **METCALFE, Corey, Howard**; 2831 Blarney Way, Duluth, GA 30024 (US). **WILSON, Henry, Martin, Jr.**; 2070 Skylar Leigh Drive, Buford, GA 30518 (US). **FLEMING, Paul, Heath**; 5707 Manuel Place, Sugarhill, GA 30518 (US).
- (74) Agent: **HOLLAND, Christopher, A.**; Smith, Gambrell & Russell, LLP, Suite 3100, 1230 Peachtree Street, N.E., Promenade II, Atlanta, GA 30309-3592 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report:
8 July 2004

[Continued on next page]

(54) Title: GAS OPERATING SYSTEM FOR FIREARM SIMULATORS

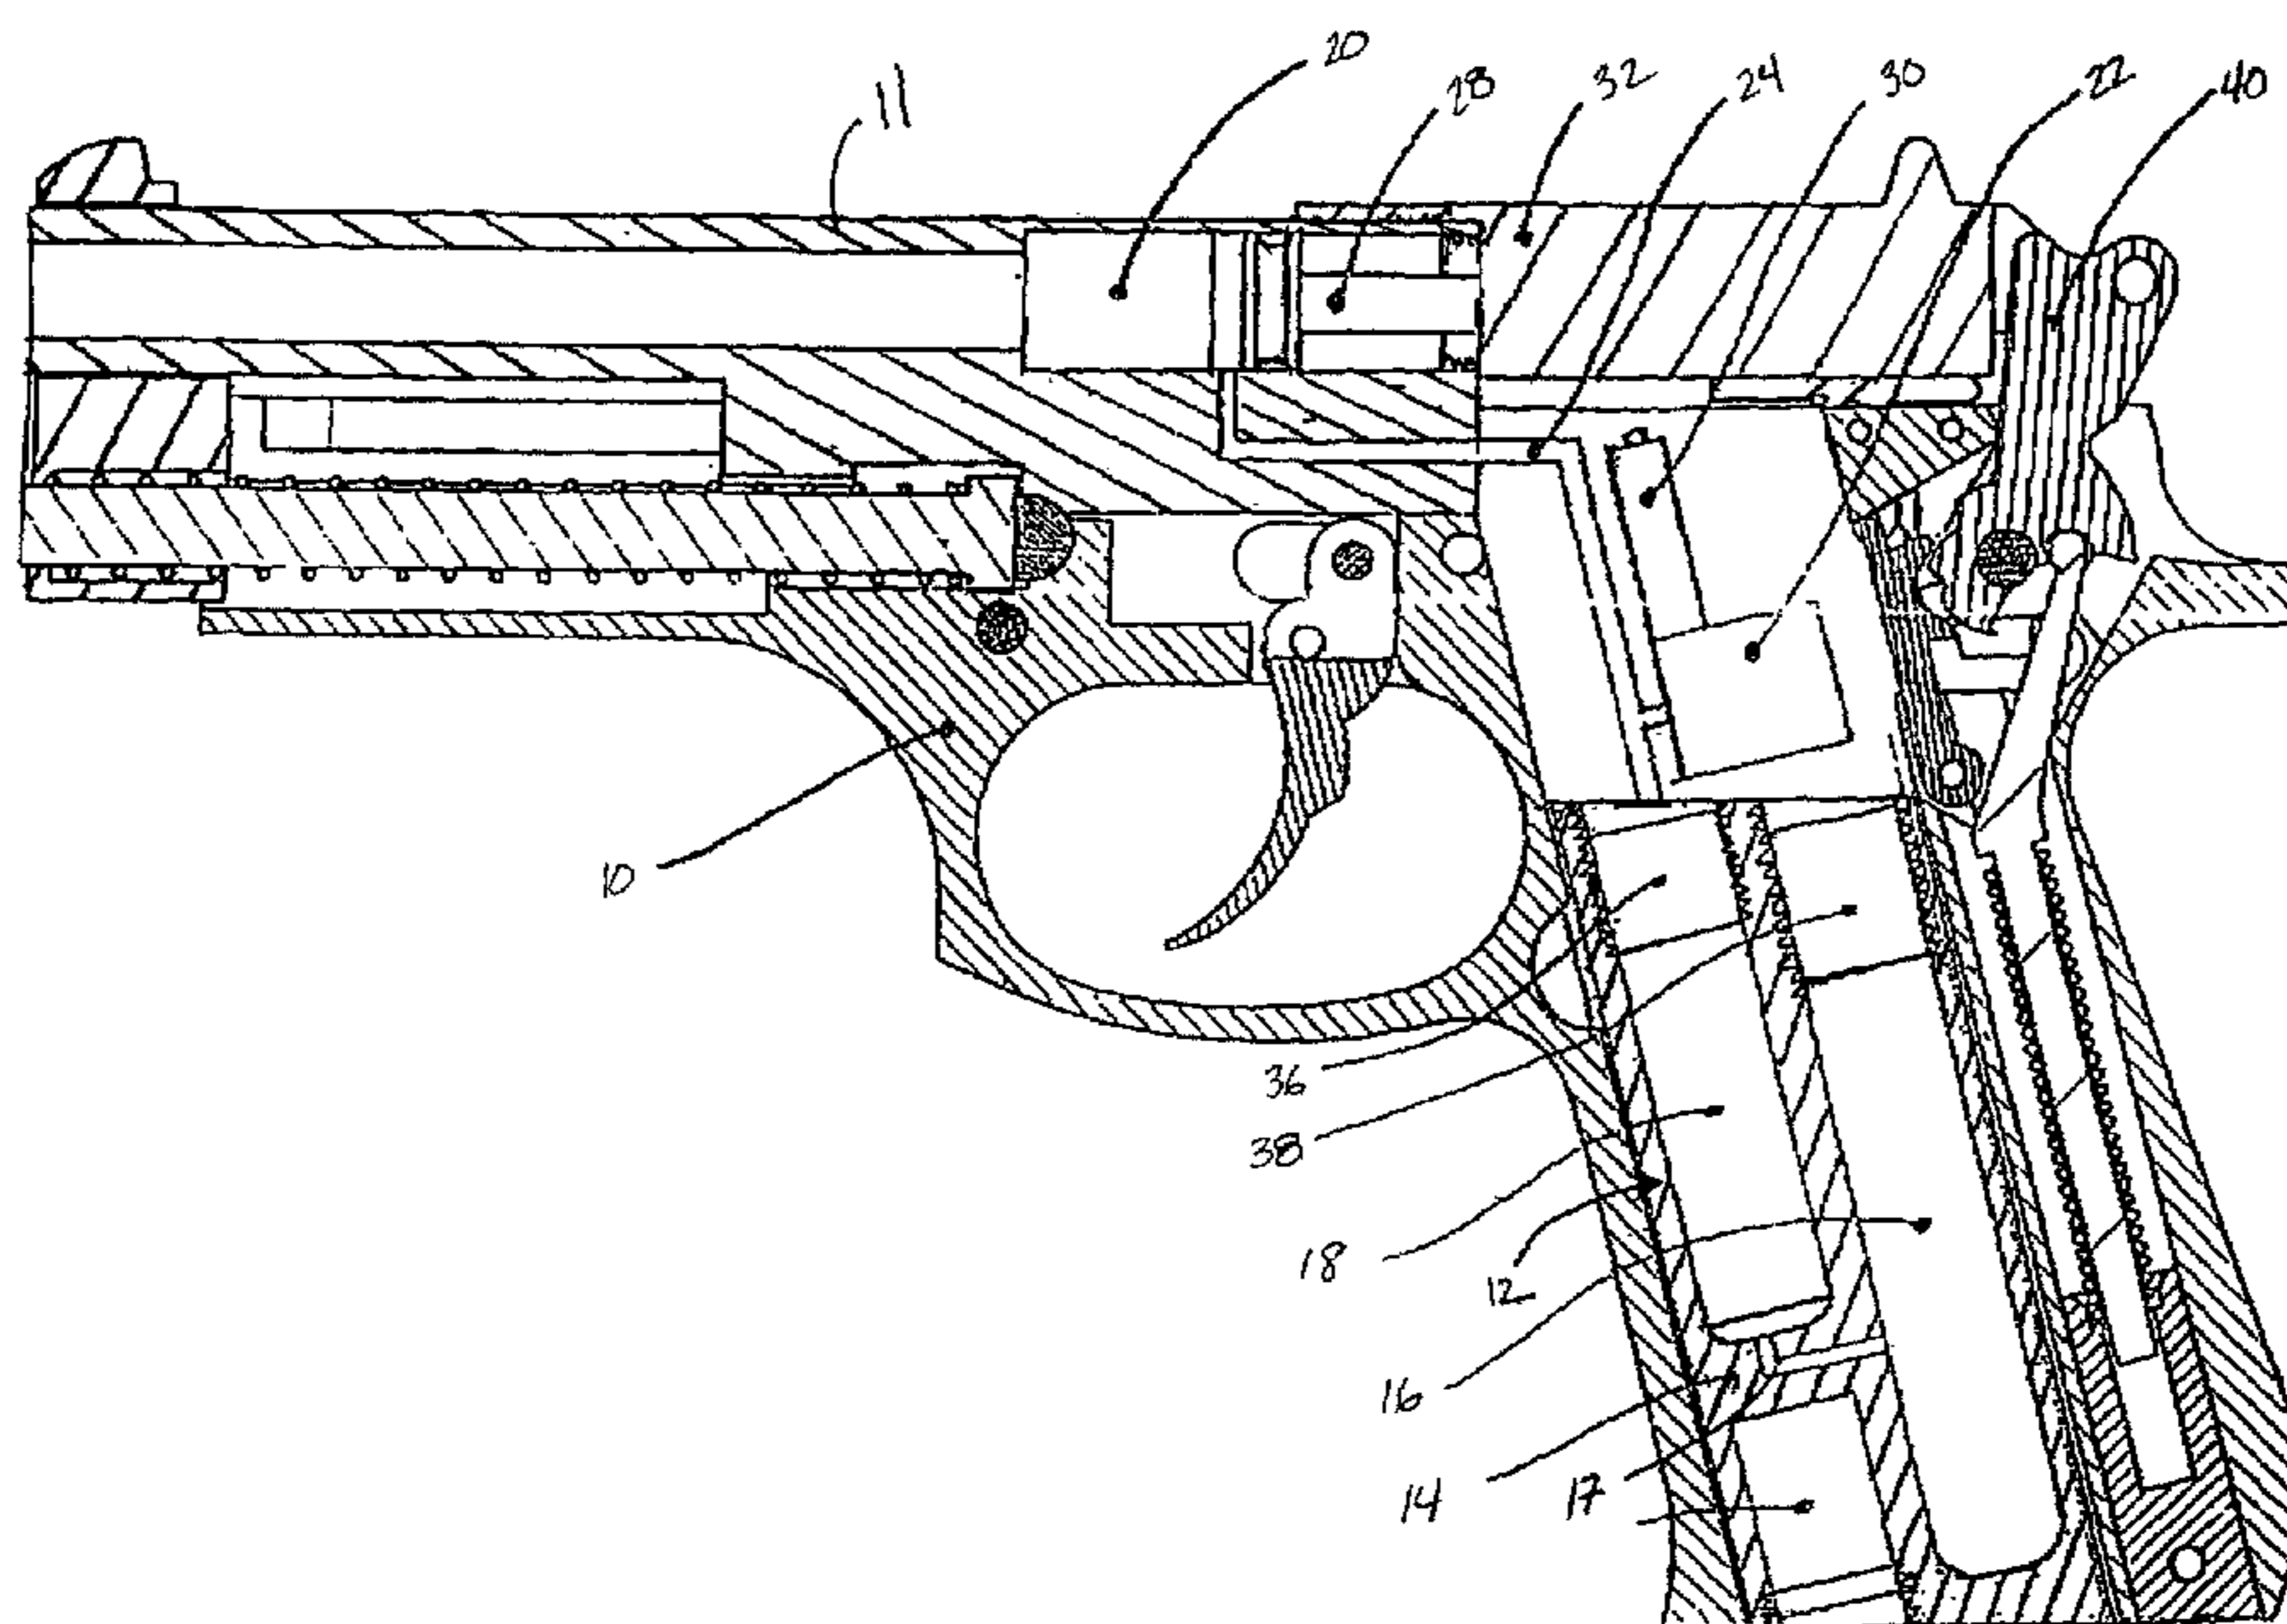

(57) Abstract: A removable gas supply (12) for a weapon simulator (10), wherein the gas system cycles the bolt (32) or slide (32) of the simulator (10) to provide recoil, actuate a hammer/trigger mechanism (34) and provide realism of the original weapon functions. The weapon simulator (10) has a housing (11) defining a piston chamber (59) and a piston (58) positioned in said chamber and connected to the bolt (32). The simulator (10) also includes a valve chamber (47) in the housing (11) connected with said regulated gas supply (12) and said bolt (32), and a recoil valve (46) positioned in the valve chamber (47) to control the release of gas from said regulated gas supply (12) to said piston chamber (59) to generate recoil in the weapon simulator (10).

WO 2004/015357 A3

WO 2004/015357 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

GAS OPERATING SYSTEM FOR FIREARM SIMULATORS**Technical Field**

[0001] The present invention relates to firearm simulators.

Background Art

[0002] Because of the lethal characteristics inherent in operating guns, proper training in their use is imperative. Such training often involves the firing of blanks or live ammunition. Load noise, spent cartridge waste, noxious burned powder odors, repetitive reloading, environmental constraints, high cost and overall danger are all substantial detriments to the use of blanks or live ammunition.

[0003] To overcome the above disadvantages, training devices have evolved for simulating the firing of guns. These devices relate to weaponry having primarily military use. U.S. Pat. No. 4,302,190 discloses a rifle recoil simulator whereby compressed air passes through orifices in the rifle barrel to force the barrel upward in a recoil motion. A trigger switch activates an electronic timer-solenoid-air valve system for controlling air passage to the barrel orifices.

[0004] Artillery loading and recoil simulators are described in U.S. Pat. Nos. 4,194,304 and 4,365,959. These are complex mechanisms designed to train entire gunnery crews. They are not directly related to firearm recoil, which is the subject of the present invention.

[0005] To improve the realism of the weapons familiarization process and to provide a more "lifelike" experience, a variety of approaches have been suggested to make the weapons range more realistic. For example, some weapons ranges provide paper targets with threatening images rather than bull's-eye targets. In attempts to present a more realistic scenario to the participant and to provide an interactive and immersive experience, some weapons ranges have replaced such fixed targets with moving or "pop-up" targets such as spring-loaded mechanical images or animated video images projected onto a display screen. The pop-up or animated images present moving targets and/or simulated return threats toward which the participant fires. One problem with such an approach is that the bullets damage or destroy the target. For example, the bullets can punch holes through display screens, eventually rendering the screens inoperative. Further, use of live ammunition can be very dangerous, especially in unfamiliar training exercises where the participant's performance limits are tested.

[0006] To address such problems, some training ranges use non-lethal ammunition, such as projectiles propelled by air cartridges in place of conventional bullets. One type of non-lethal ammunition is a Crown Type E air cartridge. In conventional uses of such cartridges, a releasable cap attaches to the cartridge and covers an outlet port. Then, when the outlet port is opened, a highly pressurized gas is released from the cartridge and propels the releasable cap away from the cartridge at a high velocity. The cap travels through a gun barrel and is emitted from the gun as a non-lethal projectile. To detect the impact locations of the non-lethal projectile, some such ranges use some type of projectile tracking device, such as high-speed imaging equipment. Such ranges can be very expensive due to their complexity and use of specialized equipment.

[0007] Other ranges allow the non-lethal ammunition to penetrate or otherwise mark a target object to indicate impact location. Such ranges have the drawback that the non-lethal ammunition is destructive. Additionally, the impact locations are difficult to track on a "real-time" basis, which makes interactive ranges difficult. Also, while such approaches may improve visual approximations of actual situations as compared to paper targets, such approaches lack a visual or other virtually instantaneous feedback indicating the effectiveness of the participant's fire.

[0008] Another alternative type of weapons range employs a light beam in place of a projectile. In such ranges, the participant holds a simulated weapon shaped like a conventional weapon that is activated by a switch coupled to a conventionally shaped and positioned trigger. When the participant pulls the trigger, the simulated weapon emits a light beam that strikes the target, causing an illuminated spot. An optical detector detects the spot and indicates the impact location.

[0009] Such simulated weapons lack a realistic feel because they do not recoil in response to the simulated fire. Moreover, the simulated weapons do not emit shells that can distract the participant and can affect the participant's footing.

[0010] To try to simulate an actual weapon's recoil, a compressed air line can be coupled to the simulated weapon. Then, when the trigger is pulled, an air driven mechanism applies a pulse of force to the simulated weapon to produce a simulated recoil. Such a system has the drawback that the air line acts as a tether, limiting the participant's mobility and affecting aim. The system also lacks the ejected shells of actual or non-lethal ammunition.

[0011] The prior art attempts, including those described in U.S. Pat. Nos. 5,947,738 5,569,085, 4,480,999, and 4,678,437, to simulate recoil have limitations and drawbacks as

discussed above in addition to being tethered to a console, lack of proper feel and balance, and related problems, all of which are solved by the present invention.

Disclosure Of The Invention

[0012] The present invention is a firearm simulator that contains all of the necessary gas energy to operate itself and yet is electrically controlled and completely self-contained within the profile of the original weapon and with no lines or hoses protruding. The self-contained gas system allows for full simulator function and student mobility combined with computer control of the weapon. Computer control is desirable to achieve a higher level of realism, to provide more training functions than a strictly mechanical simulator and to allow for remote communication and control.

[0013] In addition, the gas supply is housed within a simulated, removable magazine and is replenished by changing the magazine to a new one in the same fashion as is done on a live weapon. Thus, the student is trained to correctly reload the weapon by changing magazines. The gas in the magazine can be quickly recharged while the magazine is not being used in the weapon.

[0014] Also, the weapon simulator is not required to use explosives/flammables or to expel any solid material including cartridges or projectiles in order to create its cycling and recoil. This makes the weapon trainer safer, easier to use and allows for a more reliable function. Without projectiles, the weapon barrel may contain a laser device for purposes of providing weapon aiming information.

[0015] Furthermore, the weapon simulator includes one recoil valve to produce the desired recoil to mimic an actual firearm.

Brief Description Of The Drawing

[0016] Figure 1 is a sectional side view of one embodiment of the weapon simulator having a controlled gas operating system of the present invention;

[0017] Figure 2 is a sectional side view of another embodiment of the weapon simulator having a controlled gas operating system of the present invention;

[0018] Figure 3 is a sectional side view of the weapon simulator illustrated in Figure 2 with the weapon simulator having been discharged; and

[0019] Figure 4 is a sectional view of the recoil valve taken from lines 4-4 of Figure 2.

Description Of The Best Mode

[0020] Referring to Figure 1, one embodiment of the present invention of a firearm or weapon simulator 10 is illustrated. The weapon simulator 10 incorporates the use of an internal, regulated gas system 12 that is used to cycle the weapon simulator 10 and provide recoil in the weapon simulator 10 for the user. The gas system 12 is present in a removable magazine 14 that is contained entirely within the weapon simulator 10 and requires no external hoses, wires or connections of any kind. The use of this gas system 12 can be incorporated into various firearm designs, such as auto-loading rifles and pistols.

[0021] The magazine 14 of the present invention may be easily inserted and removed from the weapon simulator 10, and contains the gas supply that is needed to operate the weapon simulator 10. More precisely, the gas supply is contained in a built-in primary gas chamber 16 in the removable magazine 14. The high-pressure gas supply allows storage of sufficient energy to power the recoil for the simulated weapon simulator 10 in correlation with the number of shots normally fired from a conventional, fully-loaded live magazine in a live weapon.

[0022] The high-pressure gas supply is reduced to a medium pressure in the present invention using a built-in regulator chamber 18 located in the magazine 14. The regulator chamber 18 is connected to the primary gas chamber 16 via a narrow gas conduit 17. The medium gas pressure from the regulator chamber 18 thereby allows the use of miniaturized electric valves 20, 22 in the weapon simulator 10; that is, the safe supply of gas to the electric valves 20, 22 is through various small gas ports 24. There are two electric valves 20, 22 in the preferred embodiment: a recoil valve 20 and a locking valve 22. Each valve 20, 22 is powered from an electrical supply (such as a battery) that may be contained within the weapon simulator 10. The electric valves 20, 22 are turned on or off to deliver gas to a recoil cylinder/piston assembly 28 and a locking cylinder/piston assembly 30.

[0023] The recoil cylinder/piston assembly 28 includes a piston that is used to drive a slide 32 or bolt of the weapon simulator 10. The slide 32 is driven in a direction to accomplish all of the following: cycle the weapon simulator 10, function a hammer/trigger mechanism 34, and produce recoil in the weapon simulator 10. The locking cylinder/piston assembly 30 includes a piston that is used as a binding mechanism to lock the slide 32 (or bolt) back when the weapon ammunition condition is simulated empty. That is, the locking cylinder/piston assembly 30 extends the piston as directed by the locking valve 22 to prevent

the movement of the slide 32 after the weapon simulator 10 has fired a predetermined number of rounds.

[0024] A quick-connect fitting 36 with flow shut-off^d is used to connect the gas from the magazine 14 to the weapon simulator 10 internally and allows for removal and insertion of the magazine 14 in a similar manner as the live weapon at any time. A second quick-connect fitting 38 with flow shut-off is used for filling the magazine gas chamber 14. The gas supply in gas chamber 14 is thereby recharged by removing the magazine 12 from the weapon simulator 10 and momentarily connecting it to a commercially-available high-pressure compressed-gas tank or vessel (not illustrated).

[0025] As discussed above, there are numerous firearm simulator trainers available on the market today. Many law enforcement, military and government agencies use weapon simulators to train their people. These trainers simulate the operation of a live weapon for the purpose of teaching the student to operate the weapon and to learn to use it against intended targets under various situations and conditions without the danger, effort, and expense of using live ammunition. To simulate the operation of a weapon design that is auto-loading and contains a moving bolt or slide assembly, a gas system is often employed. This system is used to drive the bolt or slide rearward to cycle the weapon as is similar in a live weapon. Weapon recoil is also simulated by nature of the bolt/slide being driven back toward the rear against a recoil spring and often impacted against a part of the weapon. These forces push the weapon against the body of the shooter to provide a recoil force. Most of the auto-loading weapon designs being simulated also contain a removable magazine which holds a supply of ammunition for the weapon to fire. This feature is often included in weapon simulators to provide training for weapon reloading, immediate action drills for weapon jamming, and related situations. The gas systems currently and typically used in these types of simulators are summarized as follows.

[0026] A first common type of gas system uses low-pressure, 80-200 psi gas. This gas is supplied by an externally regulated, commercially available high-pressure compressed gas tank or by a source which actually compresses the low-pressure gas on site. One of the limitations of this system is that it requires a hose or line running from the weapon to a tank or compressor while the weapon is in use. The hose detracts from the mobility of the weapon/shooter because it is attached to a fixed, compressed gas supply or bulky portable compressed gas tank. The realism of the simulator is reduced because the hose protrudes from the weapon, which detracts from the look and feel of a live weapon. Another limitation

is that the low-pressure typically requires large valves, cylinders and air passages to provide sufficient flow and area to produce the forces required to cycle the weapon and produce recoil. In the case of a pistol, the valves must be located external to the weapon which adds bulk and further detracts from the realism of the simulator.

[0027] A second type of gas system uses cartridges which contain high-pressure compressed gas. These cartridges are triggered by being struck with the weapon firing pin and they cycle the weapon with their rapid expansion and/or by gas expulsion which may also propel a projectile. The cartridges are loaded into the weapon magazine, chambered, fired, extracted and ejected in similar fashion to the live weapon. The cartridges are designed to be re-usable. The outside profile of the simulator is the same as the live weapon. The limitations to this system are numerous. These include the high cost of the individual rounds which also wear out and can be damaged. The fact that each round must be individually charged and loaded into the gun magazine is very tedious and time-consuming to the user. The fact that the rounds are ejected exposes them to damage when stepped on and requires that they be individually collected. The fact that the cartridges occupy the magazine and must follow a path through the weapon removes much needed space for electronics and sensors in more advanced simulators. The fact that the simulated weapon must chamber, fire, extract and eject a cartridge for each shot in a similar manner as the original weapon and with much less energy causes the simulator to be less reliable than other types of firearm simulators.

[0028] A third type of gas system uses cartridges which contain an explosive/propellant. These cartridges are triggered by being struck with the weapon firing pin and they cycle the weapon with their rapid expansion and/or by gas expulsion which may also propel a projectile. The cartridges are designed to be disposable. The outside profile of the simulator is the same as the live weapon. The cartridges are loaded into the weapon magazine, chambered, fired, extracted and ejected in similar fashion to the live weapon. There are several limitations to this system. The fact that shells must be individually loaded into the magazine is time-consuming to the user. The fact that the expelled rounds lie on the floor/ground and must be collected and discarded is messy and causes additional work to the user. The fact that the cartridges occupy the magazine and must follow a path through the weapon removes much-needed space for electronics and sensors in more advanced simulators. The fact that the simulated weapon must chamber, fire, extract and eject a

cartridge for each shot in a similar manner as the original weapon and with much less energy causes the simulator to be less reliable than other types of firearm simulators.

[0029] The present invention solves all of the limitations of the above-mentioned systems. Comparing the present design with the other gas systems described above, it is clear to see the limitations eliminated by the present invention. For example, comparing the present invention to the first gas system described above, the gas system 12 of the present invention is completely contained within the weapon simulator 10. By storing compressed gas within the magazine 14 that is also at high-pressure, there is sufficient amount of gas energy within the weapon simulator 10 to cycle the weapon simulator 10. The high-pressure gas can be used safely in the weapon simulator 10 through electric valve control because it is reduced in pressure through a regulator system also internal to the weapon simulator 10. Thus, no hoses or external connections to the weapon are needed or used. In addition, because the weapon simulator 10 operates at a medium gas pressure which is higher than the existing low-pressure systems, the electric valves 20, 22, cylinders and air passages can be miniaturized. Thus, the electric valves 20, 22 can be contained within the weapon simulator 10 by careful design, even in the case of when the weapon simulator 10 is a small firearm, such as a pistol or the like.

[0030] Comparing the present invention to the second gas system described above, various limitations of the previous system are solved by the present invention. Since the present compressed gas system 12 does not use cartridges that would have to cycle through the weapon simulator 10, there are no cartridges to purchase, wear out, or damage. Recharging of the gas system 12 occurs only once for each time that a real weapon magazine would be reloaded. Since magazines 14 can typically hold from eight to thirty cartridges, this saves numerous rechargings per magazine 14 used. That is, the present invention does not require consistent recharging of the plurality of cartridges. In addition, no cartridges need to be loaded into the magazine 14 for proper operation. Therefore, this weapon simulator 10 is much easier to use. A related benefit is that there are no cartridges to collect from the ground/floor and no rounds are exposed to damage by being stepped on. The weapon simulator 10 is much more adaptable to electronics because there is no space lost due to cartridges from the magazine 14 and through the weapon simulator 10 and because the gas flow is controlled by electric valves 20, 22. Because there are fewer moving parts without cartridges and because the chambering, firing, ejecting and extracting functions do not have

to be literally performed in the weapon simulator 10 for each shot, the simulator with the present gas system is more reliable both per-shot and over-all.

[0031] The third gas system also has limitations are solved by the present design. In particular, with the present invention, recharging occurs only once for each time that a real weapon magazine would be reloaded. Since magazines can typically hold from eight to thirty cartridges, this saves numerous rechargings per magazine 14 used. In addition, no cartridges need to be loaded into the magazine 14 of the present invention. Therefore, this weapon simulator 10 is much easier to use. As discussed above, since no cartridges are expelled, there is no "clean-up" necessary for the user. Moreover, the gas system 12 is much more adaptable for use with electronics because there is no space lost due to cartridges from the magazine and through the weapon, and also because the gas flow is controlled by electric valves 20, 22. Because there are fewer moving parts without cartridges and because the chambering, firing, ejecting and extracting functions do not have to be literally performed in the weapon for each shot, the simulator with this gas system 12 is more reliable both per-shot and over-all.

[0032] Another embodiment of the invention is illustrated in Figures 2 through 4. In this embodiment, a low-pressure gas supply 40 is used in the weapon simulator 10 in conjunction with a small, low-pressure, electrically operated pilot valve (not illustrated) that drives a larger, operated pilot valve 44. The weapon simulator 10 includes a firearm housing 11 or frame, with a cylinder and piston assembly having a piston 58 positioned in a piston chamber 59 contained within the firearm housing 11. The pilot valve 44 furthermore drives the piston assembly as desired. This arrangement allows the use of very small, low-pressure electrically operated pilot valve 44, while still providing sufficient flow for adequate recoil to accurately simulate the operation of a firearm. It should be noted that the pilot valve 44 is connected to the gas supply 40, and also to the valve chamber 47 by pilot channel 50.

[0033] In particular, the low-pressure gas supply 40 is fed to both a distal end 46a of a recoil valve 46 and the pilot valve 44 via gas supply channel 42. The recoil valve 46 preferably includes four valve gates 62 or flanges, and the recoil valve 46 is slidably positioned in the valve cavity 47 with the valve gates 62 abutting the walls of the valve cavity 47. The valve gates 62 further define a series of valve cavities: a distal valve cavity 64a, a central valve cavity 64b, and a proximal valve cavity 64c. Gasses thereby traverse the valve cavities 64a, 64b, and 64c as required for proper operation. Furthermore, a spring 48 or other

biasing means is positioned in the valve cavity 47 to apply pressure to a proximal end 46b of the recoil valve 46.

[0034] While the weapon simulator 10 is not being fired, the recoil valve 46 will remain in the position shown in Figure 2. That is, the recoil valve 46 is held by the spring 48 in the non-triggered position in the valve cavity 47. In this position, the recoil cylinder port 52 is connected to the exhaust port 54 through the central valve gap 64b, such that no pressure is applied to the cylinder and piston assembly 58. However, when an electrical signal opens the pilot valve 44, a low-pressure gas is fed to the pilot channel 50 to apply pressure to the distal end 46a of the recoil valve 46. As pressure is applied to the distal end 46a of the recoil valve 46, the recoil valve 46 is shifted toward the spring 48 and overcomes the force of the spring 48. As the recoil valve 46 moves, the distal valve gap 64a is displaced to close the exhaust port 54, and correspondingly the central valve gap 64b moves to expose the pressure port 56 and a primary gas supply channel 42. Thus, compressed gas from the gas supply 40 flows through the primary gas supply channel 42 through central valve gap 64b and into cylinder port 52. This compressed gas is thereby directed into the piston chamber 59 to force the piston 58, and thus the attached bolt 60 as well, toward the user. As a result, the desired recoil of the bolt 60 is generated.

[0035] After firing, the pilot valve 44 is then again closed, such that the spring 48 will overcome the force applied on the recoil valve 46. Consequently, the recoil valve 46 will once again move into position wherein the gas supply channel 42 is directed into proximal valve gap 64c and thus closed and the central valve gap 64b adjoins the exhaust port 54 to discharge and equalize the weapon simulator 10. The remainder of the weapon simulator 10 further returns to the desired resting position to await activation of the pilot valve 44 once again. Once in the resting position, the weapon simulator 10 waits for the next firing situation by the user.

[0036] Thus, although there have been described particular embodiments of the present invention of a new and useful GAS OPERATING SYSTEM FOR FIREARM SIMULATORS, it is not intended that such references be construed as limitations upon the scope of this invention except as set forth in the following claims.

Claims

What is claimed is:

1. An isolated weapon simulator (10) having a bolt (32) providing recoil for a user, said weapon simulator (10) being characterized by:
 - a housing (11) including a piston chamber (59) and a piston (58) positioned in said piston chamber (59), said piston (58) connected to the bolt (32);
 - a regulated gas supply (12) detachably attached to said housing (11);
 - a valve chamber (47) in said housing (11), said valve chamber (47) connected with said regulated gas supply (12) and said bolt (32); and
 - a recoil valve (46) positioned in said valve chamber (47), said recoil valve (46) positioned to control the release of gas from said regulated gas supply (12) to said piston chamber (59).
2. The weapon simulator (10) as described in claim 1 further being characterized by:
 - a recoil cylinder port (52) connecting said piston chamber (59) with said valve chamber (47);
 - wherein said recoil valve (46) controls the release of gas through said recoil cylinder port (52) into said piston chamber (59) to move said piston (58).
3. The weapon simulator (10) as described in claim 1 further being characterized by:
 - a spring (48) positioned in said valve chamber (47);
 - wherein said recoil valve (46) includes a proximal end and a distal end; and
 - wherein said spring (48) applies a force to said proximal end of said recoil valve (46) in said valve chamber (47).
4. The weapon simulator (10) as described in claim 1 further being characterized by:
 - a pilot valve (44) connected to said regulated gas supply (12); and
 - a pilot channel (50) connecting said pilot valve (44) to said valve chamber (47);
 - wherein said pilot valve (44) transmits gas to said distal end of said recoil valve (46) from said gas supply (12) to shift said recoil valve (46) in said valve chamber (47).
5. The weapon simulator (10) as described in claim 4 wherein said recoil valve (46) is characterized by:
 - at least two valve gates (62); and
 - a central valve cavity (64b) between said at least two valve gates (62).

6. The weapon simulator (10) as described in claim 4 wherein said recoil valve (46) is characterized by:

a first gate (62), a second gate (62), and a third gate (62); and

a distal valve cavity (64a) defined between said first gate (62) and said second gate (62);

wherein said central valve cavity (64b) is defined between said second gate (62) and said third gate (62).

7. The weapon simulator (10) as described in claim 6 further being characterized by:

a gas supply channel (42) through said housing (11) connecting said gas supply (12) with said valve chamber (47);

wherein said pilot valve (44) conveys gas to said distal end of said recoil valve (46) to displace said recoil valve (46) in said valve chamber (47);

wherein said central valve cavity (64b) is in communication with said gas supply channel (42) and said recoil cylinder port (52) to allow gas to engage said piston (58) in said piston chamber (59).

8. The weapon simulator (10) as described in claim 1 further being characterized by an exhaust port traversing said housing (11) from said valve chamber (47).

9. An independent weapon simulator (10) having recoil movement when fired, said weapon simulator (10) being characterized by:

a firearm housing (11);

a slide assembly (32) moveably connected to said housing (11);

means for supplying gas to forcefully displace said slide assembly (32), said gas supplying means detachably attached to said firearm housing (11); and

valve means for controlling the distribution of gas from said gas supplying means to said slide assembly (32), said valve means positioned in said firearm housing (11) between said gas supplying means and said slide assembly (32).

10. The weapon simulator (10) described in claim 9 wherein said valve means is further characterized by:

a valve chamber (47) positioned in said housing (11); and

a recoil valve (46) movably positioned in said valve chamber (47).

11. The weapon simulator (10) described in claim 12 wherein said recoil valve (46) is characterized by:
- at least two valve gates (62); and
 - a central valve cavity (64b) between said at least two valve gates (62).
12. The weapon simulator (10) as described in claim 11 wherein said recoil valve (46) is characterized by:
- a first gate (62), a second gate (62), and a third gate (62); and
 - a distal valve cavity (64a) defined between said first gate (62) and said second gate (62);
- wherein said central valve cavity (64b) is defined between said second gate (62) and said third gate (62).
13. The weapon simulator (10) as described in claim 12 further being characterized by:
- a gas supply channel (42) through said housing (11) connecting said gas supply (12) with said valve chamber (47);
- wherein said pilot valve (44) conveys gas to said distal end of said recoil valve (46) to displace said recoil valve (46) in said valve chamber (47);
- wherein said central valve cavity (64b) is in communication with said gas supply channel (42) and said recoil cylinder port (52) to allow gas to engage said piston (58) in said piston chamber (59).
14. A method for generating recoil in a weapon simulator (10) having a bolt (32) slidably attached to a firearm housing (11) being characterized by the steps of:
- a) providing a piston (58) slidably mounted in a piston chamber (59) in the firearm housing (11);
 - b) attaching a regulated gas supply (12) to the firearm housing (11), said gas supply (12) distributing compressed gas;
 - c) providing a recoil valve (46) in a valve chamber (47) having a distal end and a proximal end, said distal end of said valve chamber (47) connected to a pilot valve (44) and said proximal end of said valve chamber (47) connected to said gas supply (12);
 - d) conveying gas using said pilot valve (44) to said distal end of said valve chamber (47);
 - e) displacing said recoil valve (46) in said valve chamber (47); and
 - f) forcing gas from said gas supply (12) through said recoil valve (46) into said piston chamber (59) to generate recoil.

15. The method as described in claim 14 wherein step c) is further characterized by the step of:

 biasing said proximal end of said recoil valve (46) in said valve chamber (47) with a spring (48).

16. The method as described in claim 15 wherein step e) is further characterized by the step of:

 forcing gas from said gas supply (12) into a central valve cavity (64b) of said recoil valve (46); and

 dispersing said gas from said central valve cavity (64b) into a recoil cylinder port (52) connected with said distal end of said valve chamber (47) to overcome the biasing force of said spring (48).

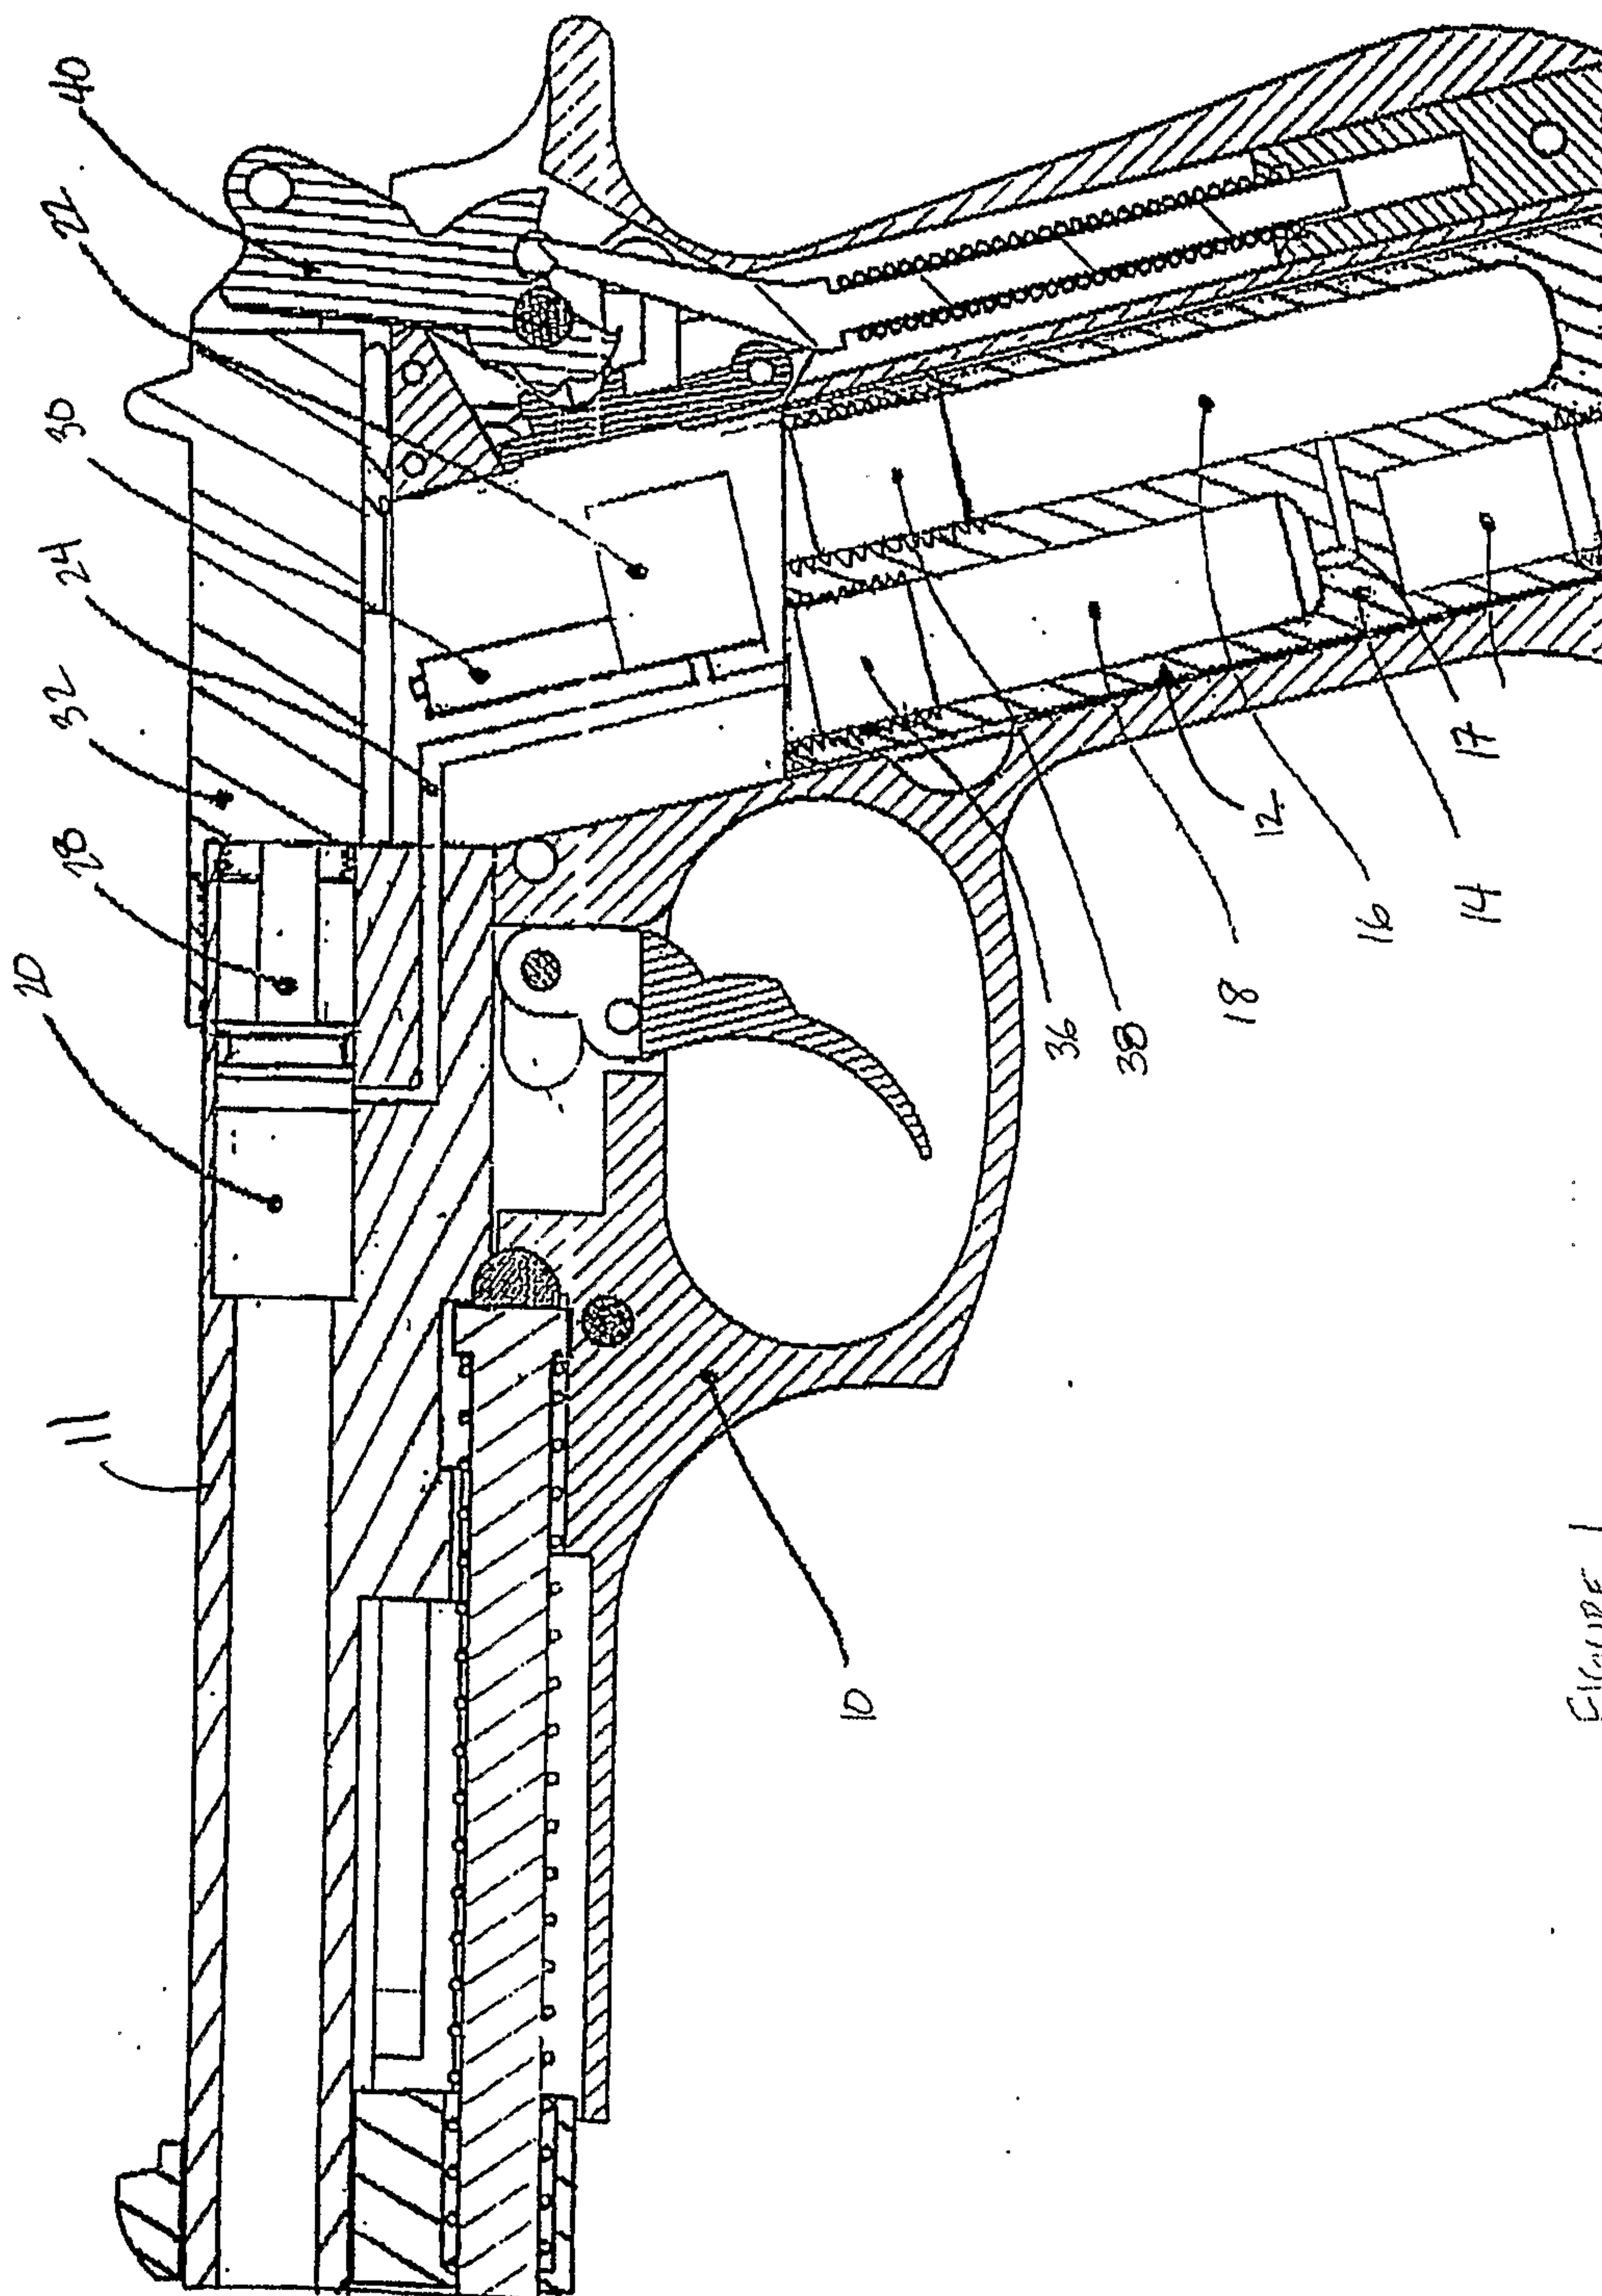


FIGURE 1

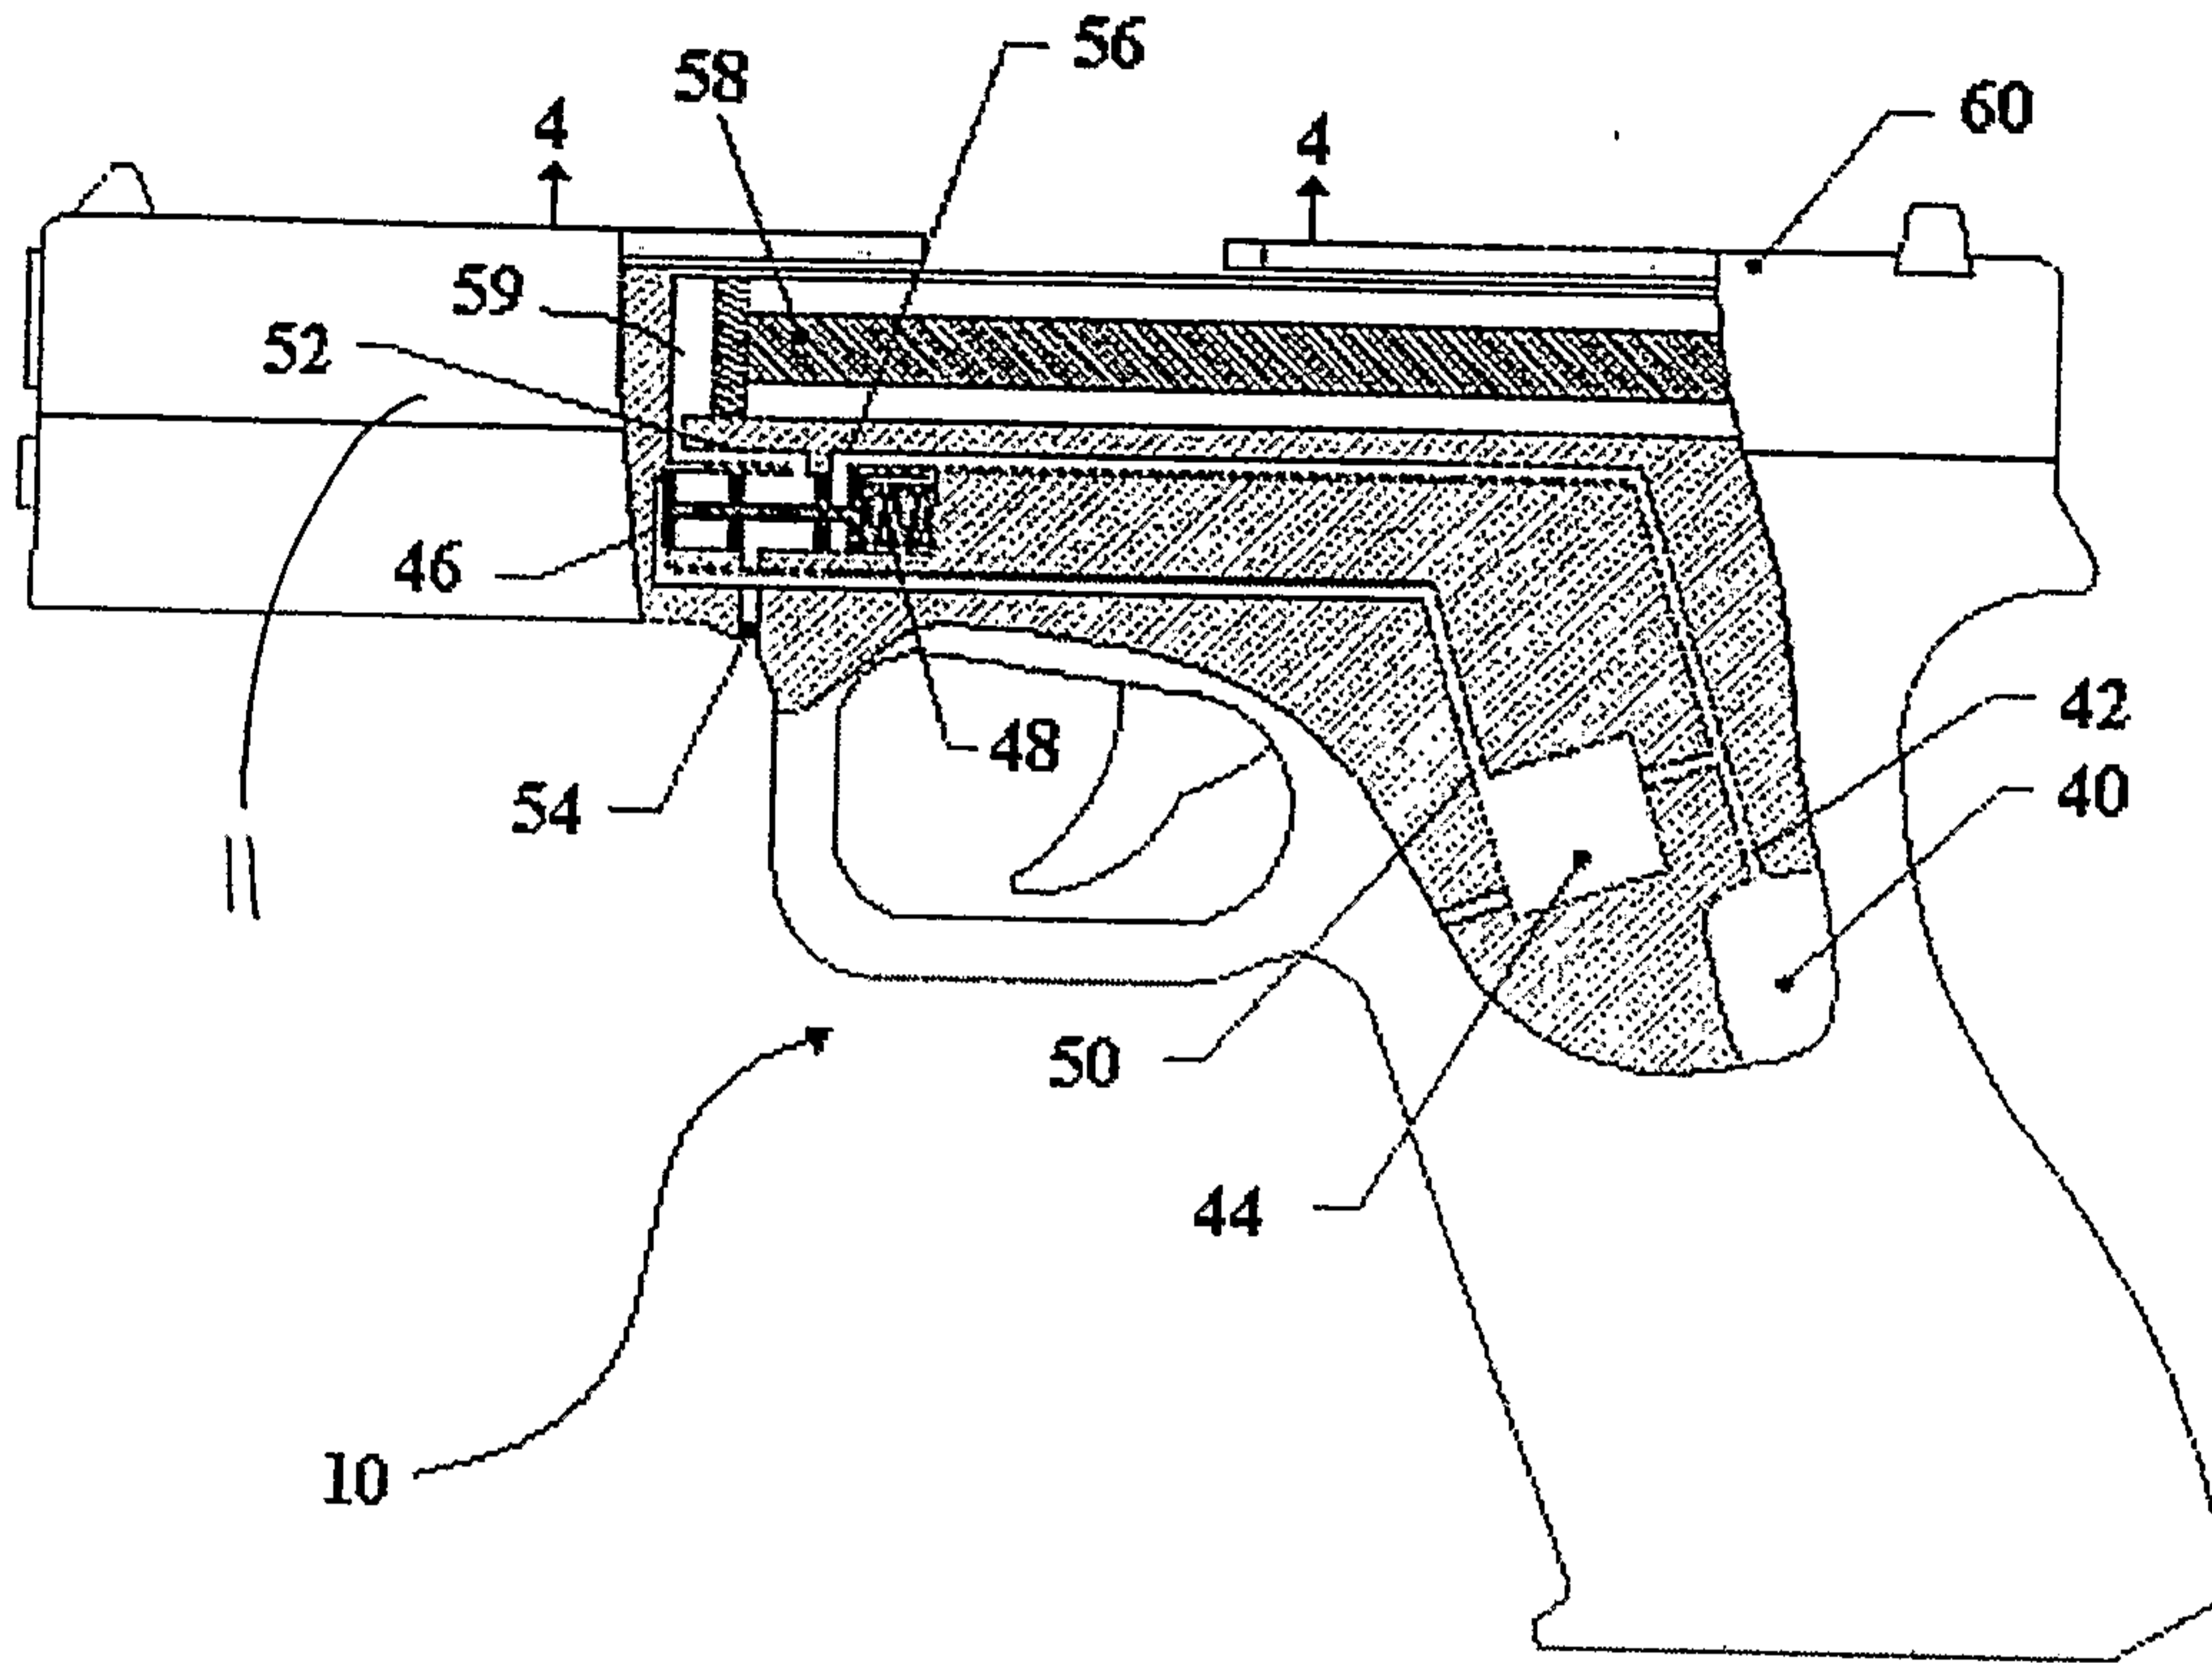


Figure 2

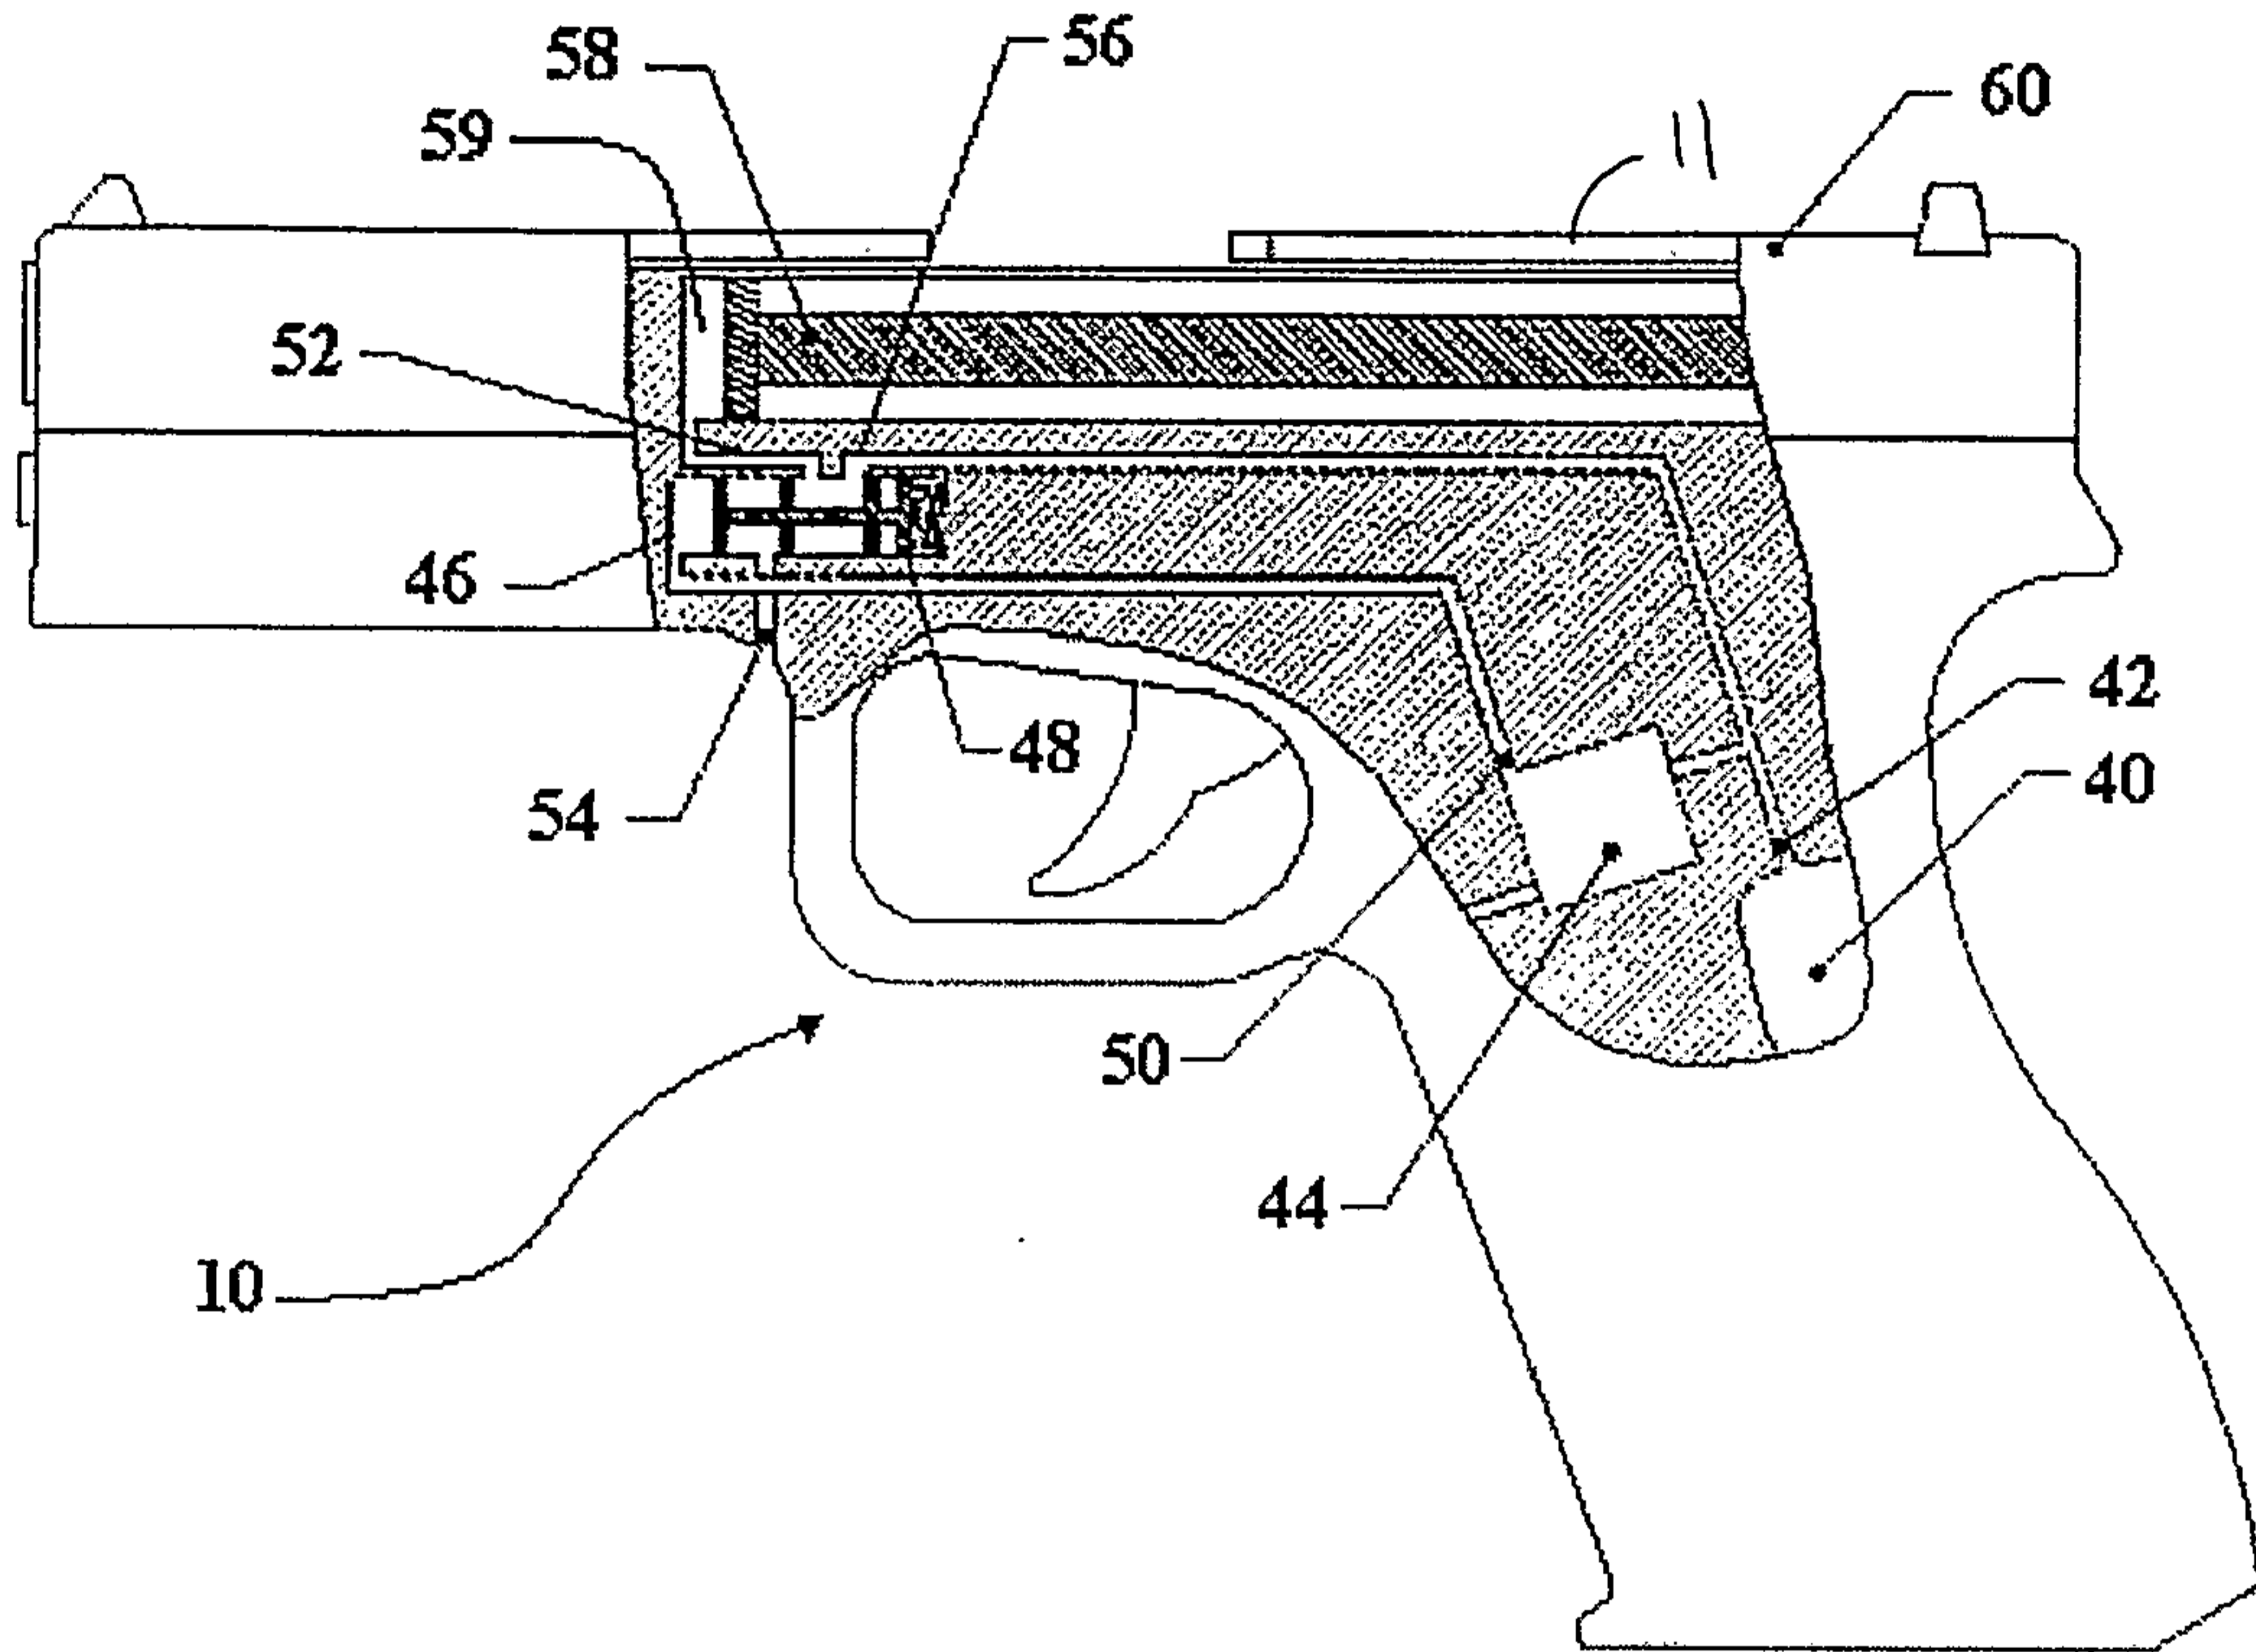


Figure 3

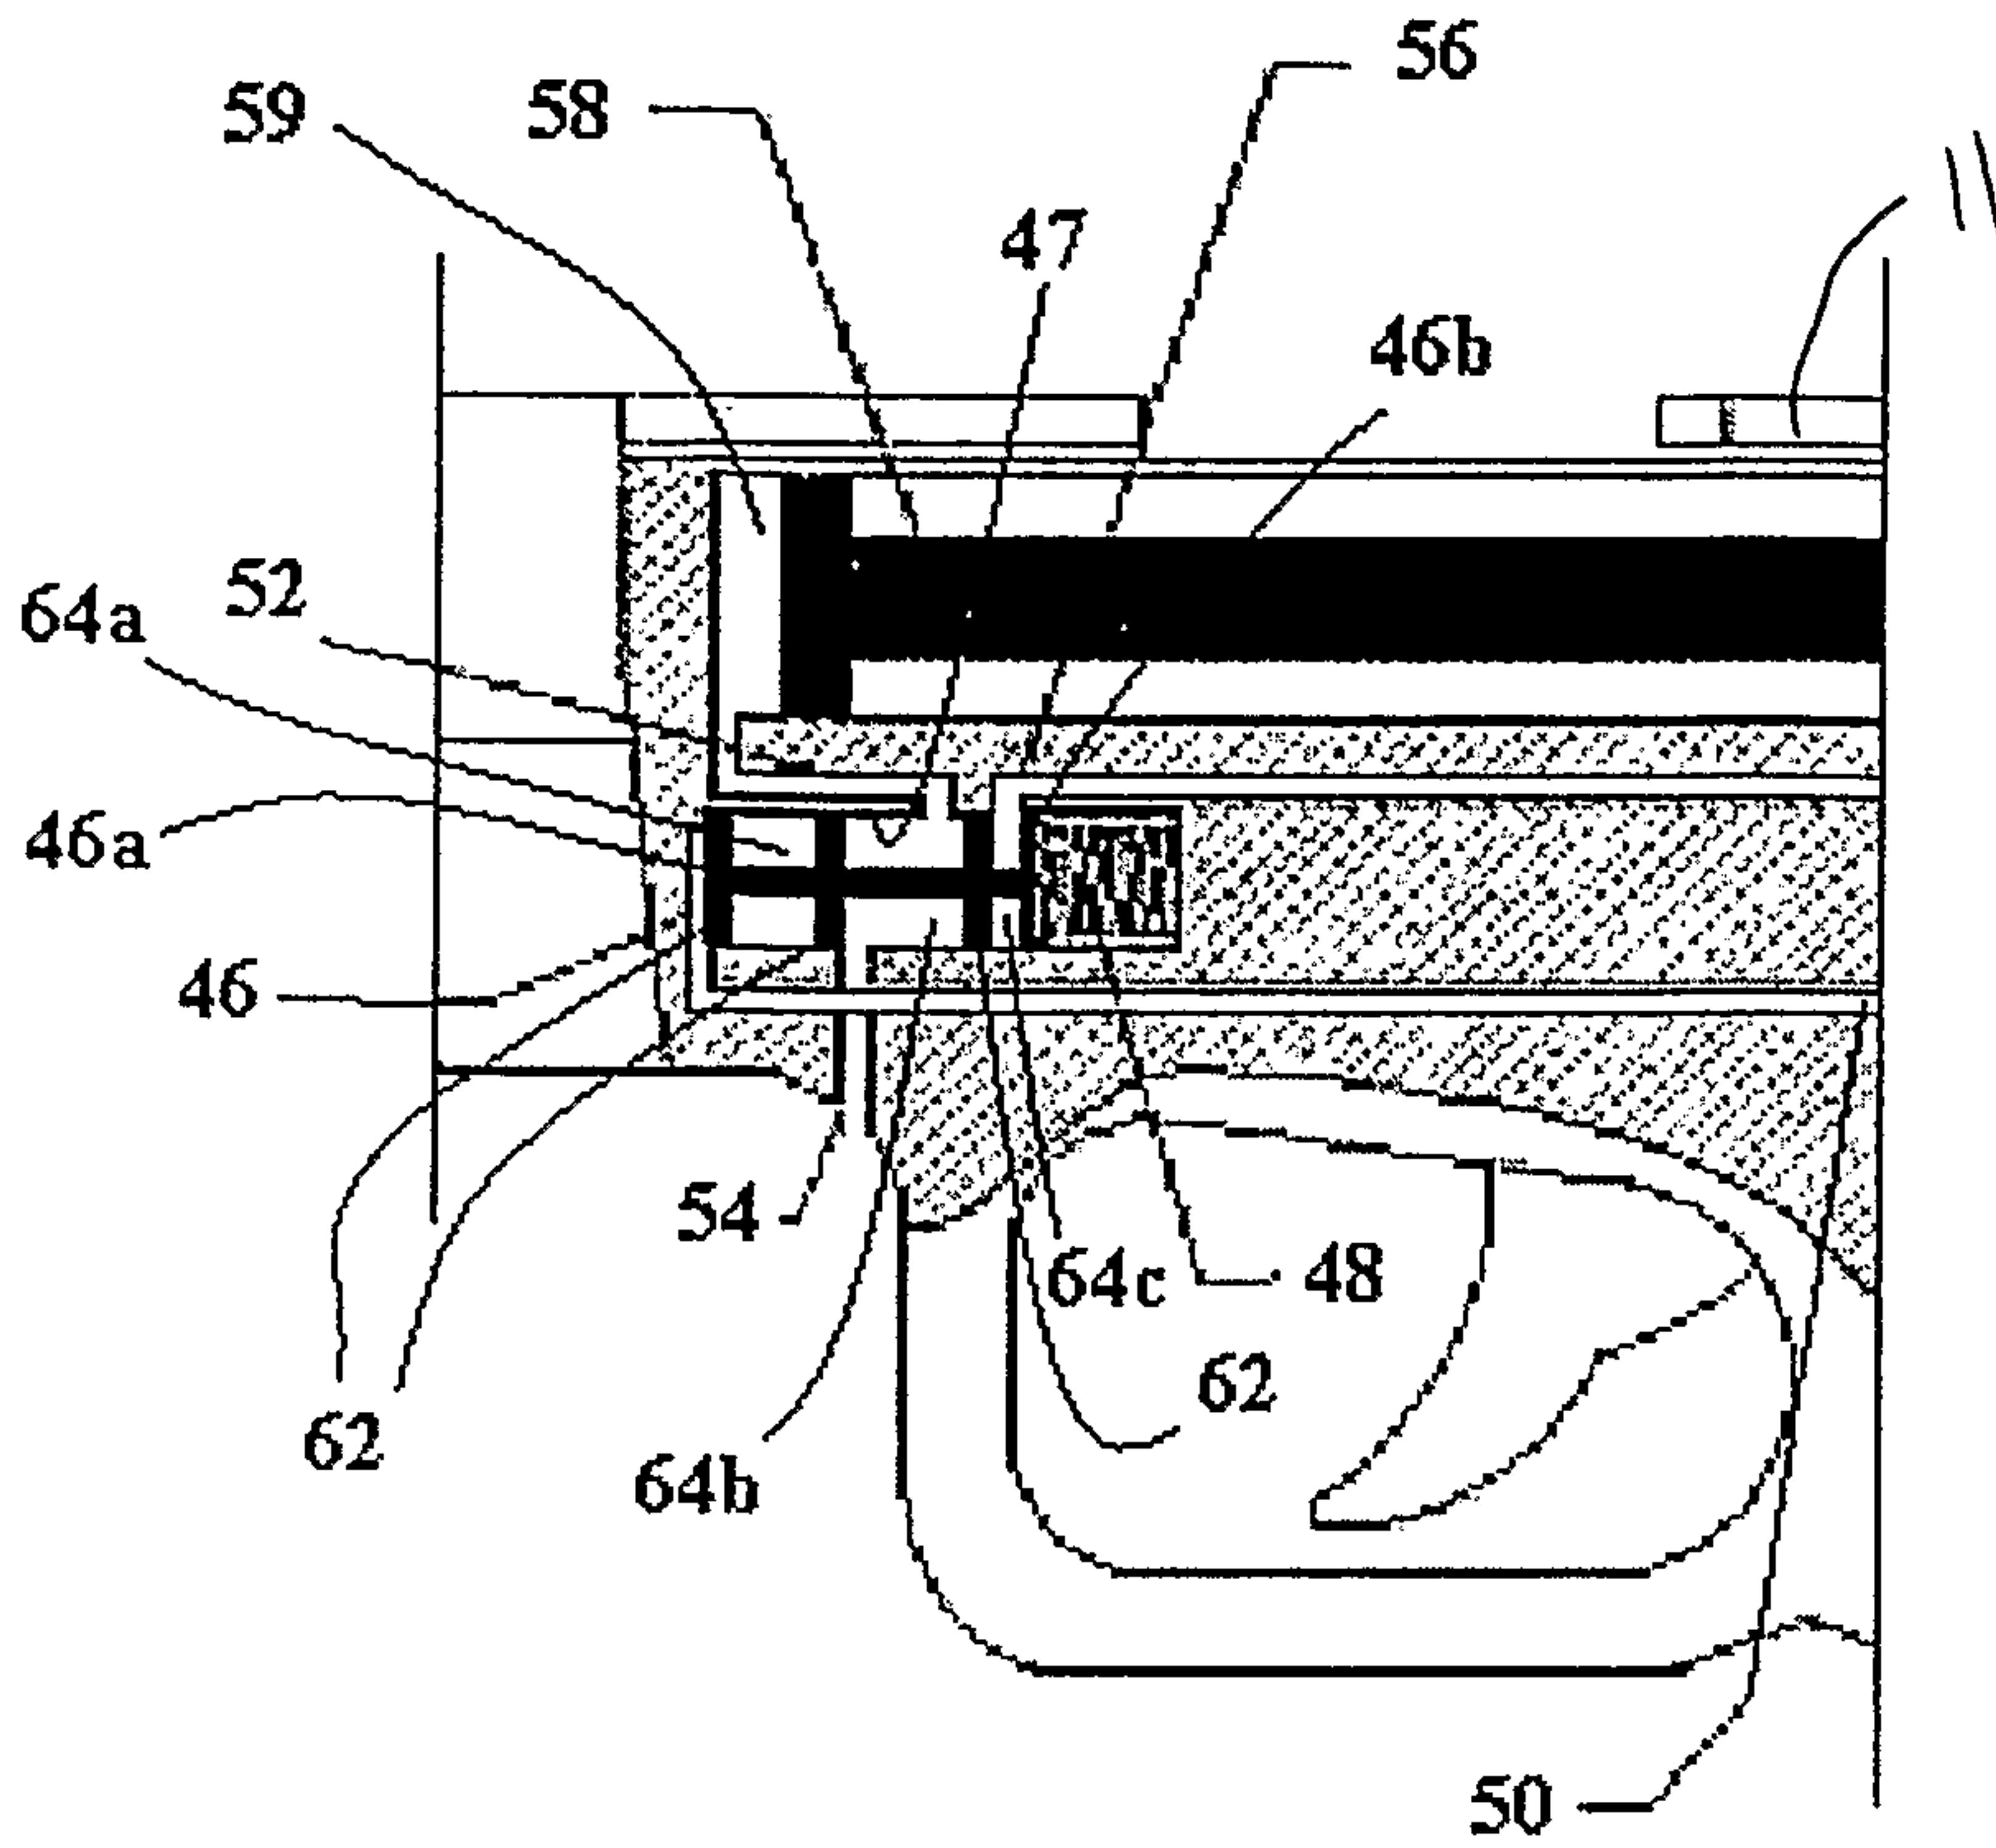


Figure 4

